



FCC TEST REPORT

47 CFR FCC Part 15.249

Report Reference No.: TRE11120060

FCC ID: N2ARSB-D421-W

Compiled by

(position+printed name+signature): File administrators Eric Zhang

Eric Zhang

Supervised by

(position+printed name+signature): Test Engineer Tim Zhang

Tim Zhang

Approved by

(position+printed name+signature): Manager Wenliang Li

Wenliang Li

Date of issue: Jun 20, 2012

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd

Address: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name: AuraSound (Hong Kong) Limited

Address: Unit 06, 39/F, Metroplaza Tower II, 223 Hing Fong Road, Kwai Fong, N.T. Hong Kong

Manufacturer's name: Wuhan AuraSound CO., LTD

Address: Three layer G building, export processing zone, Zhuankou, wuhan, china

Test specification:

Standard: 47 CFR FCC Part 15 Subpart C & 15.249

ANSI C63.10: 2009

TRF Originator: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test: 2.1 wireless sound bar

Trade Mark: /

Model/Type reference: RSB-D421

Listed Models: AS42-210

Result: Complied

TEST REPORT

Test Report No. : TRE11120060	Jun 20, 2012
	Date of issue

Equipment under Test : 2.1 wireless sound bar

Model /Type : RSB-D421

Listed Models : AS42-210

Applicant : **AuraSound (Hong Kong) Limited**

Address : Unit 06, 39/F, Metroplaza Tower II, 223 Hing Fong Road,
Kwai Fong, N.T. Hong Kong

Manufacturer : **Wuhan AuraSound CO.,LTD**

Address : Three layer G building, export processing zone,
Zhuankou, wuhan, china

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Adapter information:	5
2.4.	Short description of the Equipment under Test (EUT)	5
2.5.	EUT operation mode	5
2.6.	Related Submittal(s) / Grant (s)	5
2.7.	Modifications	5
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>6</u>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Statement of the measurement uncertainty	7
3.4.	Summary of standards and result	7
3.5.	Environmental conditions	8
3.6.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
4.1.	ANTENNA REQUIREMENT	9
4.2.	Conducted Emissions Test	10
4.3.	Radiated Emission Test	15
4.4.	Out of band emissions	24
4.5.	20dB Bandwidth Measurement	26
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>29</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>31</u>

1. TEST STANDARDS

The tests were performed according to following standards:

47 CFR FCC Rules Part 15.249: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

ANSI C63.10: 2009 – American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jul 21, 2011
Testing commenced on	:	Jul 21, 2011
Testing concluded on	:	Jun 20, 2012

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☒ 120V / 60 Hz	☐ 115V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

2.3. Adapter information:

- AC Adapter 1

MODEL:S065BQ2400270
 INPUT:100-240V~50/60Hz 1.8A
 OUTPUT: 24.0V DC 2.7A
 Power Cable: 200cm
☐ Shielded ☒ Unshielded
- AC Adapter 2

MODEL:YJS05-2402500D
 INPUT:100-240V~47/63Hz 1.5A
 OUTPUT: 24.0V DC 2.5A
 Power Cable: 200cm
☐ Shielded ☒ Unshielded

2.4. Short description of the Equipment under Test (EUT)

2.4 GHz -2483.5GHz (Transceiver)

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.5. EUT operation mode

The EUT has been tested under typical operating condition.

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: N2ARSB-D421-W filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 29, 2012. Valid time is until Feb. 28, 2015.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept. 30, 2013.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jun. 01, 2012, valid time is until Jun. 01, 2015.

IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Jan. 25, 2011, valid time is until Jan. 24, 2014.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the authorization is valid through July 07, 2013

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2010. Valid time is until Dec. 23, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2009. Valid time is until Dec. 19, 2012.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2010. Valid time is until May 06, 2013.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2013.

3.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to ETSI TR 100 028-1 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics;Part 1" and methods according to ETSI TR 100 028-2 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics;Part 2 " and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	0.09~30MHz	3.85dB	(1)
Radiated Emission	30~1000MHz	4.22dB	(1)
Radiated Emission	1~18GHz	4.35dB	(1)
99% Bandwidth	/	0.25dB	(1)
Deactivation Time	/	0.5ms	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4. Summary of standards and result

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Compliance
§15.109, §15.205(a), §15.209(a), 15.249(a), §15.249(c), §15.35	Radiated Emissions	Compliance
§15.249(d)	Out of Band Emissions	Compliance
§15.215(c)	20 dB Bandwidth	Compliance

NOTE: 1) The detailed test result please see section 4.

2) The test report merely corresponds to the test sample.

3) It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

3.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.6. Equipments Used during the Test

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	Rohde & Schwarz	ESCS30	100038	2011/10/23
2	ARTIFICIAL MAINS	Rohde & Schwarz	ESH2-Z5	100028	2011/10/23
3	PULSE LIMITER	Rohde & Schwarz	ESHSZ2	100044	2011/10/23
4	EMI TEST SOFTWARE	Rohde & Schwarz	ES-K1 1.71	N/A	2011/10/23

Radiated Emissions / Band Edge Measurement					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	Rohde & Schwarz	HL562	100015	2011/10/23
2	EMI TEST RECEIVER	Rohde & Schwarz	ESI 26	100009	2011/10/23
3	RF TEST PANEL	Rohde & Schwarz	TS / RSP	335015/ 0017	2011/10/23
4	TURNTABLE	ETS	2088	2149	2011/10/23
5	ANTENNA MAST	ETS	2075	2346	2011/10/23
6	EMI TEST SOFTWARE	Rohde & Schwarz	ESK1	N/A	2011/10/23
7	HORN ANTENNA	Rohde & Schwarz	HF906	100039	2011/10/23
8	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100020	2011/10/23
9	Broad-Band Horn Antenna	SCHWARZBECK	BBHA9170	470	2011/10/23

20dB Bandwidth					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	Rohde & Schwarz	ESCI	100106	2011/10/23

The calibration interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. ANTENNA REQUIREMENT

According to FCC Part 15C § 15.203,


- a), An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b), The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The EUT use of a Integral antenna, Please refer to the EUT Internal photos.

The EUT complied the antenna requirement.


Please refer to the EUT photos.

Antenna

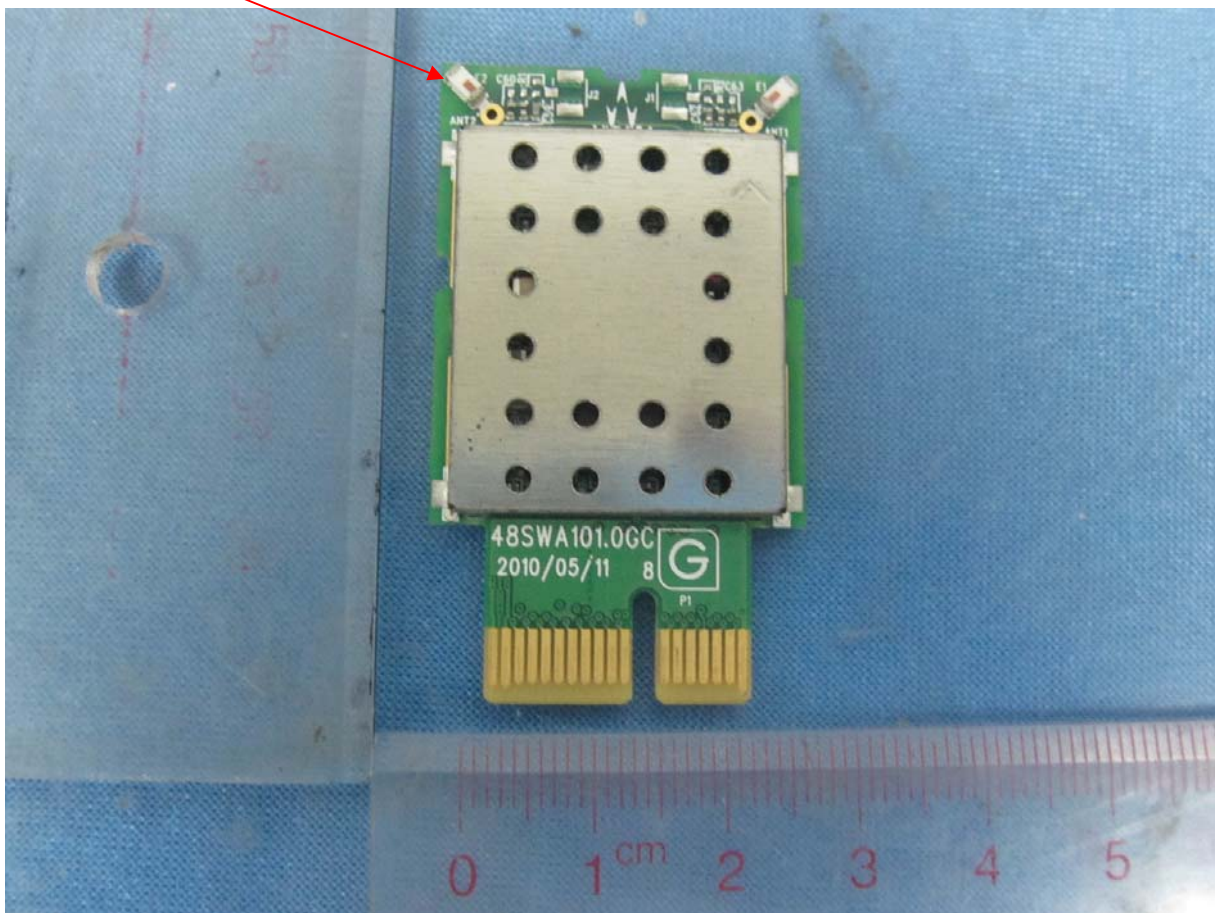

4.2. Conducted Emissions Test

TEST CONFIGURATION

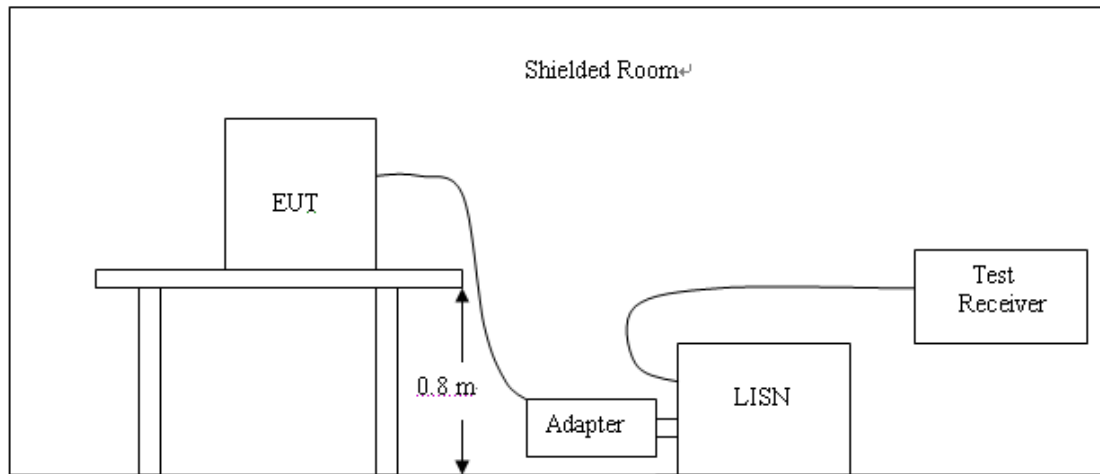

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a Weather station Transmitter; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2 Support equipment, if needed, was placed as per ANSI C63.10.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4 All support equipments received AC power from a second LISN, if any.
- 5 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 6 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 7 During the above scans, the emissions were maximized by cable manipulation.

CONDUCTED LIMIT

According to FCC Subpart 15 B § 15.207 AC Conducted Emission Limits is as following :


Frequency fange (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.1~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50
* Decreasing linearly with the logarithm of the frequency		

TEST RESULTS

Adapter 1 test data

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

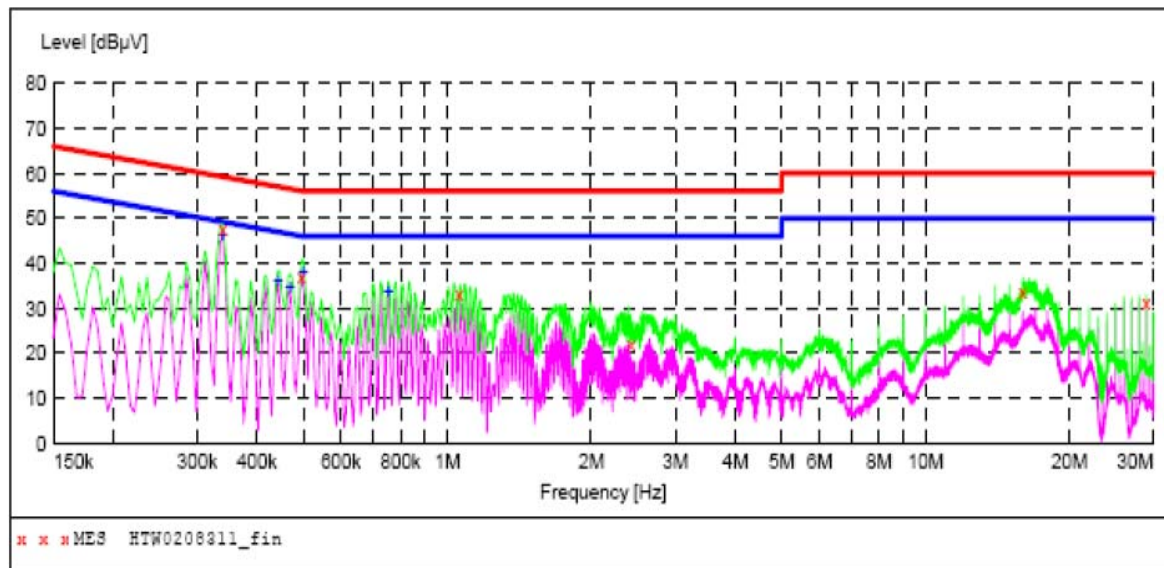

MEASUREMENT RESULT: "HTW0208311_fin"

2/8/2012 4:20PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.339000	47.80	10.1	59	11.4	QP	N	GND
0.496500	37.30	10.1	56	18.8	QP	N	GND
1.059000	33.30	10.2	56	22.7	QP	N	GND
2.427000	22.10	10.2	56	33.9	QP	N	GND
16.003500	33.70	10.3	60	26.3	QP	N	GND
29.004000	31.10	10.9	60	28.9	QP	N	GND


MEASUREMENT RESULT: "HTW0208311_fin2"

2/8/2012 4:20PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.339000	46.40	10.1	49	2.8	AV	N	GND
0.442500	36.10	10.1	47	10.9	AV	N	GND
0.469500	34.90	10.1	47	11.6	AV	N	GND
0.501000	37.90	10.1	46	8.1	AV	N	GND
0.753000	33.70	10.1	46	12.3	AV	N	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

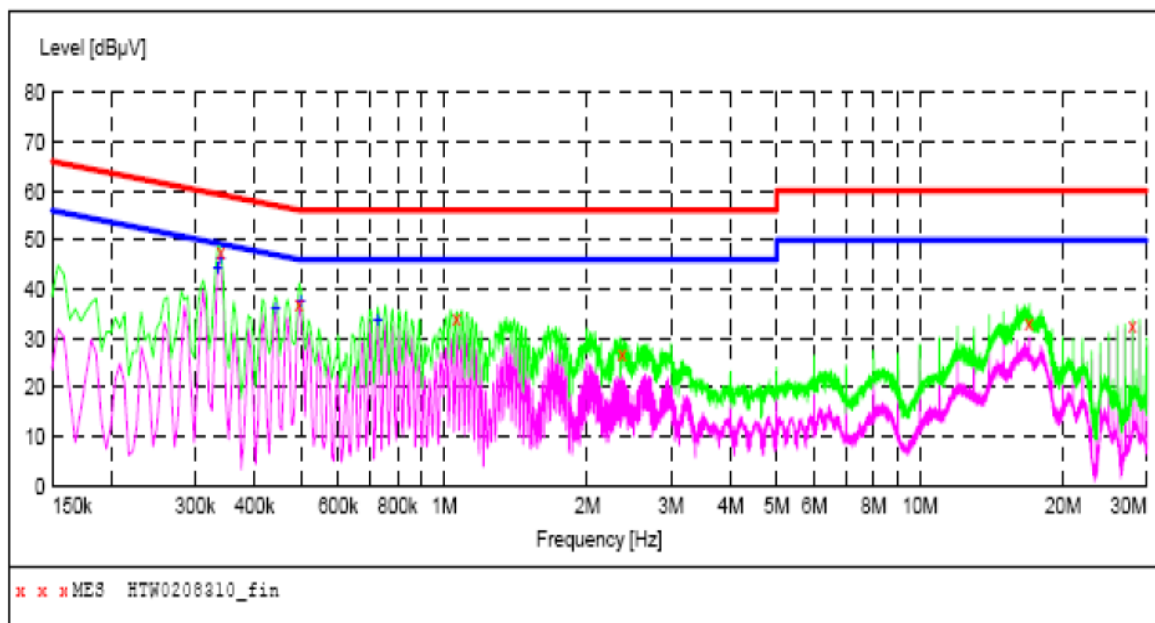**MEASUREMENT RESULT: "HTW0208310_fin"**

2/8/2012 4:13PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.339000	47.60	10.1	59	11.6	QP	L1	GND
0.496500	37.10	10.1	56	19.0	QP	L1	GND
1.063500	34.40	10.2	56	21.6	QP	L1	GND
2.368500	27.00	10.2	56	29.0	QP	L1	GND
16.998000	33.10	10.3	60	26.9	QP	L1	GND
28.000500	32.80	10.8	60	27.2	QP	L1	GND

MEASUREMENT RESULT: "HTW0208310_fin2"


2/8/2012 4:13PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.334500	44.20	10.1	49	5.1	AV	L1	GND
0.339000	46.30	10.1	49	2.9	AV	L1	GND
0.442500	36.10	10.1	47	10.9	AV	L1	GND
0.501000	37.70	10.1	46	8.3	AV	L1	GND
0.726000	33.50	10.1	46	12.5	AV	L1	GND

Adapter 2 test data

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

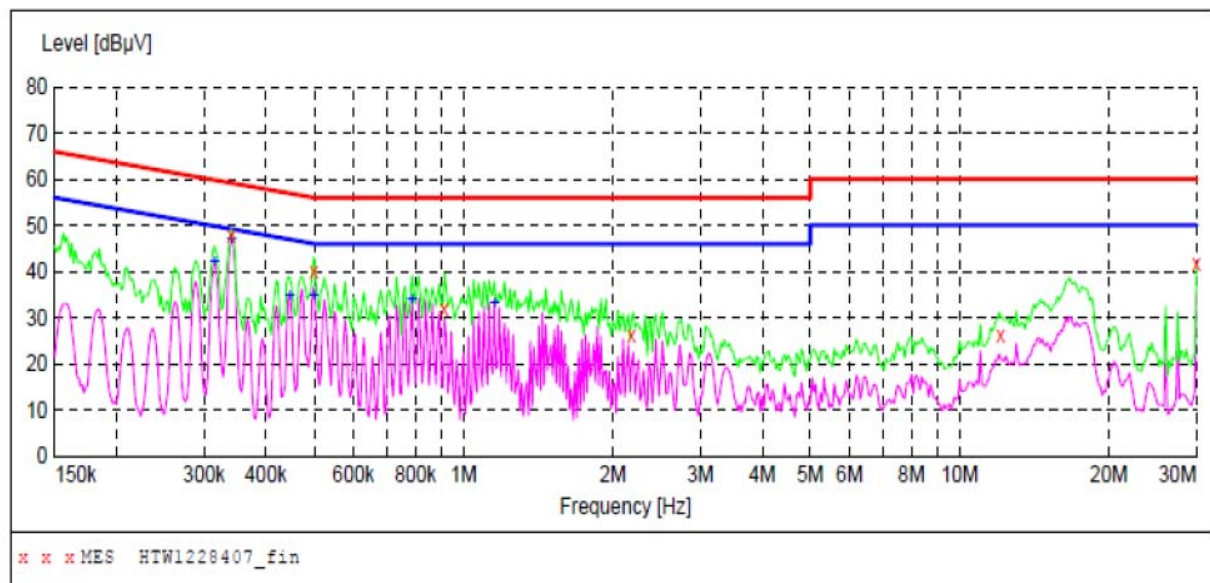**MEASUREMENT RESULT: "HTW1228407_fin"**

12/28/2011 11:29AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.340815	47.90	10.1	59	11.3	QP	N	GND
0.499605	40.10	10.1	56	15.9	QP	N	GND
0.915435	31.80	10.1	56	24.2	QP	N	GND
2.181870	26.40	10.2	56	29.6	QP	N	GND
12.101637	26.20	10.6	60	33.8	QP	N	GND
30.000000	41.80	11.3	60	18.2	QP	N	GND


MEASUREMENT RESULT: "HTW1228407_fin2"

12/28/2011 11:29AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.314708	42.00	10.1	50	7.8	AV	N	GND
0.340815	46.10	10.1	49	3.1	AV	N	GND
0.446867	34.80	10.1	47	12.1	AV	N	GND
0.499605	36.30	10.1	46	9.7	AV	N	GND
0.786825	34.10	10.1	46	11.9	AV	N	GND
1.153414	33.40	10.2	46	12.6	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

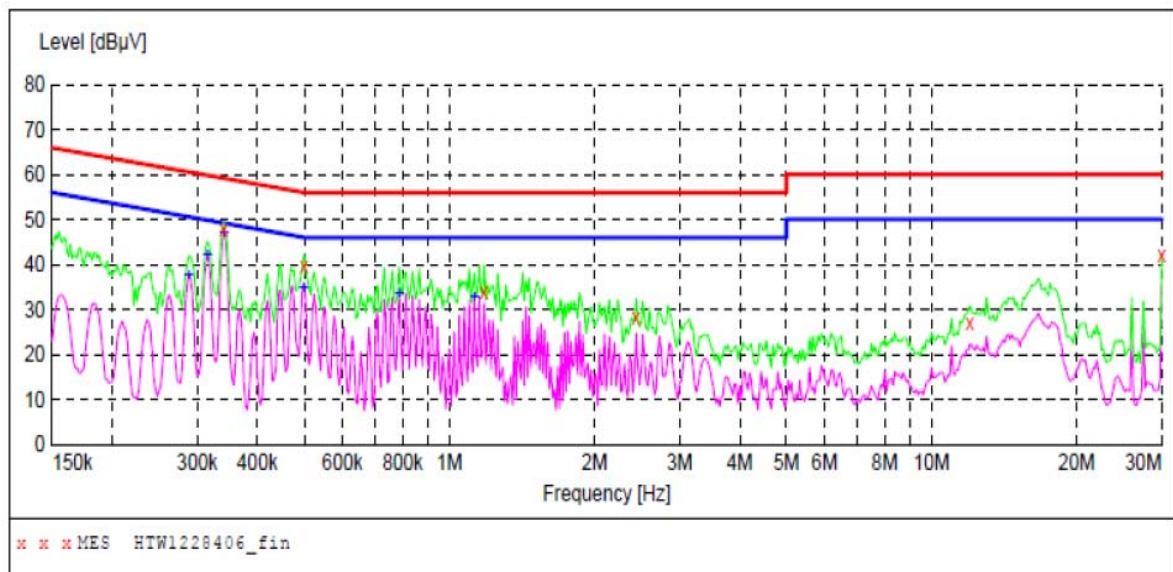**MEASUREMENT RESULT: "HTW1228406_fin"**

12/28/2011 11:18AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.340815	47.80	10.1	59	11.4	QP	L1	GND
0.499605	39.90	10.1	56	16.1	QP	L1	GND
1.181316	33.80	10.2	56	22.2	QP	L1	GND
2.439360	28.30	10.2	56	27.7	QP	L1	GND
12.005592	27.10	10.6	60	32.9	QP	L1	GND
30.000000	42.00	11.3	60	18.0	QP	L1	GND

MEASUREMENT RESULT: "HTW1228406_fin2"

12/28/2011 11:18AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.288298	37.70	10.1	51	12.9	AV	L1	GND
0.314708	42.00	10.1	50	7.8	AV	L1	GND
0.340815	46.00	10.1	49	3.2	AV	L1	GND
0.499605	36.10	10.1	46	9.9	AV	L1	GND
0.786825	33.60	10.1	46	12.4	AV	L1	GND
1.126168	32.70	10.2	46	13.3	AV	L1	GND

4.3. Radiated Emission Test


TEST CONFIGURATION

Radiated Emission Test Set-Up


Frequency range 9KHz – 30MHz

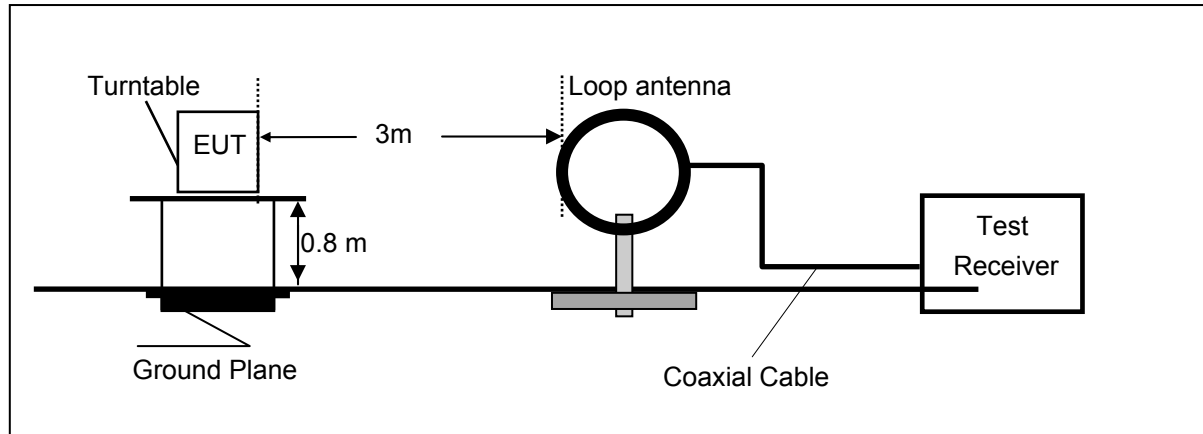

Frequency range 30MHz – 1000MHz

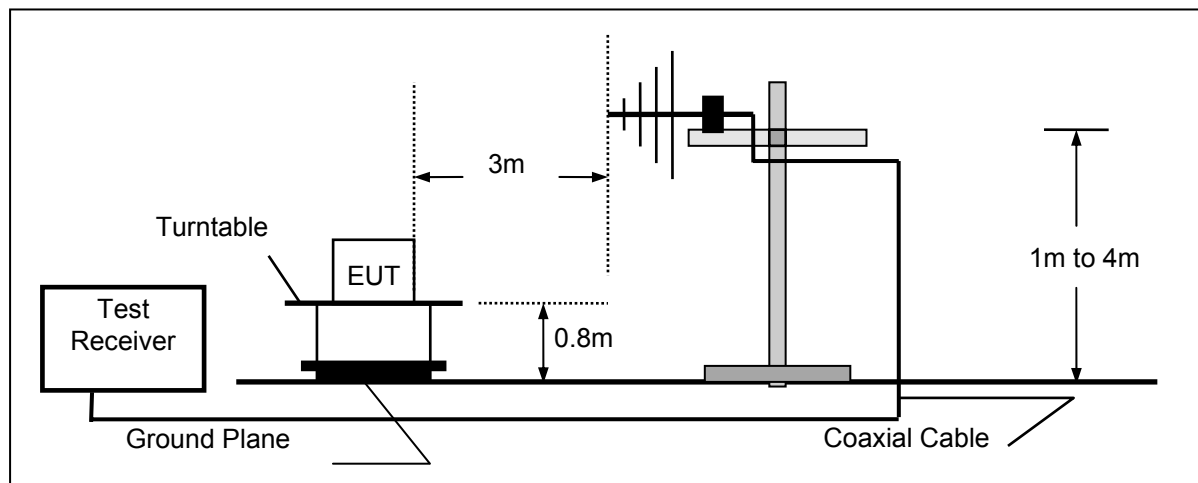

Frequency range above 1GHz-25GHz

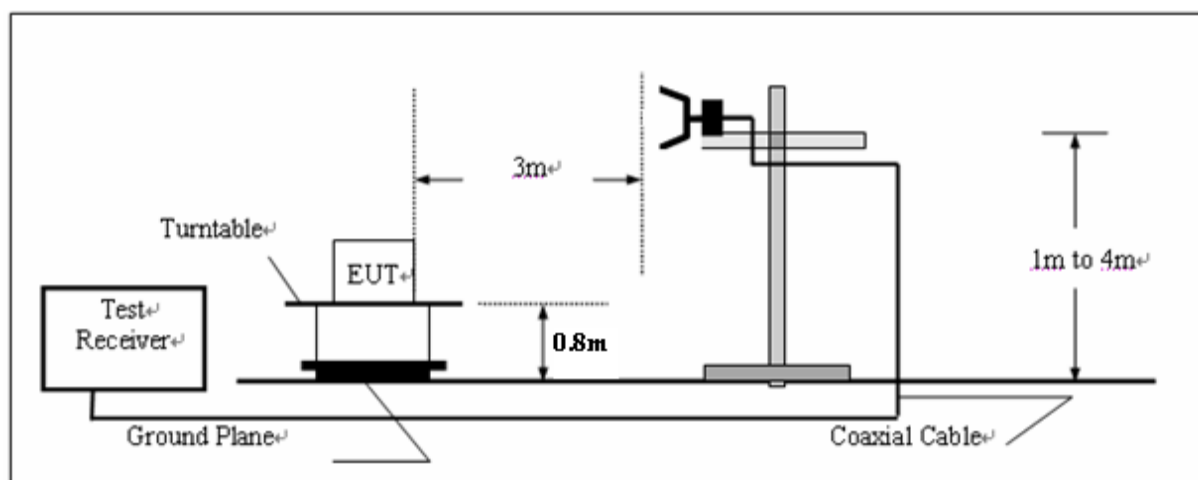

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. the fundamental frequency is 2.45GHz and the lowest crystal frequency is 32.768KHz, So the radiation emissions frequency range were tested from 9KHz to 25GHz.

RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

As per §15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per §15.249 (c), Field strength limits are specified at a distance of 3 meters.

TEST RESULTS**Radiated emission (below 30MHz)**


Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
2412 MHz									
24.58	29.29	49.54	20.25	QP	20.20	6.36	31.80	34.53	/
2438 MHz									
24.58	29.46	49.54	20.08	QP	20.20	6.36	31.80	34.70	/
2462 MHz									
24.58	30.73	49.54	18.81	QP	20.20	6.36	31.80	35.97	/

Radiated emission (below 1G)

Adapter 1 test data

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	HL562 201106

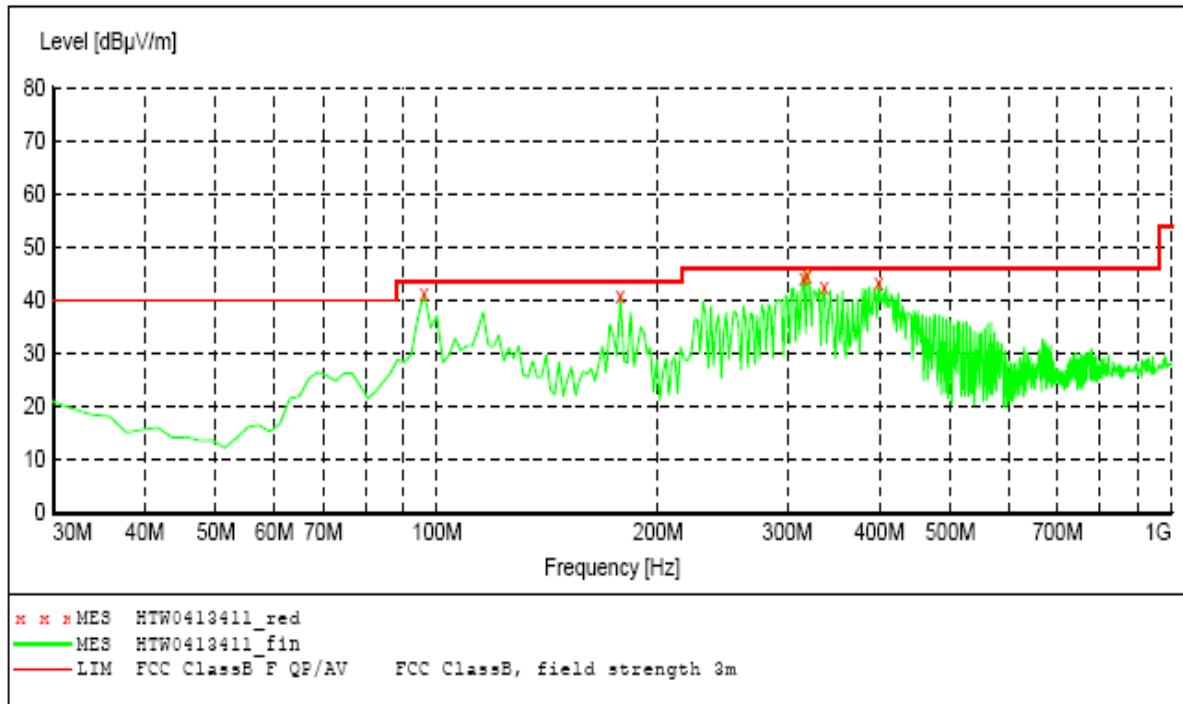


MEASUREMENT RESULT: "HTW0413411_fin"

4/13/2012 12:55PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
96.092184	41.50	-19.9	43.5	2.0	QP	300.0	182.00	HORIZONTAL
177.735471	40.70	-22.4	43.5	2.8	QP	100.0	145.00	HORIZONTAL
315.751503	44.10	-16.2	46.0	1.9	QP	100.0	222.00	HORIZONTAL
319.639279	44.60	-16.2	46.0	1.4	QP	100.0	160.00	HORIZONTAL
337.134269	42.50	-16.3	46.0	3.5	QP	100.0	236.00	HORIZONTAL
399.338677	43.30	-15.1	46.0	2.7	QP	100.0	328.00	HORIZONTAL

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	HL562 201106

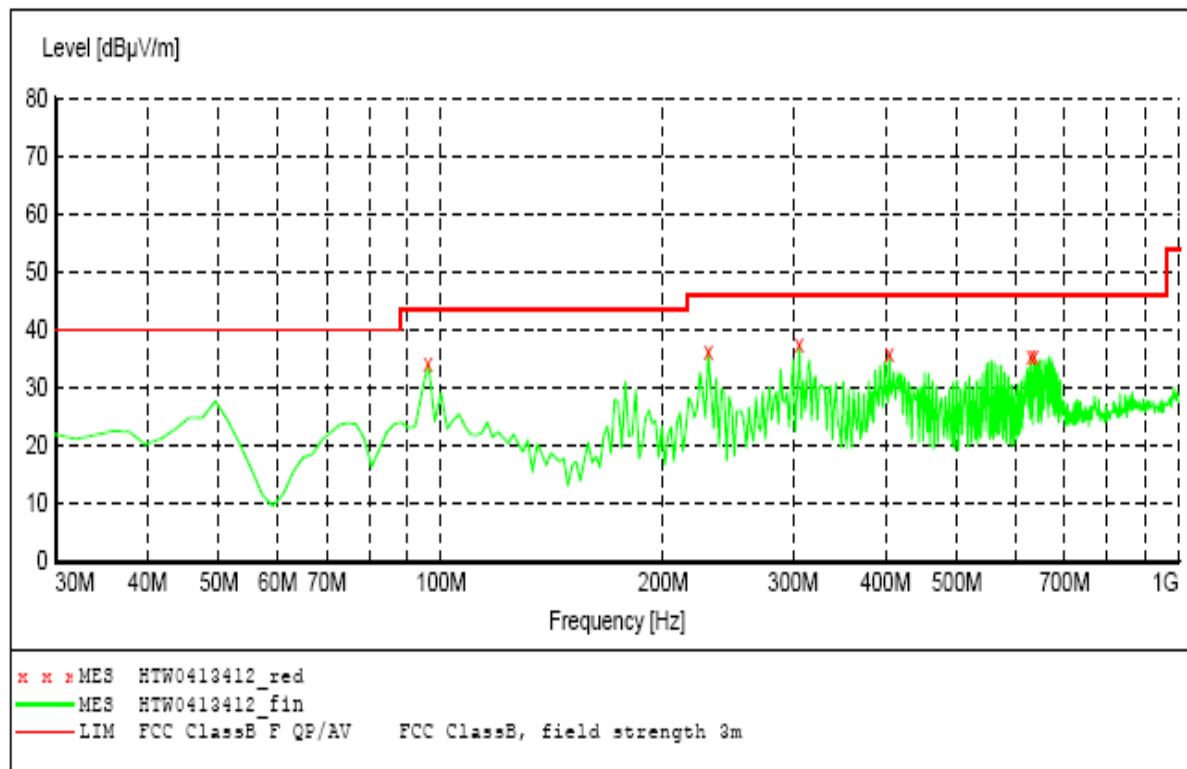***MEASUREMENT RESULT: "HTW0413412_fin"***


4/13/2012 12:42PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
96.092184	34.40	-19.9	43.5	9.1	QP	100.0	97.00	VERTICAL
230.220441	36.50	-19.6	46.0	9.5	QP	100.0	59.00	VERTICAL
306.032064	37.40	-16.6	46.0	8.6	QP	100.0	251.00	VERTICAL
405.170341	35.80	-15.1	46.0	10.2	QP	100.0	147.00	VERTICAL
630.661323	35.60	-10.8	46.0	10.4	QP	100.0	97.00	VERTICAL
636.492986	35.60	-10.6	46.0	10.4	QP	100.0	97.00	VERTICAL

Adapter 2 test data

SCAN TABLE: "test Field(30M-1G)QP"

Short Description:			Field Strength(30M-1G)			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
30.0 MHz	1.0 GHz	60.0 kHz	QuasiPeak	1.0 s	120 kHz	HL562

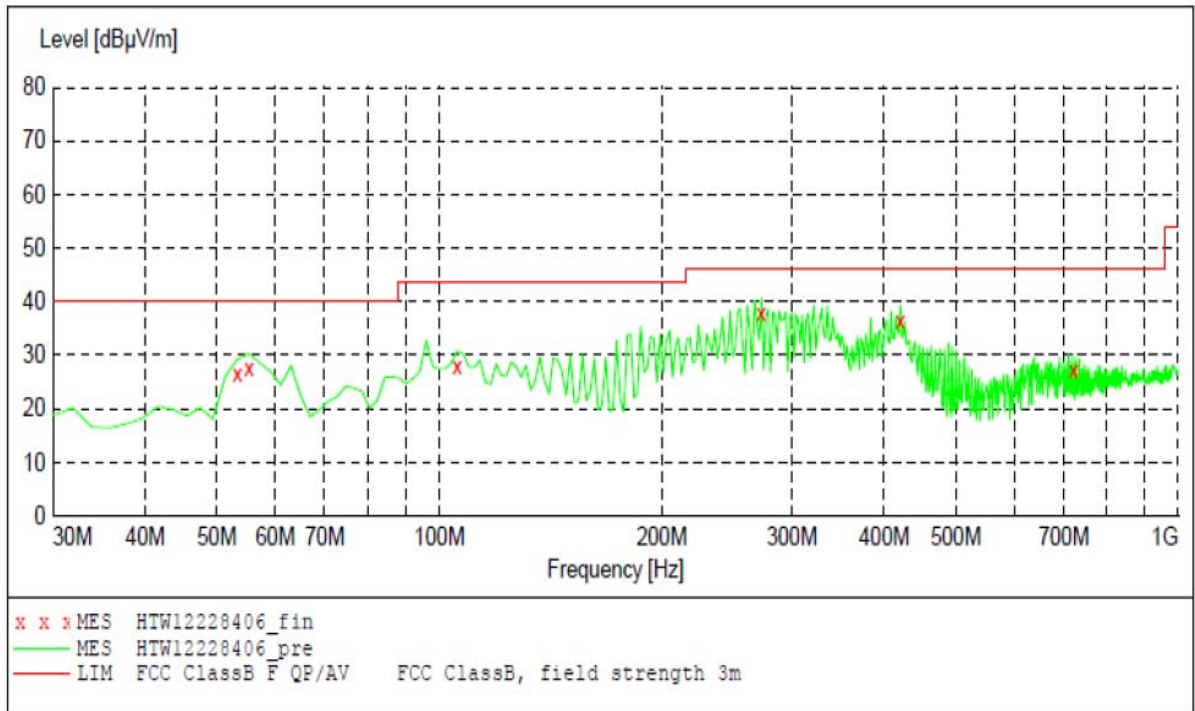
**MEASUREMENT RESULT: "HTW12228406_fin"**

12/29/2011 8:56AM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.320000	25.50	-23.7	40.0	14.5	QP	300.0	178.00	HORIZONTAL
55.270000	27.20	-24.3	40.0	12.8	QP	300.0	181.00	HORIZONTAL
105.810000	27.60	-20.3	43.5	15.9	QP	300.0	205.00	HORIZONTAL
272.980000	36.80	-18.7	46.0	9.2	QP	100.0	191.00	HORIZONTAL
420.720000	35.60	-16.1	46.0	10.4	QP	100.0	55.00	HORIZONTAL
722.020000	27.20	-10.9	46.0	18.8	QP	100.0	167.00	HORIZONTAL

SCAN TABLE: "test Field(30M-1G)QP"

Short Description:		Field Strength(30M-1G)				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	QuasiPeak	1.0 s	120 kHz	HL562

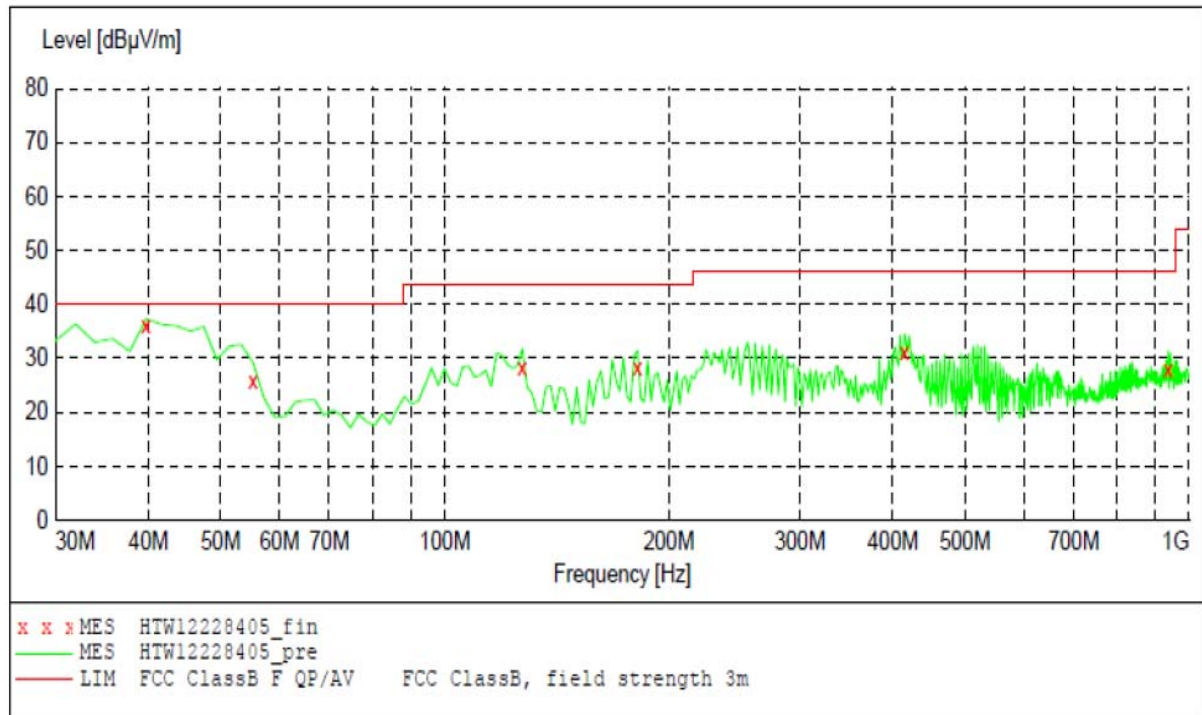**MEASUREMENT RESULT: "HTW12228405_fin"**

12/29/2011 8:41AM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
39.710000	35.20	-17.0	40.0	4.8	QP	100.0	355.00	VERTICAL
55.270000	25.10	-24.3	40.0	14.9	QP	100.0	157.00	VERTICAL
127.190000	28.80	-20.6	43.5	14.7	QP	100.0	259.00	VERTICAL
181.620000	28.70	-22.9	43.5	14.8	QP	100.0	0.00	VERTICAL
414.880000	30.60	-16.0	46.0	15.4	QP	100.0	188.00	VERTICAL
937.790000	27.30	-8.7	46.0	18.7	QP	100.0	194.00	VERTICAL

Radiated emission (above 1G)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	*2412.00	91.69 PK	114.00	22.31	1.00 H	360	94.89	28.3	4.90	-36.6	-3.40
1	*2412.00	68.98 AV	94.00	25.02	1.00 H	360	72.18	28.3	4.90	-36.6	-3.40
2	4824.00	48.98 PK	74.00	25.02	1.00 H	359	45.58	32.7	7.00	-36.5	3.20
2	4824.00	40.15 AV	54.00	13.85	1.00 H	359	36.75	32.7	7.00	-36.5	3.20
3	7236.00	51.17 PK	74.00	22.83	1.00 H	152	41.77	35.8	8.90	-35.3	9.40
3	7236.00	43.62 AV	54.00	10.38	1.00 H	152	34.22	35.8	8.90	-35.3	9.40
4	9648.00	51.02 PK	74.00	22.98	1.00 H	140	38.42	37.2	10.20	-34.8	12.60
4	9648.00	43.25 AV	54.00	10.75	1.00 H	140	30.65	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	*2412.00	97.70 PK	114.00	16.30	1.00 V	124	100.90	28.3	4.90	-36.6	-3.40
1	*2412.00	77.48 AV	94.00	16.52	1.00 V	124	80.68	28.3	4.90	-36.6	-3.40
2	4824.00	52.69 PK	74.00	21.31	1.00 V	339	49.29	32.7	7.00	-36.5	3.20
2	4824.00	43.26 AV	54.00	10.74	1.00 V	339	39.86	32.7	7.00	-36.5	3.20
3	7236.00	52.19 PK	74.00	21.81	1.00 V	340	42.79	35.8	8.90	-35.3	9.40
3	7236.00	41.52 AV	54.00	12.48	1.00 V	340	32.12	35.8	8.90	-35.3	9.40
4	9648.00	53.64 PK	74.00	20.36	1.00 V	20	41.04	37.2	10.20	-34.8	12.60
4	9648.00	43.57 AV	54.00	10.43	1.00 V	20	30.97	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (2438MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	*2438.00	91.56 PK	114.00	22.44	1.00 H	153	94.76	28.3	5.10	-36.6	-3.20
1	*2438.00	67.46 AV	94.00	26.54	1.00 H	153	70.66	28.3	5.10	-36.6	-3.20
2	4876.00	46.12 PK	74.00	27.88	1.00 H	202	42.72	32.3	7.60	-36.5	3.40
2	4876.00	35.06 AV	54.00	18.94	1.00 H	202	31.66	32.3	7.60	-36.5	3.40
3	7314.00	51.36 PK	74.00	22.64	1.00 H	355	41.96	36.1	8.60	-35.3	9.40
3	7314.00	39.48 AV	54.00	14.52	1.00 H	355	30.08	36.1	8.60	-35.3	9.40
4	9752.00	53.63 PK	74.00	20.37	1.00 H	28	41.03	37.2	10.20	-34.8	12.60
4	9752.00	41.20 AV	54.00	12.80	1.00 H	28	28.60	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (2438MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	*2438.00	96.47 PK	114.00	17.53	1.00 V	121	99.67	28.3	5.10	-36.6	-3.20
1	*2438.00	77.01 AV	94.00	16.99	1.00 V	121	80.21	28.3	5.10	-36.6	-3.20
2	4876.00	47.23 PK	74.00	26.77	1.00 V	97	43.83	32.3	7.60	-36.5	3.40
2	4876.00	35.13 AV	54.00	18.87	1.00 V	97	31.73	32.3	7.60	-36.5	3.40
3	7314.00	59.52 PK	74.00	14.48	1.00 V	288	50.12	36.1	8.60	-35.3	9.40
3	7314.00	39.78 AV	54.00	14.22	1.00 V	288	30.38	36.1	8.60	-35.3	9.40
4	9752.00	49.85 PK	74.00	24.15	1.00 V	89	37.25	37.2	10.20	-34.8	12.60
4	9752.00	38.55 AV	54.00	15.45	1.00 V	89	25.95	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	*2462.00	90.19	PK	114.00	23.81	1.00 H	154	93.49	28.6	4.70	-36.6	-3.30
1	*2462.00	66.96	AV	94.00	27.04	1.00 H	154	70.26	28.6	4.70	-36.6	-3.30
2	4924.00	49.24	PK	74.00	24.76	1.00 H	100	45.44	33.0	7.00	-36.2	3.80
2	4924.00	31.91	AV	54.00	22.09	1.00 H	100	28.11	33.0	7.00	-36.2	3.80
3	7386.00	55.79	PK	74.00	18.21	1.00 H	190	46.39	36.2	8.50	-35.3	9.40
3	7386.00	40.62	AV	54.00	13.38	1.00 H	190	31.22	36.2	8.50	-35.3	9.40
4	9848.00	50.56	PK	74.00	23.44	1.00 H	113.	37.96	37.2	10.20	-34.8	12.60
4	9848.00	30.52	AV	54.00	23.48	1.00 H	113	17.92	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	*2462.00	96.20	PK	114.00	17.80	1.00 V	247	99.50	28.6	4.70	-36.6	-3.30
1	*2462.00	76.45	AV	94.00	17.55	1.00 V	247	79.75	28.6	4.70	-36.6	-3.30
2	4924.00	54.93	PK	74.00	19.07	1.00 V	90	51.13	33.0	7.00	-36.2	3.80
2	4924.00	45.83	AV	54.00	8.17	1.00 V	90	42.03	33.0	7.00	-36.2	3.80
3	7386.00	63.60	PK	74.00	10.40	1.00 V	29	54.20	36.2	8.50	-35.3	9.40
3	7386.00	40.57	AV	54.00	13.43	1.00 V	29	31.17	36.2	8.50	-35.3	9.40
4	9848.00	56.22	PK	74.00	17.78	1.00 V	222	43.62	37.2	10.20	-34.8	12.60
4	9848.00	33.57	AV	54.00	20.43	1.00 V	222	20.97	37.2	10.20	-34.8	12.60

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) +Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. The limit value is defined as per 15.249
 6. "** ": Fundamental frequency


4.4. Out of band emissions

TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBM to 300 KHz, to measure the conducted peak band edge.

EUT Setup

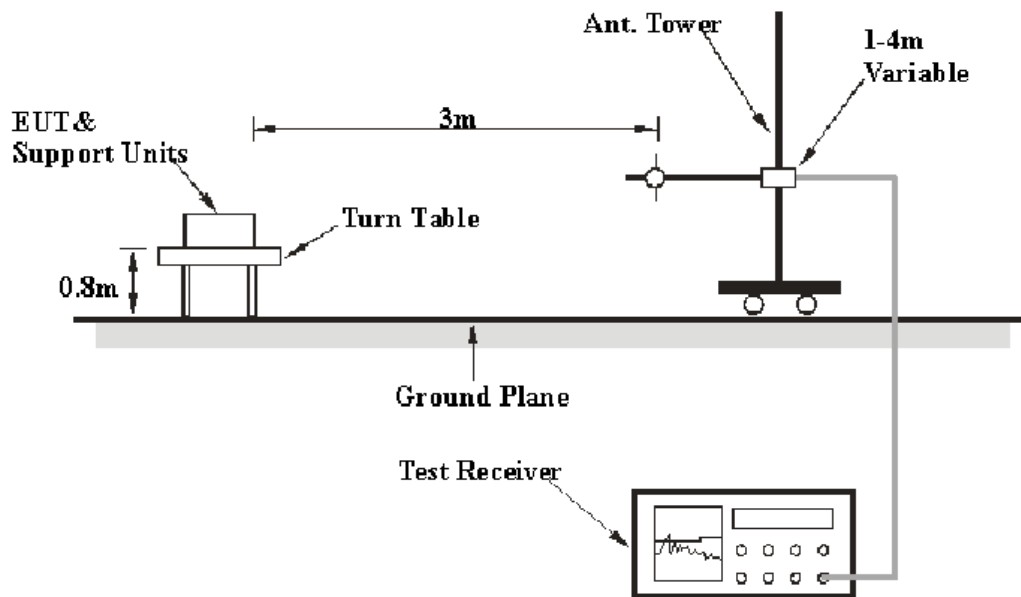

LIMIT

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

TEST RESULTS

Test Mode: Transmitting

Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Margin (dB)	Detector	Polarization
Out of left side band					
2390.00	62.14	74	11.86	PK	Horizontal
2390.00	48.13	54	5.87	AV	Horizontal
2390.00	58.70	74	15.30	PK	Vertical
2390.00	46.77	54	7.23	AV	Vertical
Out of right side band					
2483.50	52.99	74	21.01	PK	Horizontal
2483.50	40.57	54	13.43	AV	Horizontal
2483.50	54.56	74	19.44	PK	Vertical
2483.50	42.57	54	11.43	AV	Vertical


Note: 1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

2. The average measurement was not performed when the peak measured data under the limit of average detection.

3. The test data is the worst case data in the restrict band.

4.5. 20dB Bandwidth Measurement

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The spectrum analyzer center frequency is set to the transmitter frequency. The RBW is set to 100 KHz and VBW is set 300 KHz.


LIMIT

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

TEST RESULTS


Operating Frequency	Limits(MHz)		Result
	Lower Frequency	Upper Frequency	
Bottom Channel	>2400	<2483.5	PASS
Middle Channel	>2400	<2483.5	PASS
Top Channel	>2400	<2483.5	PASS

Low Channel

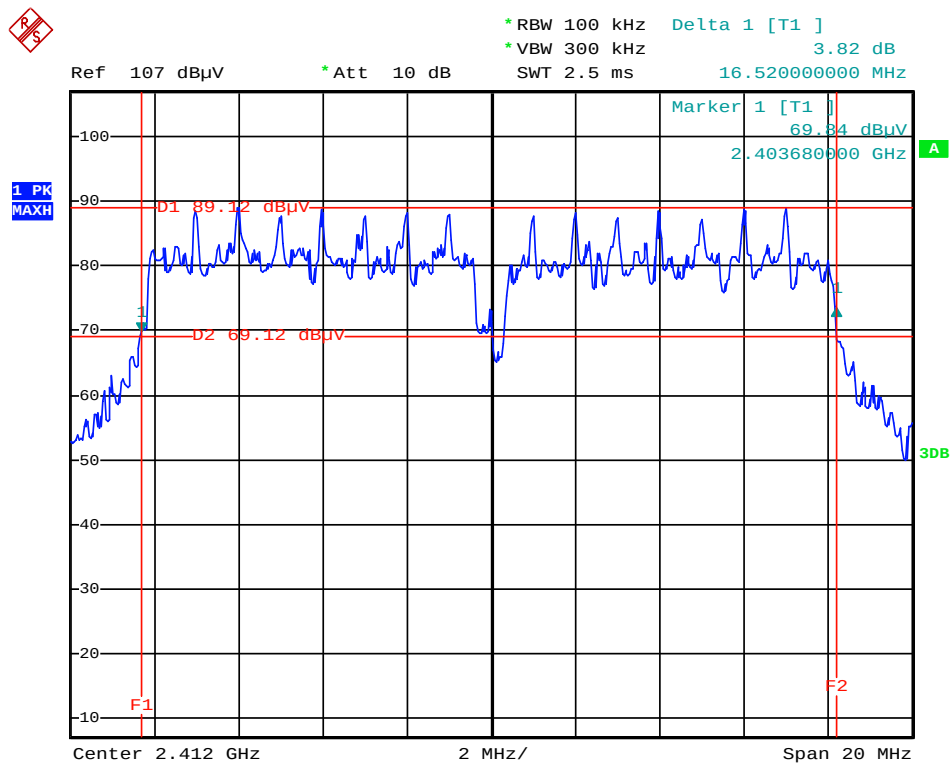


Date: 19.APR.2012 11:14:26

Mid Channel

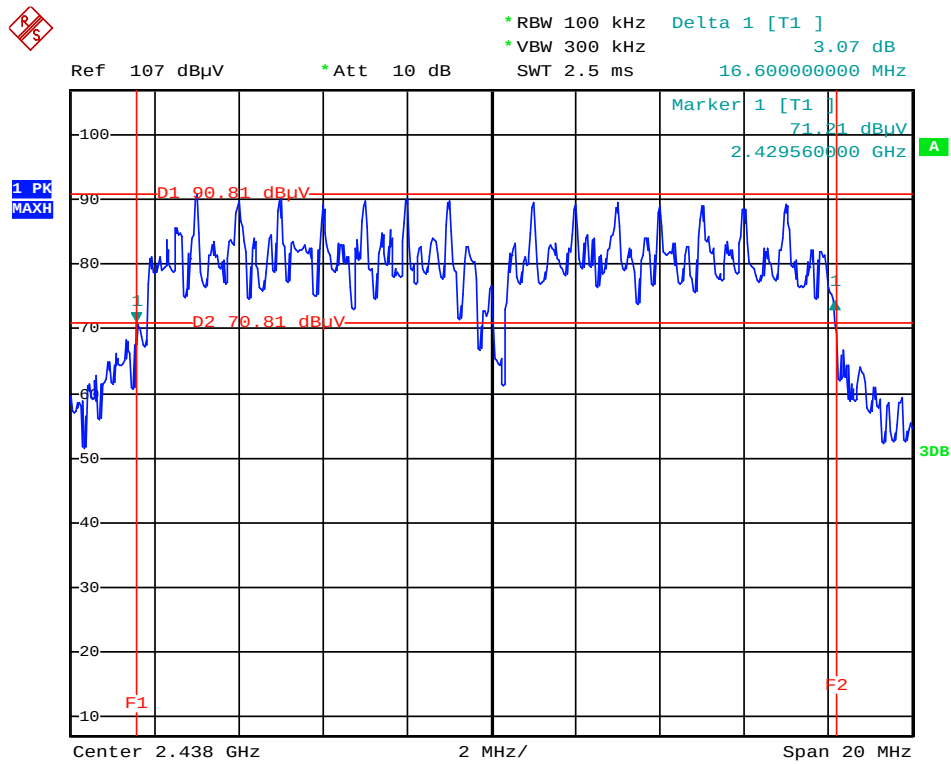

Date: 19.APR.2012 11:16:47

High Channel

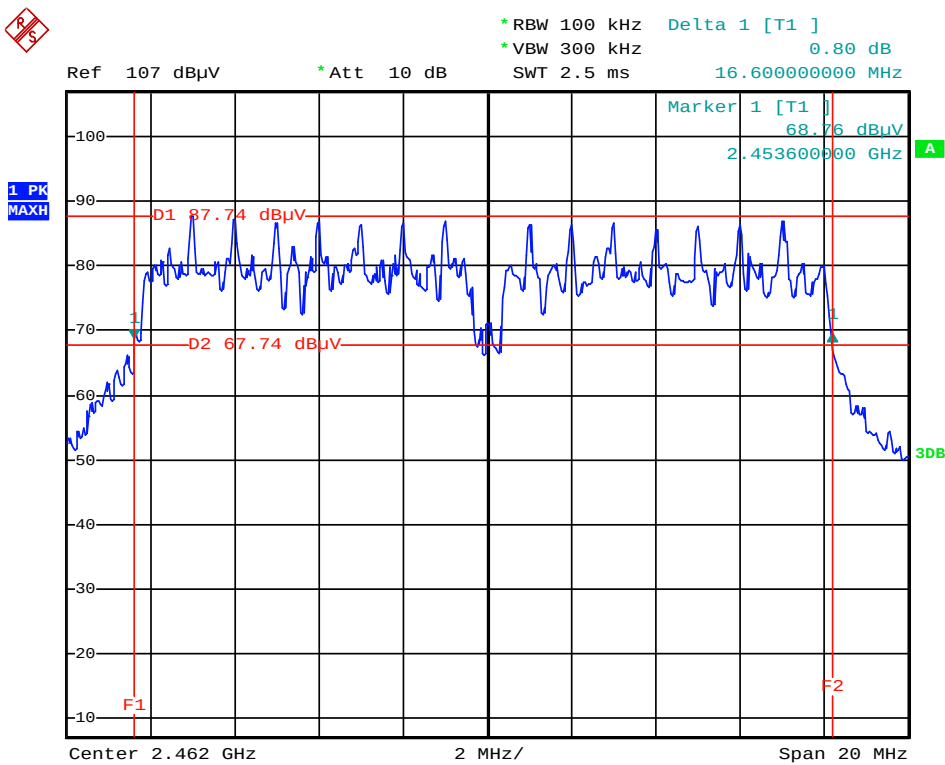

Date: 19.APR.2012 11:21:10

5. Test Setup Photos of the EUT








6. External and Internal Photos of the EUT




External Photos




Internal Photos

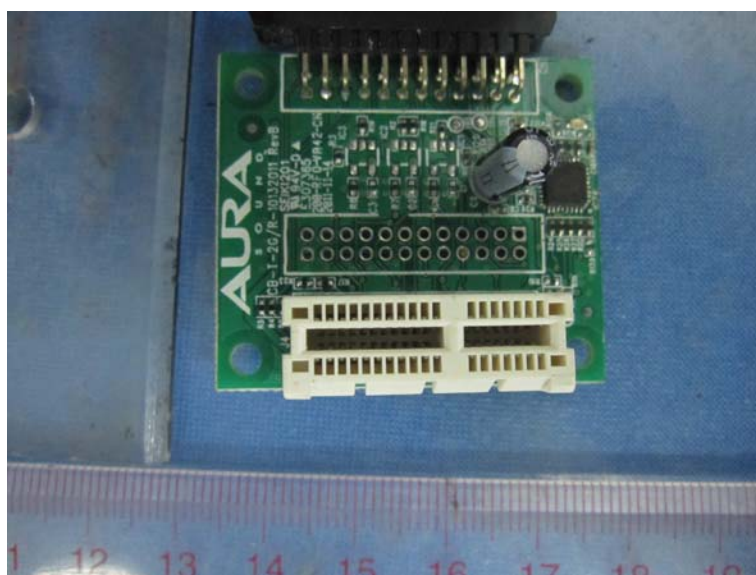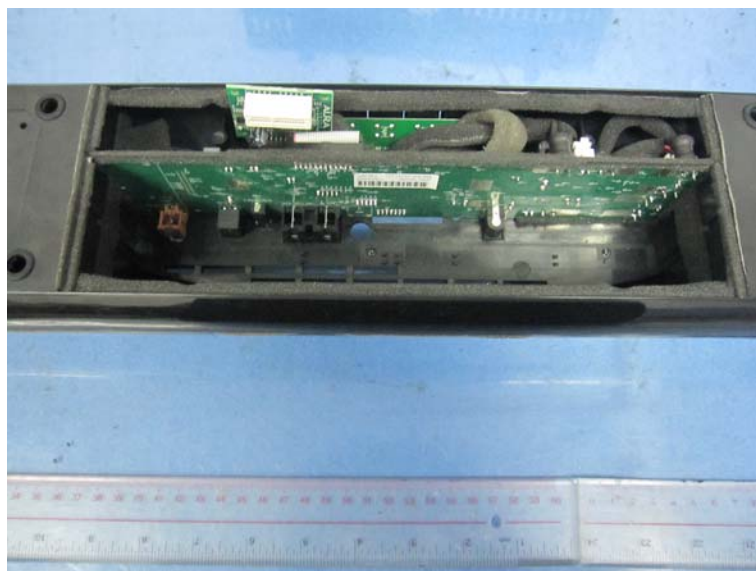

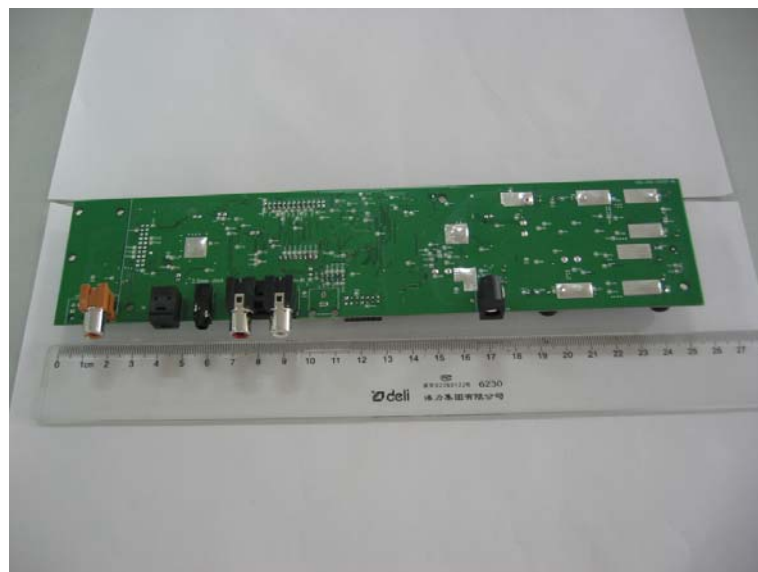

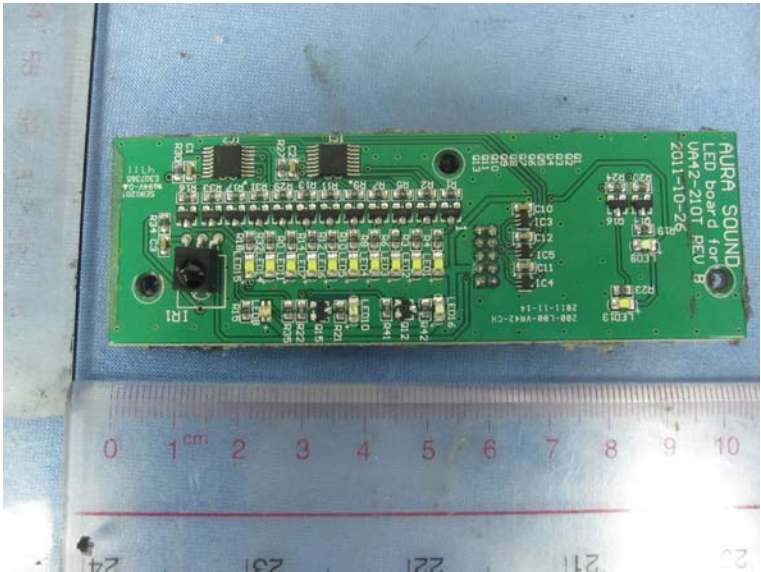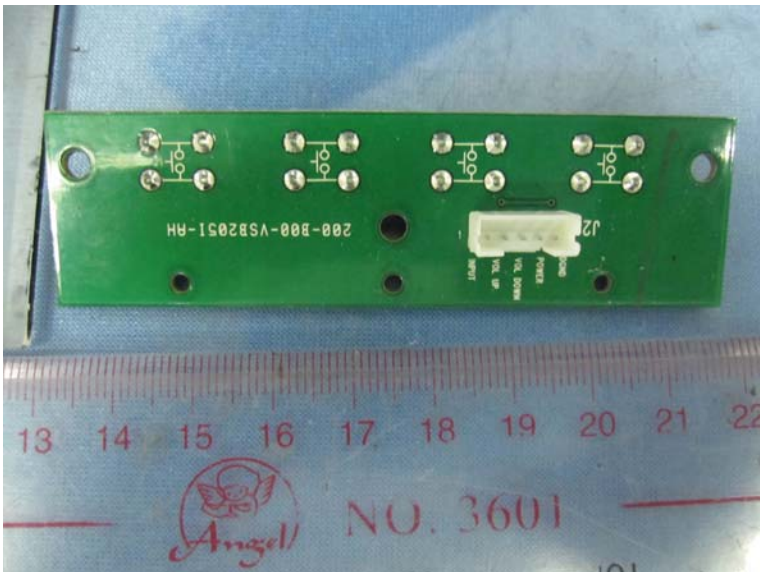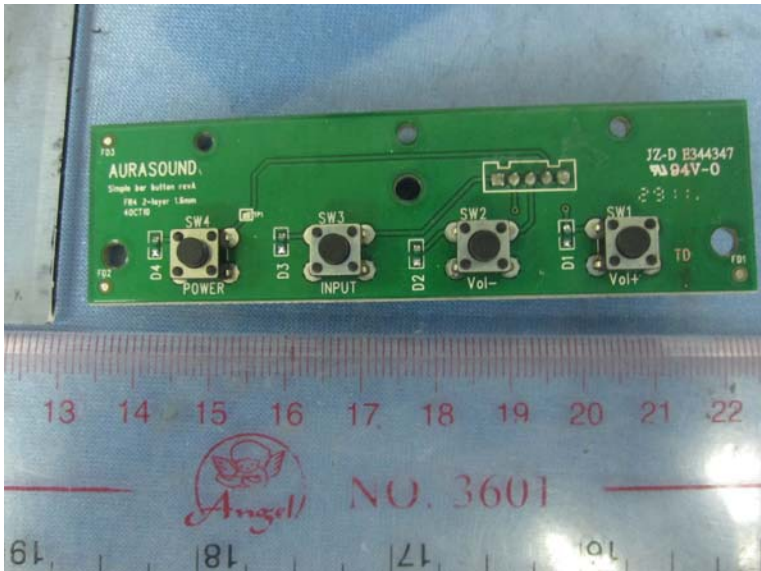

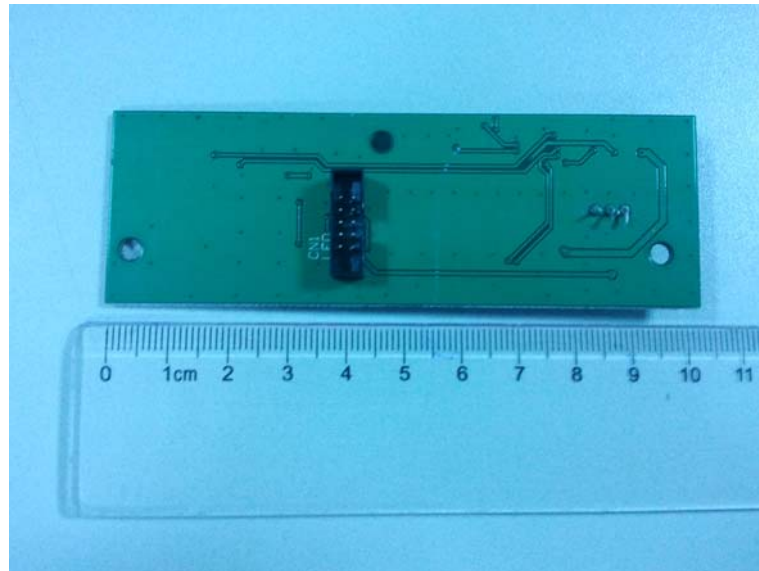



Adapter 2 photo



.....End of Report.....