
FCC Test Report

Report No.: AGC00529141102FE02

FCC ID : N2GDP400

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Doppio Titan

BRAND NAME : doppio

MODEL NAME : DP400

CLIENT : DOPPIO MOBILE INTERNATIONAL LIMITED

DATE OF ISSUE : Nov.14, 2014

STANDARD(S) : FCC Part 22H & 24E Rules

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov.14, 2014	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	8
2.3 TEST METHODOLOGY	8
2.4 TEST FACILITY	8
2.5 MEASUREMENT INSTRUMENTS	8
2.6 SPECIAL ACCESSORIES	9
2.7 EQUIPMENT MODIFICATIONS	9
3. SYSTEM TEST CONFIGURATION	10
3.1 EUT CONFIGURATION	10
3.2 EUT EXERCISE	10
3.3 GENERAL TECHNICAL REQUIREMENTS	10
3.4 CONFIGURATION OF EUT SYSTEM	11
4. SUMMARY OF TEST RESULTS	12
5. DESCRIPTION OF TEST MODES	12
6. OUTPUT POWER	13
6.1 CONDUCTED OUTPUT POWER	13
6.2 RADIATED OUTPUT POWER	20
6.3. PEAK-TO-AVERAGE RATIO AND MODULATION CHARACTERISTICS	23
APPENDIX A: MODULATION CHARACTERISTICS	25
7. OCCUPIED BANDWIDTH	33
7.1 MEASUREMENT METHOD	33
7.2 PROVISIONS APPLICABLE	33
7.3 MEASUREMENT RESULT	34
APPENDIX B: BANDWIDTH	34
8. BAND EDGE	61
8.1 MEASUREMENT METHOD	61
8.2 PROVISIONS APPLICABLE	61

8.3 MEASUREMENT RESULT	62
APPENDIX C: BAND EDGES COMPLIANCE.....	62
9. SPURIOUS EMISSION	78
9.1 CONDUCTED SPURIOUS EMISSION	78
APPENDIX D: SPURIOUS EMISSION AT ANTENNA TERMINAL	79
9.2 RADIATED SPURIOUS EMISSION.....	151
10. MAINS CONDUCTED EMISSION	155
10.1 MEASUREMENT METHOD	155
10.2 PROVISIONS APPLICABLE	155
10.3 MEASUREMENT RESULT	156
11. FREQUENCY STABILITY	158
11.1 MEASUREMENT METHOD	158
11.2 PROVISIONS APPLICABLE.....	158
11.3 MEASUREMENT RESULT	160
Appendix E:Frequency Stability	160
PHOTOGRAPHS OF TEST SETUP	175
PHOTOGRAPHS OF EUT	177

1. VERIFICATION OF COMPLIANCE

Applicant	DOPPIO MOBILE INTERNATIONAL LIMITED
Address	1011A, 10/F., Harbour Centre Tower 1, No.1 Hok Cheung St., Hung Hom, Kowloon, Hong Kong.
Manufacturer	DOPPIO MOBILE (SHENZHEN) LIMITED
Address	Room 313, 3th Floor, Building 10 Jiale Building, No.11 Yannan Road, Futian District, Shenzhen
Product Designation	Doppio Titan
Brand Name	doppio
Test Model	DP400
Date of test	Nov.05, 2014 to Nov.12, 2014
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By :



Bart Xie

Nov.14, 2014

Reviewed By :



Kidd Yang

Nov.14, 2014

Approved By:



Solger Zhang

Nov.14, 2014

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Doppio Titan
Hardware version:	W88_MB_B
Software version:	N/A
Frequency Bands:	☒ GSM 850 ☒ PCS 1900 (U.S. Bands) ☒ GSM 900 ☒ DCS 1800 (Non-U.S. Bands) ☒ UMTS FDD Band II ☒ UMTS FDD Band V (U.S. Bands) ☐ UMTS FDD Band I ☐ UMTS FDD Band VIII (Non-U.S. Bands)
Antenna:	PIFA Antenna
Antenna gain:	-1.0dBi(GSM/WCDMA 850), -0.8dBi (GSM/WCDMA 1900)
Power Supply:	DC 3.8V by Battery
Battery parameter:	DC3.8V/2000 mAh
Adapter Input:	AC100-240V 50/60Hz 0.2A
Adapter Output:	DC5V, 1A
Dual Card:	WCDMA / GSM Card Slot GSM Card Slot
GPRS Class	12
Extreme Vol. Limits:	DC3.4 V to 4.35 V (Normal: DC3.8 V)
Extreme Temp. Tolerance	-10°C to +50°C
*** Note: The High Voltage DC4.35V and Low Voltage DC3.4V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage. Other functions have been performed according to verification procedure except for Bluetooth and MS function. Card 1 can't transmit with Card 2 simultaneously.	

***** Note:** The maximum power levels are GSM for MCS-4: GMSK link, EDGE for MCS-9:8PSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, only these modes were used for all tests. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst case as a representative.

WCDMA Card Slot:

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.58	32.37	31.75
PCS 1900	27.65	29.59	28.91
UMTS BAND II	21.63	23.36	22.85
UMTS BAND V	21.55	23.46	22.89

GSM Card Slot:

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.22	31.89	31.26
PCS 1900	27.15	29.02	28.45

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: N2GDP400**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.
KDB 971168 D01 Power Meas License Digital Systems v02r01

2.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

FCC register No.: 259865

2.5 MEASUREMENT INSTRUMENTS

Name of Equipment	Manufacturer	Model	Calibration Date	Calibration Due.
SPECTRUM ANALYZER	AGILENT	E4440A	Feb.17,2014	Feb.16,2015
TEST RECEIVER	R&S	ESCI	July 25, 2014	July 24, 2015
COMMUNICATION TESTER	AGILENT	8960	July 25, 2014	July 24, 2015
COMMUNICATION TESTER	R&S	CMU200	July 25, 2014	July 24, 2015
SIGNAL GENERATOR	AGILENT	E4438C	Feb.23,2014	Feb. 22,2015
LISN	R&S	ESH3-Z5	July 25, 2014	July 24, 2015
CLIMATE CHAMBER	ALBATROSS	--	July 25, 2014	July 24, 2015
Loop Antenna	A.H.	SAS-562B	May 10, 2014	May 09, 2015
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	Aug.16, 2014	Aug.15, 2015
Substitution Antenna	EMCO	3142C	Aug.16, 2014	Aug.15, 2015
Substitution Antenna	EM	EM-AH-10180	Apr.19, 2014	Apr.18, 2015
Horn Antenna	EM	EM-AH-10180	Feb.17,2014	Feb.16,2015
Horn Antenna	A.H. Systems Inc.	SAS-574	June 6, 2014	June 5, 2015
Radiation Cable 1	Sat	RE1	June 4, 2014	June 3, 2015
Radiation Cable 2	Sat	RE2	June 4, 2014	June 3, 2015
Conduction Cable	Sat	CE1	June 4, 2014	June 3, 2015

2.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	2.1046/22.913(a) (2) / 24.232 (c)
		Radiated output power	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)
3	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
4	Mains Conducted Emission		15.107 / 15.207
5	Frequency Stability		2.1055/22.355 /24.235
6	Occupied Bandwidth		2.1049 (h)(i)
7	Emission Bandwidth		22.917(a)/24.238(a)
8	Band Edge		22.917(a)/24.238(a)

3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile phone	DP400	FCCID:N2GDP400	EUT
2	Adapter	DP400	DC5.0V / 1A	Accessory
3	Battery	DP400	DC3.8V / 2000 mAh	Accessory
4	Earphone	DP400	N/A	Accessory
5	USB Cable	DP400	N/A	Accessory

***Note: All the accessories have been used during the test. The following “EUT” in setup diagram means EUT system.

4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046/22.913(a) (2) / 24.232 (c)	Pass
		Radiated Output Power		
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238	Pass
		Radiated Spurious Emission		
4	Mains Conducted Emission		15.107 / 15.207	Pass
5	Frequency Stability		2.1055/22.355 /24.235	Pass
6	Occupied Bandwidth		2.1049 (h)(i)	Pass
7	Emission Bandwidth		22.917(a)/24.238(a)	Pass
8	Band Edge		22.917(a)/24.238(a)	Pass

5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

*****Note:** GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.

6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS1900, WCDMA/HSPA band II, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GSM850/EDGE band		
Mode	Nominal Peak Power	Tolerance(dB)
GSM	33 dBm (2W)	- 2
EDGE	27 dBm(0.5W)	±2
Conducted Output Power Limits for PCS1900/EDGE band		
Mode	Nominal Peak Power	Tolerance(dB)
GSM	30 dBm (1W)	- 2
EDGE	26 dBm (0.4W)	±2
Conducted Output Power Limits for UMTS band II		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24 dBm (0.25W)	- 2
Conducted Output Power Limits for UMTS band V		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24 dBm (0.25W)	- 2

GSM 850:

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM850	824.2	33	32.37	-0.63	31.75	-9	22.75
	836.6	33	32.31	-0.69	31.66	-9	22.66
	848.8	33	32.26	-0.74	31.62	-9	22.62
GPRS850 (1 Slot)	824.2	33	32.22	-0.78	31.48	-9	22.48
	836.6	33	32.19	-0.81	31.35	-9	22.35
	848.8	33	32.14	-0.86	31.31	-9	22.31
GPRS850 (2 Slot)	824.2	30	29.68	-0.32	28.84	-6	22.84
	836.6	30	29.54	-0.46	28.67	-6	22.67
	848.8	30	29.46	-0.54	28.66	-6	22.66
GPRS850 (3 Slot)	824.2	28.23	27.47	-0.76	26.72	-4.26	22.46
	836.6	28.23	27.53	-0.7	26.66	-4.26	22.4
	848.8	28.23	27.41	-0.82	26.62	-4.26	22.36
GPRS850 (4 Slot)	824.2	27	26.68	-0.32	25.87	-3	22.87
	836.6	27	26.62	-0.38	25.83	-3	22.83
	848.8	27	26.52	-0.48	25.72	-3	22.72

Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Avg.Burst Power (dBm)
EDGE (1 Slot)	128	824.2	26.69	26.16
	189	836.6	26.66	26.12
	251	848.8	26.61	26.08
EDGE (2 Slot)	128	824.2	25.42	24.83
	189	836.6	25.51	24.88
	251	848.8	25.46	24.69
EDGE (3 Slot)	128	824.2	23.63	23.12
	189	836.6	23.69	23.18
	251	848.8	23.62	23.13
EDGE (4 Slot)	128	824.2	22.74	22.24
	189	836.6	22.71	22.18
	251	848.8	22.67	22.14

PCS 1900:

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM1900	1850.2	30	29.59	-0.41	28.91	-9	19.91
	1880	30	29.41	-0.59	28.78	-9	19.78
	1909.8	30	29.44	-0.56	28.79	-9	19.79
GPRS1900 (1 Slot)	1850.2	30	29.38	-0.62	28.62	-9	19.62
	1880	30	29.34	-0.66	28.57	-9	19.57
	1909.8	30	29.31	-0.69	28.56	-9	19.56
GPRS1900 (2 Slot)	1850.2	27	26.67	-0.33	25.81	-6	19.81
	1880	27	26.64	-0.36	25.79	-6	19.79
	1909.8	27	26.58	-0.42	25.76	-6	19.76
GPRS1900 (3 Slot)	1850.2	25.23	24.69	-0.54	23.84	-4.26	19.58
	1880	25.23	24.66	-0.57	23.88	-4.26	19.62
	1909.8	25.23	24.57	-0.66	23.78	-4.26	19.52
GPRS1900 (4 Slot)	1850.2	24	23.62	-0.38	22.86	-3	19.86
	1880	24	23.57	-0.43	22.81	-3	19.81
	1909.8	24	23.54	-0.46	22.75	-3	19.75

Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Avg.Burst Power (dBm)
EDGE (1 Slot)	512	1850.2	25.68	25.15
	661	1880	25.61	25.11
	810	1909.8	25.56	25.05
EDGE (2 Slot)	512	1850.2	24.77	24.26
	661	1880	24.72	24.23
	810	1909.8	24.67	24.12
EDGE (3 Slot)	512	1850.2	22.66	22.14
	661	1880	22.78	22.11
	810	1909.8	22.53	22.07
EDGE (4 Slot)	512	1850.2	21.68	21.17
	661	1880	21.61	21.13
	810	1909.8	21.56	21.03

UMTS BAND II

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA 1900 RMC	1852.6	24	23.36	-0.64	22.85
	1880	24	23.31	-0.69	22.79
	1907.4	24	23.25	-0.75	22.71
WCDMA 1900 AMR	1852.6	24	22.83	-1.17	22.41
	1880	24	22.77	-1.23	22.38
	1907.4	24	22.74	-1.26	22.32
HSDPA Subtest 1	1852.6	24	22.66	-1.34	22.24
	1880	24	22.63	-1.37	22.18
	1907.4	24	22.61	-1.39	22.16
HSDPA Subtest 2	1852.6	24	22.65	-1.35	22.23
	1880	24	22.61	-1.39	22.24
	1907.4	24	22.58	-1.42	22.09
HSDPA Subtest 3	1852.6	24	22.67	-1.33	22.12
	1880	24	22.63	-1.37	22.14
	1907.4	24	22.59	-1.41	22.11
HSDPA Subtest 4	1852.6	24	22.64	-1.36	22.13
	1880	24	22.61	-1.39	22.12
	1907.4	24	22.75	-1.25	22.24
HSUPA Subtest 1	1852.6	24	22.67	-1.33	22.19
	1880	24	22.72	-1.28	22.24
	1907.4	24	22.79	-1.21	22.38
HSUPA Subtest 2	1852.6	24	22.71	-1.29	22.32
	1880	24	22.69	-1.31	22.25
	1907.4	24	22.63	-1.37	22.23
HSUPA Subtest 3	1852.6	24	22.59	-1.41	22.08
	1880	24	22.56	-1.44	22.09
	1907.4	24	22.57	-1.43	22.14
HSUPA Subtest 4	1852.6	24	22.71	-1.29	22.23
	1880	24	22.74	-1.26	22.25
	1907.4	24	22.65	-1.35	22.26
HSUPA Subtest 5	1852.6	24	22.62	-1.38	22.27
	1880	24	22.65	-1.35	22.24
	1907.4	24	22.69	-1.31	22.29

UMTS BAND V

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA 850 RMC	826.6	24	23.46	-0.54	22.89
	836.4	24	23.37	-0.63	22.75
	846.4	24	23.34	-0.66	22.78
WCDMA 850 AMR	826.6	24	22.68	-1.32	22.24
	836.4	24	22.62	-1.38	22.21
	846.4	24	22.57	-1.43	22.09
HSDPA Subtest 1	826.6	24	22.66	-1.34	22.15
	836.4	24	22.61	-1.39	22.12
	846.4	24	22.58	-1.42	22.07
HSDPA Subtest 2	826.6	24	22.63	-1.37	22.14
	836.4	24	22.55	-1.45	22.05
	846.4	24	22.67	-1.33	22.16
HSDPA Subtest 3	826.6	24	22.62	-1.38	22.13
	836.4	24	22.61	-1.39	22.12
	846.4	24	22.68	-1.32	22.18
HSDPA Subtest 4	826.6	24	22.66	-1.34	22.17
	836.4	24	22.57	-1.43	22.08
	846.4	24	22.63	-1.37	22.15
HSUPA Subtest 1	826.6	24	22.72	-1.28	22.36
	836.4	24	22.76	-1.24	22.39
	846.4	24	22.62	-1.38	22.26
HSUPA Subtest 2	826.6	24	22.67	-1.33	22.16
	836.4	24	22.61	-1.39	22.12
	846.4	24	22.65	-1.35	22.17
HSUPA Subtest 3	826.6	24	22.74	-1.26	22.31
	836.4	24	22.77	-1.23	22.35
	846.4	24	22.69	-1.31	22.23
HSUPA Subtest 4	826.6	24	22.63	-1.37	22.21
	836.4	24	22.72	-1.28	22.25
	846.4	24	22.61	-1.39	22.14
HSUPA Subtest 5	826.6	24	22.67	-1.33	22.18
	836.4	24	22.62	-1.38	22.26
	846.4	24	22.69	-1.31	22.29

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$\text{MAX}(CM-1,0)$
Note: $CM=1$ for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.

6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850/EDGE	≤ 38.45 dBm (7W)
PCS 1900/EDGE	≤ 33 dBm (2W)
UMTS BAND II	≤ 33 dBm (2W)
UMTS BANDV	≤ 38.45 dBm (7W)

6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850/EDGE 8				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM850	824.2	30.58	Horizontal	Pass
	836.6	30.52	Horizontal	Pass
	848.8	30.46	Horizontal	Pass
	824.2	28.54	Vertical	Pass
	836.6	28.51	Vertical	Pass
	848.8	28.49	Vertical	Pass
EDGE	824.2	25.66	Horizontal	Pass
	836.6	25.62	Horizontal	Pass
	848.8	25.52	Horizontal	Pass
	824.2	25.57	Vertical	Pass
	836.6	25.51	Vertical	Pass
	848.8	25.48	Vertical	Pass

Radiated Power (E.I.R.P) for PCS 1900/EDGE 8				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM 1900	1850.2	27.65	Horizontal	Pass
	1880.0	27.61	Horizontal	Pass
	1909.8	27.55	Horizontal	Pass
	1850.2	26.57	Vertical	Pass
	1880.0	26.52	Vertical	Pass
	1909.8	26.47	Vertical	Pass
EDGE	1850.2	24.67	Horizontal	Pass
	1880.0	24.63	Horizontal	Pass
	1909.8	24.55	Horizontal	Pass
	1850.2	23.66	Vertical	Pass
	1880.0	23.52	Vertical	Pass
	1909.8	23.47	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band II				
Mode	Frequency	Result		
		Max. Peak E.I.R.P (dBm)	Polarization Of Max. E.I.R.P	
RMC 12.2kbps	1852.6	21.63	Horizontal	Pass
	1880	21.61	Horizontal	Pass
	1907.4	21.56	Horizontal	Pass
	1852.6	21.51	Vertical	Pass
	1880	21.46	Vertical	Pass
	1907.4	21.42	Vertical	Pass

Radiated Power (ERP) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	826.6	21.55	Horizontal	Pass
	836.4	21.45	Horizontal	Pass
	846.4	21.41	Horizontal	Pass
	826.6	21.38	Vertical	Pass
	836.4	21.32	Vertical	Pass
	846.4	21.31	Vertical	Pass

Note: Above is worst mode data.

6.3. PEAK-TO-AVERAGE RATIO AND MODULATION CHARACTERISTICS

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPK. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

6.3.3 MEASUREMENT RESULT

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)/GSM	0.62	0.65	0.64
Peak-To-Average Ratio (dB)/EDGE	0.53	0.54	0.53

Modes	PCS 1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	0.68	0.63	0.65
Peak-To-Average Ratio (dB)/EDGE	0.53	0.5	0.51

Modes	UMTS BAND II		
Channel	9663	9800	9937
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.6	1880	1907.4
Peak-To-Average Ratio (dB)	0.51	0.52	0.54

Modes	UMTS BAND V		
Channel	4358	4407	4457
	(Low)	(Mid)	(High)
Frequency (MHz)	826.6	836.6	846.4
Peak-To-Average Ratio (dB)	0.57	0.62	0.56

APPENDIX A: MODULATION CHARACTERISTICS

Test Mode	Test Modes description
GSM/TM1	GSM system, GSM,GMSK modulation
GSM/TM2	GSM system, GPRS,GMSK modulation
GSM/TM3	GSM system,EDGE,8PSK modulation
Test Mode	Test Modes description
UMTS/TM1	WCDMA system, QPSK modulation
UMTS/TM2	HSDPA system, QPSK modulation
UMTS/TM3	HSUPA system, QPSK modulation


Test Results

For GSM


Test Band=GSM850

Test Mode=GSM/TM1


Test Channel=MCH

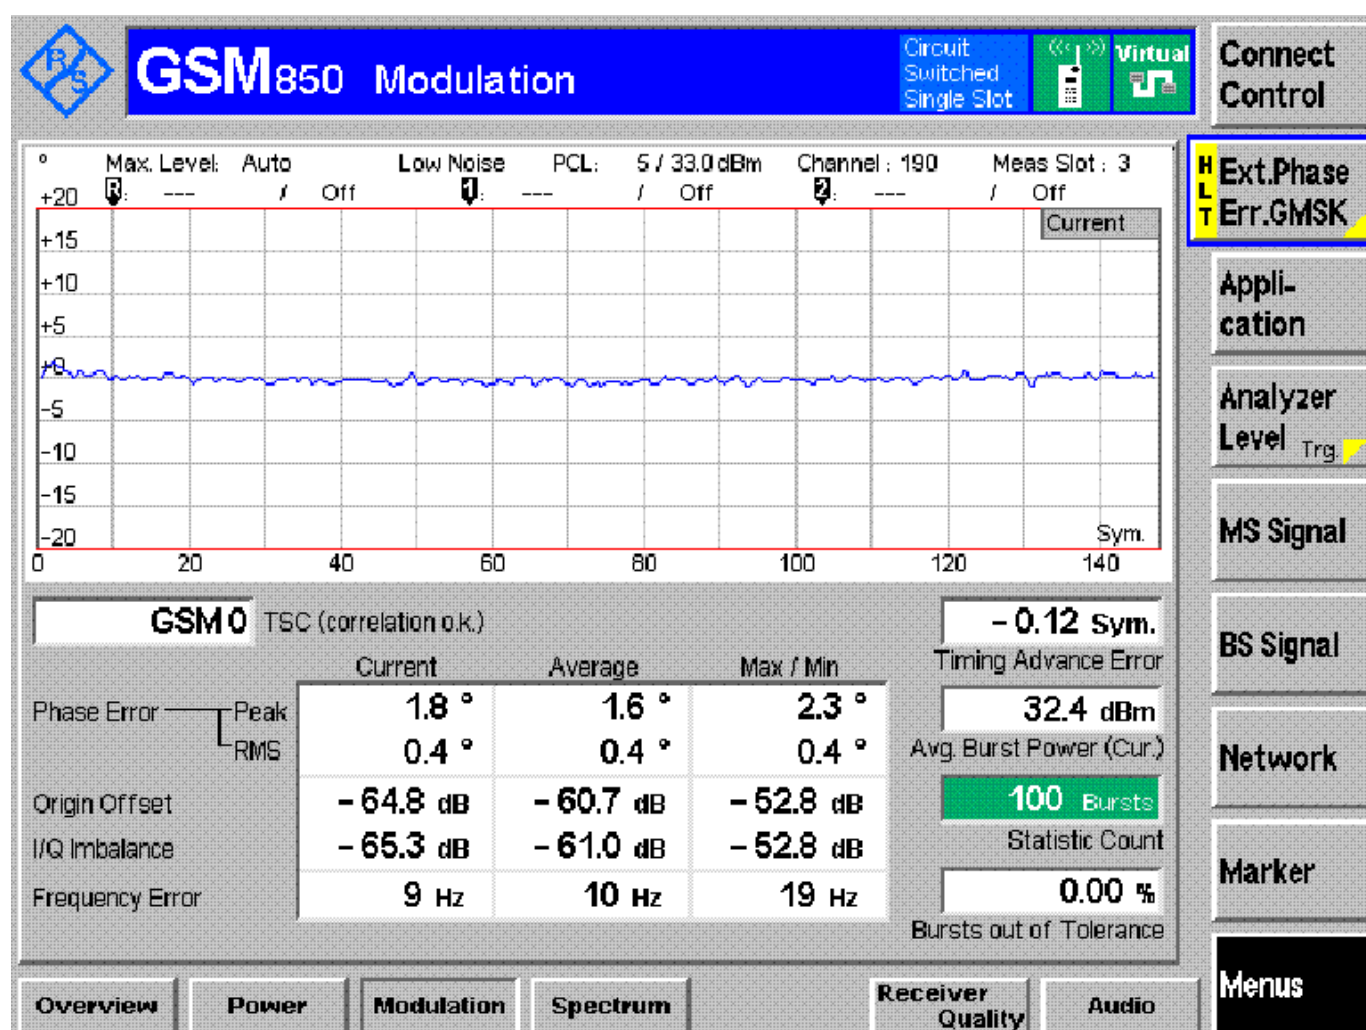

Test Mode=GSM/TM2
Test Channel=MCH

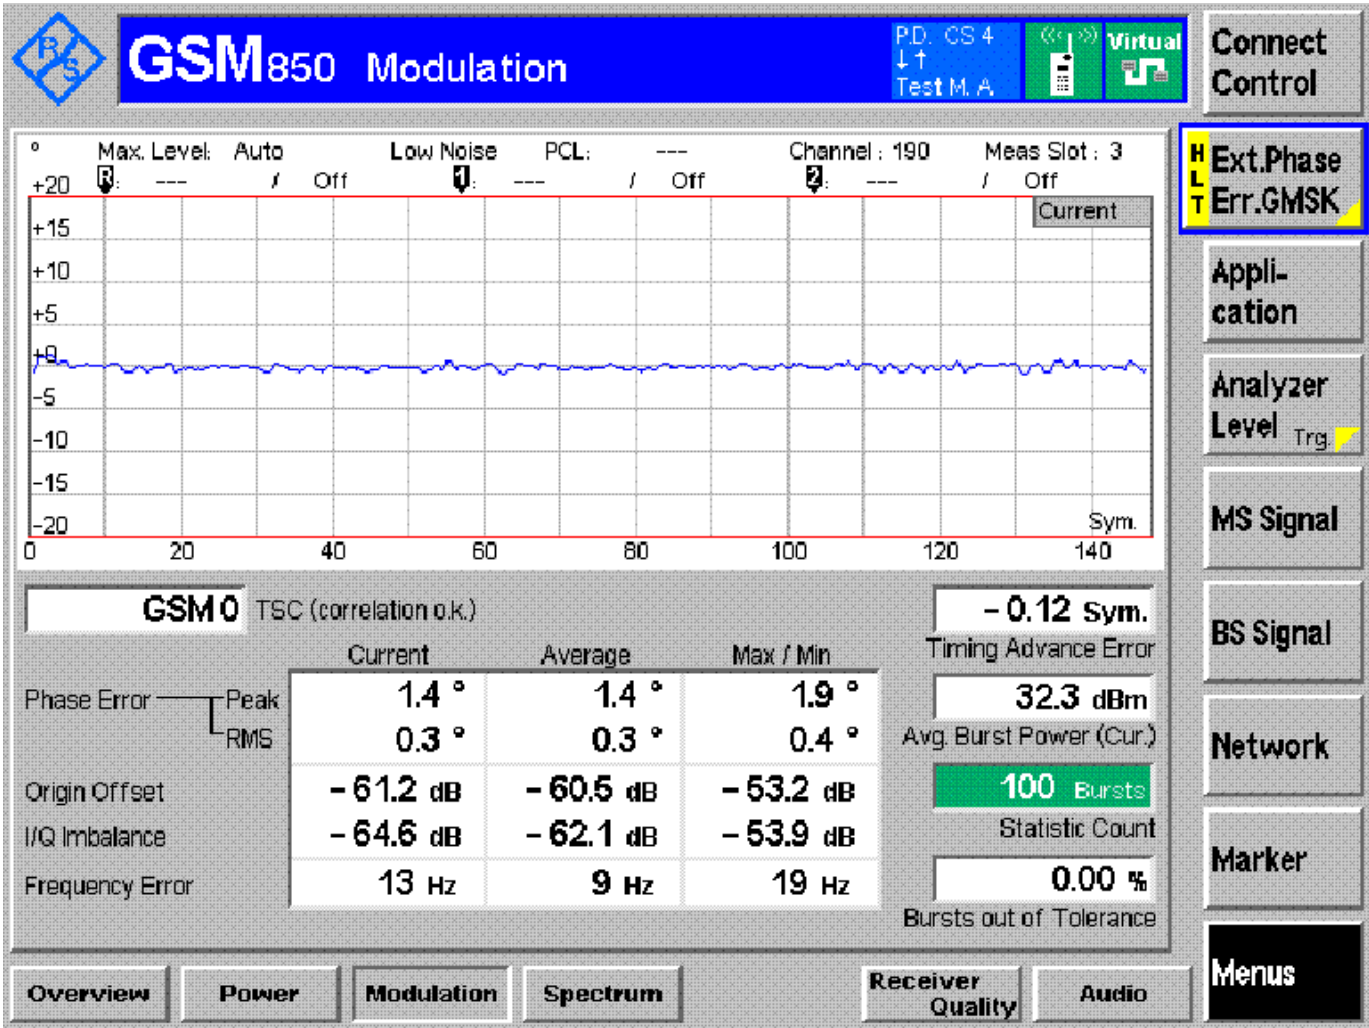


Test Mode=GSM/TM3
Test Channel=MCH

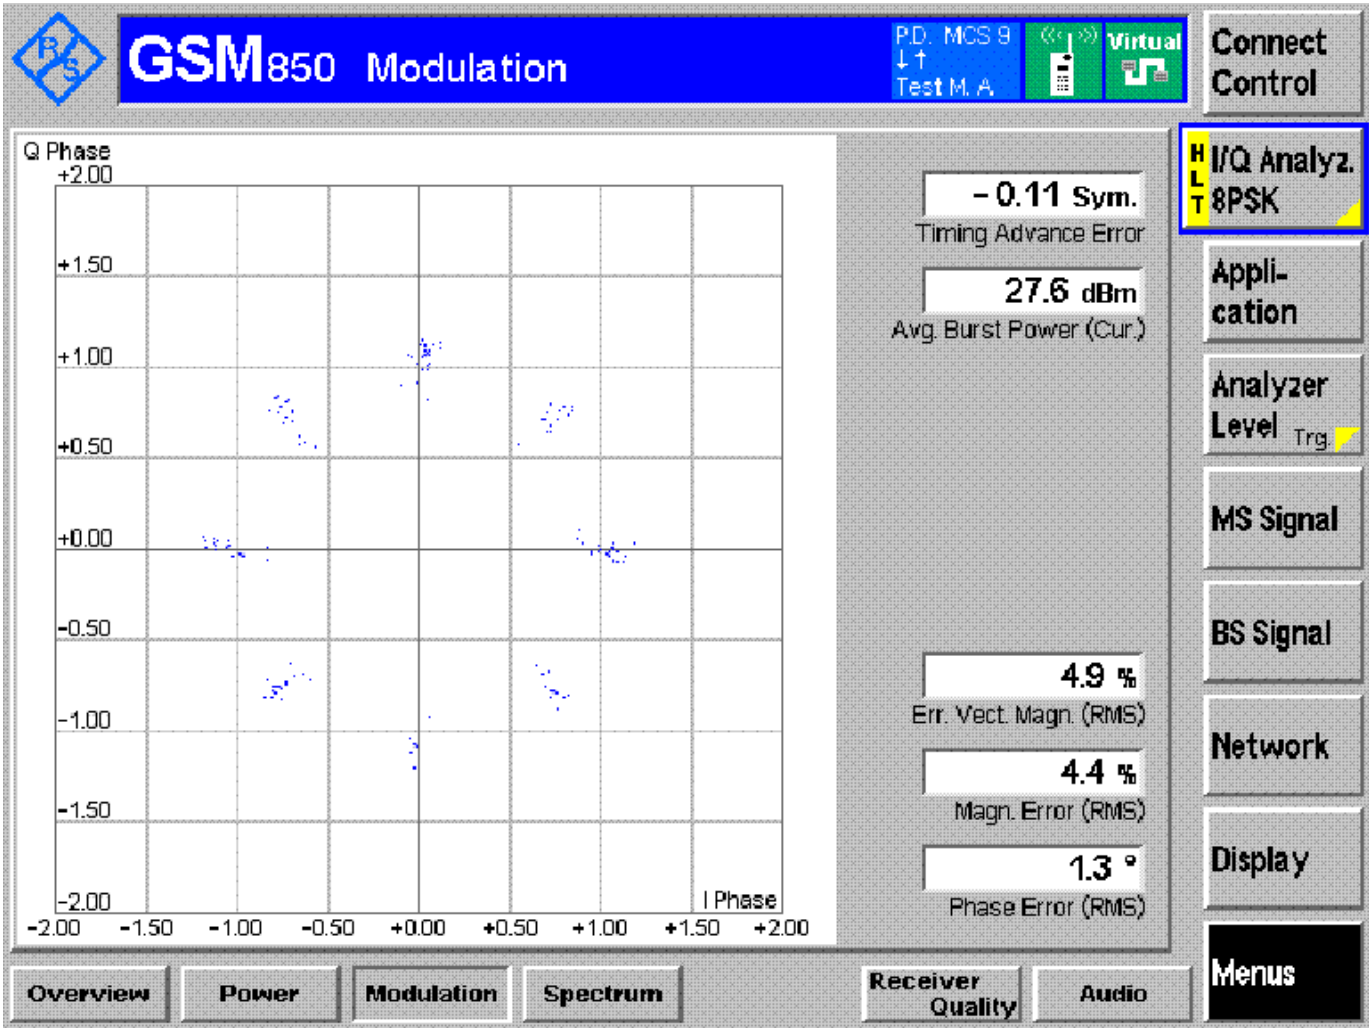


Test Band=GSM1900

Test Mode=GSM/TM1


Test Channel=MCH

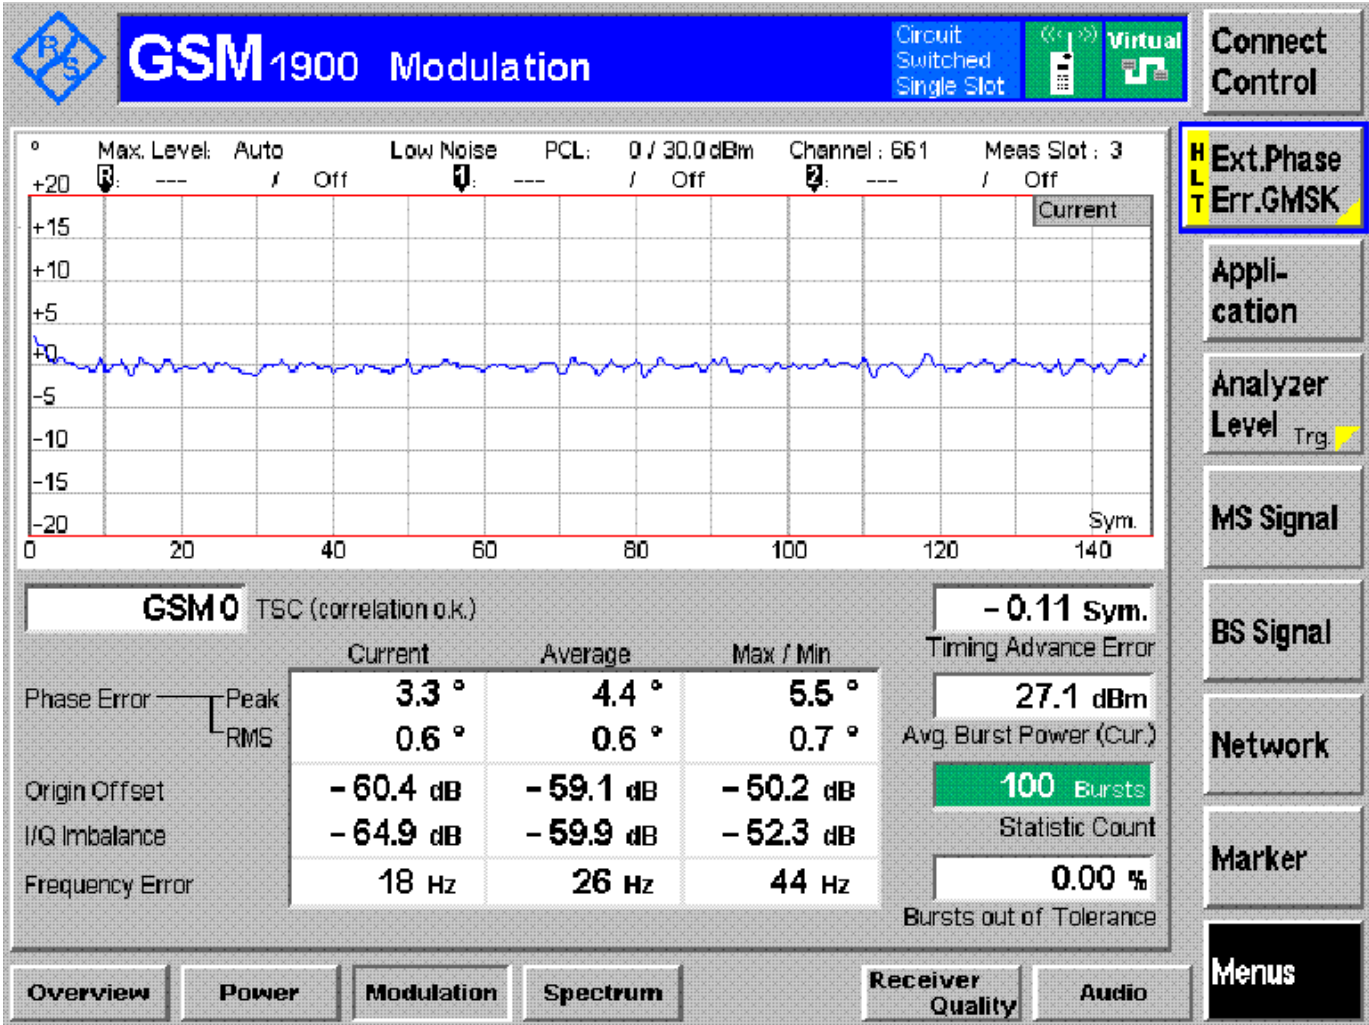

Test Channel=MCH

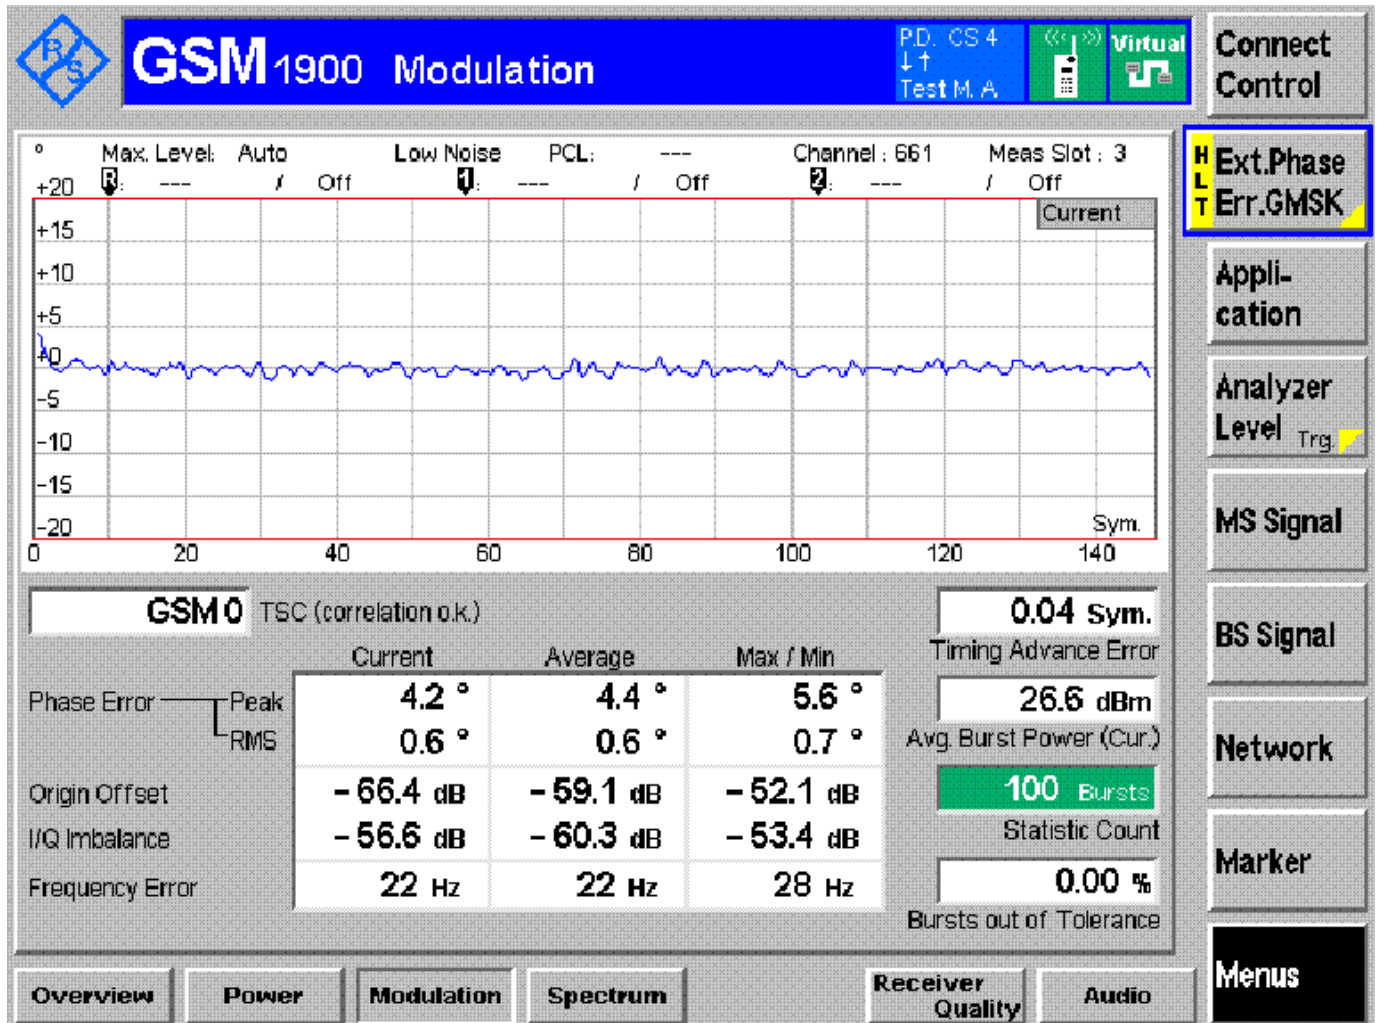

Test Mode=GSM/TM3
Test Channel=MCH

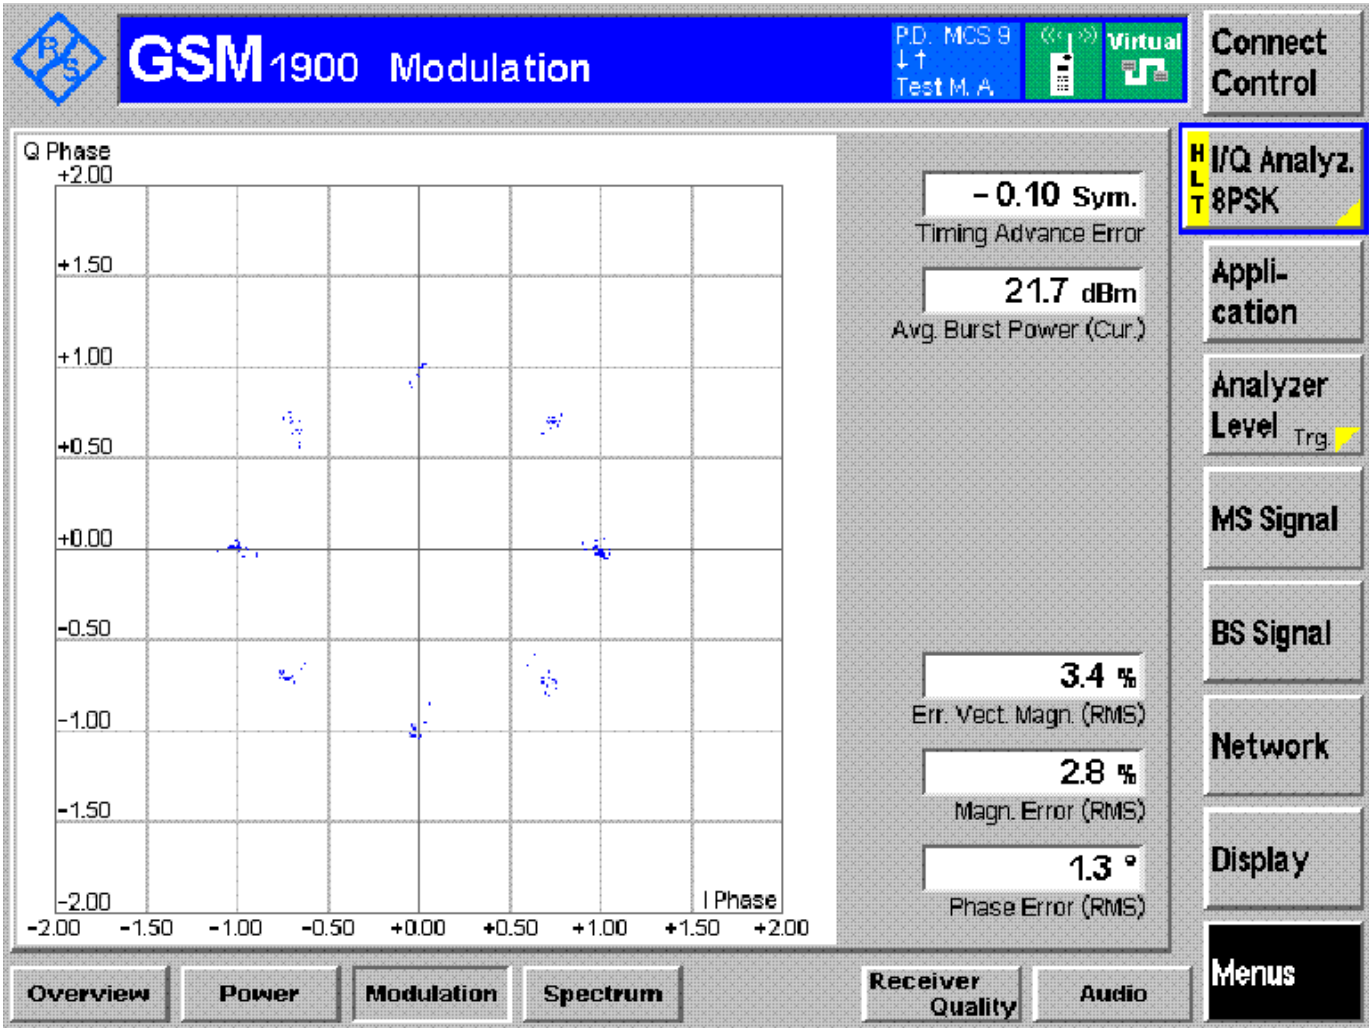


For WCDMA

Test Band=WCDMA850

Test Mode=UMTS/TM1


Test Channel=MCH

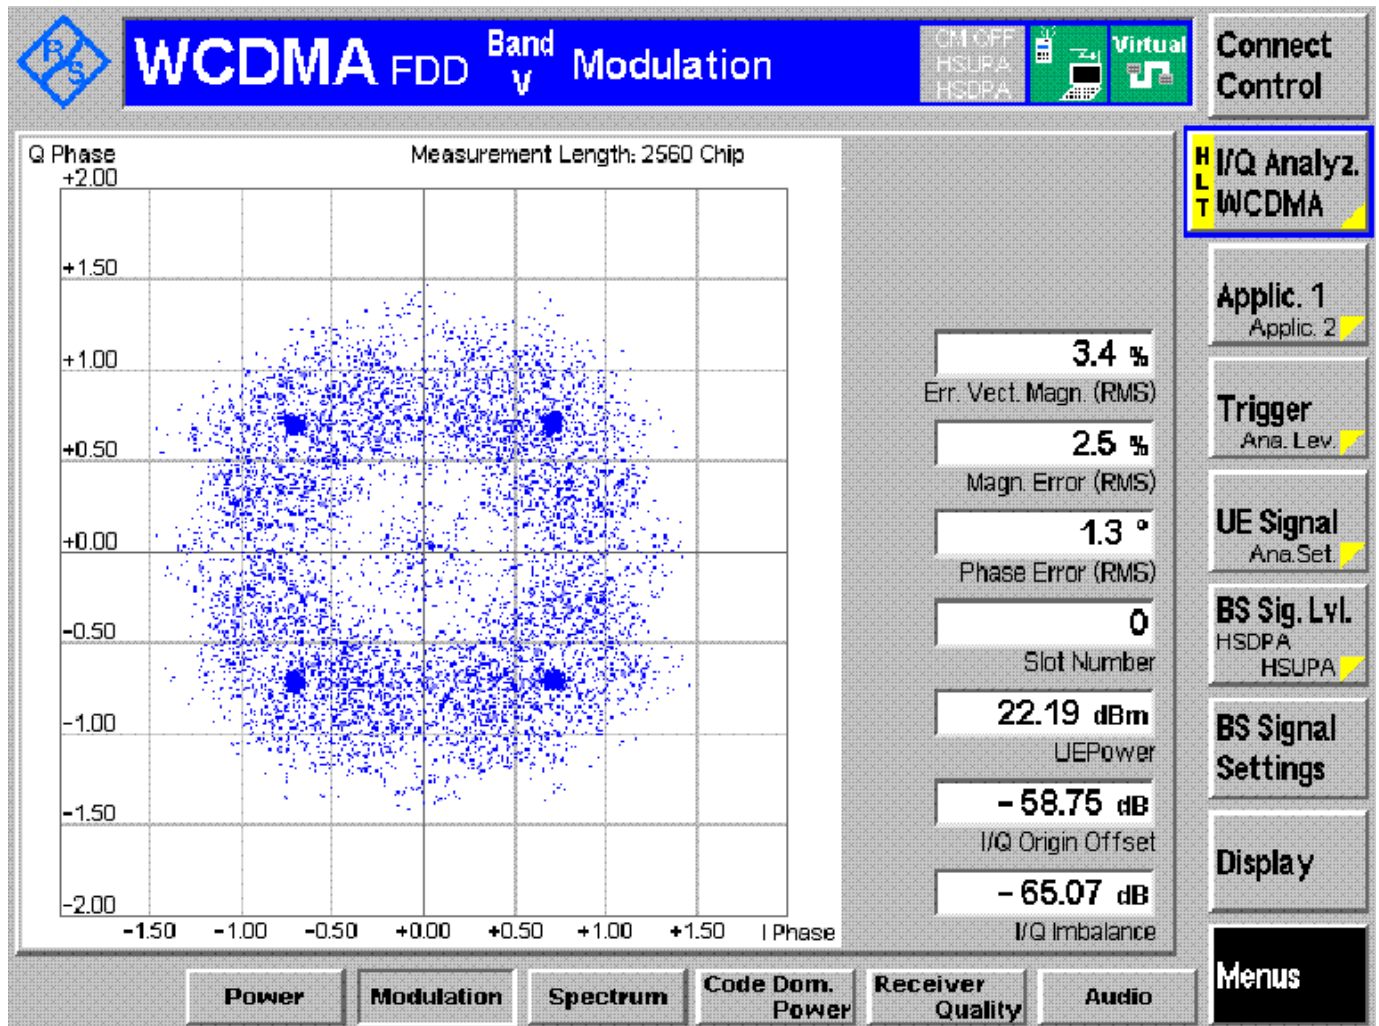

Test Band=WCDMA1900

Test Mode=UMTS/TM1

Test Channel=MCH

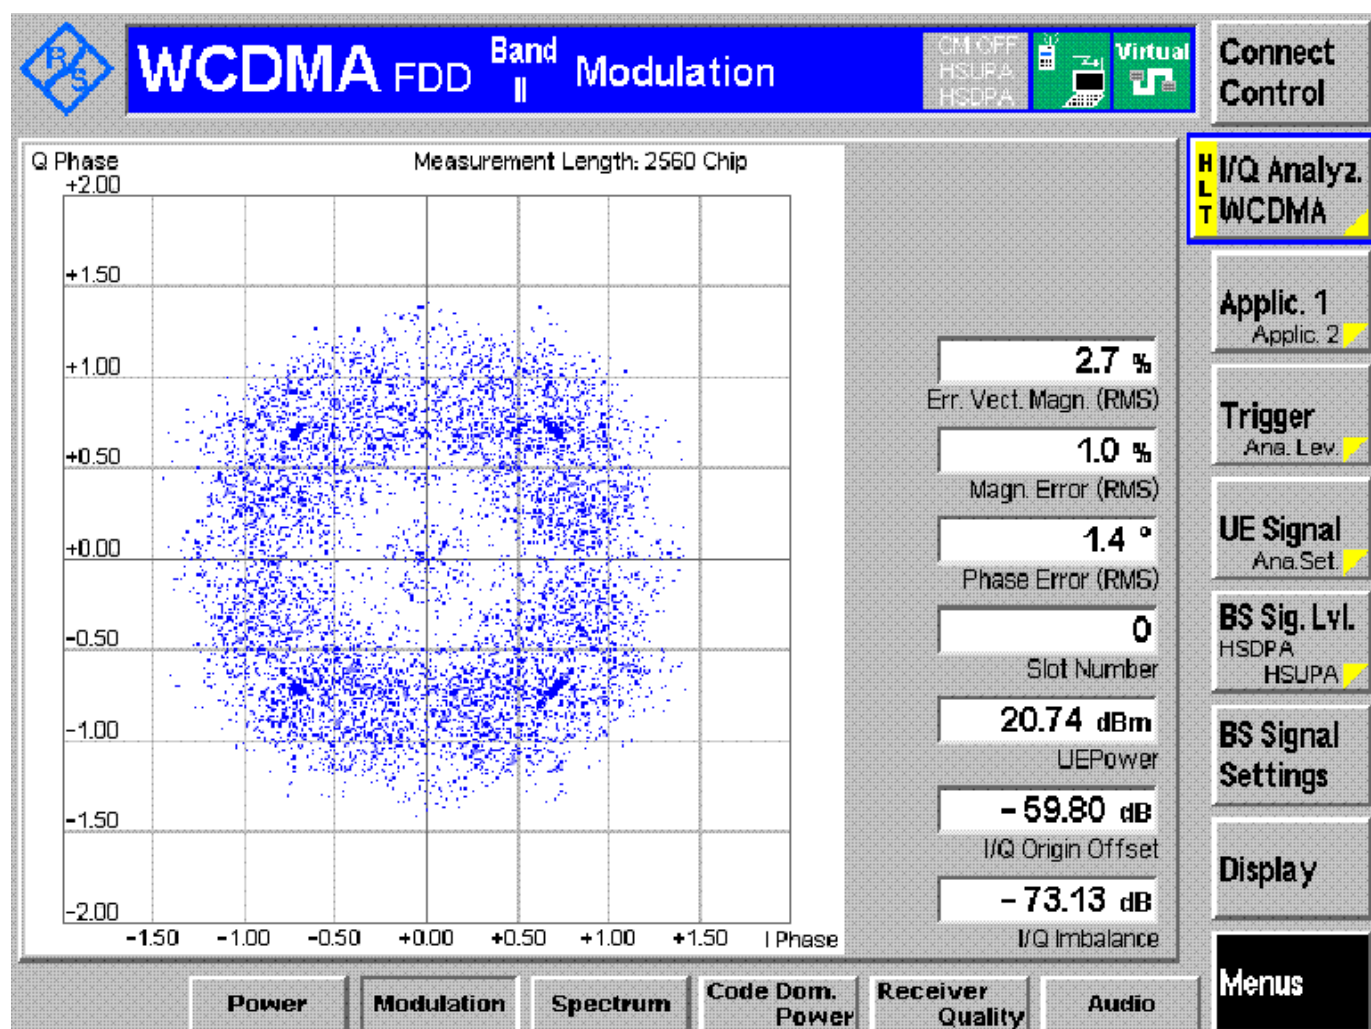

7. OCCUPIED BANDWIDTH

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

7.3 MEASUREMENT RESULT

APPENDIX B:BANDWIDTH

Test Results

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM850	GSM/TM1	LCH	243.14	312.94	PASS
		MCH	243.44	313.58	PASS
		HCH	244.99	314.86	PASS
	GSM/TM2	LCH	243.86	312.94	PASS
		MCH	244.53	313.58	PASS
		HCH	244.87	314.86	PASS
	GSM/TM3	LCH	256.16	333.76	PASS
		MCH	256.60	326.66	PASS
		HCH	256.74	332.23	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM1900	GSM/TM1	LCH	245.44	317.12	PASS
		MCH	247.68	320.63	PASS
		HCH	245.04	319.00	PASS
	GSM/TM2	LCH	242.35	314.23	PASS
		MCH	246.56	314.95	PASS
		HCH	244.37	310.53	PASS
	GSM/TM3	LCH	251.28	321.48	PASS
		MCH	248.39	314.99	PASS
		HCH	251.94	322.33	PASS

For GSM


Test Band=GSM850

Test Mode=GSM/TM1


Test Channel=LCH

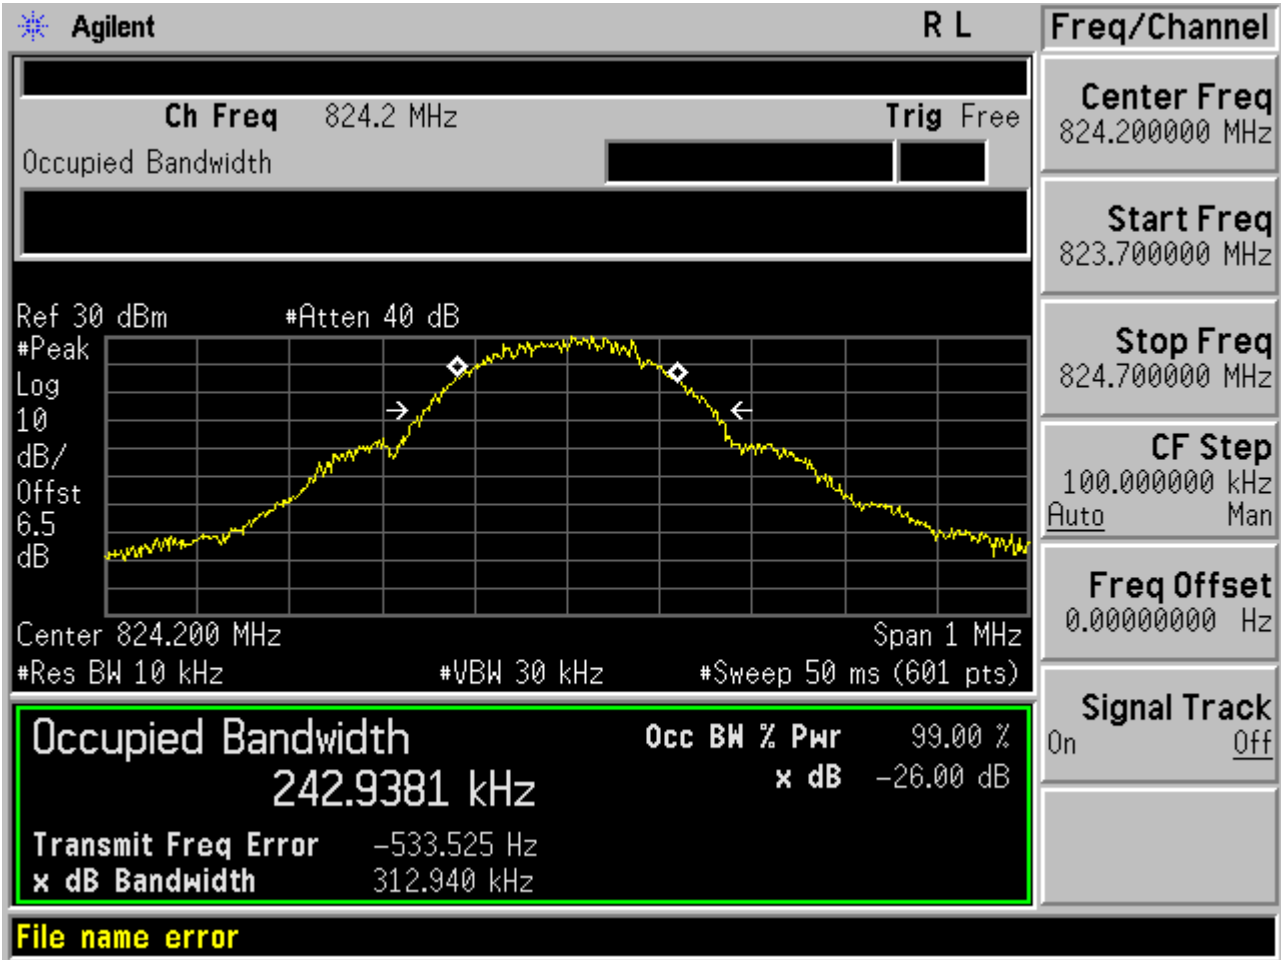

Test Channel=MCH

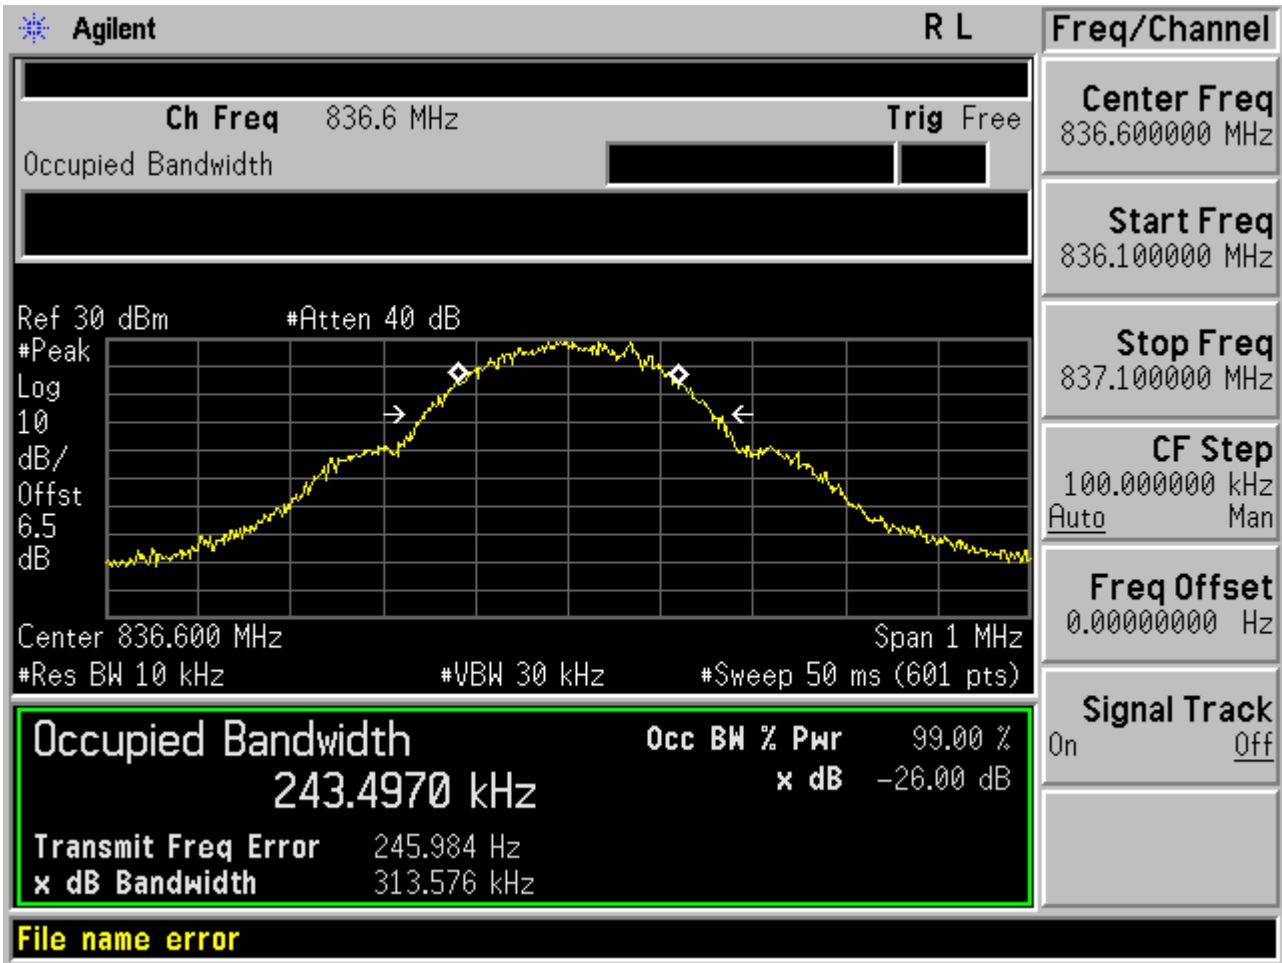


Test Channel=HCH

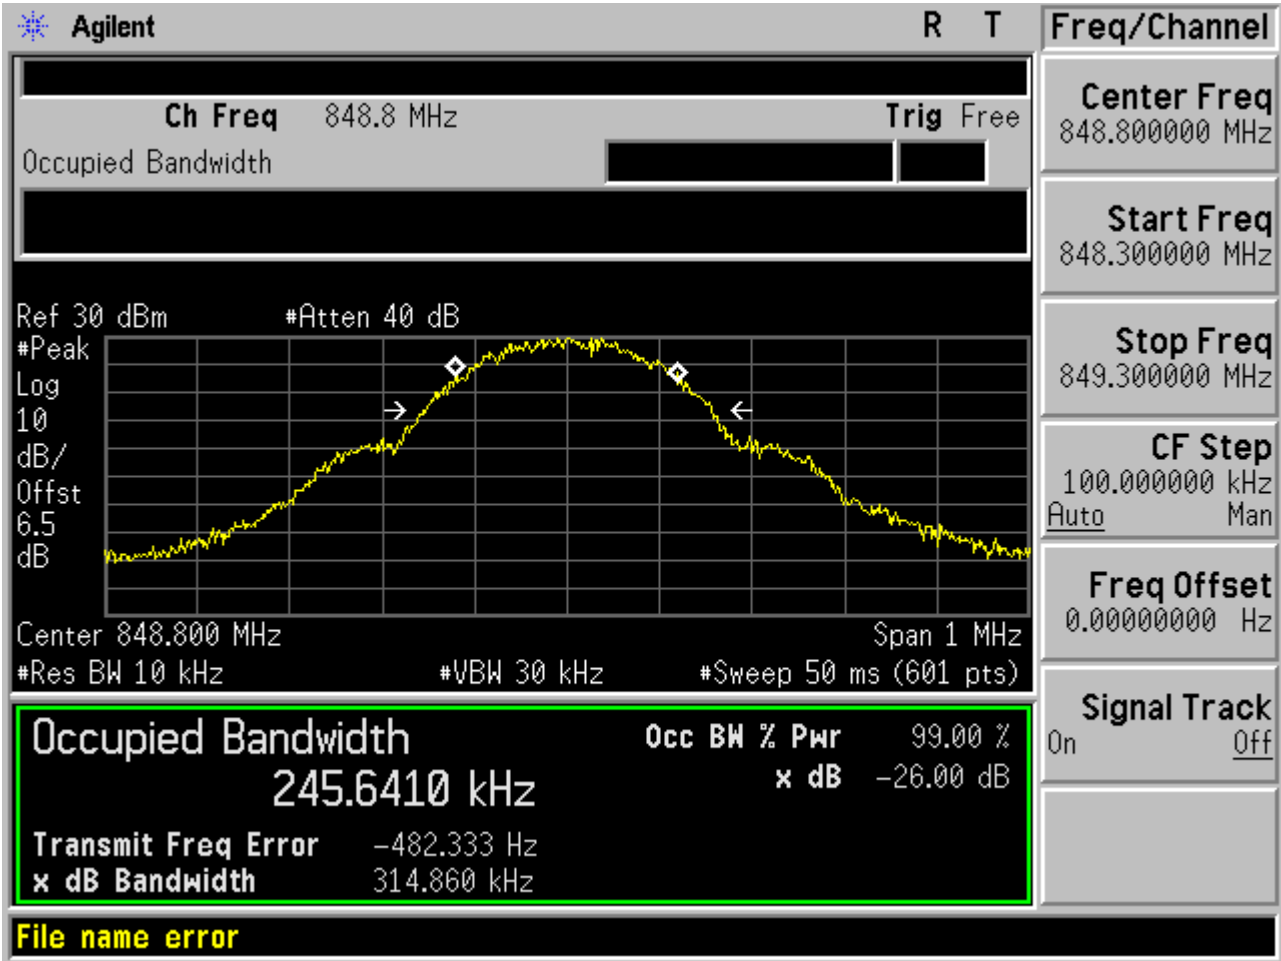

Test Band=GSM850

Test Mode=GSM/TM2

Test Channel=LCH

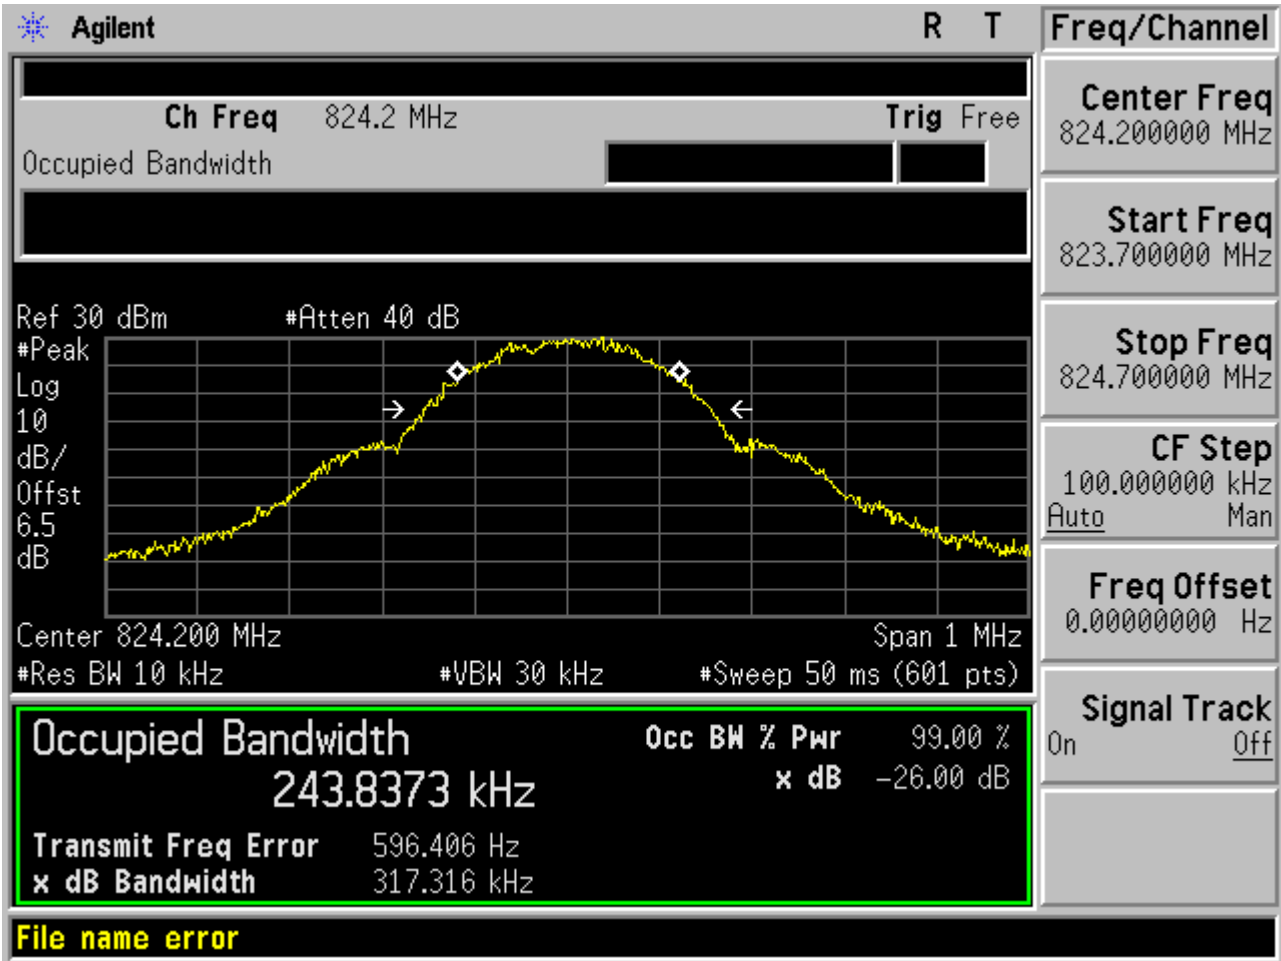

Freq/Channel

Center Freq 824.200000 MHz

Start Freq 823.700000 MHz

Stop Freq 824.700000 MHz


CF Step 100.000000 kHz

Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

Test Channel=MCH

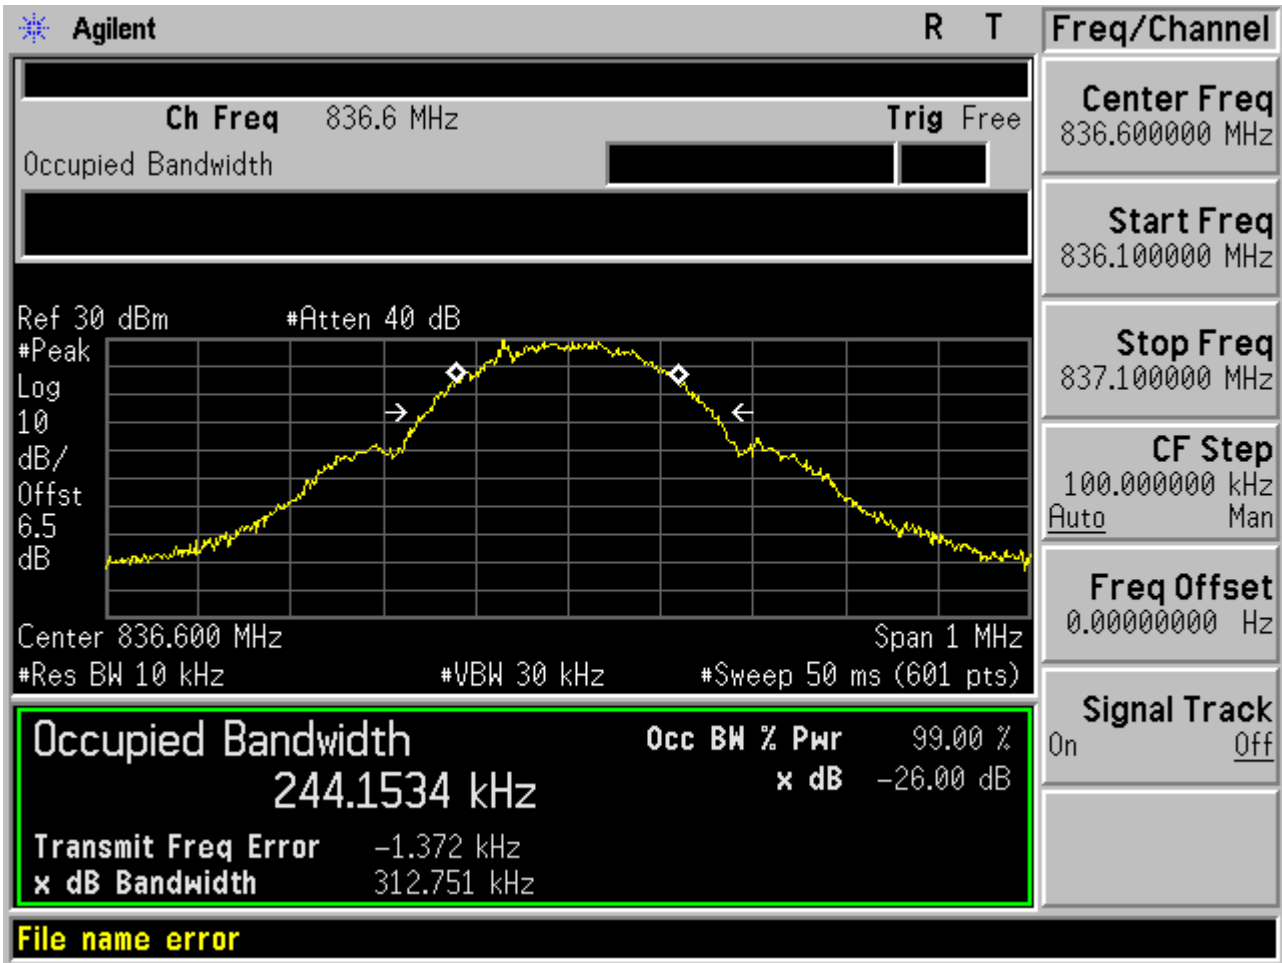


Test Channel=HCH

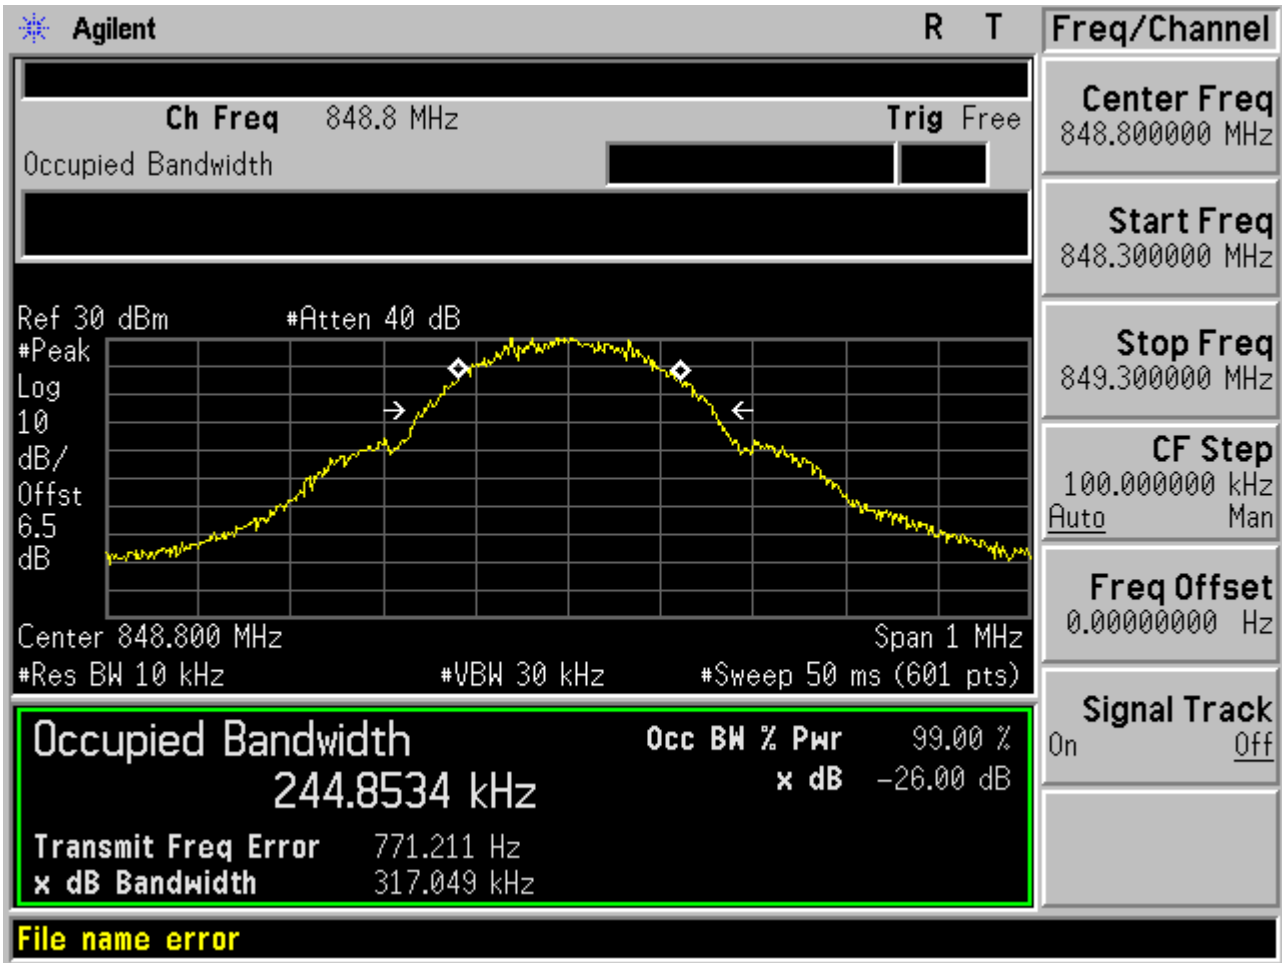


Test Band=GSM850

Test Mode=GSM/TM3


Test Channel=LCH

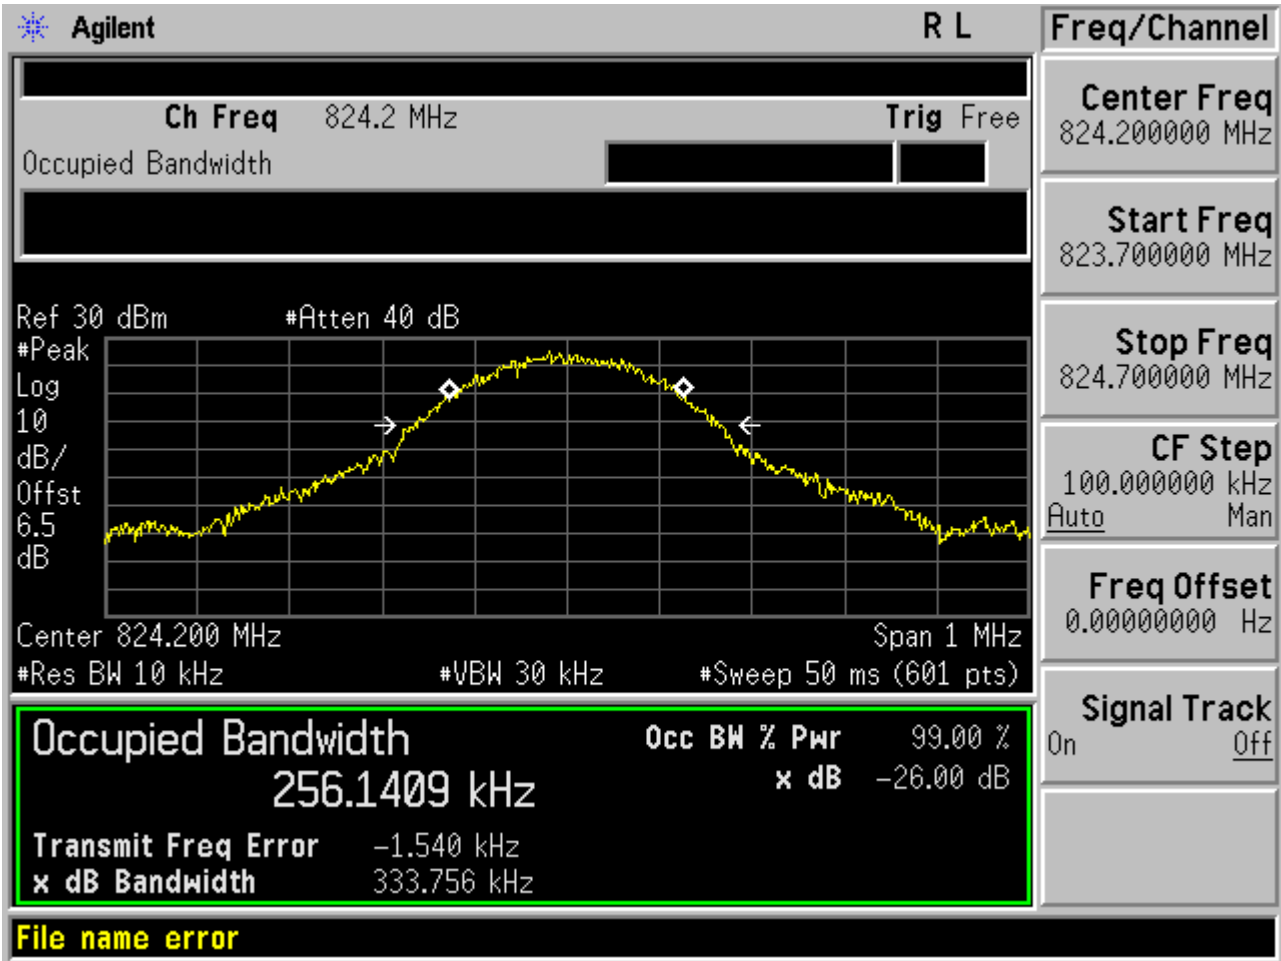

Test Channel=MCH

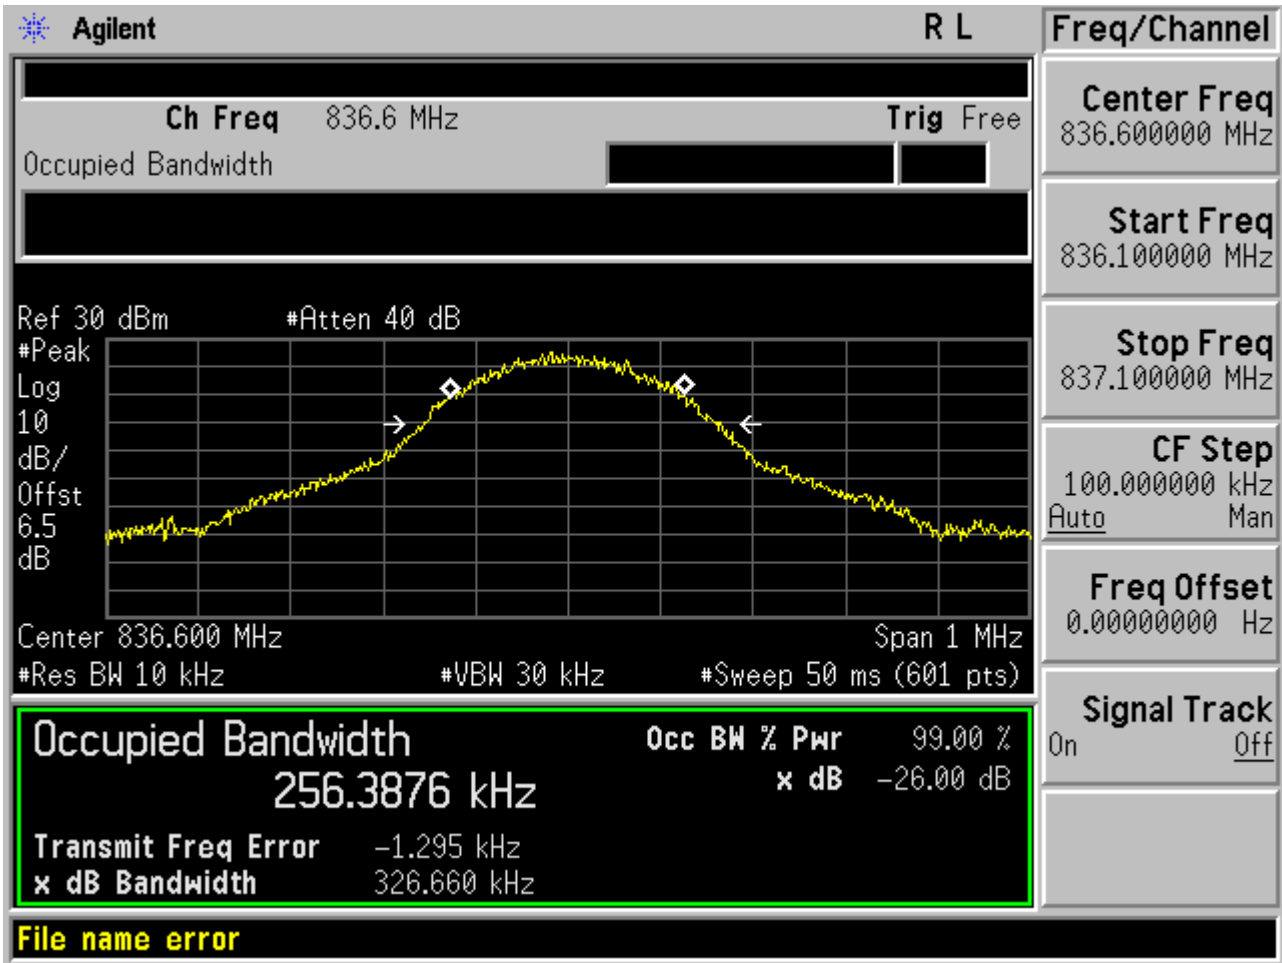


Test Channel=HCH

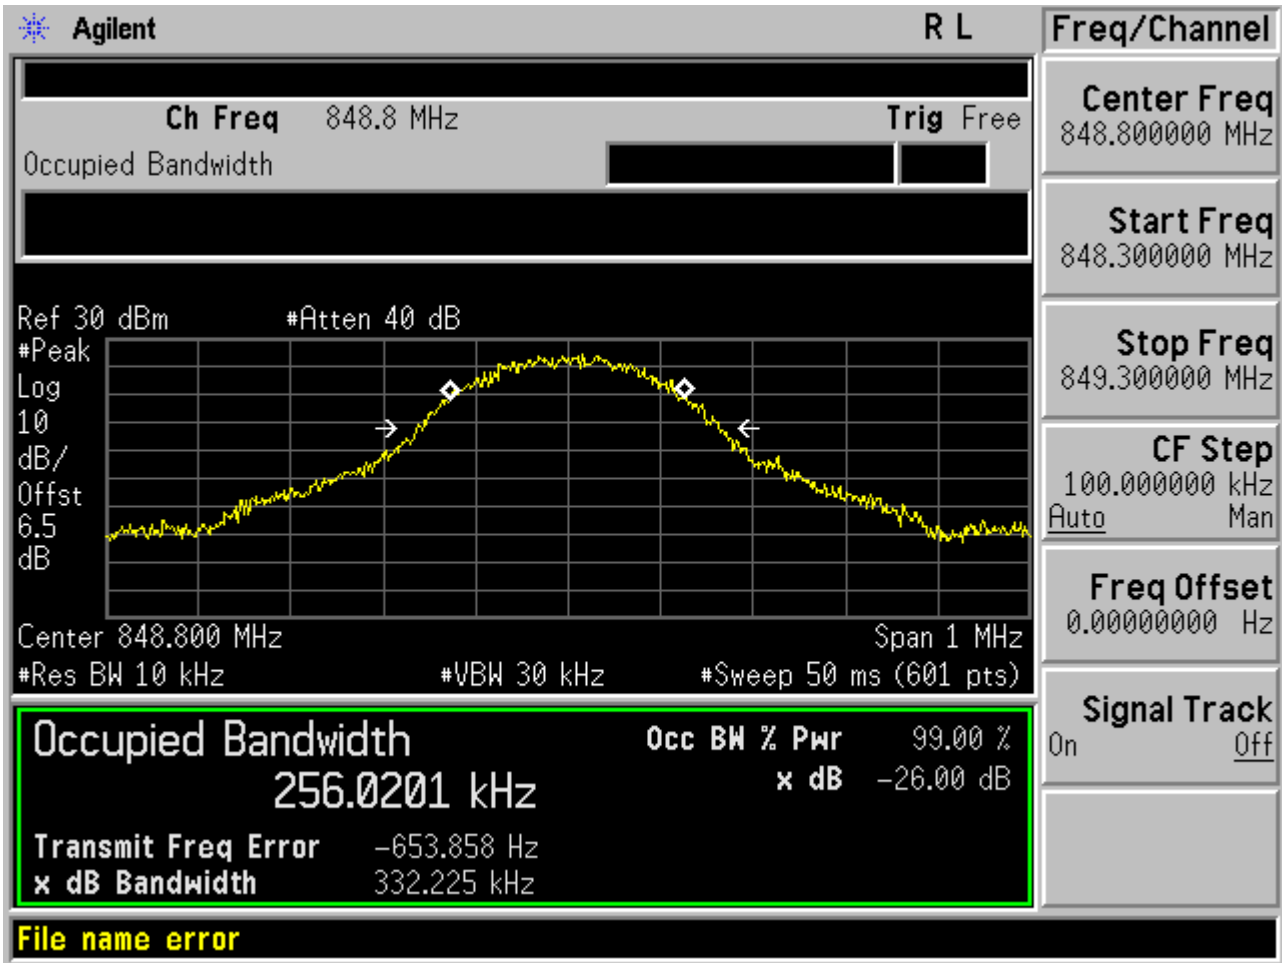


Test Band=GSM1900

Test Mode=GSM/TM1


Test Channel=LCH

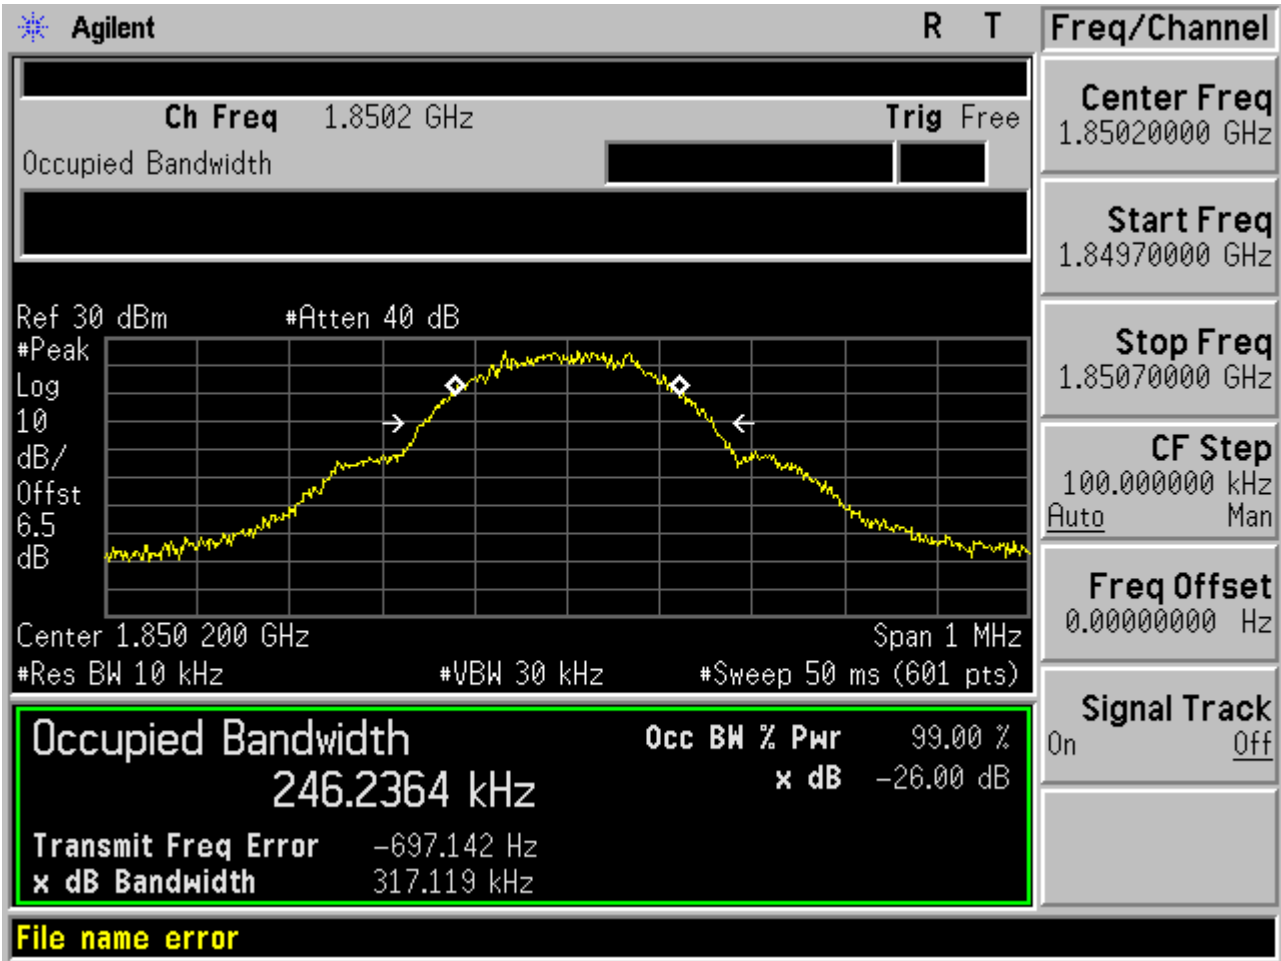


Test Channel=MCH

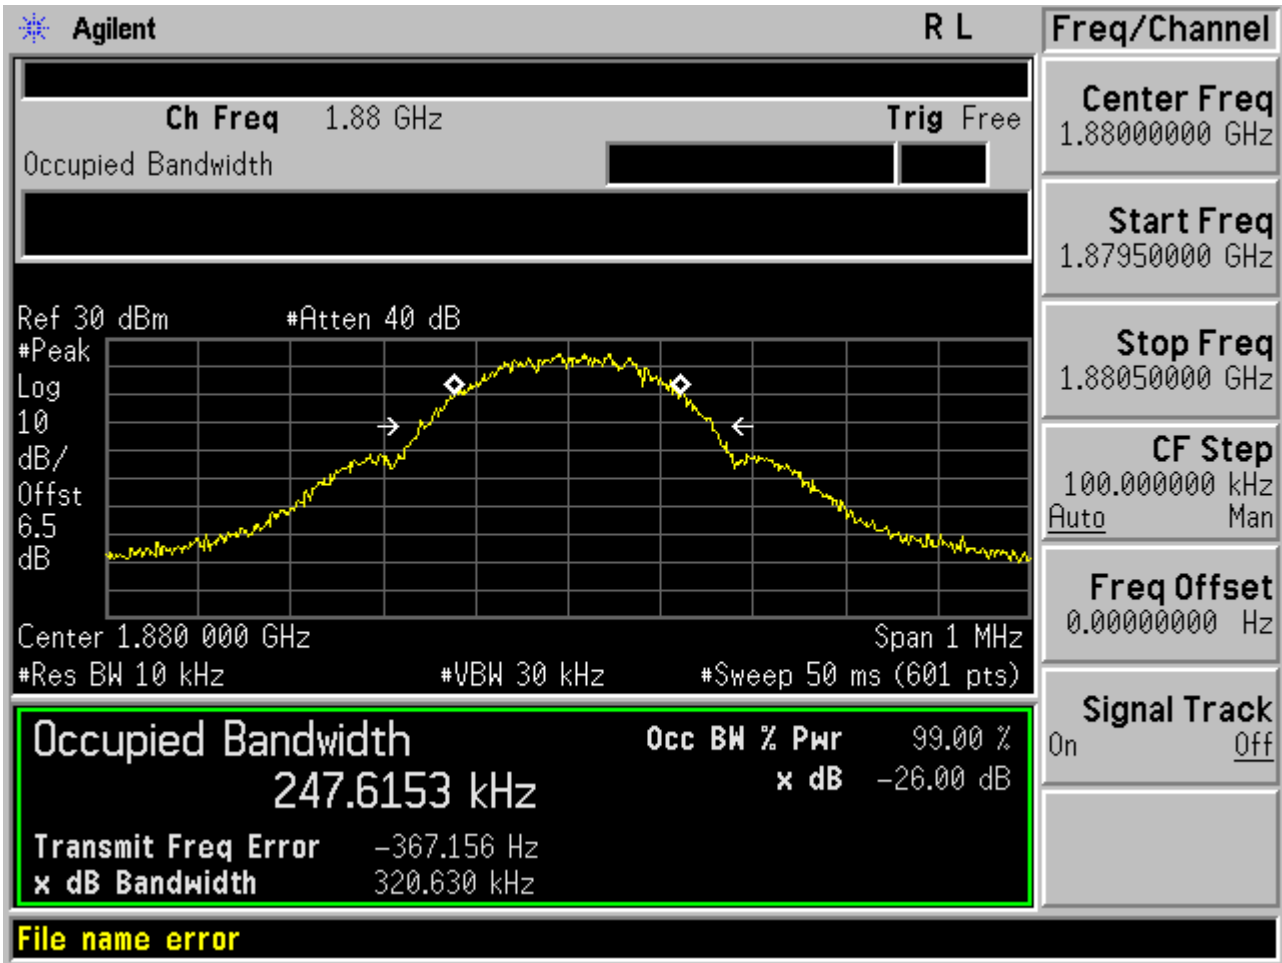


Test Channel=HCH

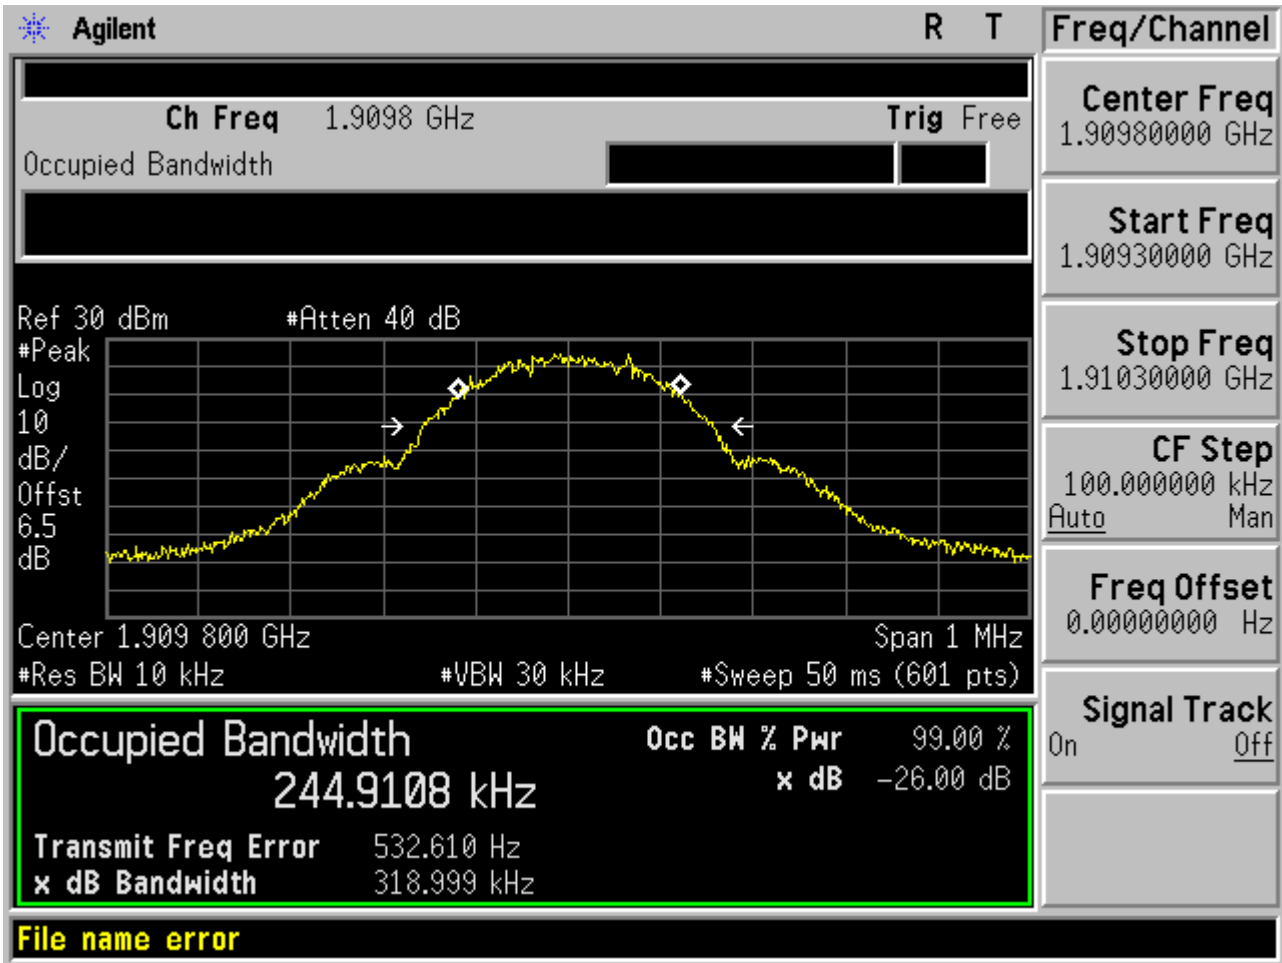


Test Mode=GSM/TM2
Test Channel=LCH

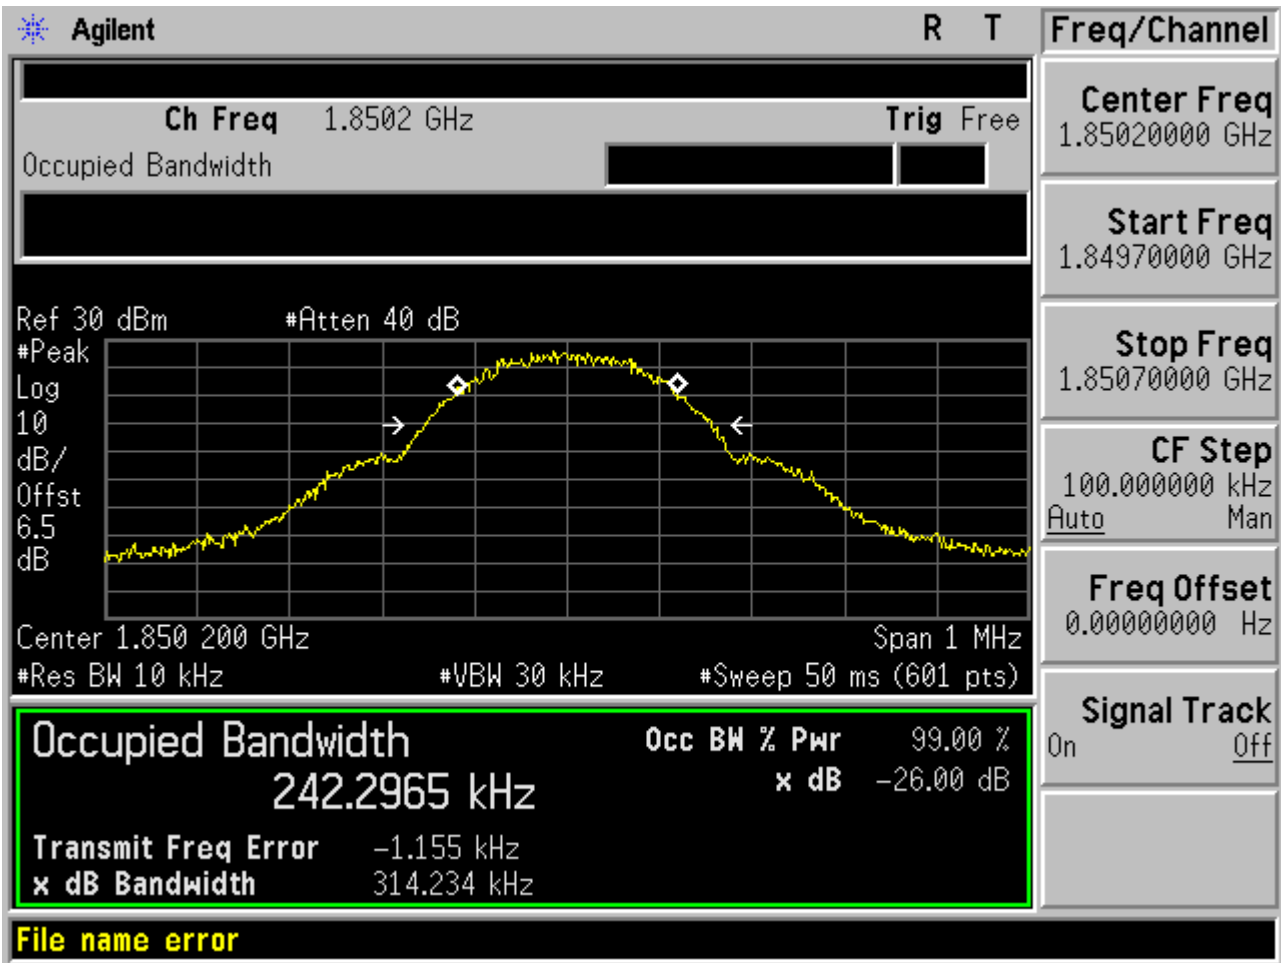


Test Channel=MCH

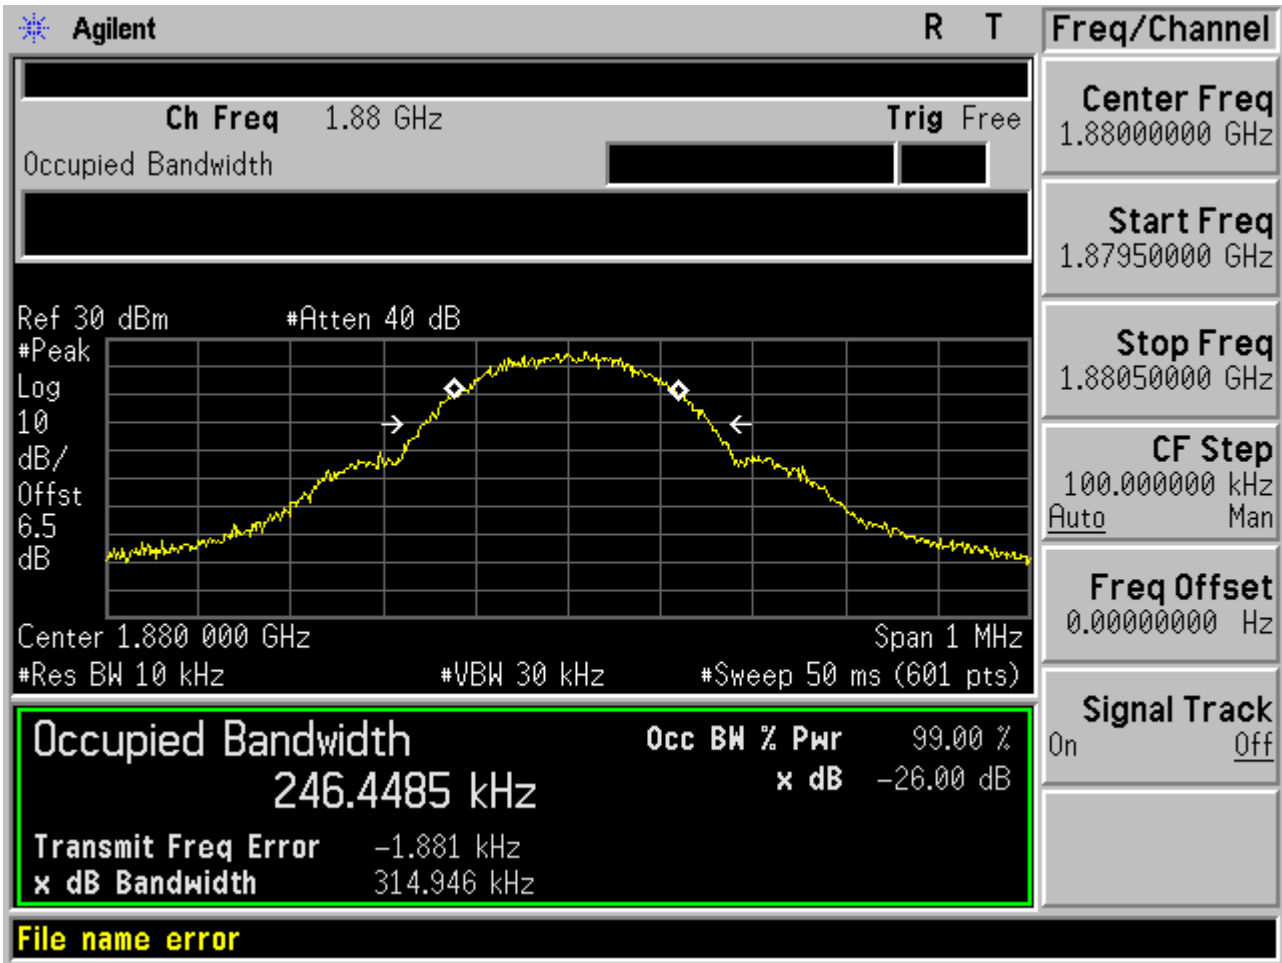


Test Channel=HCH

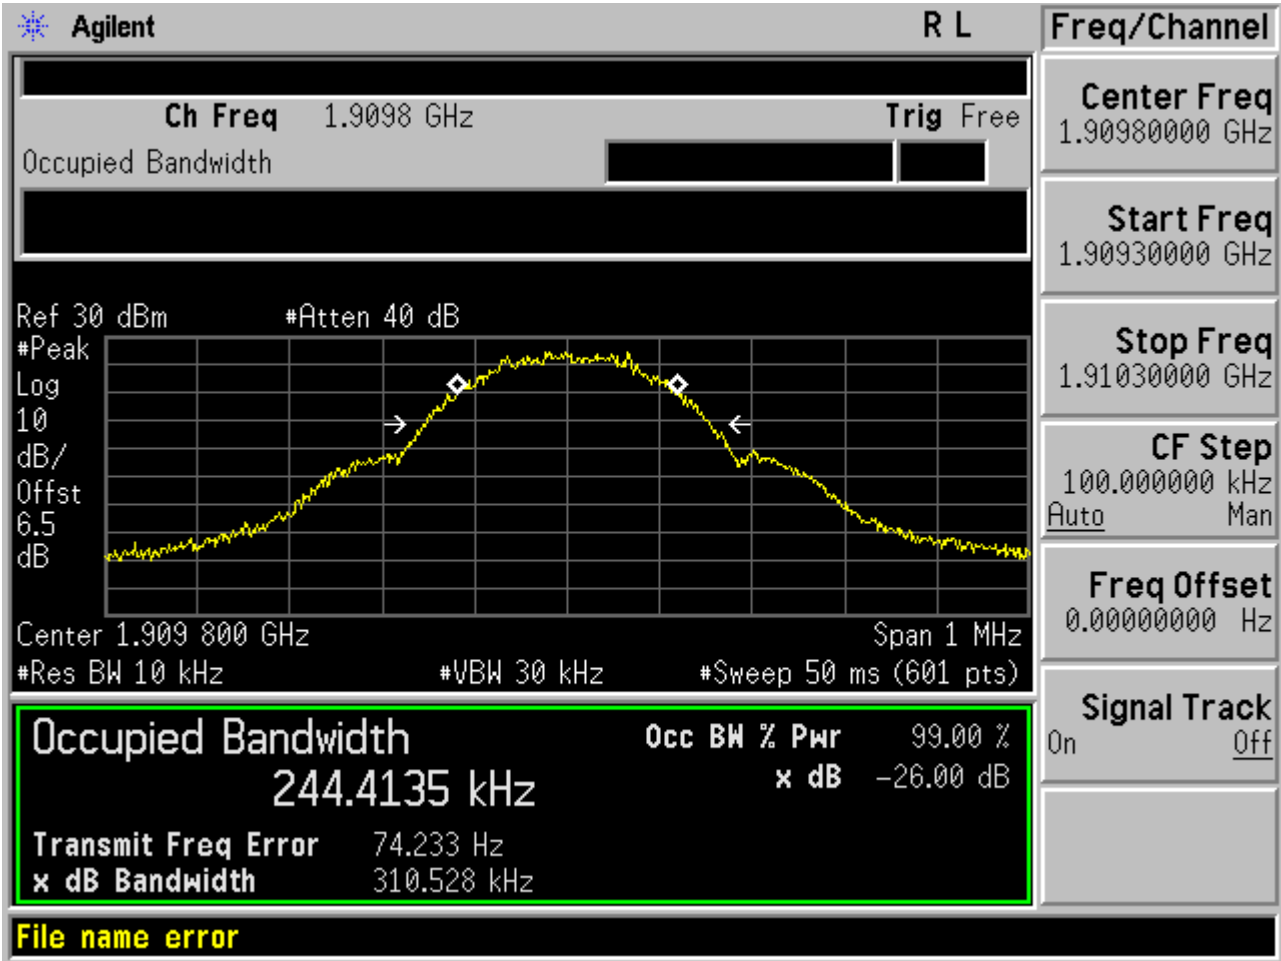


Test Mode=GSM/TM3
Test Channel=LCH

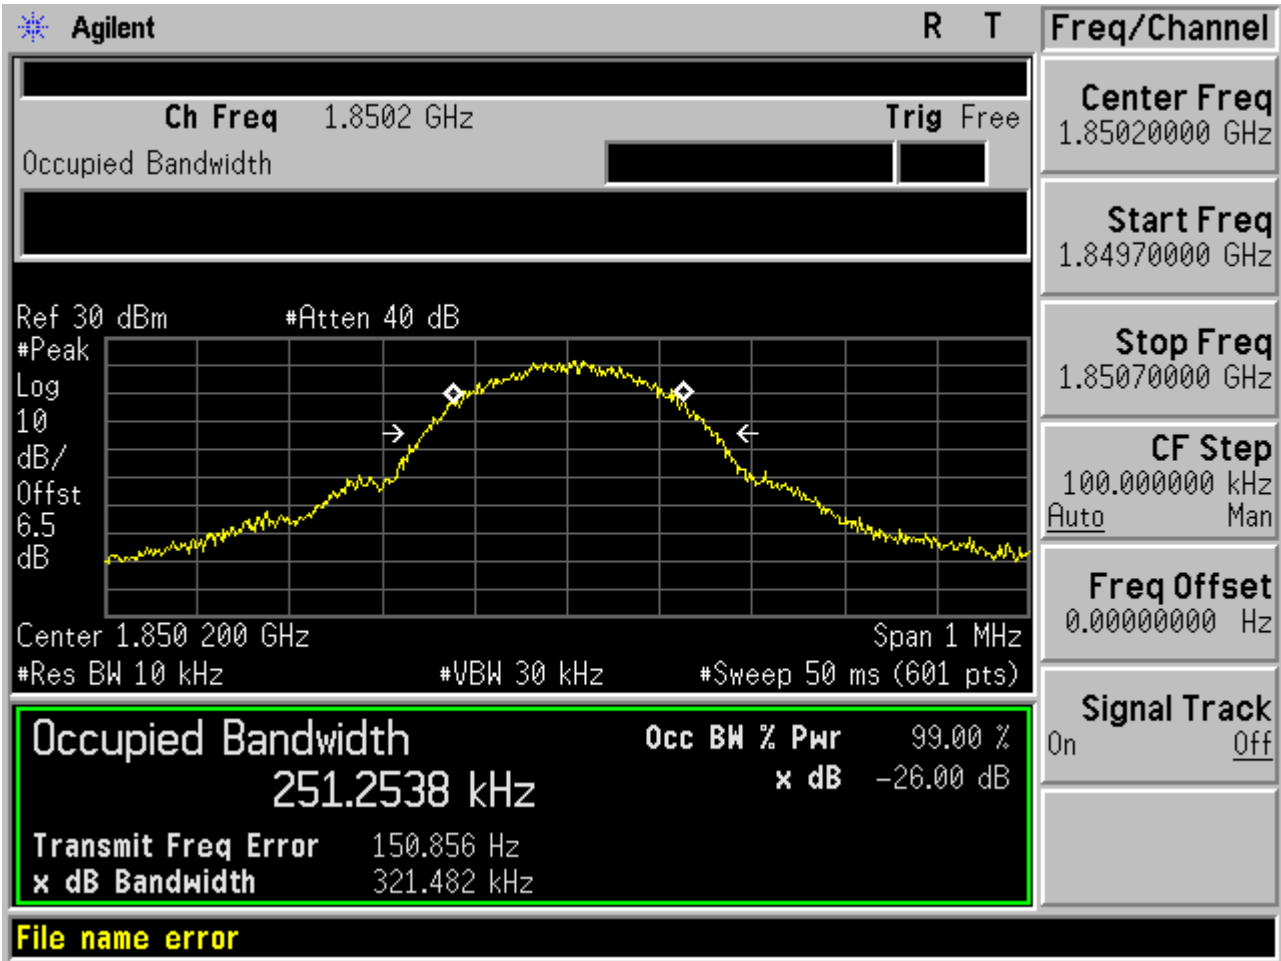

Test Channel=MCH

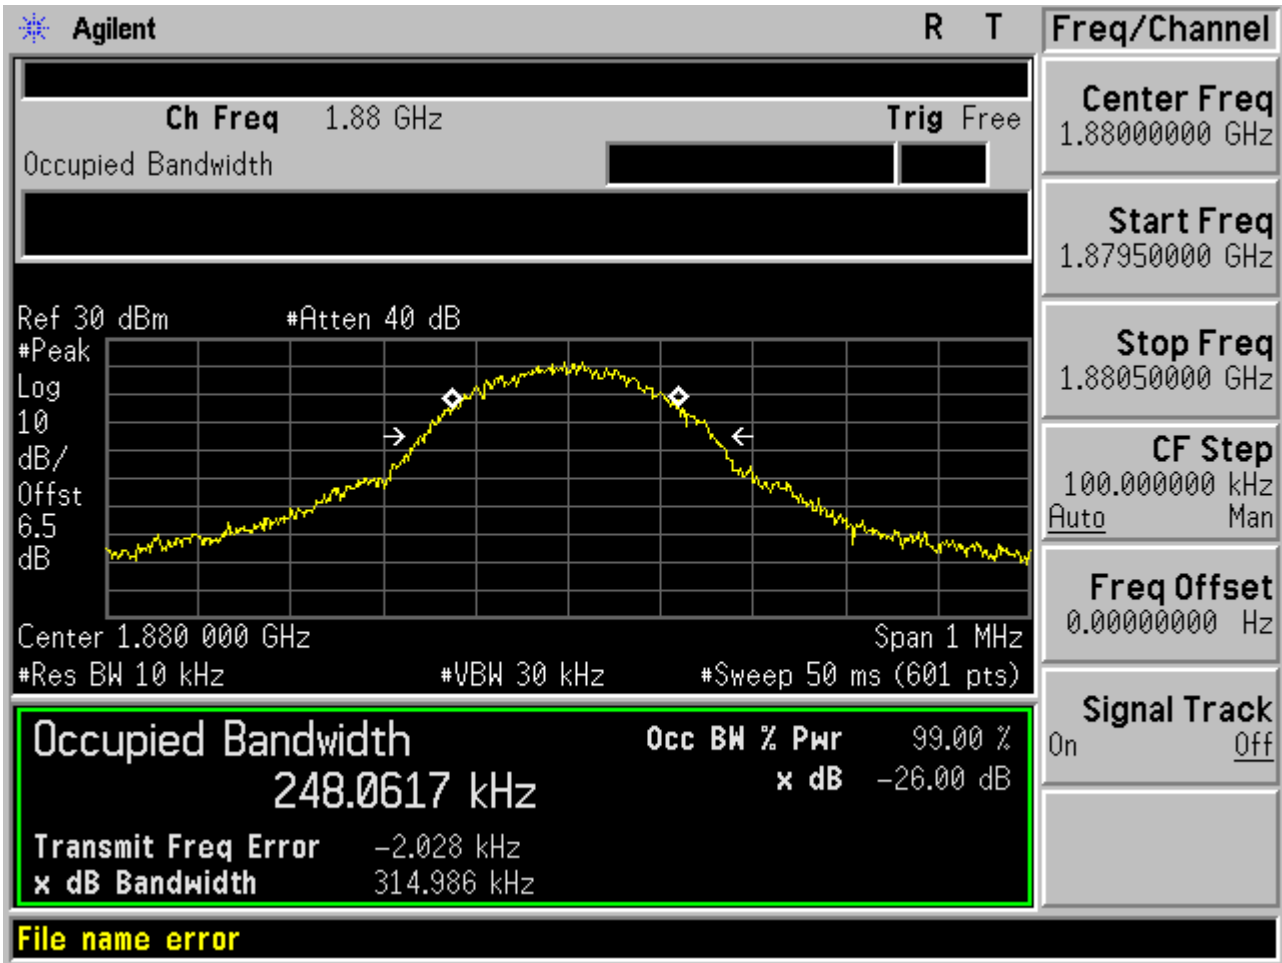

Test Channel=HCH

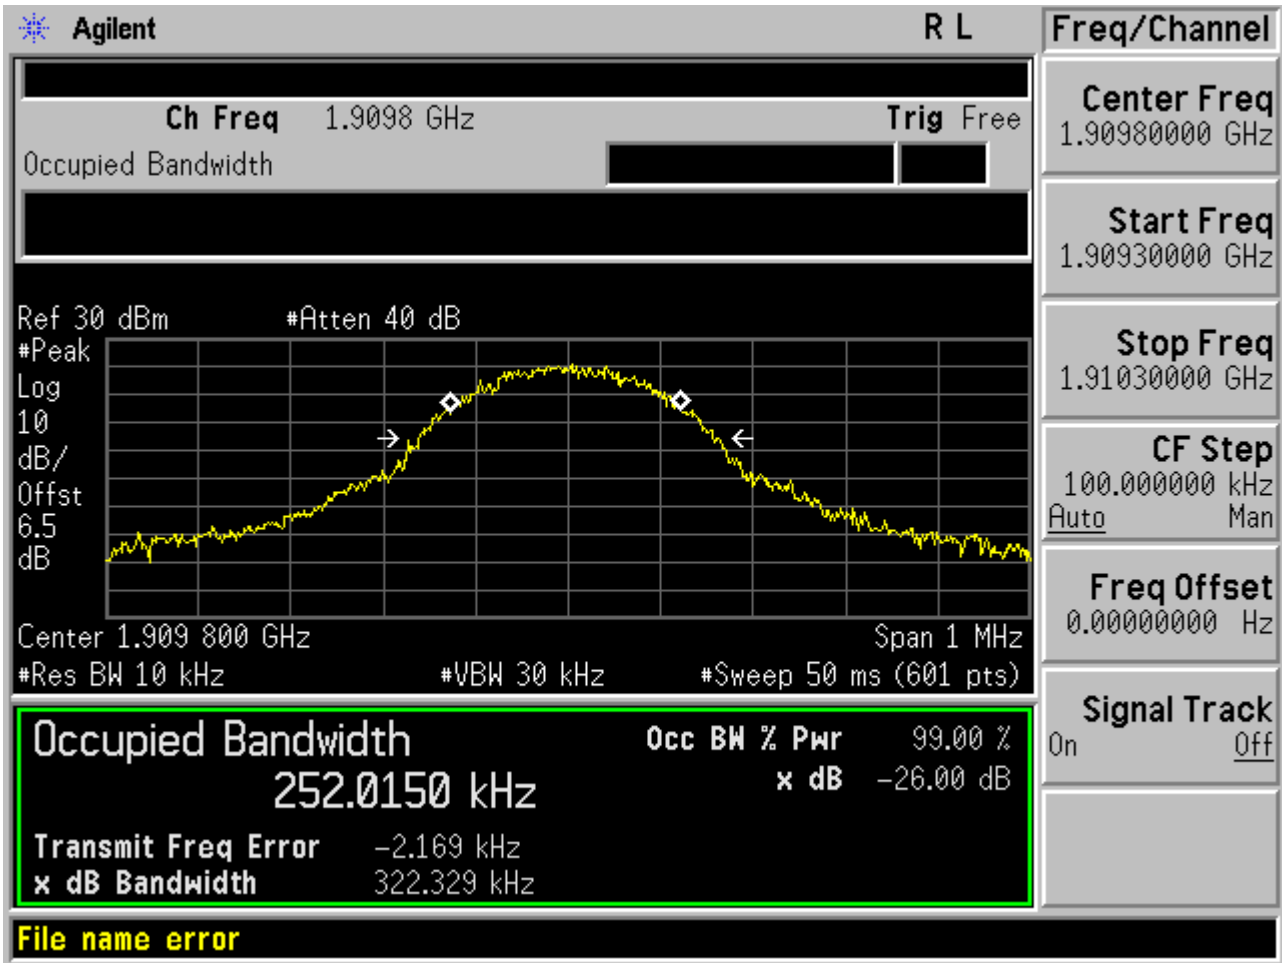

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA850	UMTS/TM1	LCH	4146.34	4649.98	PASS
		MCH	4149.67	4673.26	PASS
		HCH	4156.22	4661.08	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA1900	UMTS/TM1	LCH	4141.35	4668.34	PASS
		MCH	4142.37	4672.61	PASS
		HCH	4157.92	4680.73	PASS

For WCDMA


Test Band=WCDMA850

Test Mode=UMTS/TM1


Test Channel=LCH

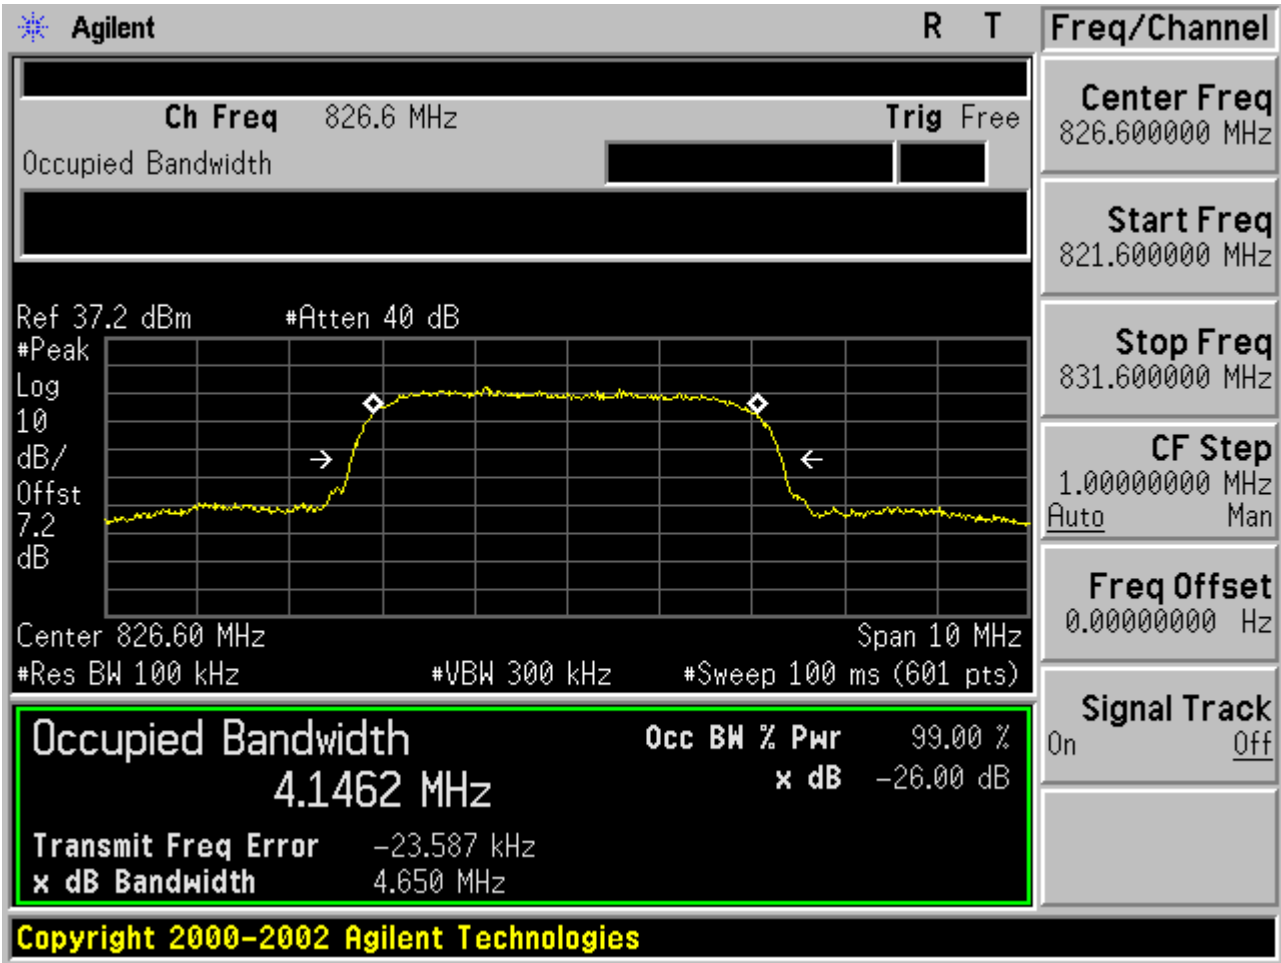

Test Channel=MCH

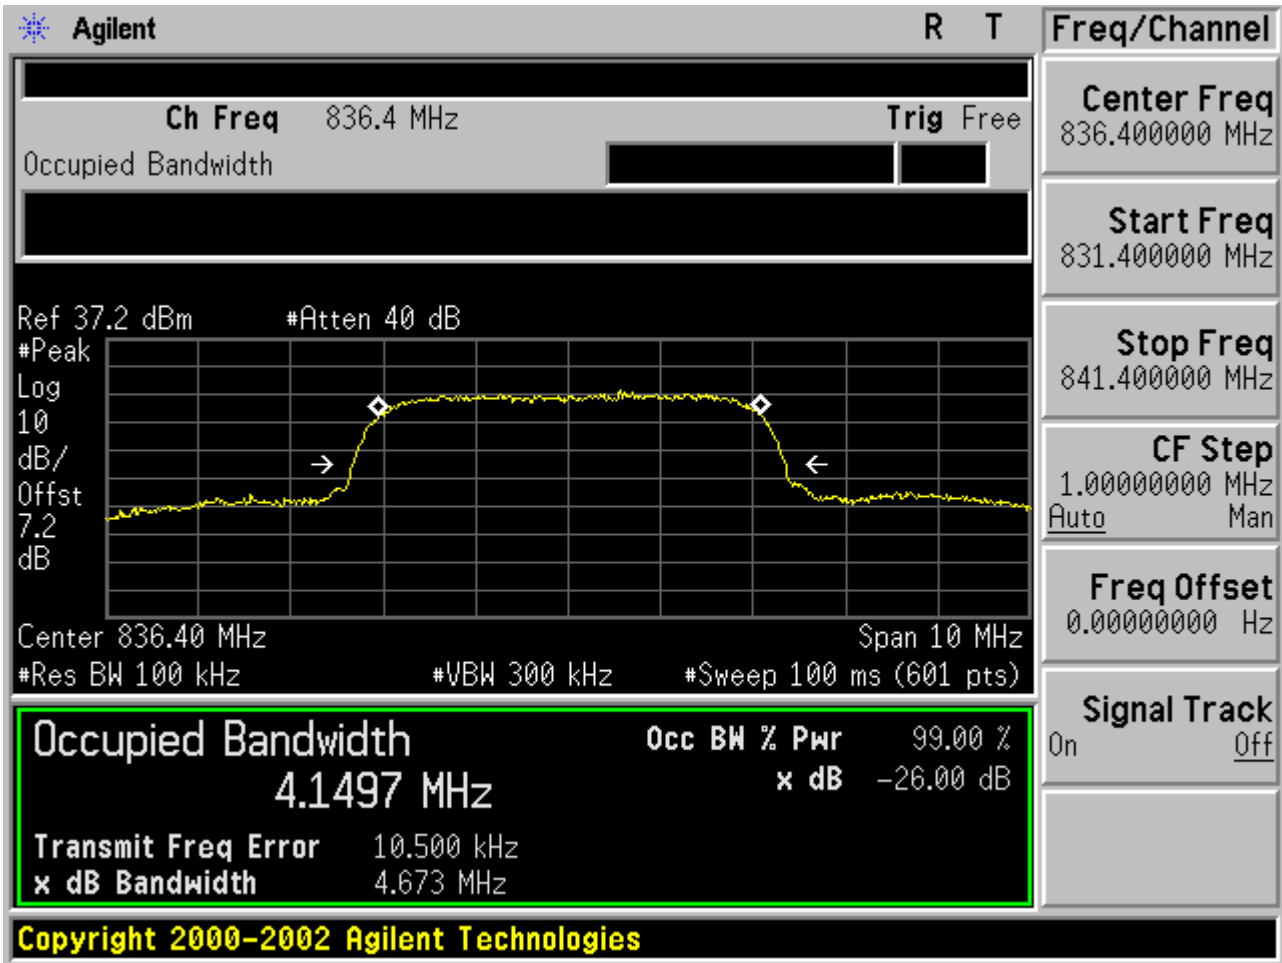


Test Channel=HCH

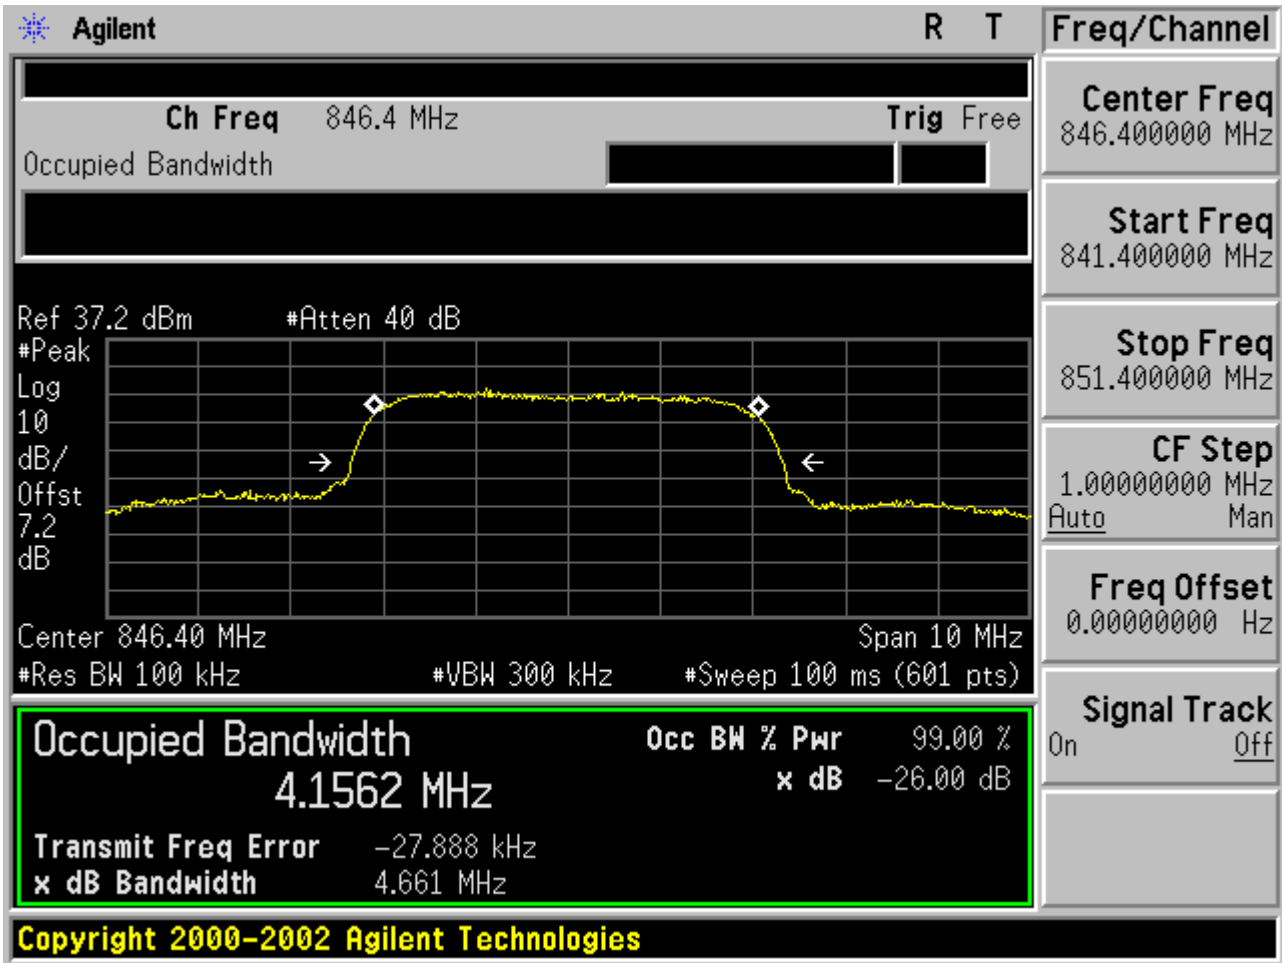

Test Band=WCDMA1900

Test Mode=UMTS/TM1

Test Channel=LCH

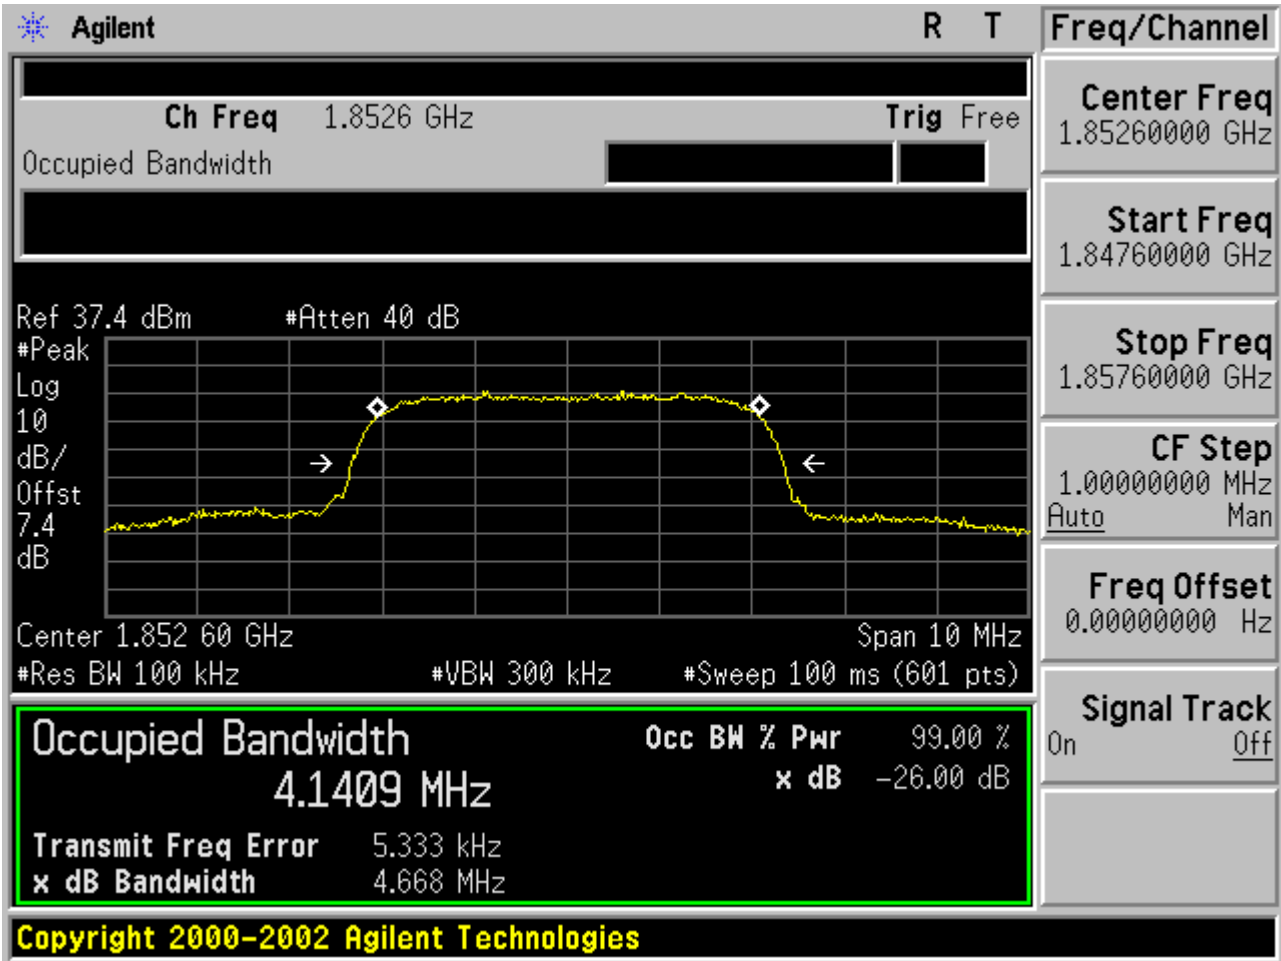

Freq/Channel

Center Freq 1.85260000 GHz

Start Freq 1.84760000 GHz

Stop Freq 1.85760000 GHz


CF Step 1.00000000 MHz

Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

Test Channel=MCH

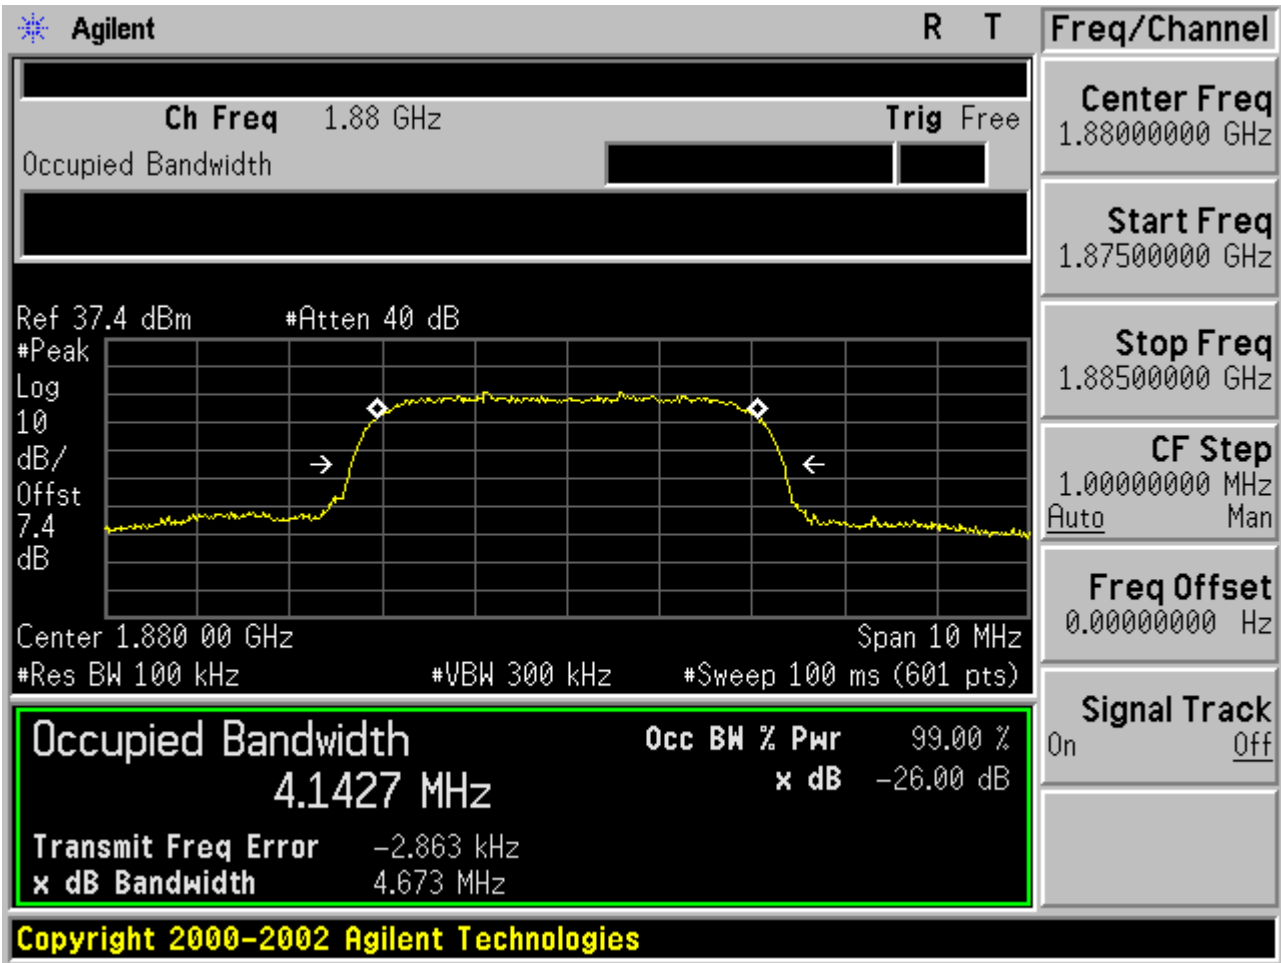

Test Channel=HCH

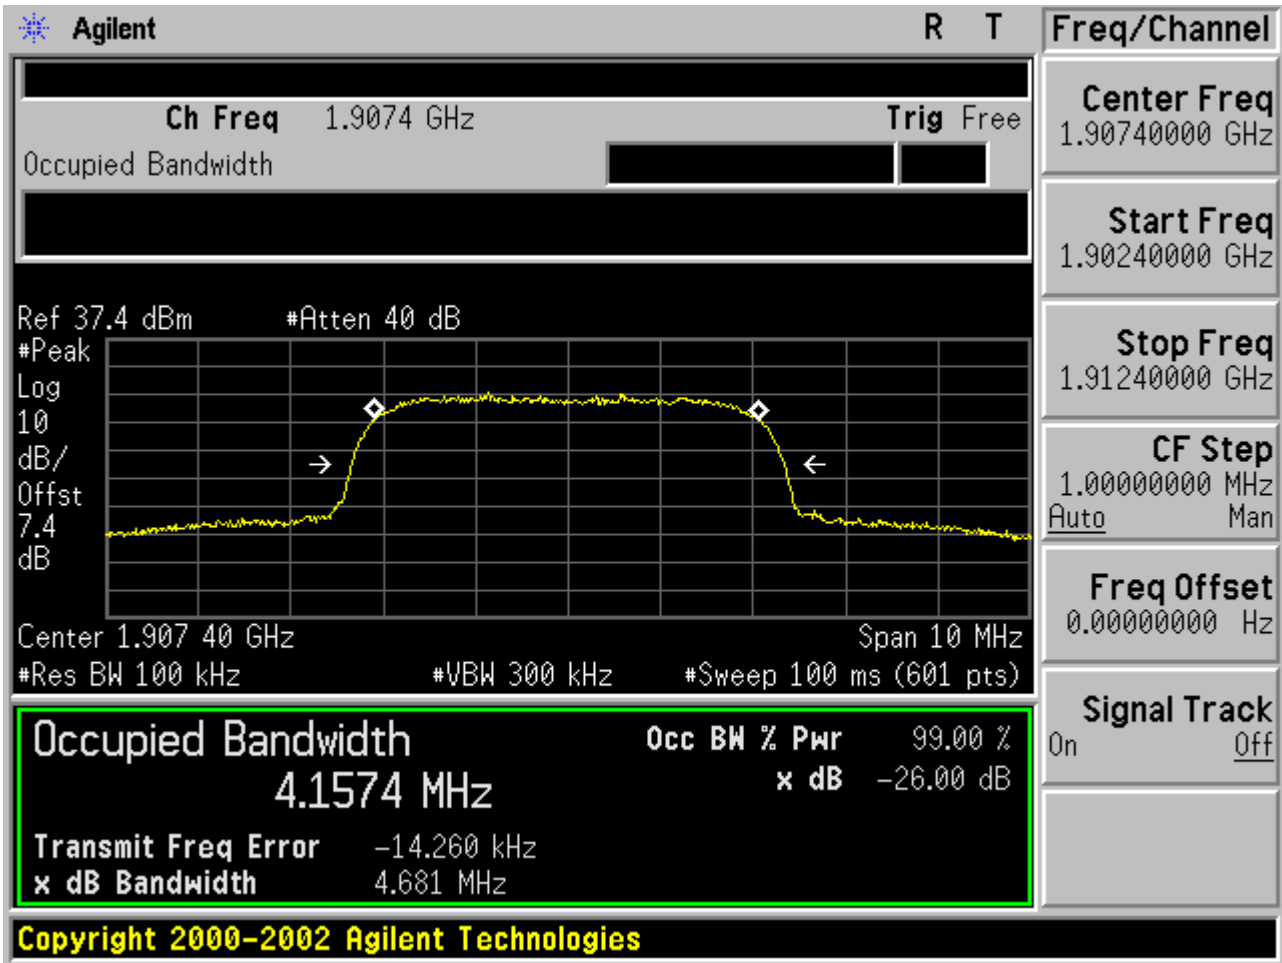

8. BAND EDGE

8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

8.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a) and 24.238(a)

8.3 MEASUREMENT RESULT

APPENDIX C: BAND EDGES COMPLIANCE


Test Results

For GSM


Test Band=GSM850

Test Mode=GSM/TM1


Test Channel=LCH

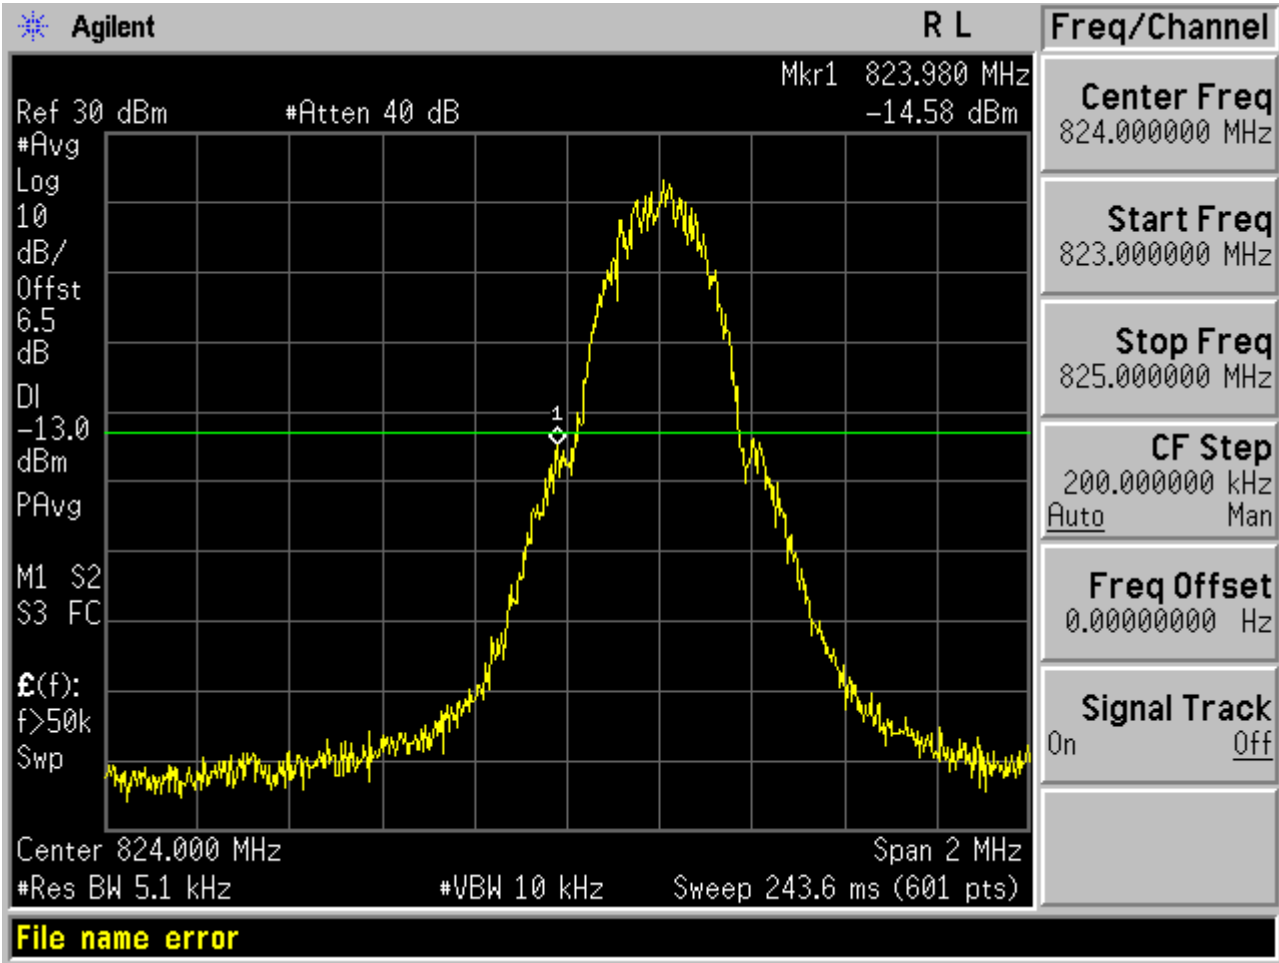


Test Channel=HCH

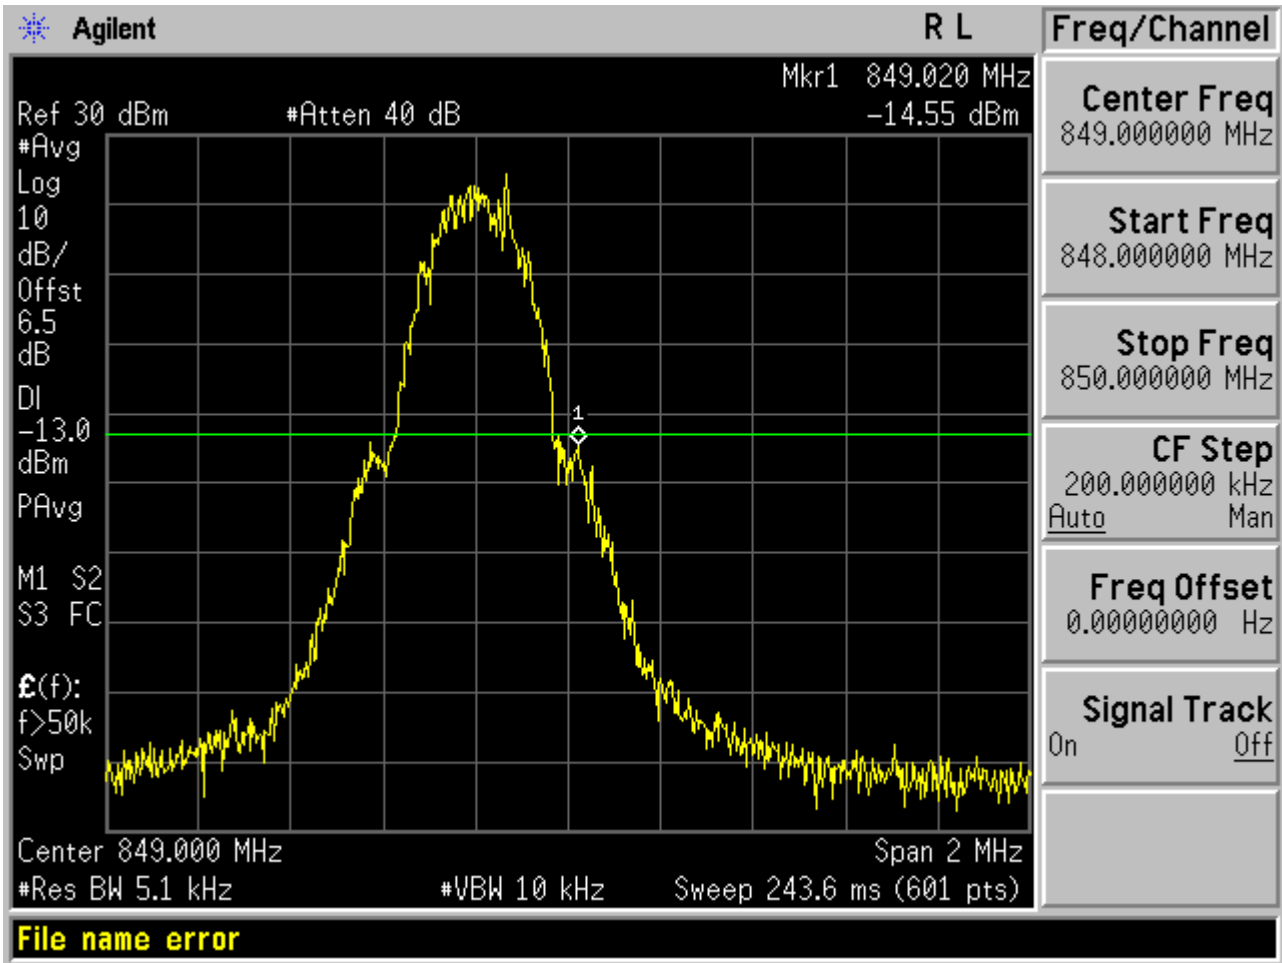

Test Mode=GSM/TM2
Test Channel=LCH

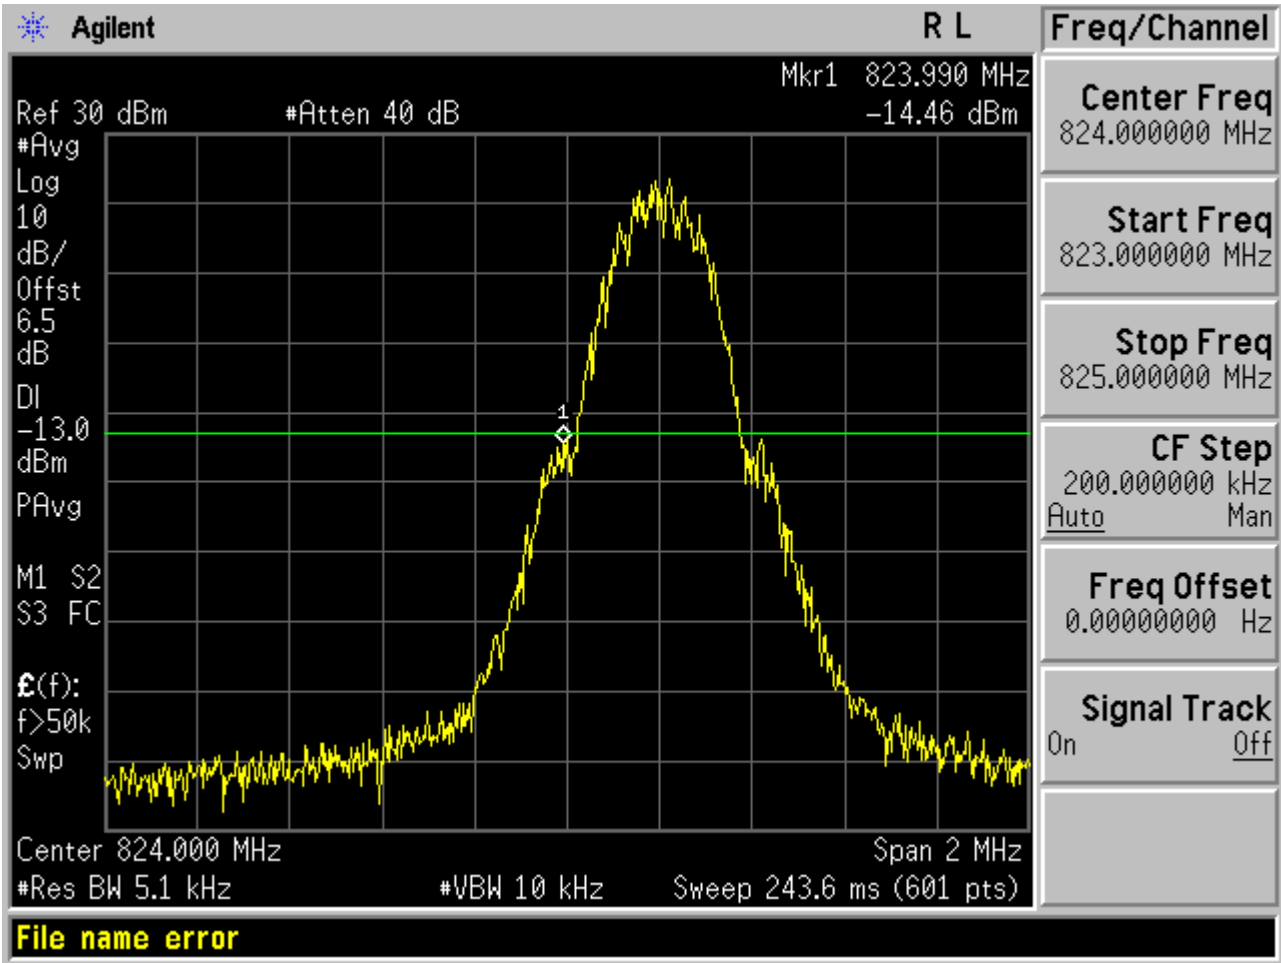


Test Channel=HCH

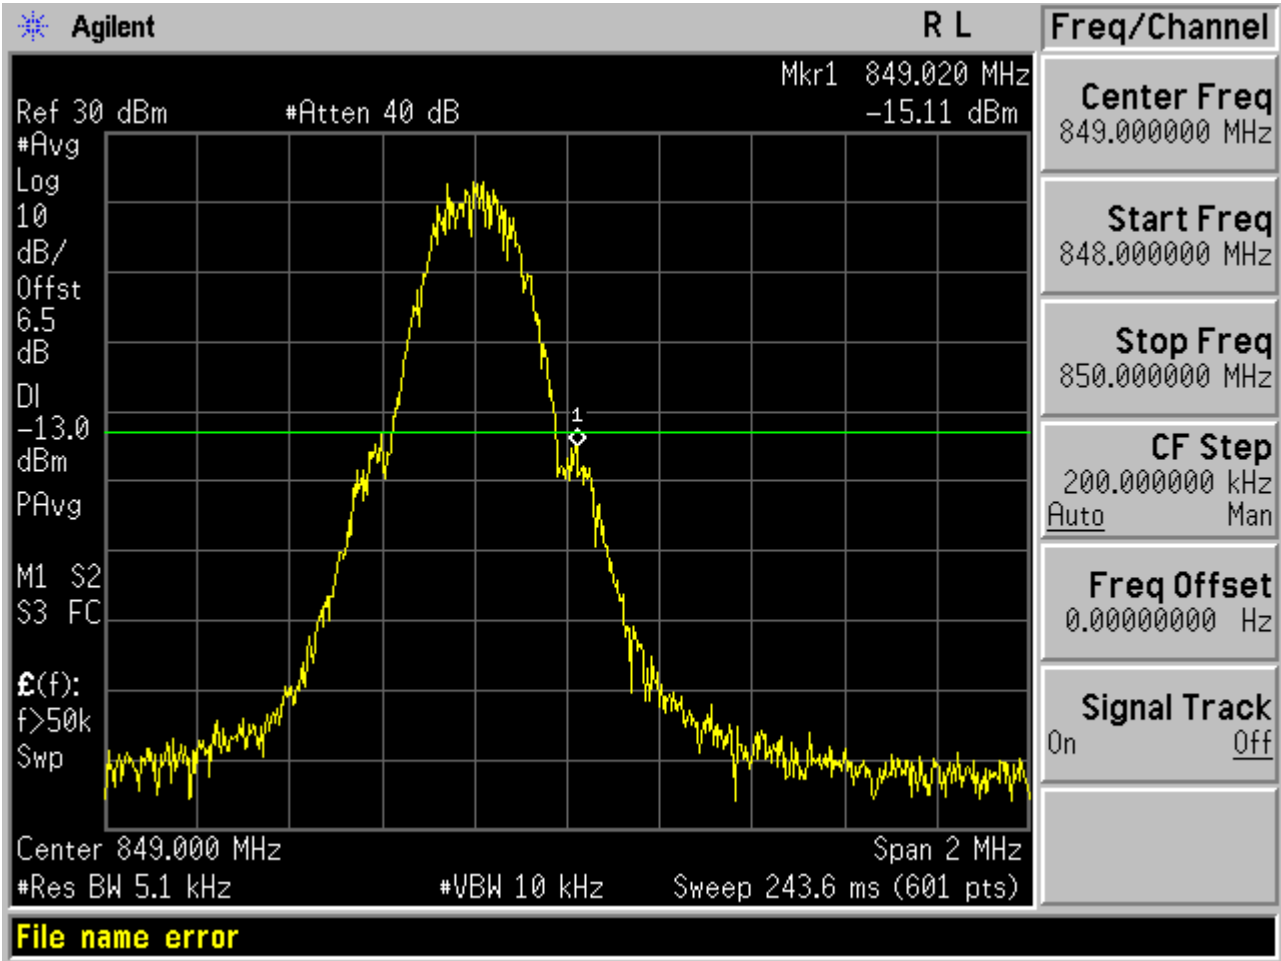


Test Mode=GSM/TM3

Test Channel=LCH

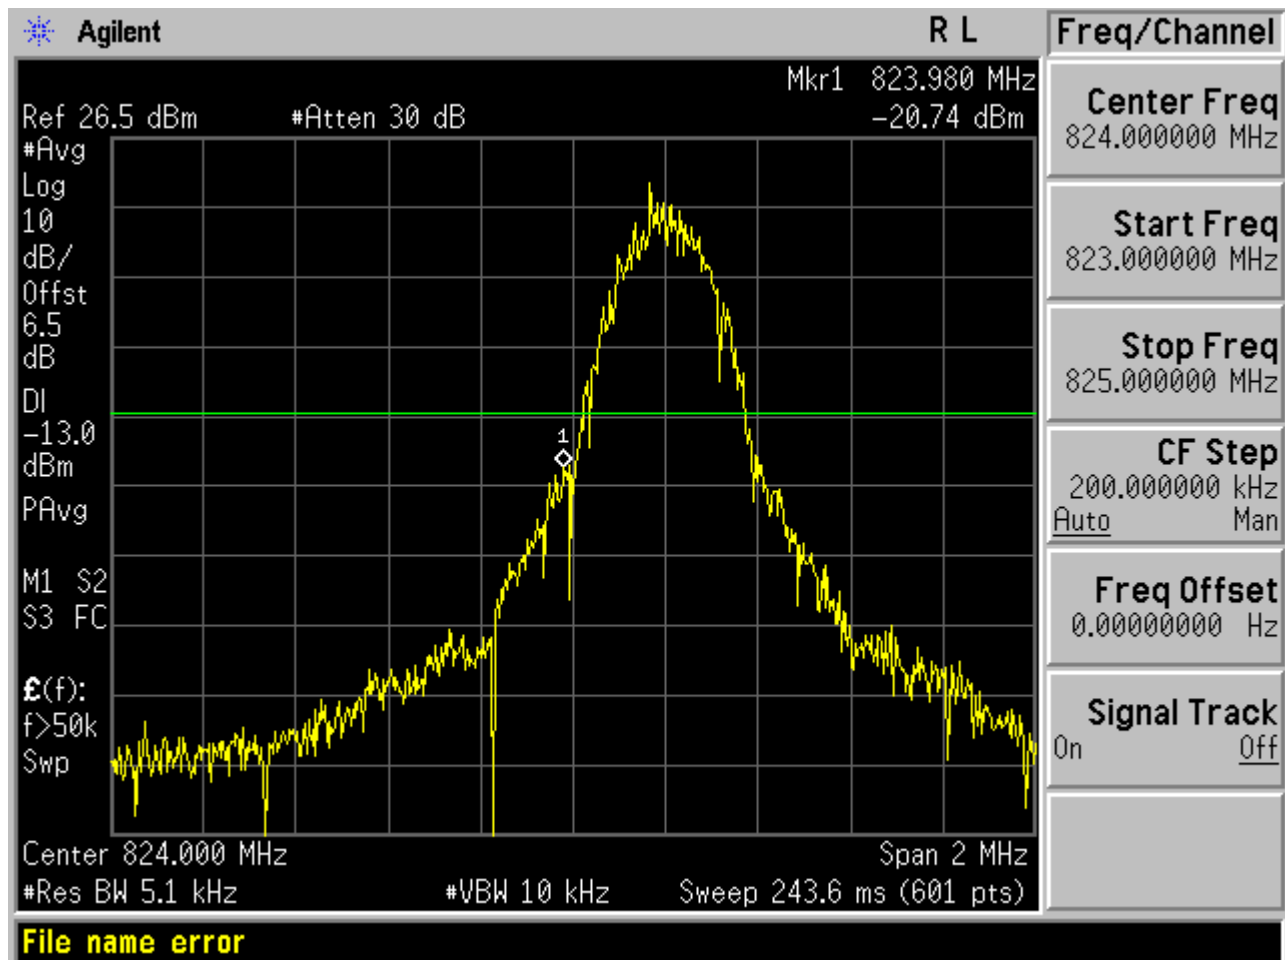


Test Channel=HCH

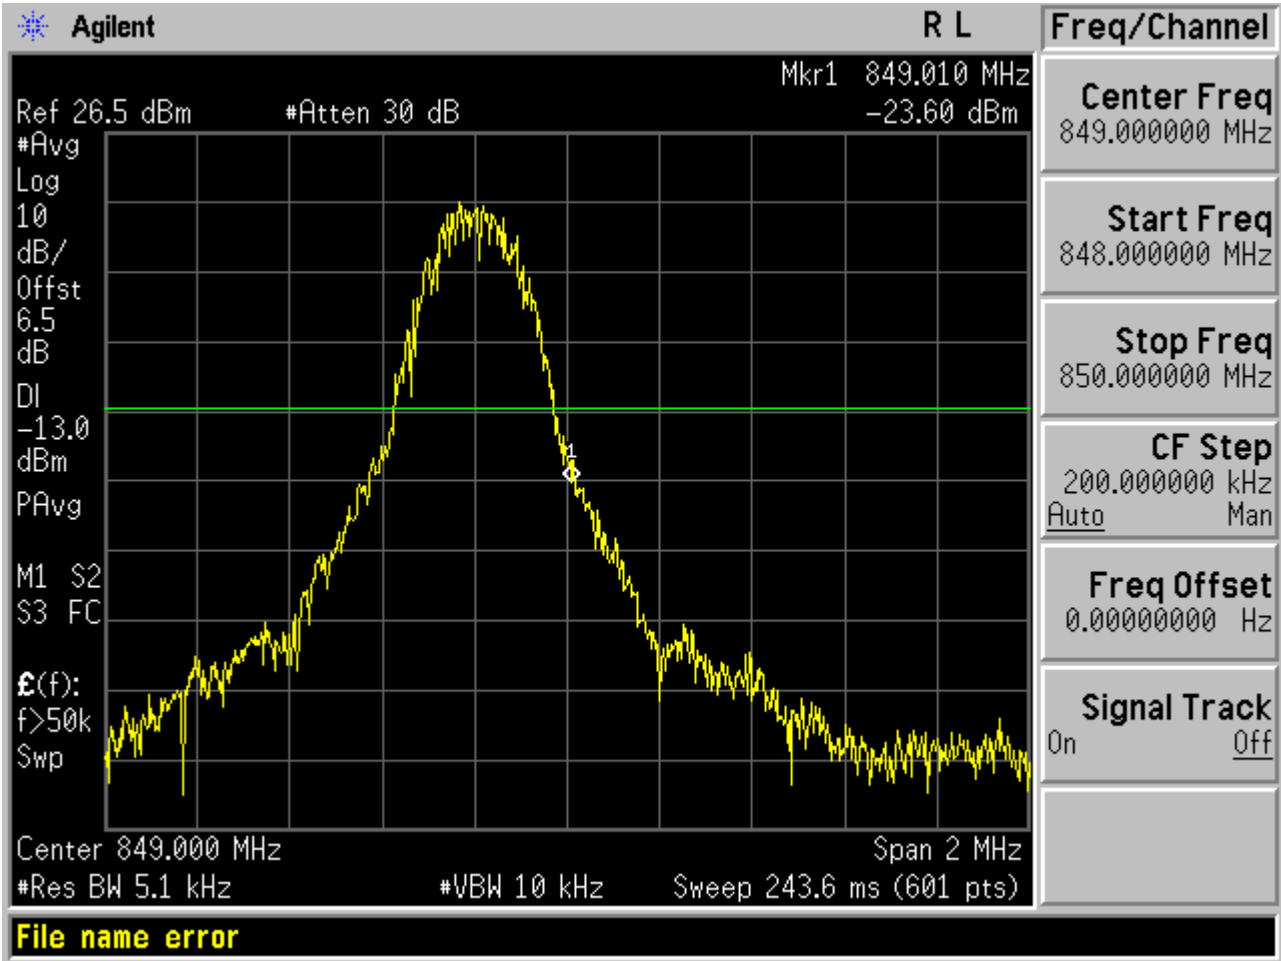


Test Band=GSM1900

Test Mode=GSM/TM1

Test Channel=LCH

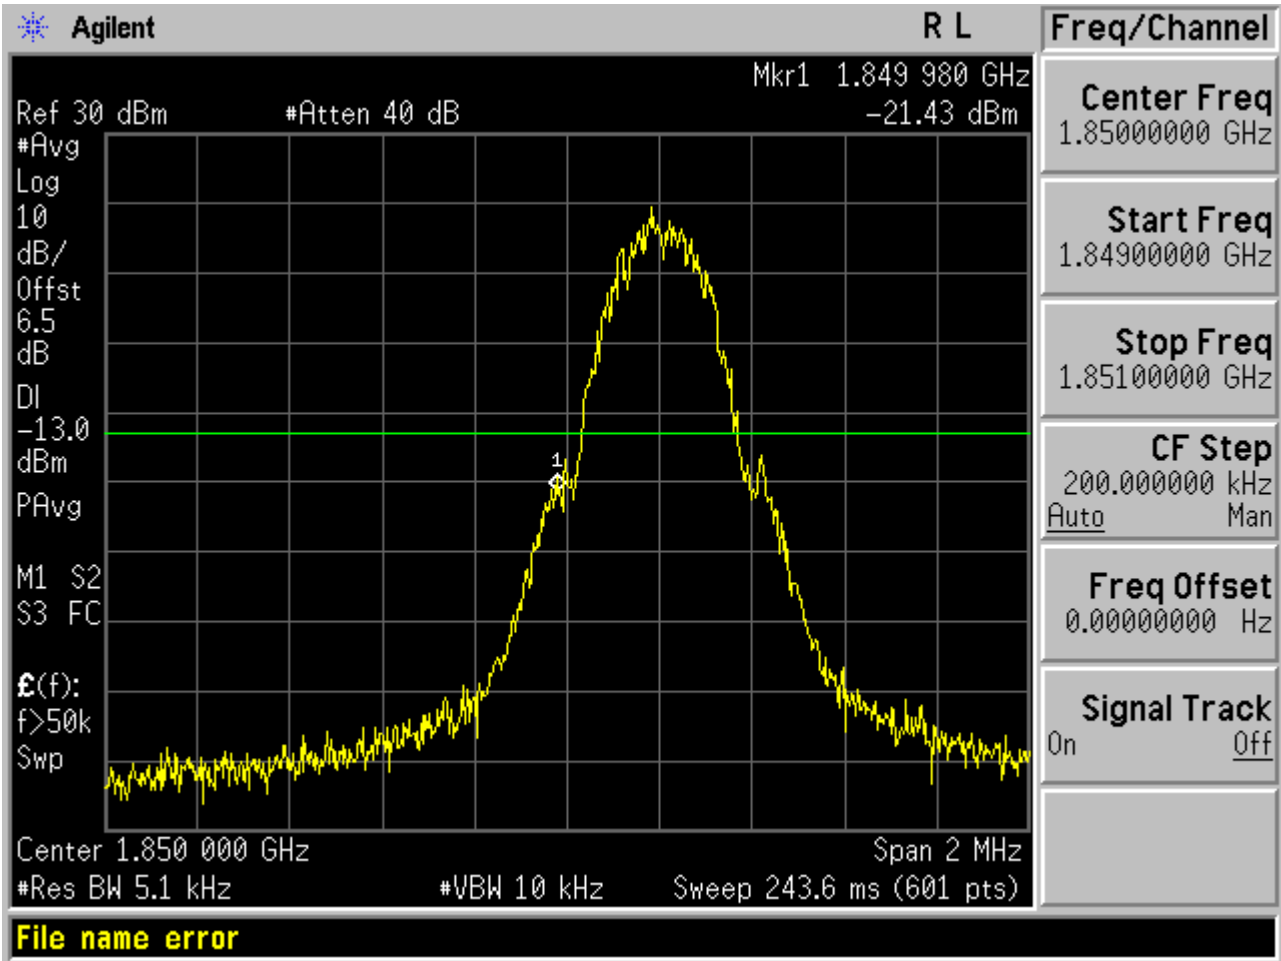


Test Channel=HCH

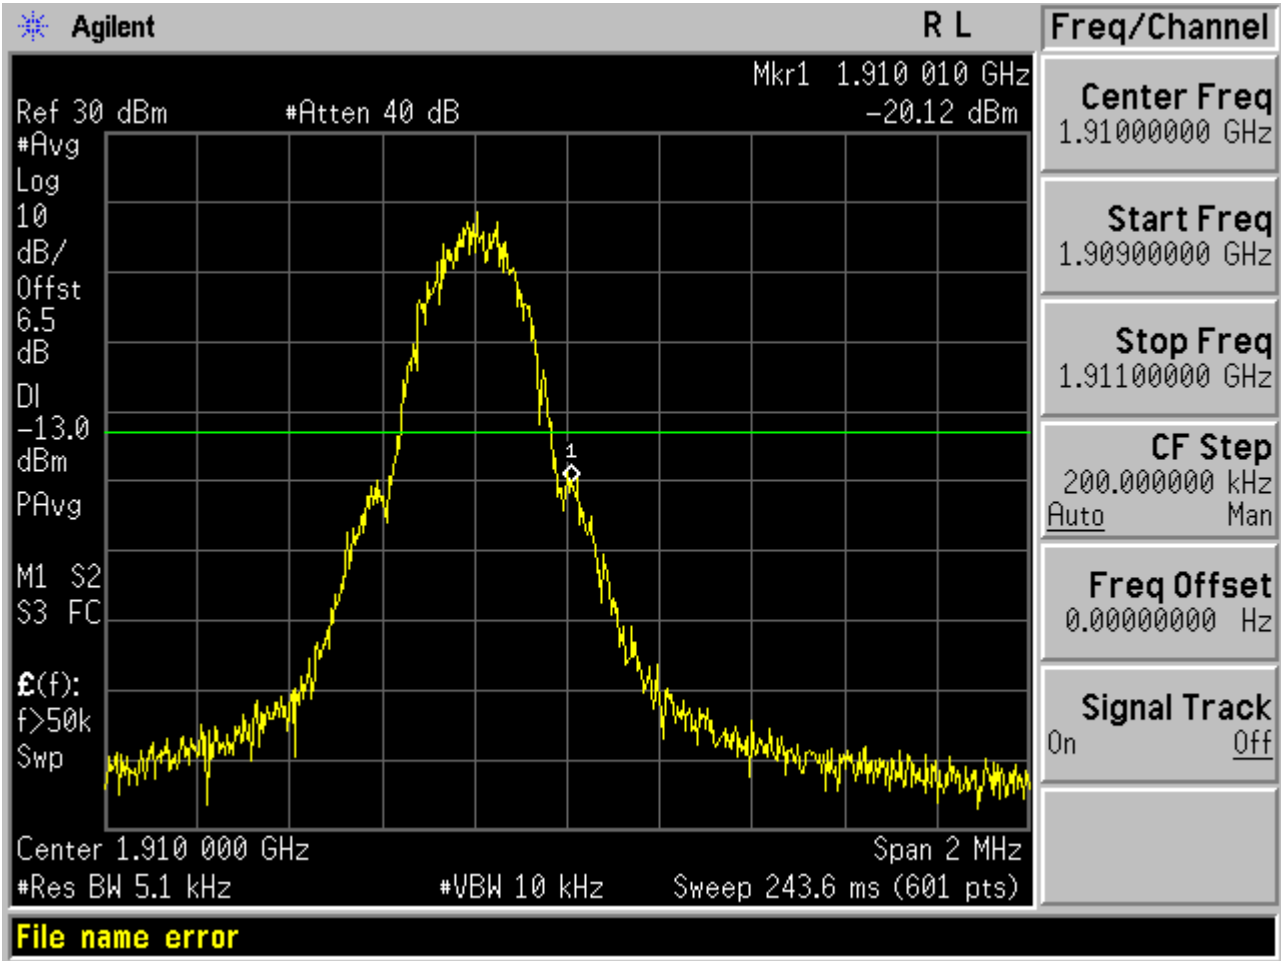


Test Mode=GSM/TM2


Test Channel=LCH

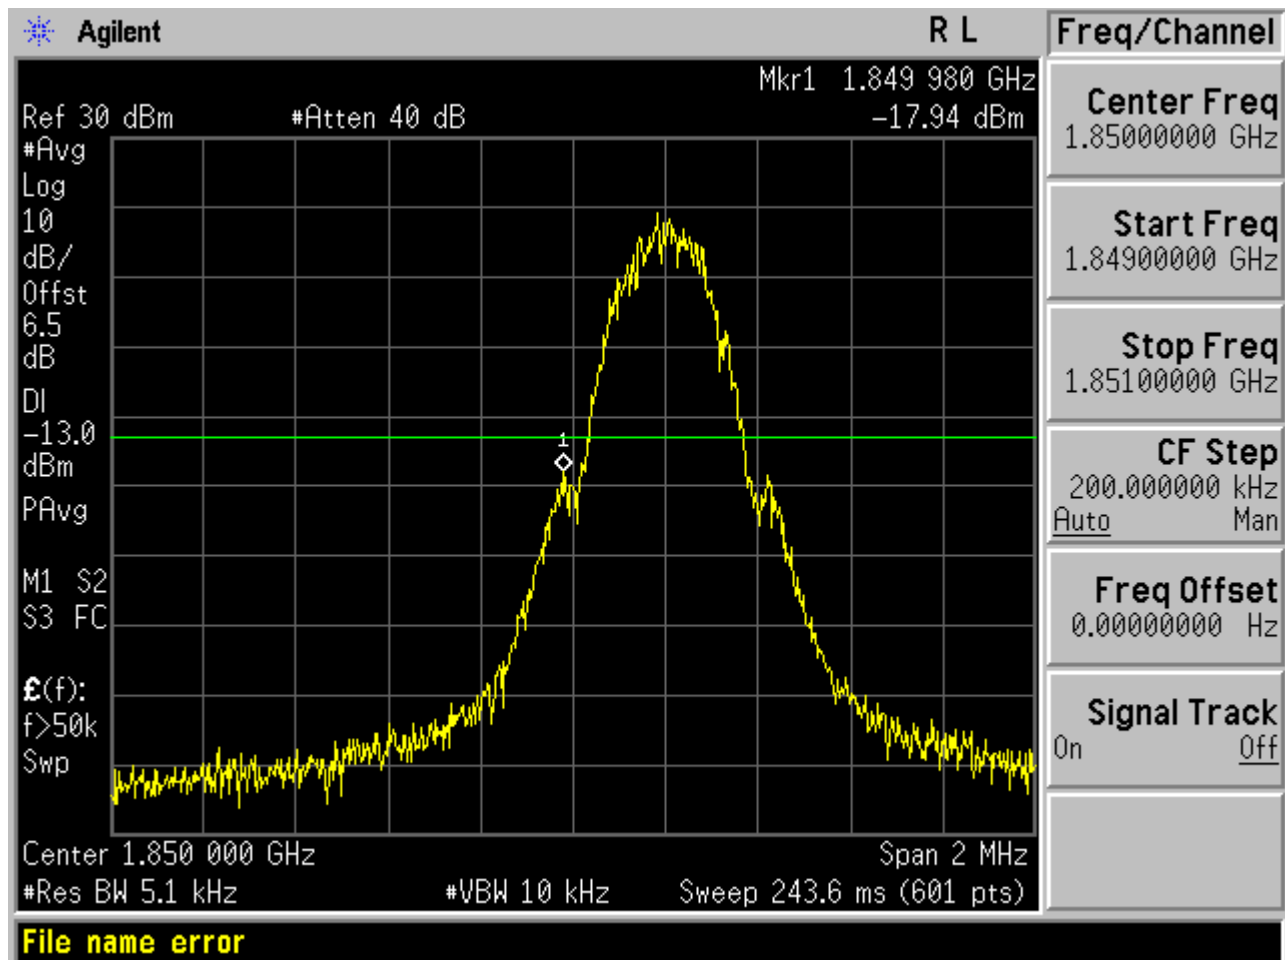


Test Channel=HCH

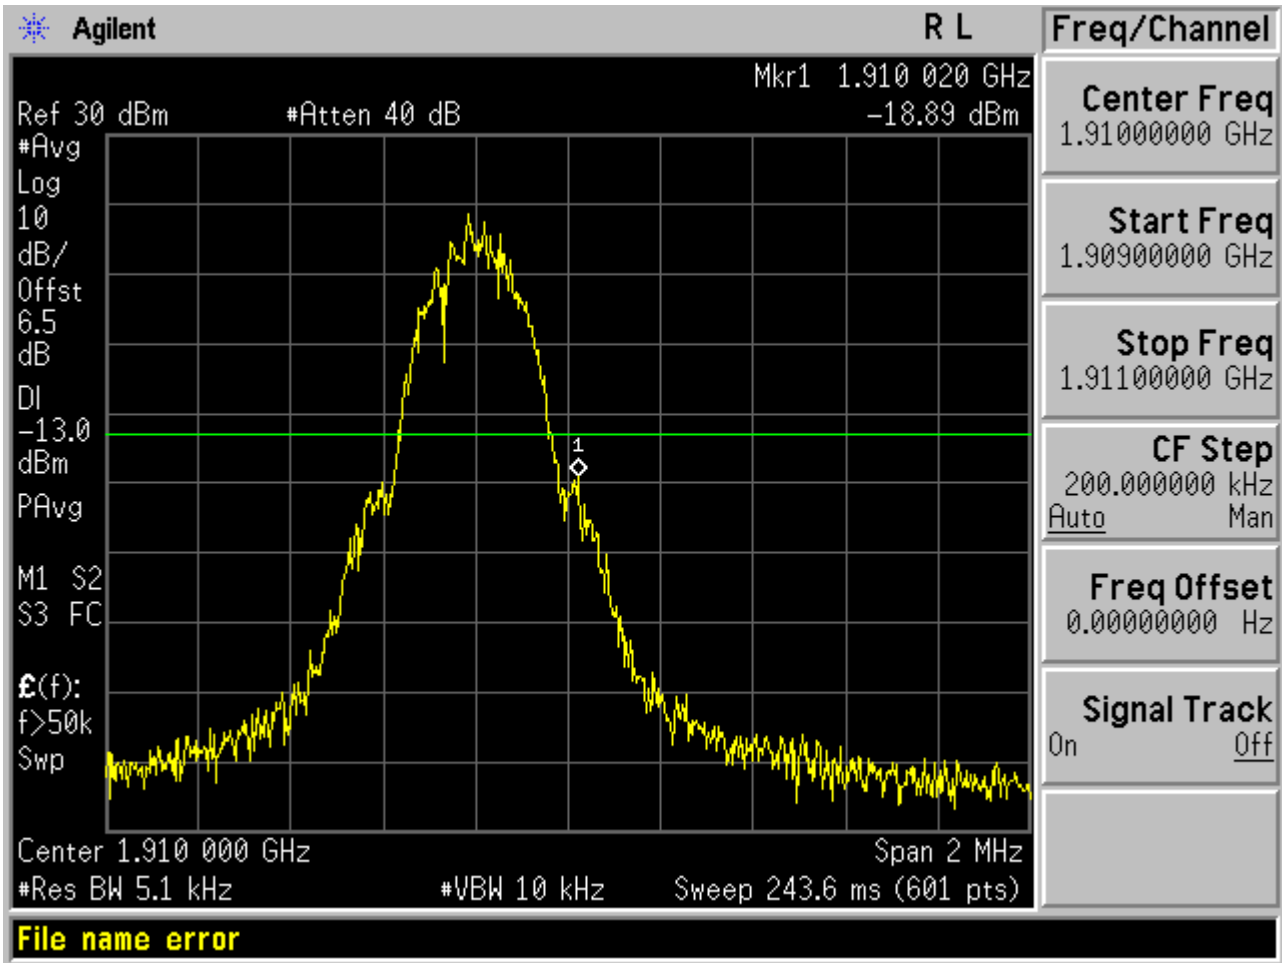

Test Mode=GSM/TM3
Test Channel=LCH

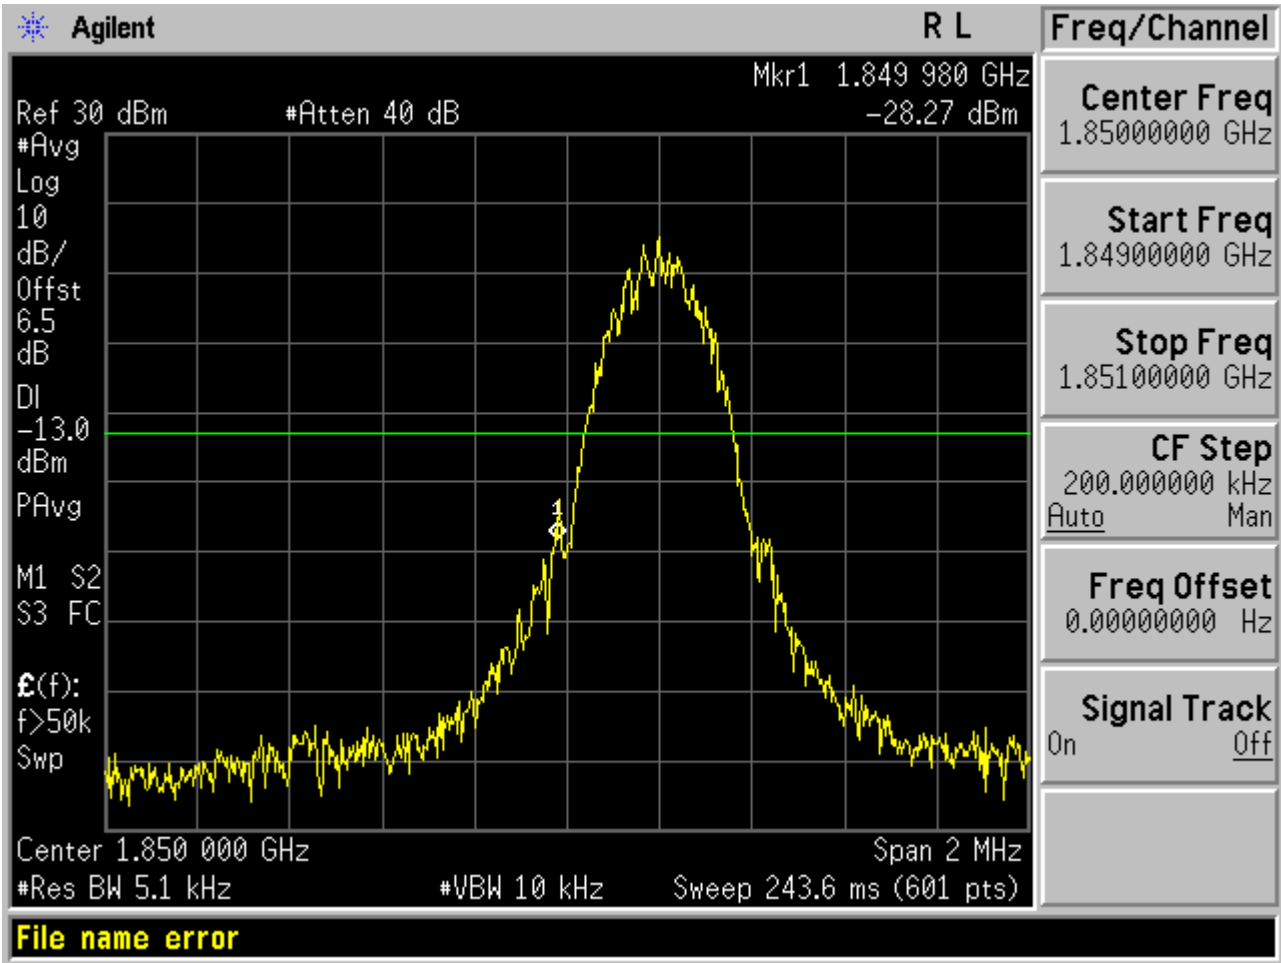

Test Channel=HCH

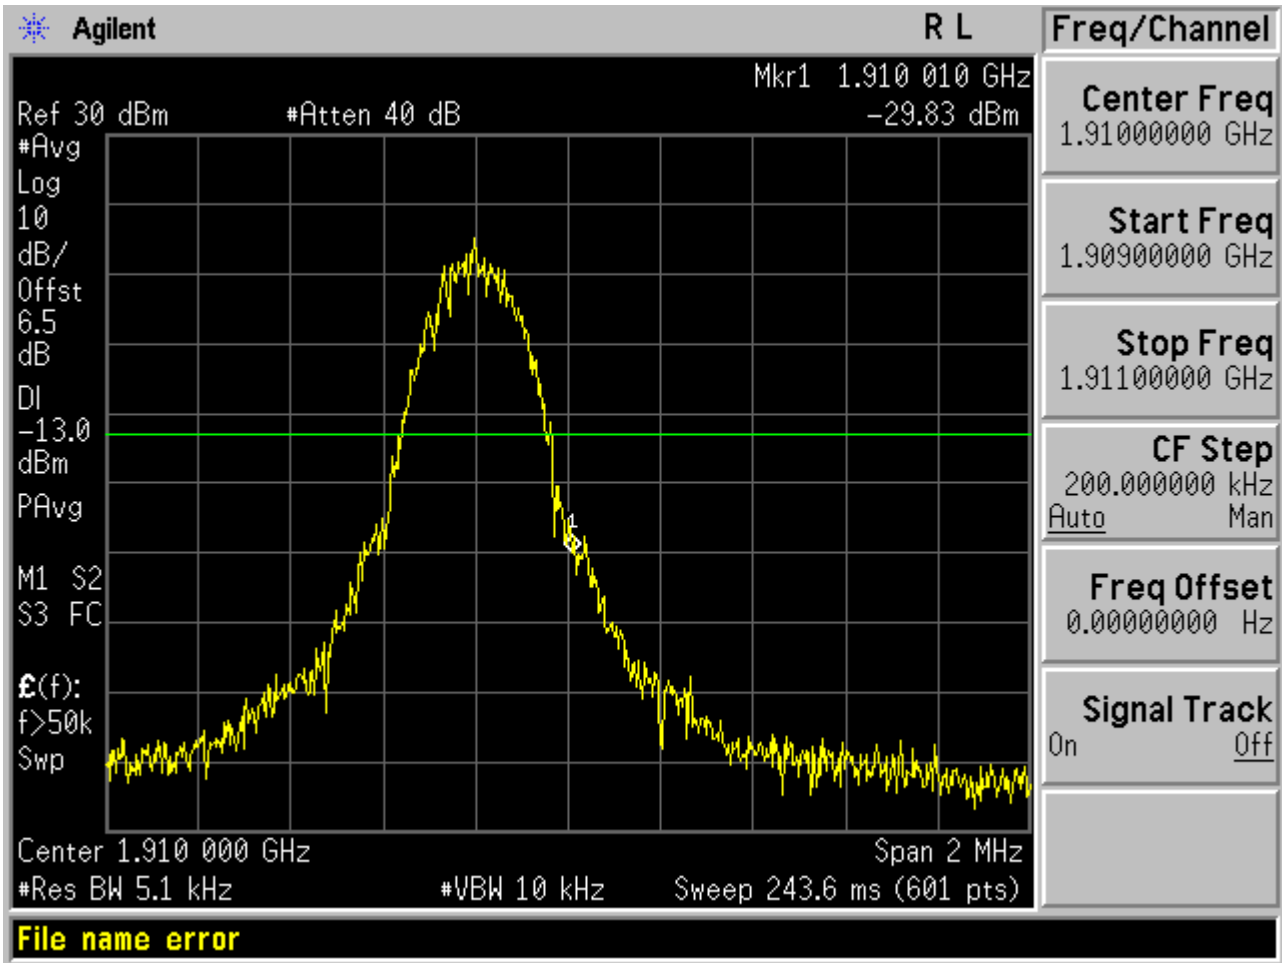


For WCDMA


Test Band=WCDMA850

Test Mode=UMTS/TM1

Test Channel=LCH

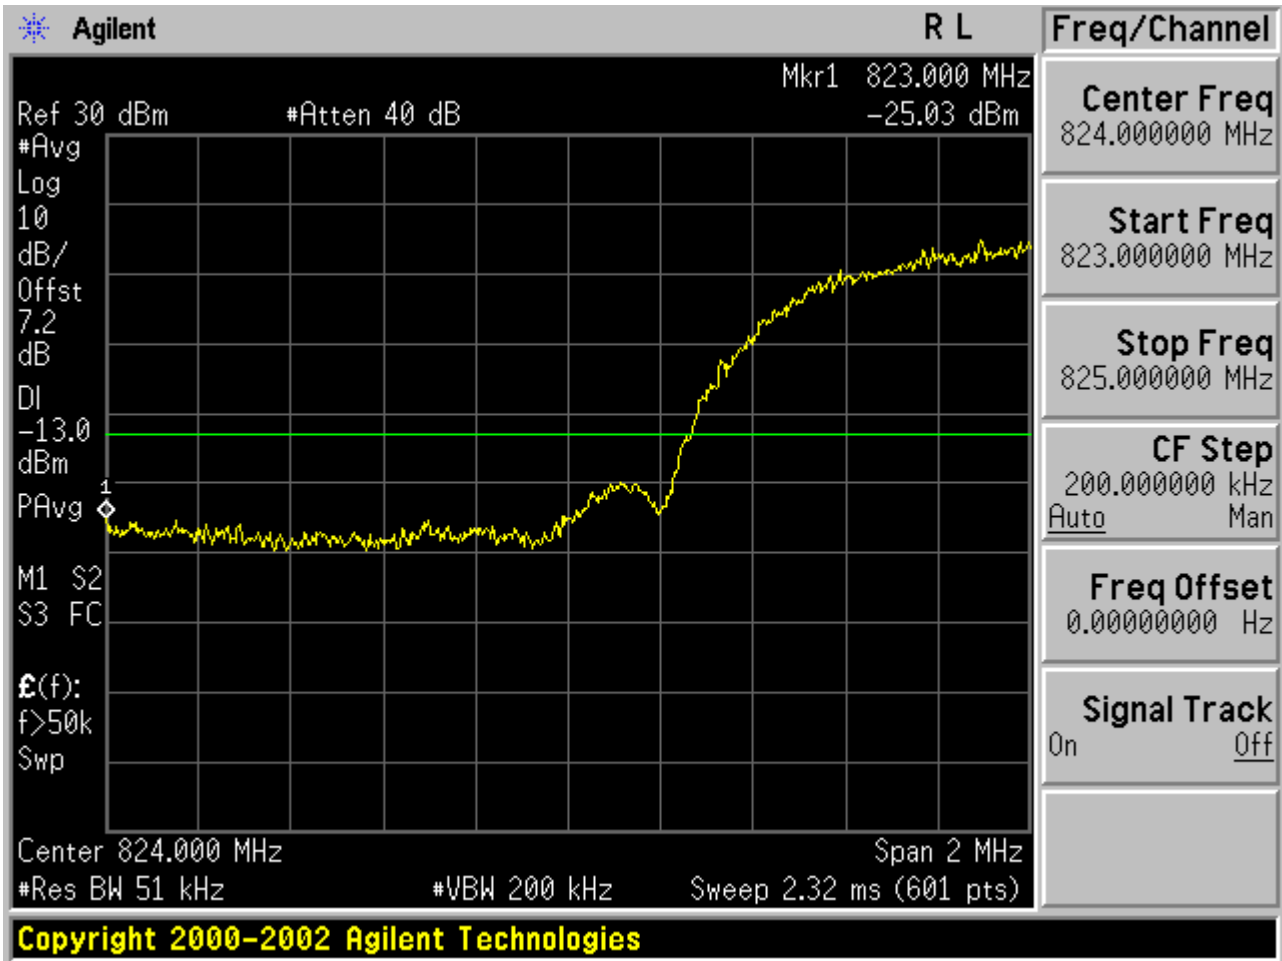


Test Channel=HCH

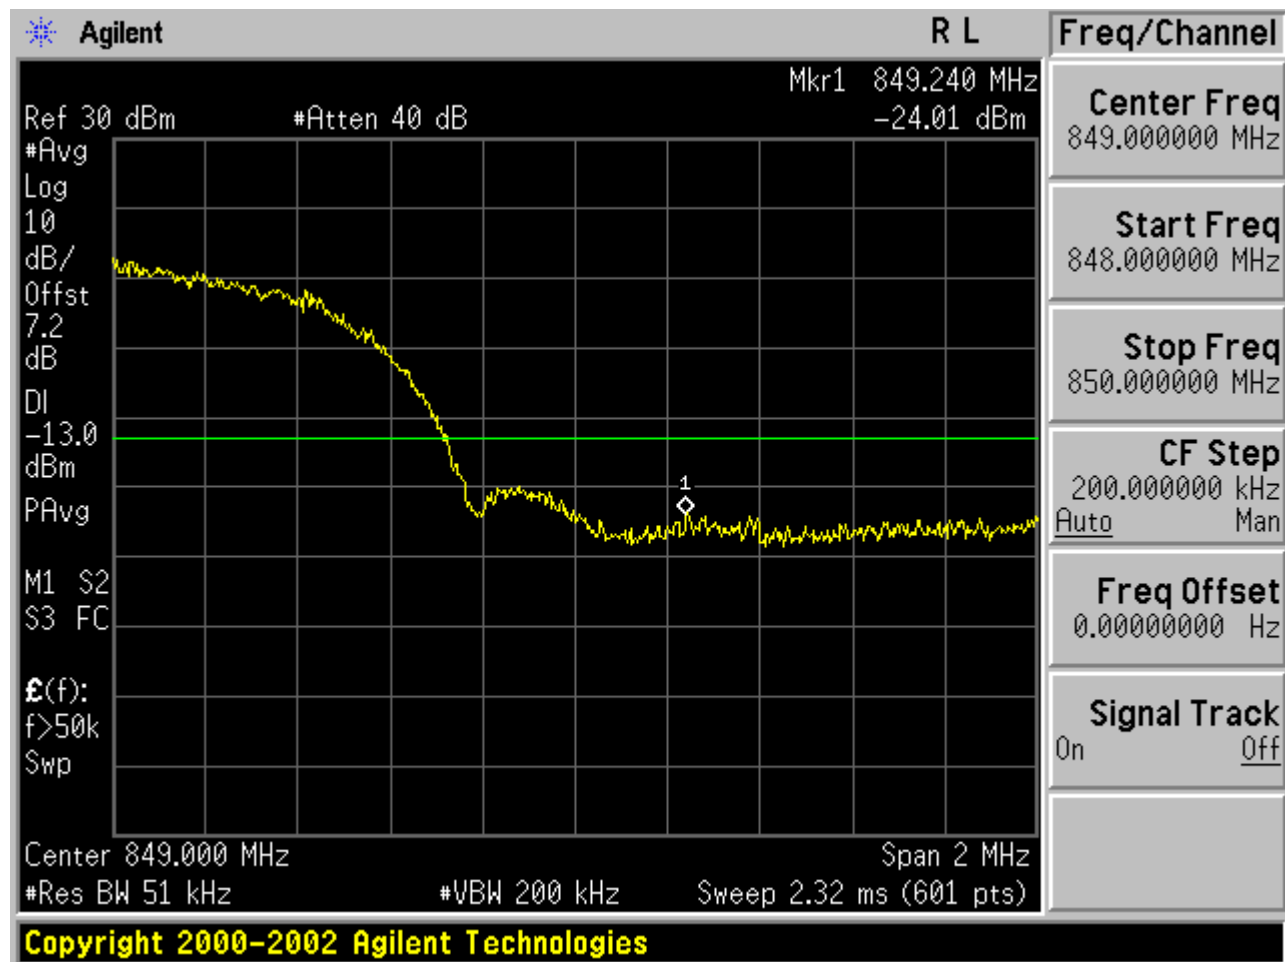


Test Band=WCDMA1900

Test Mode=UMTSTM1

Test Channel=LCH

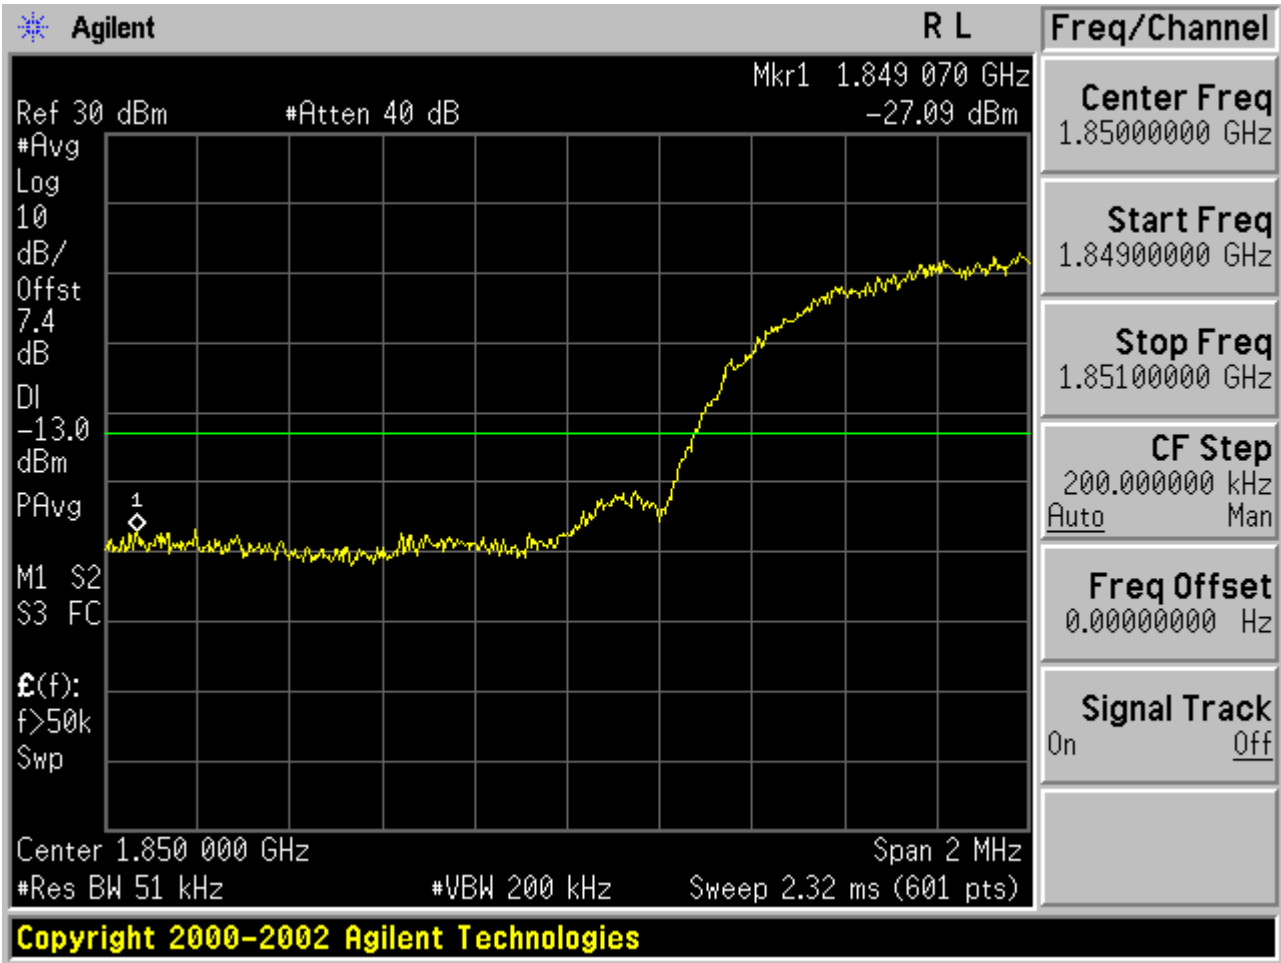

Test Channel=HCH

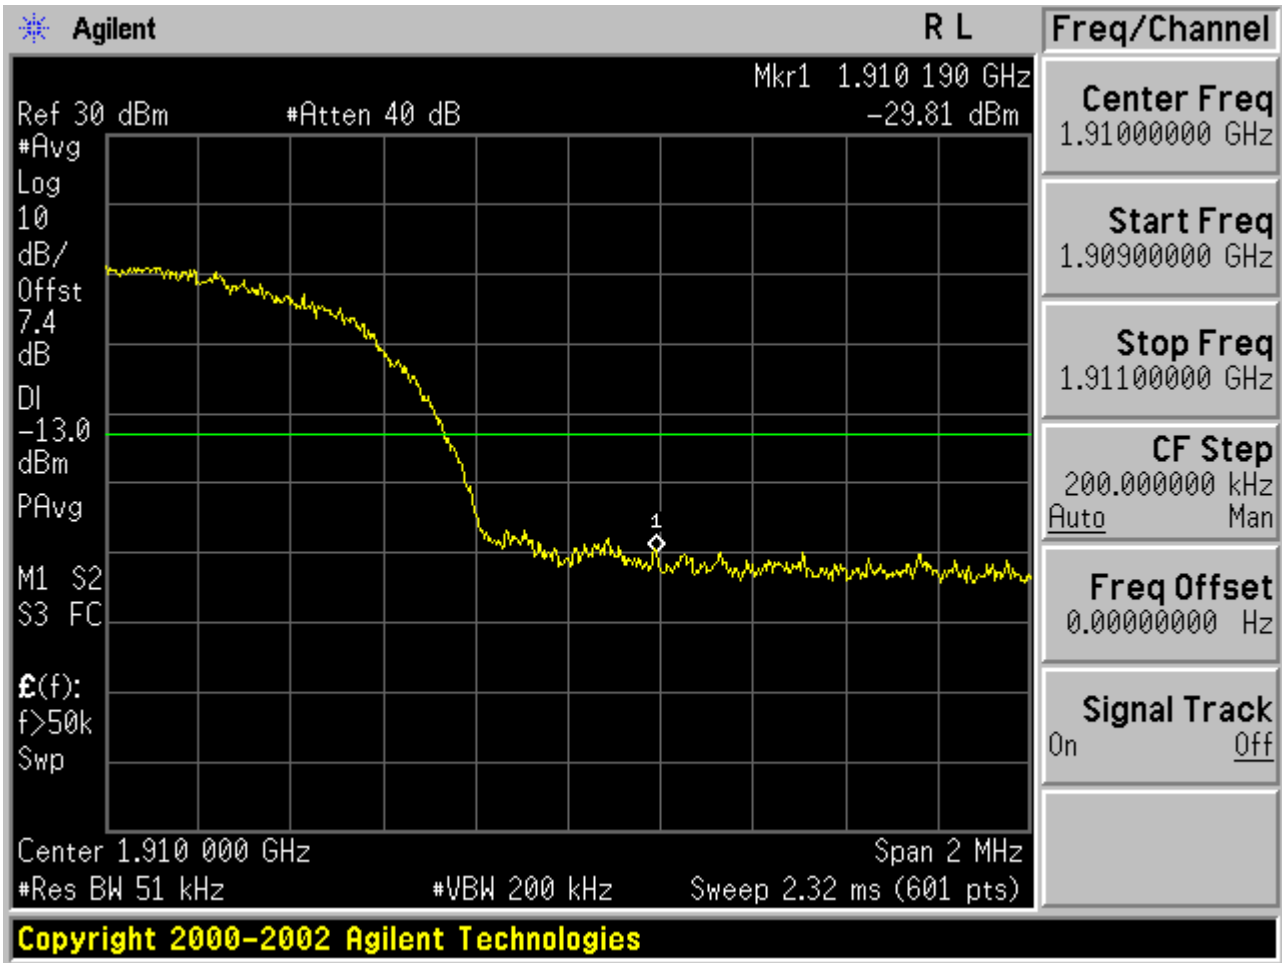

9. SPURIOUS EMISSION

9.1 CONDUCTED SPURIOUS EMISSION

9.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM 850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850/EDGE 8	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900/EDGE 8	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9663	1852.6
9800	1880
9937	1907.4

Typical Channels for testing of UMTS band V	
Channel	Frequency (MHz)
4358	826.6
4407	836.4
4457	846.4

9.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

9.1.3 MEASUREMENT RESULT


APPENDIX D: SPURIOUS EMISSION AT ANTENNA TERMINAL


Test Results

Test Band=GSM850


Test Mode=GSM/TM1


Test Channel=LCH

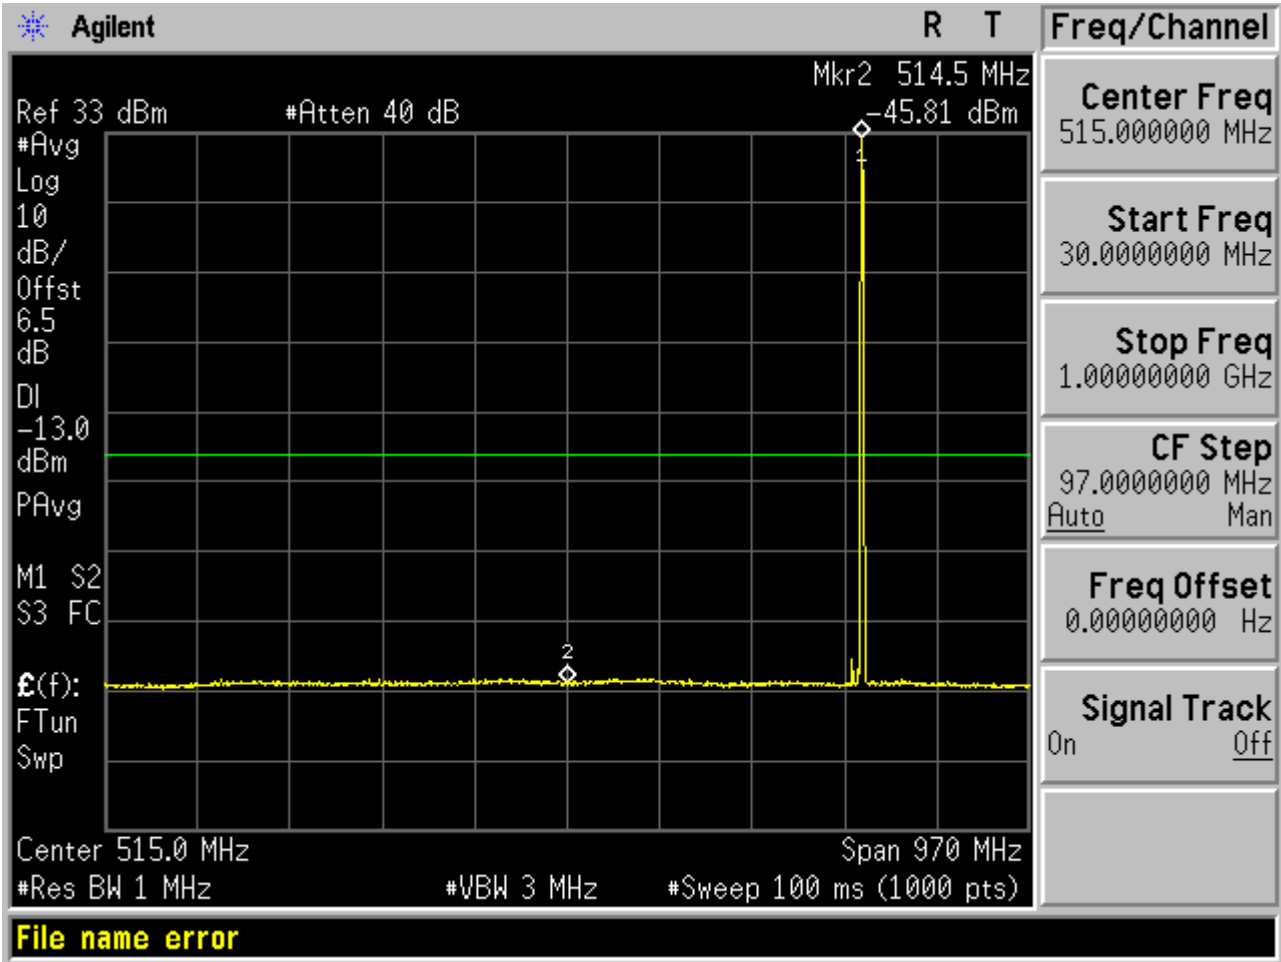

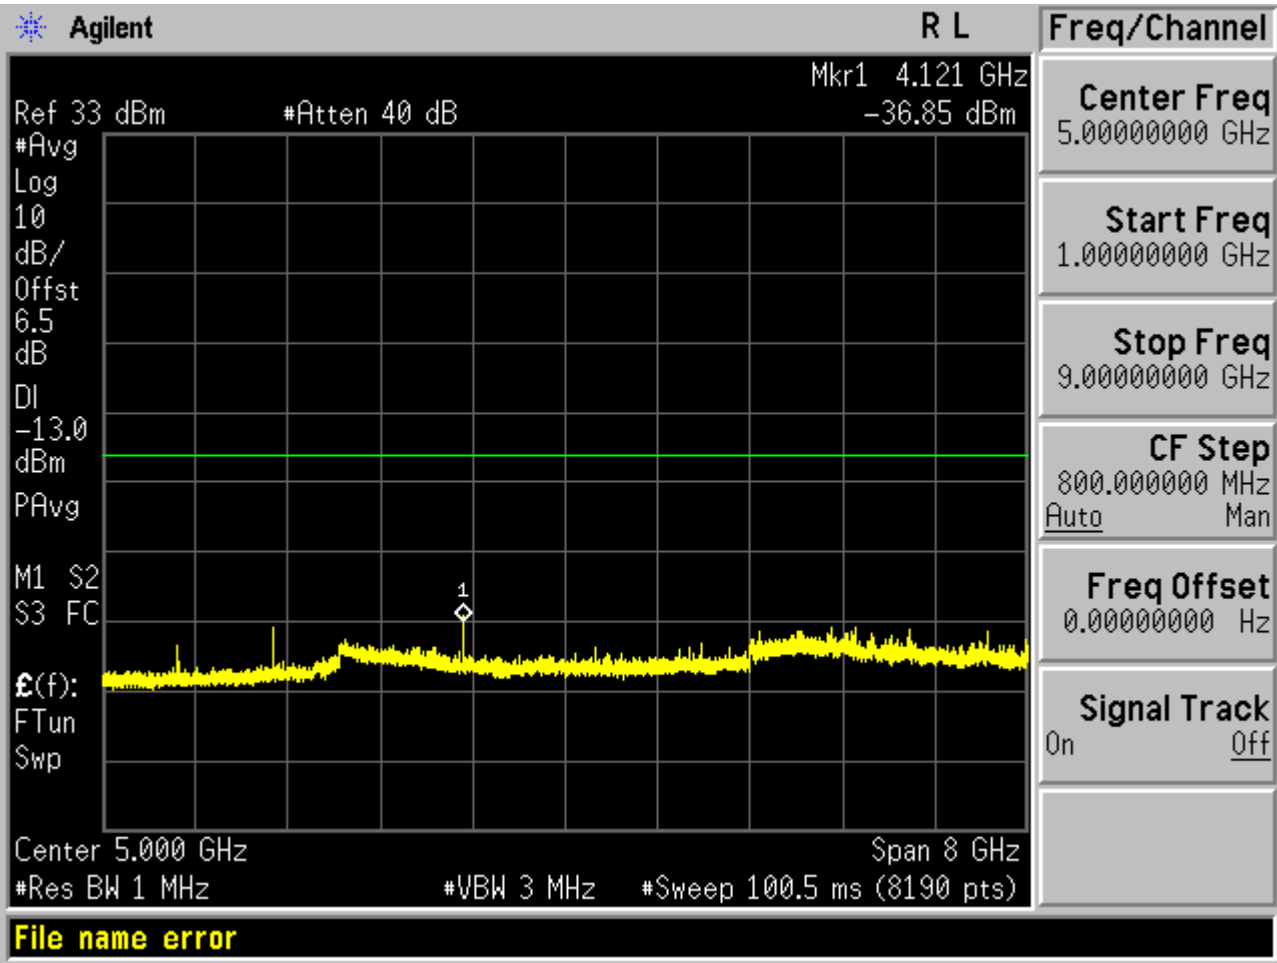



Test Channel=MCH

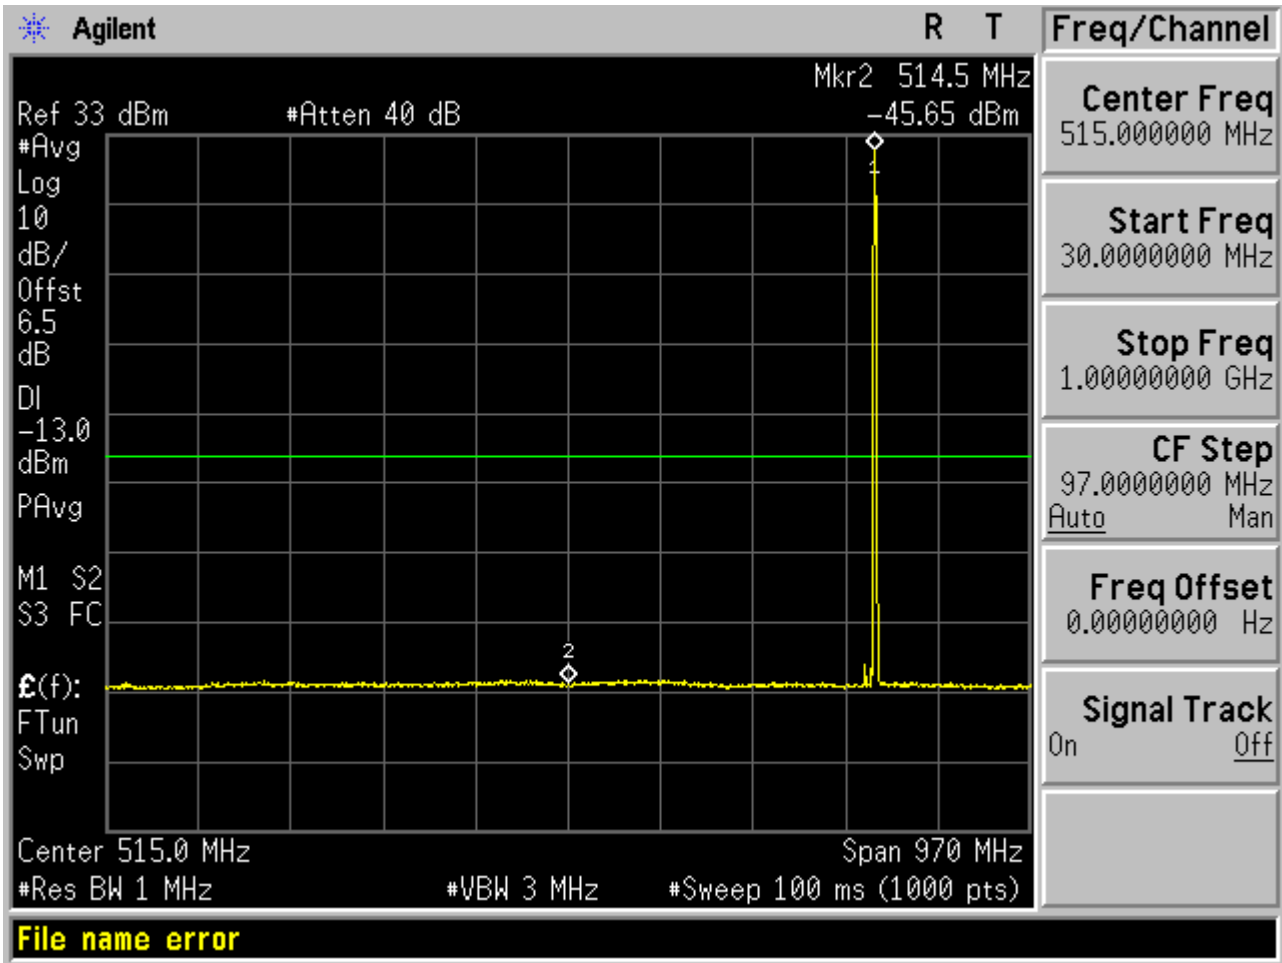

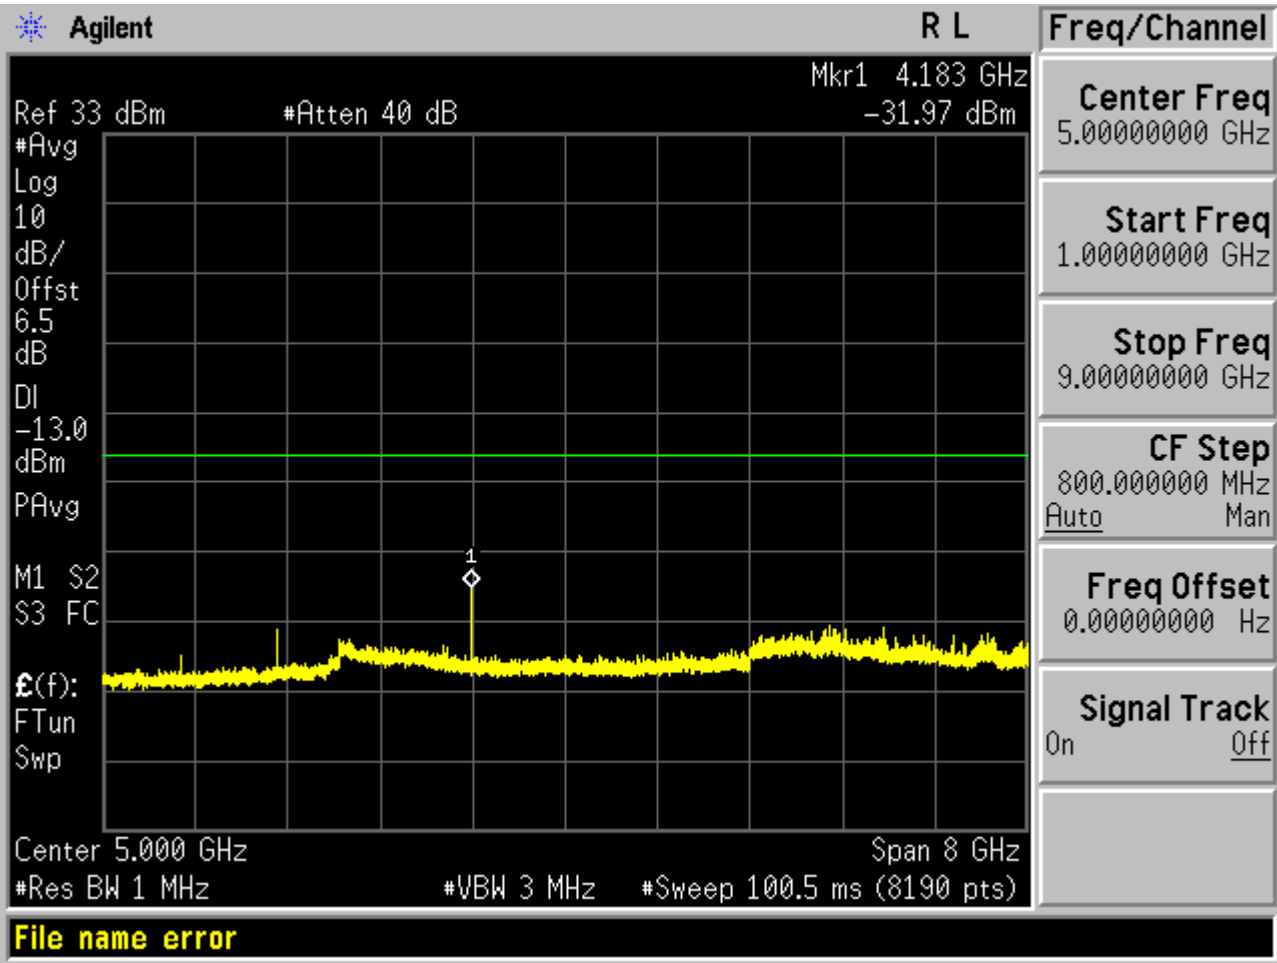



Test Channel=HCH

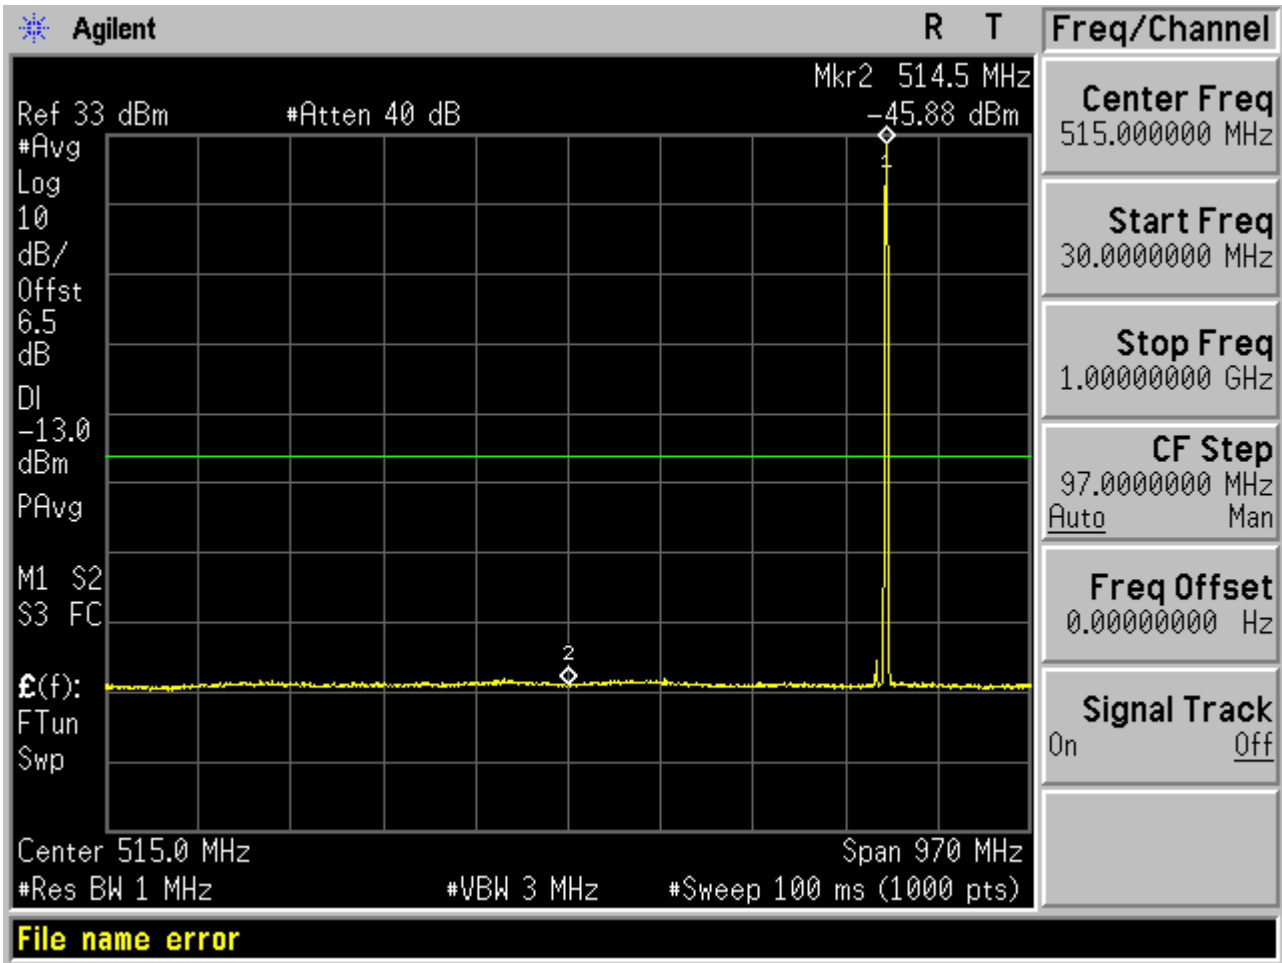

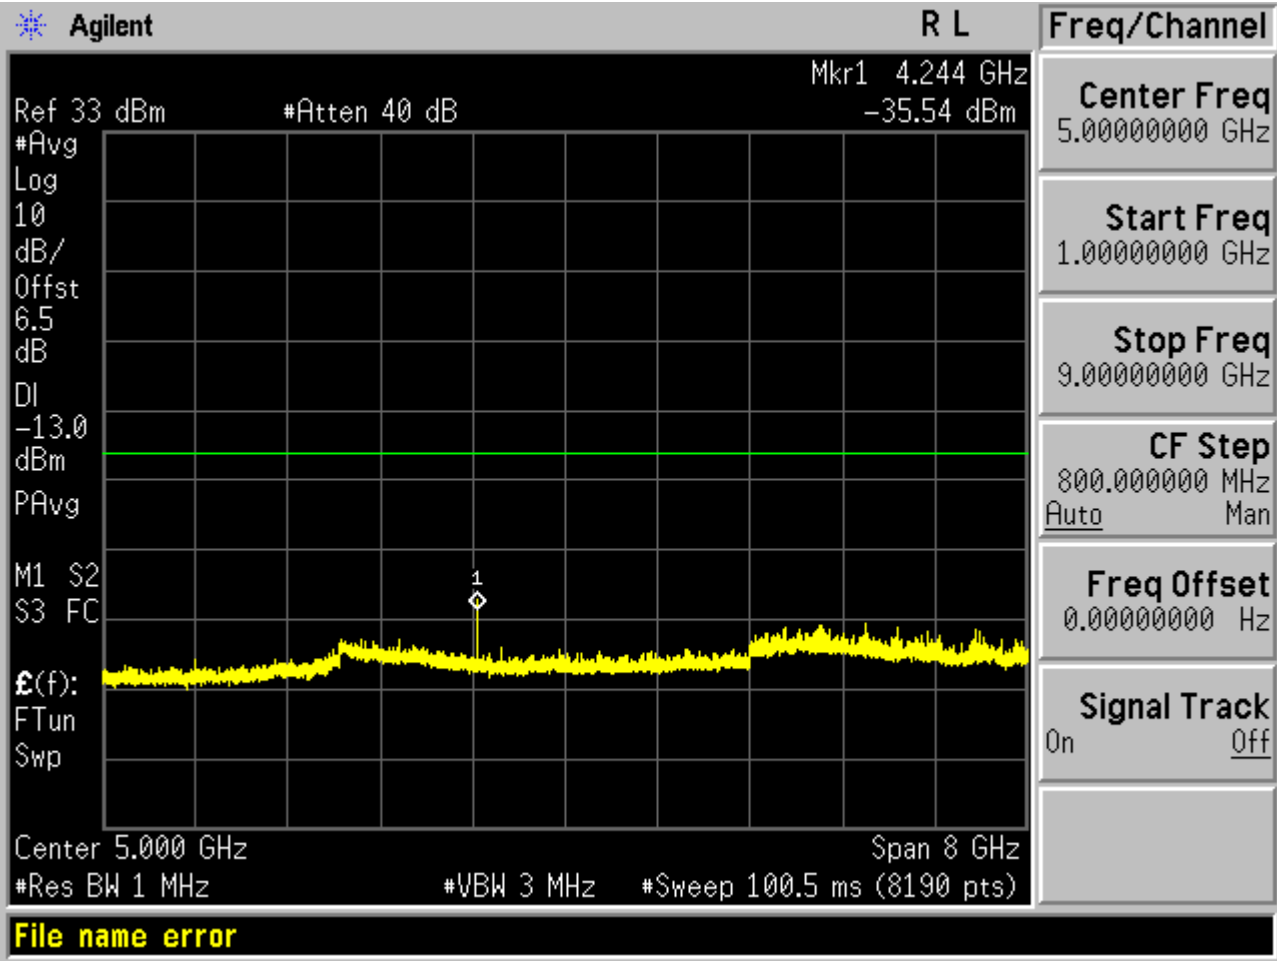



Test Mode=GSM/TM2
Test Channel=LCH

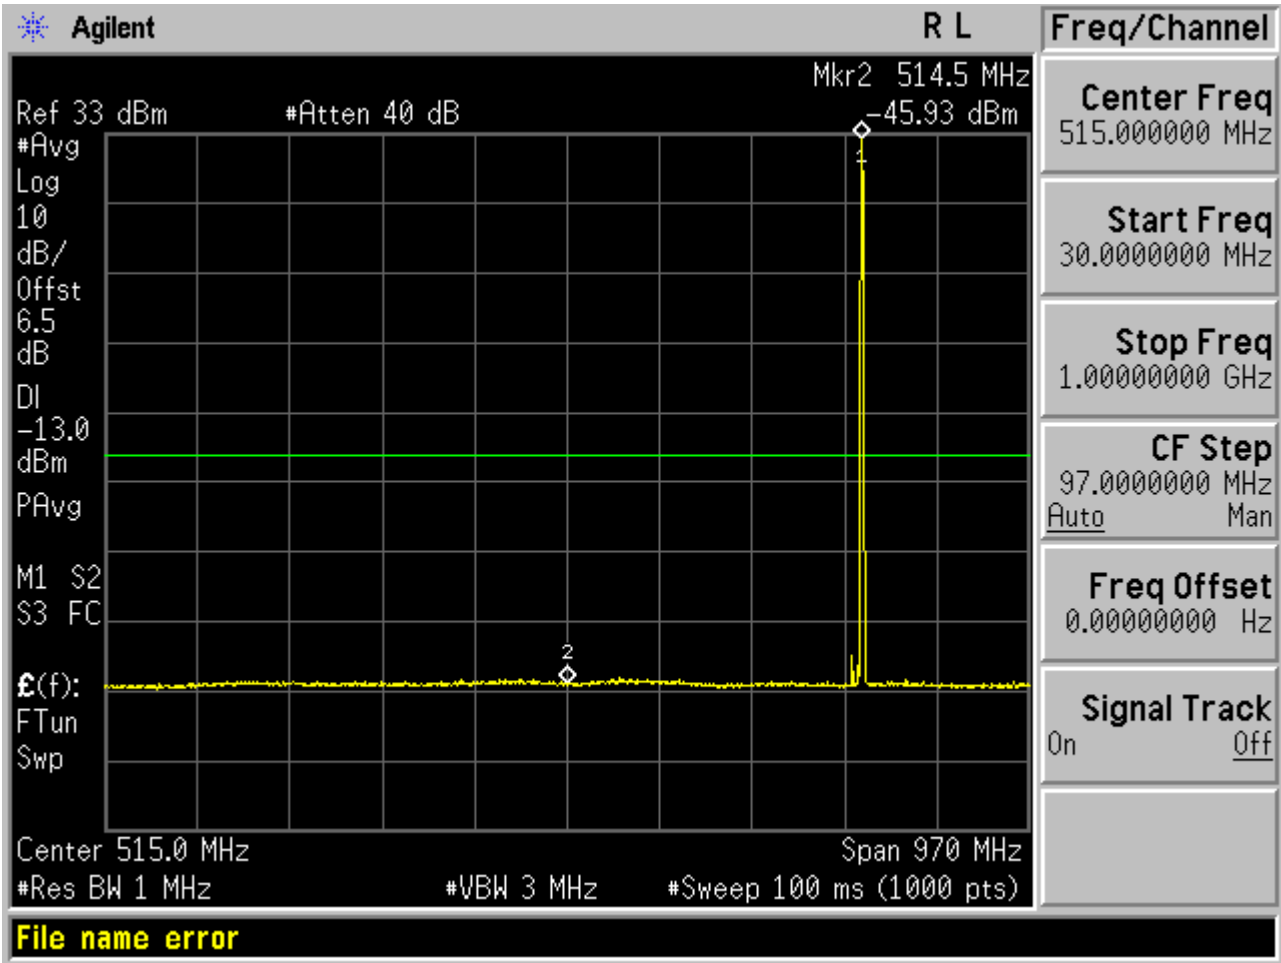

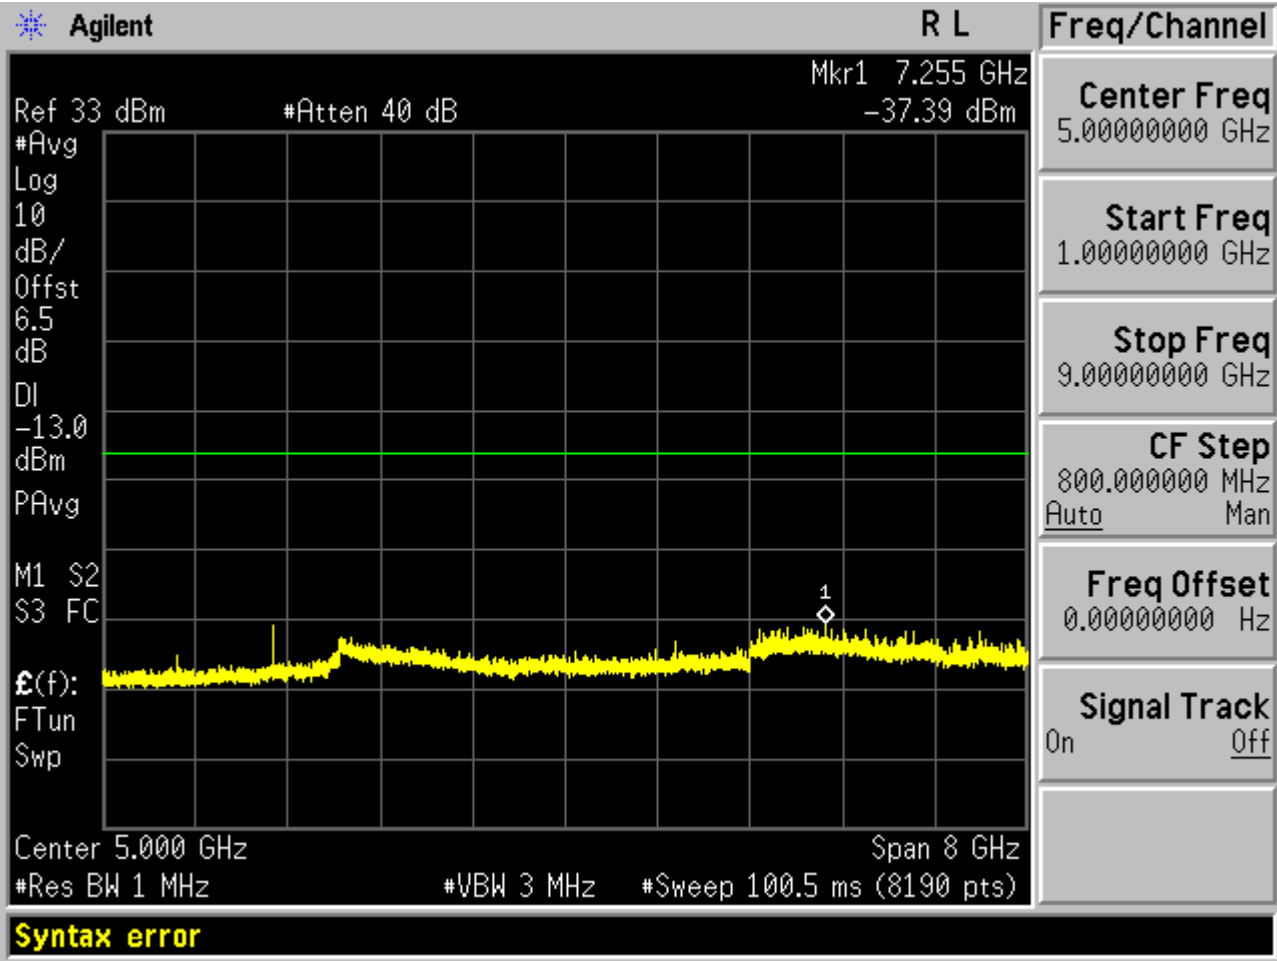


Test Channel=MCH

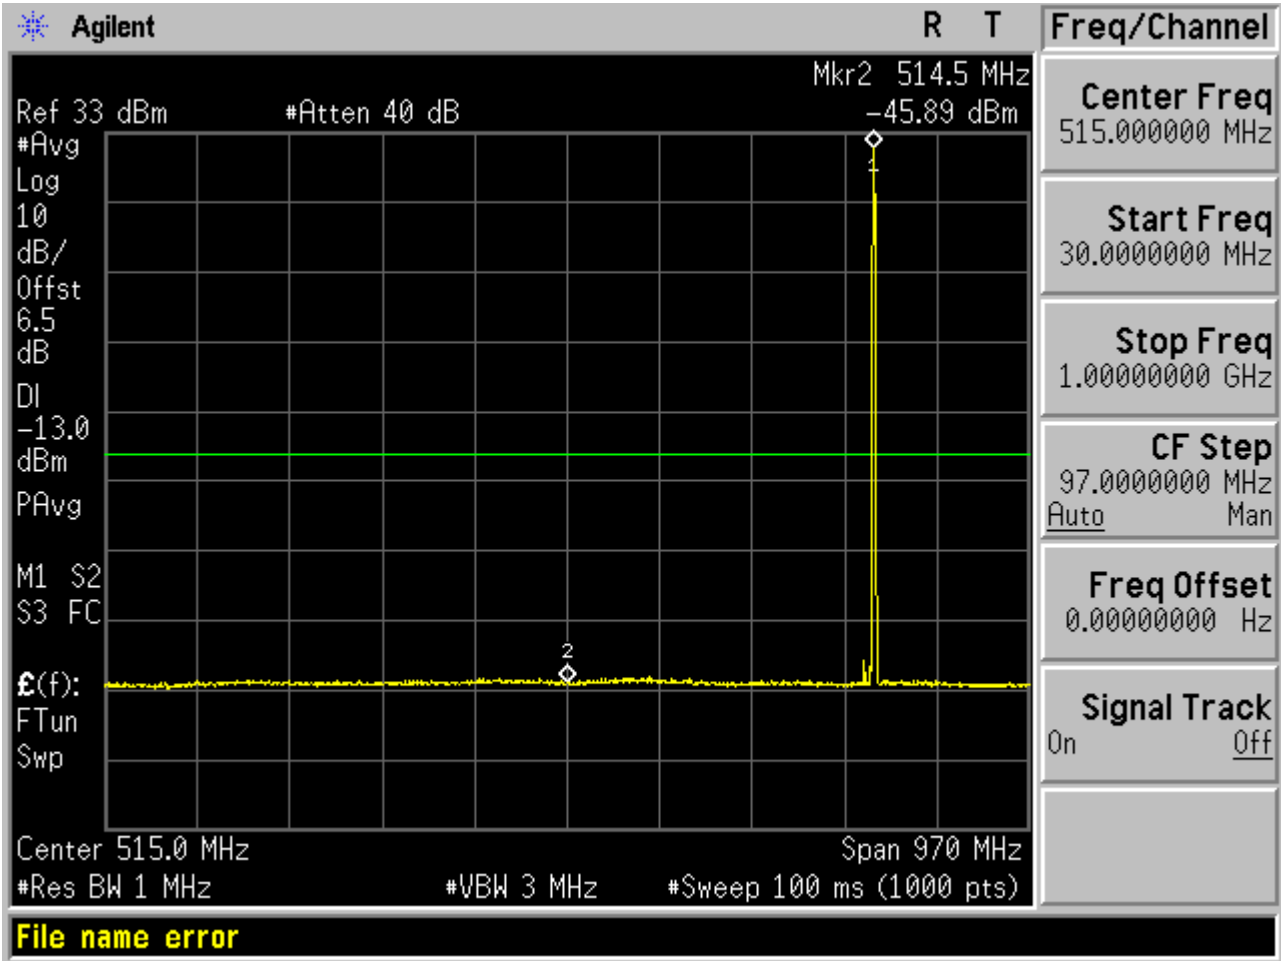

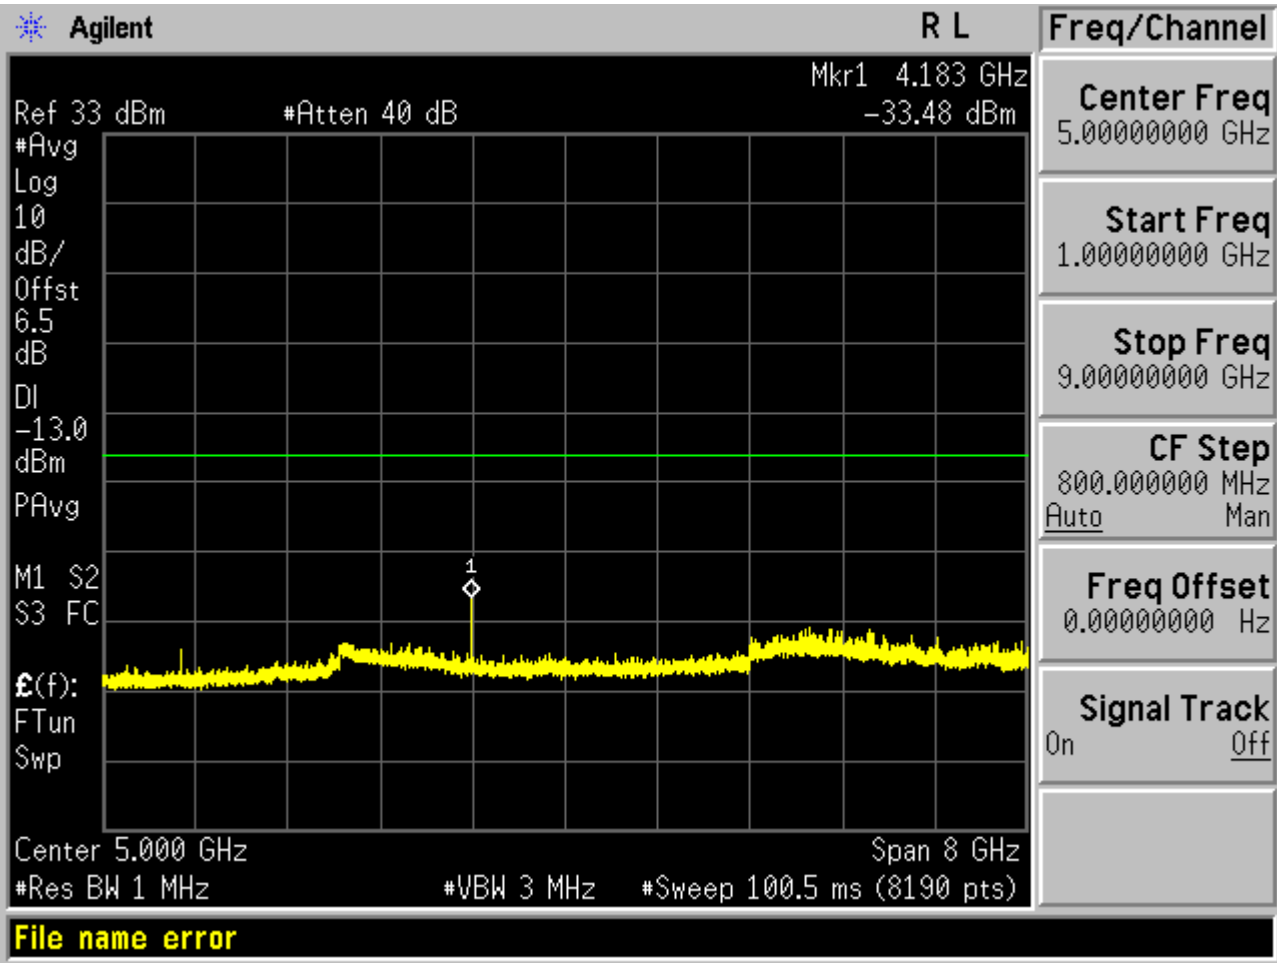



Test Channel=HCH

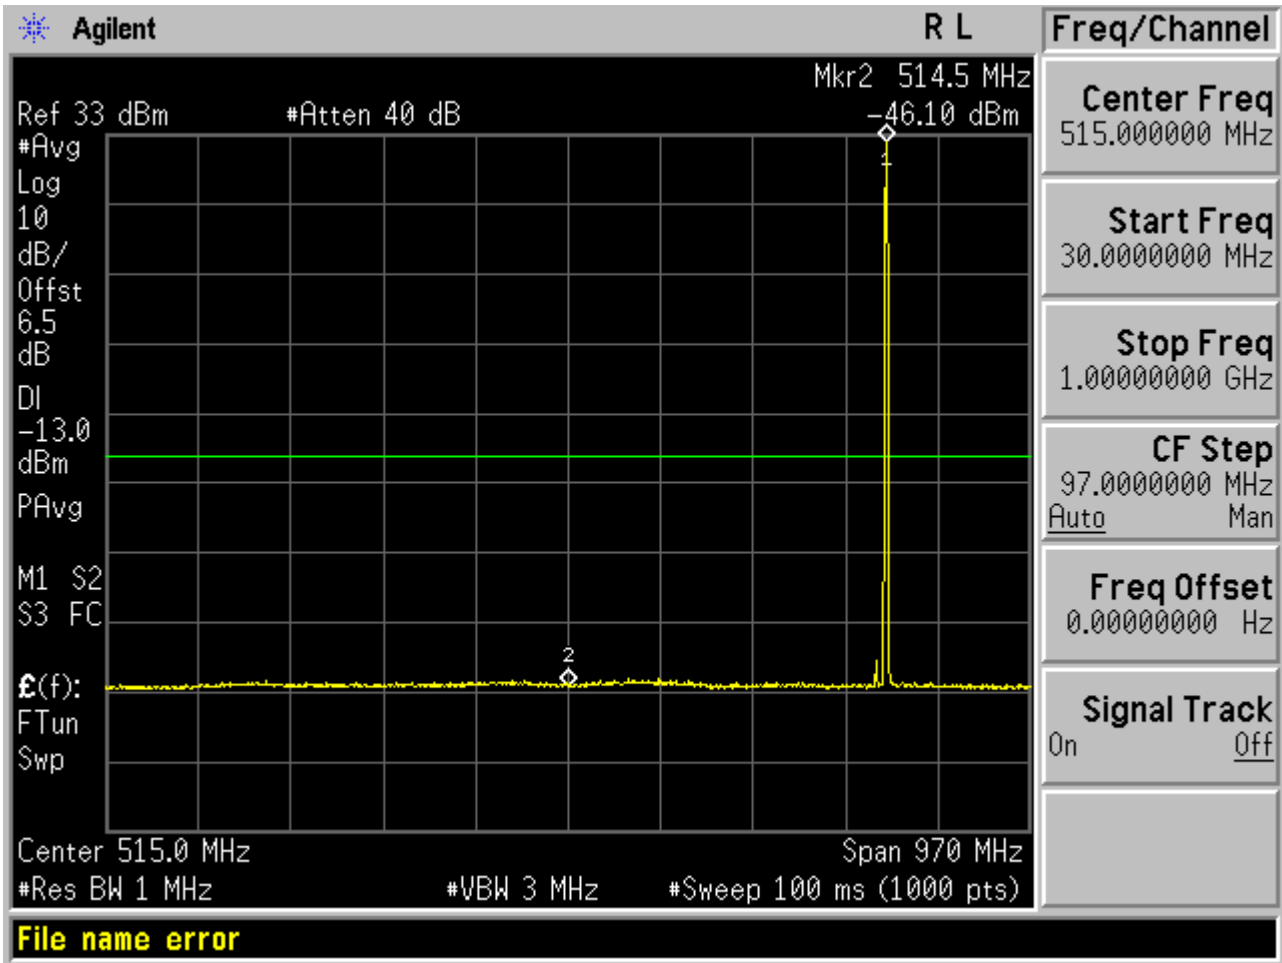




Test Mode=GSM/TM3
Test Channel=LCH

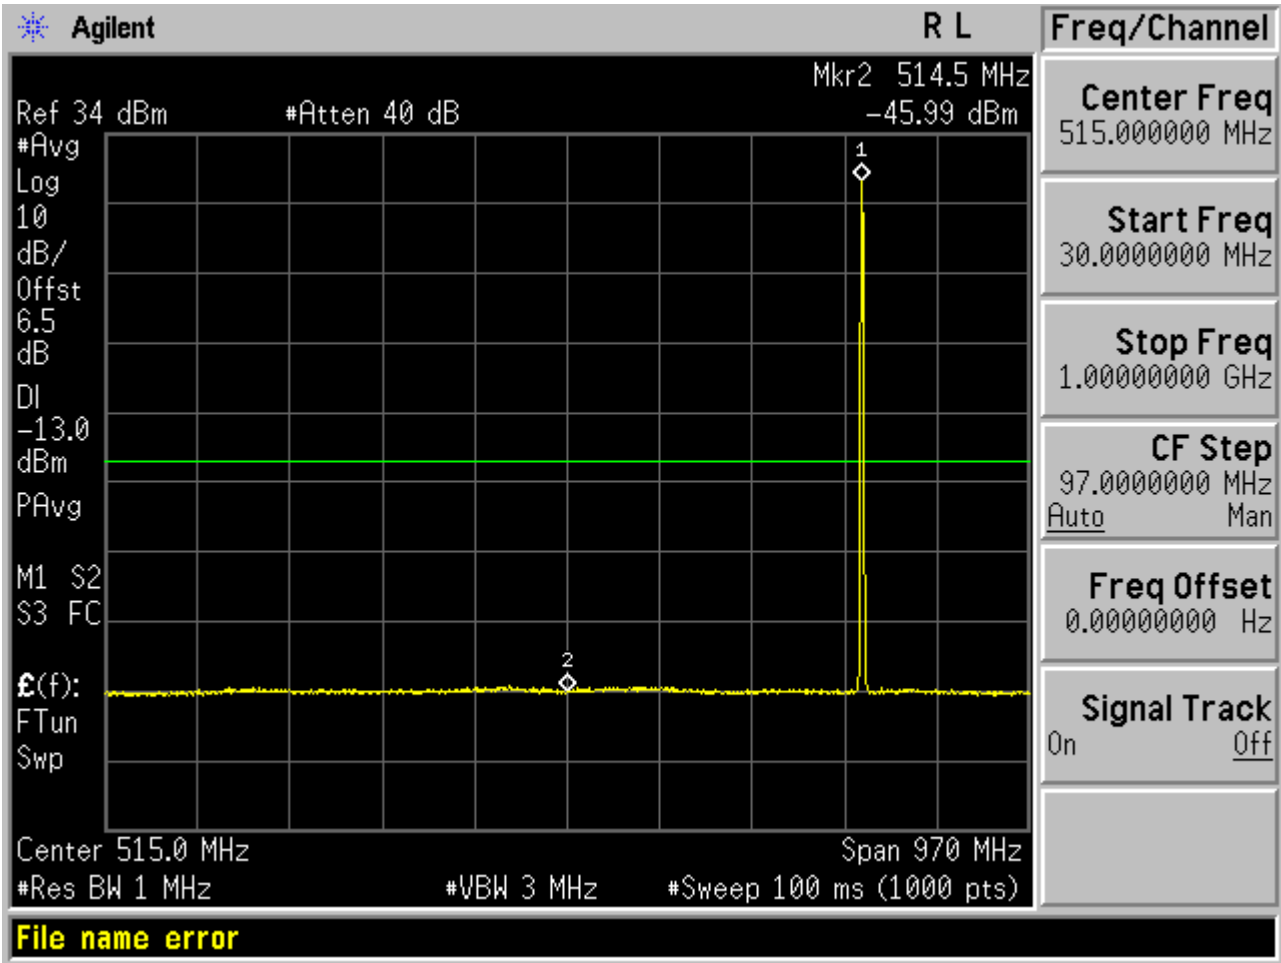

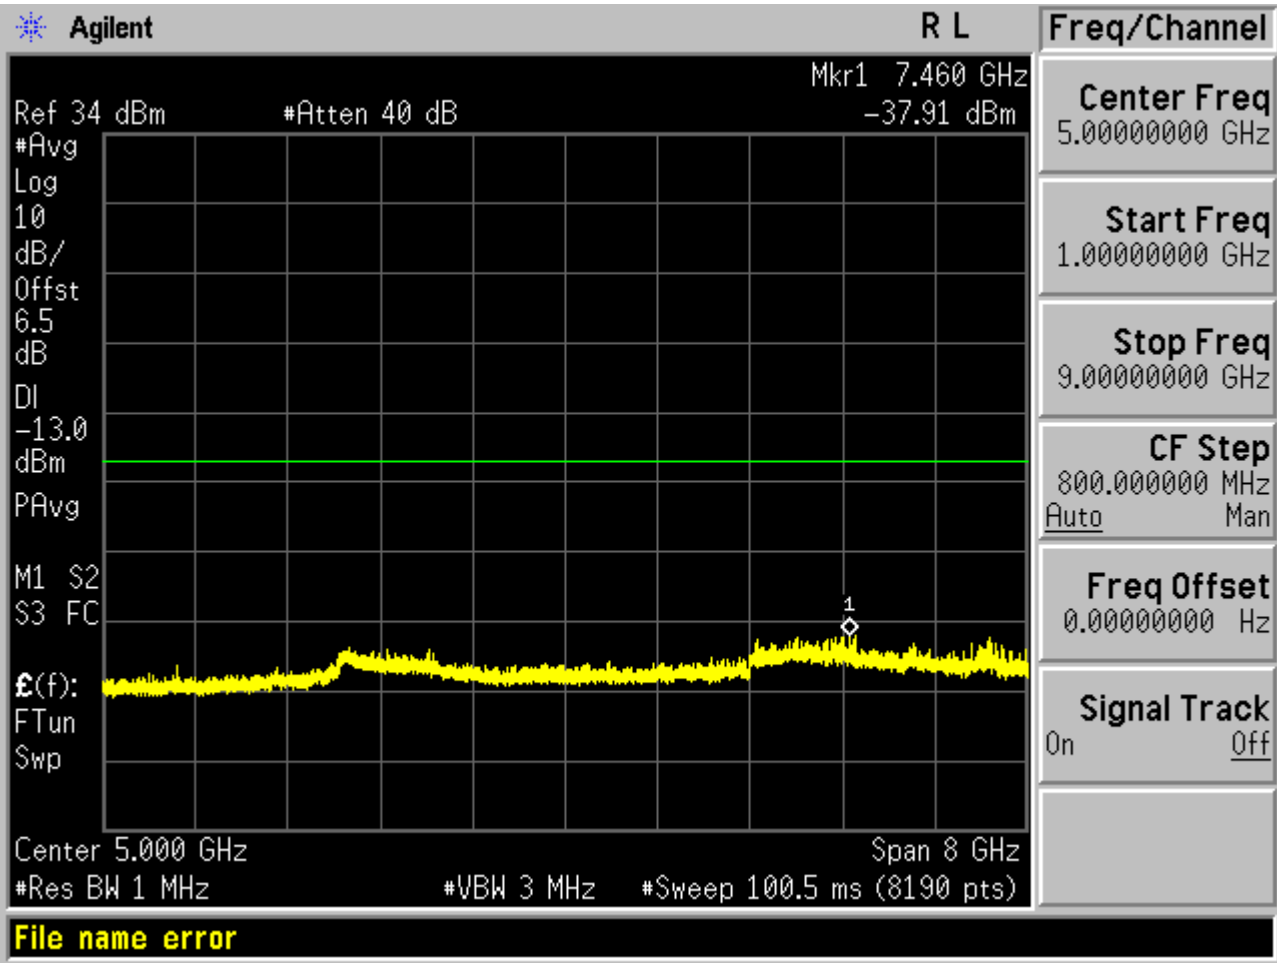



Test Channel=MCH

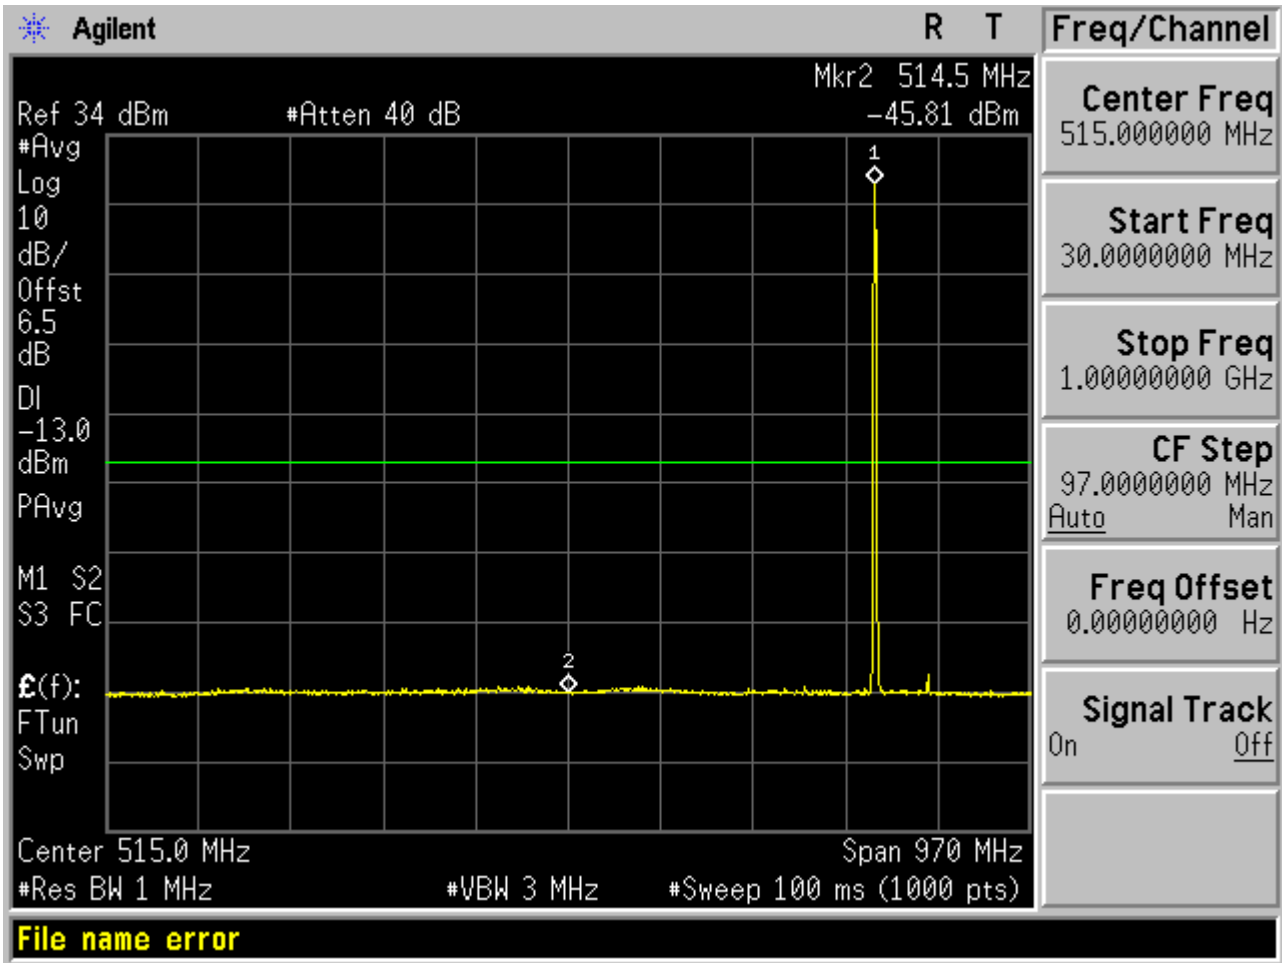



Test Channel=HCH

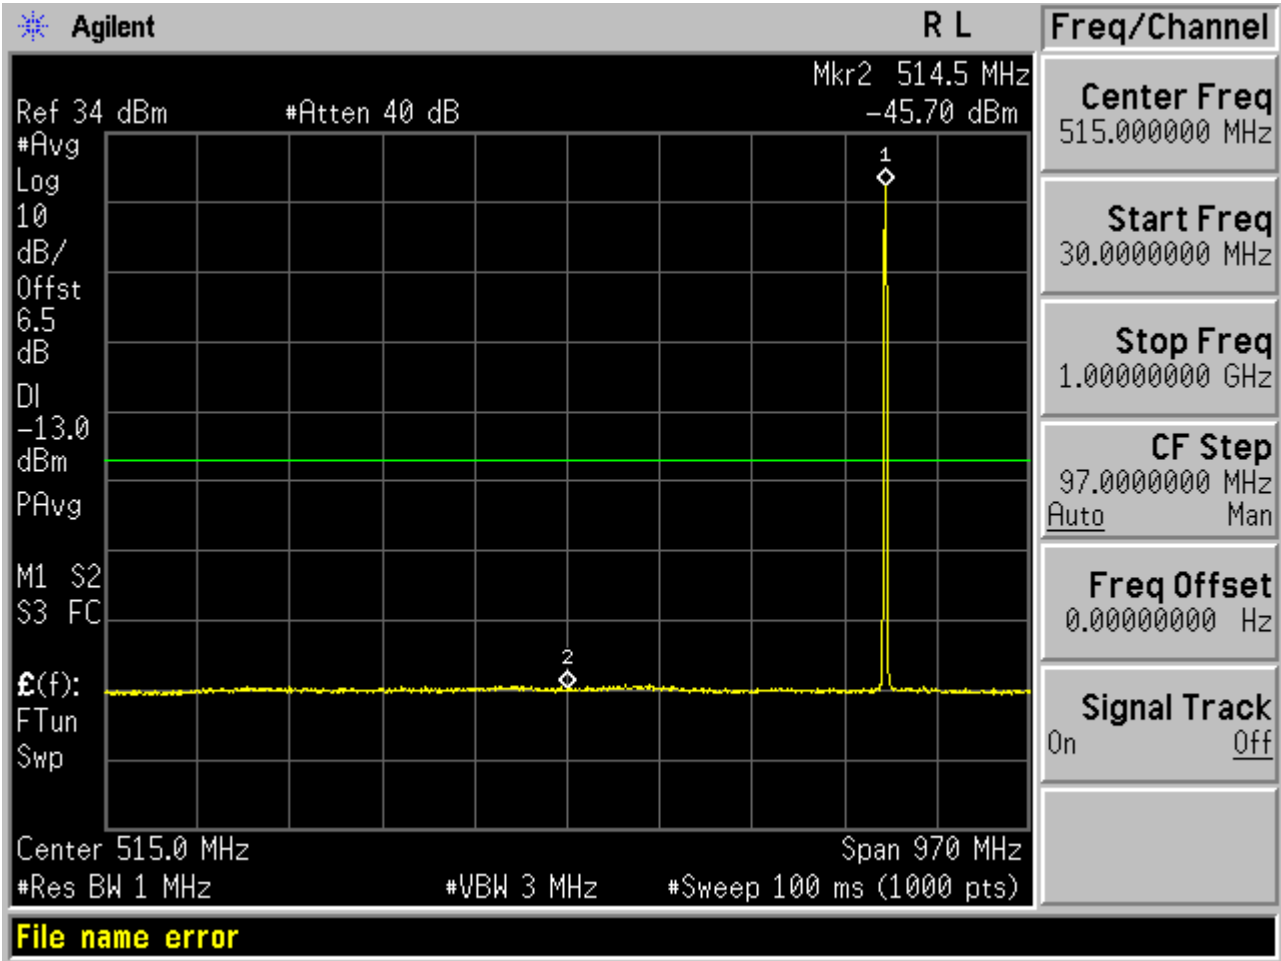


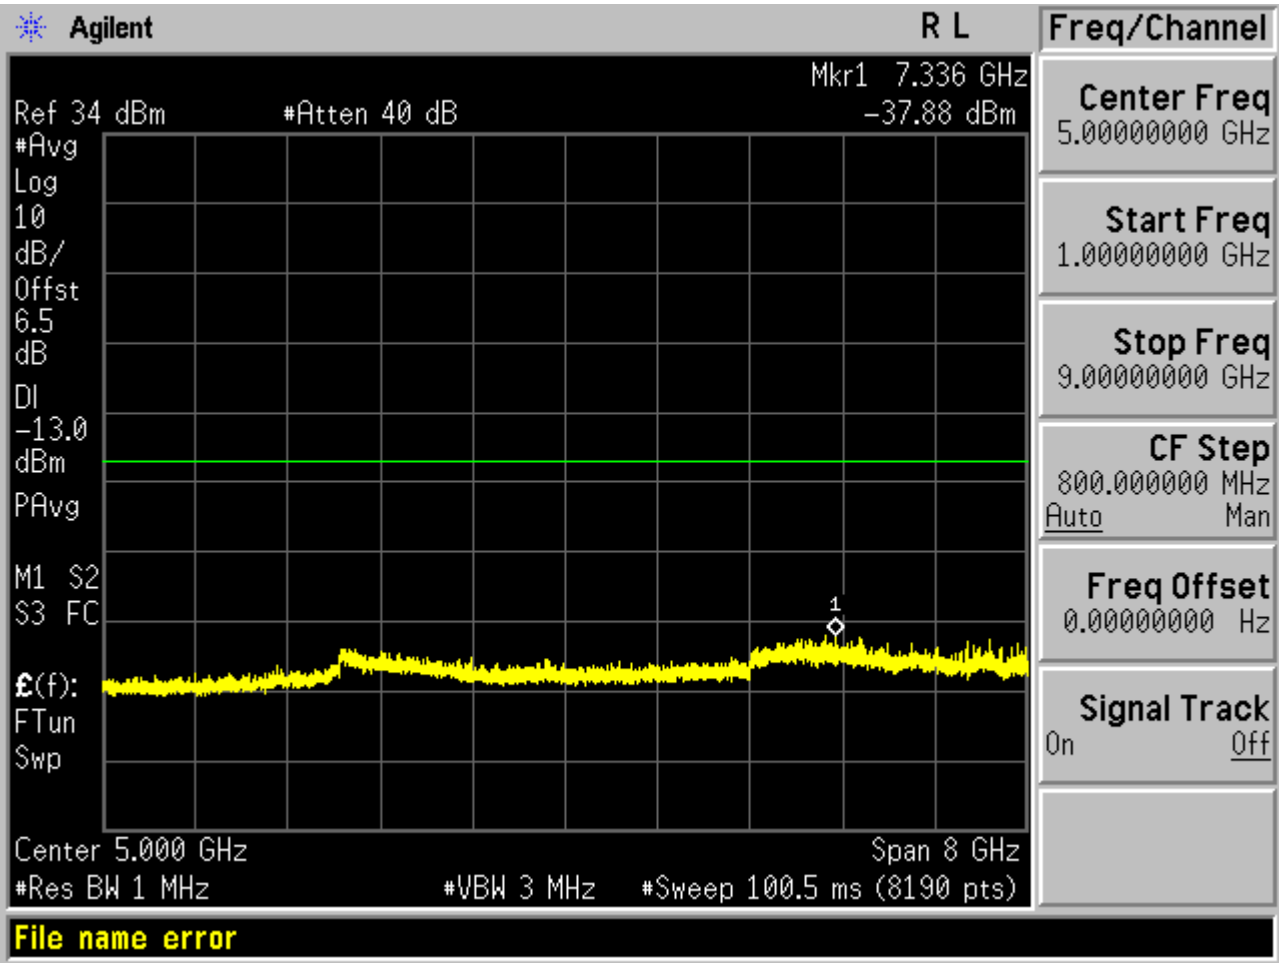



Test Band=GSM1900

Test Mode=GSM/TM1

Test Channel=LCH

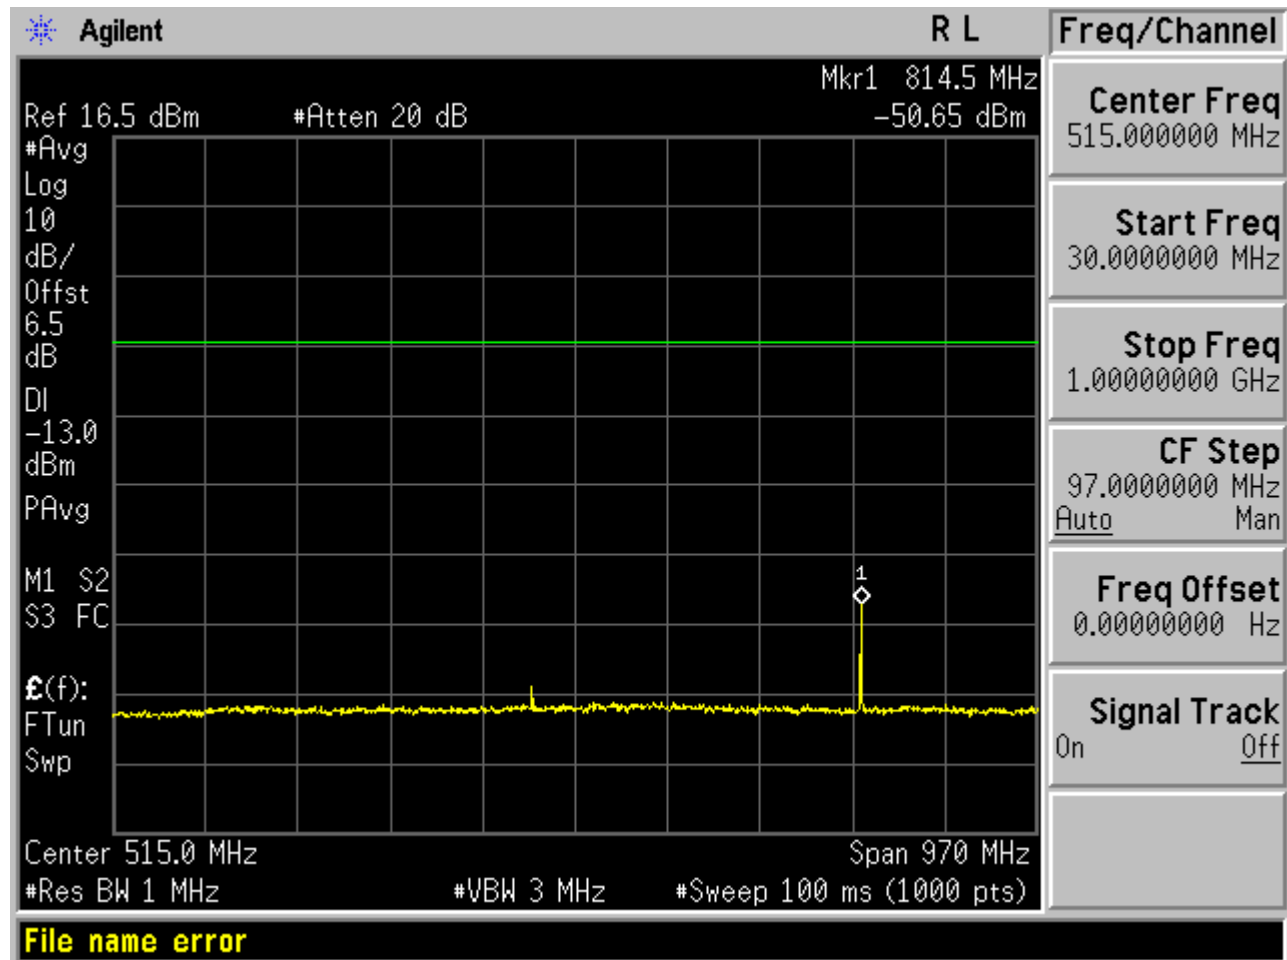


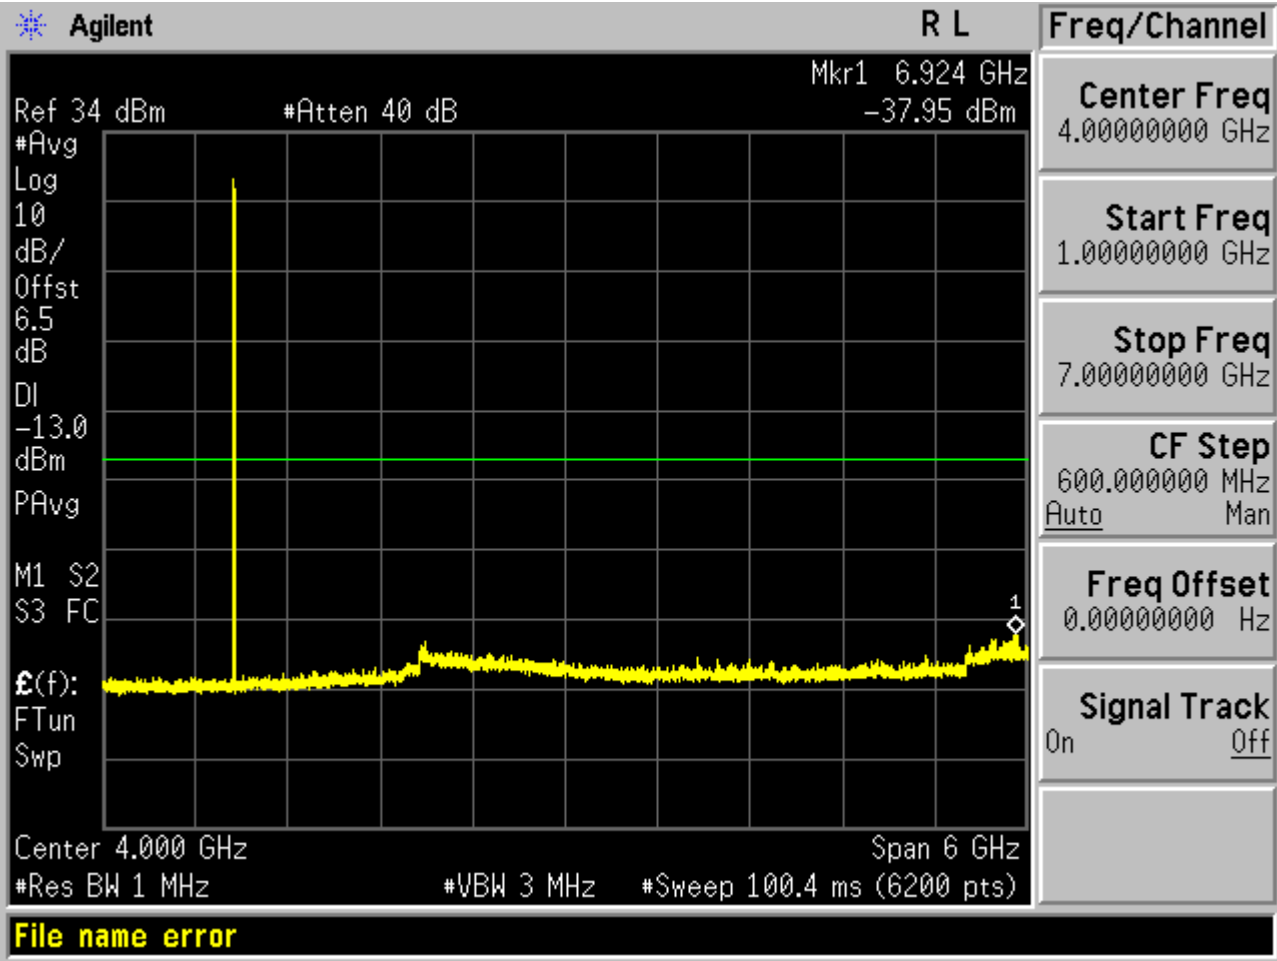


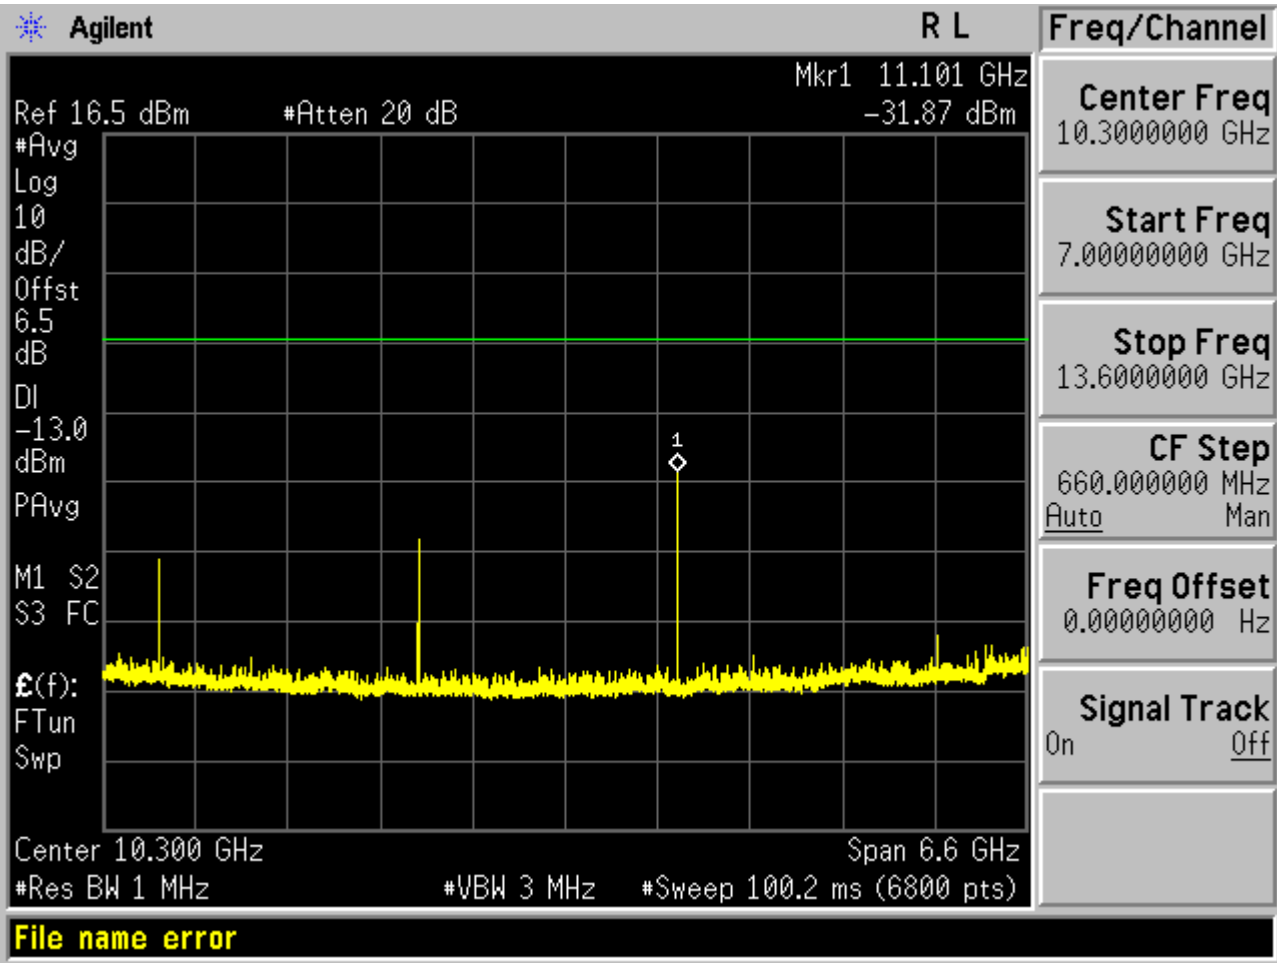





Test Channel=MCH

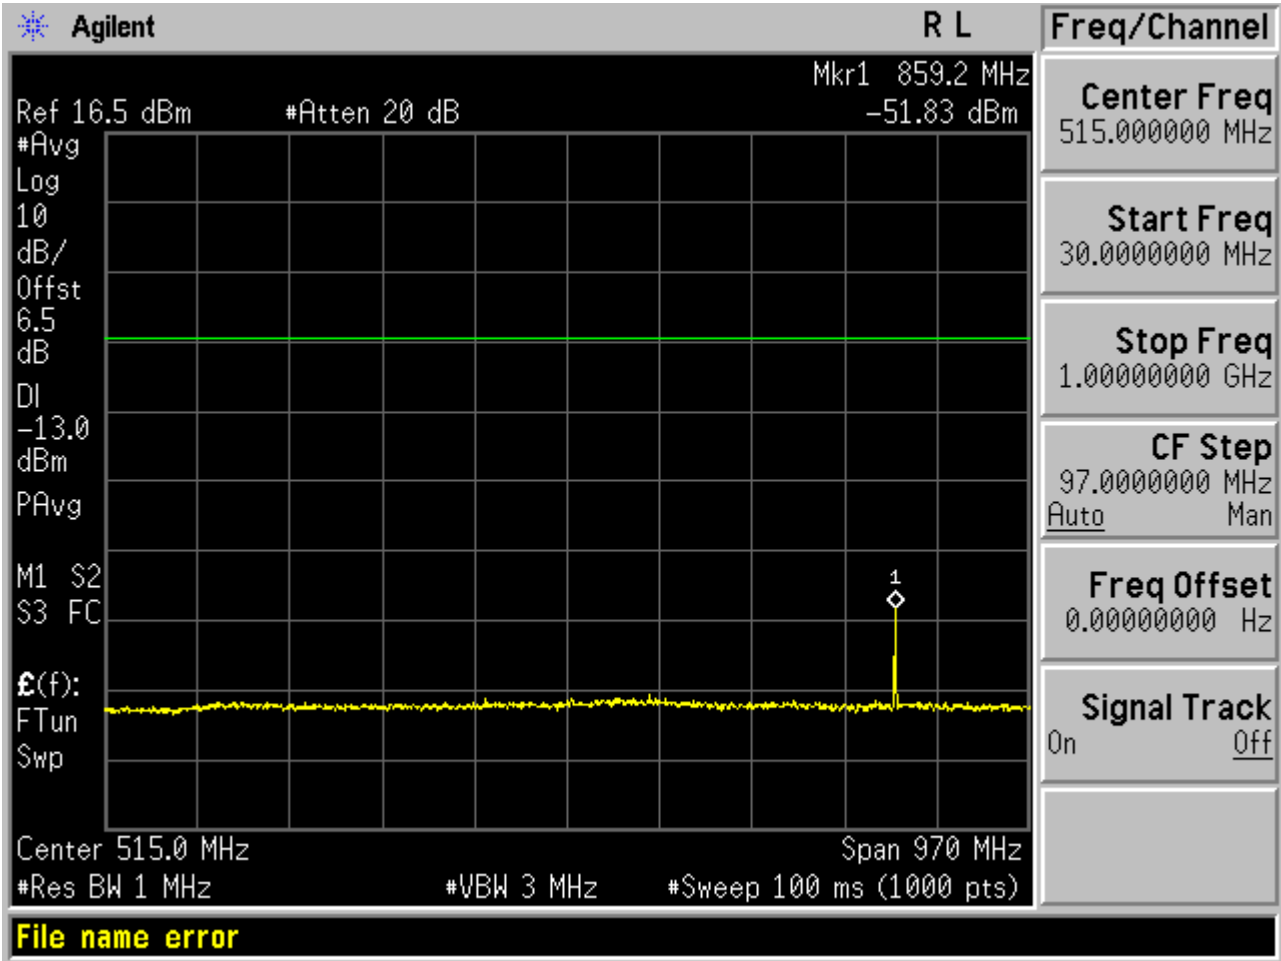


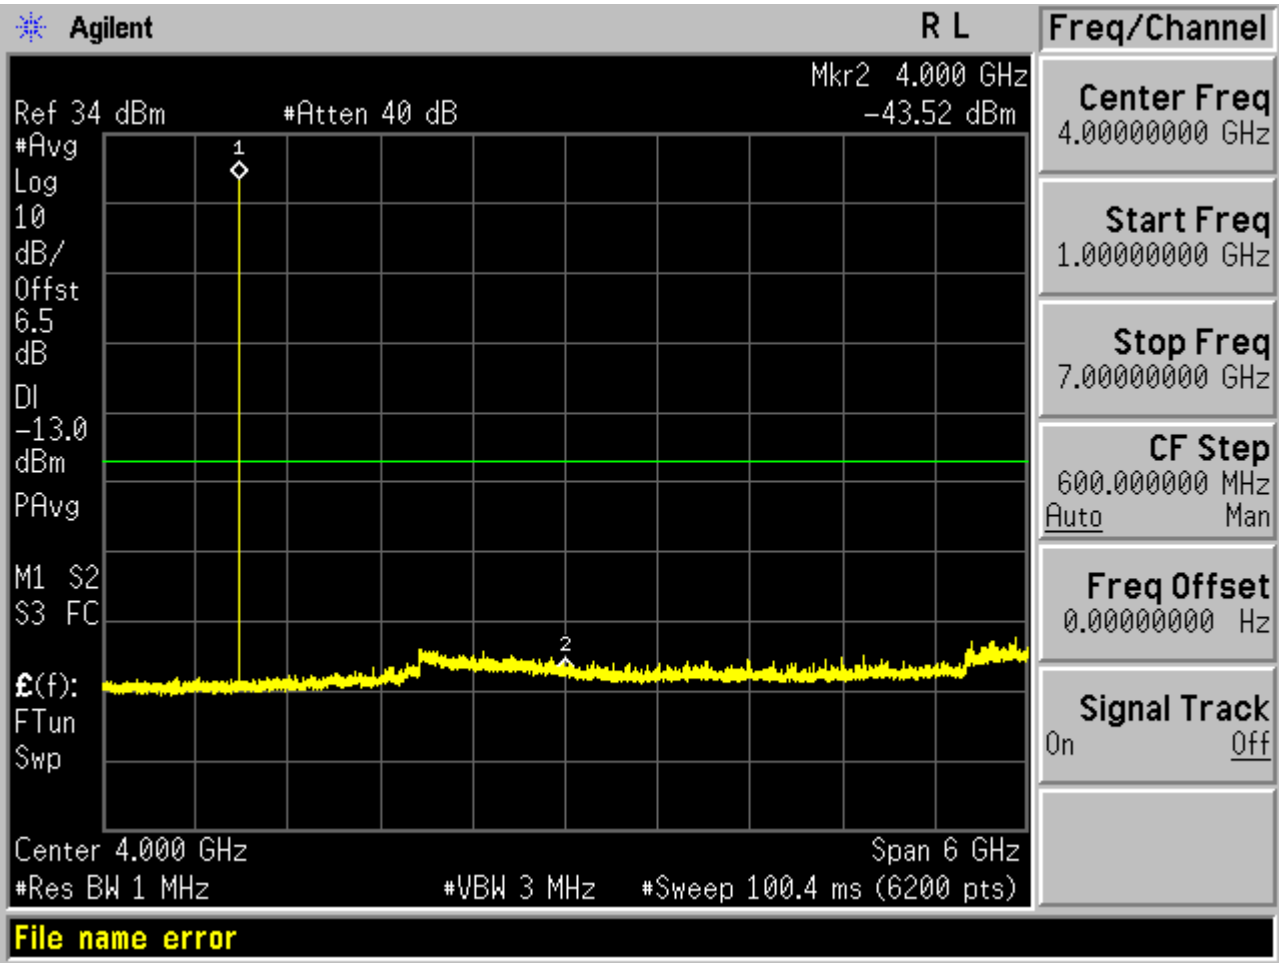


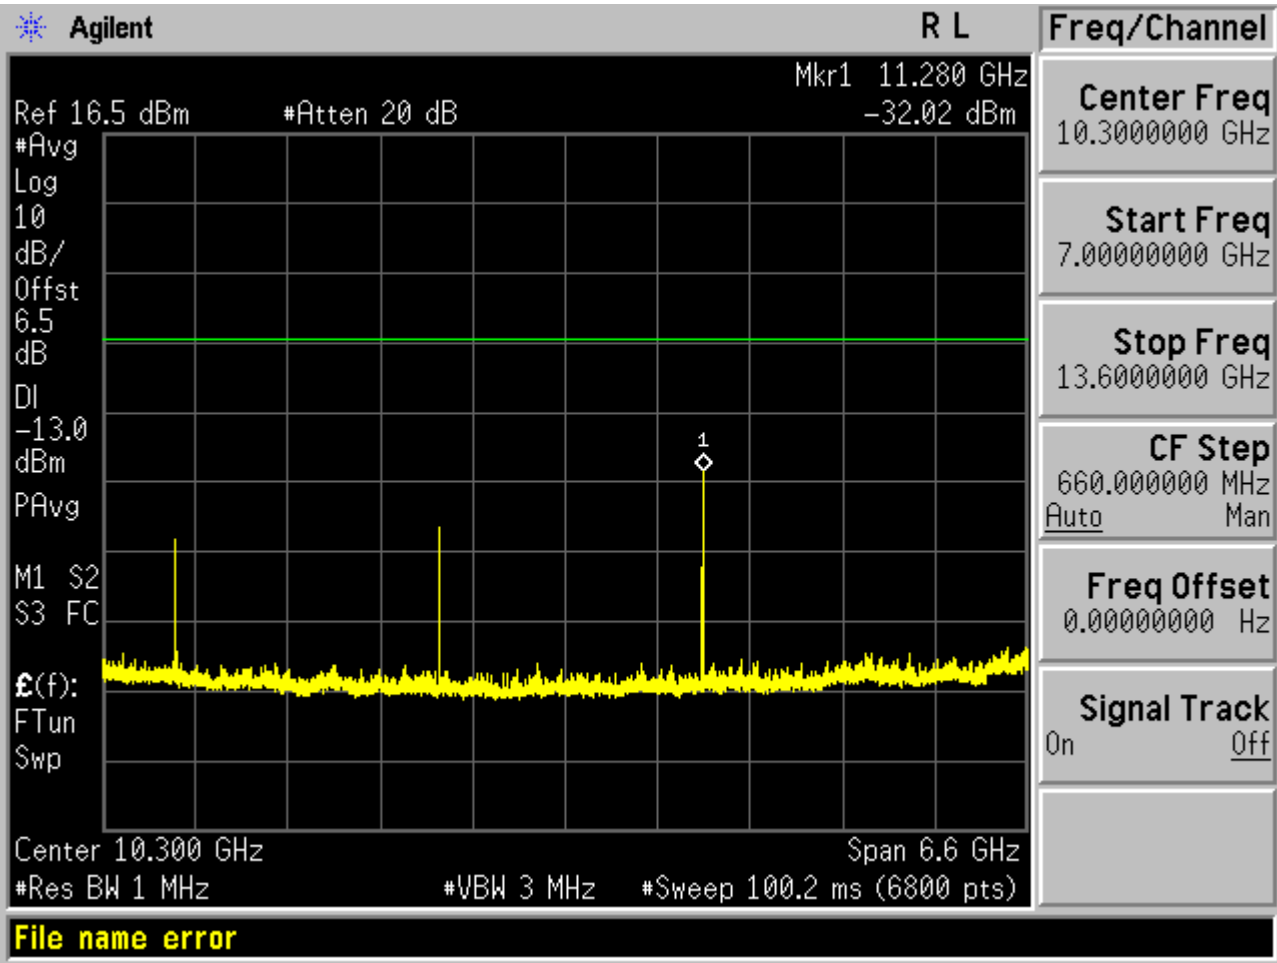


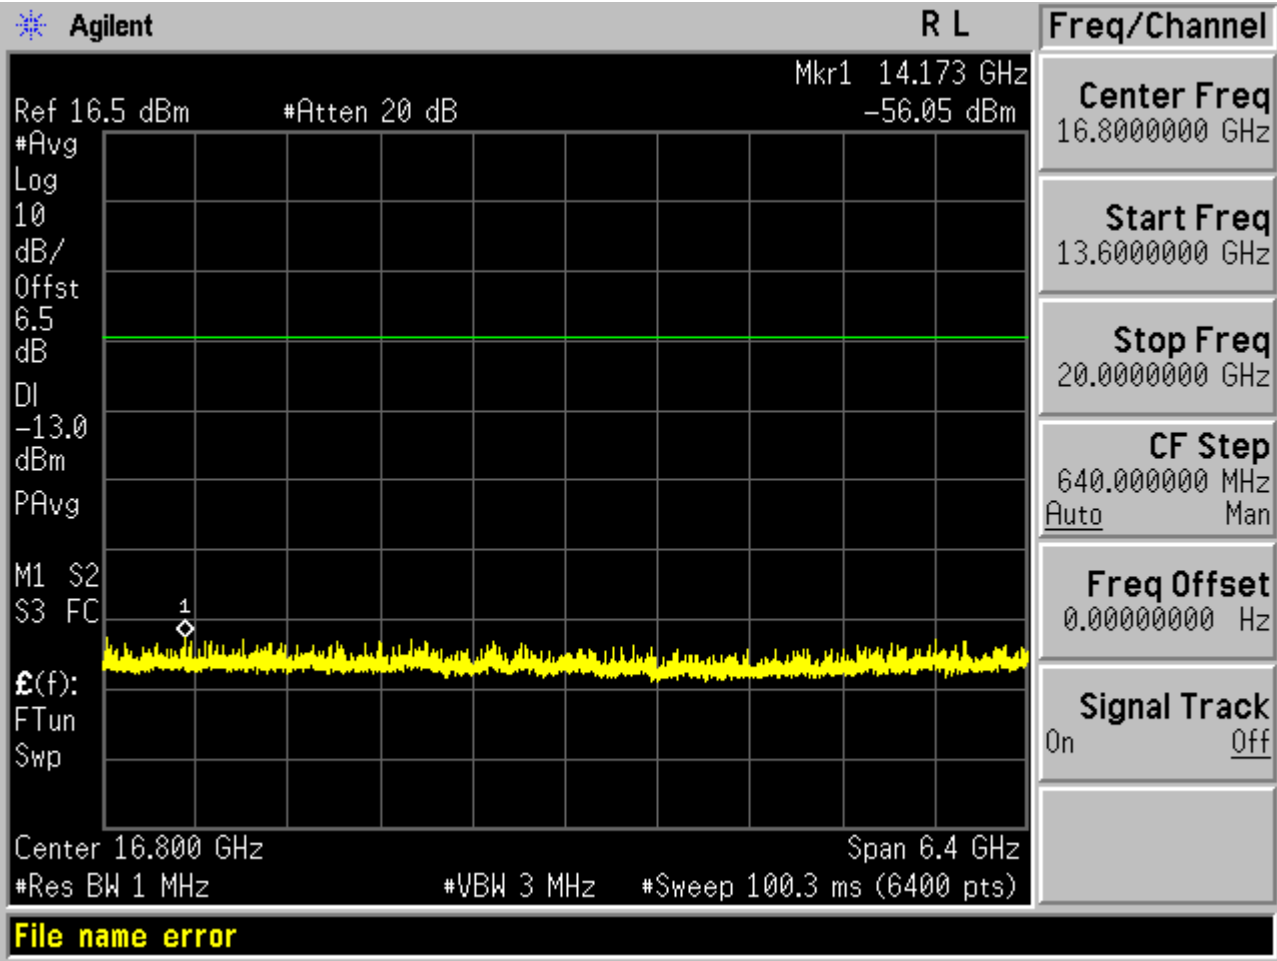


Test Channel=HCH

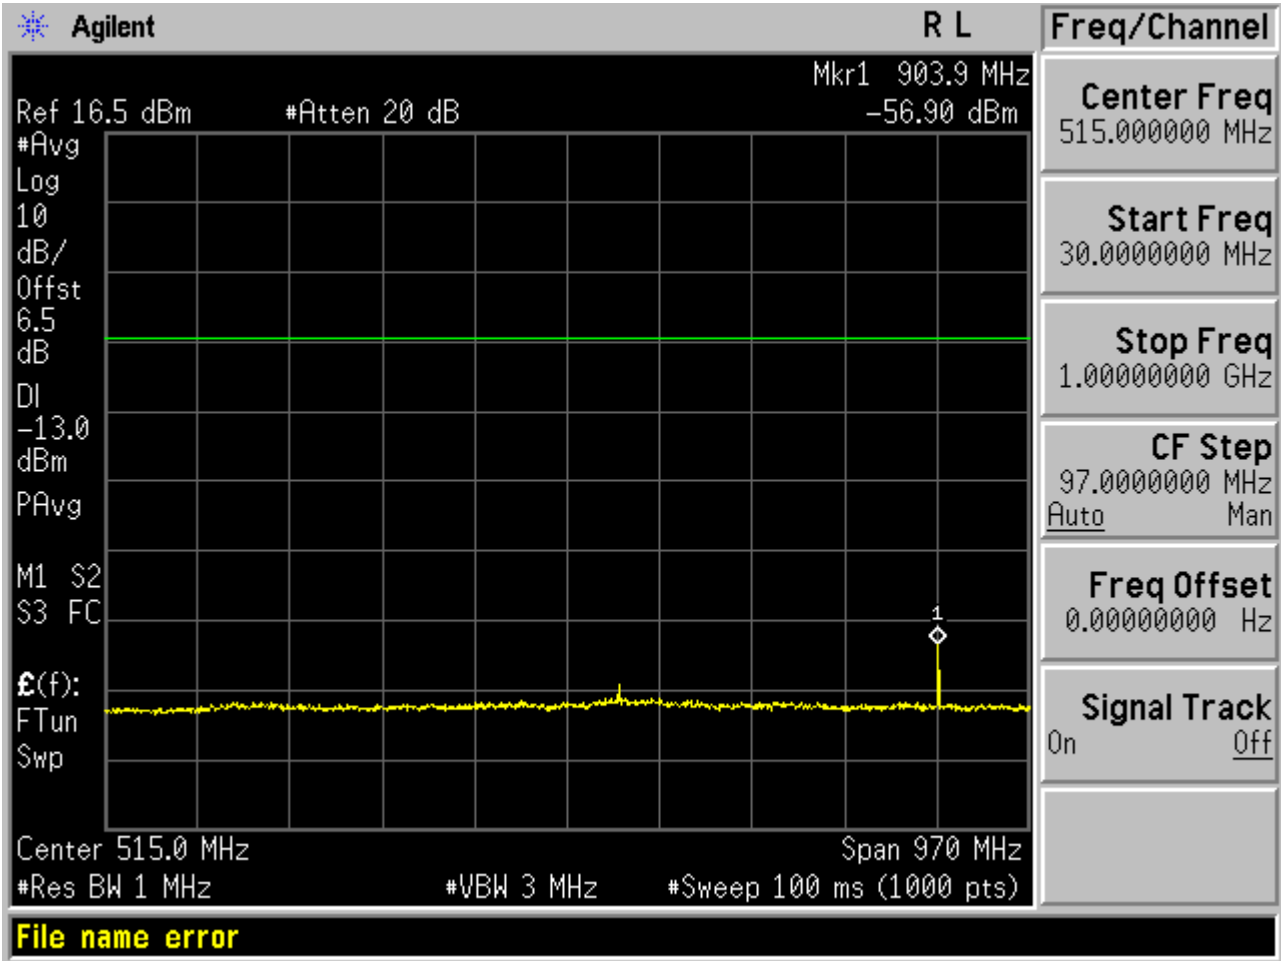


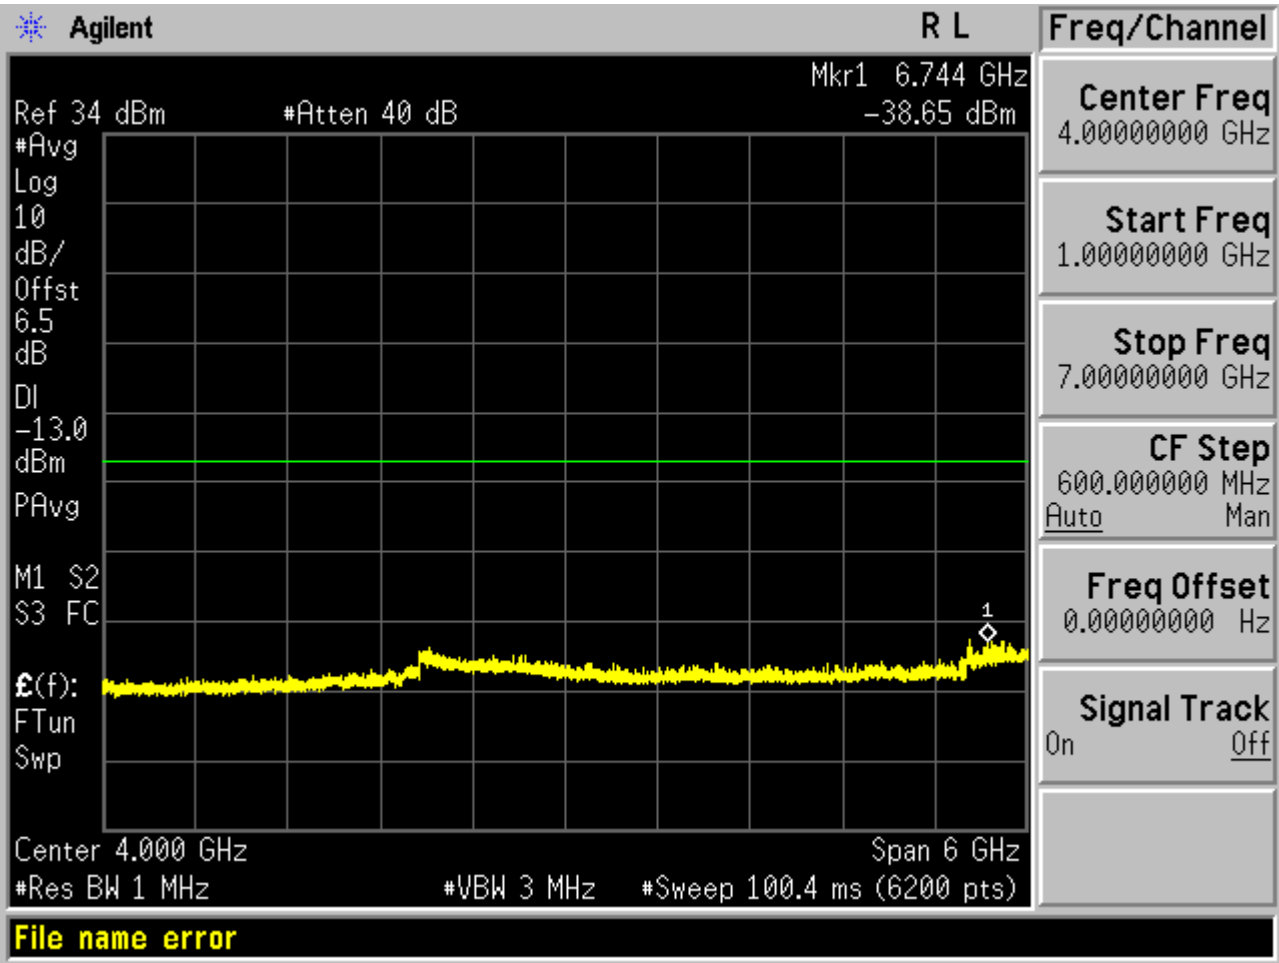


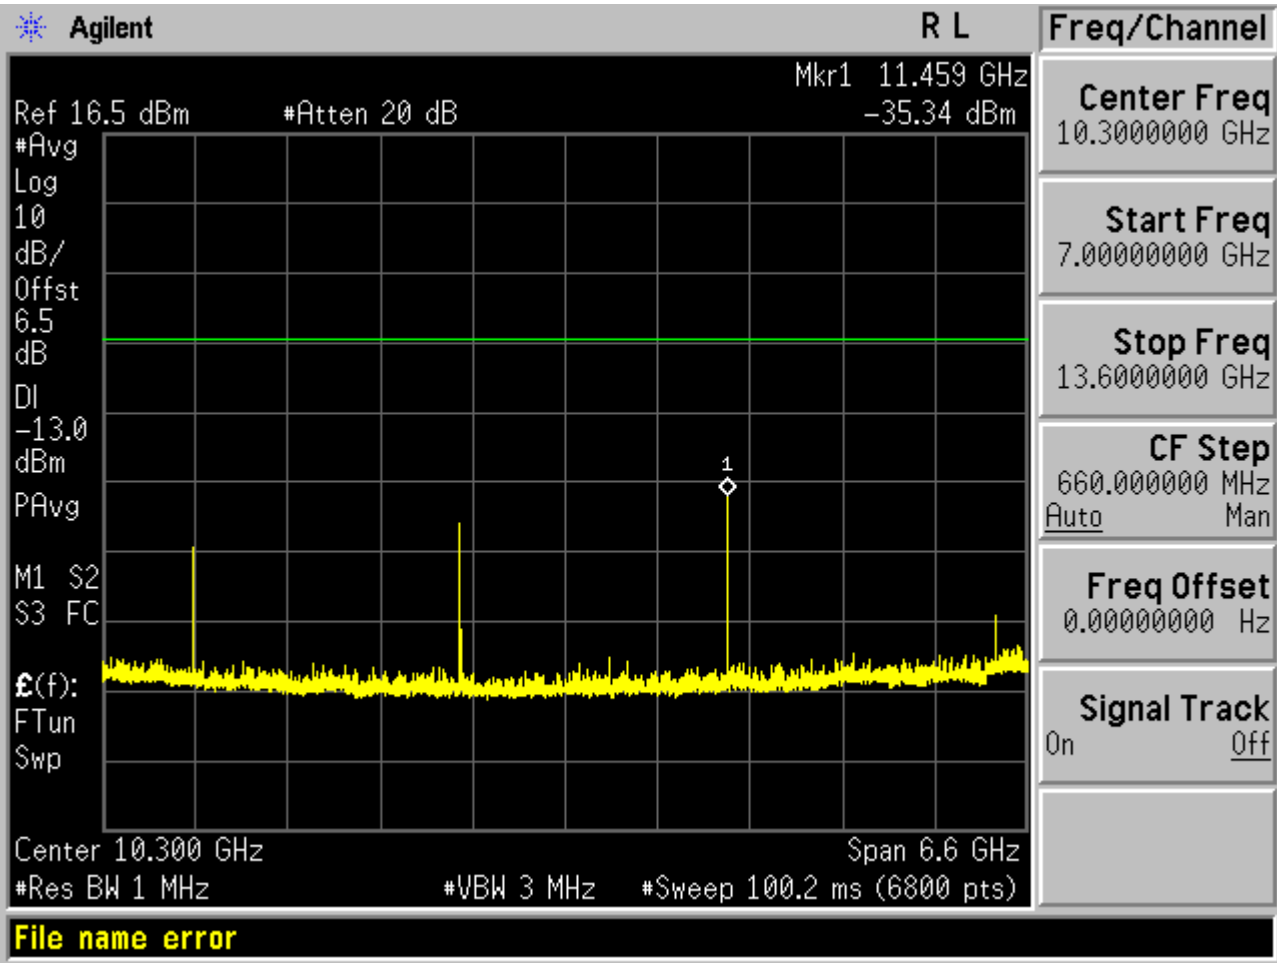


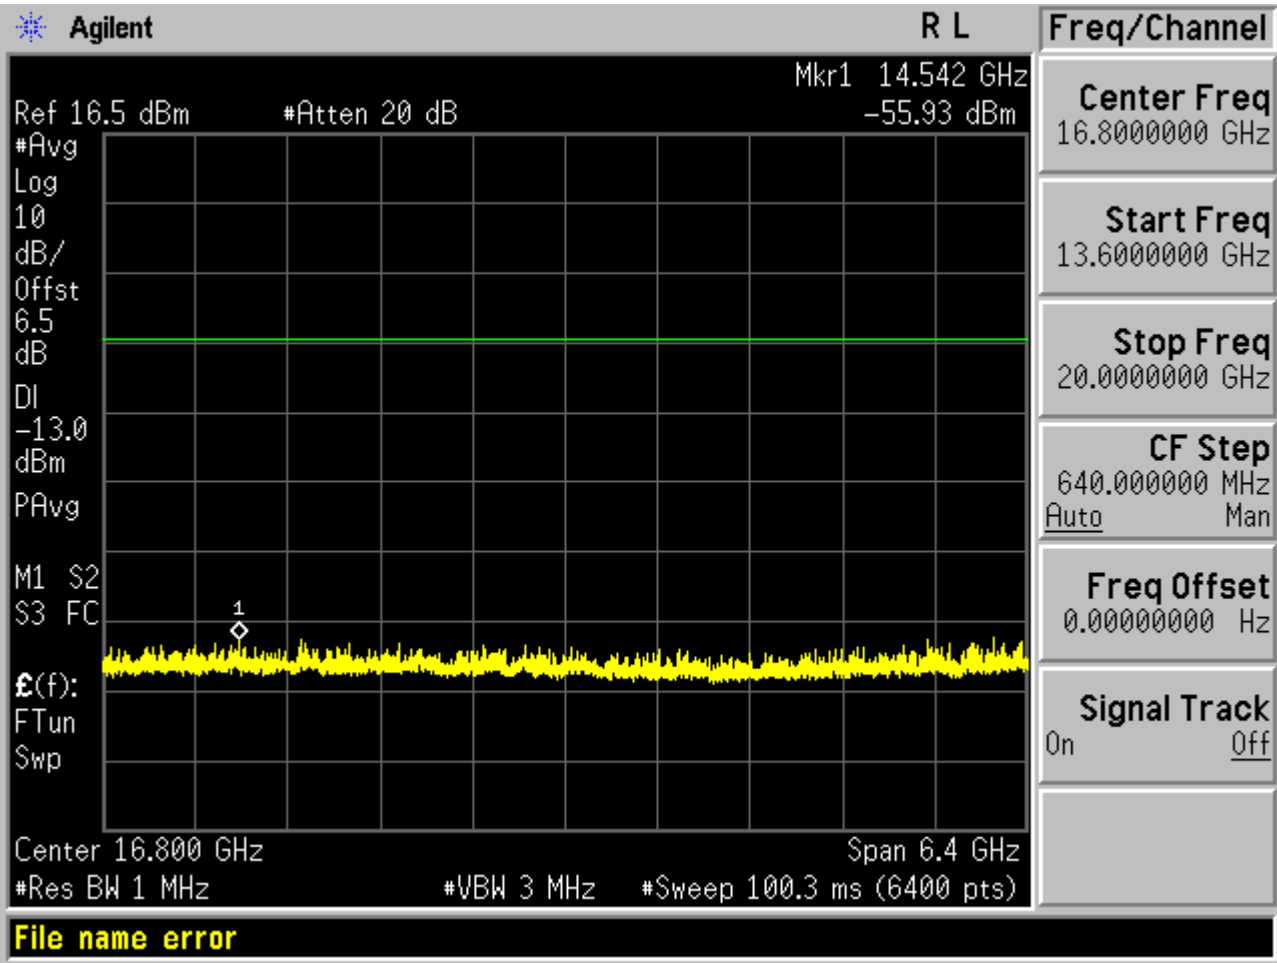


Test Mode=GSM/TM2
Test Channel=LCH

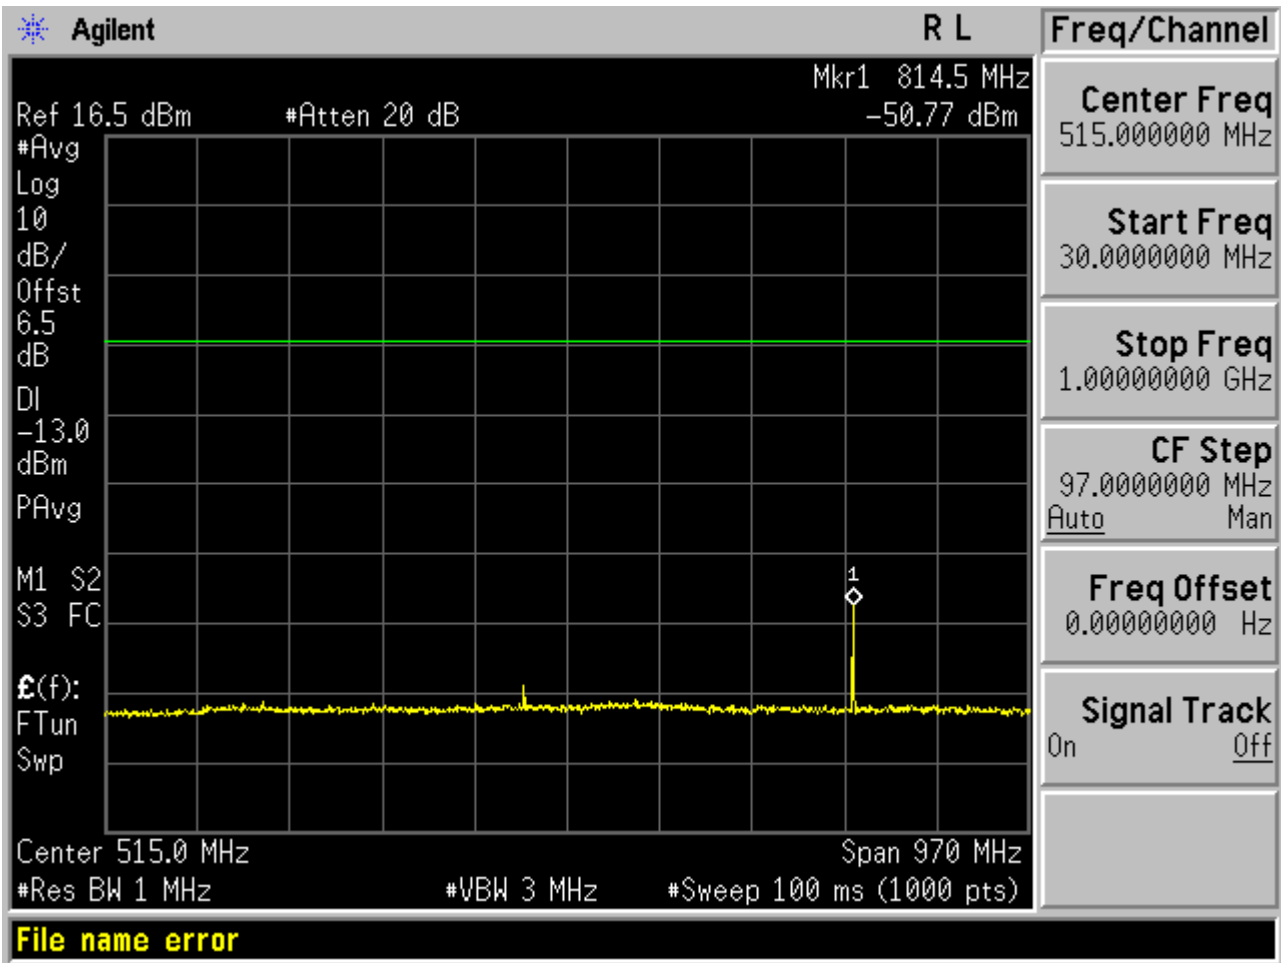


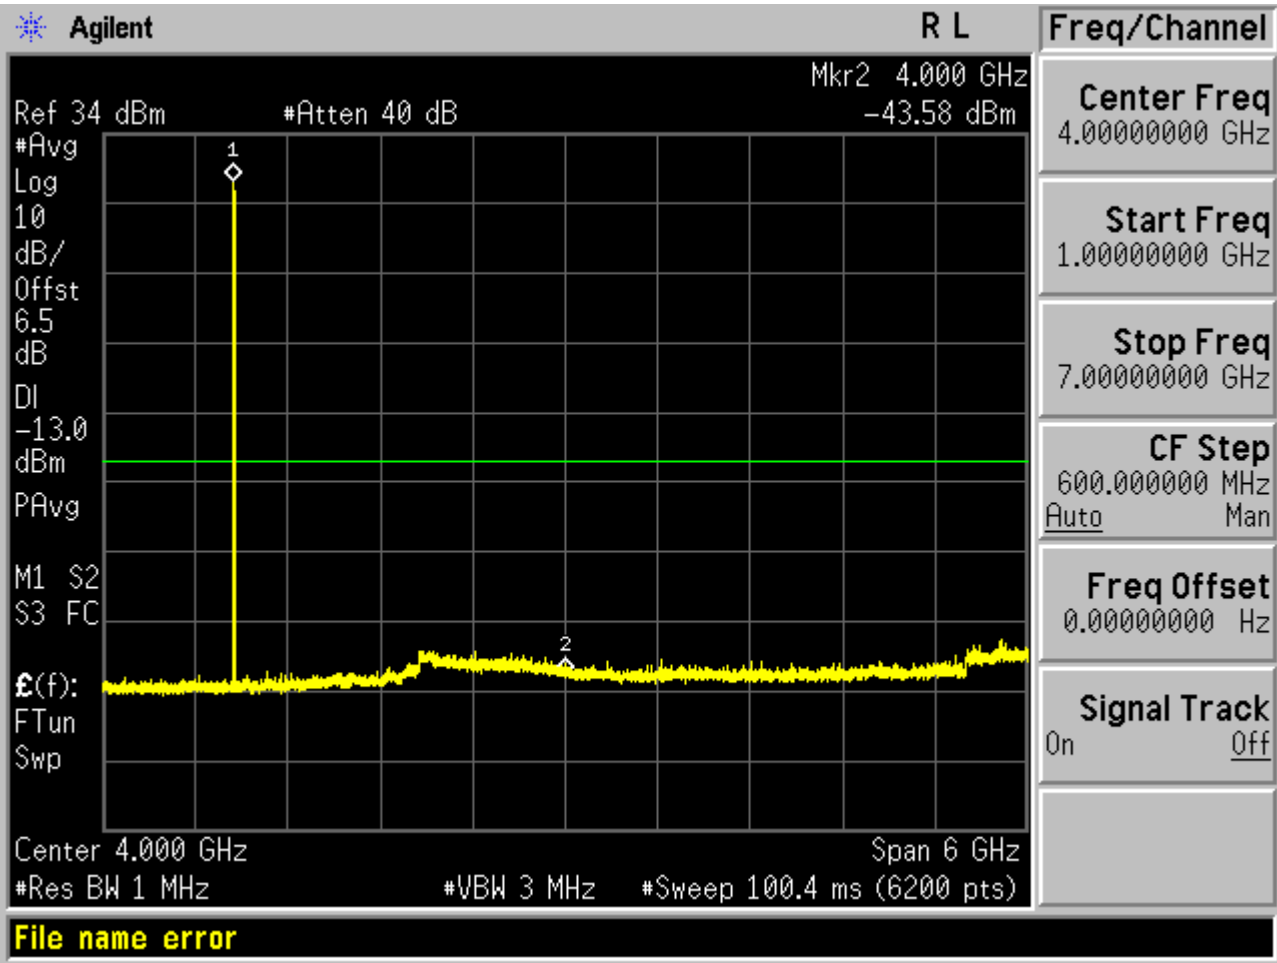


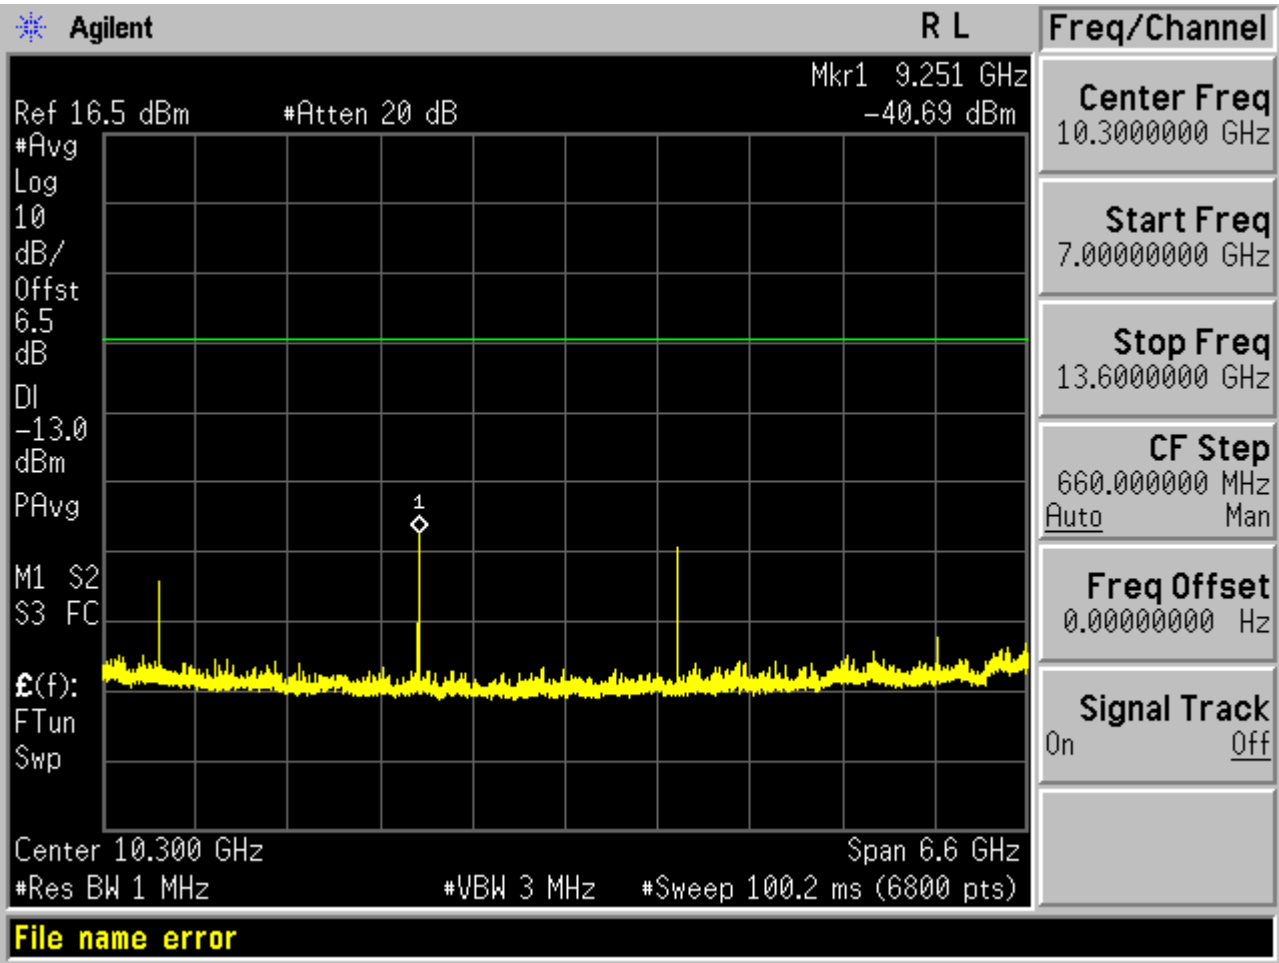

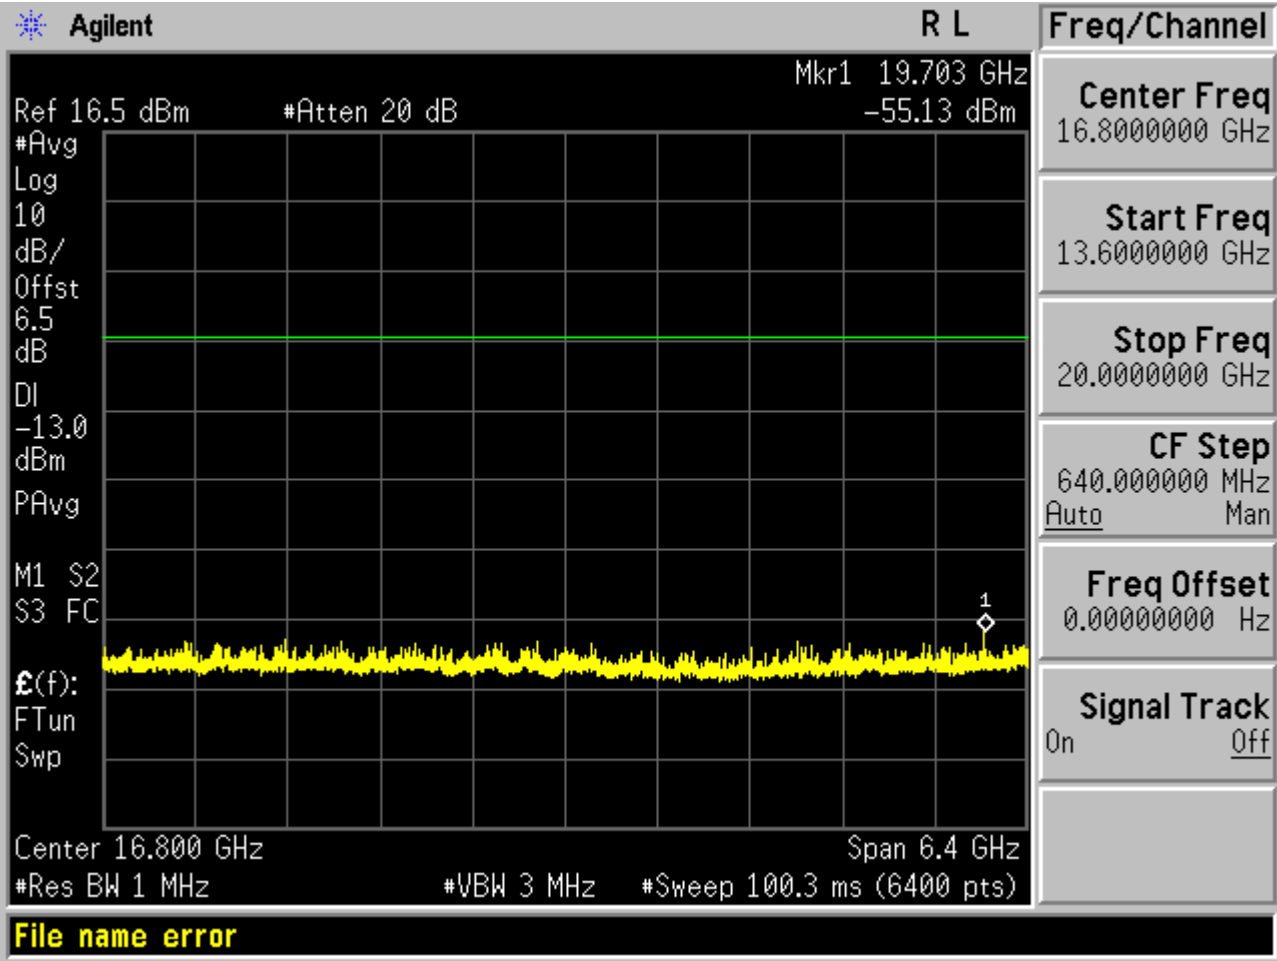


Test Channel=MCH

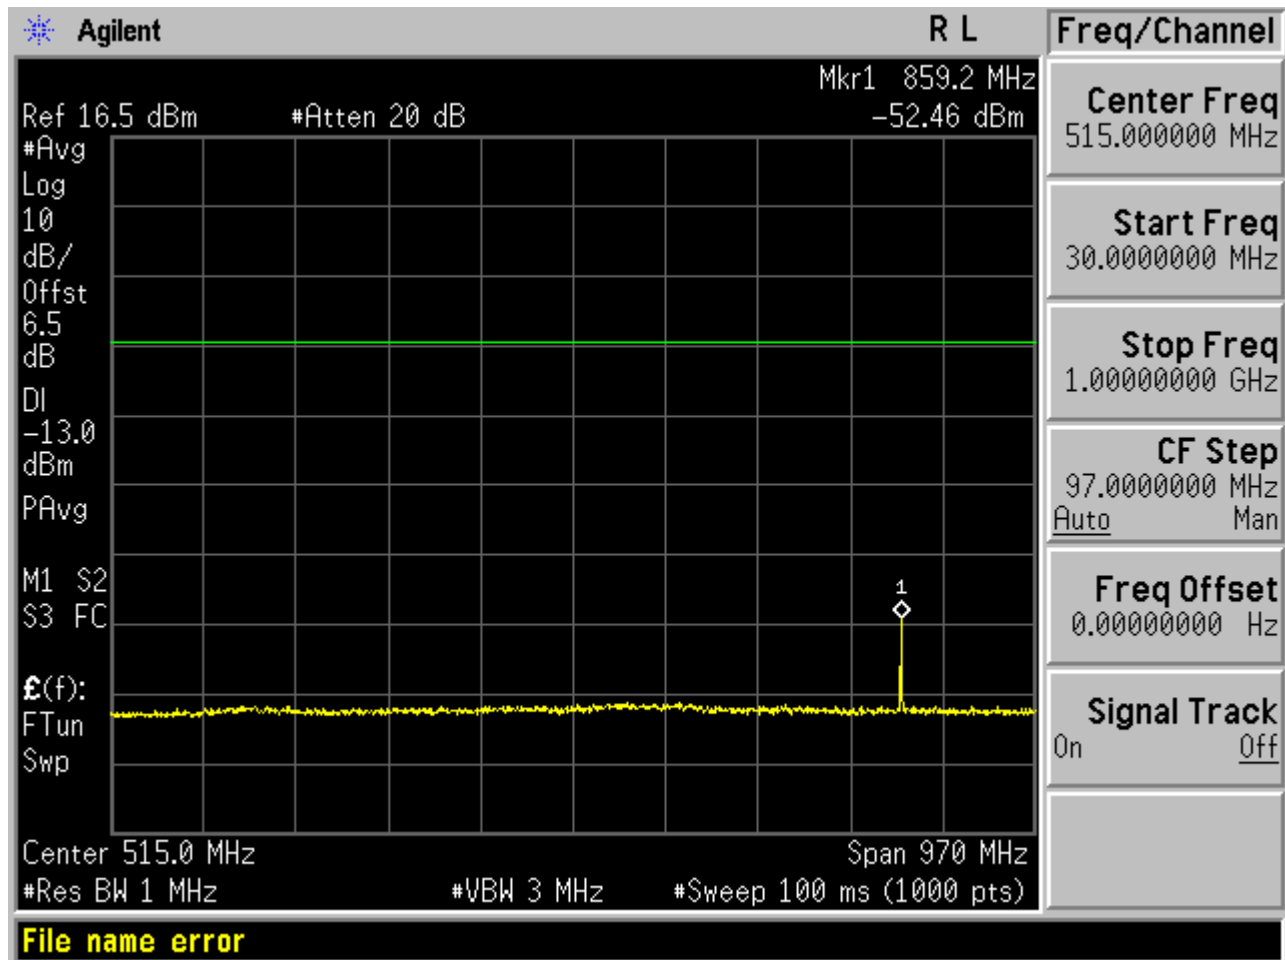


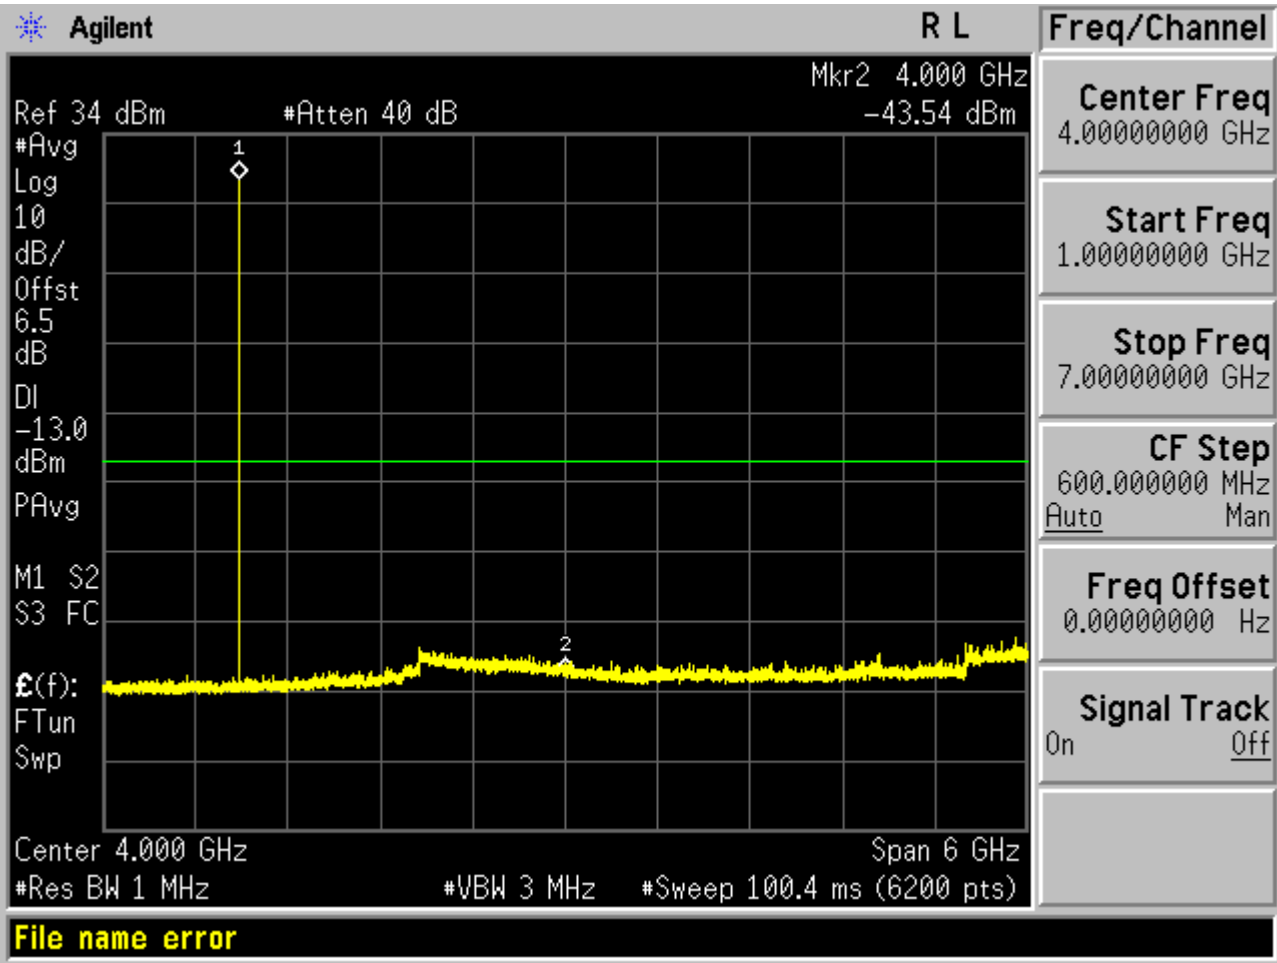





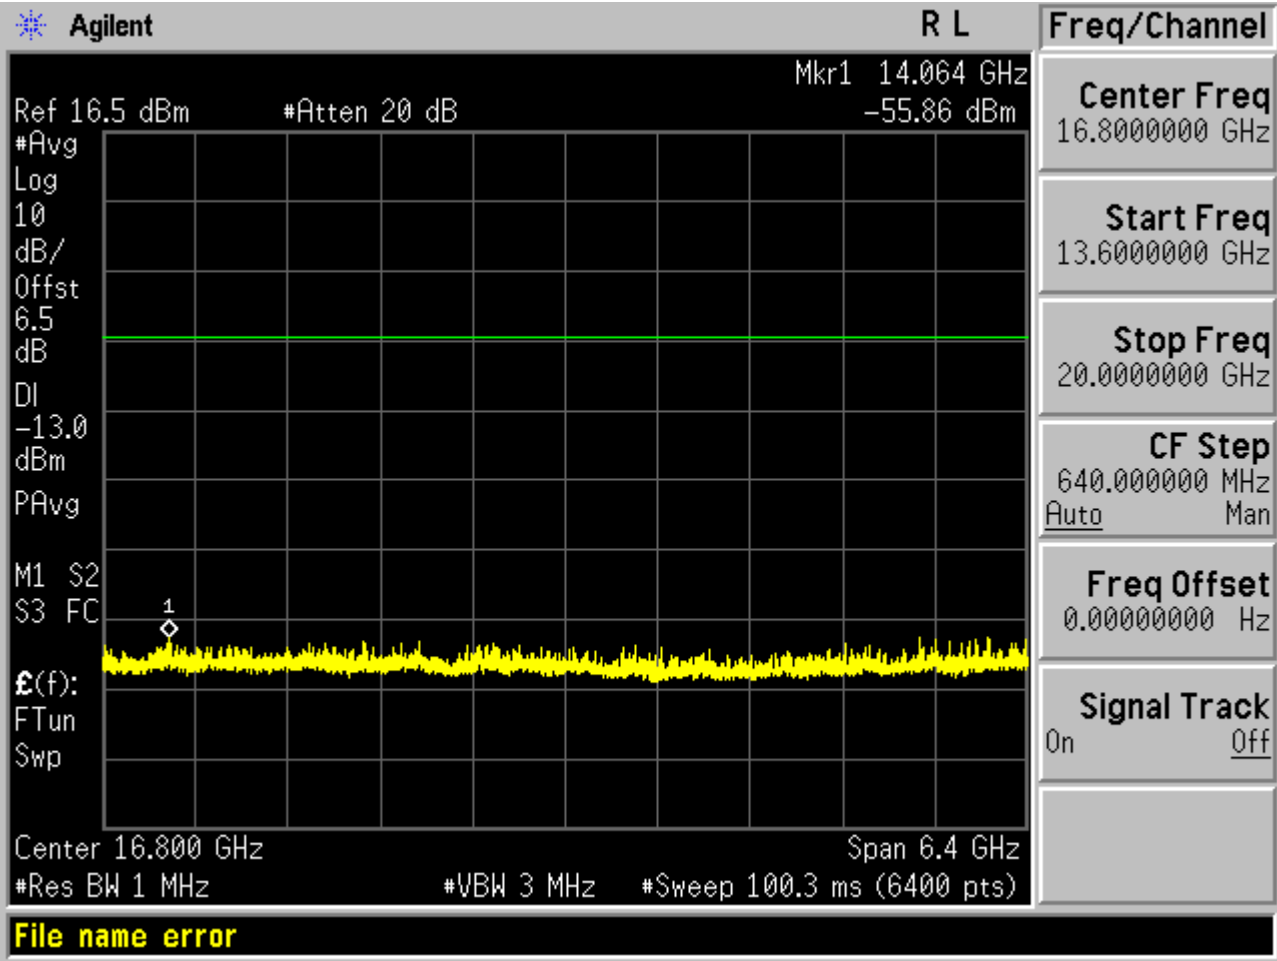


Test Channel=HCH

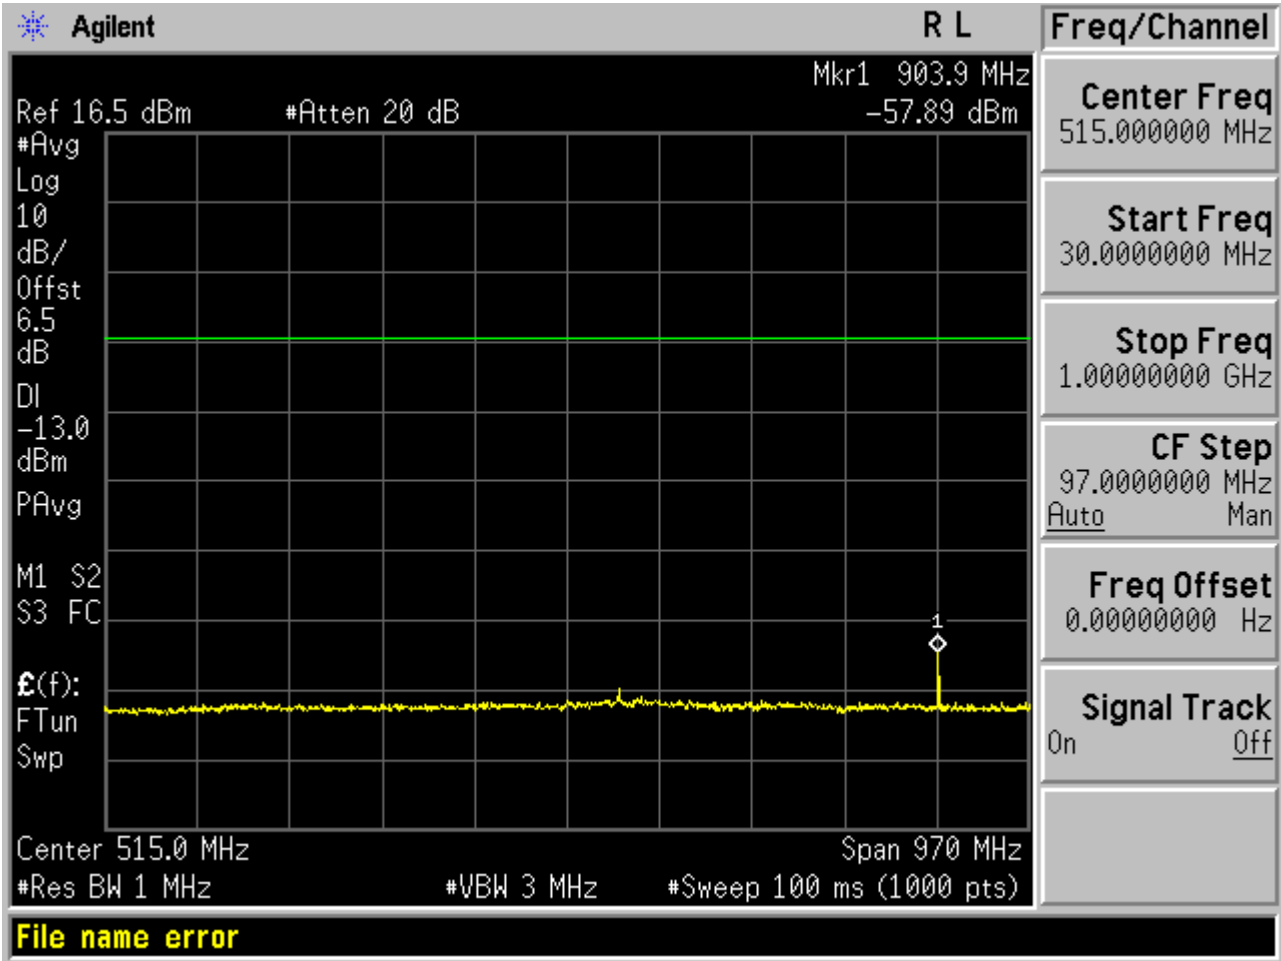

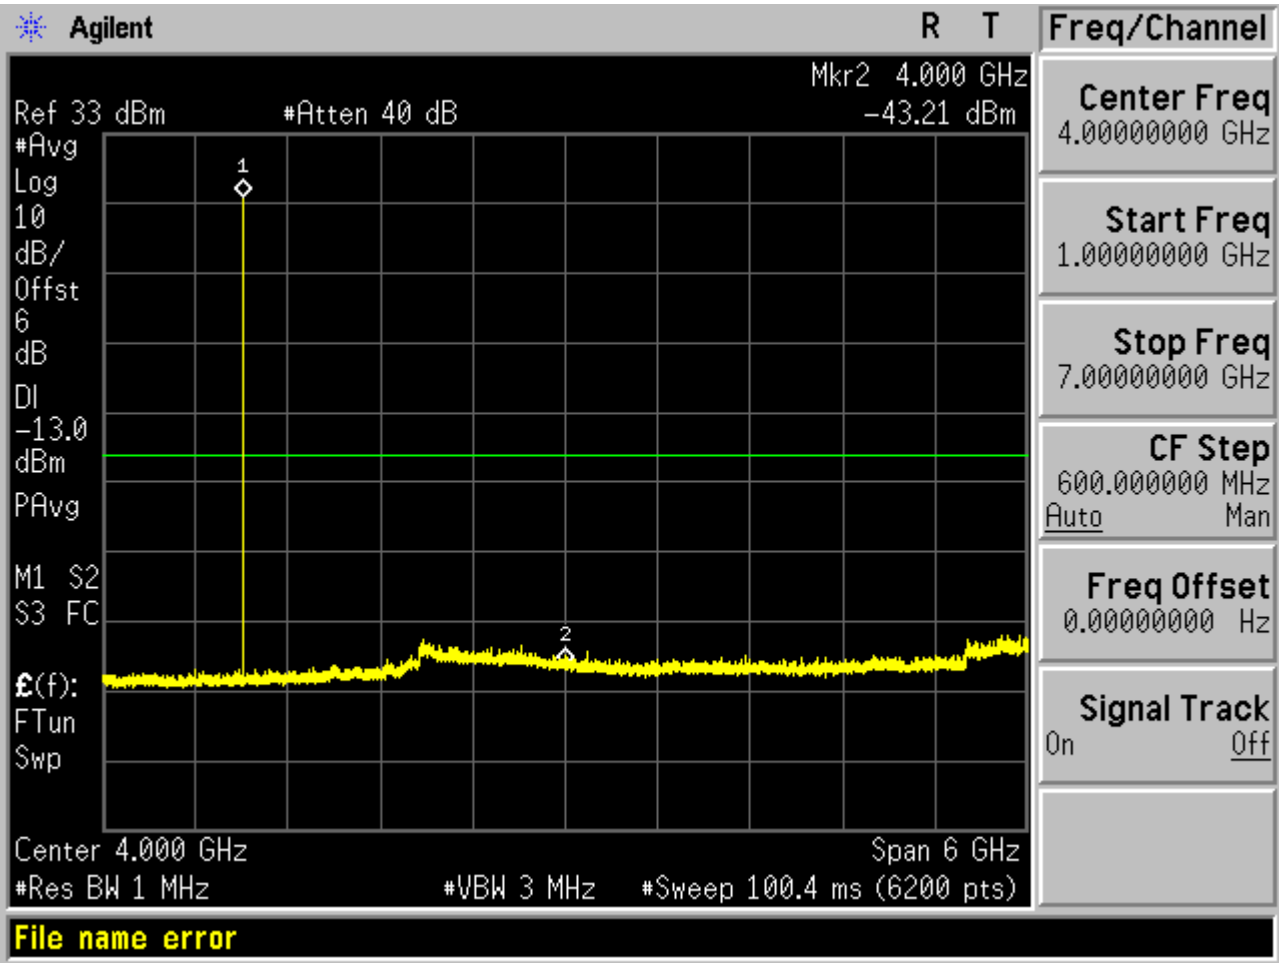


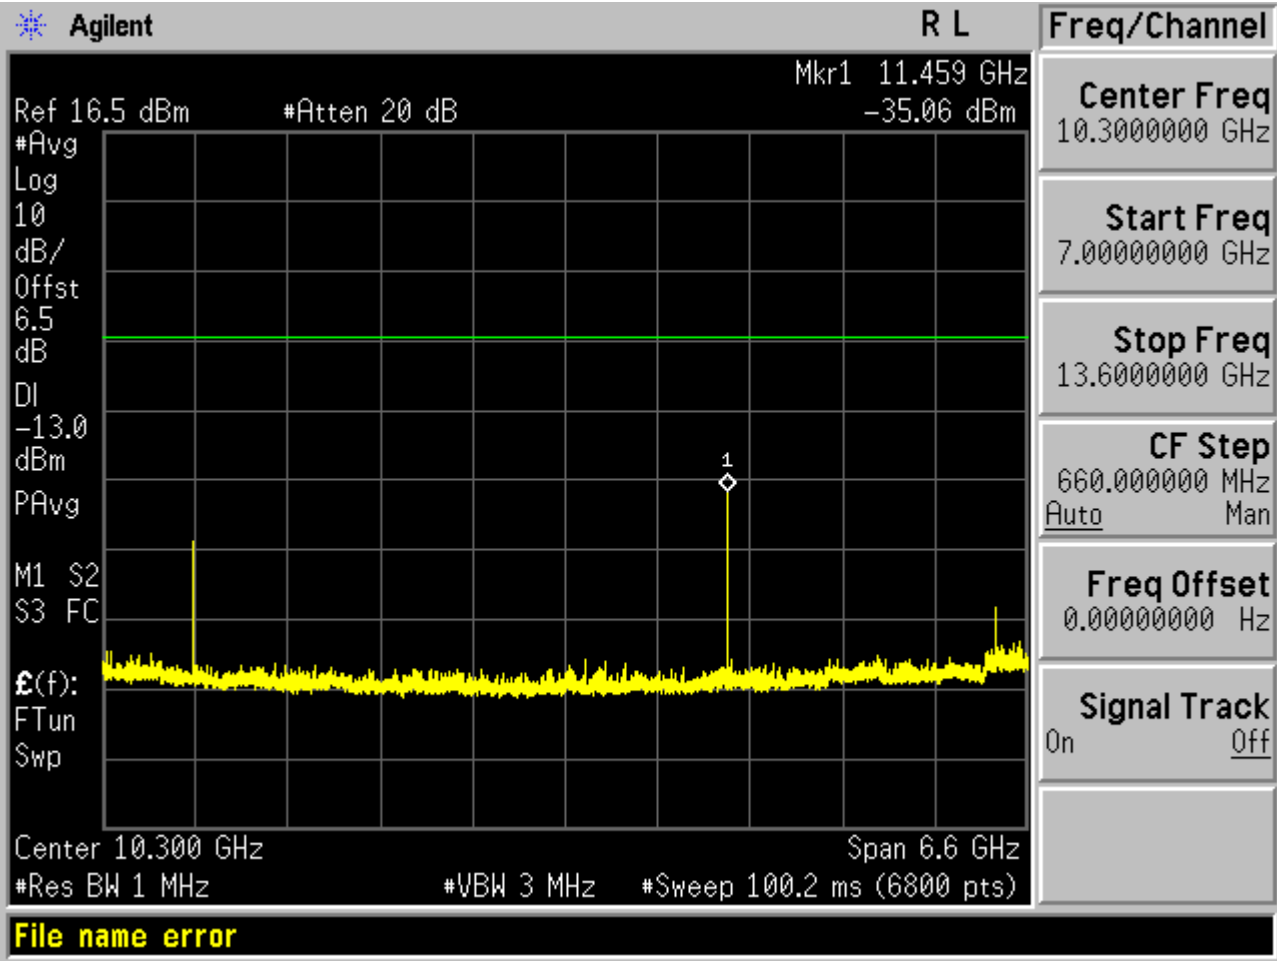


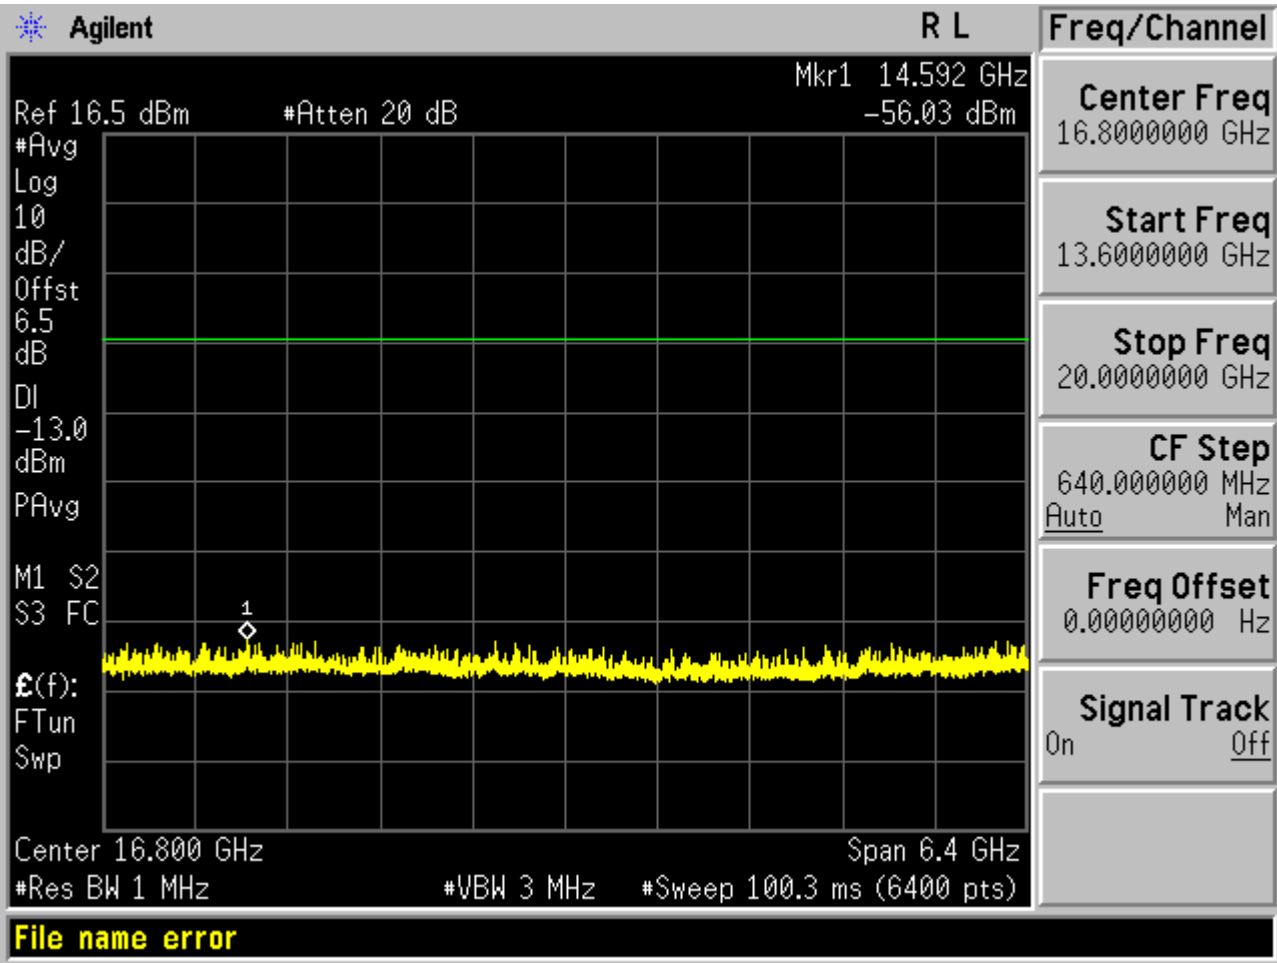


Test Mode=GSM/TM3

Test Channel=LCH

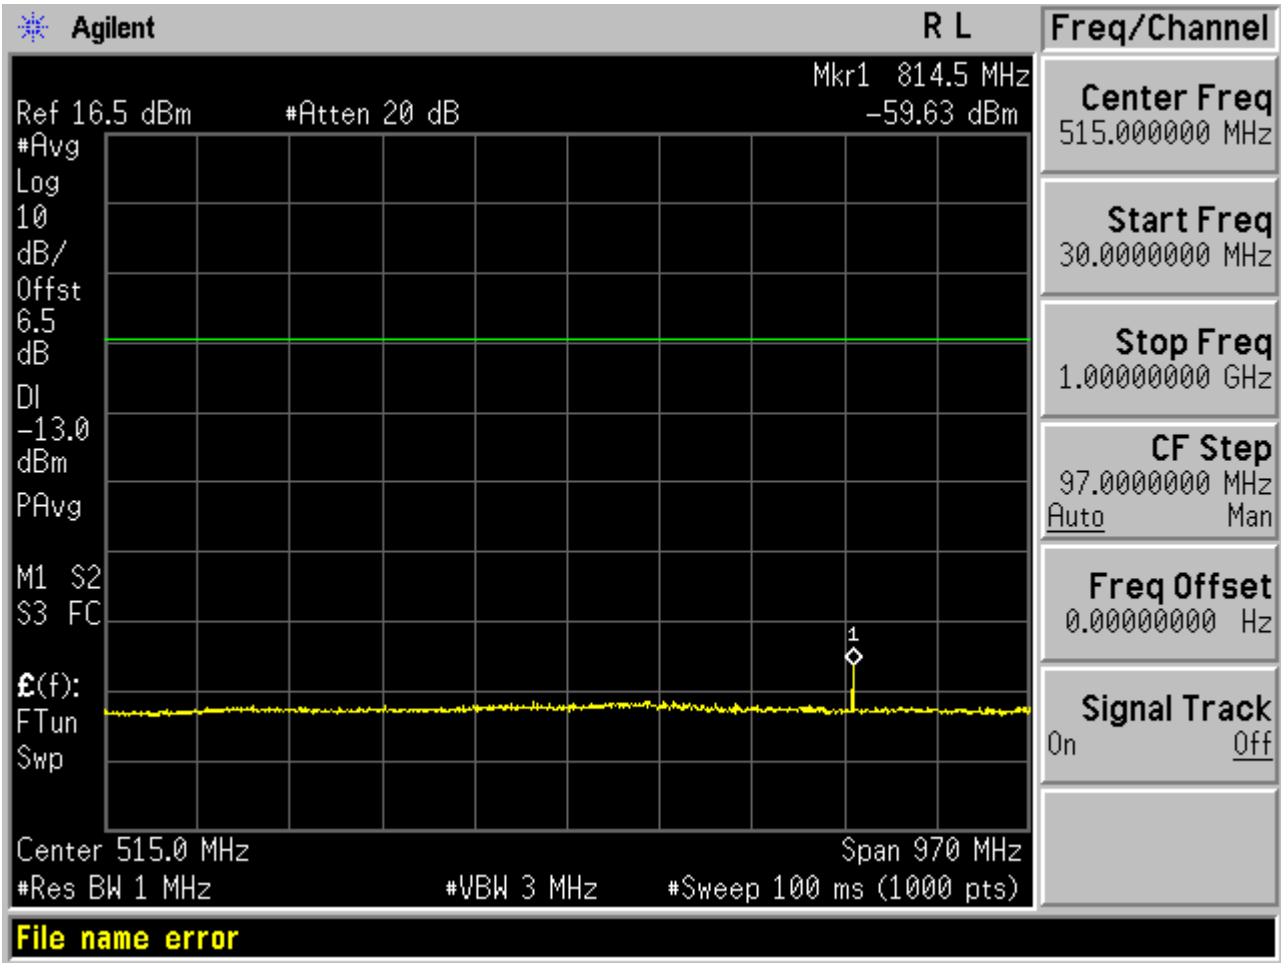


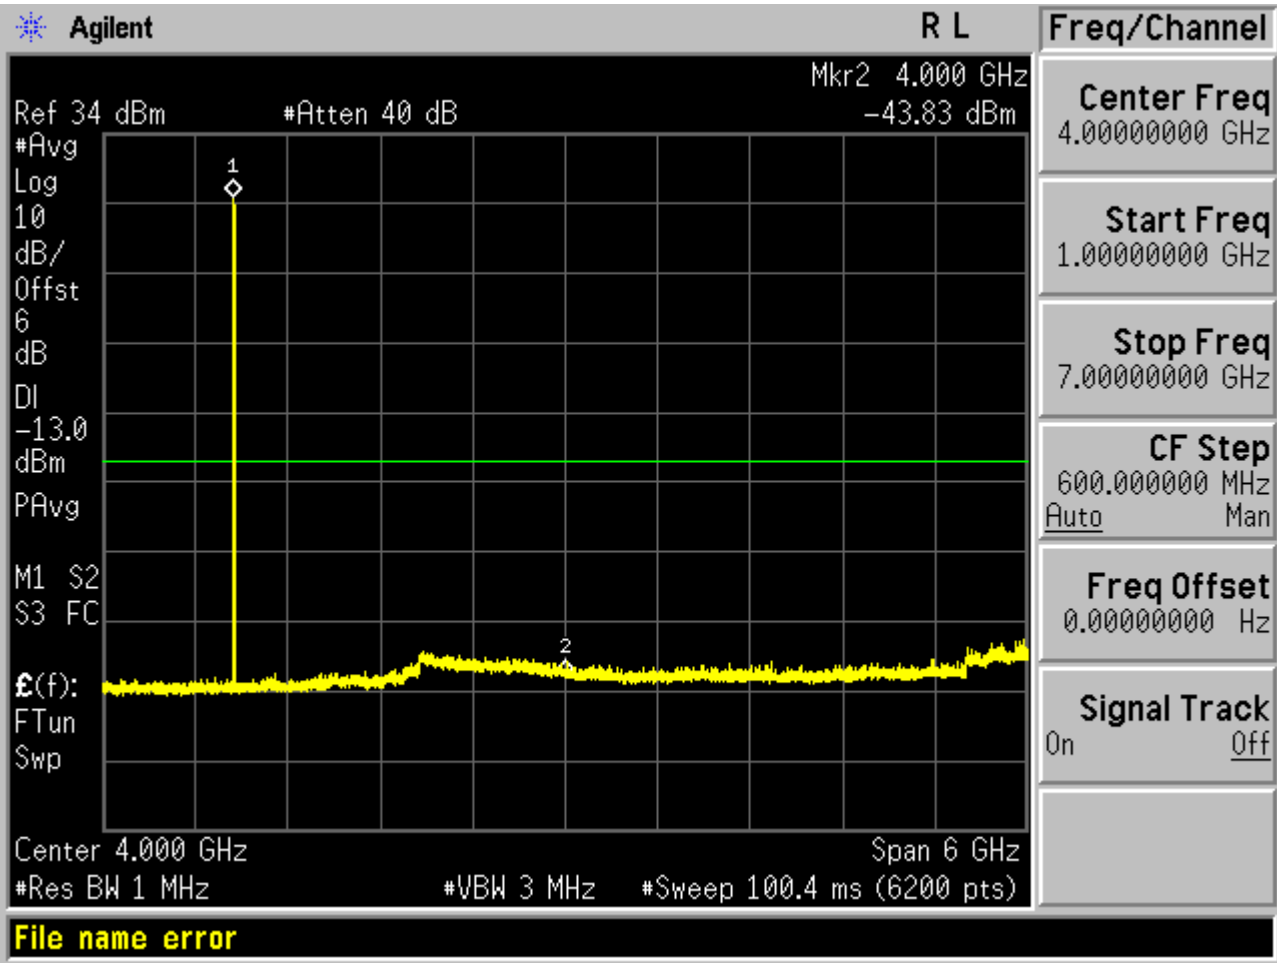




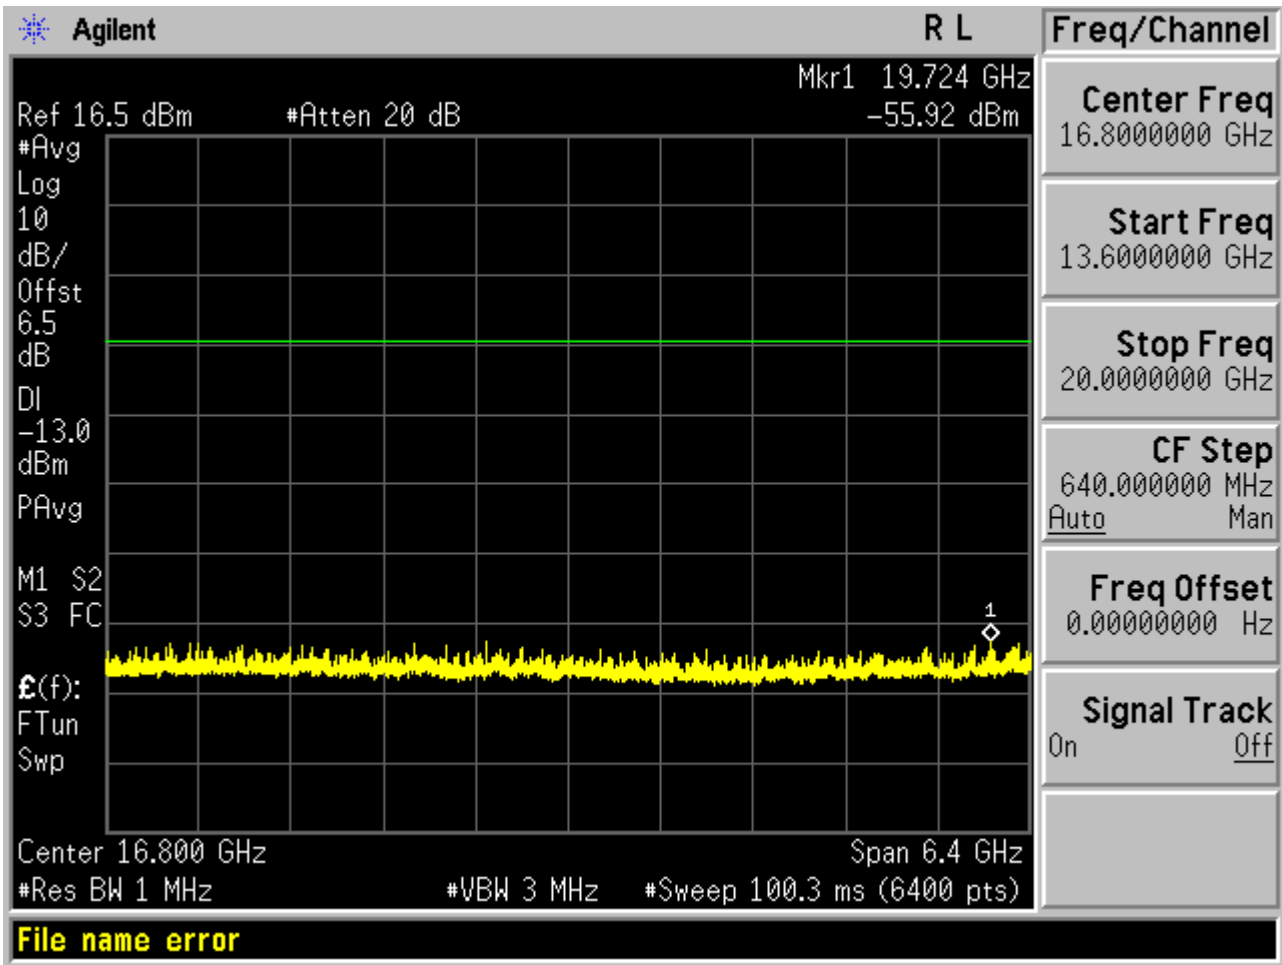


Test Channel=MCH

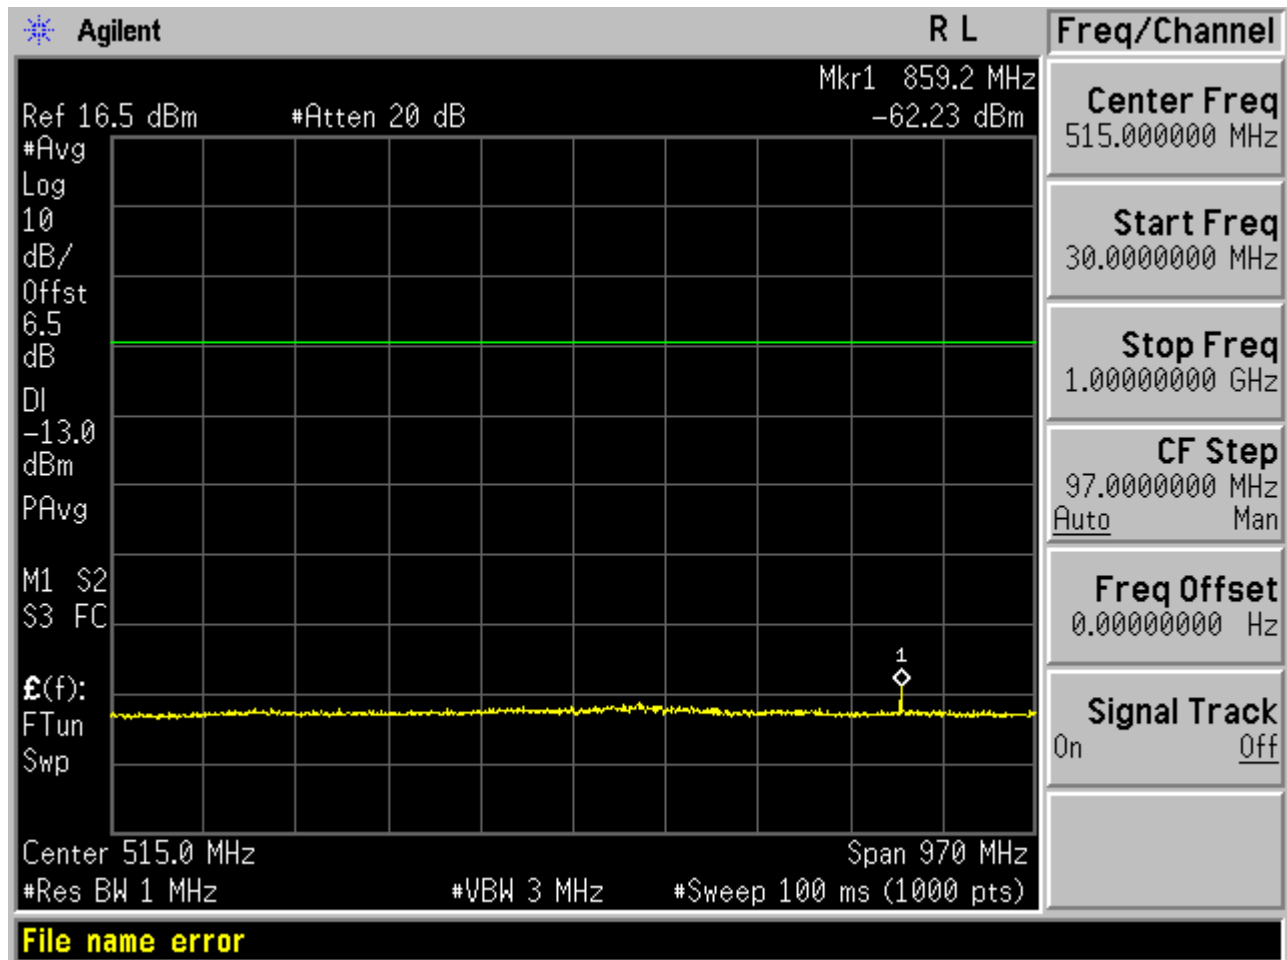


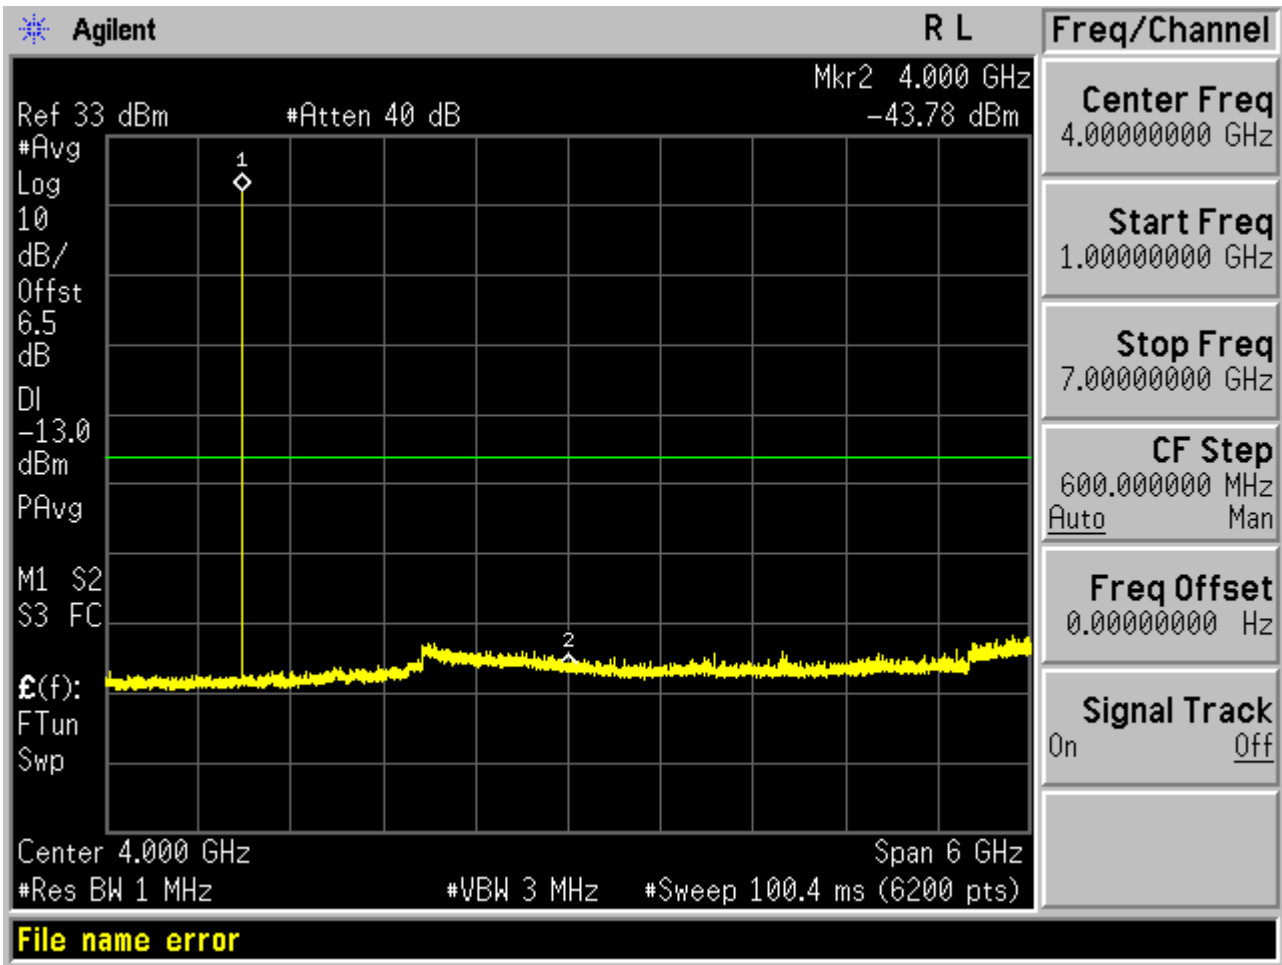





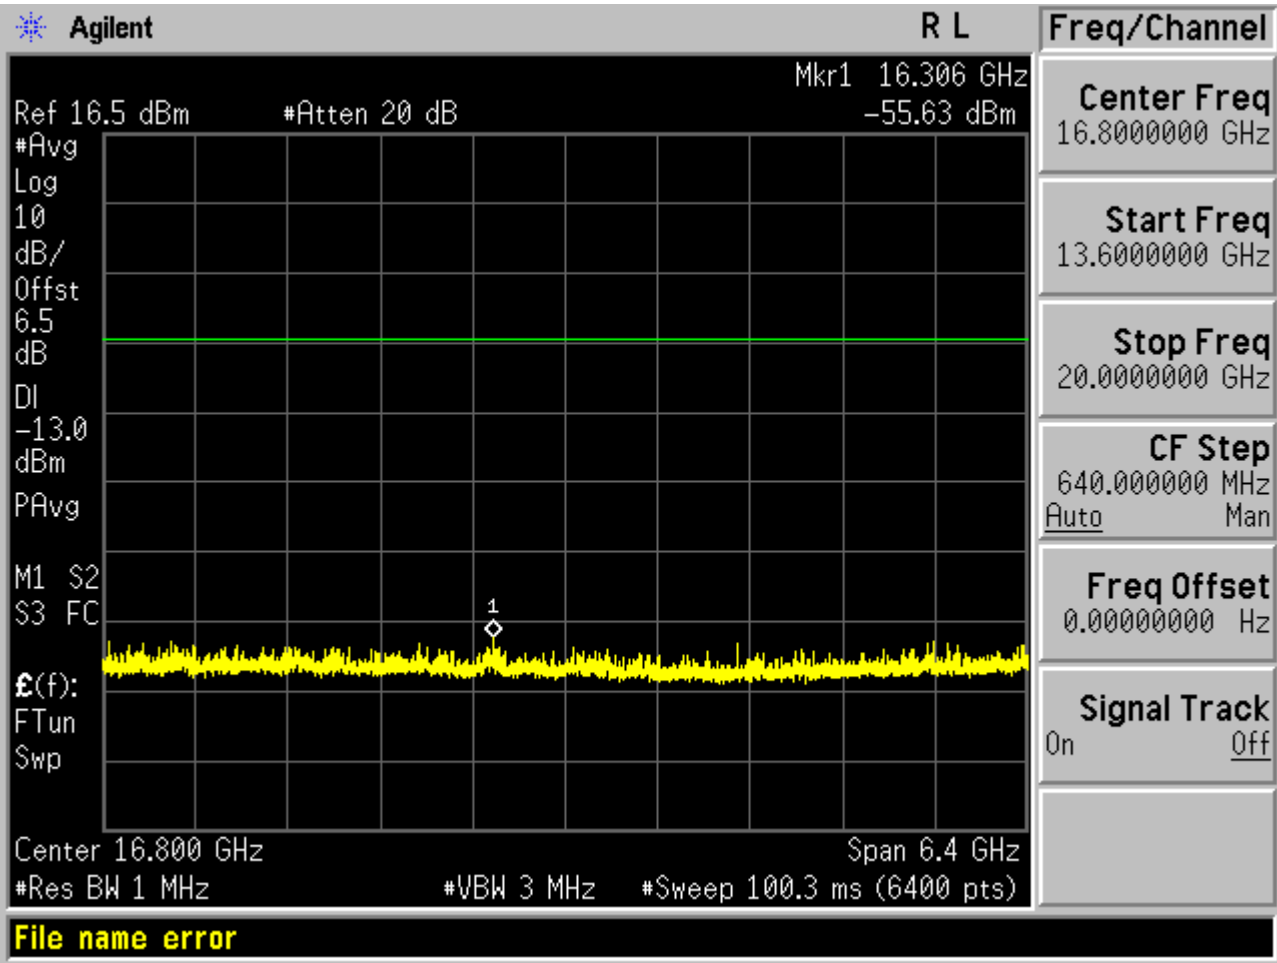


Test Channel=HCH

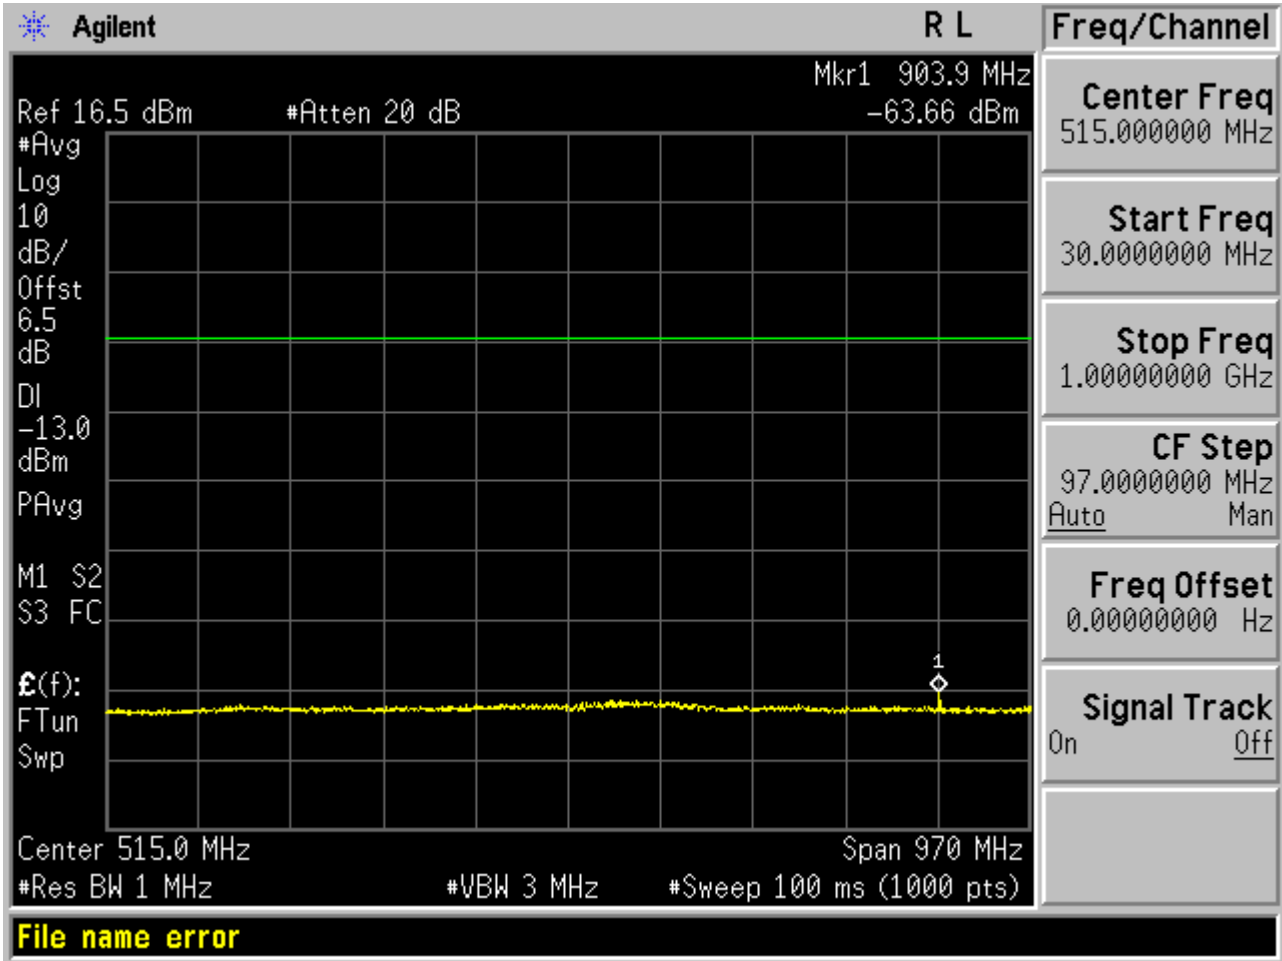

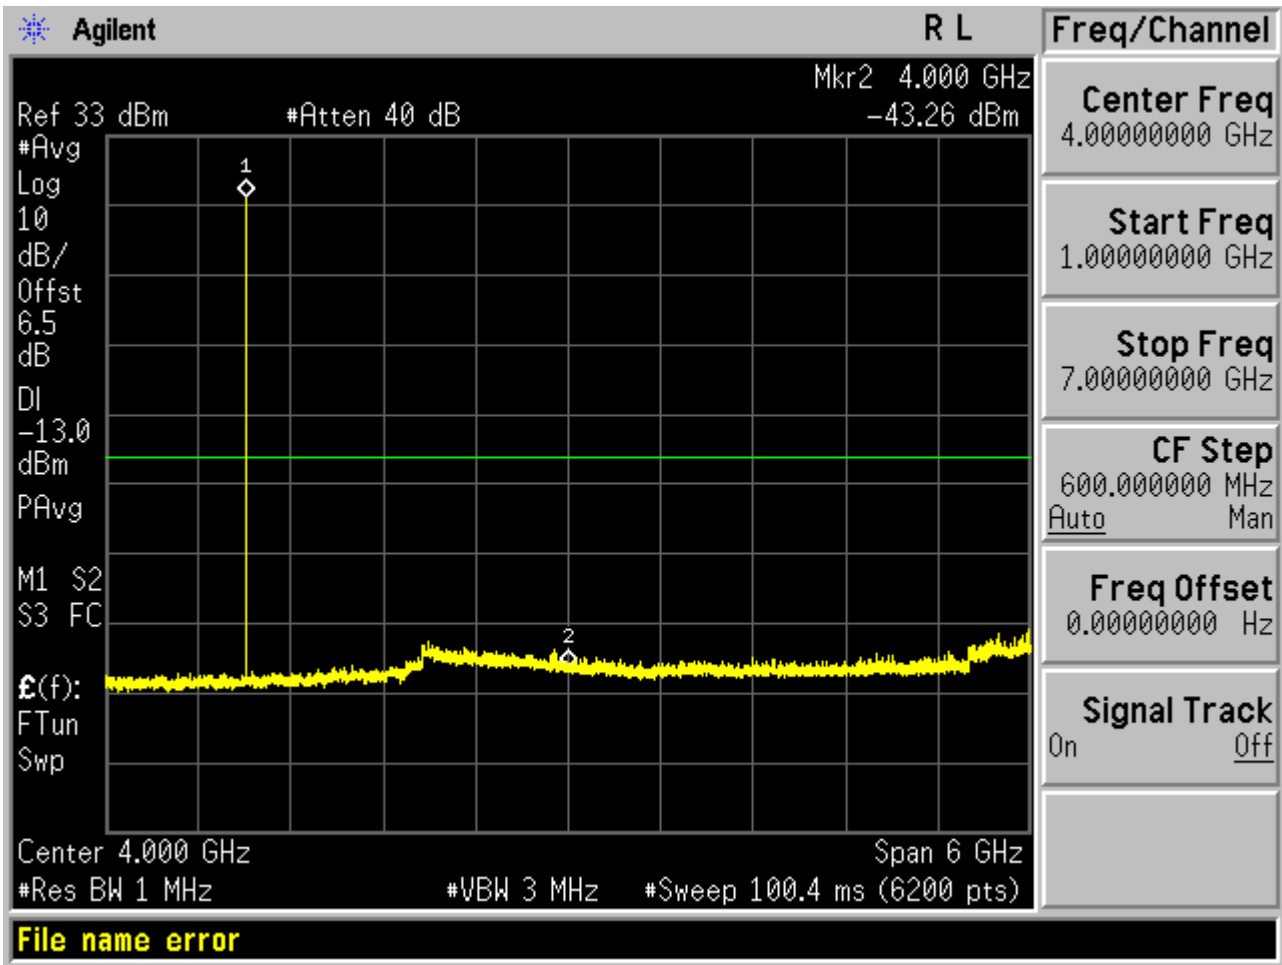

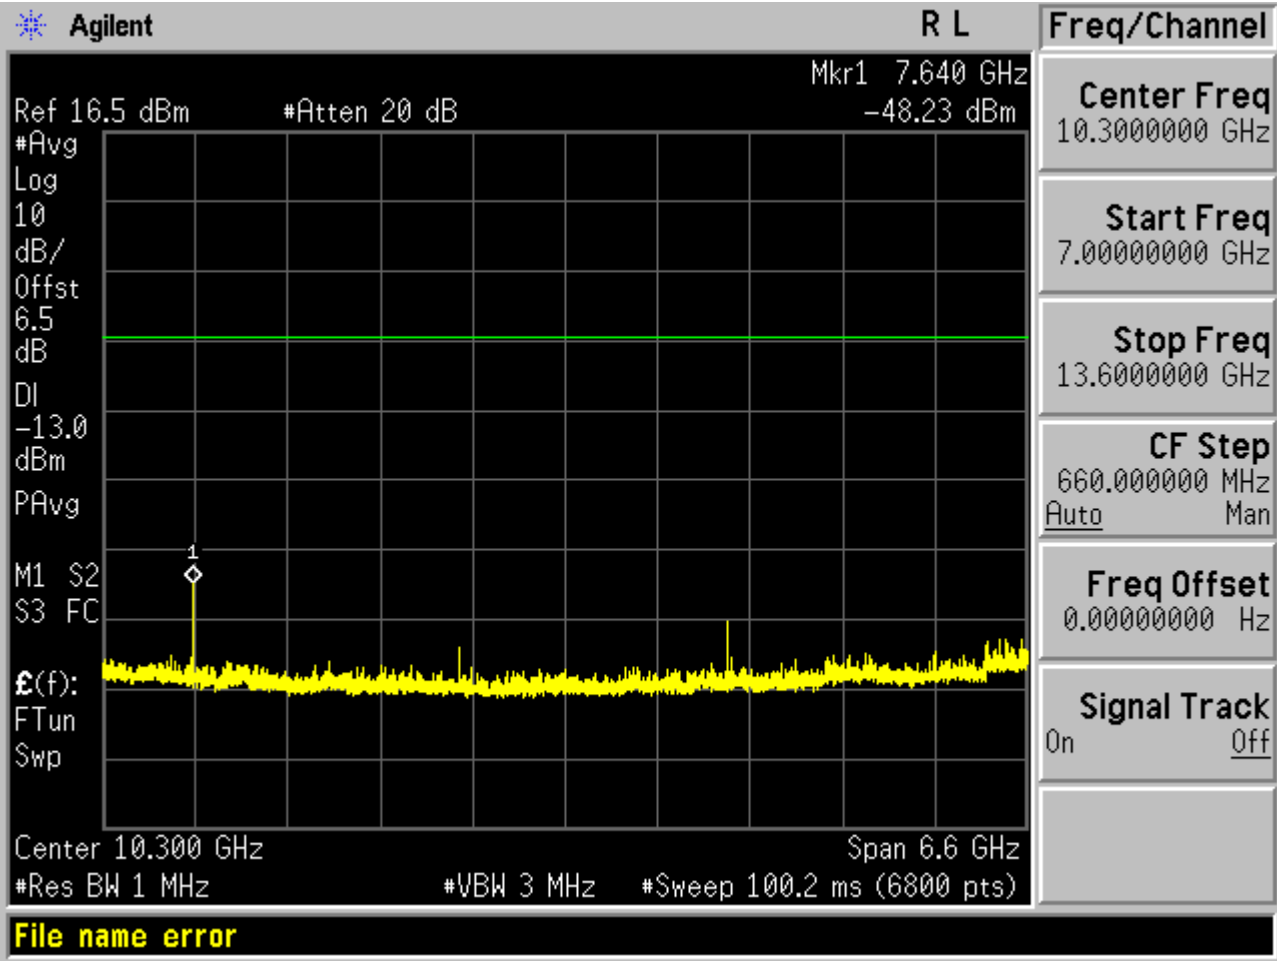


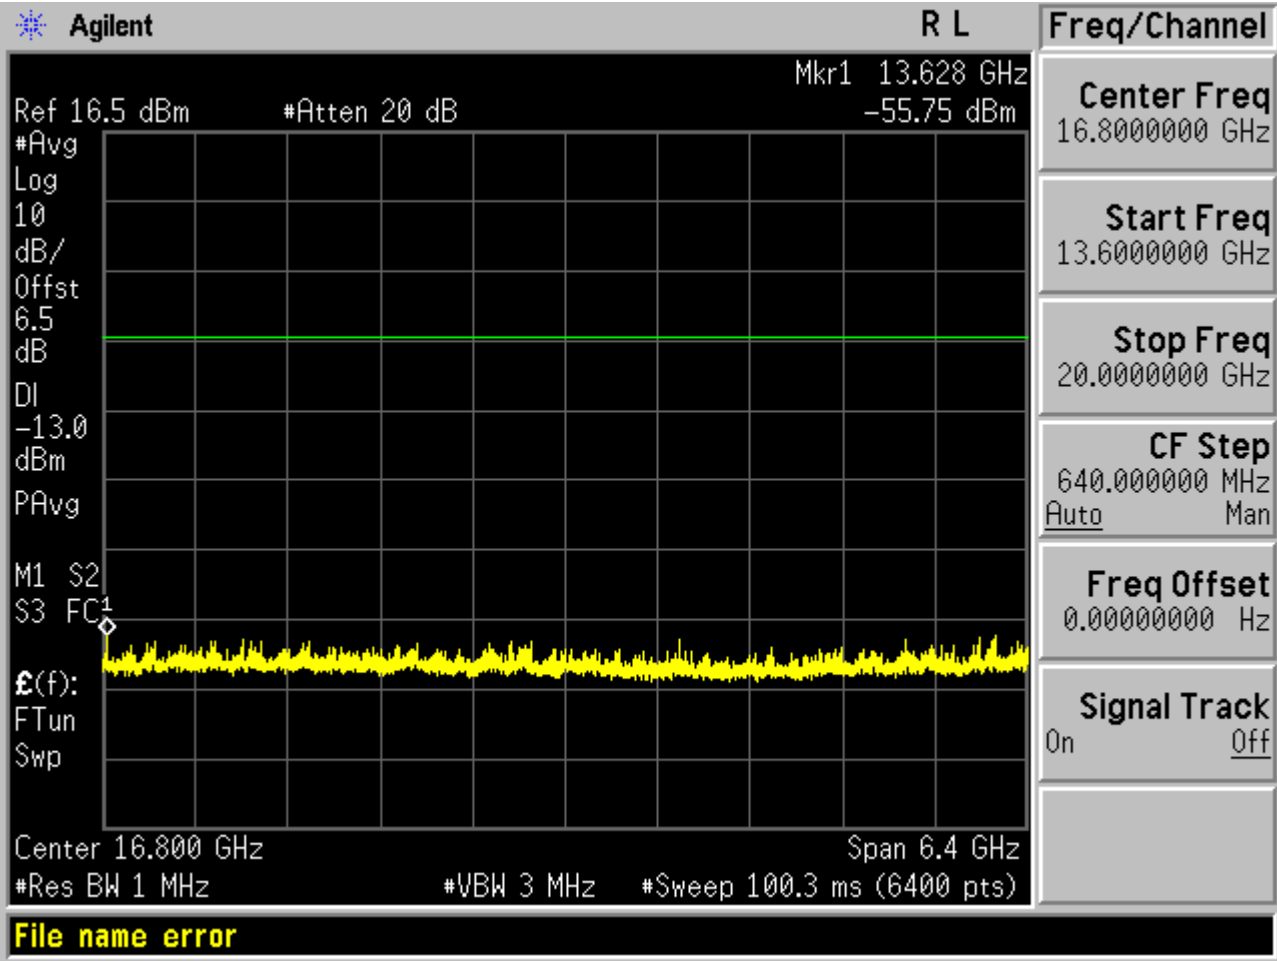


Test Band=WCDMA850


Test Mode=UMTS/TM1


Test Channel=LCH

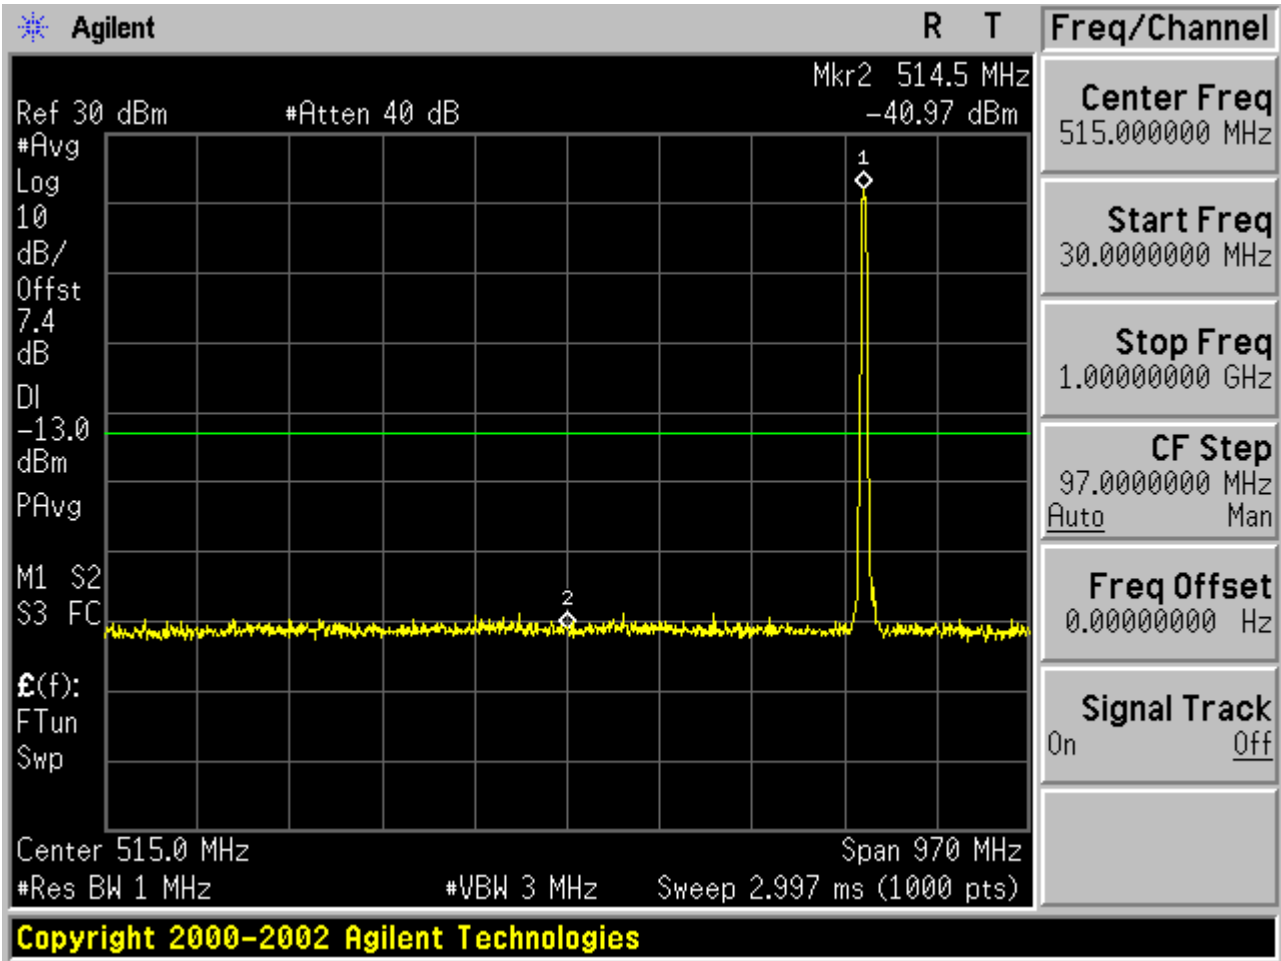

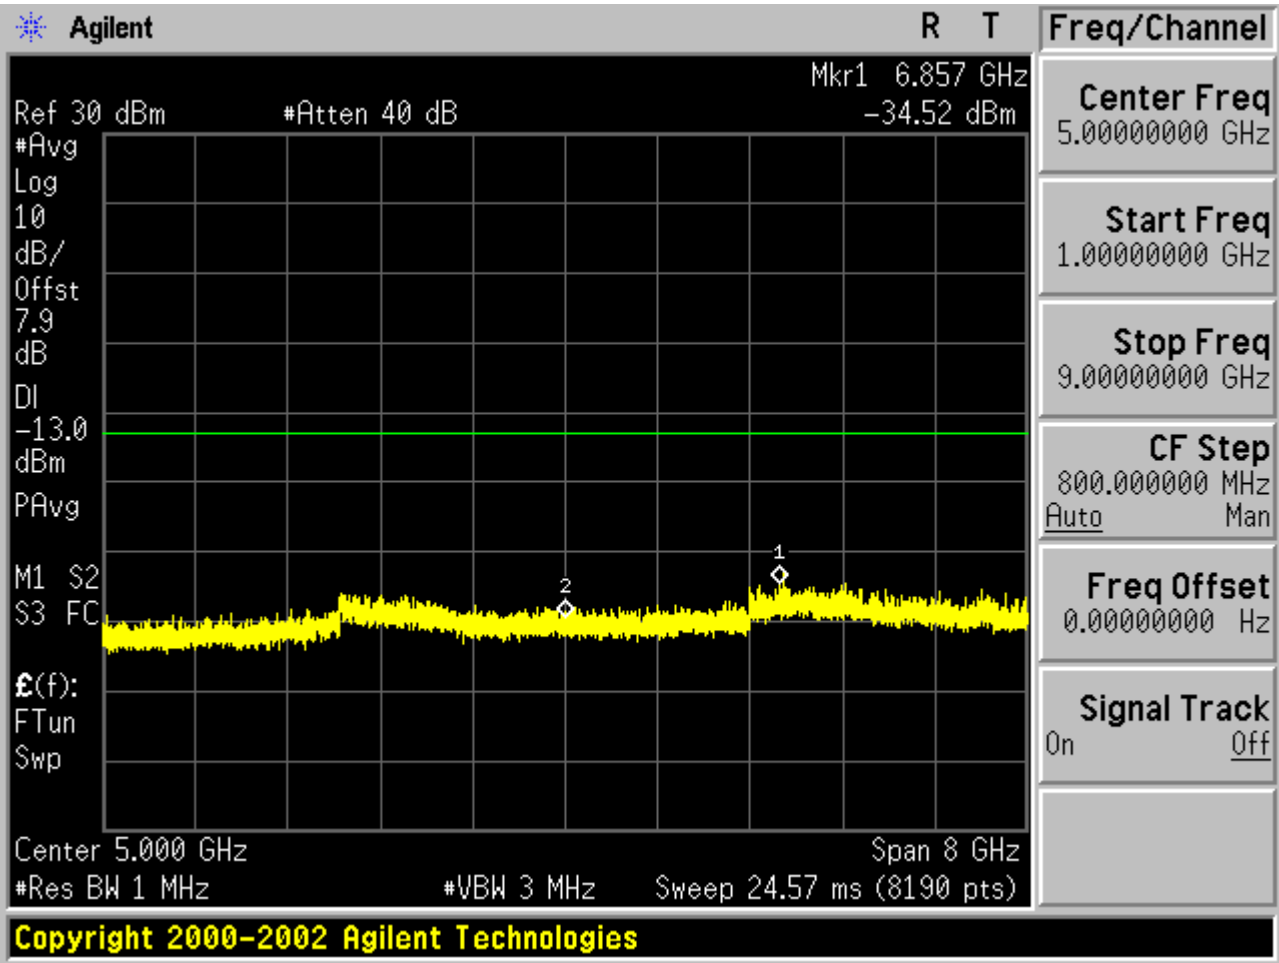



Test Channel=MCH

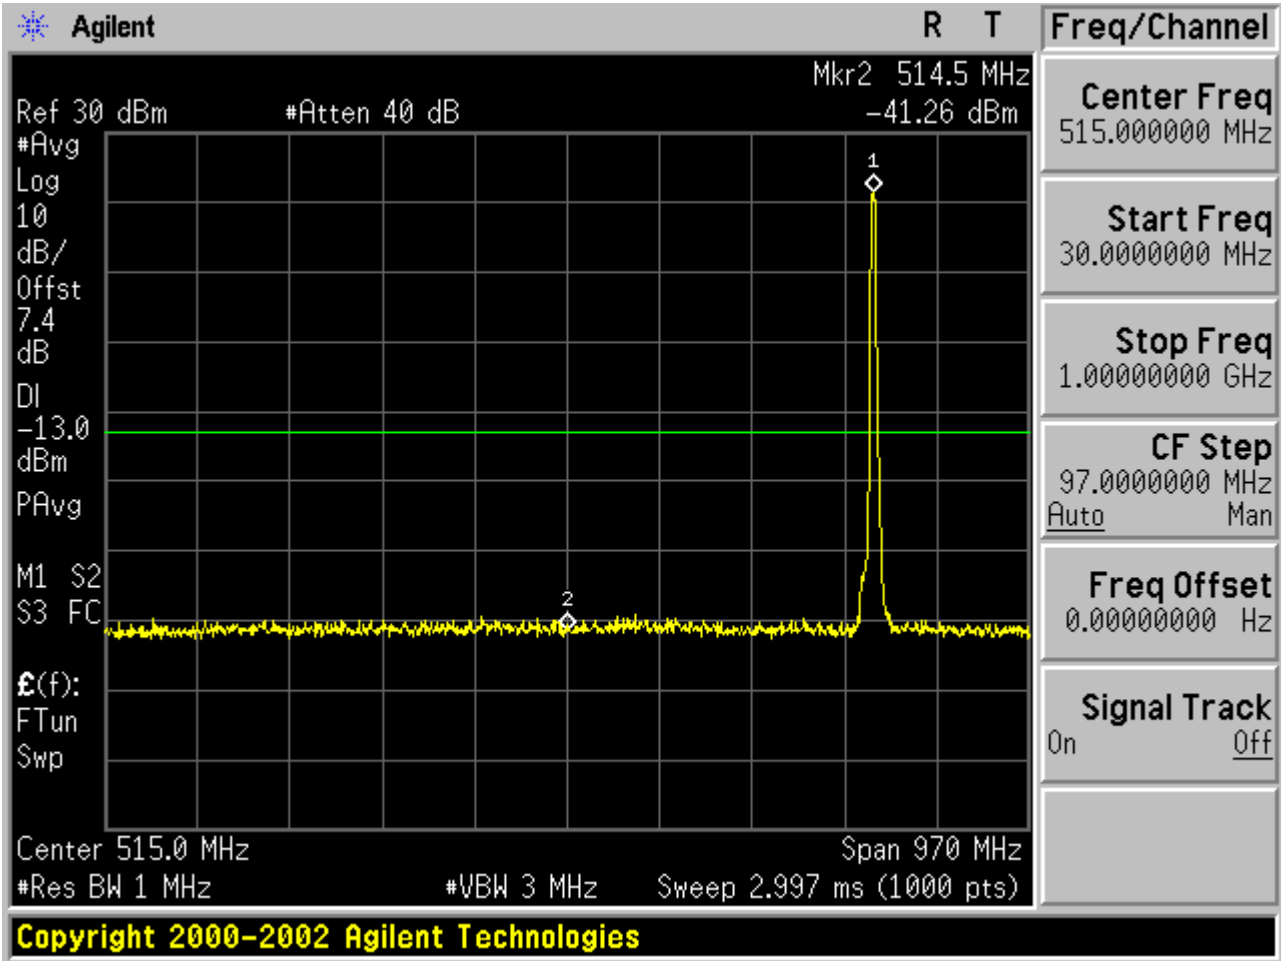

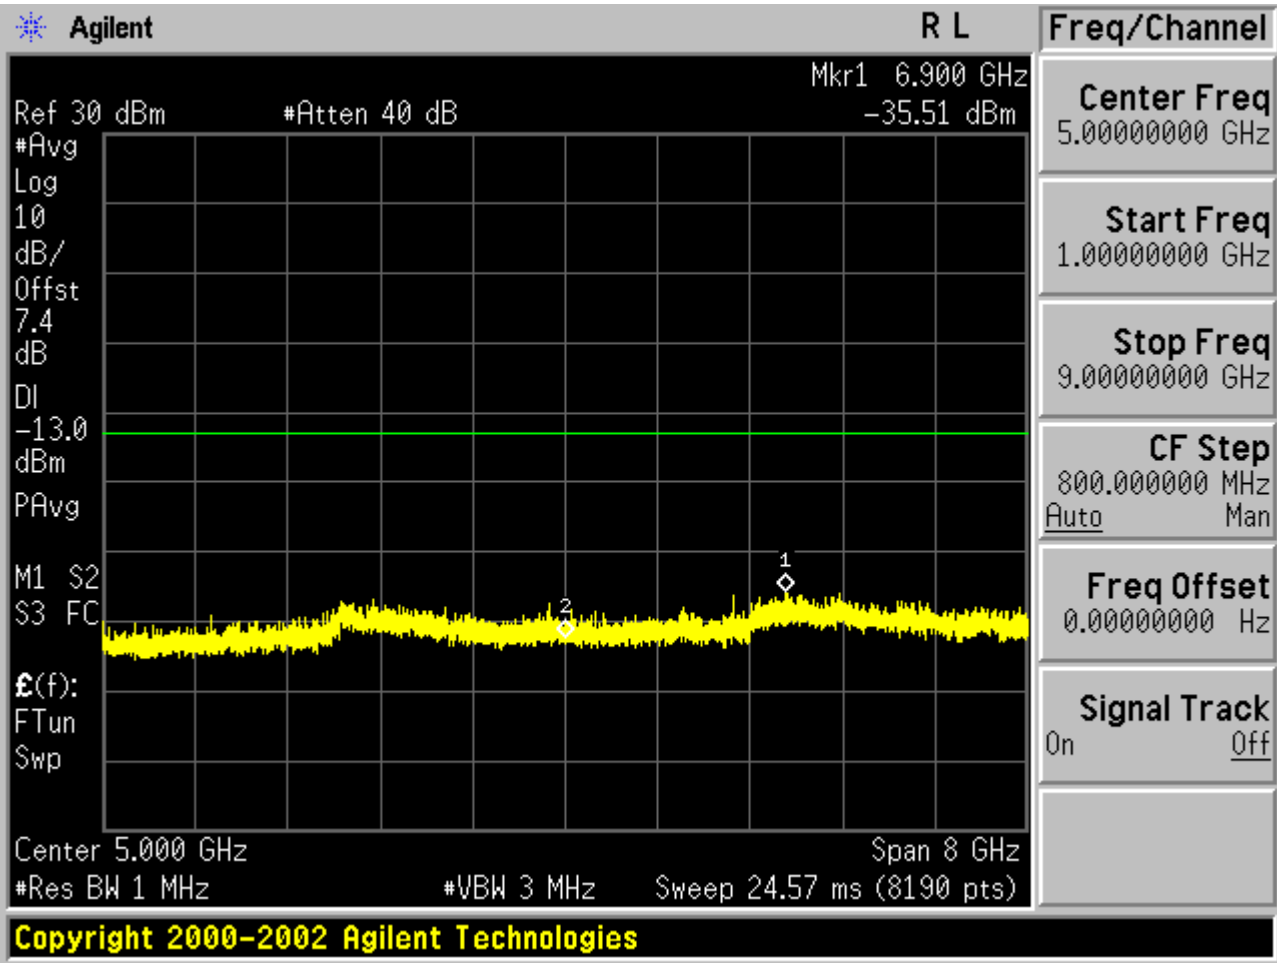

Test Channel=HCH

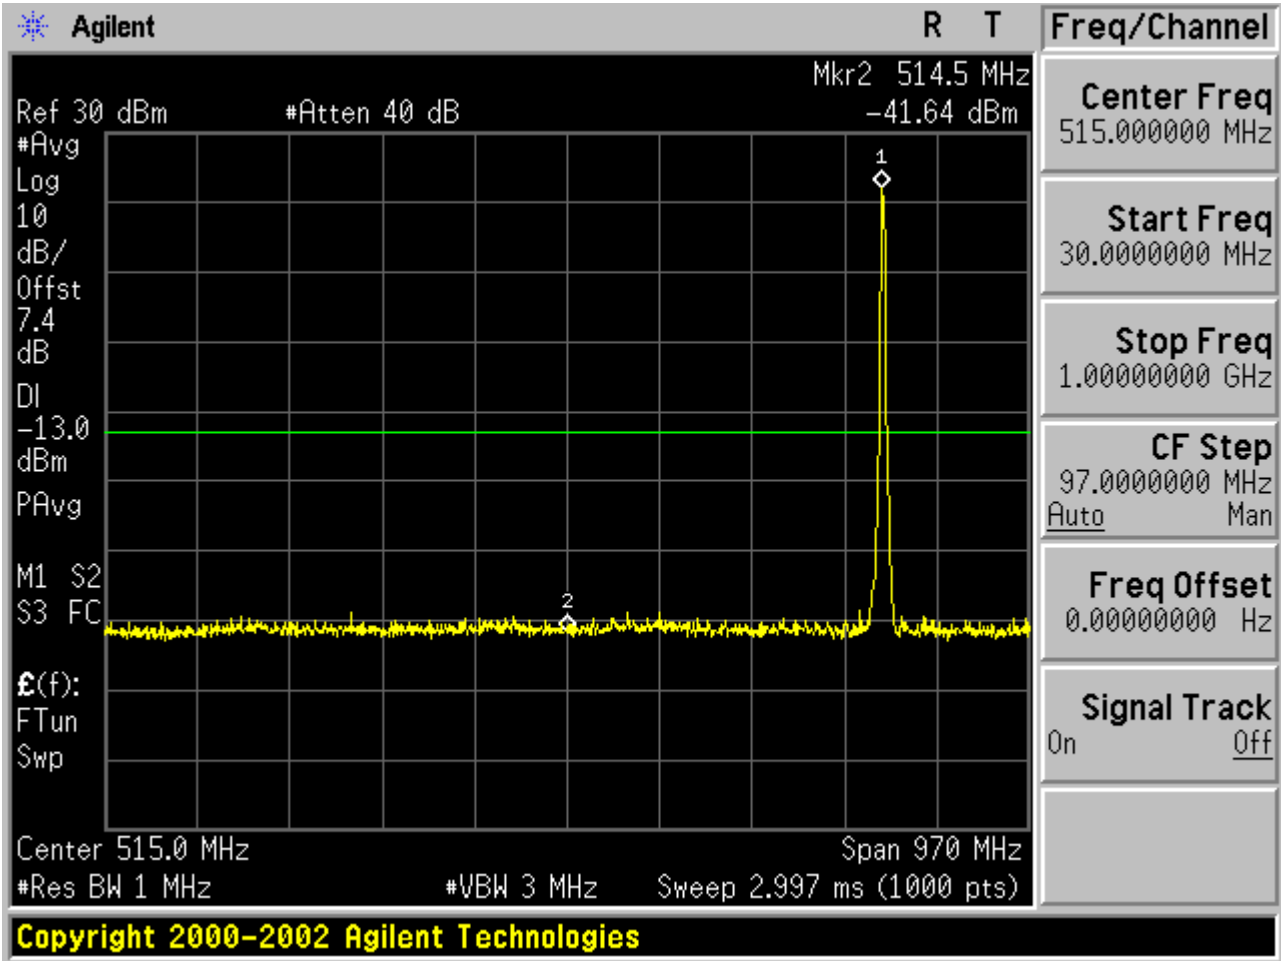


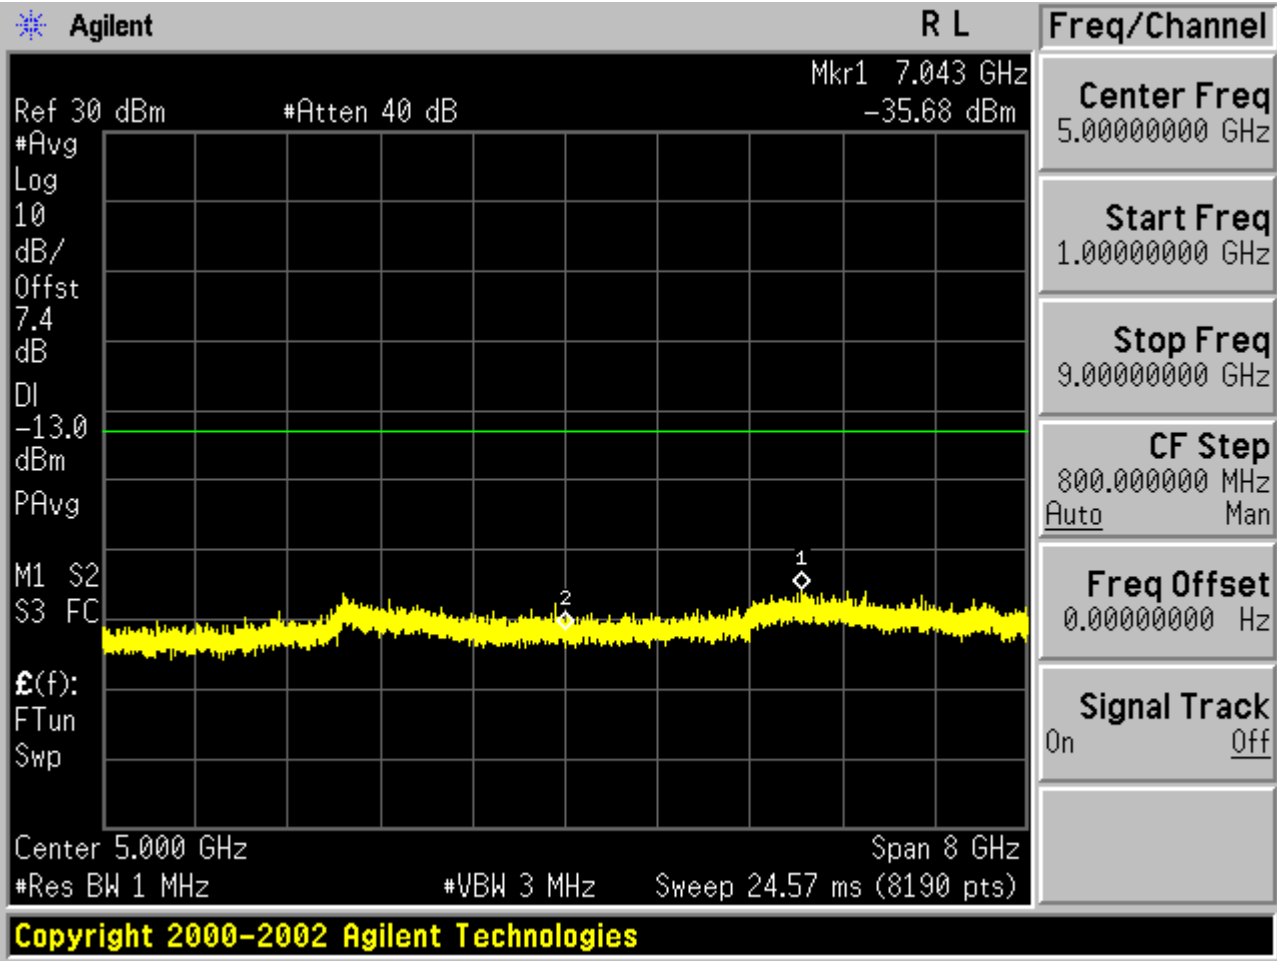


Test Band=WCDMA1900


Test Mode=UMTS/TM1

Test Channel=LCH

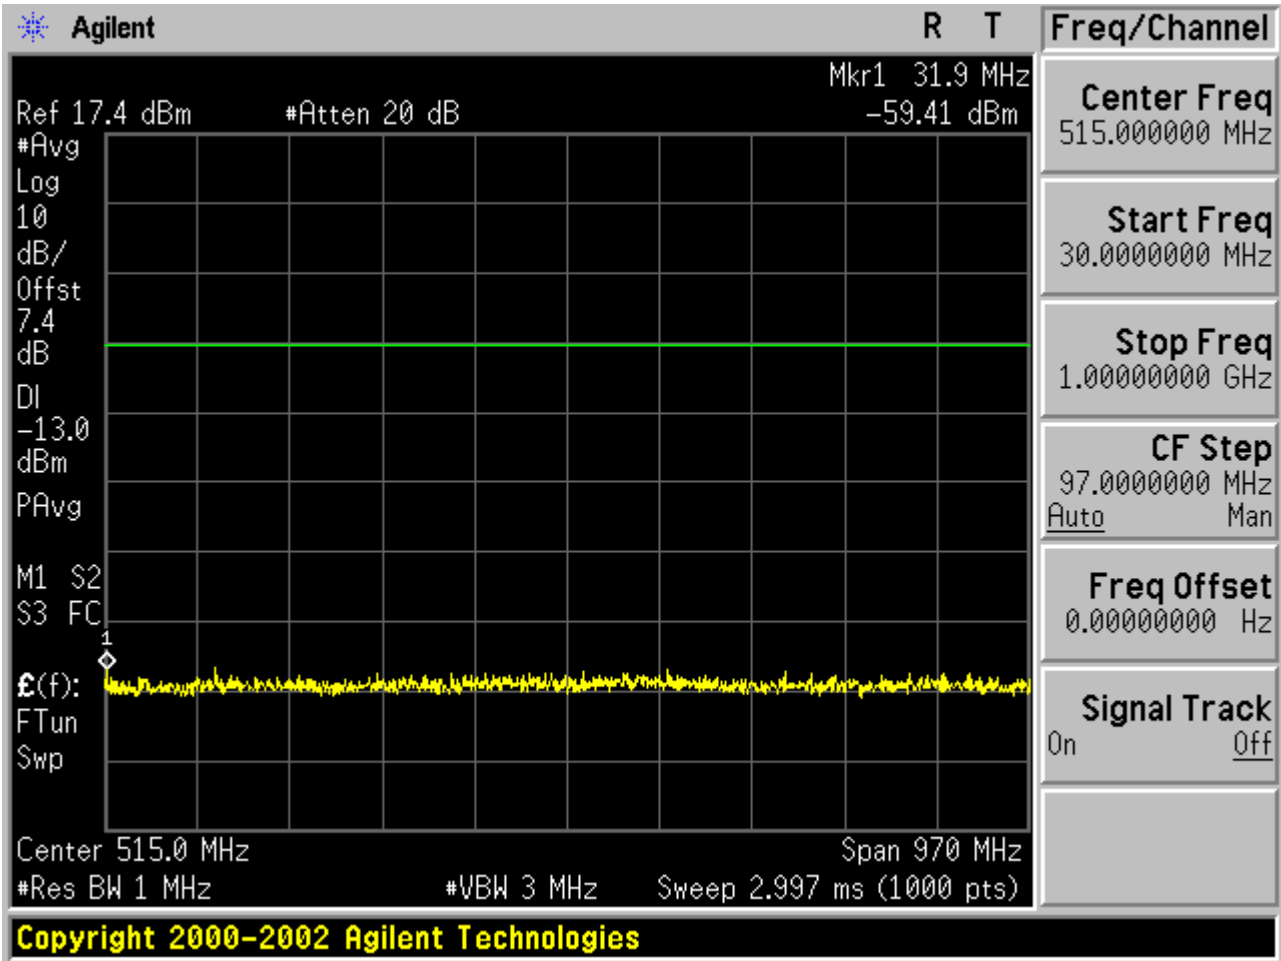


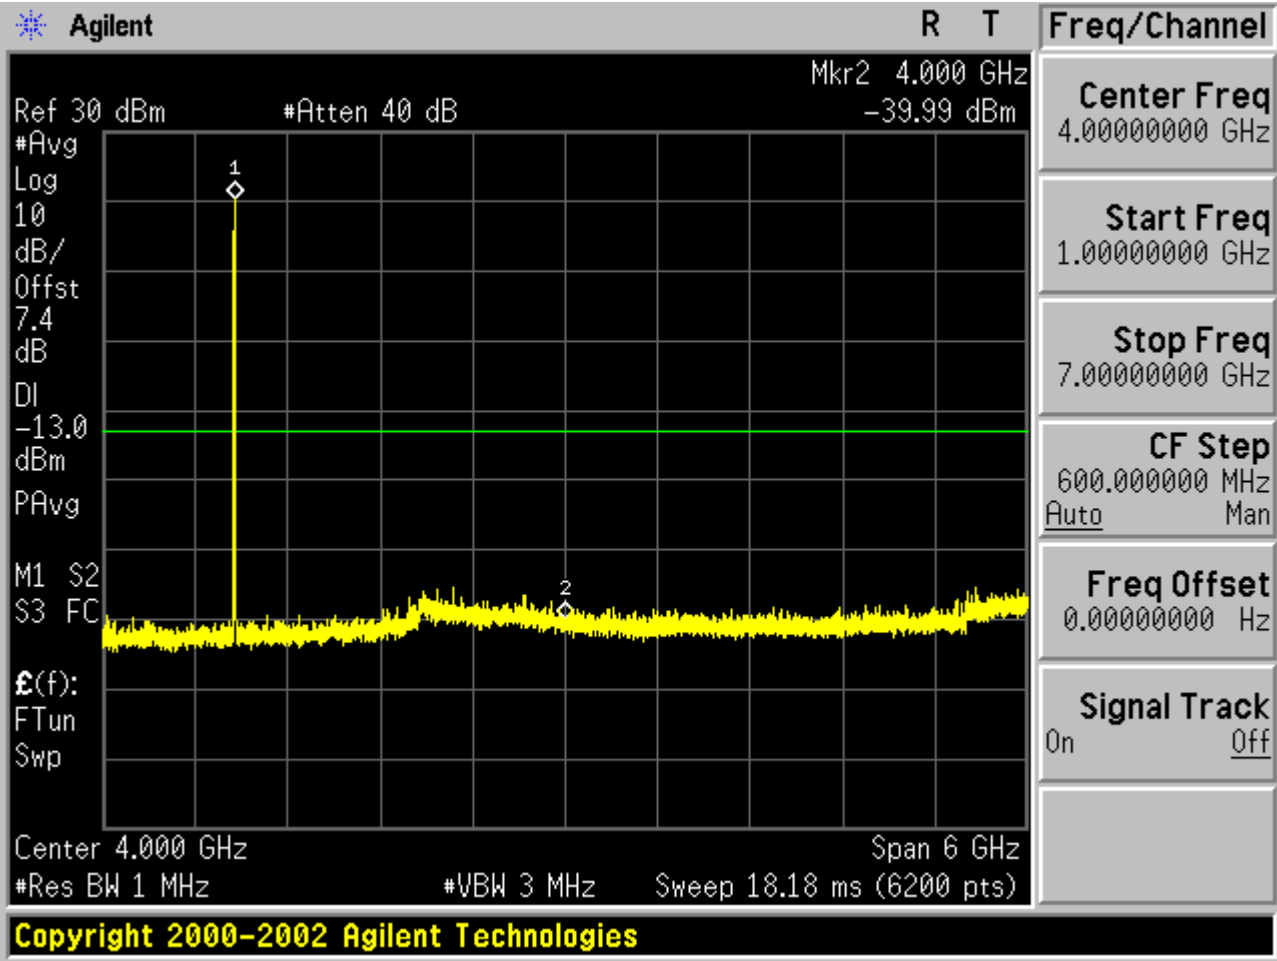




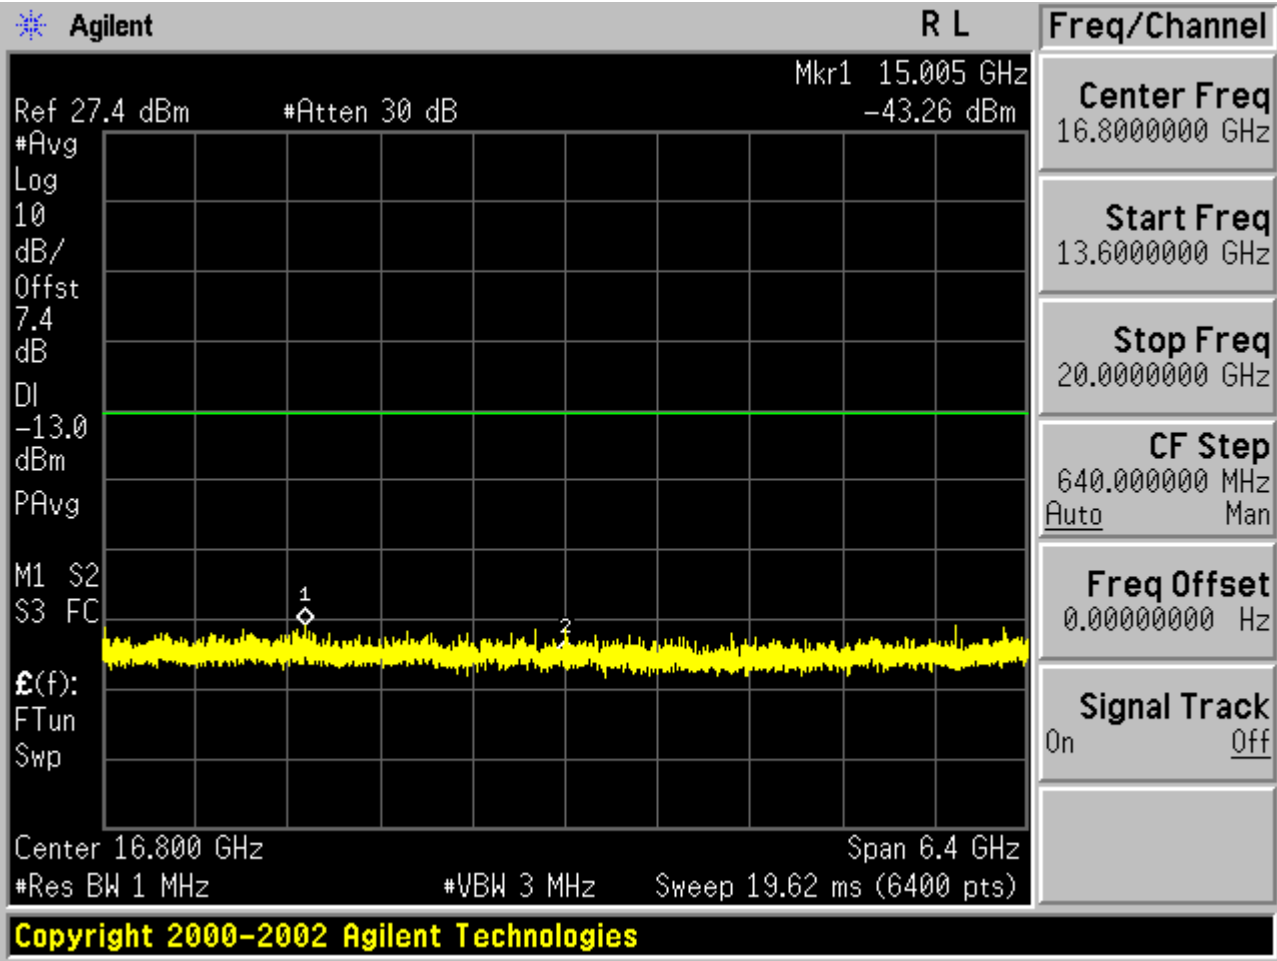


Test Channel=MCH

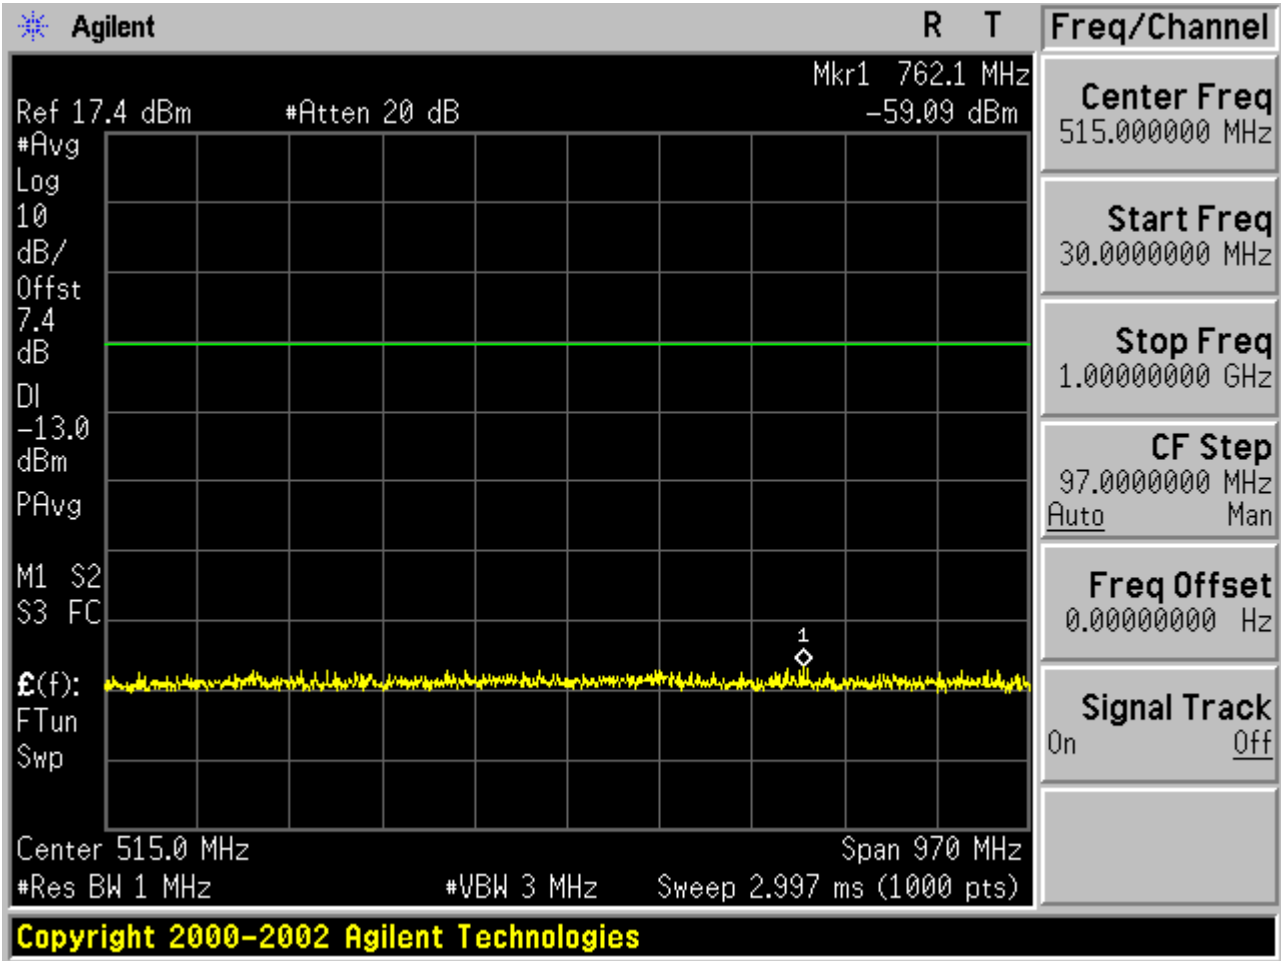


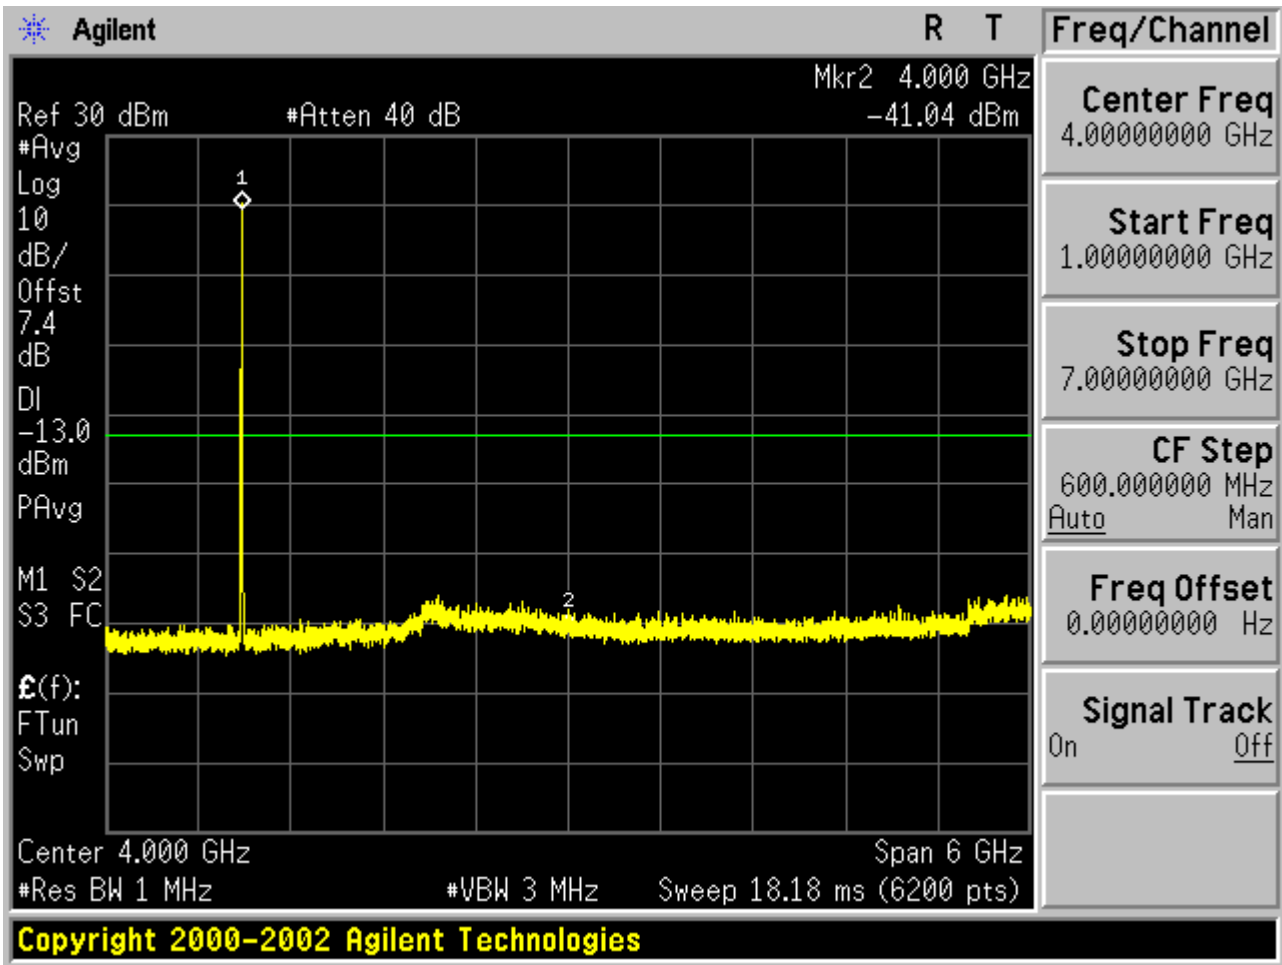




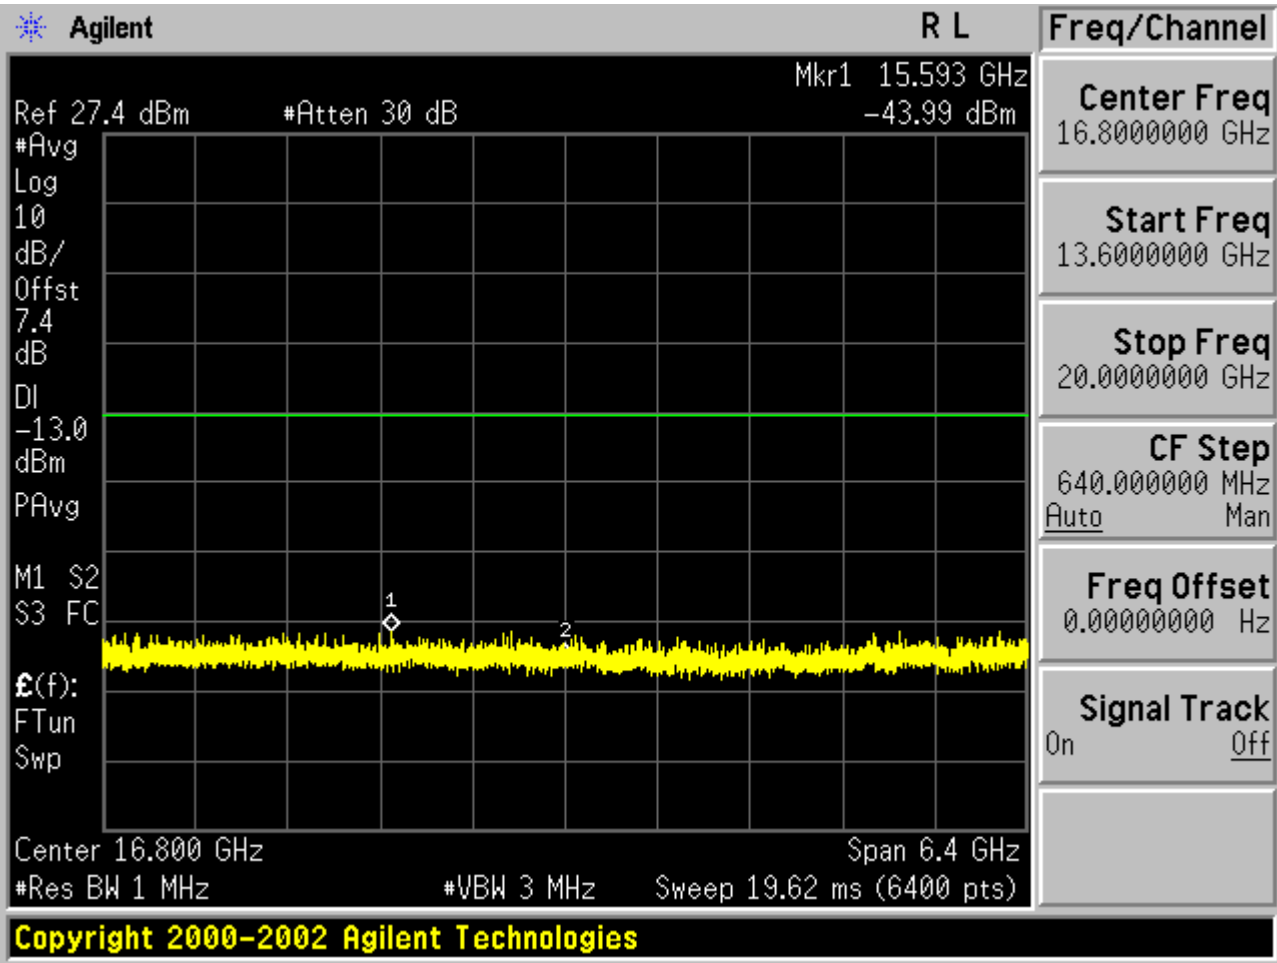


Test Channel=HCH

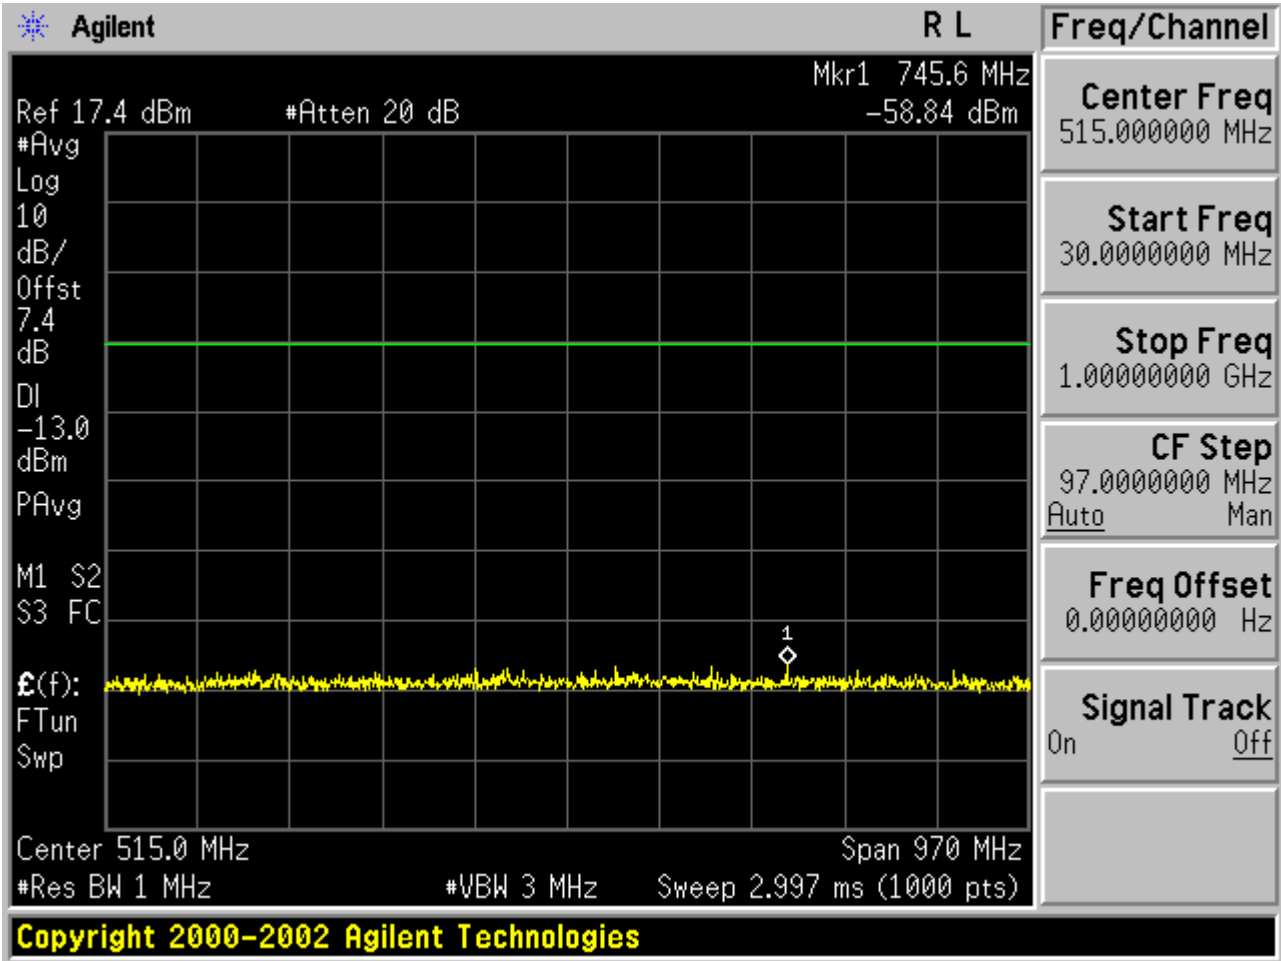



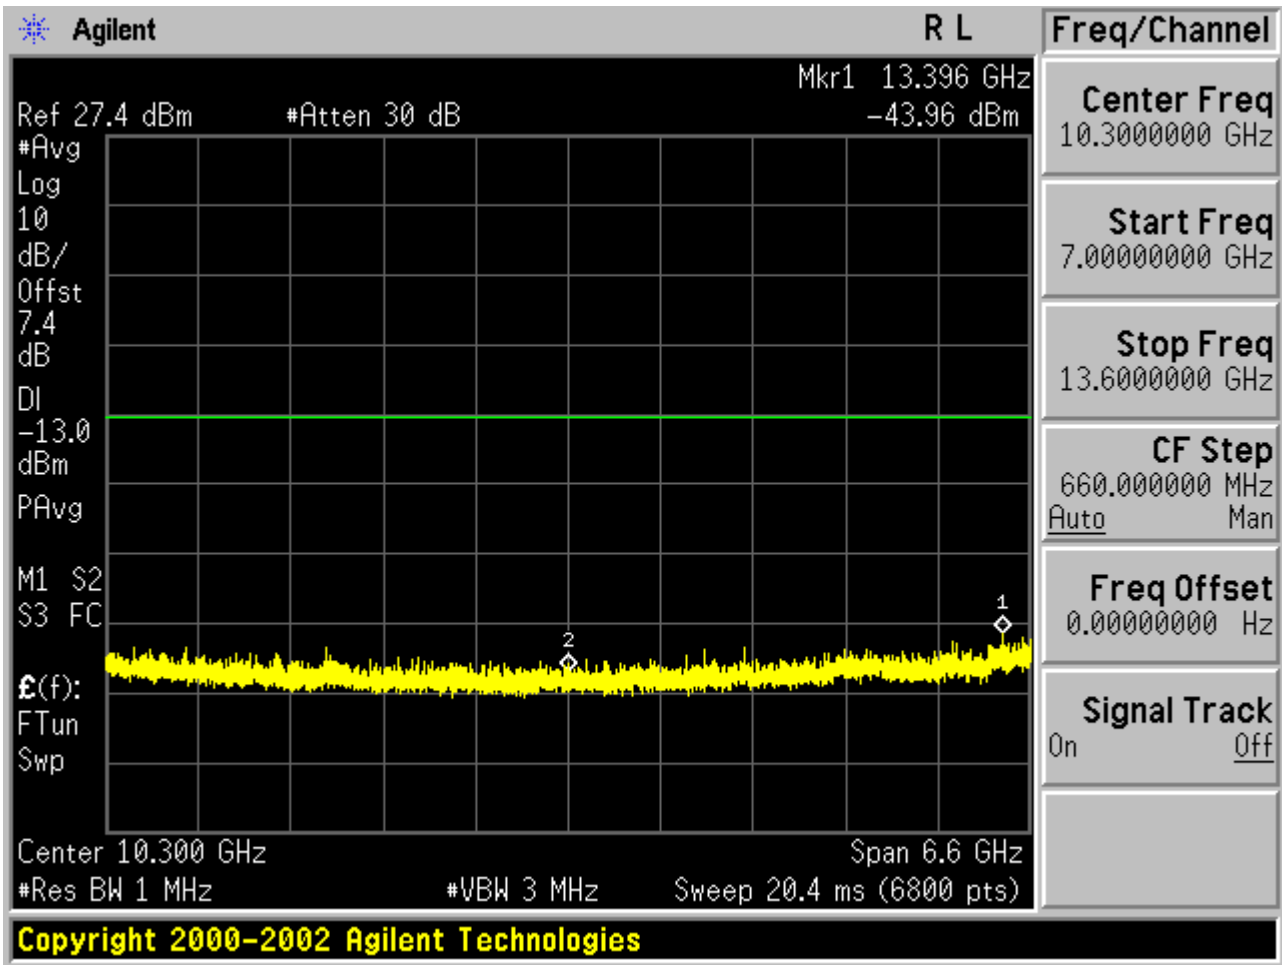

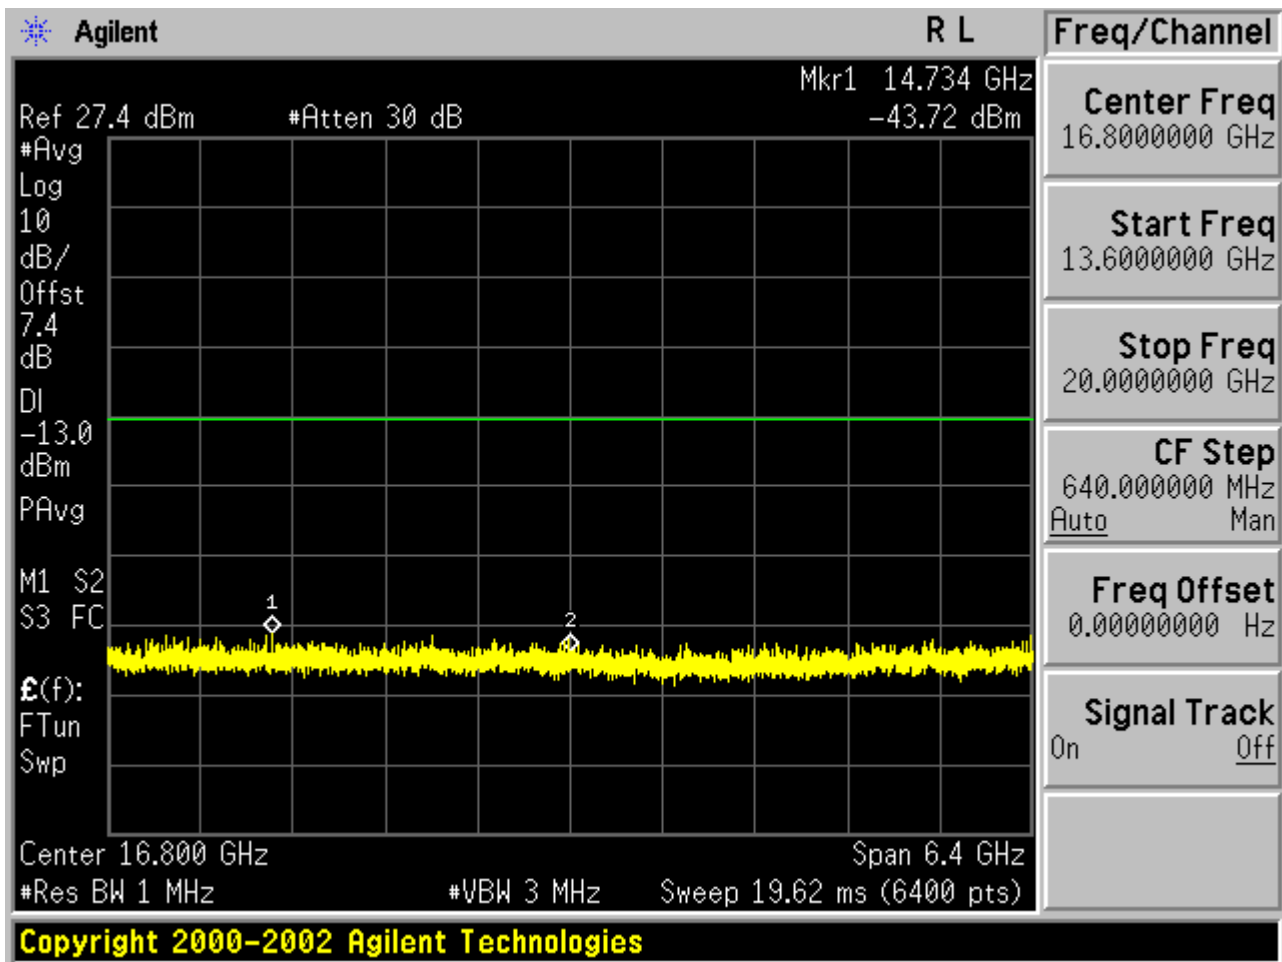

- Note:** 1. Below 30MHz no Spurious found and The GSM modes is the worst condition.
2. As no emission found in standby or receive mode, no recording in this report.


9.2 RADIATED SPURIOUS EMISSION

9.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS/EGPRS 850, GPRS/EGPRS 1900, HSPA band II, HSPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,
 $RSE = R_x (\text{dBuV}) + CL (\text{dB}) + SA (\text{dB}) + \text{Gain} (\text{dBi}) - 107 (\text{dBuV to dBm})$ The SA is calibrated using following setup.

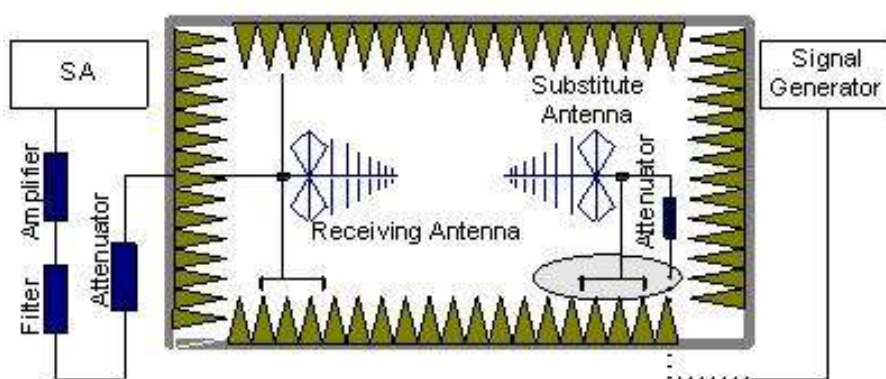

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

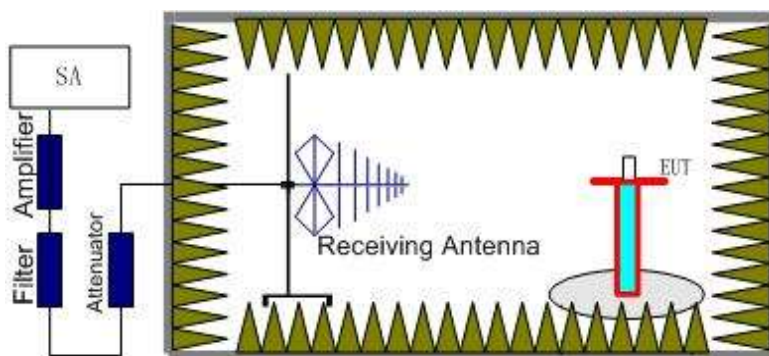

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.6MHz, 1880MHz, 1907.4MHz), UMTS band V(826.6MHz, 836.4MHz, 846.4MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + A_{Rpl}$

9.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P , in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:

9.2.3 MEASUREMENT RESULT

GSM 850:

The Worst Test Results for Channel 251/848.8 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1685.23	-43.49	-5.01	-48.50	-13.00	Horizontal
2456.12	-43.71	-2.18	-45.89	-13.00	Vertical
3645.78	-46.65	3.46	-43.19	-13.00	Vertical
4536.58	-45.79	2.79	-43.00	-13.00	Horizontal

GSM 850(EDGE 8):

The Worst Test Results for Channel 251/848.8 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1696.28	-46.32	-2.26	-48.58	-13.00	Horizontal
2162.19	-47.48	-3.12	-50.60	-13.00	Vertical
3645.78	-48.61	-1.74	-50.35	-13.00	Vertical
9257.65	-45.75	8.46	-37.29	-13.00	Horizontal

PCS 1900:

The Worst Test Results for Channel 810/1909.8MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1429.36	-44.82	-3.22	-48.04	-13.00	Vertical
2563.47	-46.29	-0.24	-46.53	-13.00	Vertical
3645.26	-45.45	3.98	-41.47	-13.00	Horizontal
4563.56	-47.83	11.56	-36.27	-13.00	Vertical
5689.25	-46.67	17.89	-28.78	-13.00	Horizontal

PCS 1900(EDGE 8):

The Worst Test Results for Channel 810/1909.8MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1430.15	-53.86	2.7	-51.16	-13.00	Vertical
9367.91	-53.81	11.6	-42.21	-13.00	Vertical
13356.68	-54.26	14.89	-39.37	-13.00	Horizontal
15249.71	-54.29	13.87	-40.42	-13.00	Vertical
17913.63	-55.33	19.76	-35.57	-13.00	Horizontal

UMTS band II:

The Worst Test Results for Channel 9938/1907.4MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
2000.00	-38.29	-2.25	-40.54	-13.00	Vertical
9548.50	-39.54	-3.03	-42.57	-13.00	Horizontal
13367.40	-42.31	-1.87	-44.18	-13.00	Horizontal
15277.80	-42.76	8.52	-34.24	-13.00	Vertical
17931.60	-44.93	18.7	-26.23	-13.00	Horizontal

UMTS band V:

The Worst Test Results for Channel 4458/846.4MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1598.26	-41.57	-2.26	-43.83	-13.00	Vertical
2365.78	-39.51	-3.12	-42.63	-13.00	Horizontal
4967.65	-42.81	-1.74	-44.55	-13.00	Horizontal
6457.86	-41.84	8.74	-33.1	-13.00	Vertical
7896.56	-42.61	17.89	-24.72	-13.00	Horizontal

Note: ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The "Factor" value can be calculated automatically by software of measurement system.

Below 30MHz no Spurious found and The GSM modes is the worst condition.

10. MAINS CONDUCTED EMISSION

10.1 MEASUREMENT METHOD

The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.


10.2 PROVISIONS APPLICABLE

Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50
*Decreases with the logarithm of the frequency.		
*The lower limit shall apply at the transition frequency.		

Note: The GSM850 mode is the worst condition and the test result as following:

10.3 MEASUREMENT RESULT


LINE CONDUCTED EMISSION – L

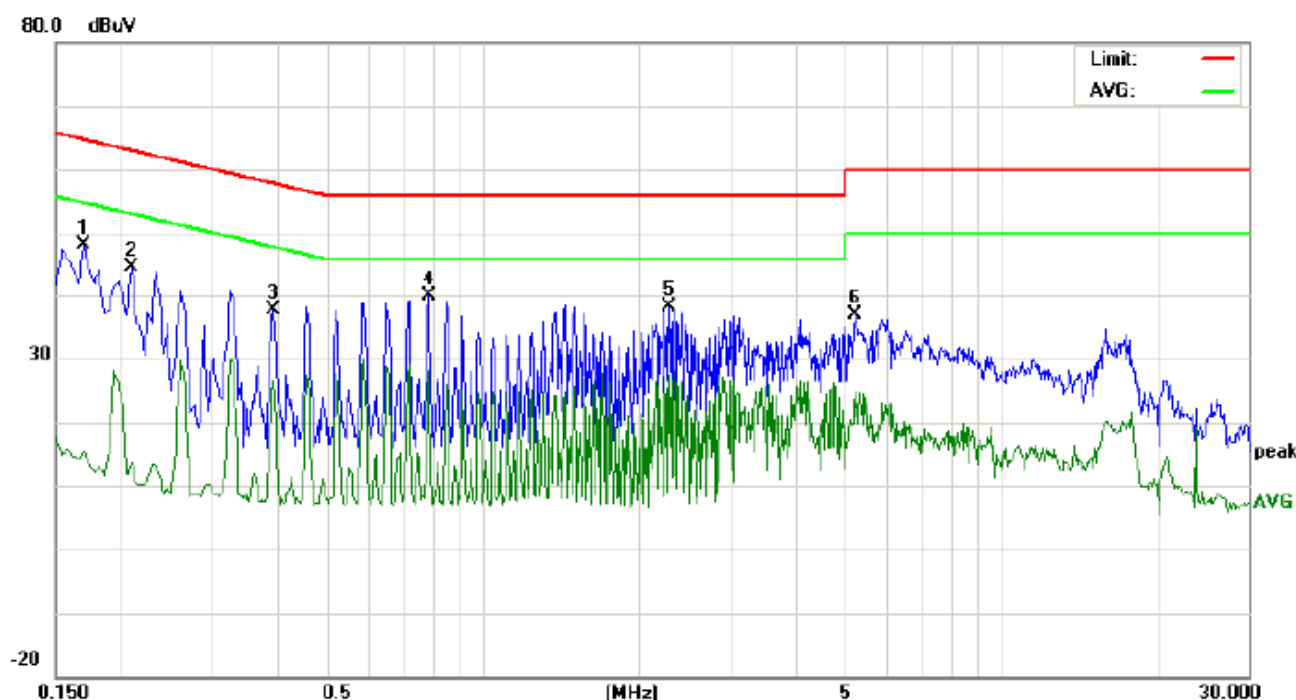

Site: Conduction Phase: **L1** Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %
EUT: Doppio Titan
M/N: DP400
Mode: Call
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	37.94		5.23	10.18	48.12		15.41	64.96	54.96	-16.84	-39.55	P	
2	0.2100	34.36		3.29	10.23	44.59		13.52	63.20	53.20	-18.61	-39.68	P	
3	0.3940	27.26		16.18	10.33	37.59		26.51	57.98	47.98	-20.39	-21.47	P	
4	0.7860	29.48		17.88	10.29	39.77		28.17	56.00	46.00	-16.23	-17.83	P	
5	2.2940	27.82		16.97	10.34	38.16		27.31	56.00	46.00	-17.84	-18.69	P	
6	5.2380	26.60		10.58	10.24	36.84		20.82	60.00	50.00	-23.16	-29.18	P	

LINE CONDUCTED EMISSION – N

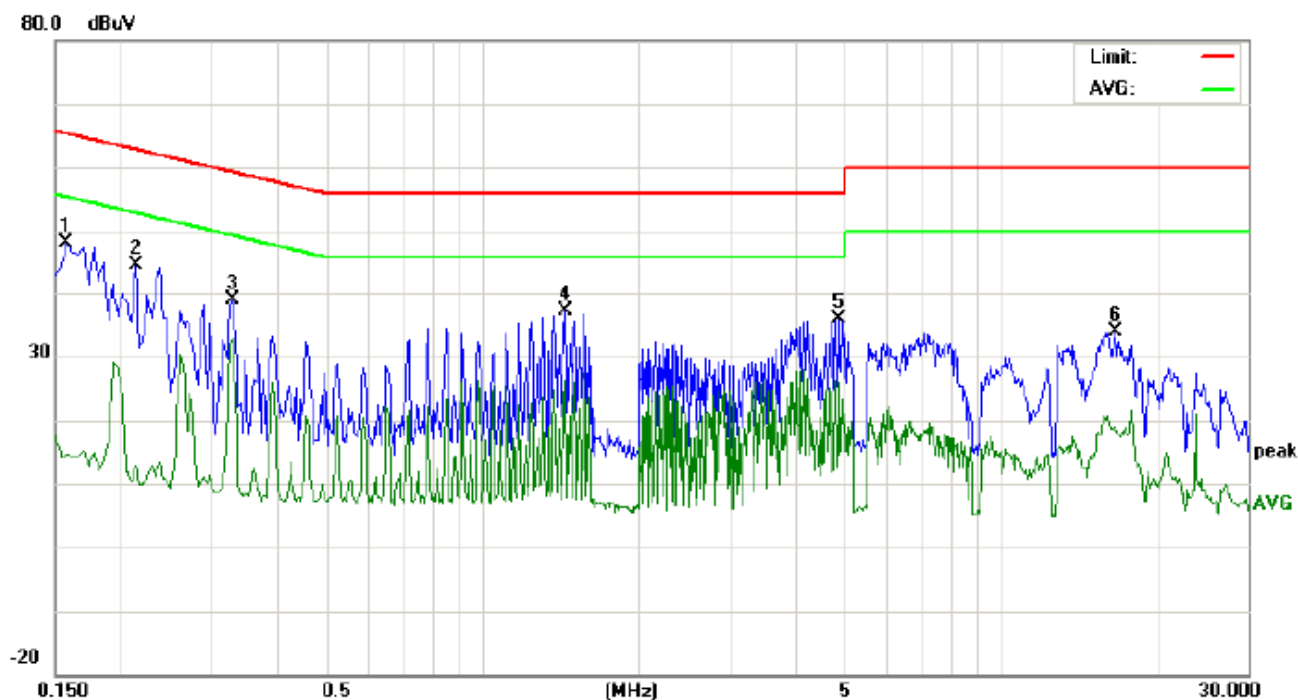

Site: Conduction

Phase: **N**

Temperature: 26

Limit: FCC Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Doppio Titan

M/N: DP400

Mode: Call

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1580	37.98		4.41	10.17	48.15		14.58	65.56	55.56	-17.41	-40.98	P	
2	0.2140	34.52		2.68	10.23	44.75		12.91	63.04	53.04	-18.29	-40.13	P	
3	0.3300	28.58		22.55	10.30	38.88		32.85	59.45	49.45	-20.57	-16.60	P	
4	1.4420	26.66		15.74	10.38	37.04		26.12	56.00	46.00	-18.96	-19.88	P	
5	4.8820	25.67		15.66	10.23	35.90		25.89	56.00	46.00	-20.10	-20.11	P	
6	16.6700	23.86		8.26	10.12	33.98		18.38	60.00	50.00	-26.02	-31.62	P	

Note: The GSM850 mode is the worst condition.

11. FREQUENCY STABILITY

11.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +55°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +55°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10°C increments from +55°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

11.2 PROVISIONS APPLICABLE

11.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 6.3VDC and 8.5VDC, with a nominal voltage of 7.4VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

11.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

11.3 MEASUREMENT RESULT

Appendix E:Frequency Stability

Test Results

Frequency Error vs. Voltage:

Test Band	Test Mode	Test Channel	Test Temp.	Test Voltage	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 850	TM 1	LCH	TN	VL	15.88	0.02	±2.5	PASS
			TN	VN	18.47	0.02	±2.5	PASS
			TN	VH	19.76	0.02	±2.5	PASS
		MCH	TN	VL	17.18	0.02	±2.5	PASS
			TN	VN	20.02	0.02	±2.5	PASS
			TN	VH	19.37	0.02	±2.5	PASS
		HCH	TN	VL	20.66	0.02	±2.5	PASS
			TN	VN	18.85	0.02	±2.5	PASS
			TN	VH	16.59	0.02	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	TM2	LCH	TN	VL	12.59	0.02	±2.5	PASS
			TN	VN	12.98	0.02	±2.5	PASS
			TN	VH	15.88	0.02	±2.5	PASS
		MCH	TN	VL	18.47	0.02	±2.5	PASS
			TN	VN	12.98	0.02	±2.5	PASS
			TN	VH	17.24	0.02	±2.5	PASS
		HCH	TN	VL	19.89	0.02	±2.5	PASS
			TN	VN	19.18	0.02	±2.5	PASS
			TN	VH	17.43	0.02	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	TM3	LCH	TN	VL	21.99	0.03	±2.5	PASS
			TN	VN	21.95	0.03	±2.5	PASS
			TN	VH	20.70	0.03	±2.5	PASS
		MCH	TN	VL	27.02	0.03	±2.5	PASS
			TN	VN	26.28	0.03	±2.5	PASS
			TN	VH	26.54	0.03	±2.5	PASS
		HCH	TN	VL	22.73	0.03	±2.5	PASS
			TN	VN	25.12	0.03	±2.5	PASS
			TN	VH	19.24	0.02	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM1900	TM1	LCH	TN	VL	41.39	0.02	±2.5	PASS
			TN	VN	38.74	0.02	±2.5	PASS
			TN	VH	48.43	0.03	±2.5	PASS
		MCH	TN	VL	43.91	0.02	±2.5	PASS
			TN	VN	47.91	0.03	±2.5	PASS
			TN	VH	39.32	0.02	±2.5	PASS
		HCH	TN	VL	42.55	0.02	±2.5	PASS
			TN	VN	36.94	0.02	±2.5	PASS
			TN	VH	57.08	0.03	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM1900	TM2	LCH	TN	VL	36.87	0.02	±2.5	PASS
			TN	VN	40.23	0.02	±2.5	PASS
			TN	VH	40.23	0.02	±2.5	PASS
		MCH	TN	VL	39.39	0.02	±2.5	PASS
			TN	VN	29.25	0.02	±2.5	PASS
			TN	VH	33.84	0.02	±2.5	PASS
		HCH	TN	VL	32.80	0.02	±2.5	PASS
			TN	VN	46.43	0.02	±2.5	PASS
			TN	VH	40.36	0.02	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM1900	TM3	LCH	TN	VL	33.71	0.02	±2.5	PASS
			TN	VN	38.19	0.02	±2.5	PASS
			TN	VH	38.61	0.02	±2.5	PASS
		MCH	TN	VL	33.58	0.02	±2.5	PASS
			TN	VN	30.54	0.02	±2.5	PASS
			TN	VH	38.45	0.02	±2.5	PASS
		HCH	TN	VL	35.13	0.02	±2.5	PASS
			TN	VN	38.71	0.02	±2.5	PASS
			TN	VH	41.62	0.02	±2.5	PASS

Frequency Error vs. Temperature:

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	TM1	LCH	VN	-30	19.11	0.02	±2.5	PASS
			VN	-20	18.47	0.02	±2.5	PASS
			VN	-10	15.88	0.02	±2.5	PASS
			VN	0	19.31	0.02	±2.5	PASS
			VN	10	15.37	0.02	±2.5	PASS
			VN	20	19.63	0.02	±2.5	PASS
			VN	30	19.57	0.02	±2.5	PASS
			VN	40	17.95	0.02	±2.5	PASS
			VN	50	15.69	0.02	±2.5	PASS
GSM850	TM1	MCH	VN	-30	15.05	0.02	±2.5	PASS
			VN	-20	17.82	0.02	±2.5	PASS
			VN	-10	17.11	0.02	±2.5	PASS
			VN	0	18.73	0.02	±2.5	PASS
			VN	10	16.40	0.02	±2.5	PASS
			VN	20	14.72	0.02	±2.5	PASS
			VN	30	15.30	0.02	±2.5	PASS
			VN	40	18.60	0.02	±2.5	PASS
			VN	50	16.98	0.02	±2.5	PASS
GSM850	TM1	HCH	VN	-30	25.18	0.03	±2.5	PASS
			VN	-20	15.17	0.02	±2.5	PASS
			VN	-10	19.31	0.02	±2.5	PASS
			VN	0	14.72	0.02	±2.5	PASS
			VN	10	18.47	0.02	±2.5	PASS
			VN	20	21.76	0.03	±2.5	PASS
			VN	30	20.21	0.02	±2.5	PASS
			VN	40	21.95	0.03	±2.5	PASS
			VN	50	19.76	0.02	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	TM2	LCH	VN	-30	18.21	0.02	±2.5	PASS
			VN	-20	8.59	0.01	±2.5	PASS
			VN	-10	8.72	0.01	±2.5	PASS
			VN	0	9.23	0.01	±2.5	PASS
			VN	10	9.81	0.01	±2.5	PASS
			VN	20	22.28	0.03	±2.5	PASS
			VN	30	12.27	0.01	±2.5	PASS
			VN	40	8.52	0.01	±2.5	PASS
			VN	50	8.85	0.01	±2.5	PASS
GSM850	TM2	MCH	VN	-30	11.75	0.01	±2.5	PASS
			VN	-20	16.14	0.02	±2.5	PASS
			VN	-10	8.39	0.01	±2.5	PASS
			VN	0	6.52	0.01	±2.5	PASS
			VN	10	5.29	0.01	±2.5	PASS
			VN	20	9.04	0.01	±2.5	PASS
			VN	30	23.96	0.03	±2.5	PASS
			VN	40	21.57	0.03	±2.5	PASS
			VN	50	8.39	0.01	±2.5	PASS
GSM850	TM2	HCH	VN	-30	15.43	0.02	±2.5	PASS
			VN	-20	22.41	0.03	±2.5	PASS
			VN	-10	26.54	0.03	±2.5	PASS
			VN	0	6.97	0.01	±2.5	PASS
			VN	10	12.98	0.02	±2.5	PASS
			VN	20	9.36	0.01	±2.5	PASS
			VN	30	11.17	0.01	±2.5	PASS
			VN	40	22.47	0.03	±2.5	PASS
			VN	50	30.28	0.04	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	TM3	LCH	VN	-30	24.76	0.03	±2.5	PASS
			VN	-20	27.28	0.03	±2.5	PASS
			VN	-10	33.13	0.04	±2.5	PASS
			VN	0	29.28	0.04	±2.5	PASS
			VN	10	25.22	0.03	±2.5	PASS
			VN	20	19.57	0.02	±2.5	PASS
			VN	30	10.75	0.01	±2.5	PASS
			VN	40	14.24	0.02	±2.5	PASS
			VN	50	14.30	0.02	±2.5	PASS
GSM850	TM3	MCH	VN	-30	24.54	0.03	±2.5	PASS
			VN	-20	22.63	0.03	±2.5	PASS
			VN	-10	17.98	0.02	±2.5	PASS
			VN	0	16.47	0.02	±2.5	PASS
			VN	10	18.89	0.02	±2.5	PASS
			VN	20	12.49	0.01	±2.5	PASS
			VN	30	15.66	0.02	±2.5	PASS
			VN	40	11.66	0.01	±2.5	PASS
			VN	50	15.56	0.02	±2.5	PASS
GSM850	TM3	HCH	VN	-30	18.85	0.02	±2.5	PASS
			VN	-20	23.08	0.03	±2.5	PASS
			VN	-10	15.95	0.02	±2.5	PASS
			VN	0	12.43	0.01	±2.5	PASS
			VN	10	15.56	0.02	±2.5	PASS
			VN	20	16.69	0.02	±2.5	PASS
			VN	30	12.11	0.01	±2.5	PASS
			VN	40	28.22	0.03	±2.5	PASS
			VN	50	36.03	0.04	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	TM1	LCH	VN	-30	43.78	0.02	±2.5	PASS
			VN	-20	57.99	0.03	±2.5	PASS
			VN	-10	40.62	0.02	±2.5	PASS
			VN	0	44.43	0.02	±2.5	PASS
			VN	10	42.55	0.02	±2.5	PASS
			VN	20	37.77	0.02	±2.5	PASS
			VN	30	46.69	0.03	±2.5	PASS
			VN	40	42.04	0.02	±2.5	PASS
			VN	50	41.26	0.02	±2.5	PASS
GSM 1900	TM1	MCH	VN	-30	44.30	0.02	±2.5	PASS
			VN	-20	40.03	0.02	±2.5	PASS
			VN	-10	46.69	0.02	±2.5	PASS
			VN	0	45.98	0.02	±2.5	PASS
			VN	10	44.68	0.02	±2.5	PASS
			VN	20	34.80	0.02	±2.5	PASS
			VN	30	39.97	0.02	±2.5	PASS
			VN	40	51.33	0.03	±2.5	PASS
			VN	50	36.61	0.02	±2.5	PASS
GSM 1900	TM1	HCH	VN	-30	53.40	0.03	±2.5	PASS
			VN	-20	44.49	0.02	±2.5	PASS
			VN	-10	44.43	0.02	±2.5	PASS
			VN	0	40.23	0.02	±2.5	PASS
			VN	10	53.14	0.03	±2.5	PASS
			VN	20	48.56	0.03	±2.5	PASS
			VN	30	45.52	0.02	±2.5	PASS
			VN	40	47.01	0.02	±2.5	PASS
			VN	50	37.84	0.02	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	TM2	LCH	VN	-30	29.96	0.02	±2.5	PASS
			VN	-20	44.75	0.02	±2.5	PASS
			VN	-10	51.40	0.03	±2.5	PASS
			VN	0	23.70	0.01	±2.5	PASS
			VN	10	10.59	0.01	±2.5	PASS
			VN	20	18.73	0.01	±2.5	PASS
			VN	30	38.74	0.02	±2.5	PASS
			VN	40	33.64	0.02	±2.5	PASS
			VN	50	64.77	0.04	±2.5	PASS
GSM 1900	TM2	MCH	VN	-30	35.45	0.02	±2.5	PASS
			VN	-20	21.11	0.01	±2.5	PASS
			VN	-10	34.93	0.02	±2.5	PASS
			VN	0	56.11	0.03	±2.5	PASS
			VN	10	20.28	0.01	±2.5	PASS
			VN	20	24.21	0.01	±2.5	PASS
			VN	30	16.79	0.01	±2.5	PASS
			VN	40	24.54	0.01	±2.5	PASS
			VN	50	52.43	0.03	±2.5	PASS
GSM 1900	TM2	HCH	VN	-30	35.84	0.02	±2.5	PASS
			VN	-20	21.18	0.01	±2.5	PASS
			VN	-10	20.99	0.01	±2.5	PASS
			VN	0	54.63	0.03	±2.5	PASS
			VN	10	63.60	0.03	±2.5	PASS
			VN	20	31.19	0.02	±2.5	PASS
			VN	30	21.83	0.01	±2.5	PASS
			VN	40	10.20	0.01	±2.5	PASS
			VN	50	29.70	0.02	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM1900	TM3	LCH	VN	-30	20.47	0.01	±2.5	PASS
			VN	-20	21.89	0.01	±2.5	PASS
			VN	-10	8.39	0.01	±2.5	PASS
			VN	0	25.47	0.01	±2.5	PASS
			VN	10	22.50	0.01	±2.5	PASS
			VN	20	20.82	0.01	±2.5	PASS
			VN	30	23.70	0.01	±2.5	PASS
			VN	40	52.14	0.03	±2.5	PASS
			VN	50	57.82	0.03	±2.5	PASS
GSM1900	TM3	MCH	VN	-30	9.59	0.01	±2.5	PASS
			VN	-20	18.34	0.01	±2.5	PASS
			VN	-10	12.24	0.01	±2.5	PASS
			VN	0	21.15	0.01	±2.5	PASS
			VN	10	34.51	0.02	±2.5	PASS
			VN	20	54.82	0.03	±2.5	PASS
			VN	30	63.15	0.03	±2.5	PASS
			VN	40	63.70	0.03	±2.5	PASS
			VN	50	45.30	0.02	±2.5	PASS
GSM1900	TM3	HCH	VN	-30	21.86	0.01	±2.5	PASS
			VN	-20	13.88	0.01	±2.5	PASS
			VN	-10	51.50	0.03	±2.5	PASS
			VN	0	64.93	0.03	±2.5	PASS
			VN	10	61.89	0.03	±2.5	PASS
			VN	20	53.40	0.03	±2.5	PASS
			VN	30	40.58	0.02	±2.5	PASS
			VN	40	32.58	0.02	±2.5	PASS
			VN	50	19.63	0.01	±2.5	PASS

Frequency Error vs. Voltage:

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 850	TM1	LCH	TN	VL	13.50	0.02	±2.5	PASS
			TN	VN	12.36	0.01	±2.5	PASS
			TN	VH	21.51	0.03	±2.5	PASS
		MCH	TN	VL	11.44	0.01	±2.5	PASS
			TN	VN	12.36	0.01	±2.5	PASS
			TN	VH	13.28	0.02	±2.5	PASS
		HCH	TN	VL	10.58	0.01	±2.5	PASS
			TN	VN	12.36	0.01	±2.5	PASS
			TN	VH	10.20	0.01	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 1900	TM1	LCH	TN	VL	37.54	0.02	±2.5	PASS
			TN	VN	29.53	0.02	±2.5	PASS
			TN	VH	34.10	0.02	±2.5	PASS
		MCH	TN	VL	33.19	0.02	±2.5	PASS
			TN	VN	29.53	0.02	±2.5	PASS
			TN	VH	31.81	0.02	±2.5	PASS
		HCH	TN	VL	33.87	0.02	±2.5	PASS
			TN	VN	29.53	0.02	±2.5	PASS
			TN	VH	37.77	0.02	±2.5	PASS

Frequency Error vs. Temperature:

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 850	TM1	LCH	VN	-30	10.99	0.01	±2.5	PASS
			VN	-20	15.79	0.02	±2.5	PASS
			VN	-10	19.91	0.02	±2.5	PASS
			VN	0	14.65	0.02	±2.5	PASS
			VN	10	18.54	0.02	±2.5	PASS
			VN	20	13.05	0.02	±2.5	PASS
			VN	30	20.14	0.02	±2.5	PASS
			VN	40	14.65	0.02	±2.5	PASS
			VN	50	12.82	0.02	±2.5	PASS
WCDMA 850	TM1	MCH	VN	-30	12.59	0.02	±2.5	PASS
			VN	-20	13.96	0.02	±2.5	PASS
			VN	-10	12.36	0.01	±2.5	PASS
			VN	0	9.38	0.01	±2.5	PASS
			VN	10	13.28	0.02	±2.5	PASS
			VN	20	11.90	0.01	±2.5	PASS
			VN	30	18.08	0.02	±2.5	PASS
			VN	40	11.22	0.01	±2.5	PASS
			VN	50	10.99	0.01	±2.5	PASS
WCDMA 850	TM1	HCH	VN	-30	10.91	0.01	±2.5	PASS
			VN	-20	10.84	0.01	±2.5	PASS
			VN	-10	10.79	0.01	±2.5	PASS
			VN	0	10.63	0.01	±2.5	PASS
			VN	10	15.34	0.02	±2.5	PASS
			VN	20	10.47	0.01	±2.5	PASS
			VN	30	10.32	0.01	±2.5	PASS
			VN	40	10.20	0.01	±2.5	PASS
			VN	50	23.57	0.03	±2.5	PASS


Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 1900	TM1	LCH	VN	-30	26.55	0.01	±2.5	PASS
			VN	-20	32.73	0.02	±2.5	PASS
			VN	-10	32.73	0.02	±2.5	PASS
			VN	0	31.81	0.02	±2.5	PASS
			VN	10	25.63	0.01	±2.5	PASS
			VN	20	23.35	0.01	±2.5	PASS
			VN	30	33.87	0.02	±2.5	PASS
			VN	40	26.32	0.01	±2.5	PASS
			VN	50	29.53	0.02	±2.5	PASS
WCDMA 1900	TM1	MCH	VN	-30	28.38	0.02	±2.5	PASS
			VN	-20	36.39	0.02	±2.5	PASS
			VN	-10	43.49	0.02	±2.5	PASS
			VN	0	40.28	0.02	±2.5	PASS
			VN	10	30.67	0.02	±2.5	PASS
			VN	20	29.30	0.02	±2.5	PASS
			VN	30	41.66	0.02	±2.5	PASS
			VN	40	29.98	0.02	±2.5	PASS
			VN	50	32.04	0.02	±2.5	PASS
WCDMA 1900	TM1	HCH	VN	-30	36.39	0.02	±2.5	PASS
			VN	-20	37.31	0.02	±2.5	PASS
			VN	-10	40.28	0.02	±2.5	PASS
			VN	0	34.56	0.02	±2.5	PASS
			VN	10	40.05	0.02	±2.5	PASS
			VN	20	38.45	0.02	±2.5	PASS
			VN	30	38.91	0.02	±2.5	PASS
			VN	40	36.16	0.02	±2.5	PASS
			VN	50	37.08	0.02	±2.5	PASS

PHOTOGRAPHS OF TEST SETUP

CONDUCTED EMISSION



RADIATED SPURIOUS EMISSION

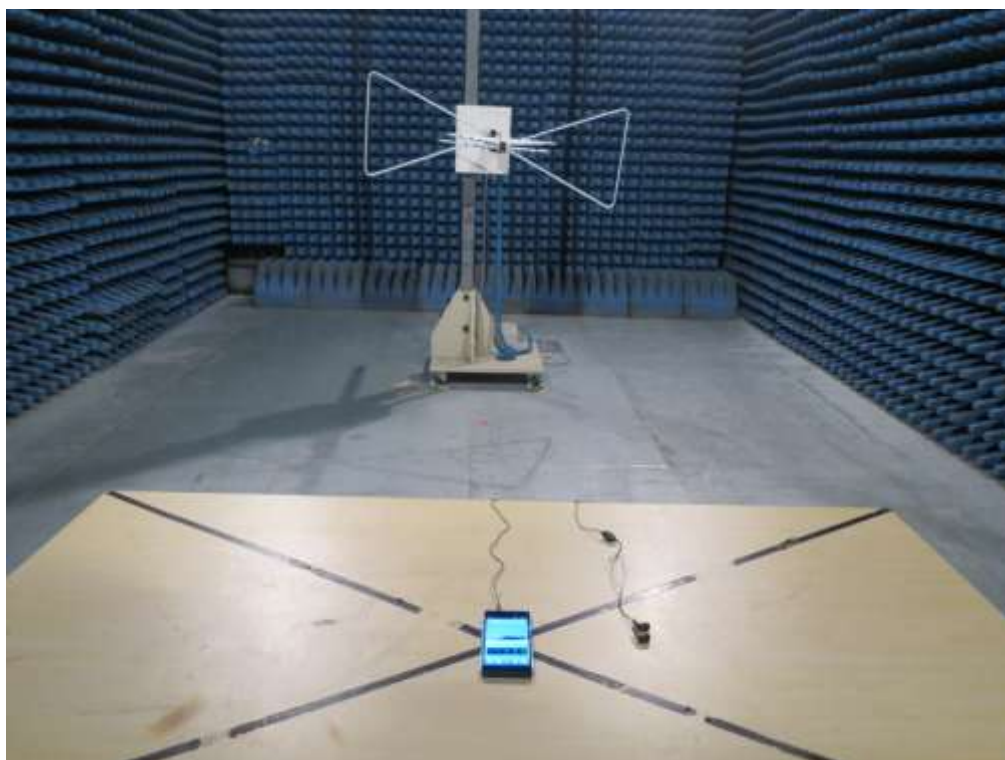




PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT

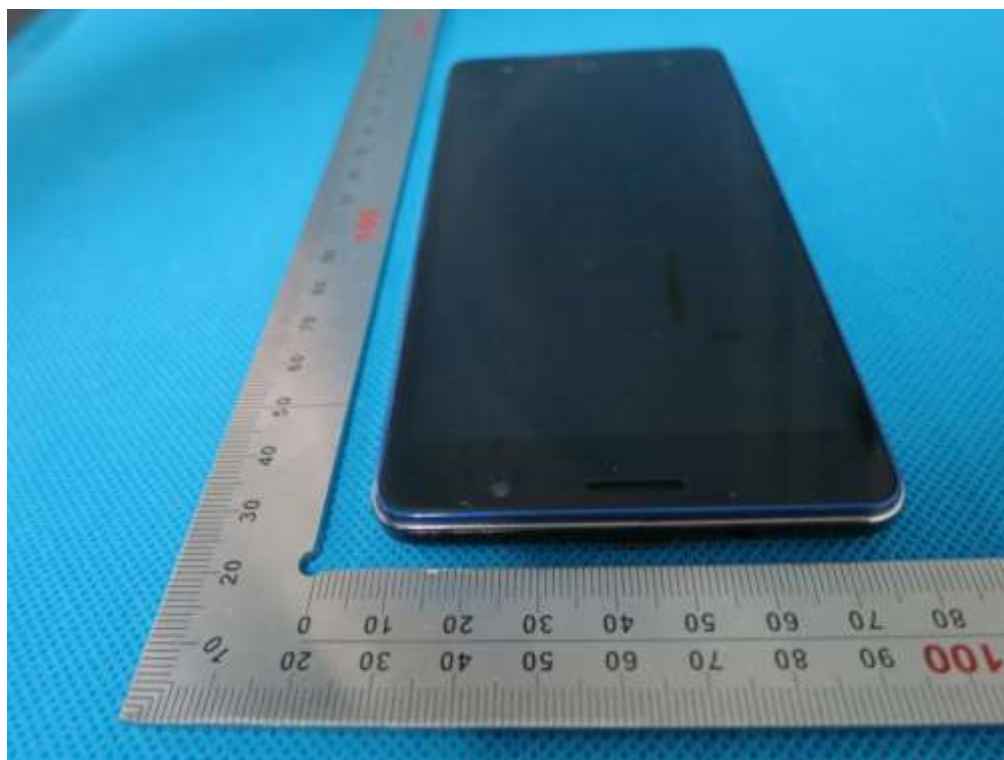

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT

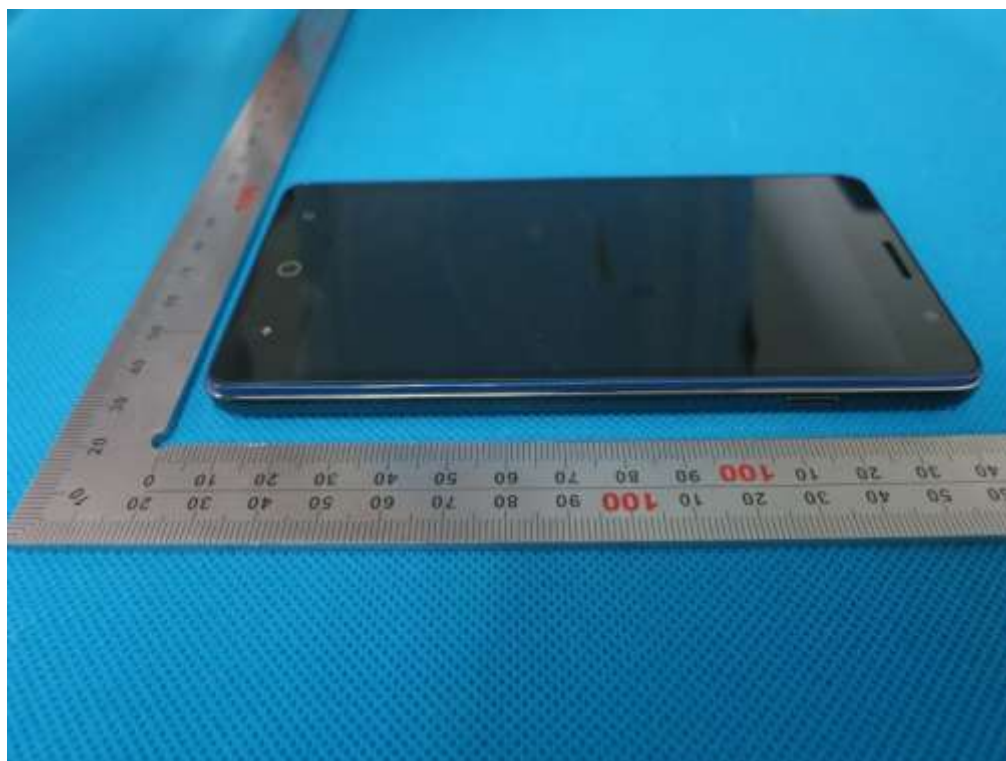

OPEN VIEW OF EUT-1



BT&WIFI&GPS
Antenna


OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3



INTERNAL VIEW OF EUT-1

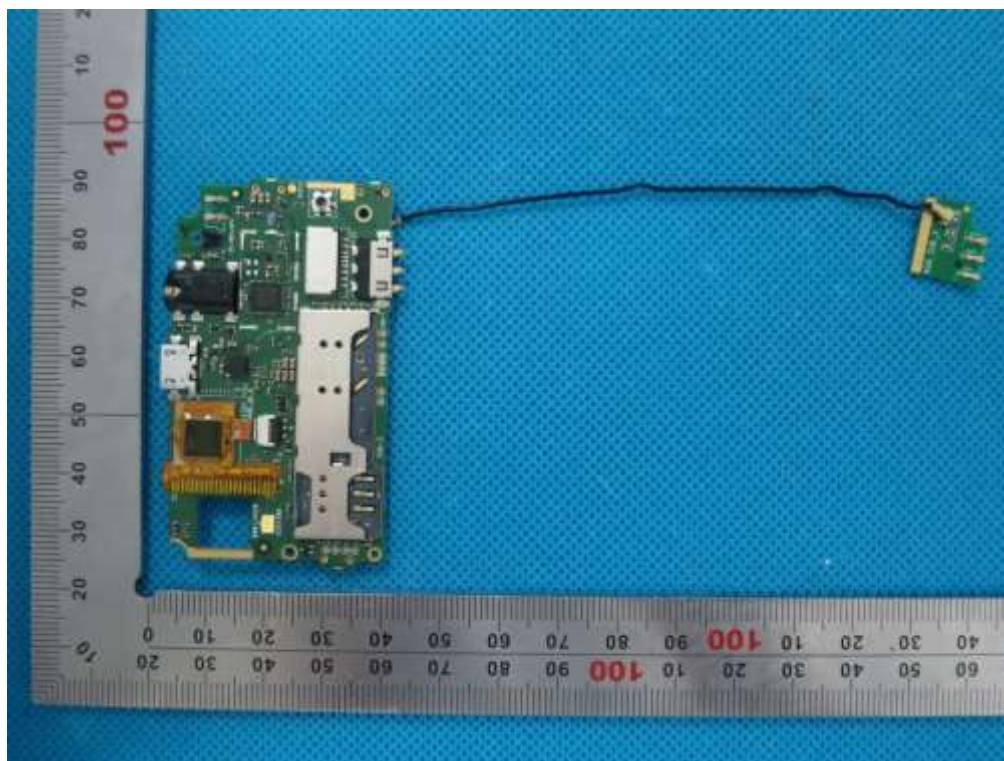

INTERNAL VIEW OF EUT-2

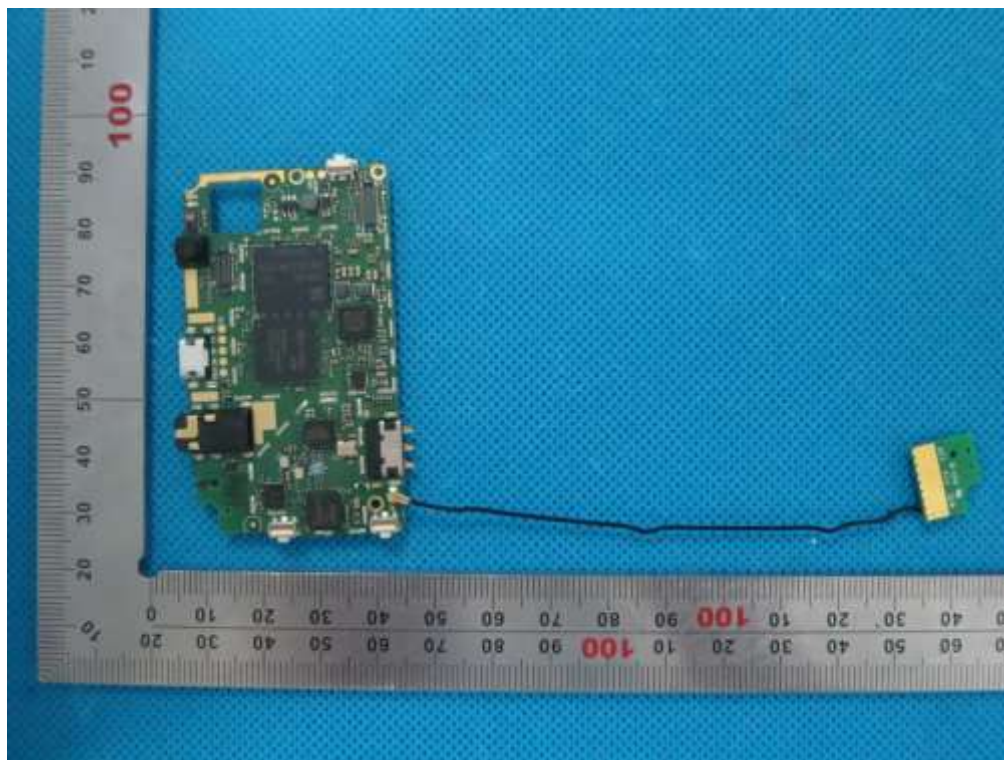

-----END OF REPORT-----