

FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

DOPPIO MOBILE INTERNATIONAL LIMITED

ROOM 1708, 17/F HART AVENUE PLAZA, 5-9 HART AVENUE TSIM SHA TSUI,
KOWLOON, Hong Kong

FCC ID: N2GDPF450

Report Type: Original Report	Product Type: BIOS
Test Engineer:	Allen Qiao
Report Number:	RDG150430002-00C
Report Date:	2015-05-07
Reviewed By:	Sula Huang RF Leader
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
CONFIGURATION OF TEST SETUP	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1310 & §2.1093- RF EXPOSURE	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER.....	10
APPLICABLE STANDARD	10
TEST PROCEDURE	10
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	17
APPLICABLE STANDARD	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	39
FCC §22.917(A) & §24.238(A) - BAND EDGES.....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	42
FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY	54

APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST EQUIPMENT LIST AND DETAILS.....	55
TEST DATA	55

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *DOPPIO MOBILE INTERNATIONAL LIMITED*'s product, model number: *DPF450* (FCC ID: *N2GDPF450*) (the "EUT") in this report was a *BIOS*, which was measured approximately: 12.0 cm (L) x 6.5 cm (W) x 1.05 cm (H), rated input voltage: DC 3.7V rechargeable Li-ion battery or DC5V charging from adapter.

All measurement and test data in this report was gathered from production sample serial number: 150430002 (Assigned by BACL, Dongguan). The EUT was received on 2015-04-30.

Objective

This report is prepared on behalf of *DOPPIO MOBILE INTERNATIONAL LIMITED* in accordance with Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: N2GDPF450
FCC Part 15C DSS submissions with FCC ID: N2GDPF450
FCC Part 15C DTS submissions with FCC ID: N2GDPF450.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D-2010, ANSI C63.4-2009.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D-2010.

The test items were performed with the EUT operating at testing mode.

EUT Exercise Software

N/A


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	109038
N/A	ANTENNA	N/A	N/A

Configuration of Test Setup

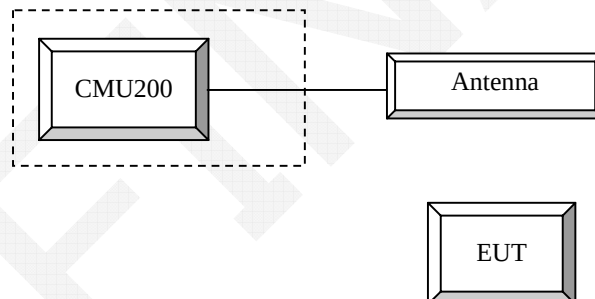

Block Diagram of Test Setup

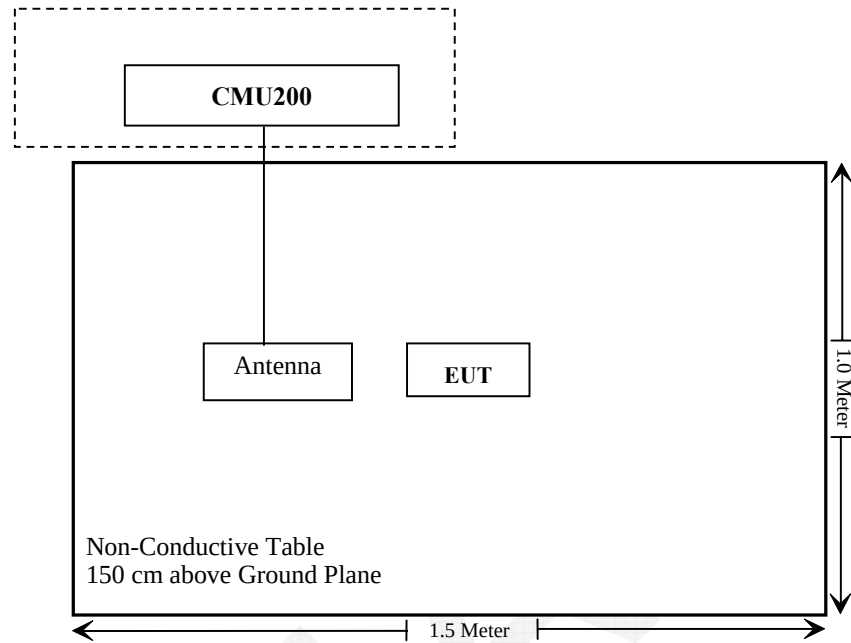

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RDG150430002-20.

FINAL

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FINAL

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER**Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

Test Procedure**GPRS/EGPRS**

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDM A General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β c	11/15	6/15	15/15	2/15	15/15
	β d	15/15	15/15	9/15	15/15	0
	β ec	209/225	12/15	30/15	2/15	5/15
	β c/ β d	11/15	6/15	15/9	2/15	-
	β hs	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	Ahs= β hs/ β c	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI s	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

Radiated method:

ANSI/TIA 603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Giga	Signal Generator	1026	320408	2014-05-09	2015-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.3 °C
Relative Humidity:	63 %
ATM Pressure:	100.4 kPa

The testing was performed by Allen Qiao on 2015-05-03.

Conducted Power**Cellular Band (Part 22H) & PCS Band (Part 24E)**

Band	Channel No.	Peak Output Power (dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	32.70	32.55	31.75	29.96	28.94	25.61	23.87	21.51	20.22
	190	32.60	32.47	31.71	29.91	28.88	25.03	23.58	21.29	20.13
	251	32.60	32.47	31.75	29.94	28.92	24.81	23.42	21.08	20.17
PCS	512	29.70	29.68	28.89	26.97	25.94	23.51	22.31	19.72	18.41
	661	29.50	29.53	28.75	26.89	25.88	23.26	21.98	19.51	18.02
	810	29.50	29.47	28.86	27.07	26.15	22.91	21.52	19.09	17.61

WCDMA Band II

Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99	1	22.47	2.86	22.51	3.48	22.21	3.31
HSDPA	1	21.49	1.94	21.54	2.53	21.23	2.39
	2	21.54	1.89	21.50	2.51	21.21	2.35
	3	21.47	1.96	21.57	2.48	21.27	2.37
	4	21.52	2.01	21.55	2.50	21.24	2.41
HSUPA	1	21.47	1.91	21.53	2.57	21.08	2.34
	2	21.44	1.85	21.52	2.63	21.06	2.36
	3	21.46	1.87	21.57	2.55	21.09	2.30
	4	21.49	1.93	21.50	2.61	21.00	2.29
	5	21.51	1.94	21.56	2.58	21.03	2.37

WCDMA Band V

Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99	1	22.81	2.92	23.02	3.41	22.67	3.26
HSDPA	1	21.77	1.97	21.82	2.46	21.62	2.36
	2	21.76	1.99	21.78	2.43	21.64	2.38
	3	21.74	2.00	21.80	2.40	21.57	2.35
	4	21.78	1.94	21.83	2.47	21.59	2.33
HSUPA	1	21.79	1.92	21.84	2.43	21.66	2.31
	2	21.52	1.93	21.81	2.50	21.70	2.39
	3	21.41	1.88	21.86	2.47	21.64	2.35
	4	21.44	1.89	21.87	2.44	21.69	2.33
	5	21.53	1.87	21.91	2.46	21.63	2.38

ERP & EIRP

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850								
824.200	H	92.09	17.1	0.0	1.0	16.1	38.5	22.4
824.200	V	103.57	31.6	0.0	1.0	30.6	38.5	7.9
836.600	H	93.30	18.4	0.0	1.0	17.4	38.5	21.1
836.600	V	103.85	32.1	0.0	1.0	31.1	38.5	7.4
848.800	H	91.97	17.1	0.0	1.0	16.1	38.5	22.4
848.800	V	103.93	32.3	0.0	1.0	31.3	38.5	7.2
EDGE 850								
824.200	H	89.15	14.1	0.0	1.0	13.1	38.5	25.4
824.200	V	98.83	26.9	0.0	1.0	25.9	38.5	12.6
836.600	H	89.29	14.4	0.0	1.0	13.4	38.5	25.1
836.600	V	99.13	27.3	0.0	1.0	26.3	38.5	12.2
848.800	H	89.16	14.3	0.0	1.0	13.3	38.5	25.2
848.800	V	98.63	27	0.0	1.0	26.0	38.5	12.5
WCDMA Band V								
826.400	H	83.82	8.8	0.0	1.0	7.8	38.5	30.7
826.400	V	94.34	22.4	0.0	1.0	21.4	38.5	17.1
836.600	H	83.19	8.3	0.0	1.0	7.3	38.5	31.2
836.600	V	94.31	22.5	0.0	1.0	21.5	38.5	17.0
846.600	H	84.10	9.3	0.0	1.0	8.3	38.5	30.2
846.600	V	94.65	23	0.0	1.0	22.0	38.5	16.5
PCS 1900								
1850.200	H	89.32	17.5	11.4	1.4	27.5	33.0	5.5
1850.200	V	91.04	19.1	11.4	1.4	29.1	33.0	3.9*
1880.000	H	88.34	16.7	11.7	1.4	27.0	33.0	6.0
1880.000	V	89.36	17.9	11.7	1.4	28.2	33.0	4.8
1909.800	H	86.75	15.4	11.8	1.4	25.8	33.0	7.2
1909.800	V	87.93	16.9	11.8	1.4	27.3	33.0	5.7
EDGE 1900								
1850.200	H	86.51	14.7	11.4	1.4	24.7	33.0	8.3
1850.200	V	88.24	16.3	11.4	1.4	26.3	33.0	6.7
1880.000	H	84.72	13.1	11.7	1.4	23.4	33.0	9.6
1880.000	V	86.55	15.1	11.7	1.4	25.4	33.0	7.6
1909.800	H	83.67	12.3	11.8	1.4	22.7	33.0	10.3
1909.800	V	85.13	14.1	11.8	1.4	24.5	33.0	8.5
WCDMA Band II								
1852.400	H	81.27	9.4	11.5	1.4	19.5	33.0	13.5
1852.400	V	82.45	10.6	11.5	1.4	20.7	33.0	12.3
1880.000	H	80.12	8.5	11.7	1.4	18.8	33.0	14.2
1880.000	V	82.28	10.8	11.7	1.4	21.1	33.0	11.9
1907.600	H	80.55	9.2	11.8	1.4	19.6	33.0	13.4
1907.600	V	81.93	10.9	11.8	1.4	21.3	33.0	11.7

*Within measurement uncertainty!

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH


Applicable Standard

FCC §2.1049, §22.917, §22.905 and §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

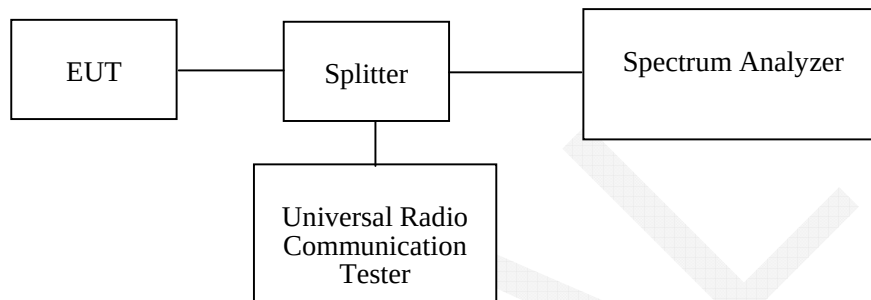

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.7-25.3 °C
Relative Humidity:	57-56 %
ATM Pressure:	100.4-100.5kPa


The testing was performed by Allen Qiao on 2015-05-03 and 2015-05-07.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots.

Band	Channel No.	Mode	99% Occupied Bandwidth (kHz)	26 dB Occupied Bandwidth (kHz)
Cellular	190	GSM	244	314
	190	EDGE	242	312
PCS	661	PCS	246	314
	661	EDGE	250	314
WCDMA Band II	9400	Rel 99	4160	4700
	9400	HSDPA	4180	4720
	9400	HSUPA	4180	4720
WCDMA Band V	4183	Rel 99	4180	4740
	4183	HSDPA	4180	4700
	4183	HSUPA	4180	4700


GMSK 850 Cellular Band

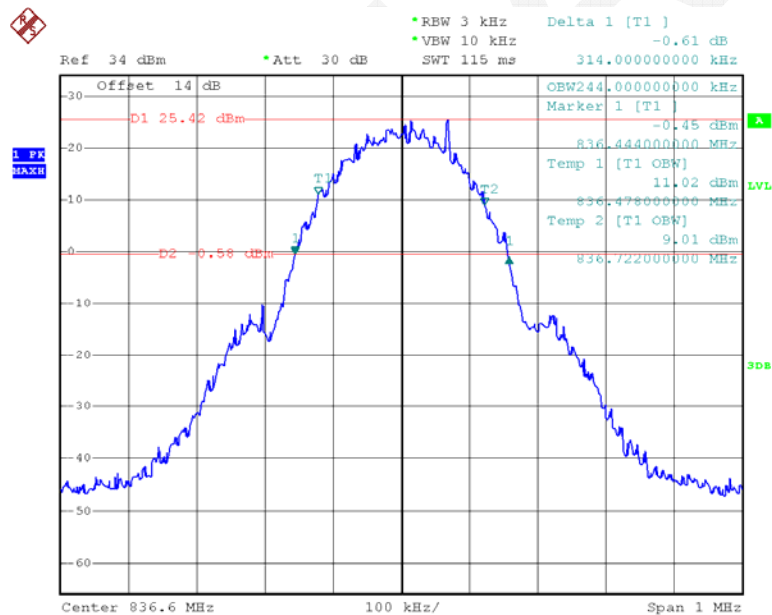

Date: 3.MAY.2015 15:12:00

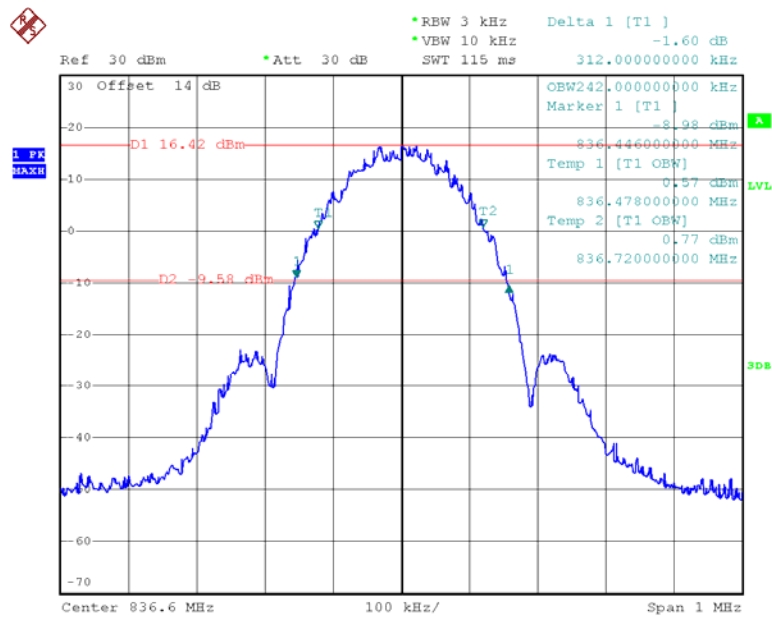
EDGE 850

Date: 7.MAY.2015 15:38:31

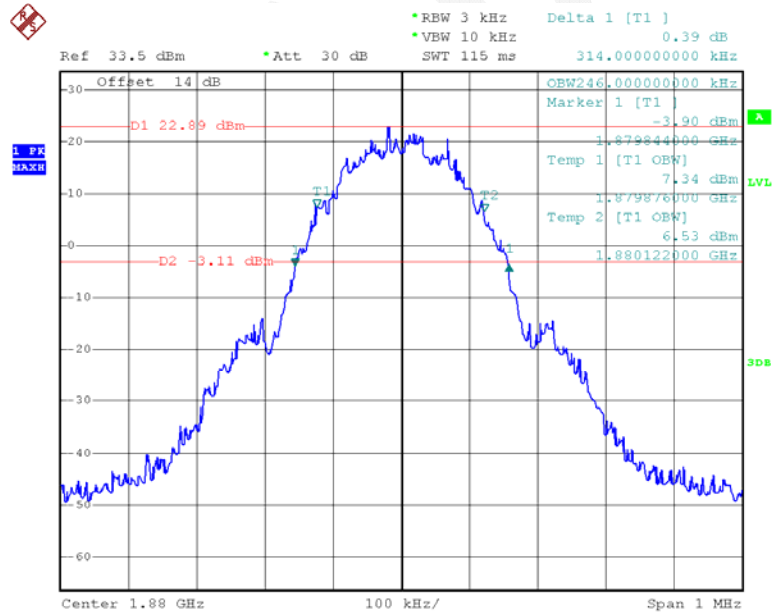GMSK PCS Band


Date: 3.MAY.2015 15:01:05

EDGE 1900

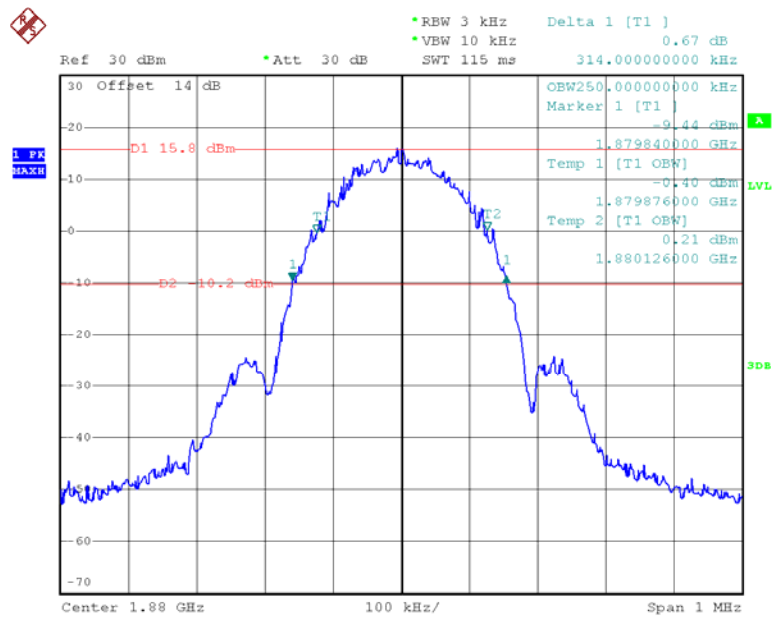


Date: 7.MAY.2015 15:45:55


REL99 Band II

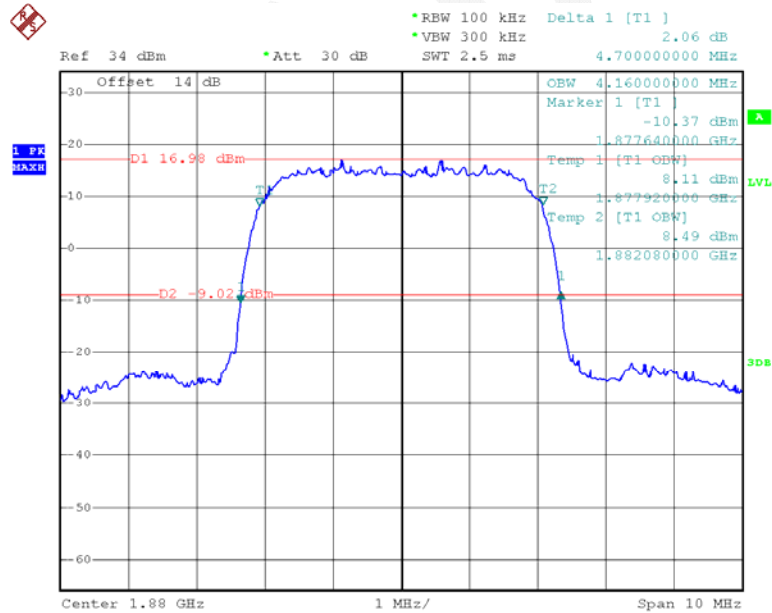

Date: 3.MAY.2015 15:16:04

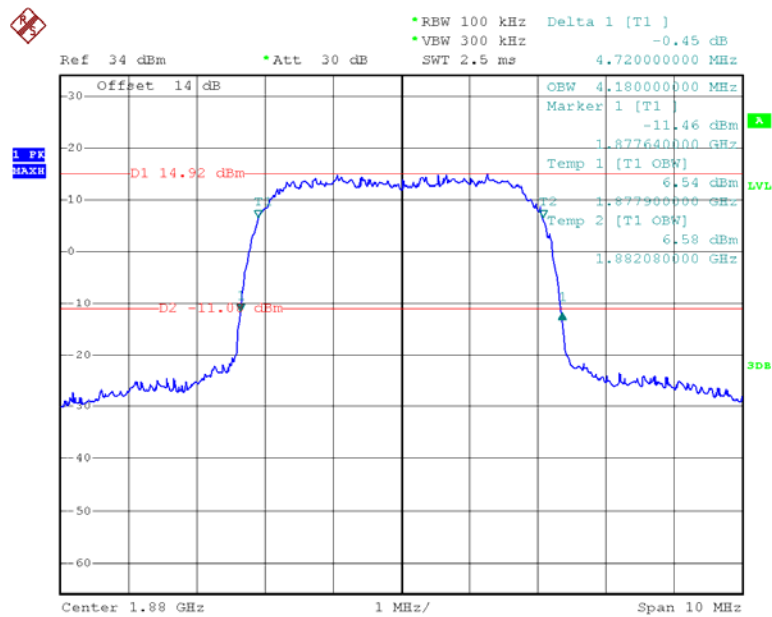
Band II_HSDPA

Date: 3.MAY.2015 15:17:38

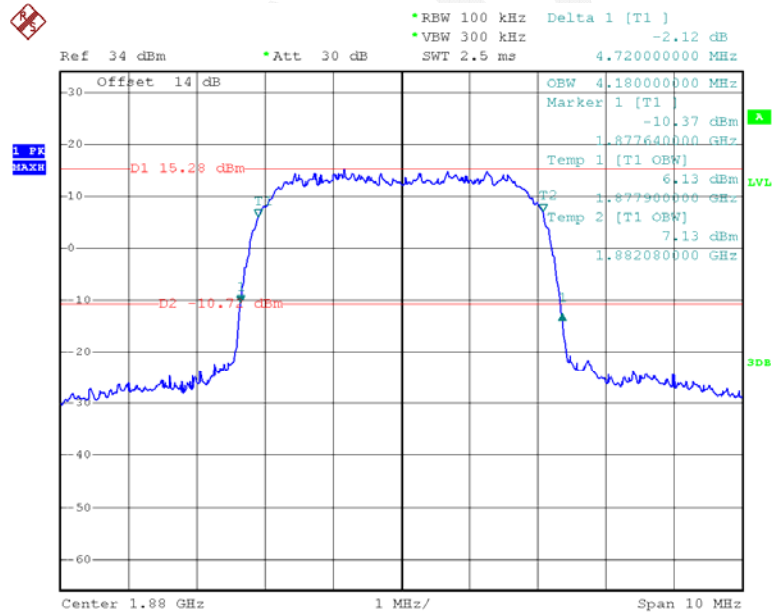Band II_HSUPA


Date: 3.MAY.2015 15:18:53

REL99 Band V

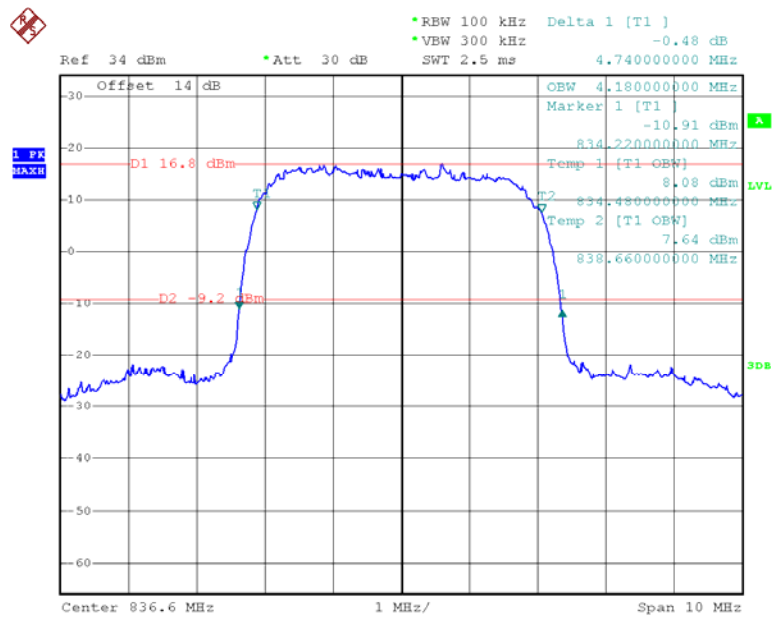


Date: 3.MAY.2015 15:23:16

Band V_HSDPA

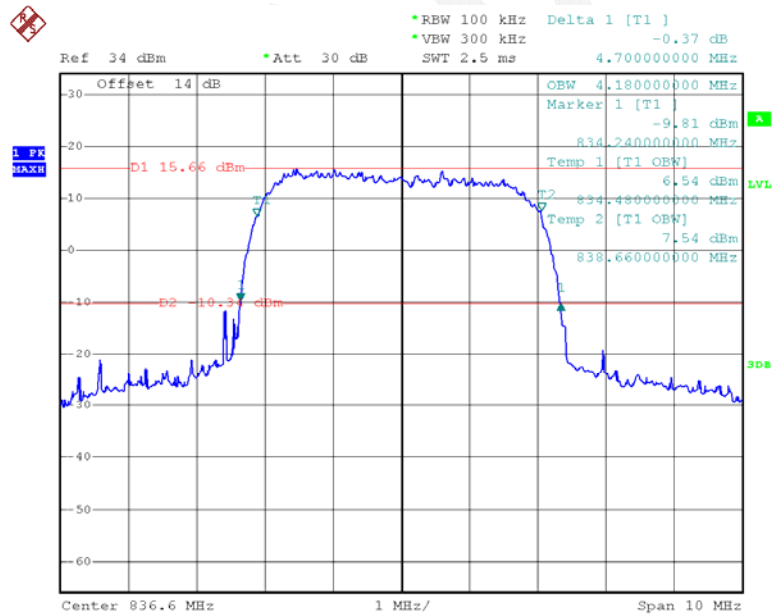

Date: 3.MAY.2015 15:21:58

Band V_HSUPA

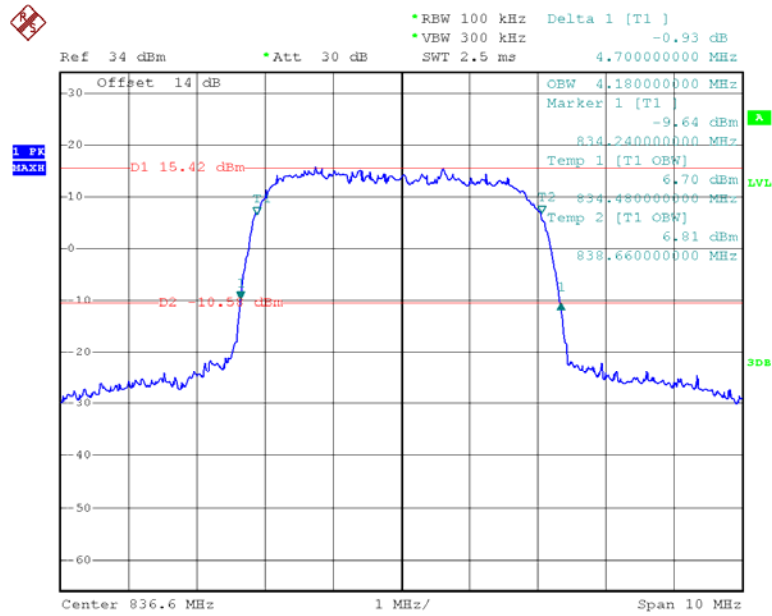

Date: 3.MAY.2015 15:20:08

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

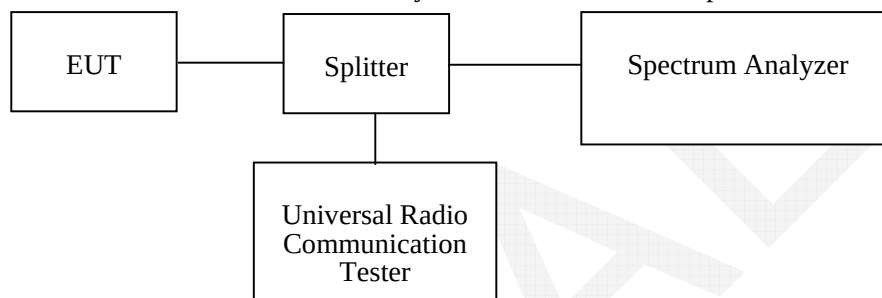

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	27.7-25.3 °C
Relative Humidity:	57-56 %
ATM Pressure:	100.4-100.5kPa


The testing was performed by Allen Qiao on 2015-05-03 and 2015-05-07.

Please refer to the following plots.

GSM850_Middle Channel

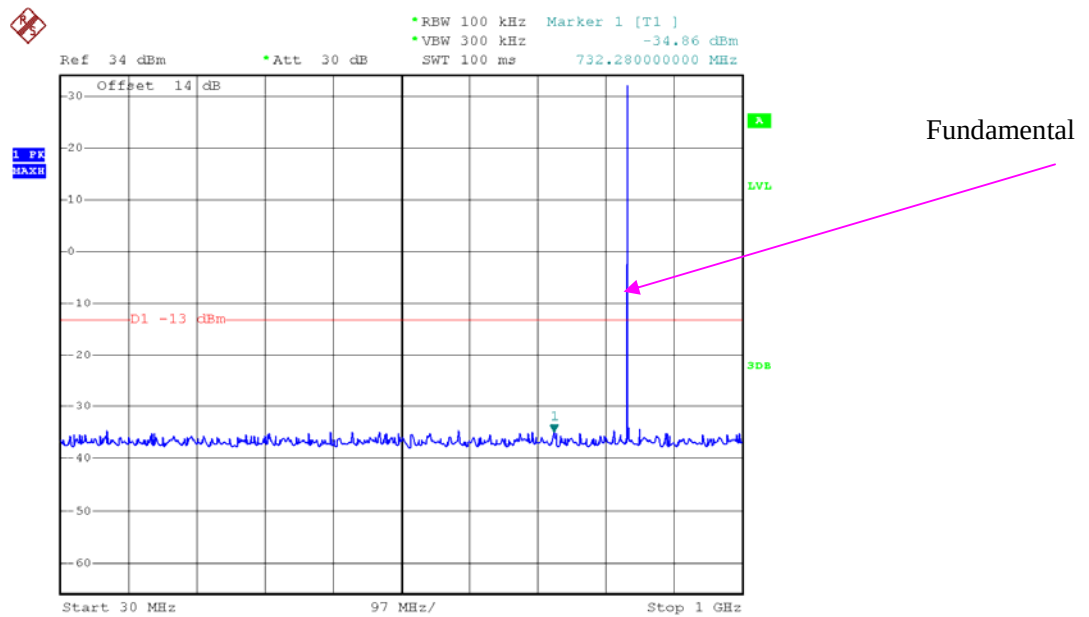


Date: 3.MAY.2015 15:10:04

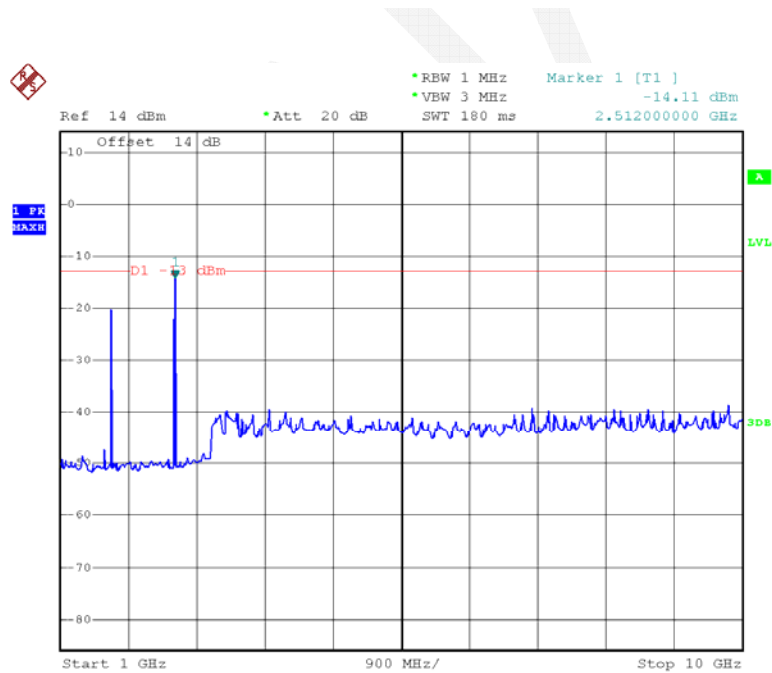


Date: 3.MAY.2015 15:09:18

EDGE850_Middle Channel

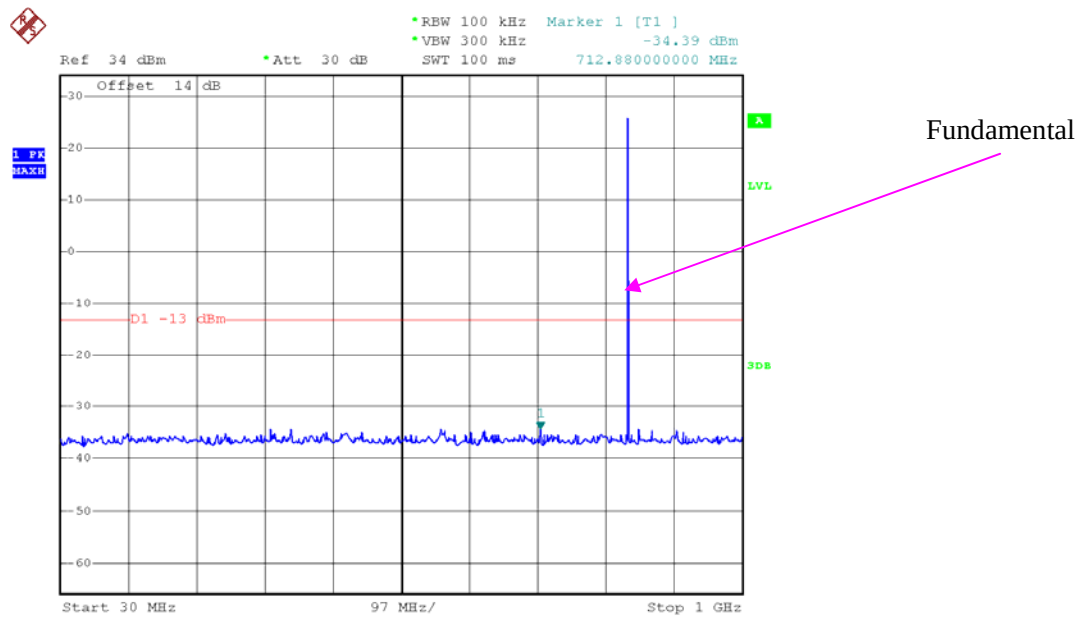


Date: 7.MAY.2015 15:00:13

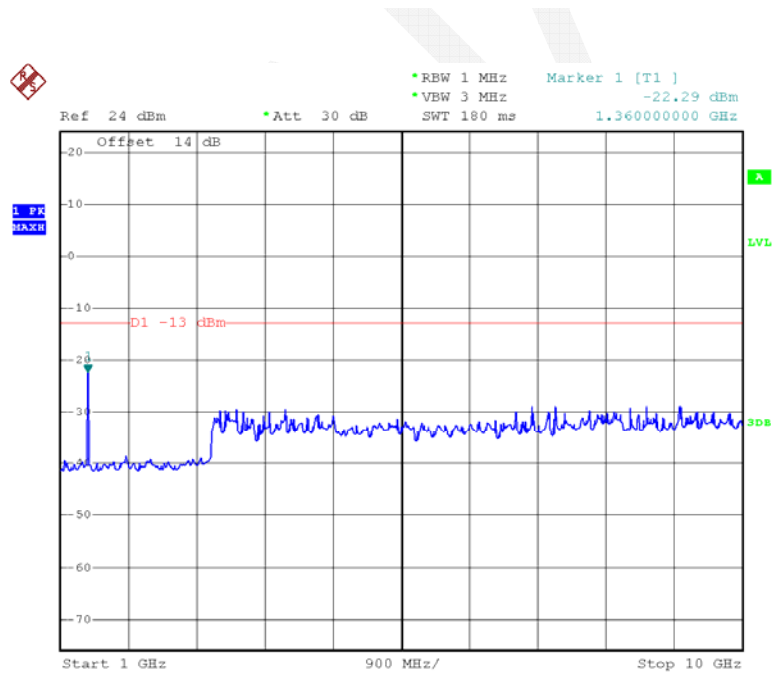


Date: 7.MAY.2015 15:01:48

PCS 1900_ Middle Channel

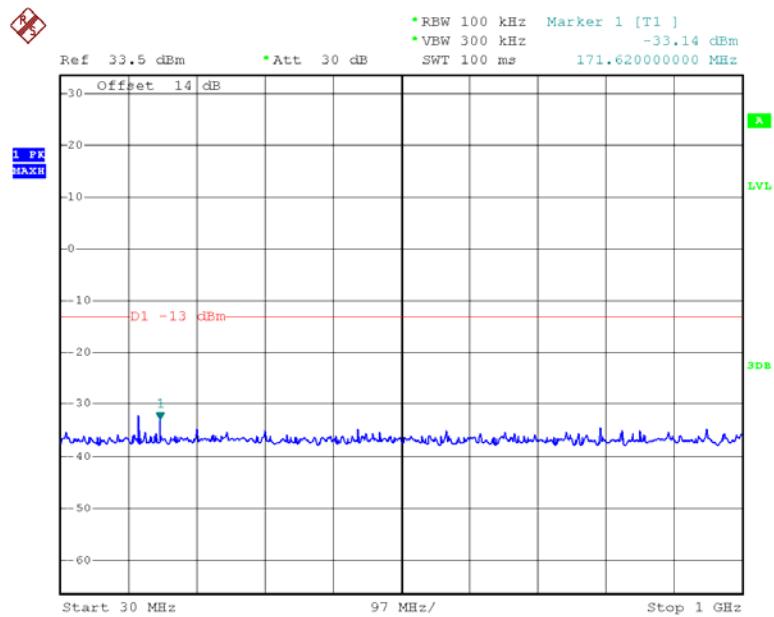


Date: 3.MAY.2015 15:03:10

Fundamental

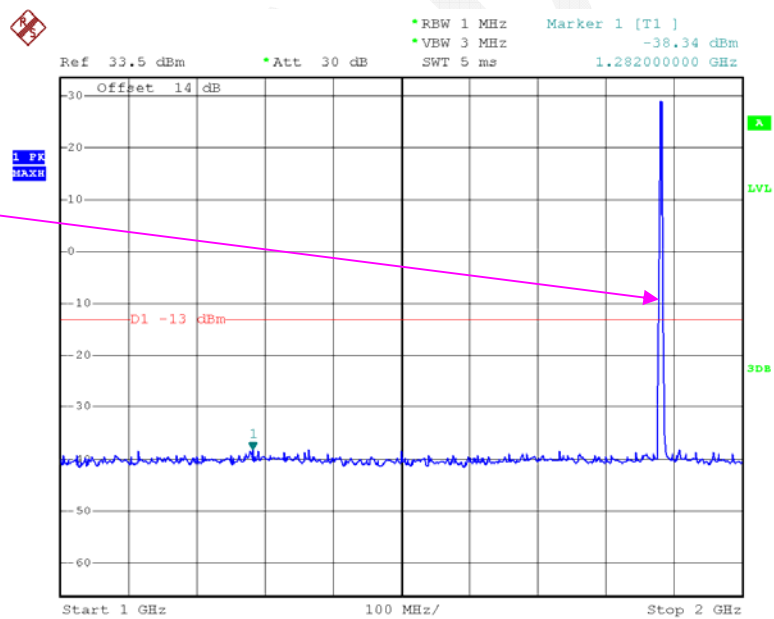


Date: 3.MAY.2015 15:05:36

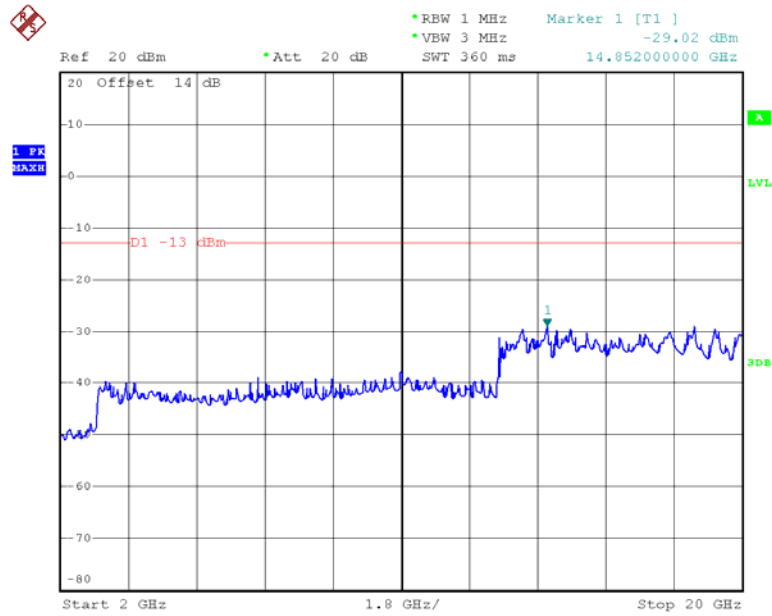


Date: 3.MAY.2015 15:06:14


EDGE 1900_ Middle Channel

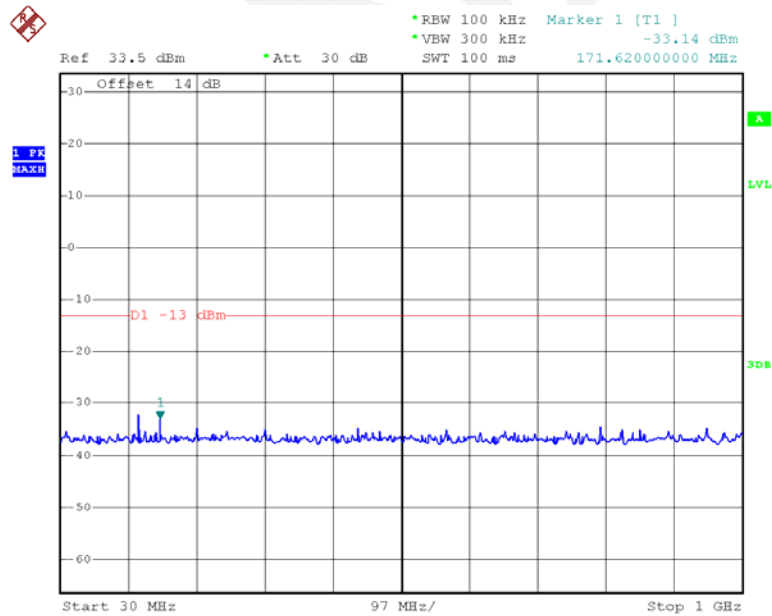

Date: 3.MAY.2015 15:03:10

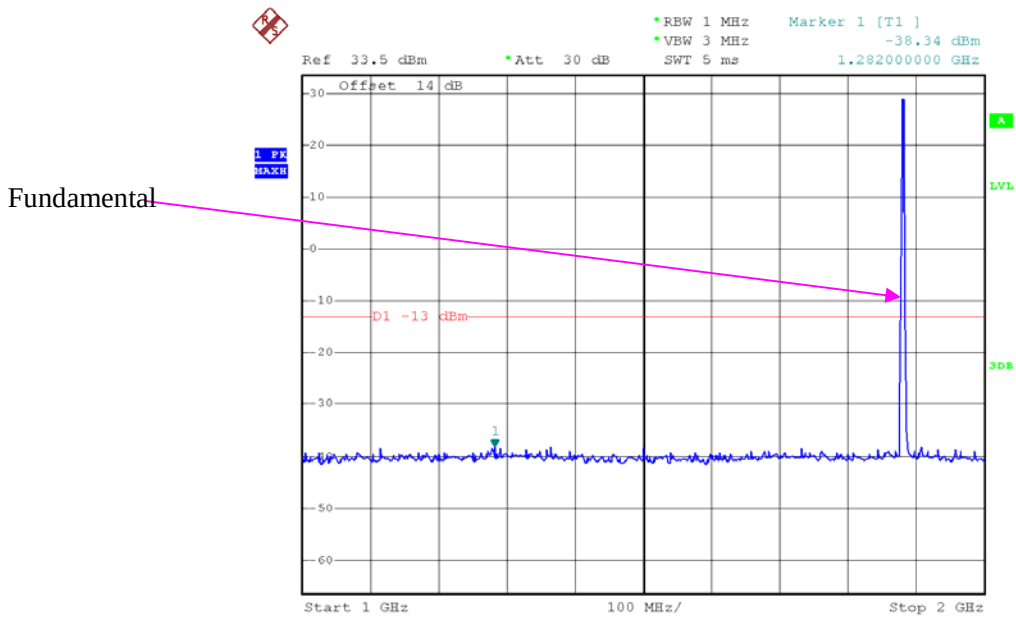


Date: 3.MAY.2015 15:05:36

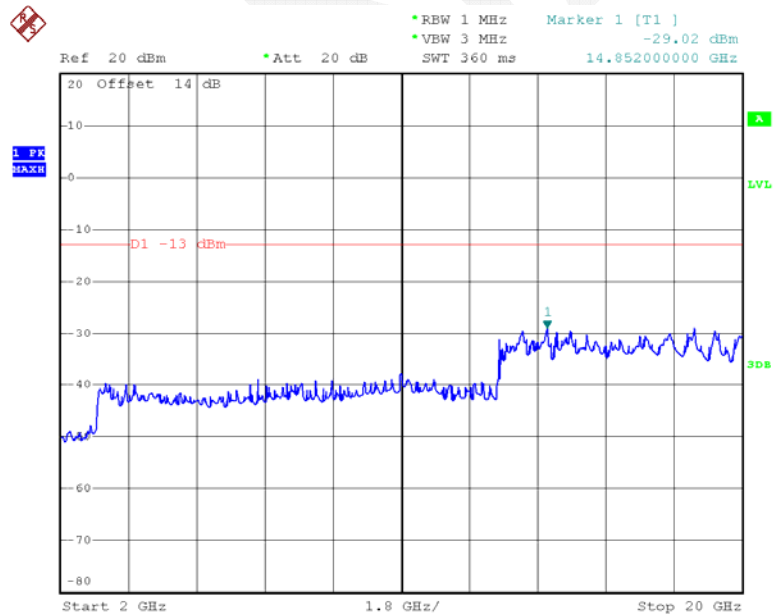


Date: 3.MAY.2015 15:06:14


REL99 Band II_ Middle Channel

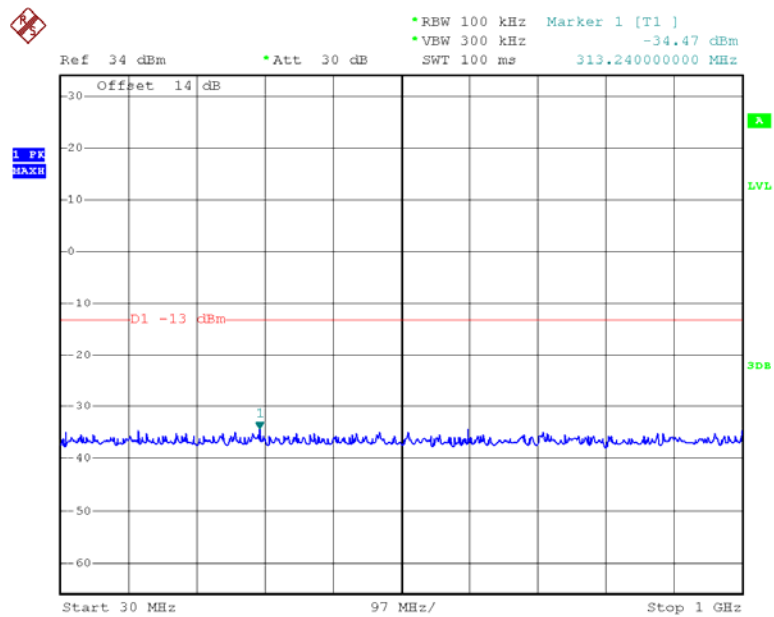

Date: 3.MAY.2015 15:31:49

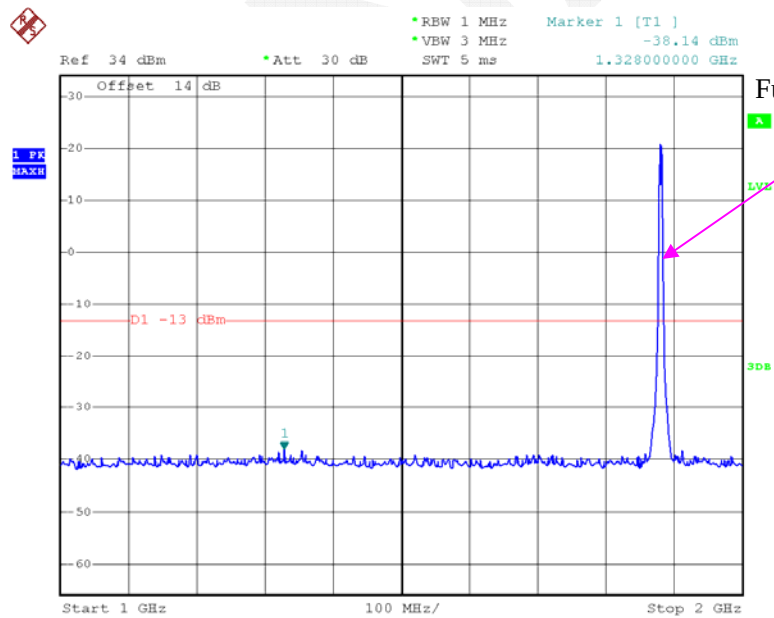


Date: 3.MAY.2015 15:31:07

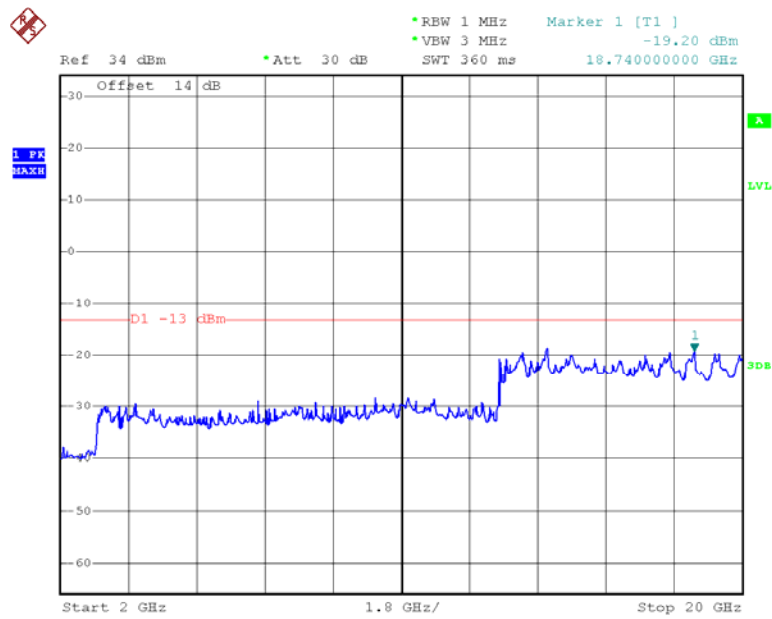


Date: 3.MAY.2015 15:30:49


HSDPA Band II_Middle Channel

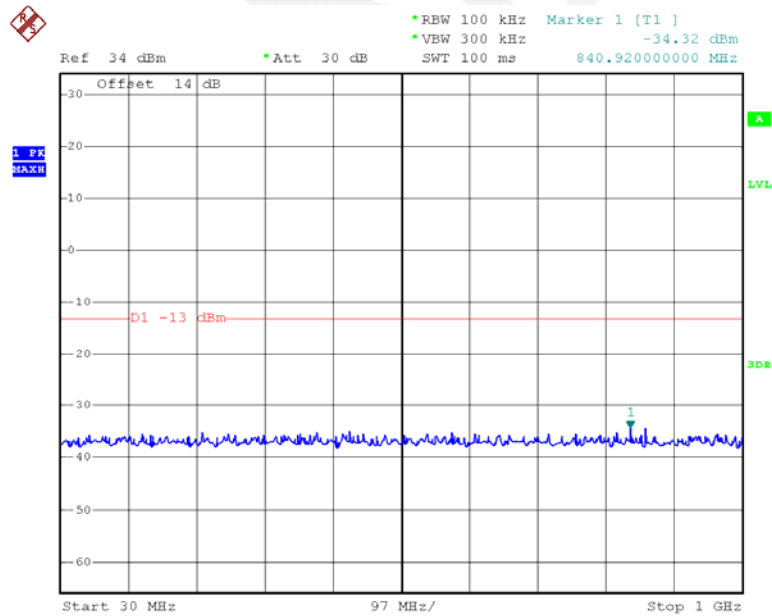

Date: 3.MAY.2015 15:29:17

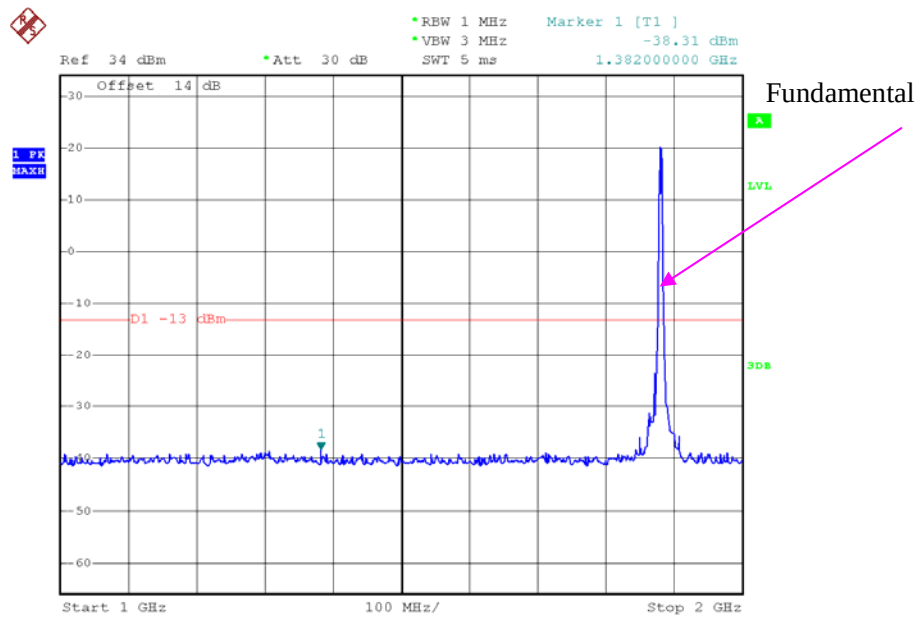

Date: 3.MAY.2015 15:29:51

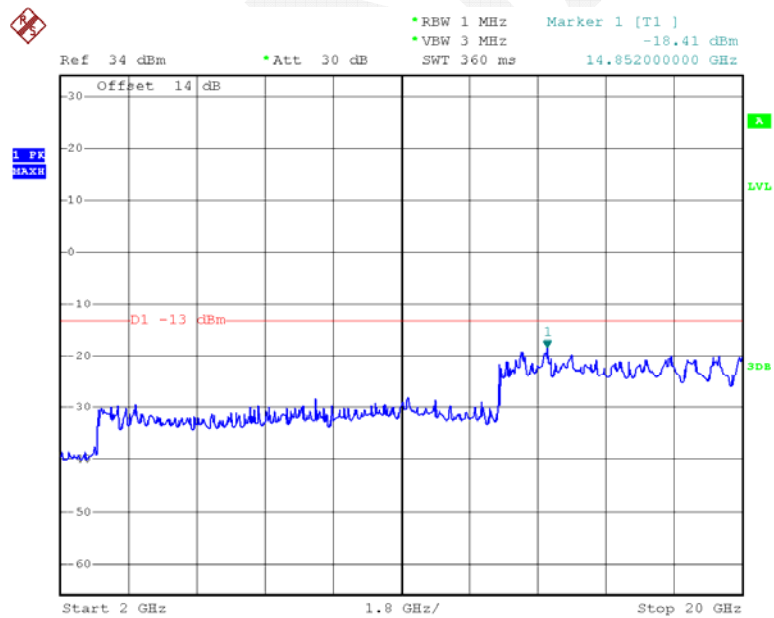

Date: 3.MAY.2015 15:30:10

Ref 34 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 100 ms Marker 1 [T1] -34.93 dBm 674.080000000 MHz

Offset 14 dB

1 PK 10A2H

D1 -13 dBm

1

Start 30 MHz 97 MHz/ Stop 1 GHz

Ref 34 dBm Att 30 dB SWT 5 ms

•REW 1 MHz •VEW 3 MHz

Marker 1 [T1] -37.32 dBm 1.160000000 GHz

Offset 14 dB


1.16 GHz

D1 -13 dBm

1


Start 1 GHz 100 MHz/ Stop 2 GHz

Date: 3.MAY.2015 15:28:24

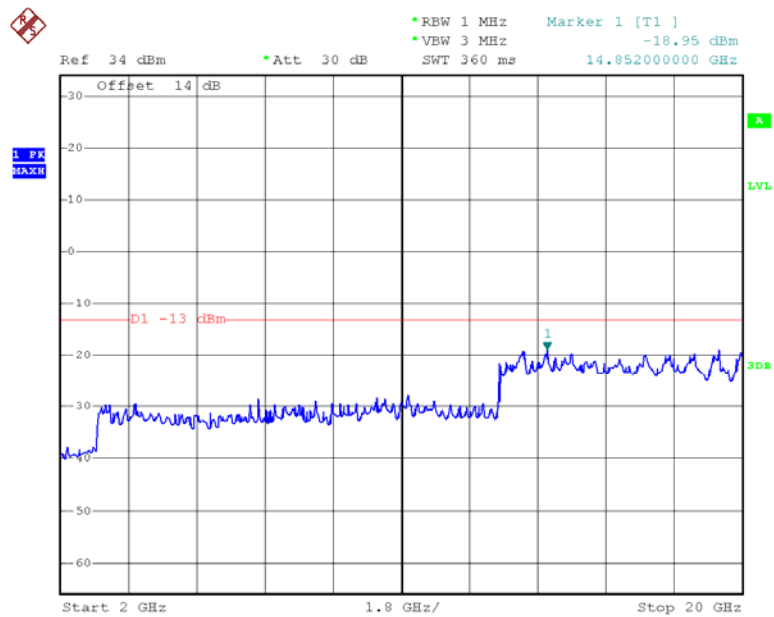


Date: 3.MAY.2015 15:28:03

REL99 Band V_ Middle Channel

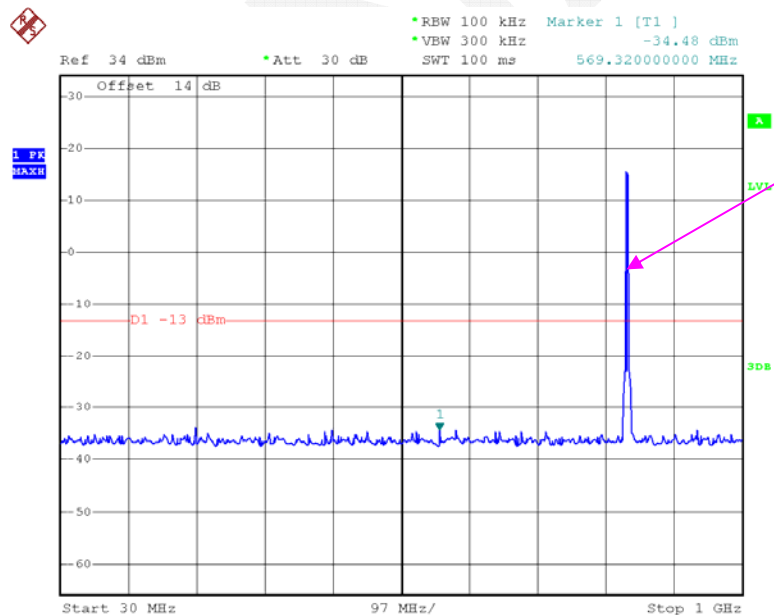


Fundamental

Date: 3.MAY.2015 15:24:50

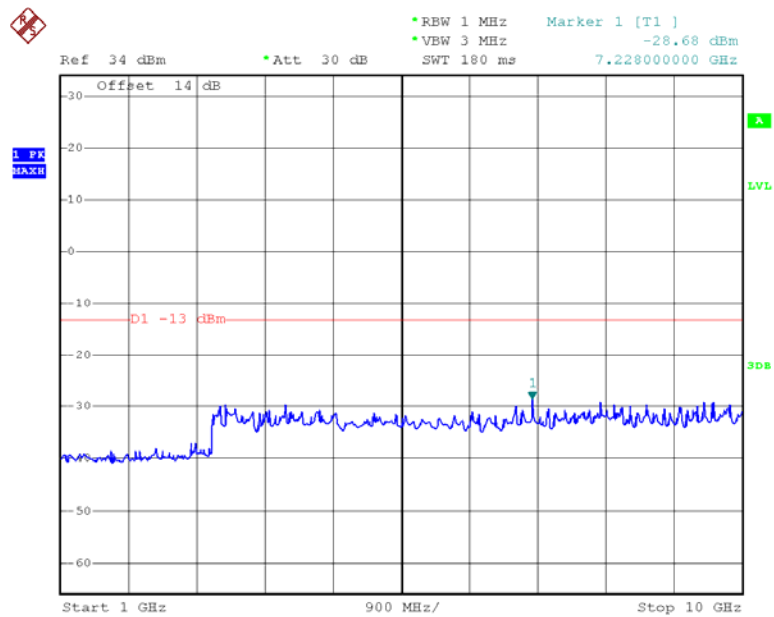


Date: 3.MAY.2015 15:25:33

HSDPA Band V_Middle Channel

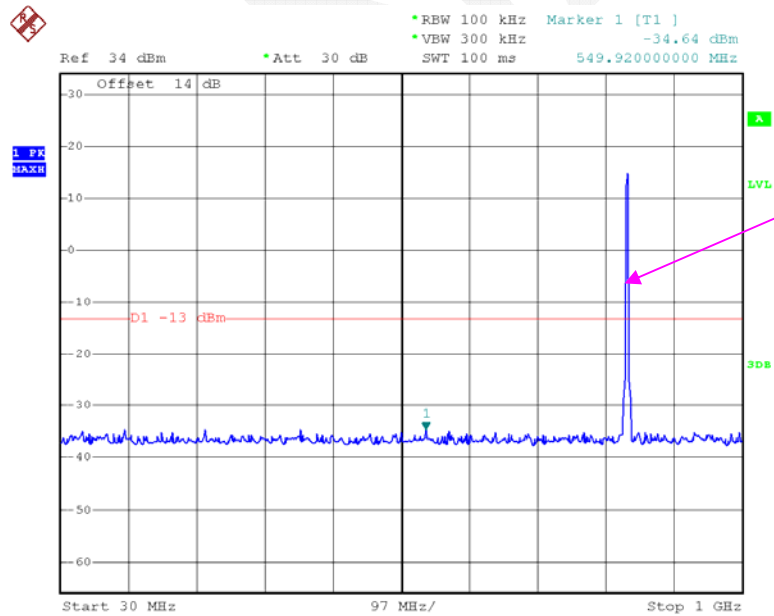


Fundamental

Date: 3.MAY.2015 15:26:22

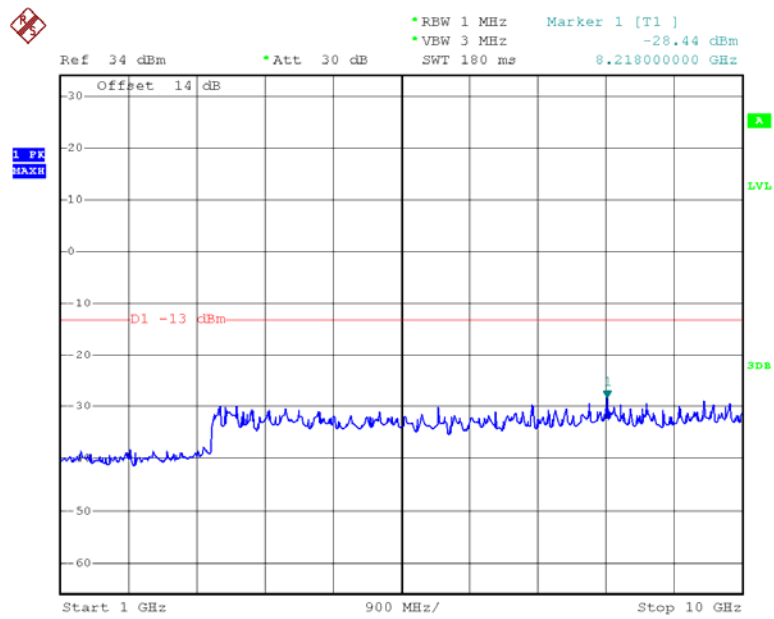


Date: 3.MAY.2015 15:25:55

HSUPA Band V_Middle Channel

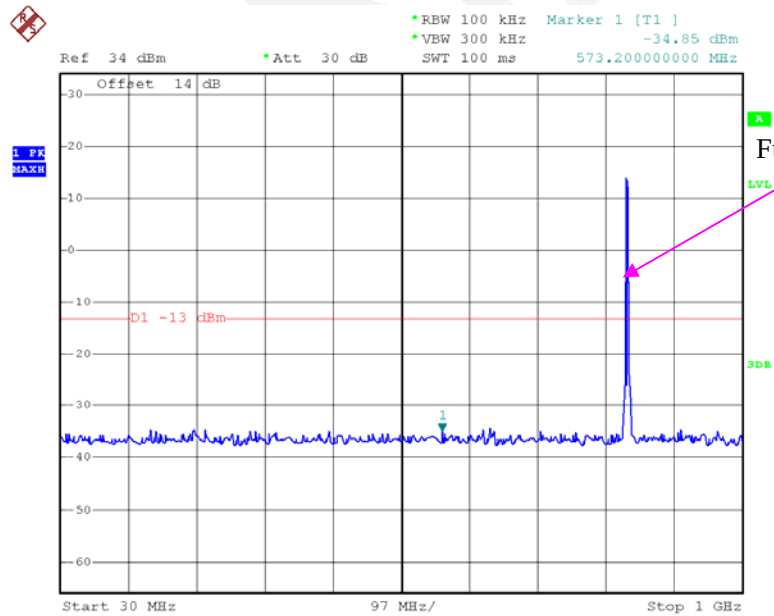

Date: 3.MAY.2015 15:26:57

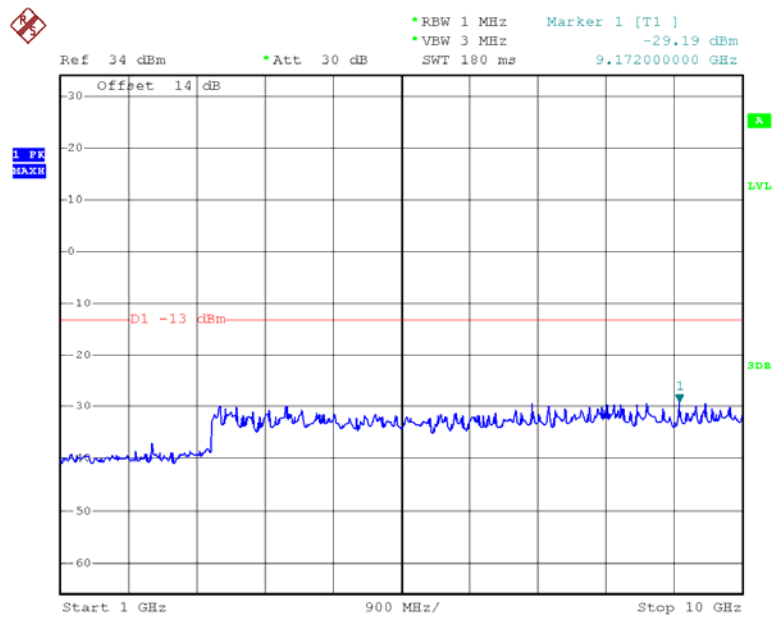

Date: 3.MAY.2015 15:27:16

FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917 and § 24.238.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	E4440A	SG43360054	2014-12-04	2015-12-04
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2014-05-09	2015-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.3 °C
Relative Humidity:	63 %
ATM Pressure:	100.4 kPa

The testing was performed by Allen Qiao on 2015-05-04.

EUT Operation Mode: Transmitting

Cellular Band

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:824.200 MHz								
1648.400	H	47.56	-53.6	10.5	1.5	-44.6	-13.0	31.6
1648.400	V	48.55	-53	10.5	1.5	-44.0	-13.0	31.0
2472.600	H	38.42	-59.6	12.9	2.6	-49.3	-13.0	36.3
2472.600	V	40.36	-56.4	12.9	2.6	-46.1	-13.0	33.1
Frequency:836.600 MHz								
1673.200	H	46.26	-54.8	10.6	1.5	-45.7	-13.0	32.7
1673.200	V	47.52	-53.9	10.6	1.5	-44.8	-13.0	31.8
2509.800	H	37.69	-60.3	13.1	2.8	-50.0	-13.0	37.0
2509.800	V	39.67	-57.4	13.1	2.8	-47.1	-13.0	34.1
Frequency:848.800 MHz								
1697.600	H	45.68	-55.4	10.8	1.5	-46.1	-13.0	33.1
1697.600	V	46.68	-54.5	10.8	1.5	-45.2	-13.0	32.2
2546.400	H	36.92	-59.7	13.1	2.8	-49.4	-13.0	36.4
2546.400	V	39.16	-57.9	13.1	2.8	-47.6	-13.0	34.6

For below 1GHz, all spurious emissions are 20 dB below the limit or are on the system noise floor level.

WCDMA Band V

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:826.400 MHz								
1652.800	H	41.22	-59.9	10.5	1.5	-50.9	-13.0	37.9
1652.800	V	43.74	-57.8	10.5	1.5	-48.8	-13.0	35.8
Frequency:836.6.00 MHz								
1673.200	H	41.74	-59.3	10.6	1.5	-50.2	-13.0	37.2
1673.200	V	44.11	-57.3	10.6	1.5	-48.2	-13.0	35.2
Frequency:846.600 MHz								
1693.200	H	42.25	-58.8	10.7	1.5	-49.6	-13.0	36.6
1693.200	V	44.52	-56.7	10.7	1.5	-47.5	-13.0	34.5

For below 1GHz, all spurious emissions are 20 dB below the limit or are on the system noise floor level.

PCS Band

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:1850.200 MHz								
3700.400	H	36.38	-58.4	14.0	2.5	-46.9	-13.0	33.9
3700.400	V	39.94	-54.4	14.0	2.5	-42.9	-13.0	29.9
Frequency:1880.000 MHz								
3760.000	H	37.22	-57.1	13.8	2.9	-46.2	-13.0	33.2
3760.000	V	39.57	-53.5	13.8	2.9	-42.6	-13.0	29.6
Frequency:1909.800 MHz								
3819.600	H	37.21	-56.6	13.6	3.3	-46.3	-13.0	33.3
3819.600	V	38.63	-53.5	13.6	3.3	-43.2	-13.0	30.2

For below 1GHz, all spurious emissions are 20 dB below the limit or are on the system noise floor level.

WCDMA Band II

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:1852.400 MHz								
3704.800	H	34.64	-60.1	13.9	2.5	-48.7	-13.0	35.7
3704.800	V	35.67	-58.6	13.9	2.5	-47.2	-13.0	34.2
Frequency:1880.000 MHz								
3760.000	H	33.92	-60.4	13.8	2.9	-49.5	-13.0	36.5
3760.000	V	35.02	-58	13.8	2.9	-47.1	-13.0	34.1
Frequency:1907.600 MHz								
3815.200	H	33.16	-60.7	13.6	3.3	-50.4	-13.0	37.4
3815.200	V	34.34	-57.8	13.6	3.3	-47.5	-13.0	34.5

For below 1GHz, all spurious emissions are 20 dB below the limit or are on the system noise floor level.

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §22.917(a) & §24.238(a) - BAND EDGES

Applicable Standard


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

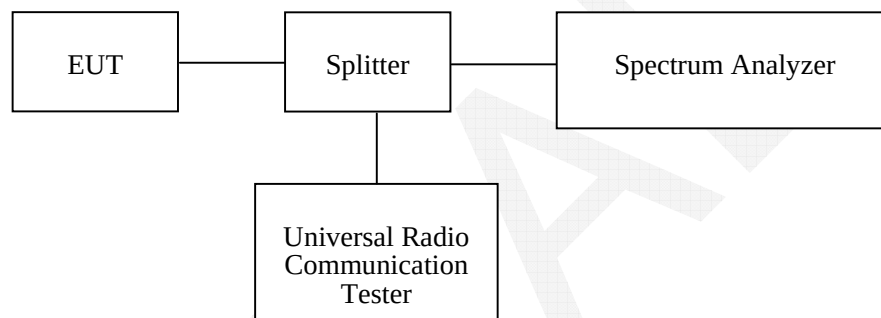

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.7-25.3 °C
Relative Humidity:	57-56 %
ATM Pressure:	100.4-100.5kPa


The testing was performed by Allen Qiao on 2015-05-03 and 2015-05-07.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Band	Mode	Band Edge	Reading	Limit
			dBm	dBm
Cellular	GSM	Left	-18.33	≤ -13
		Right	-18.73	≤ -13
	EDGE	Left	-15.31	≤ -13
		Right	-15.11	≤ -13
PCS	GSM	Left	-18.01	≤ -13
		Right	-16.61	≤ -13
	EDGE	Left	-28.82	≤ -13
		Right	-27.81	≤ -13
WCDMA Band II	Rel 99	Left	-20.89	≤ -13
		Right	-23.99	≤ -13
	HSDPA	Left	-23.20	≤ -13
		Right	-21.69	≤ -13
	HSUPA	Left	-22.95	≤ -13
		Right	-20.75	≤ -13
WCDMA Band V	Rel 99	Left	-20.55	≤ -13
		Right	-21.33	≤ -13
	HSDPA	Left	-21.01	≤ -13
		Right	-22.99	≤ -13
	HSUPA	Left	-20.68	≤ -13
		Right	-23.39	≤ -13

GSM 850, Left Band Edge

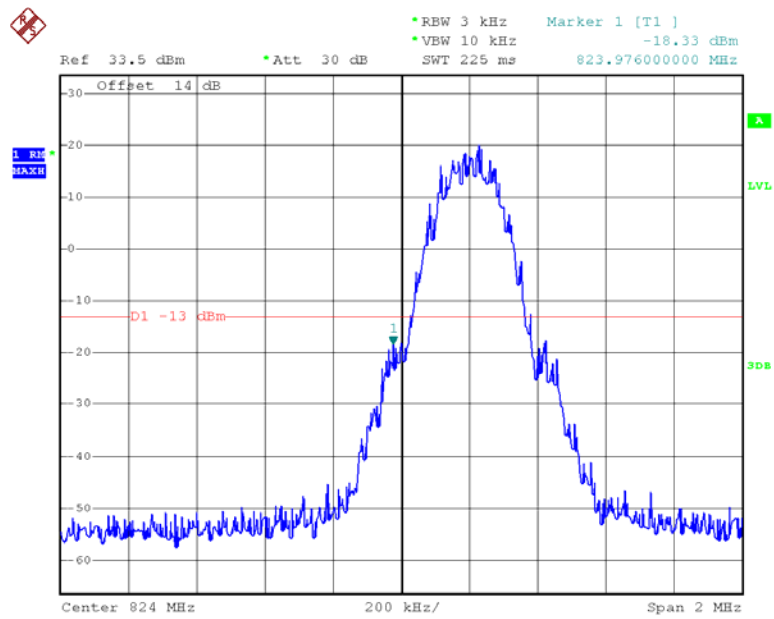


Date: 3.MAY.2015 14:51:33

GSM 850, Right Band Edge

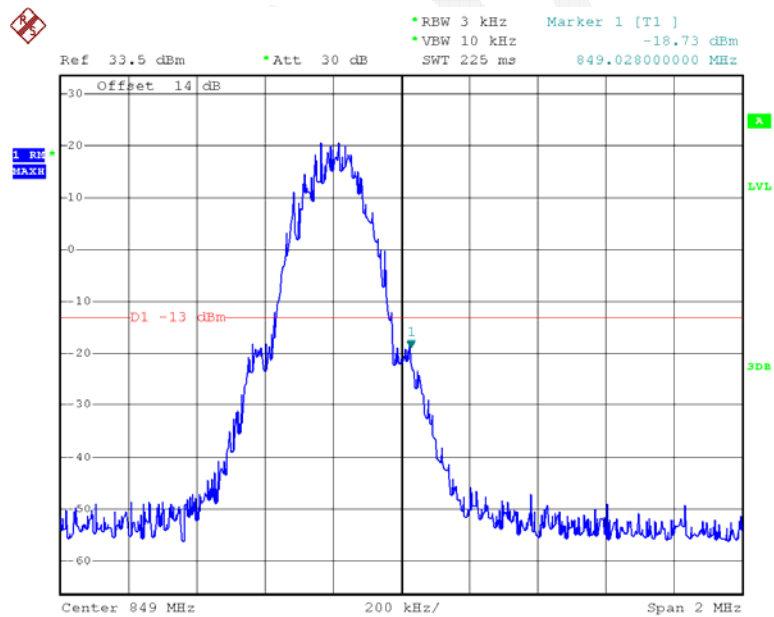


Date: 3.MAY.2015 14:53:09

EDGE 850, Left Band Edge

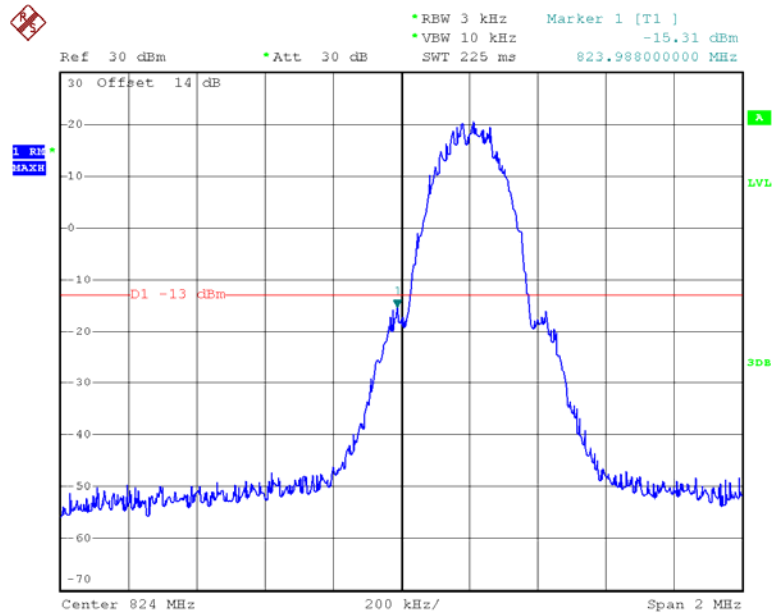


Date: 7.MAY.2015 15:26:07

EDGE 850, Right Band Edge

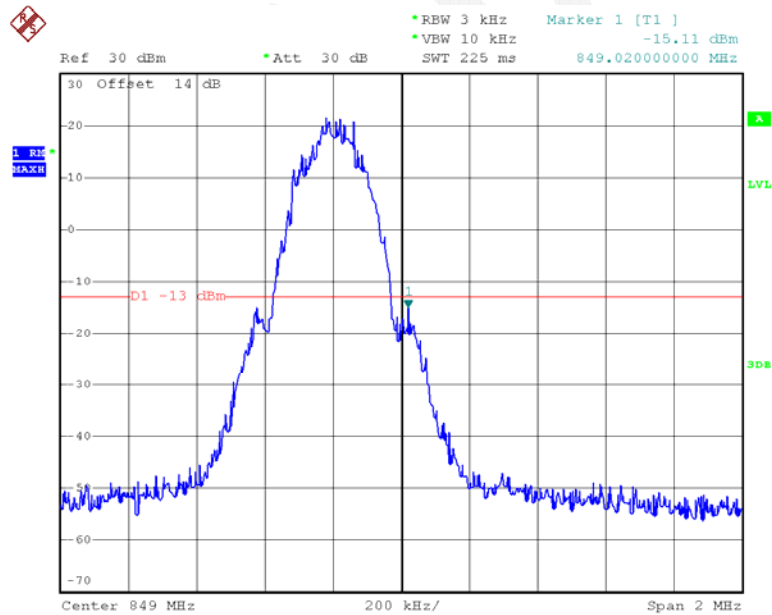


Date: 7.MAY.2015 15:26:48

GSM 1900, Left Band Edge

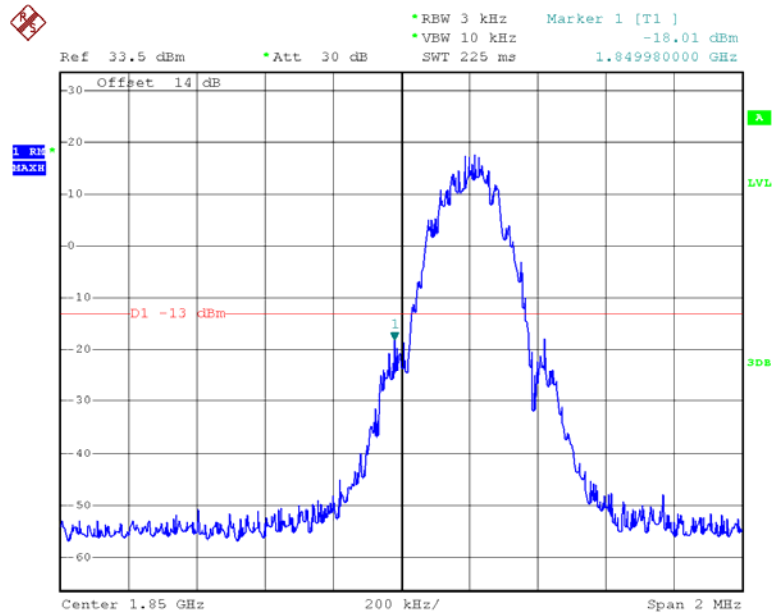


Date: 3.MAY.2015 14:55:55

GSM 1900, Right Band Edge

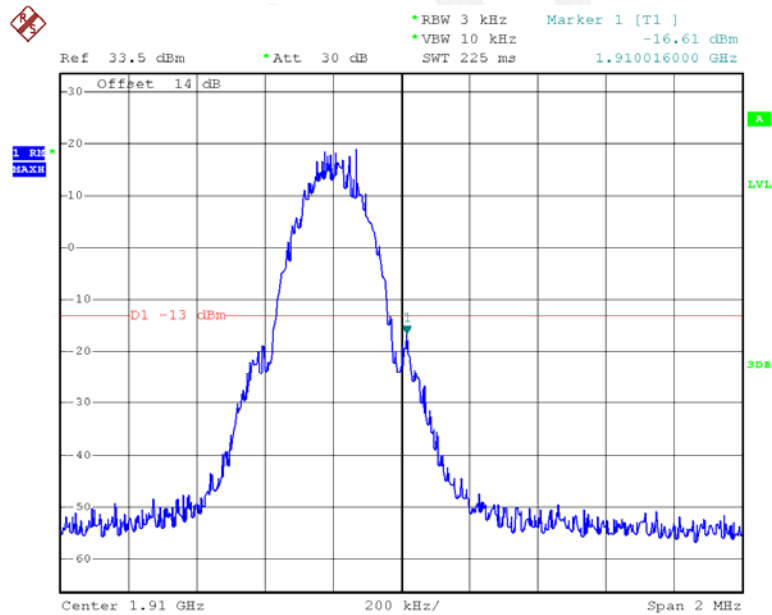


Date: 3.MAY.2015 14:57:22

EDGE 1900, Left Band Edge

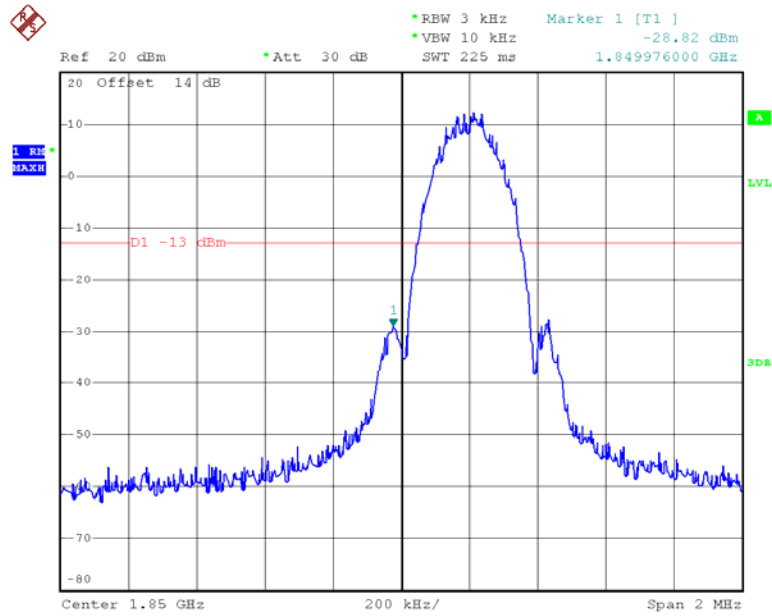


Date: 7.MAY.2015 15:21:58

EDGE 1900, Right Band Edge

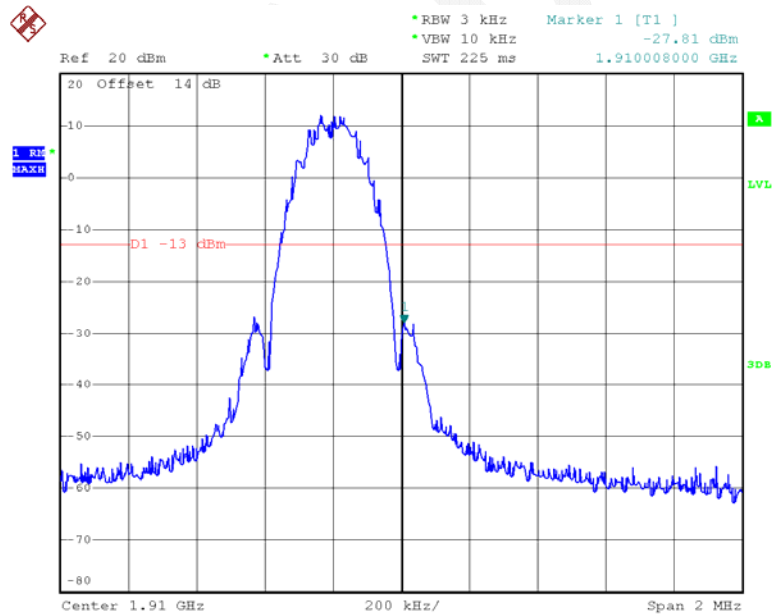


Date: 7.MAY.2015 15:23:41

REL99 Band II, Left Band Edge

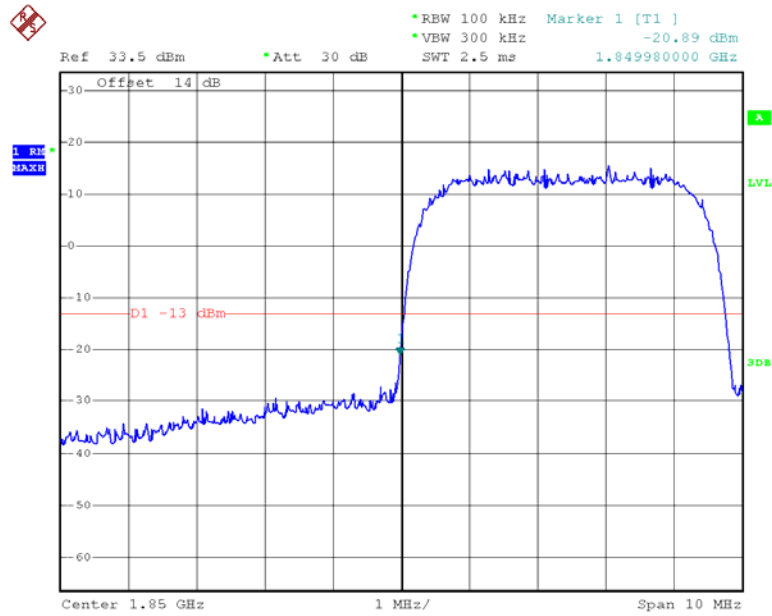


Date: 3.MAY.2015 14:47:15


REL99 Band II, Right Band Edge

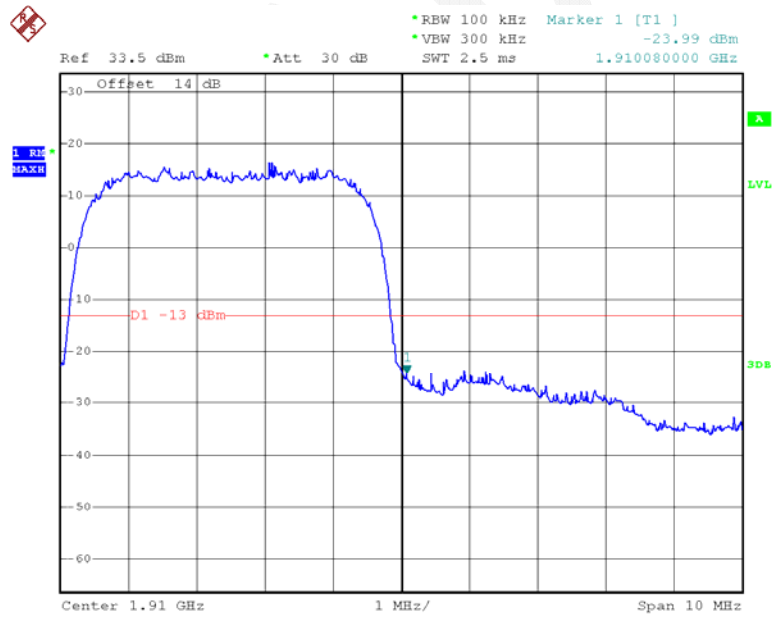

Date: 3.MAY.2015 14:46:32

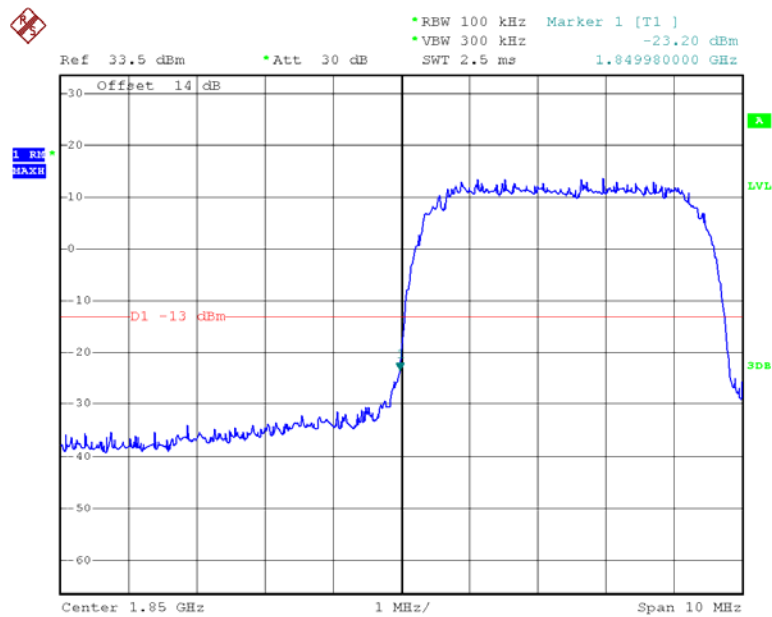
HSDPA Band II, Left Band Edge

Date: 3.MAY.2015 14:44:12

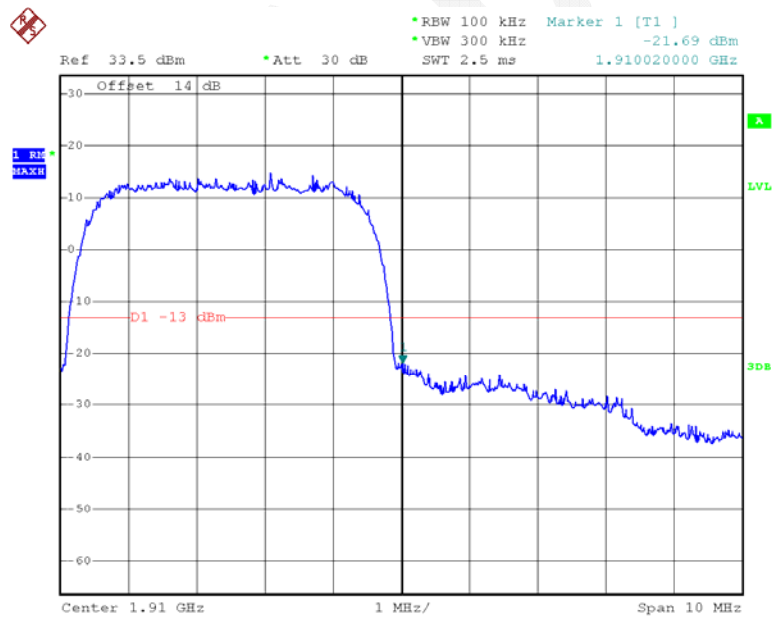HSDPA Band II, Right Band Edge


Date: 3.MAY.2015 14:44:52

HSUPA Band II, Left Band Edge

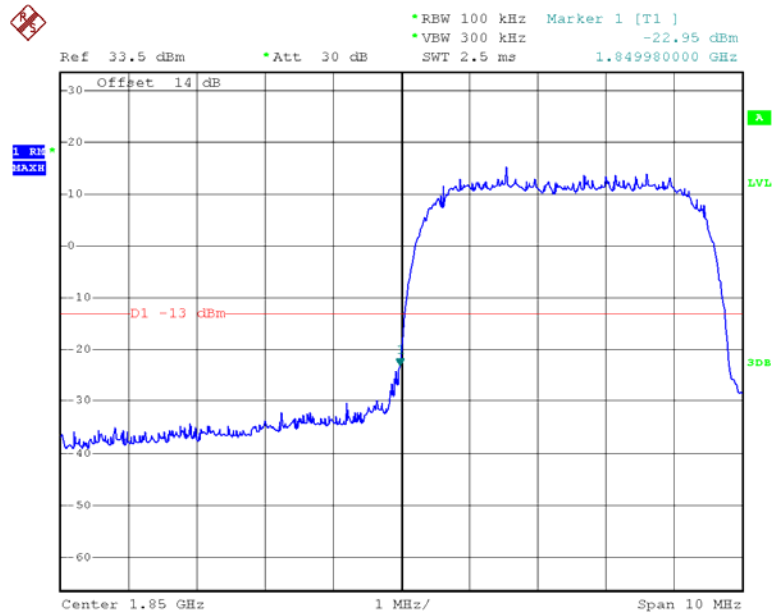


Date: 3.MAY.2015 14:43:20

HSUPA Band II, Right Band Edge

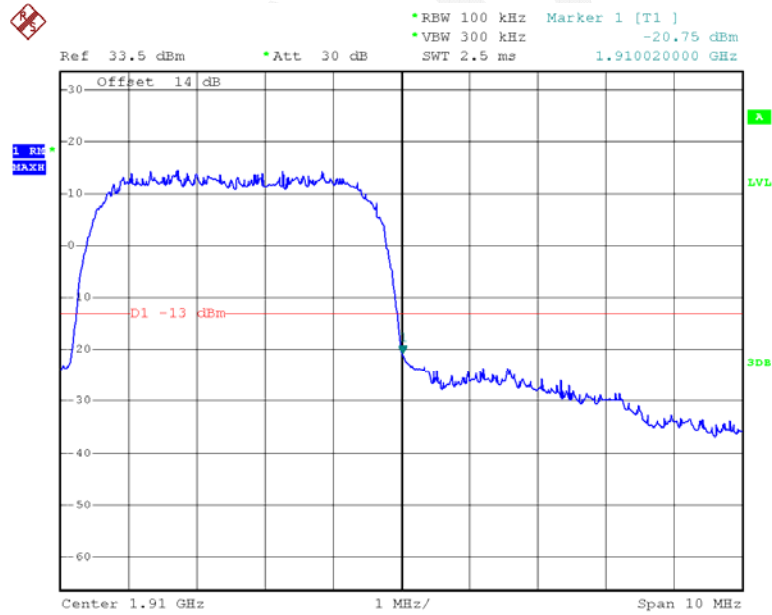


Date: 3.MAY.2015 14:42:47

REL99 Band V, Left Band Edge

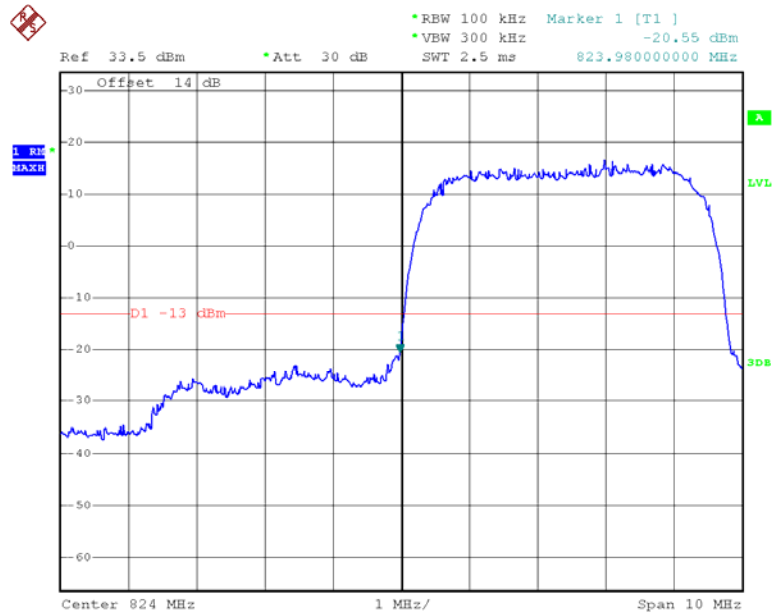


Date: 3.MAY.2015 14:36:33

REL99 Band V Right Band Edge

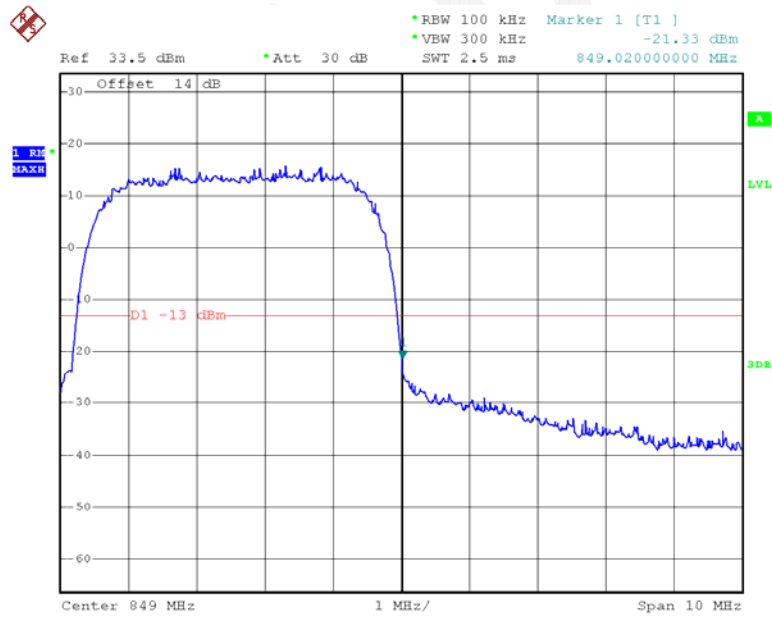


Date: 3.MAY.2015 14:37:35

HSDPA Band V, Left Band Edge

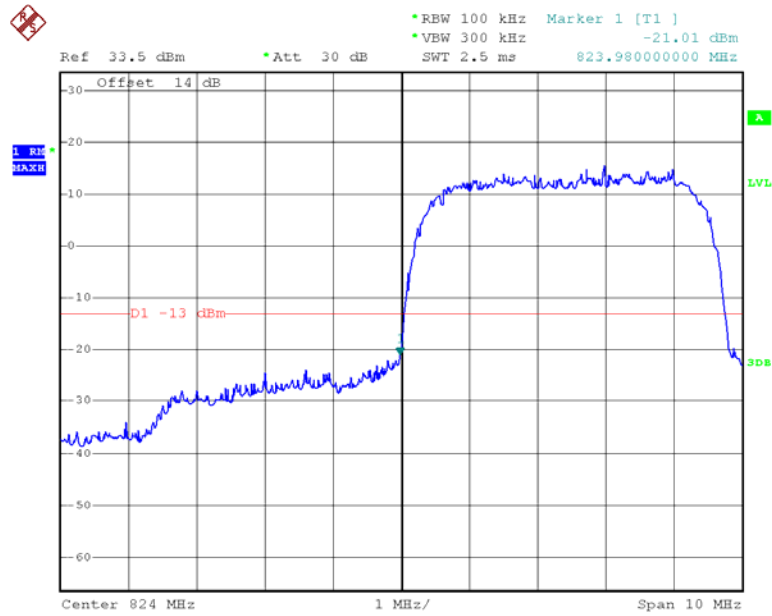


Date: 3.MAY.2015 14:39:06

HSDPA Band V, Right Band Edge

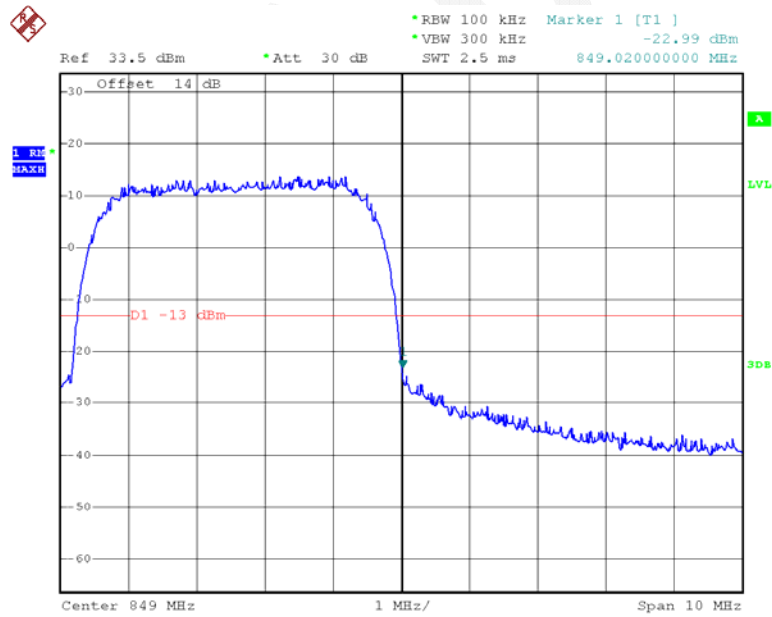


Date: 3.MAY.2015 14:38:29

HSUPA Band V, Left Band Edge

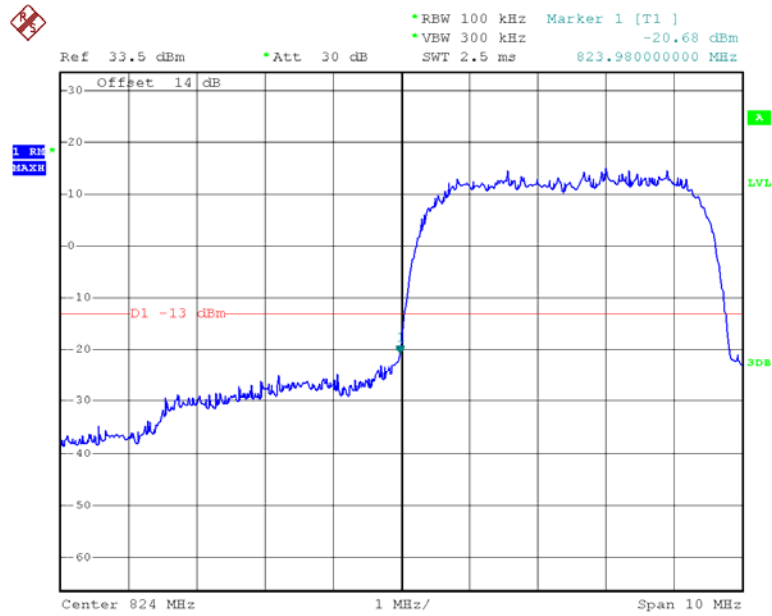

Date: 3.MAY.2015 14:40:43

HSUPA Band V, Right Band Edge

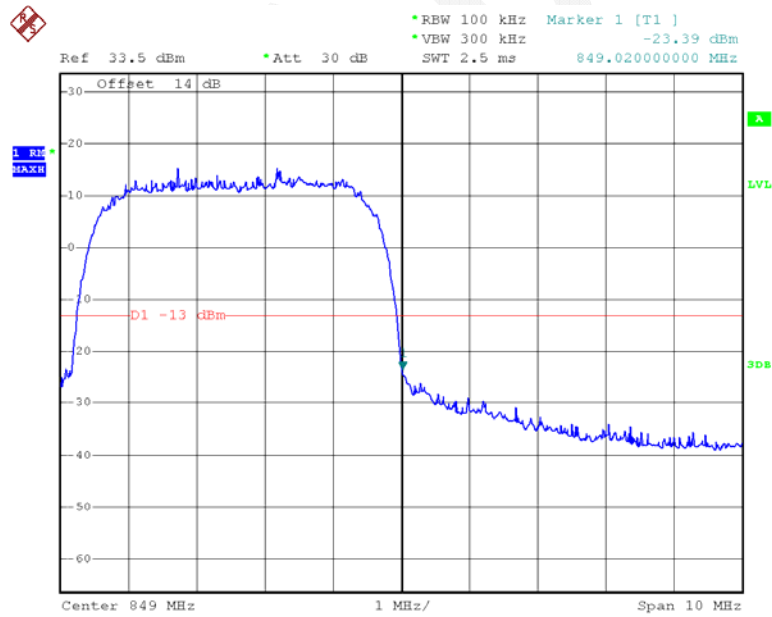

Date: 3.MAY.2015 14:41:29

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

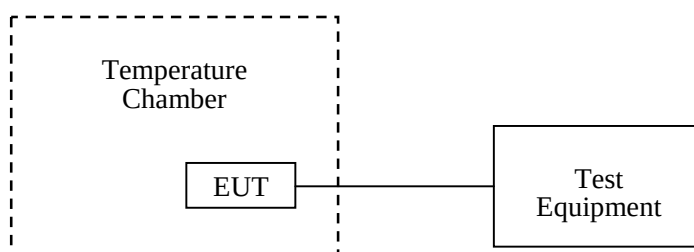

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-4	2014-08-11	2015-08-11
R&S	Universal Radio Communication Tester	CMU200	109 038	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.7 °C
Relative Humidity:	57 %
ATM Pressure:	100.4kPa

The testing was performed by Allen Qiao on 2015-05-03.

Cellular Band (Part 22H)

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	13	0.016	2.5
-20	3.7	10	0.012	2.5
-10	3.7	16	0.019	2.5
0	3.7	12	0.014	2.5
10	3.7	11	0.013	2.5
20	3.7	17	0.020	2.5
30	3.7	19	0.023	2.5
40	3.7	14	0.017	2.5
50	3.7	15	0.018	2.5
25	3.5	18	0.022	2.5
25	4.2	14	0.017	2.5

8PSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	10	0.012	2.5
-20	3.7	7	0.008	2.5
-10	3.7	9	0.011	2.5
0	3.7	15	0.018	2.5
10	3.7	10	0.012	2.5
20	3.7	9	0.011	2.5
30	3.7	8	0.010	2.5
40	3.7	11	0.013	2.5
50	3.7	12	0.014	2.5
25	3.5	14	0.017	2.5
25	4.2	10	0.012	2.5

WCDMA Band V: Re199

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	-14	-0.017	2.5
-20	3.7	-19	-0.023	2.5
-10	3.7	-12	-0.014	2.5
0	3.7	-17	-0.020	2.5
10	3.7	-12	-0.014	2.5
20	3.7	-11	-0.013	2.5
30	3.7	-18	-0.022	2.5
40	3.7	-11	-0.013	2.5
50	3.7	-15	-0.018	2.5
25	3.5	-13	-0.016	2.5
25	4.2	-10	-0.012	2.5

WCDMA Band V: HSDPA

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	-11	-0.013	2.5
-20	3.7	-14	-0.017	2.5
-10	3.7	-16	-0.019	2.5
0	3.7	-11	-0.013	2.5
10	3.7	-12	-0.014	2.5
20	3.7	-17	-0.020	2.5
30	3.7	-10	-0.012	2.5
40	3.7	-01	-0.001	2.5
50	3.7	-15	-0.018	2.5
25	3.5	-12	-0.014	2.5
25	4.2	-11	-0.013	2.5

WCDMA Band V: HSUPA

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	-12	-0.014	2.5
-20	3.7	-18	-0.022	2.5
-10	3.7	-11	-0.013	2.5
0	3.7	-15	-0.018	2.5
10	3.7	-11	-0.013	2.5
20	3.7	-11	-0.013	2.5
30	3.7	-14	-0.017	2.5
40	3.7	-12	-0.014	2.5
50	3.7	-13	-0.016	2.5
25	3.5	-11	-0.013	2.5
25	4.2	-13	-0.016	2.5

PCS Band (Part 24E)

GMSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.7	33	0.018	Pass
-20	3.7	35	0.019	Pass
-10	3.7	31	0.016	Pass
0	3.7	32	0.017	Pass
10	3.7	36	0.019	Pass
20	3.7	38	0.020	Pass
30	3.7	32	0.017	Pass
40	3.7	37	0.020	Pass
50	3.7	30	0.016	Pass
25	3.5	35	0.019	Pass
25	4.2	34	0.018	Pass

8PSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.7	28	0.015	Pass
-20	3.7	26	0.014	Pass
-10	3.7	25	0.013	Pass
0	3.7	29	0.015	Pass
10	3.7	23	0.012	Pass
20	3.7	25	0.013	Pass
30	3.7	32	0.017	Pass
40	3.7	29	0.015	Pass
50	3.7	27	0.014	Pass
25	3.5	28	0.015	Pass
25	4.2	33	0.018	Pass

WCDMA Band II: Re199

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.7	17	0.009	Pass
-20	3.7	14	0.007	Pass
-10	3.7	12	0.006	Pass
0	3.7	11	0.006	Pass
10	3.7	10	0.005	Pass
20	3.7	18	0.010	Pass
30	3.7	10	0.005	Pass
40	3.7	15	0.008	Pass
50	3.7	12	0.006	Pass
25	3.5	19	0.010	Pass
25	4.2	15	0.008	Pass

WCDMA Band II: HSDPA

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.7	14	0.007	Pass
-20	3.7	16	0.009	Pass
-10	3.7	17	0.009	Pass
0	3.7	10	0.005	Pass
10	3.7	11	0.006	Pass
20	3.7	12	0.006	Pass
30	3.7	10	0.005	Pass
40	3.7	11	0.006	Pass
50	3.7	14	0.007	Pass
25	3.5	13	0.007	Pass
25	4.2	15	0.008	Pass

WCDMA Band II: HSUPA

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.7	18	0.010	Pass
-20	3.7	10	0.005	Pass
-10	3.7	13	0.007	Pass
0	3.7	14	0.007	Pass
10	3.7	19	0.010	Pass
20	3.7	13	0.007	Pass
30	3.7	15	0.008	Pass
40	3.7	17	0.009	Pass
50	3.7	10	0.005	Pass
25	3.5	16	0.009	Pass
25	4.2	14	0.007	Pass

***** END OF REPORT *****