



GSM 850-Right Head Cheek High CH251.....	2
GSM 850-Right Head Tilted High CH251.....	3
GSM 850-Left Head Cheek High CH251	4
GSM 850-Left Head Tilted High CH251.....	5
PCS-1900-Right Head Cheek High CH810	6
PCS-1900-Right Head Tilted High CH810	7
PCS 1900-Left Head Cheek High CH810	8
PCS 1900-Left Head Tilted High CH810	9
GSM 850-Body Up High CH251	10
GSM 850-Body Down High CH251.....	11
GPRS 850-Body Up Low CH251.....	12
GPRS 850-Body Down Low CH251	13
PCS1900-Body Up High CH810	14
PCS1900-Body Down High CH810	15
GPRS1900-Body Up High CH810	16
GPRS1900-Body Down High CH810	17



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GSM 850-Right Head Cheek High CH251

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.6$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Cheek High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.670 mW/g


GSM850/Right Head Cheek High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.060 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.943 W/kg

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.388 mW/g

Maximum value of SAR (measured) = 0.632 mW/g

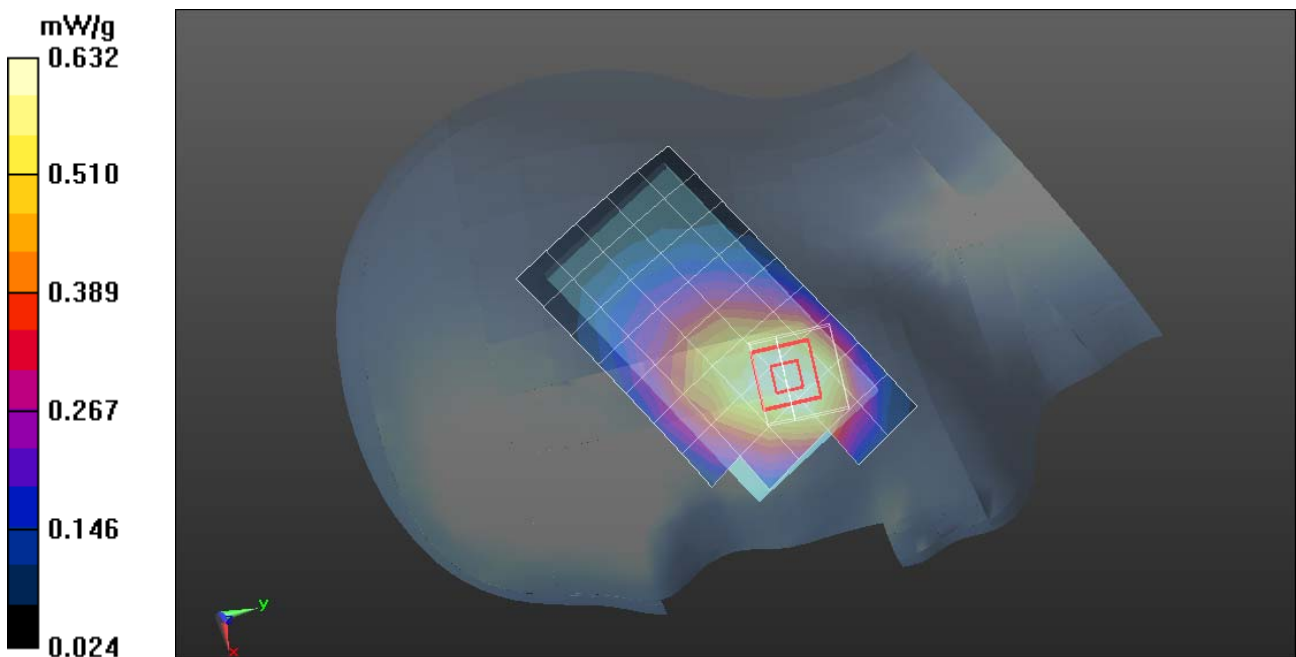



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GSM 850-Right Head Tilted High CH251

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.6$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Tilted High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.454 mW/g


GSM850/Right Head Tilted High CH251/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 17.678 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

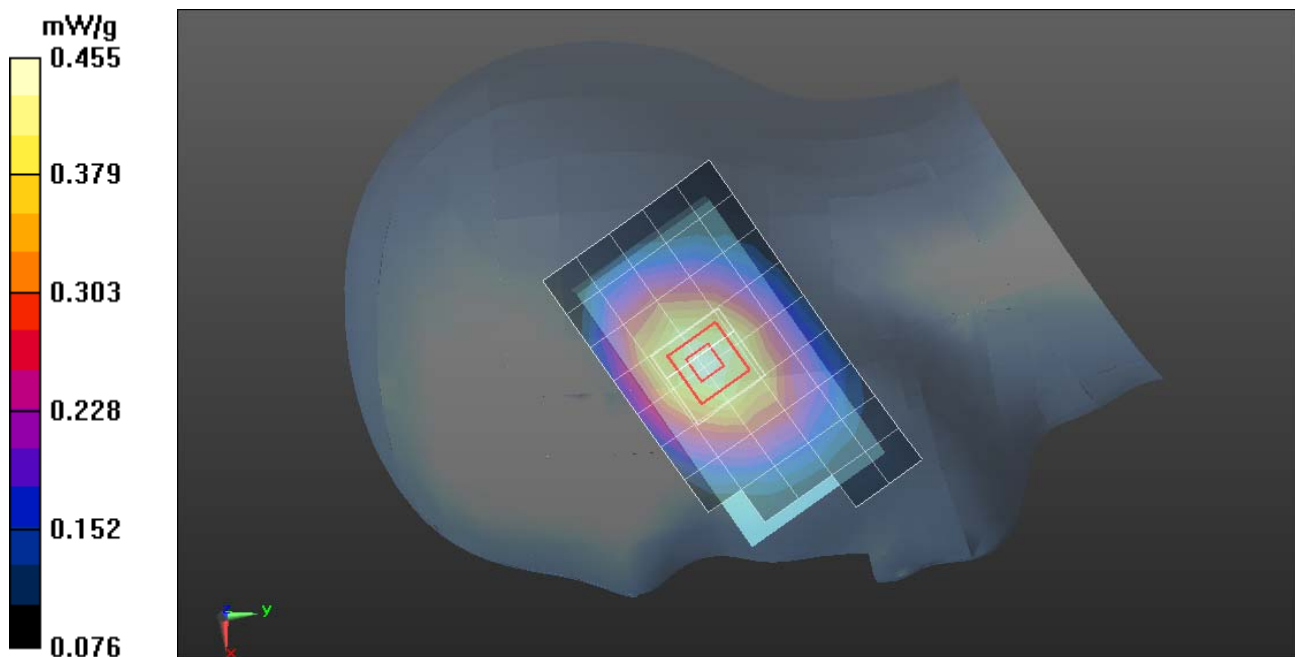



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GSM 850-Left Head Cheek High CH251

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.6$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Left Head Cheek High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.670 mW/g


GSM850/Left Head Cheek High CH251/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.826 V/m; Power Drift = -34.23 dB

Peak SAR (extrapolated) = 1.226 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.419 mW/g

Maximum value of SAR (measured) = 0.699 mW/g

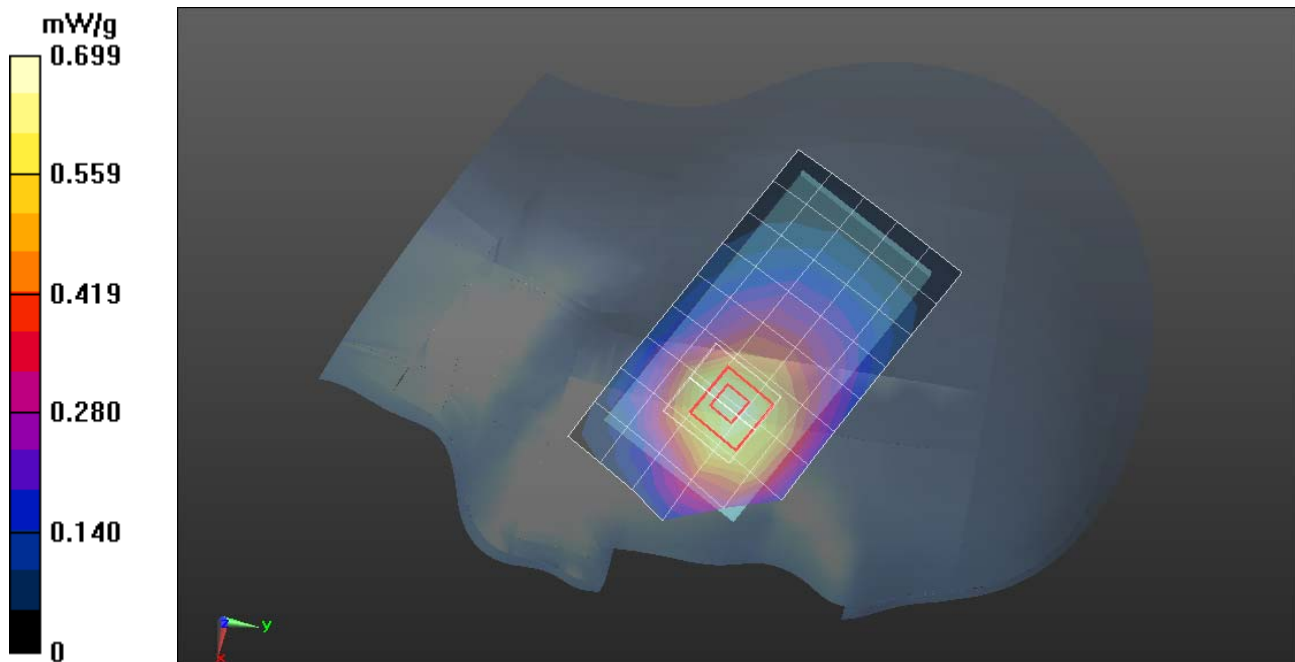



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GSM 850-Left Head Tilted High CH251

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.6$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Left Head Tilted High CH251/Area Scan (6x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.428 mW/g


GSM850/Left Head Tilted High CH251/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 16.763 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.501 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.430 mW/g

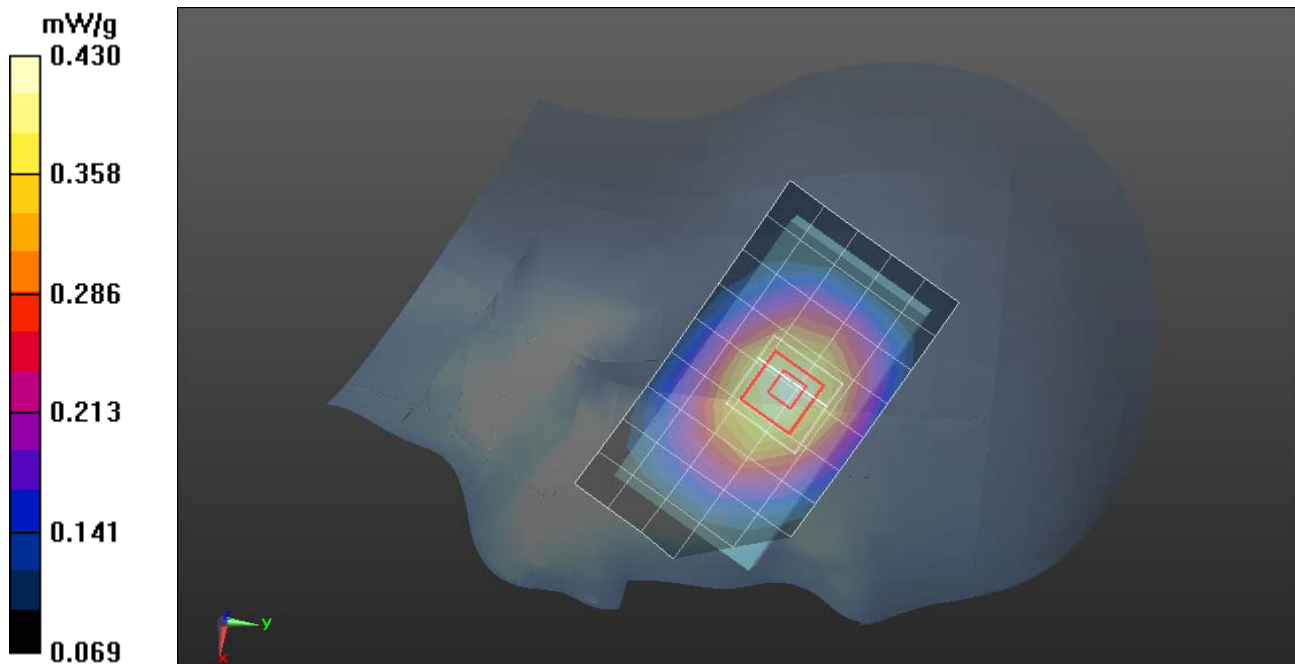



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

PCS-1900-Right Head Cheek High CH810

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1910\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/Right Head Cheek High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.769 mW/g


PCS1900/Right Head Cheek High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.426 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.154 W/kg

SAR(1 g) = 0.553 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.857 mW/g

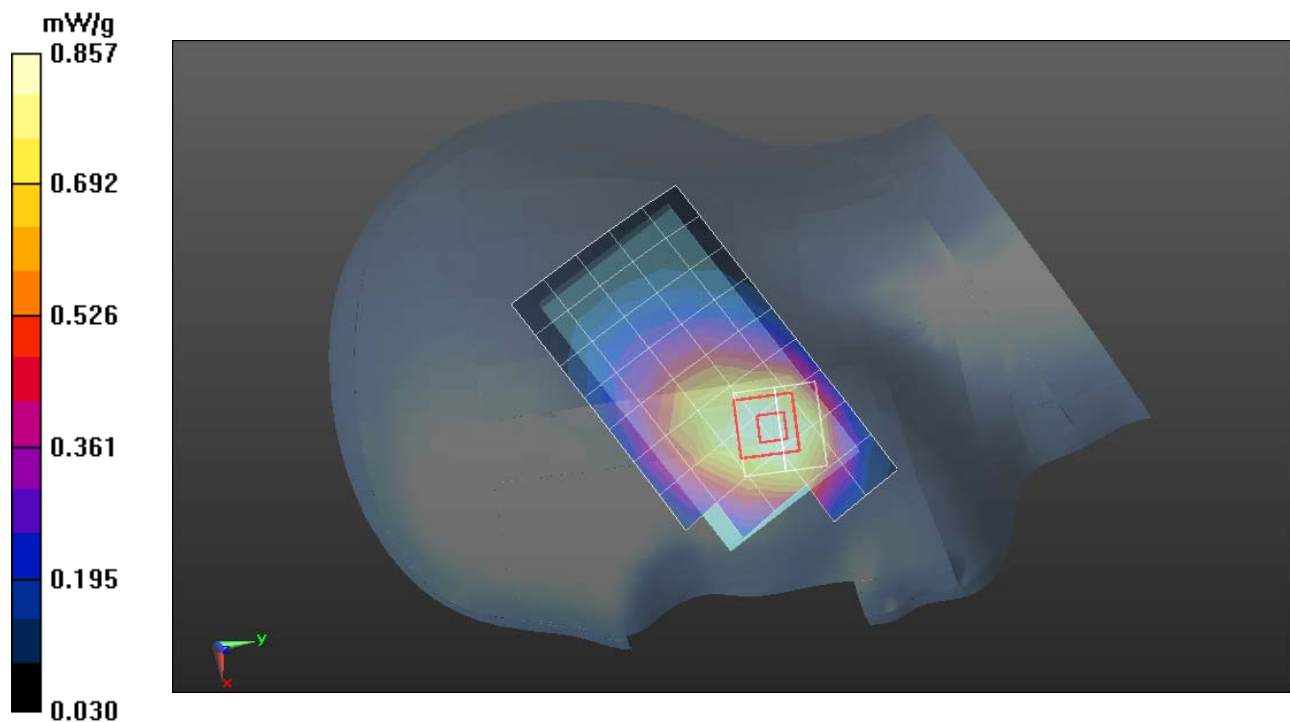



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

PCS-1900-Right Head Tilted High CH810

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1910\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/Right Head Tilted High CH810/Area Scan (6x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.703 mW/g


PCS1900/Right Head Tilted High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.947 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.126 W/kg

SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

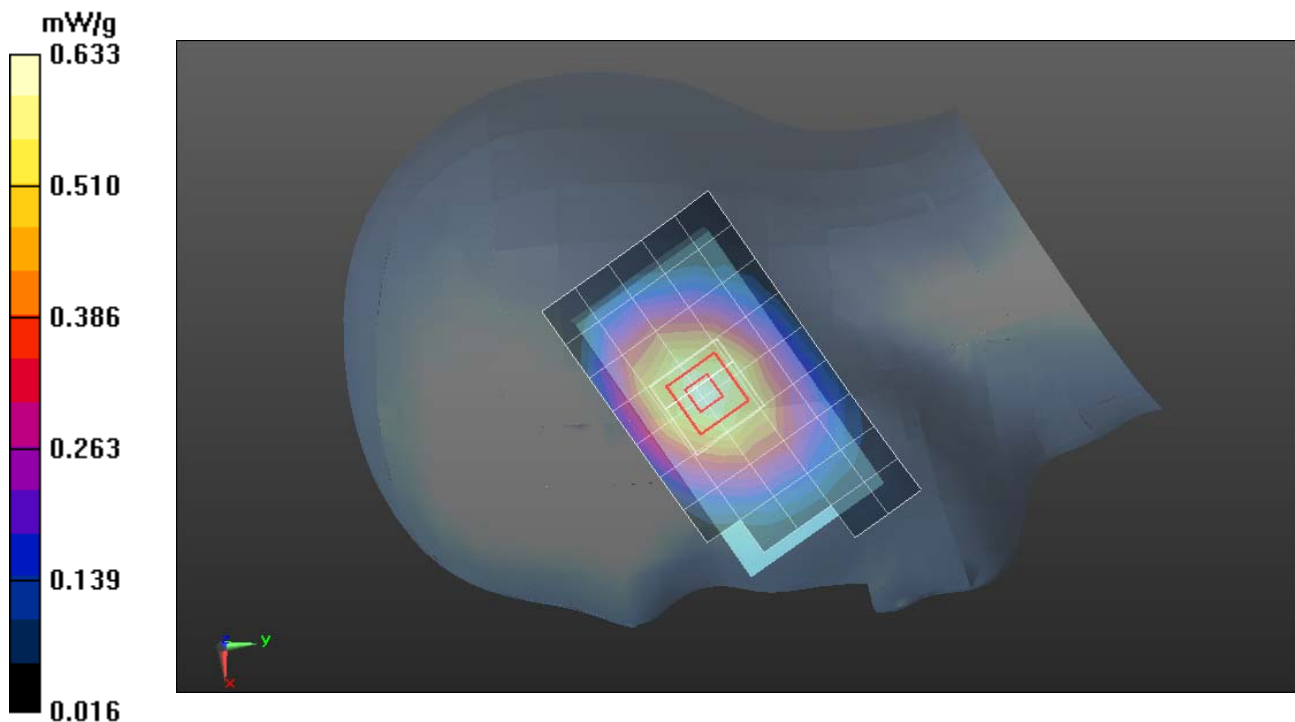



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

PCS 1900-Left Head Cheek High CH810

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1910\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/Left Head Cheek High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.533 mW/g


PCS1900/Left Head Cheek High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.367 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.533 mW/g; SAR(10 g) = 0.237mW/g

Maximum value of SAR (measured) = 0.628 mW/g

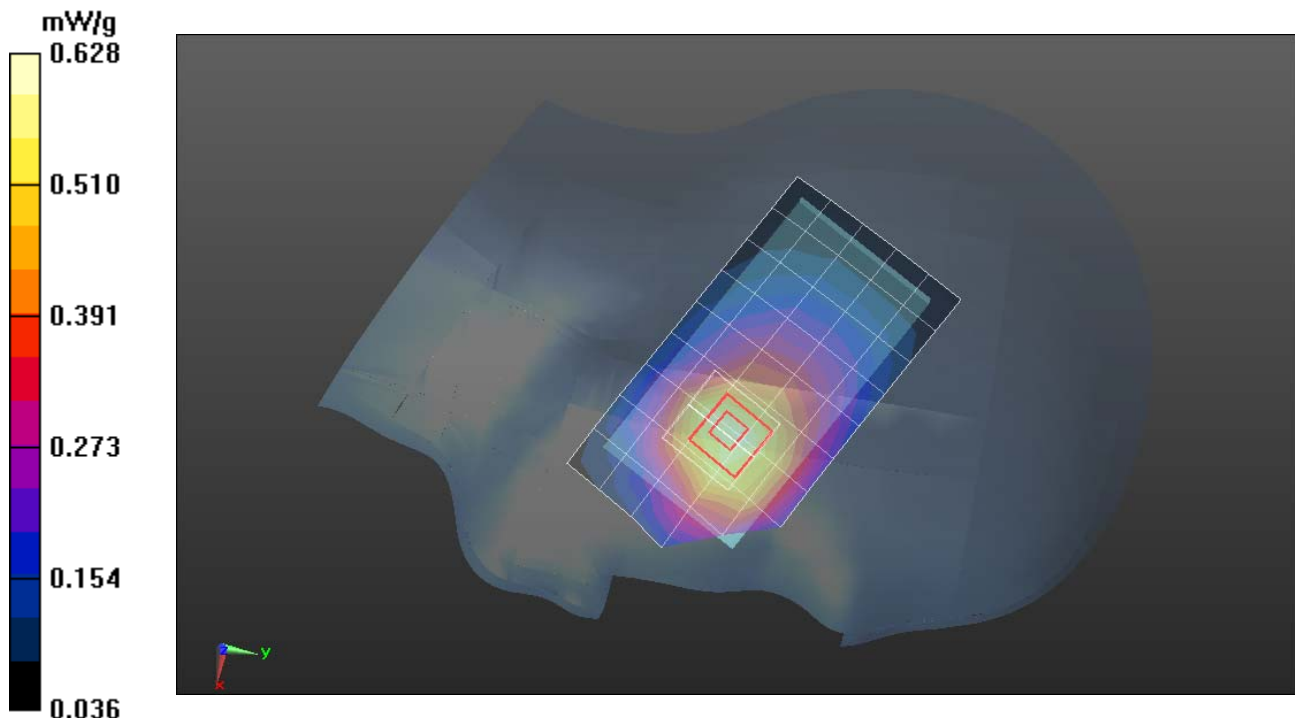



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

PCS 1900-Left Head Tilted High CH810

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1910\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/Left Head Tilted High CH810/Area Scan (6x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.454 mW/g


PCS1900/Left Head Tilted High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.272 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.360 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

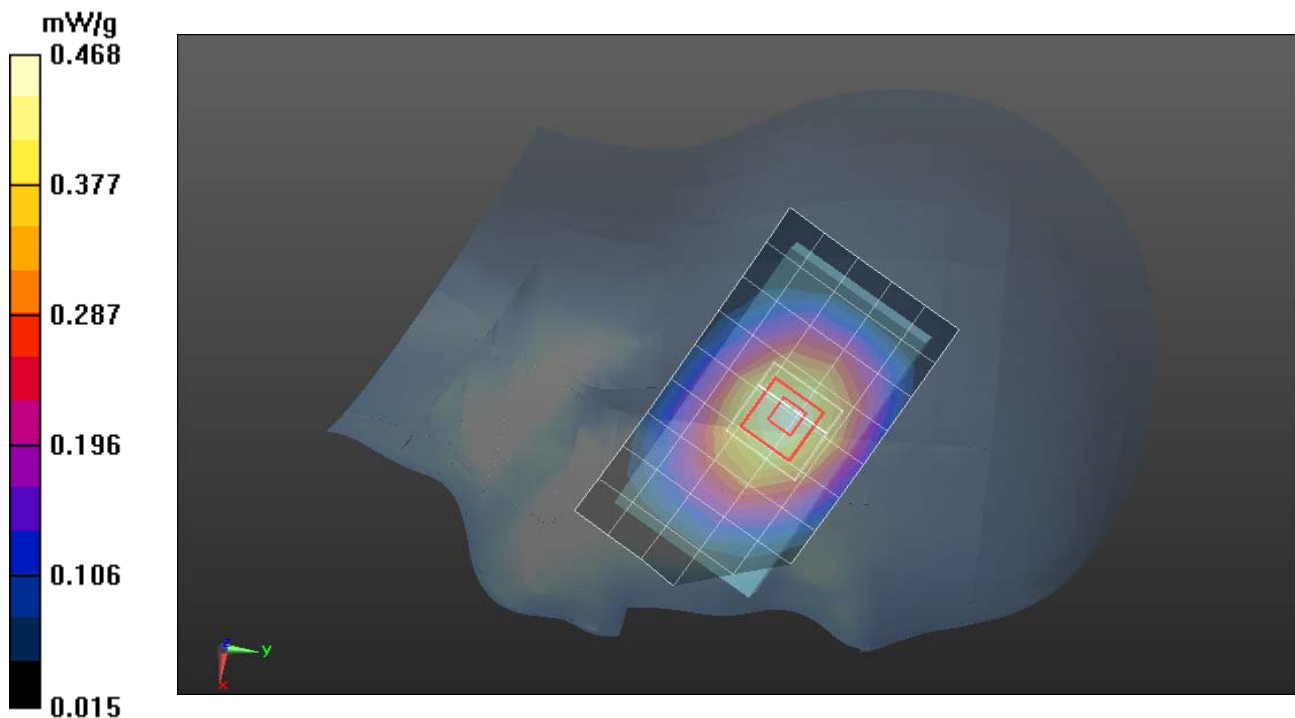



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GSM 850-Body Up High CH251

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Up High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.446 mW/g


GSM 850/GSM850 Body Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.215 V/m; Power Drift = -0.0017 dB

Peak SAR (extrapolated) = 0.866 W/kg

SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.343 mW/g

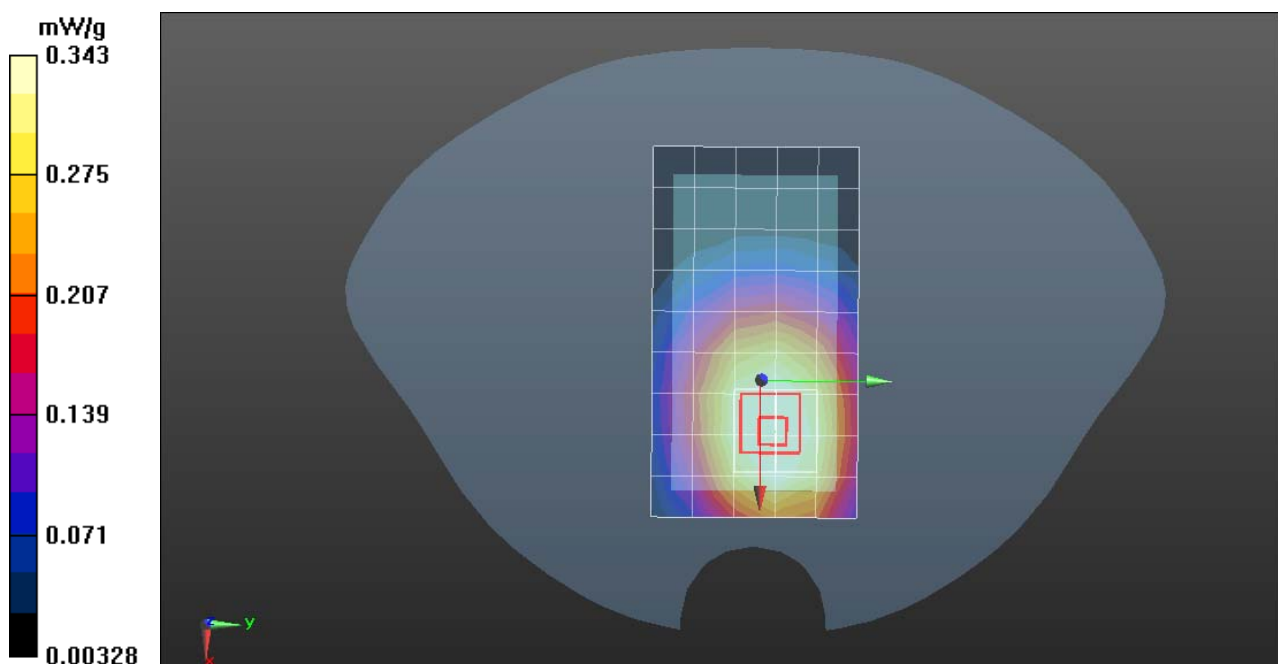



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GSM 850-Body Down High CH251

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.6$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Down High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.707 mW/g


GSM 850/GSM850 Body Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.161 V/m; Power Drift = -0.0046 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.549 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.655 mW/g

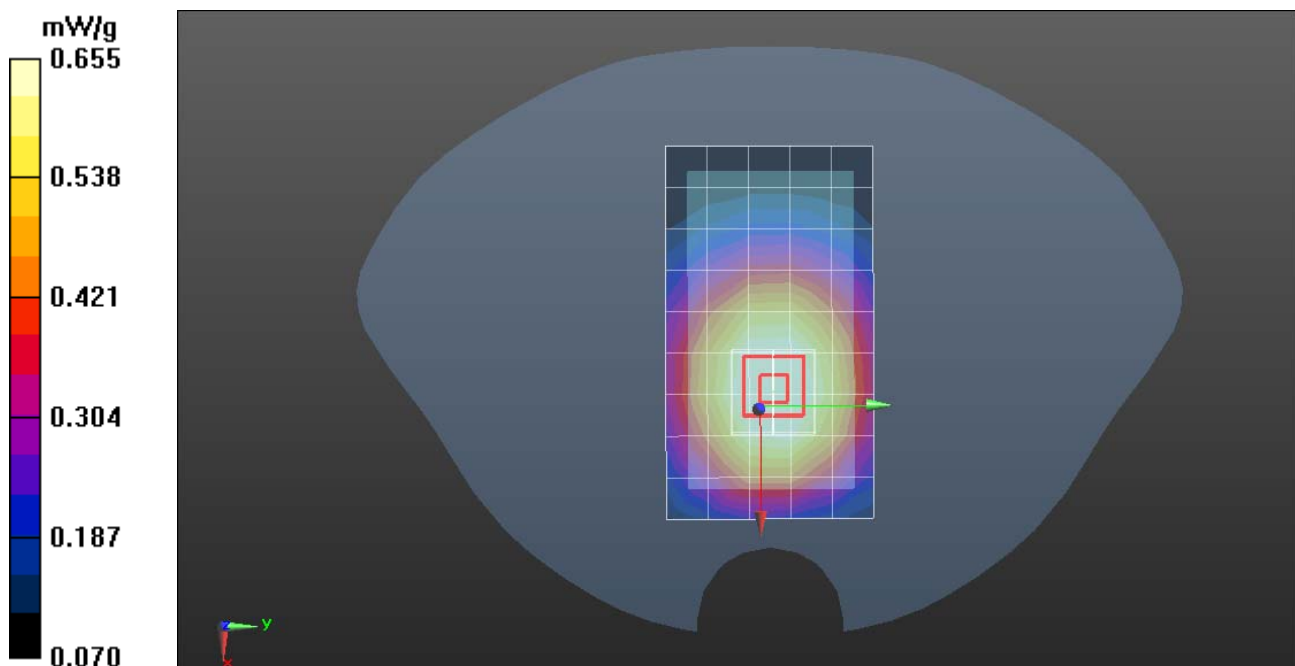



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GPRS 850-Body Up Low CH251

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Communication System PAR: 6.02 dB

Medium parameters used (interpolated): $f = 848.6$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55.628$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS 850/GPRS850 Body Up Low CH251/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.327 mW/g


GPRS 850/GPRS850 Body Up Low CH251/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.903 V/m; Power Drift = 0.0022 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

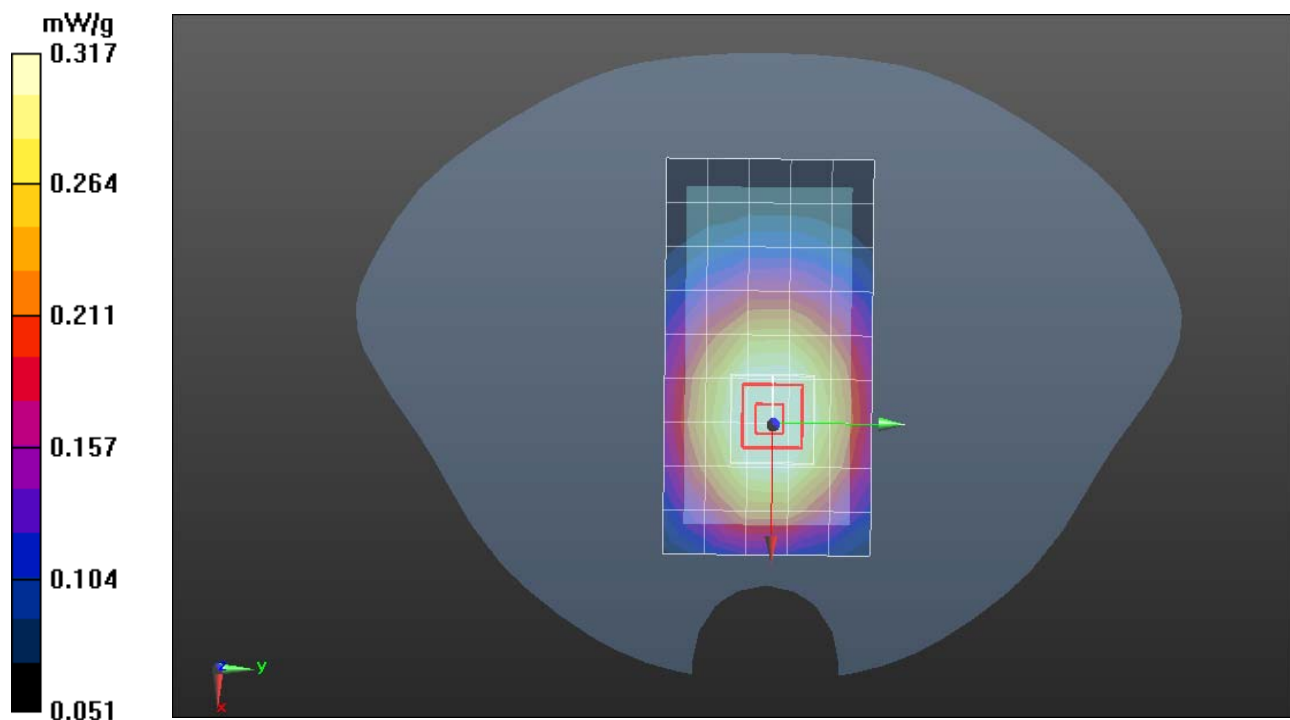



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GPRS 850-Body Down Low CH251

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Communication System PAR: 6.02 dB

Medium parameters used (interpolated): $f = 848.6$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55.628$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS 850/GPRS850 Body Down Low CH251/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.808 mW/g



GPRS 850/GPRS850 Body Down Low CH251/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.993 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.084 W/kg

SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.324 mW/g

Maximum value of SAR (measured) = 0.812 mW/g

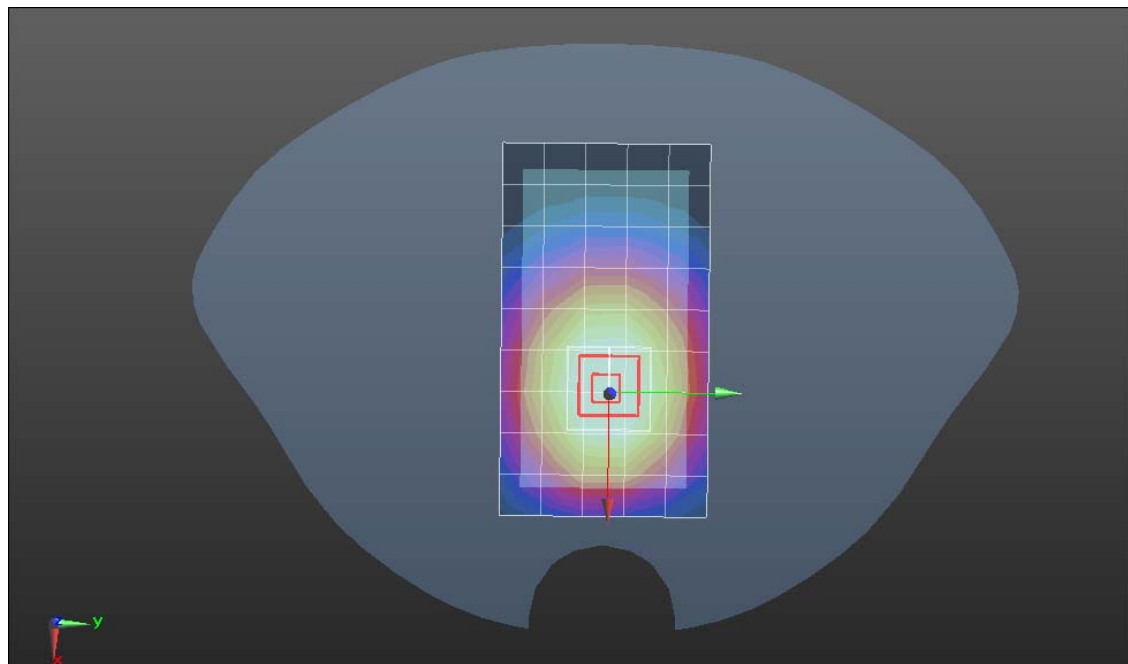



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

PCS1900-Body Up High CH810

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1910\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ PCS1900 Body Up High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$,
 $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.380 mW/g


PCS1900/ PCS1900 Body Up High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.177 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.381 mW/g

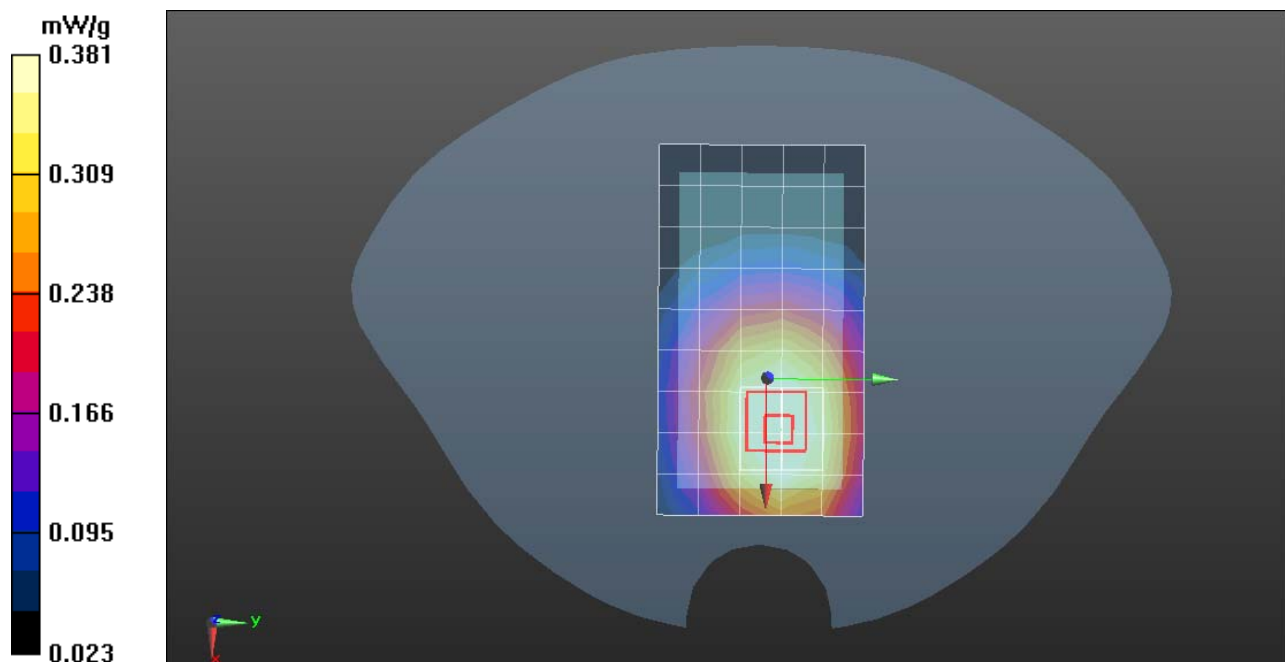



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

PCS1900-Body Down High CH810

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1910\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ PCS1900 Body Down High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.753 mW/g

PCS1900/ PCS1900 Body Down High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.972 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.127 W/kg

SAR(1 g) = 0.598 mW/g; SAR(10 g) = 0.376 mW/g

Maximum value of SAR (measured) = 0.847 mW/g

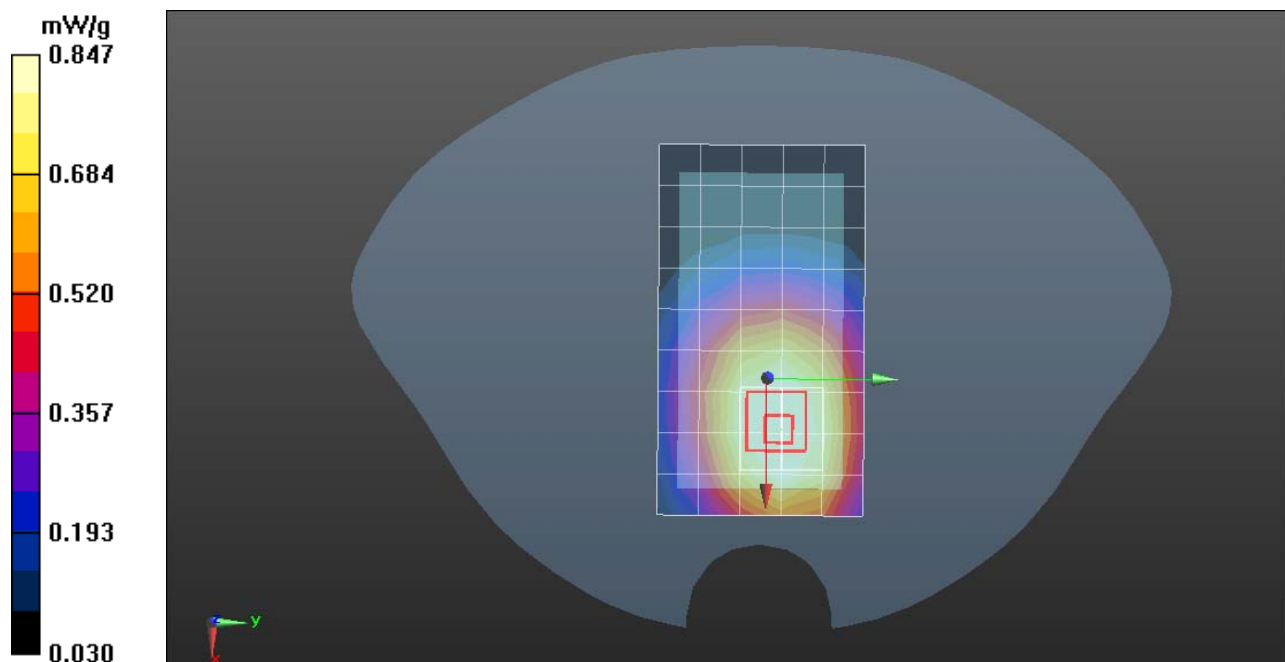



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GPRS1900-Body Up High CH810

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System PAR: 6.02 dB

Medium parameters used: $f = 1910\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/GPRS1900 Body Up High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.290 mW/g


GPRS1900/GPRS1900 Body Up High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.728 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

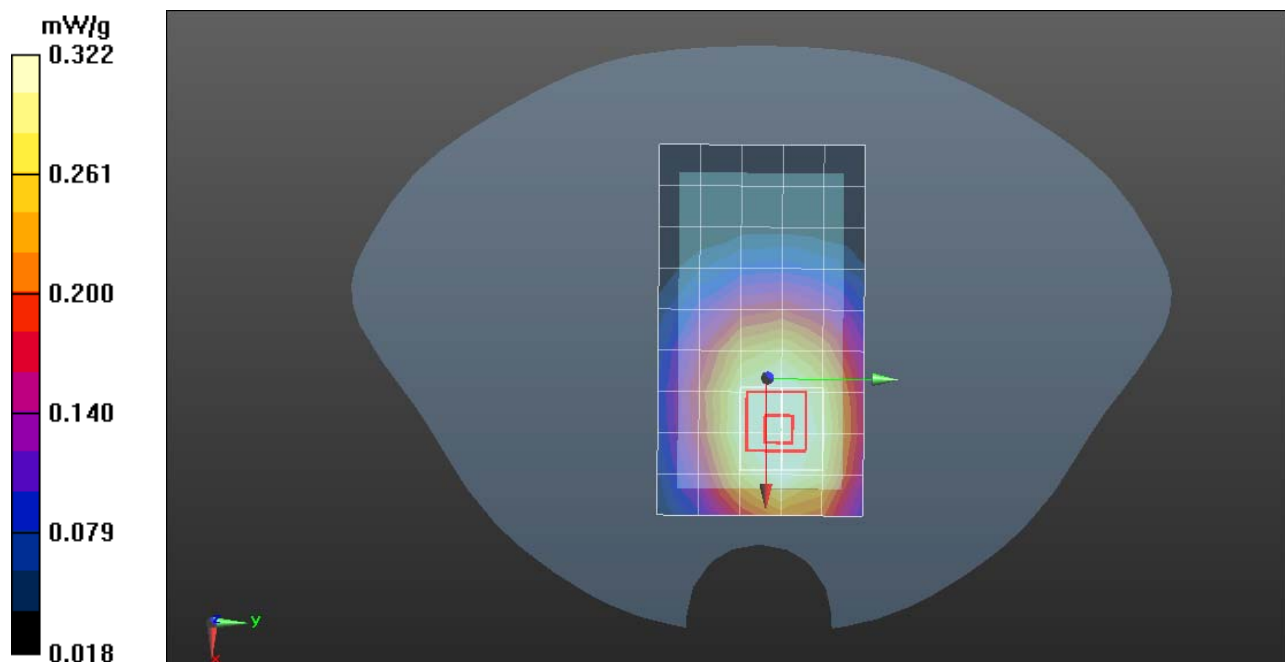



Test Laboratory: Compliance Certification Services Inc.

April 29, 2012

GPRS1900-Body Down High CH810

DUT: Mobile Phone; Type: Octagon 7700 ; Serial: 357470005665264

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System PAR: 6.02 dB

Medium parameters used: $f = 1910\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/GPRS1900 Body Down High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.701 mW/g

GPRS1900/GPRS1900 Body Down High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.020 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.138 W/kg

SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.835 mW/g

