

TEST REPORT

Reference No...... : WTS16S0857819-2E V1
FCC ID : N2GSL452
Applicant..... : DOPPIO MOBILE INTERNATIONAL LIMITED
Address..... : ROOM 1708,17/f HART AVENUE PLAZA,5-9 HART AVENUE
TISM SHA TSUI, Kowloon, Hongkong
Manufacturer : TEM MOBILE LIMITED
Address..... : No 1708, Cangsong Building, Tairan 6 Road, Futian ShenZhen,
China.
Product Name..... : Mobile Phone
Model No...... : SL452
Brand..... : doppio
Standards..... : FCC CFR47 Part 15.247:2015
Date of Receipt sample : Aug. 08, 2016
Date of Test : Aug. 09 - Sep. 02, 2016
Date of Issue..... : Sep. 02, 2016
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 REPORT REVISION HISTORY	5
5 GENERAL INFORMATION.....	6
5.1 GENERAL DESCRIPTION OF E.U.T.	6
5.2 DETAILS OF E.U.T.	6
5.3 CHANNEL LIST	7
5.4 TEST MODE	8
5.5 TEST FACILITY	9
6 EQUIPMENT USED DURING TEST	10
6.1 EQUIPMENTS LIST	10
6.2 DESCRIPTION OF SUPPORT UNITS	11
6.3 MEASUREMENT UNCERTAINTY	11
6.4 TEST EQUIPMENT CALIBRATION	11
7 CONDUCTED EMISSION	12
7.1 E.U.T. OPERATION	12
7.2 EUT SETUP.....	12
7.3 MEASUREMENT DESCRIPTION	12
7.4 CONDUCTED EMISSION TEST RESULT	13
8 RADIATED EMISSIONS.....	17
8.1 EUT OPERATION.....	17
8.2 TEST SETUP	18
8.3 SPECTRUM ANALYZER SETUP	19
8.4 TEST PROCEDURE	20
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	20
8.6 SUMMARY OF TEST RESULTS	21
9 CONDUCTED SPURIOUS EMISSIONS.....	37
9.1 TEST PROCEDURE	37
9.2 TEST RESULT	38
10 BAND EDGE MEASUREMENT	61
10.1 TEST PRODUCE	61
10.2 TEST RESULT	62
11 6 DB BANDWIDTH MEASUREMENT	67
11.1 TEST PROCEDURE:.....	67
11.2 TEST RESULT:	67
12 MAXIMUM PEAK OUTPUT POWER	76
12.1 TEST PROCEDURE:.....	76
12.2 TEST RESULT:	77
13 POWER SPECTRAL DENSITY	86
13.1 TEST PROCEDURE:.....	86
13.2 TEST RESULT:	86

14 ANTENNA REQUIREMENT 95

15 RF EXPOSURE..... 96

4 Report Revision History

Report No.	Report Version	Description	Issue Date
WTS16S0857819-2E	NONE	Original	Aug. 29, 2016
WTS16S0857819-2E	V1	Version 1	Sep. 02, 2016

5 General Information

5.1 General Description of E.U.T.

Product Name	: Mobile Phone
Model No.	: SL452
Model Description	: N/A
GSM Band(s)	: GSM 850/900/1800/1900MHz
GPRS/EGPRS Class	: 12
WCDMA Band(s)	: FDD Band II/V
LTE Bnad(s)	: LTE Band 2/4
Wi-Fi Specification	: 2.4G: 802.11b/g/n HT20 HT40
Bluetooth Version	: Bluetooth v4.0 with BLE
GPS	: Support
NFC	: N/A
Hardware Version	: FD533MB
Software Version	: full_tem6737m_65_m0-eng 6.0 MRA58K
Storage Location	: Internal Storage

5.2 Details of E.U.T.

Operation Frequency	: GSM/GPRS/EGPRS 850: 824~849MHz PCS/GPRS/EGPRS 1900: 1850~1910MHz WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz Bluetooth: 2402~2480MHz
Max. RF output power	: GSM 850: 32.71dBm PCS1900: 29.82dBm WCDMA Band II: 22.76dBm WCDMA Band V: 22.56dBm LTE Band 2: 22.95dBm LTE Band 4: 22.99dBm WiFi(2.4G): 9.48dBm Bluetooth: 5.53dBm
Type of Modulation	: GSM,GPRS: GMSK EDGE: GMSK, 8PSK WCDMA: BPSK

	LTE: QPSK, 16QAM
	WiFi: CCK, OFDM
	Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK
Antenna installation	: GSM/WCDMA/LTE: internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain	: GSM 850: 1.2dBi PCS1900: 1.4dBi WCDMA Band II: 1.4dBi WCDMA Band V: 1.2dBi LTE Band 2: 1.4dBi LTE Band 4: 1.4dBi WiFi(2.4G): 1.8dBi Bluetooth: 1.8dBi
Technical Data	: Battery DC 3.7V, 1800mAh DC 5V, 1.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.2A)
Adapter	: Manufacture: SHENZHEN EAST SUN ELECTRONIC CO.,LTD. Model No.: DCS38-0501000

5.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

5.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions at Mains Terminals Disturbance Voltage						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2015	Sep.14,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2015	Sep.14,2016
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2015	Sep.14,2016
4.	Cable	LARGE	RF300	-	Sep.15,2015	Sep.14,2016
3m Semi-anechoic Chamber for Radiation						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2015	Sep.14,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2016	Apr.17,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2015	Sep.14,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2016	Apr.17,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	669	Apr.18,2016	Apr.17,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2016	Mar.16,2017
8	Coaxial Cable (above 1GHz)	Top	1000MHz-25GHz	EW02014-7	Apr.09,2016	Apr.08,2017
9	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.15,2015	Sep.14,2016
10	Universal Radio Communication Tester	R&S	CMU 200	112461	Apr.10,2016	Apr.09,2017
11	Signal Generator	R&S	SMR20	100046	Sep.15,2015	Sep.14,2016
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2015	Sep.14,2016
3.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	Sep.15,2015	Sep.14,2016

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in WIFI link mode, the worst data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

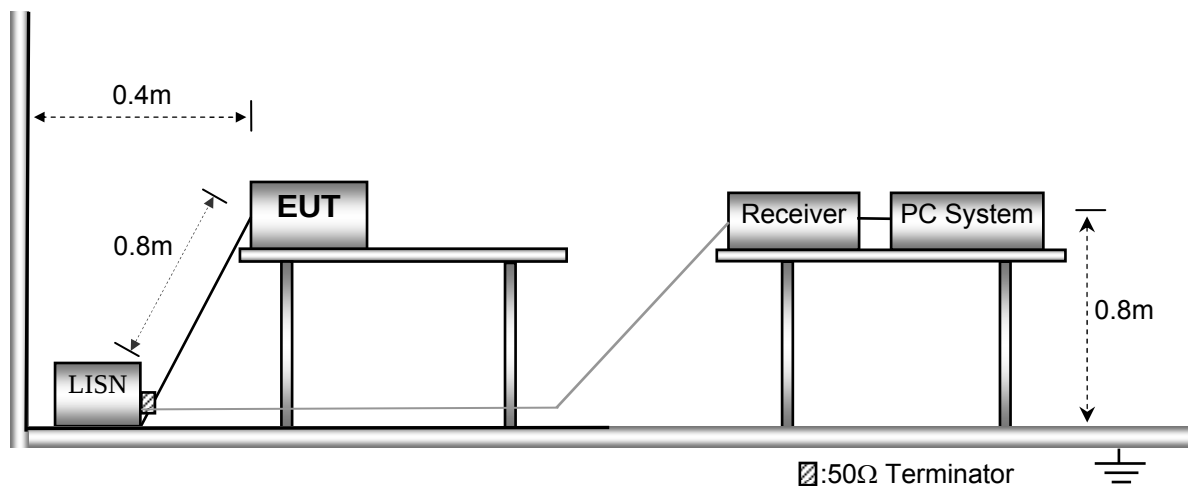

7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode

Live line:

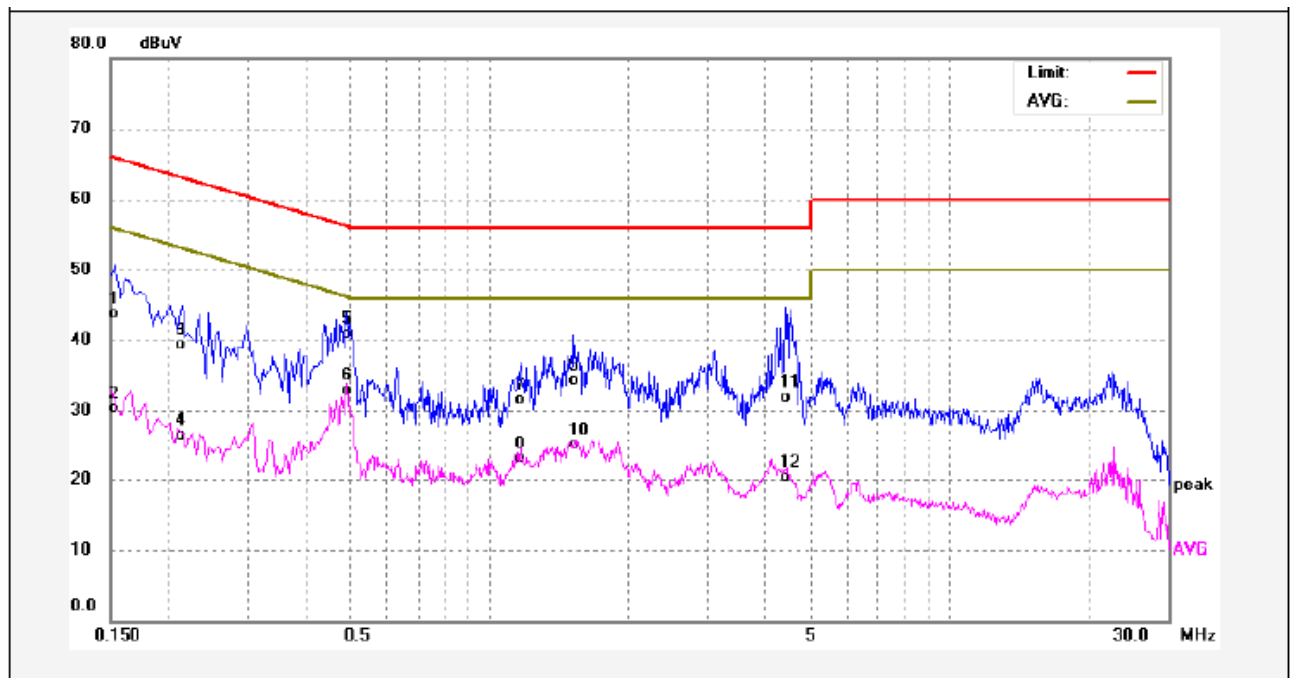


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	33.45	10.29	43.74	65.78	-22.04	QP	
2	0.1539	20.06	10.29	30.35	55.78	-25.43	AVG	
3	0.2140	28.97	10.26	39.23	63.04	-23.81	QP	
4	0.2140	16.20	10.26	26.46	53.04	-26.58	AVG	
5	0.4900	30.66	10.25	40.91	56.17	-15.26	QP	
6	0.4900	22.66	10.25	32.91	46.17	-13.26	AVG	
7	1.1660	21.01	10.41	31.42	56.00	-24.58	QP	
8	1.1660	12.62	10.41	23.03	46.00	-22.97	AVG	
9	1.5220	23.87	10.43	34.30	56.00	-21.70	QP	
10	1.5220	14.66	10.43	25.09	46.00	-20.91	AVG	
11	4.4100	21.37	10.52	31.89	56.00	-24.11	QP	
12	4.4100	9.78	10.52	20.30	46.00	-25.70	AVG	

Neutral line:

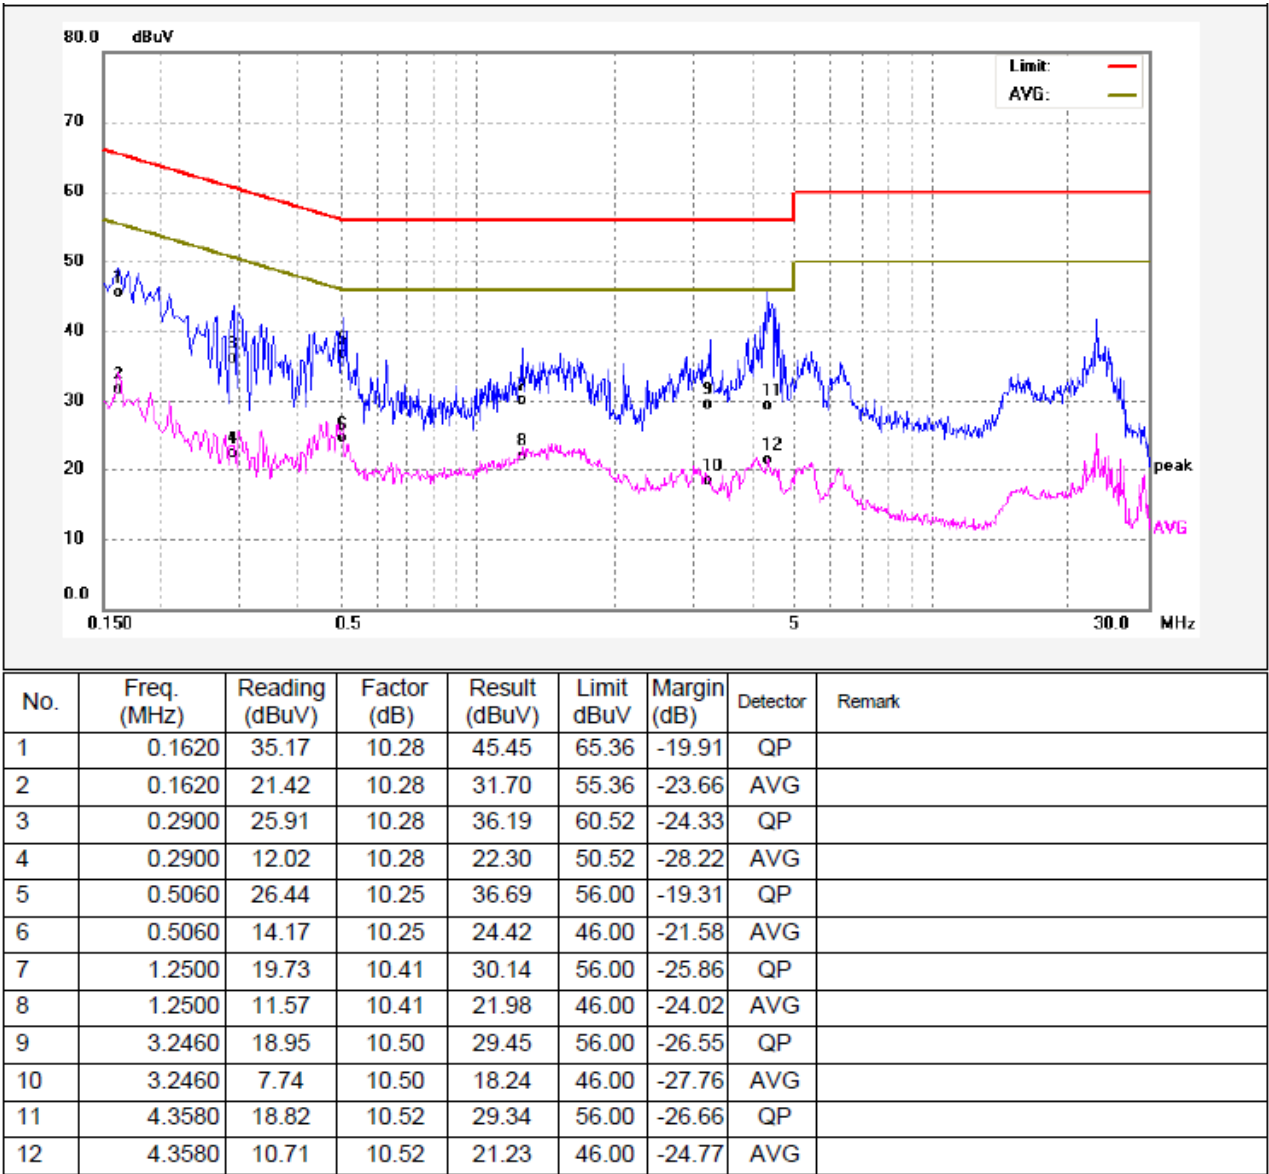


Worst Mode: BLE mode

Live line:

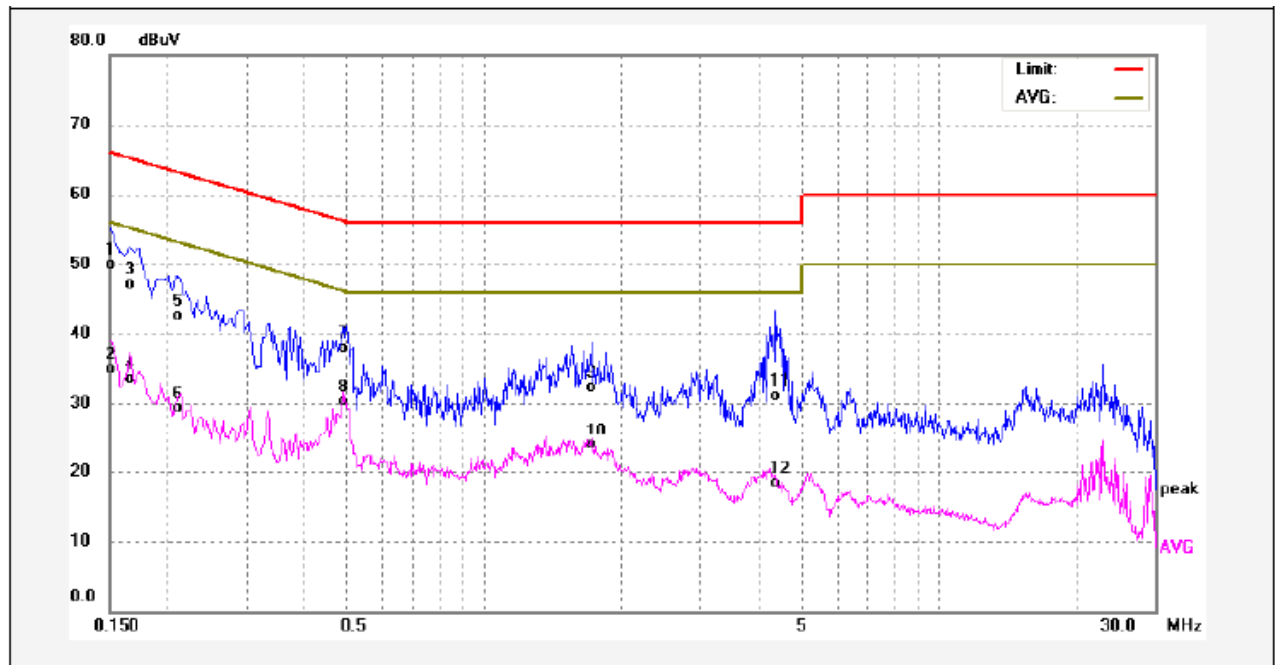

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	39.62	10.29	49.91	65.99	-16.08	QP	
2	0.1500	24.55	10.29	34.84	55.99	-21.15	AVG	
3	0.1660	36.90	10.28	47.18	65.15	-17.97	QP	
4	0.1660	23.14	10.28	33.42	55.15	-21.73	AVG	
5	0.2100	32.23	10.26	42.49	63.20	-20.71	QP	
6	0.2100	19.09	10.26	29.35	53.20	-23.85	AVG	
7	0.4980	27.57	10.25	37.82	56.03	-18.21	QP	
8	0.4980	20.06	10.25	30.31	46.03	-15.72	AVG	
9	1.7180	21.89	10.45	32.34	56.00	-23.66	QP	
10	1.7180	13.39	10.45	23.84	46.00	-22.16	AVG	
11	4.3980	20.61	10.52	31.13	56.00	-24.87	QP	
12	4.3980	7.81	10.52	18.33	46.00	-27.67	AVG	

Neutral line:

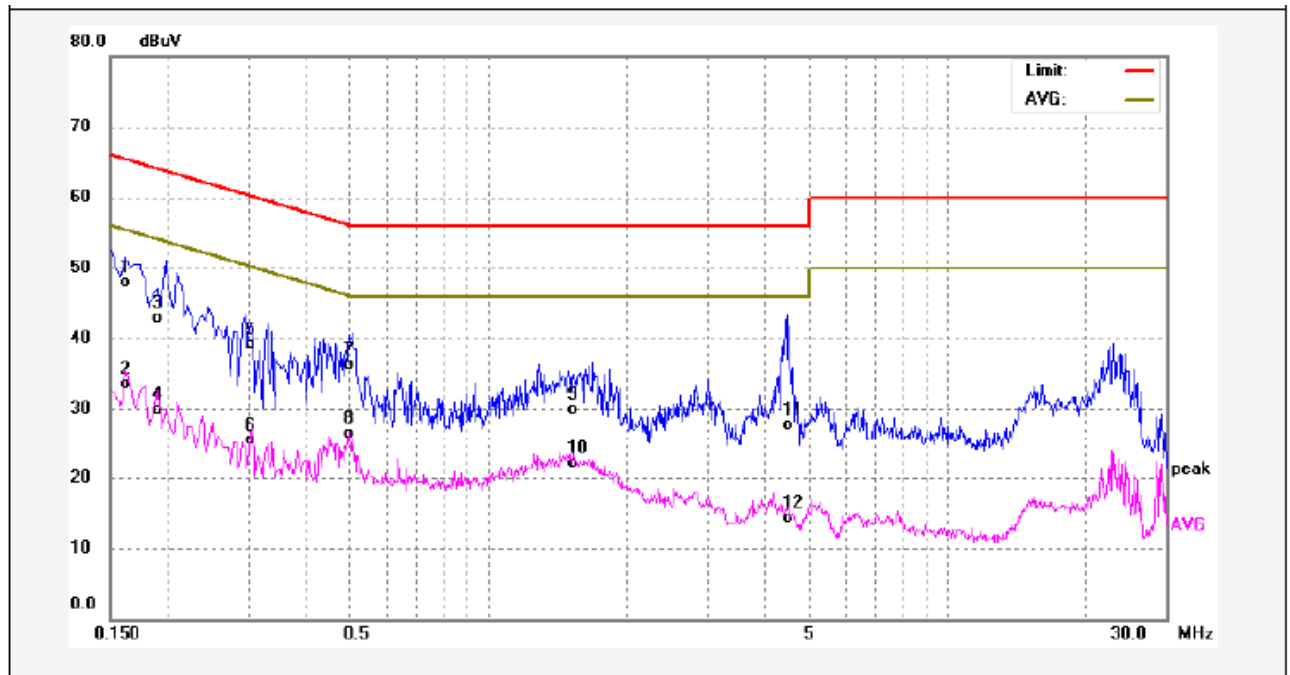

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1620	37.63	10.28	47.91	65.36	-17.45	QP	
2	0.1620	23.32	10.28	33.60	55.36	-21.76	AVG	
3	0.1900	32.70	10.27	42.97	64.03	-21.06	QP	
4	0.1900	19.65	10.27	29.92	54.03	-24.11	AVG	
5	0.3060	28.89	10.28	39.17	60.08	-20.91	QP	
6	0.3060	15.21	10.28	25.49	50.08	-24.59	AVG	
7	0.4980	26.05	10.25	36.30	56.03	-19.73	QP	
8	0.4980	16.34	10.25	26.59	46.03	-19.44	AVG	
9	1.5300	19.43	10.43	29.86	56.00	-26.14	QP	
10	1.5300	11.60	10.43	22.03	46.00	-23.97	AVG	
11	4.4780	17.18	10.52	27.70	56.00	-28.30	QP	
12	4.4780	3.71	10.52	14.23	46.00	-31.77	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in WIFI link mode, the test data were shown in the report.


8.2 Test Setup


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.

The test setup for emission measurement below 30MHz.

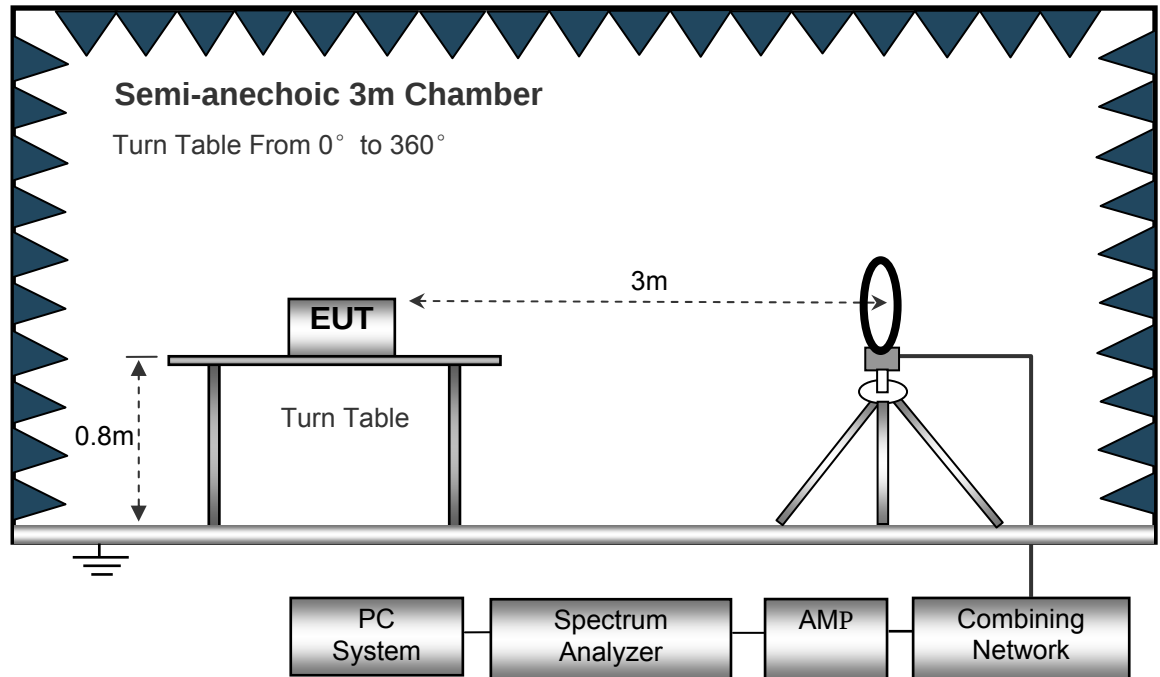

The test setup for emission measurement from 30 MHz to 1 GHz.

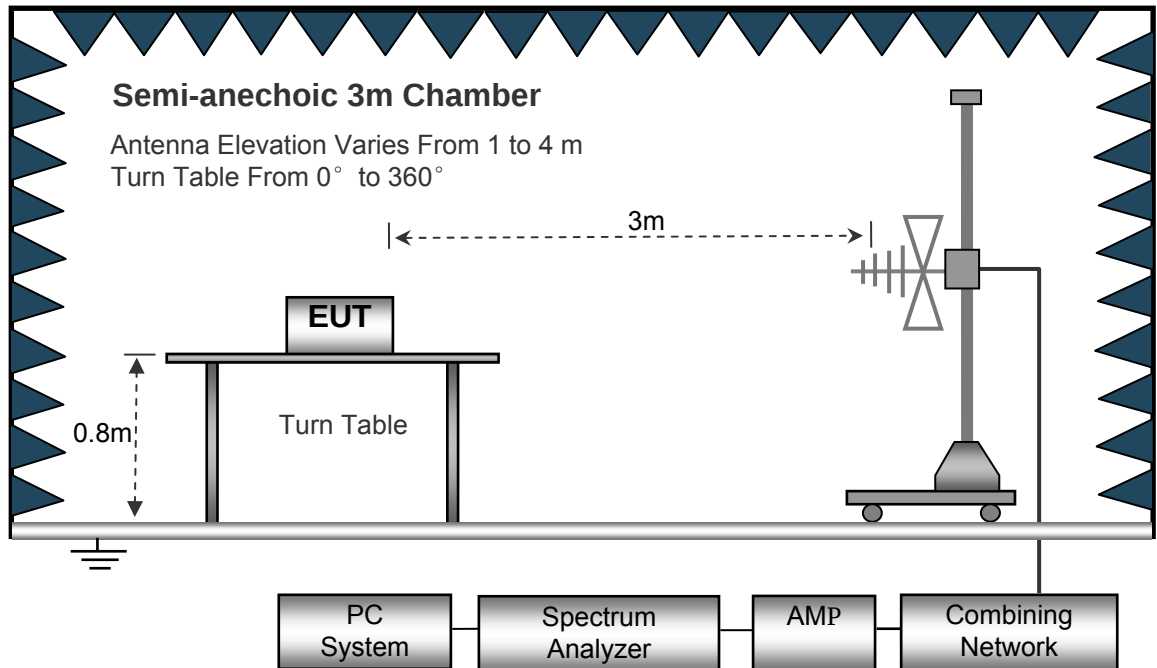

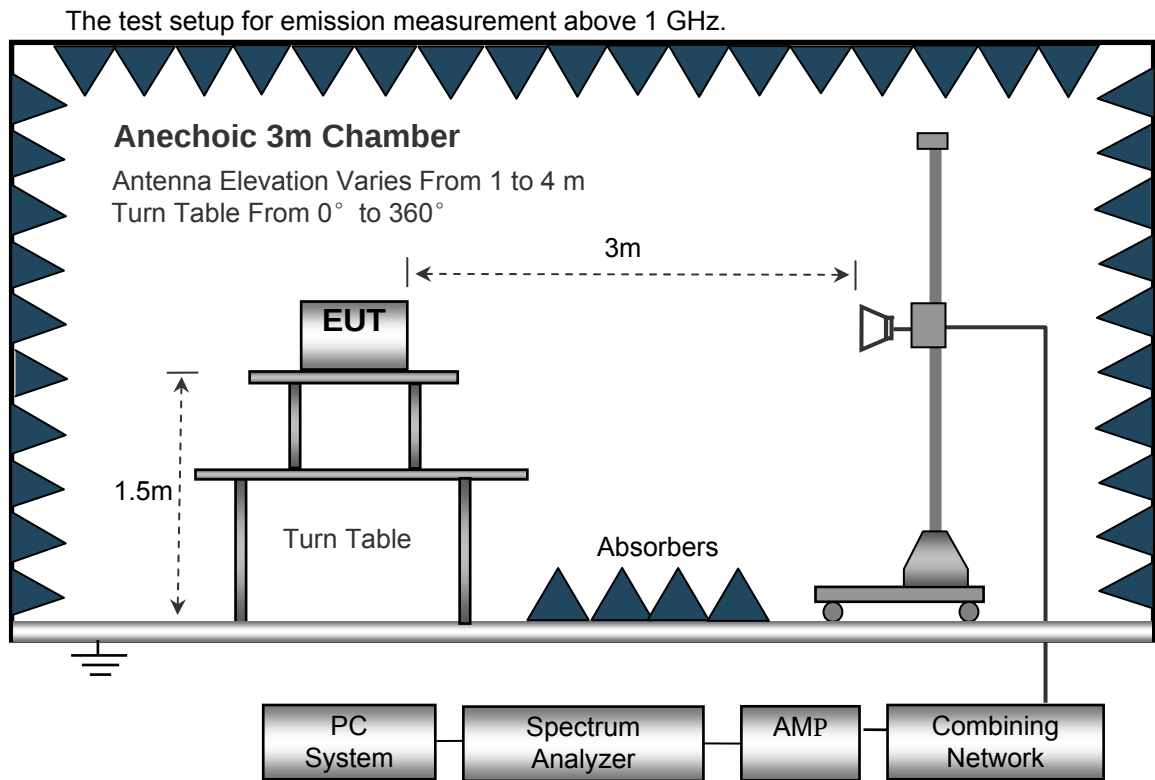

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth..... 10kHz
Video Bandwidth..... 10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 100kHz
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 3MHz
Detector Ave.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Wifi:

Test Frequency: 9KHz~26MHz

Remark: only the worst data (middle CH mode) were reported

Frequency	Measurement results dBμV @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dBμV/m @30m	Limits dBμV/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.230	24.68	QP	21.47	40.00	6.15	29.54	-23.39
8.501	26.35	QP	21.50	40.00	7.85	29.54	-21.69
26.587	25.13	QP	21.25	40.00	6.38	29.54	-23.16
802.11g							
6.254	25.02	QP	21.47	40.00	6.49	29.54	-23.05
8.640	26.14	QP	21.50	40.00	7.64	29.54	-21.90
26.920	24.09	QP	21.25	40.00	5.34	29.54	-24.20
802.11n(HT20)							
6.280	24.96	QP	21.47	40.00	6.43	29.54	-23.11
8.540	26.51	QP	21.50	40.00	8.01	29.54	-21.53
25.630	25.33	QP	21.25	40.00	6.58	29.54	-22.96
802.11n(HT40)							
6.021	24.96	QP	21.84	40.00	6.80	29.54	-22.74
8.304	26.51	QP	21.02	40.00	7.53	29.54	-22.01
26.127	25.33	QP	20.55	40.00	5.88	29.54	-23.66

Test Frequency : 26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
223.45	41.05	QP	157	2.0	H	-11.62	29.43	46.00	-16.57
223.45	36.26	QP	240	1.1	V	-11.62	24.64	46.00	-21.36
4824.00	50.44	PK	103	1.1	V	-1.06	49.38	74.00	-24.62
4824.00	46.32	Ave	103	1.1	V	-1.06	45.26	54.00	-8.74
7236.00	41.08	PK	293	1.1	H	1.33	42.41	74.00	-31.59
7236.00	41.96	Ave	293	1.1	H	1.33	43.29	54.00	-10.71
2315.03	45.18	PK	3	1.4	V	-13.19	31.99	74.00	-42.01
2315.03	38.97	Ave	3	1.4	V	-13.19	25.78	54.00	-28.22
2371.36	43.95	PK	160	1.6	H	-13.14	30.81	74.00	-43.19
2371.36	38.36	Ave	160	1.6	H	-13.14	25.22	54.00	-28.78
2494.55	44.23	PK	250	1.5	V	-13.08	31.15	74.00	-42.85
2494.55	36.31	Ave	250	1.5	V	-13.08	23.23	54.00	-30.77

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	41.42	QP	234	1.4	H	-11.62	29.80	46.00	-16.20
223.45	37.73	QP	243	1.4	V	-11.62	26.11	46.00	-19.89
4874.00	50.67	PK	57	1.6	V	-0.62	50.05	74.00	-23.95
4874.00	44.89	Ave	57	1.6	V	-0.62	44.27	54.00	-9.73
7311.00	39.67	PK	199	1.5	H	2.21	41.88	74.00	-32.12
7311.00	40.78	Ave	199	1.5	H	2.21	42.99	54.00	-11.01
2322.19	45.08	PK	147	1.2	V	-13.19	31.89	74.00	-42.11
2322.19	39.50	Ave	147	1.2	V	-13.19	26.31	54.00	-27.69
2385.87	44.07	PK	28	1.5	H	-13.14	30.93	74.00	-43.07
2385.87	37.86	Ave	28	1.5	H	-13.14	24.72	54.00	-29.28
2489.62	43.27	PK	294	1.3	V	-13.08	30.19	74.00	-43.81
2489.62	38.72	Ave	294	1.3	V	-13.08	25.64	54.00	-28.36

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
223.45	42.80	QP	195	1.6	H	-11.62	31.18	46.00	-14.82
223.45	37.84	QP	11	1.4	V	-11.62	26.22	46.00	-19.78
4924.00	51.39	PK	313	1.1	V	-0.24	51.15	74.00	-22.85
4924.00	44.25	Ave	313	1.1	V	-0.24	44.01	54.00	-9.99
7386.00	40.07	PK	233	1.6	H	2.84	42.91	74.00	-31.09
7386.00	39.52	Ave	233	1.6	H	2.84	42.36	54.00	-11.64
2320.36	45.02	PK	85	1.7	V	-13.19	31.83	74.00	-42.17
2320.36	38.98	Ave	85	1.7	V	-13.19	25.79	54.00	-28.21
2368.06	44.18	PK	218	1.6	H	-13.14	31.04	74.00	-42.96
2368.06	38.66	Ave	218	1.6	H	-13.14	25.52	54.00	-28.48
2491.41	43.52	PK	320	1.9	V	-13.08	30.44	74.00	-43.56
2491.41	37.16	Ave	320	1.9	V	-13.08	24.08	54.00	-29.92

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
223.45	41.71	QP	285	1.6	H	-11.62	30.09	46.00	-15.91
223.45	37.07	QP	84	1.6	V	-11.62	25.45	46.00	-20.55
4824.00	51.17	PK	10	2.0	V	-1.06	50.11	74.00	-23.89
4824.00	44.66	Ave	10	2.0	V	-1.06	43.60	54.00	-10.40
7236.00	40.65	PK	318	1.9	H	1.33	41.98	74.00	-32.02
7236.00	38.77	Ave	318	1.9	H	1.33	40.10	54.00	-13.90
2310.12	45.27	PK	265	1.7	V	-13.19	32.08	74.00	-41.92
2310.12	38.33	Ave	265	1.7	V	-13.19	25.14	54.00	-28.86
2367.23	42.27	PK	118	1.5	H	-13.14	29.13	74.00	-44.87
2367.23	37.81	Ave	118	1.5	H	-13.14	24.67	54.00	-29.33
2485.20	42.97	PK	186	1.5	V	-13.08	29.89	74.00	-44.11
2485.20	36.87	Ave	186	1.5	V	-13.08	23.79	54.00	-30.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
223.45	40.77	QP	175	1.9	H	-11.62	29.15	46.00	-16.85
223.45	37.98	QP	258	1.6	V	-11.62	26.36	46.00	-19.64
4874.00	50.68	PK	191	1.7	V	-0.62	50.06	74.00	-23.94
4874.00	43.90	Ave	191	1.7	V	-0.62	43.28	54.00	-10.72
7311.00	39.49	PK	305	1.0	H	2.21	41.70	74.00	-32.30
7311.00	39.24	Ave	305	1.0	H	2.21	41.45	54.00	-12.55
2344.51	46.43	PK	269	1.4	V	-13.19	33.24	74.00	-40.76
2344.51	38.71	Ave	269	1.4	V	-13.19	25.52	54.00	-28.48
2364.37	43.51	PK	223	1.2	H	-13.14	30.37	74.00	-43.63
2364.37	37.03	Ave	223	1.2	H	-13.14	23.89	54.00	-30.11
2483.89	42.97	PK	118	1.5	V	-13.08	29.89	74.00	-44.11
2483.89	38.30	Ave	118	1.5	V	-13.08	25.22	54.00	-28.78

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
223.45	40.55	QP	258	1.6	H	-11.62	28.93	46.00	-17.07
223.45	37.32	QP	344	1.7	V	-11.62	25.70	46.00	-20.30
4924.00	51.94	PK	22	1.1	V	-0.24	51.70	74.00	-22.30
4924.00	42.51	Ave	22	1.1	V	-0.24	42.27	54.00	-11.73
7386.00	40.42	PK	1	1.3	H	2.84	43.26	74.00	-30.74
7386.00	38.64	Ave	1	1.3	H	2.84	41.48	54.00	-12.52
2323.47	45.88	PK	284	1.9	V	-13.19	32.69	74.00	-41.31
2323.47	37.21	Ave	284	1.9	V	-13.19	24.02	54.00	-29.98
2374.29	44.79	PK	306	1.5	H	-13.14	31.65	74.00	-42.35
2374.29	36.18	Ave	306	1.5	H	-13.14	23.04	54.00	-30.96
2498.53	42.75	PK	160	1.7	V	-13.08	29.67	74.00	-44.33
2498.53	36.93	Ave	160	1.7	V	-13.08	23.85	54.00	-30.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
223.45	40.93	QP	113	1.9	H	-11.62	29.31	46.00	-16.69
223.45	38.53	QP	17	1.2	V	-11.62	26.91	46.00	-19.09
4824.00	50.65	PK	22	1.1	V	-1.06	49.59	74.00	-24.41
4824.00	43.91	Ave	22	1.1	V	-1.06	42.85	54.00	-11.15
7236.00	41.18	PK	239	2.0	H	1.33	42.51	74.00	-31.49
7236.00	37.54	Ave	239	2.0	H	1.33	38.87	54.00	-15.13
2336.23	46.59	PK	294	1.1	V	-13.19	33.40	74.00	-40.60
2336.23	39.44	Ave	294	1.1	V	-13.19	26.25	54.00	-27.75
2366.12	43.07	PK	61	1.7	H	-13.14	29.93	74.00	-44.07
2366.12	37.99	Ave	61	1.7	H	-13.14	24.85	54.00	-29.15
2498.78	43.15	PK	190	1.3	V	-13.08	30.07	74.00	-43.93
2498.78	38.36	Ave	190	1.3	V	-13.08	25.28	54.00	-28.72

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
223.45	40.86	QP	312	1.6	H	-11.62	29.24	46.00	-16.76
223.45	39.30	QP	121	1.7	V	-11.62	27.68	46.00	-18.32
4874.00	51.97	PK	54	1.8	V	-0.62	51.35	74.00	-22.65
4874.00	43.89	Ave	54	1.8	V	-0.62	43.27	54.00	-10.73
7311.00	42.39	PK	249	1.1	H	2.21	44.60	74.00	-29.40
7311.00	37.02	Ave	249	1.1	H	2.21	39.23	54.00	-14.77
2335.97	46.15	PK	84	1.6	V	-13.19	32.96	74.00	-41.04
2335.97	38.74	Ave	84	1.6	V	-13.19	25.55	54.00	-28.45
2356.05	43.44	PK	233	1.8	H	-13.14	30.30	74.00	-43.70
2356.05	38.90	Ave	233	1.8	H	-13.14	25.76	54.00	-28.24
2484.08	43.42	PK	81	1.0	V	-13.08	30.34	74.00	-43.66
2484.08	36.09	Ave	81	1.0	V	-13.08	23.01	54.00	-30.99

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
223.45	39.93	QP	120	1.1	H	-11.62	28.31	46.00	-17.69
223.45	37.81	QP	249	1.5	V	-11.62	26.19	46.00	-19.81
4924.00	51.24	PK	255	1.8	V	-0.24	51.00	74.00	-23.00
4924.00	42.43	Ave	255	1.8	V	-0.24	42.19	54.00	-11.81
7386.00	42.68	PK	263	1.4	H	2.84	45.52	74.00	-28.48
7386.00	37.76	Ave	263	1.4	H	2.84	40.60	54.00	-13.40
2321.72	46.81	PK	325	2.0	V	-13.19	33.62	74.00	-40.38
2321.72	38.76	Ave	325	2.0	V	-13.19	25.57	54.00	-28.43
2383.32	43.88	PK	189	1.8	H	-13.14	30.74	74.00	-43.26
2383.32	37.17	Ave	189	1.8	H	-13.14	24.03	54.00	-29.97
2489.25	43.11	PK	44	1.5	V	-13.08	30.03	74.00	-43.97
2489.25	36.13	Ave	44	1.5	V	-13.08	23.05	54.00	-30.95

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) low channel 2422MHz									
223.45	40.70	QP	296	1.6	H	-11.62	29.08	46.00	-16.92
223.45	36.58	QP	39	1.9	V	-11.62	24.96	46.00	-21.04
4844.00	49.84	PK	196	1.0	V	-1.06	48.78	74.00	-25.22
4844.00	41.43	Ave	196	1.0	V	-1.06	40.37	54.00	-13.63
7266.00	40.58	PK	236	1.2	H	1.33	41.91	74.00	-32.09
7266.00	36.06	Ave	236	1.2	H	1.33	37.39	54.00	-16.61
2339.60	45.39	PK	128	1.9	V	-13.19	32.20	74.00	-41.80
2339.60	39.10	Ave	128	1.9	V	-13.19	25.91	54.00	-28.09
2351.76	42.34	PK	46	1.5	H	-13.14	29.20	74.00	-44.80
2351.76	37.05	Ave	46	1.5	H	-13.14	23.91	54.00	-30.09
2494.74	43.45	PK	150	1.4	V	-13.08	30.37	74.00	-43.63
2494.74	36.06	Ave	150	1.4	V	-13.08	22.98	54.00	-31.02

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) middle channel 2437MHz									
223.45	41.31	QP	72	1.2	H	-11.62	29.69	46.00	-16.31
223.45	36.96	QP	351	1.4	V	-11.62	25.34	46.00	-20.66
4874.00	50.06	PK	71	1.6	V	-0.62	49.44	74.00	-24.56
4874.00	41.36	Ave	71	1.6	V	-0.62	40.74	54.00	-13.26
7311.00	40.07	PK	173	2.0	H	2.21	42.28	74.00	-31.72
7311.00	37.01	Ave	173	2.0	H	2.21	39.22	54.00	-14.78
2338.33	45.89	PK	199	1.3	V	-13.19	32.70	74.00	-41.30
2338.33	39.64	Ave	199	1.3	V	-13.19	26.45	54.00	-27.55
2364.22	44.75	PK	302	2.0	H	-13.14	31.61	74.00	-42.39
2364.22	37.15	Ave	302	2.0	H	-13.14	24.01	54.00	-29.99
2484.32	43.96	PK	27	1.8	V	-13.08	30.88	74.00	-43.12
2484.32	37.42	Ave	27	1.8	V	-13.08	24.34	54.00	-29.66

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) High channel 2452MHz									
223.45	42.15	QP	320	1.5	H	-11.62	30.53	46.00	-15.47
223.45	37.91	QP	74	1.4	V	-11.62	26.29	46.00	-19.71
4904.00	49.32	PK	297	1.8	V	-0.24	49.08	74.00	-24.92
4904.00	40.52	Ave	297	1.8	V	-0.24	40.28	54.00	-13.72
7356.00	39.63	PK	145	1.7	H	2.84	42.47	74.00	-31.53
7356.00	37.70	Ave	145	1.7	H	2.84	40.54	54.00	-13.46
2317.52	46.90	PK	309	1.7	V	-13.19	33.71	74.00	-40.29
2317.52	39.63	Ave	309	1.7	V	-13.19	26.44	54.00	-27.56
2361.20	43.13	PK	101	1.6	H	-13.14	29.99	74.00	-44.01
2361.20	37.08	Ave	101	1.6	H	-13.14	23.94	54.00	-30.06
2499.96	43.91	PK	92	1.3	V	-13.08	30.83	74.00	-43.17
2499.96	38.58	Ave	92	1.3	V	-13.08	25.50	54.00	-28.50

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

BT BLE:**Test Frequency: 9KHz~30MHz**

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.500	25.34	QP	21.47	40.00	6.81	29.54	-22.73
8.750	26.13	QP	21.50	40.00	7.63	29.54	-21.91
26.389	24.02	QP	21.25	40.00	5.27	29.54	-24.27

Test Frequency : 26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
Low Channel 2402MHz									
268.32	36.89	QP	137	1.1	H	-13.35	23.54	46.00	-22.46
268.32	41.33	QP	50	1.9	V	-13.35	27.98	46.00	-18.02
4804.00	46.15	PK	36	1.6	V	-1.06	45.09	74.00	-28.91
4804.00	43.52	Ave	36	1.6	V	-1.06	42.46	54.00	-11.54
7206.00	40.62	PK	356	1.7	H	1.33	41.95	74.00	-32.05
7206.00	35.37	Ave	356	1.7	H	1.33	36.70	54.00	-17.30
2330.30	46.44	PK	222	1.9	V	-13.19	33.25	74.00	-40.75
2330.30	37.64	Ave	222	1.9	V	-13.19	24.45	54.00	-29.55
2389.54	43.46	PK	278	1.0	H	-13.14	30.32	74.00	-43.68
2389.54	36.70	Ave	278	1.0	H	-13.14	23.56	54.00	-30.44
2497.41	44.69	PK	76	1.4	V	-13.08	31.61	74.00	-42.39
2497.41	37.88	Ave	76	1.4	V	-13.08	24.80	54.00	-29.20

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Middle Channel 2440MHz									
268.32	37.79	QP	148	1.2	H	-13.35	24.44	46.00	-21.56
268.32	40.81	QP	279	1.9	V	-13.35	27.46	46.00	-18.54
4880.00	47.00	PK	91	1.8	V	-0.62	46.38	74.00	-27.62
4880.00	43.54	Ave	91	1.8	V	-0.62	42.92	54.00	-11.08
7320.00	40.89	PK	264	1.3	H	2.21	43.10	74.00	-30.90
7320.00	35.23	Ave	264	1.3	H	2.21	37.44	54.00	-16.56
2340.51	46.27	PK	103	1.2	V	-13.19	33.08	74.00	-40.92
2340.51	39.45	Ave	103	1.2	V	-13.19	26.26	54.00	-27.74
2387.15	42.56	PK	57	1.8	H	-13.14	29.42	74.00	-44.58
2387.15	36.61	Ave	57	1.8	H	-13.14	23.47	54.00	-30.53
2485.96	43.67	PK	89	1.6	V	-13.08	30.59	74.00	-43.41
2485.96	38.19	Ave	89	1.6	V	-13.08	25.11	54.00	-28.89

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
High Channel 2480MHz									
268.32	39.01	QP	44	1.1	H	-13.35	25.66	46.00	-20.34
268.32	41.56	QP	30	1.4	V	-13.35	28.21	46.00	-17.79
4960.00	47.24	PK	287	2.0	V	-0.24	47.00	74.00	-27.00
4960.00	44.34	Ave	287	2.0	V	-0.24	44.10	54.00	-9.90
7440.00	40.52	PK	205	1.8	H	2.84	43.36	74.00	-30.64
7440.00	35.57	Ave	205	1.8	H	2.84	38.41	54.00	-15.59
2320.68	45.67	PK	228	1.6	V	-13.19	32.48	74.00	-41.52
2320.68	37.25	Ave	228	1.6	V	-13.19	24.06	54.00	-29.94
2369.02	43.94	PK	134	1.5	H	-13.14	30.80	74.00	-43.20
2369.02	37.40	Ave	134	1.5	H	-13.14	24.26	54.00	-29.74
2488.03	42.49	PK	202	1.5	V	-13.08	29.41	74.00	-44.59
2488.03	36.73	Ave	202	1.5	V	-13.08	23.65	54.00	-30.35

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

9.2 Test Result


9KHz – 30MHz



802.11b



Low Channel

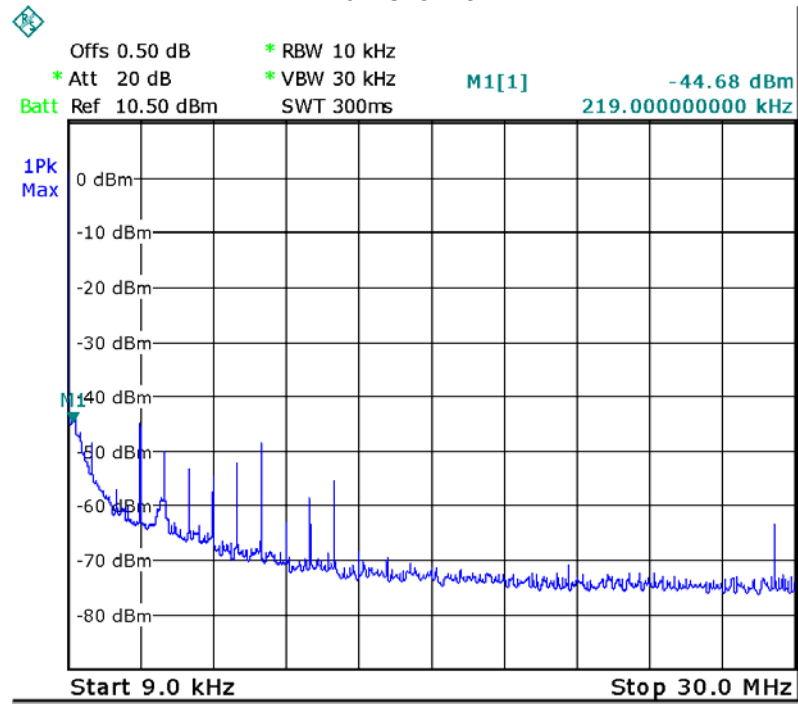

Middle Channel

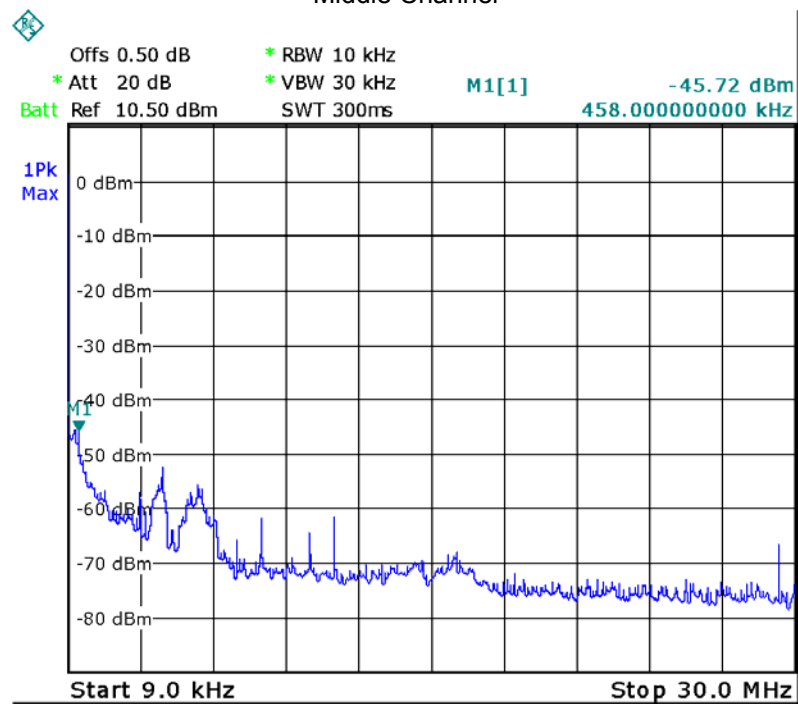


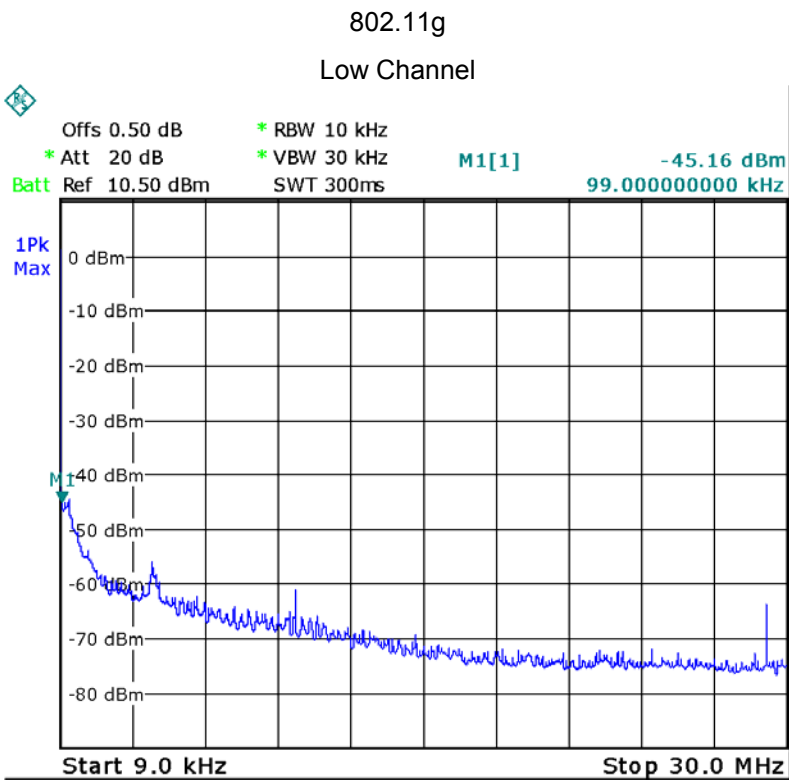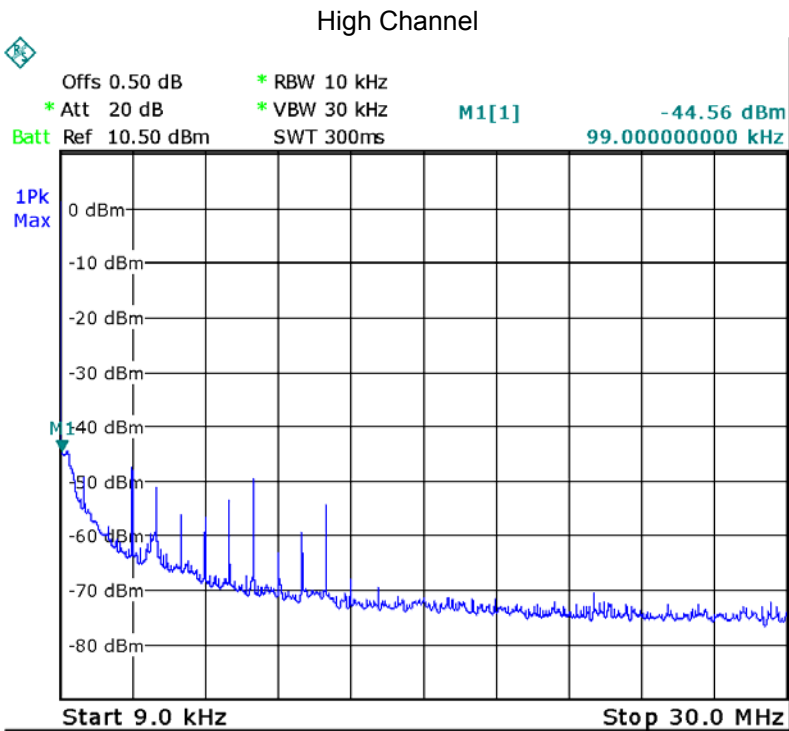

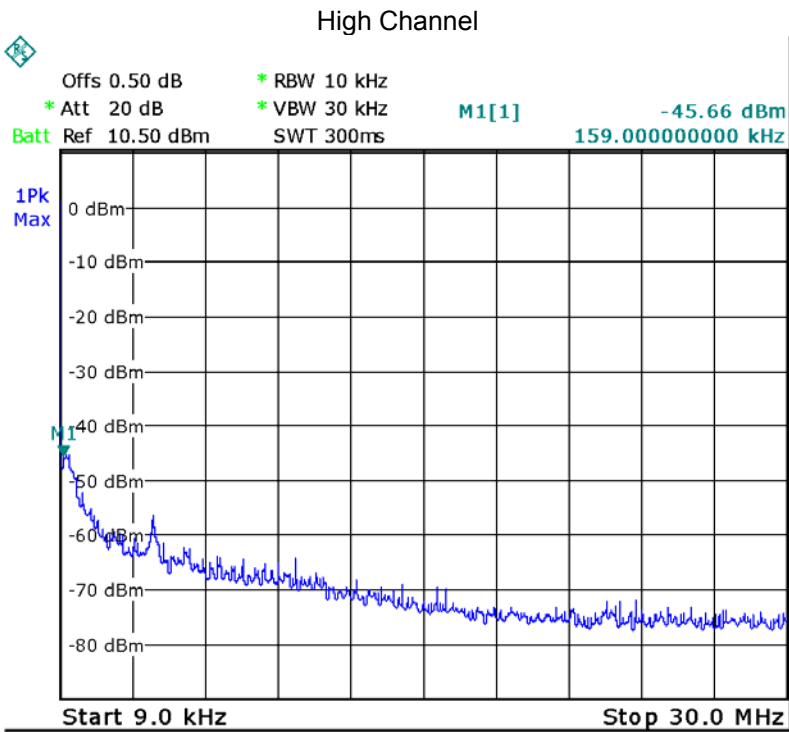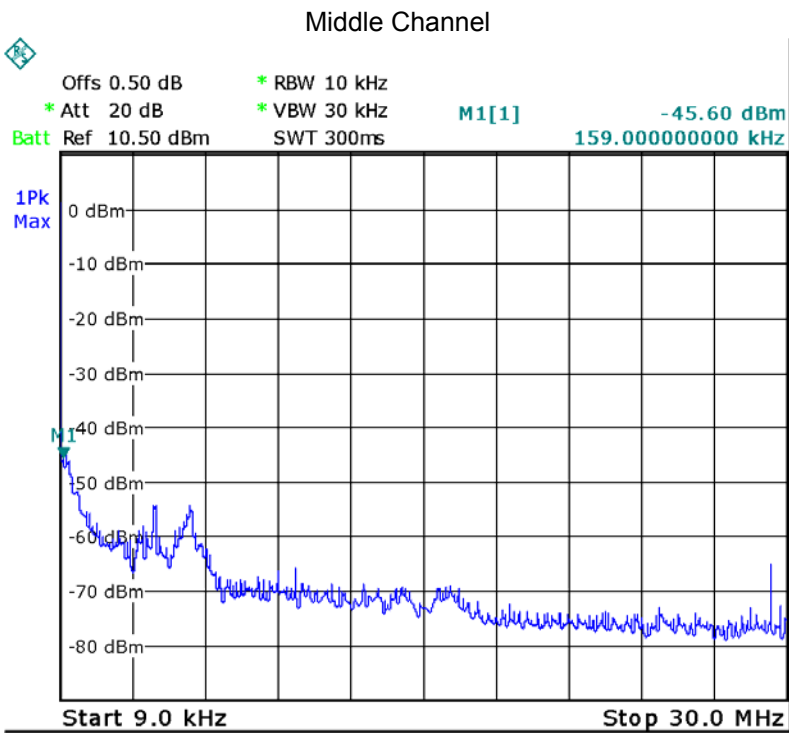




802.11n HT20



Low Channel

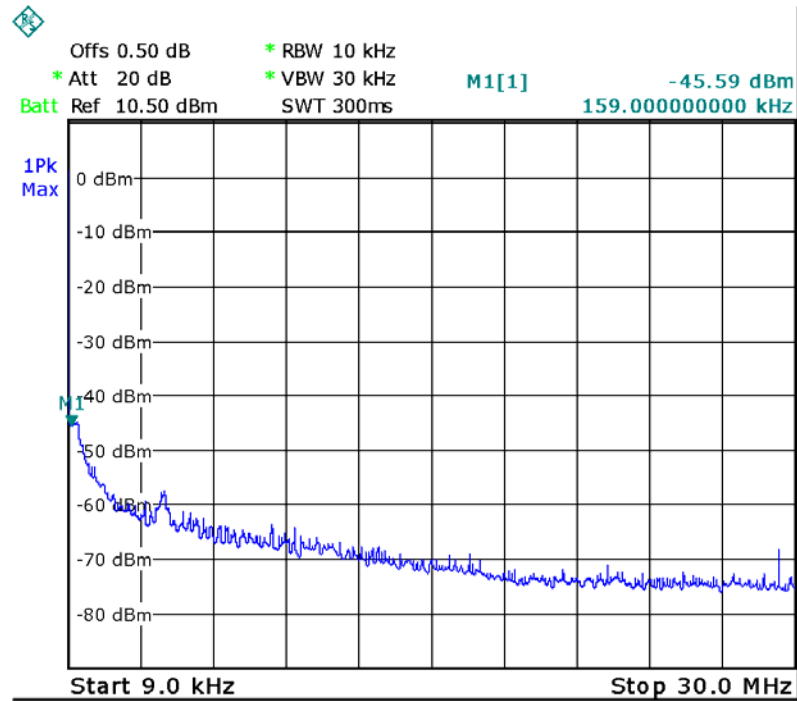

Middle Channel

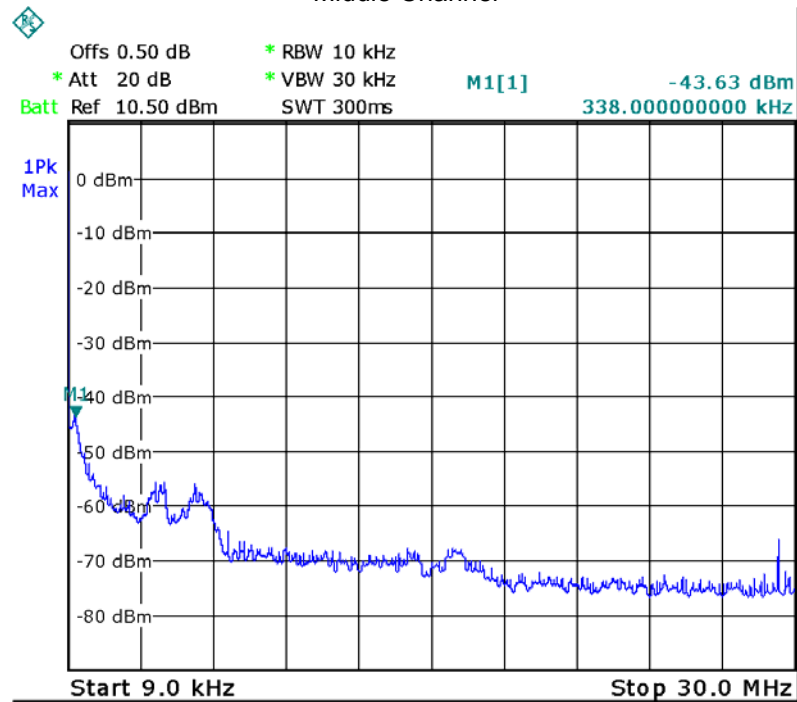


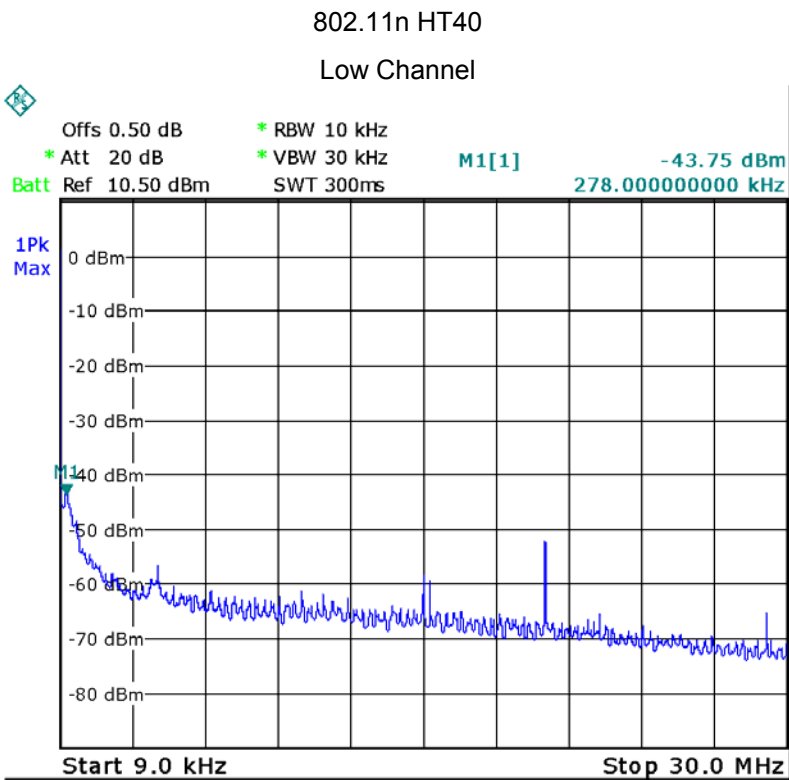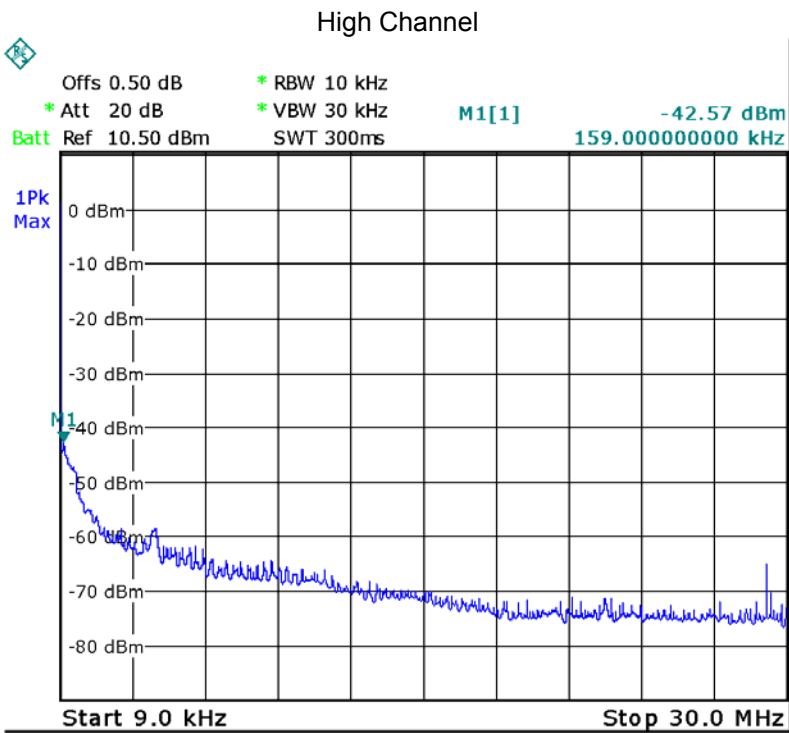

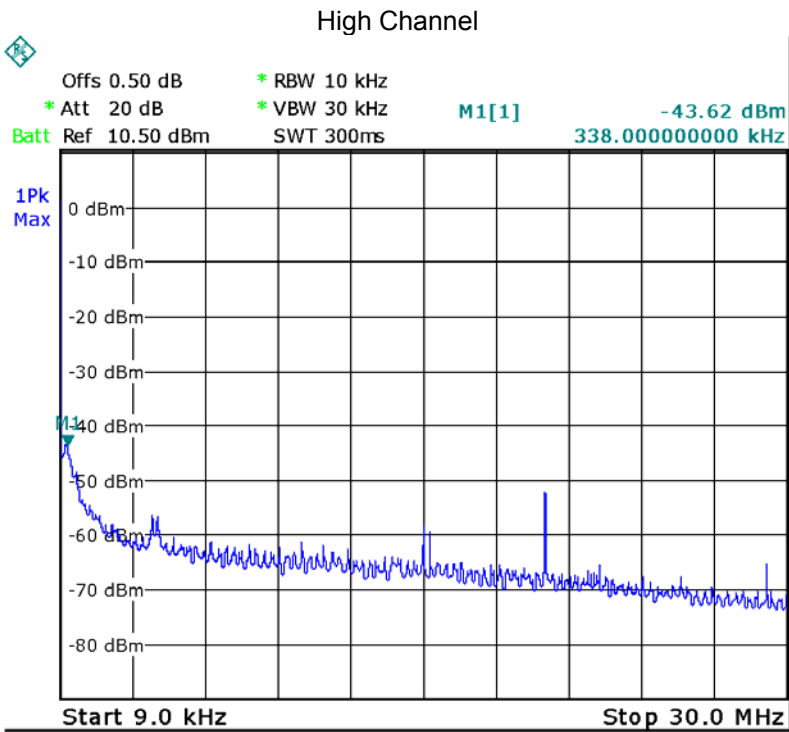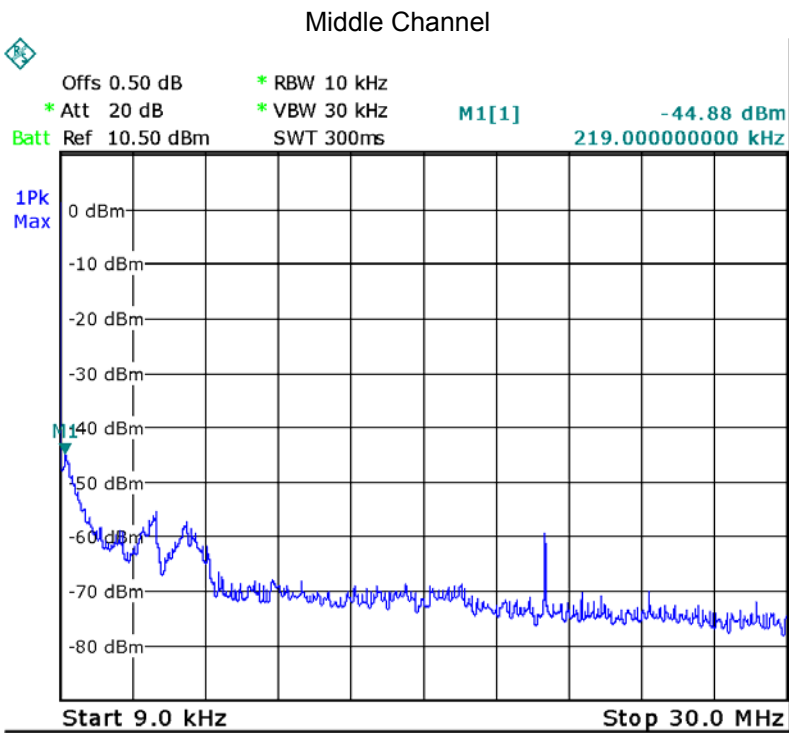



BLE

Low Channel

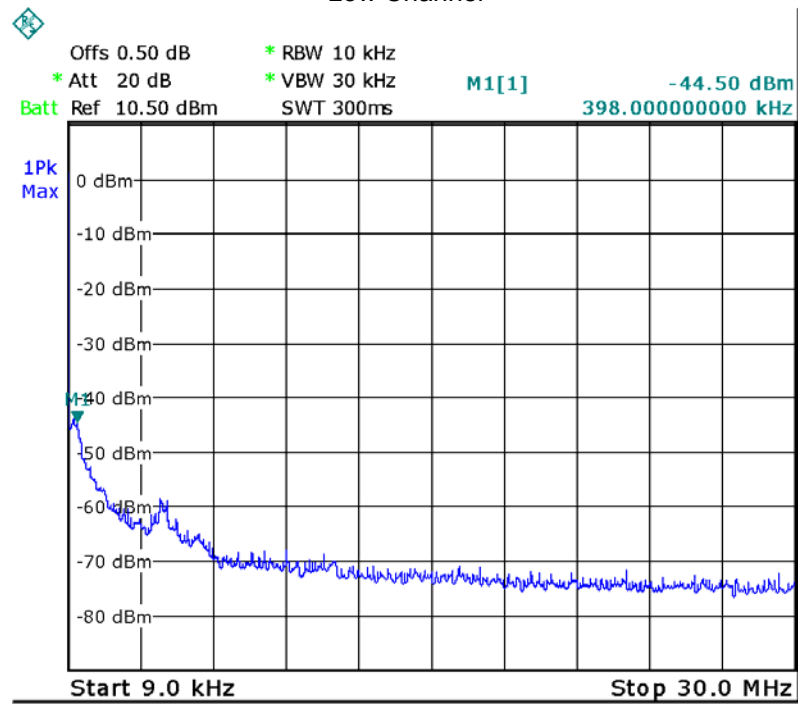


Middle Channel


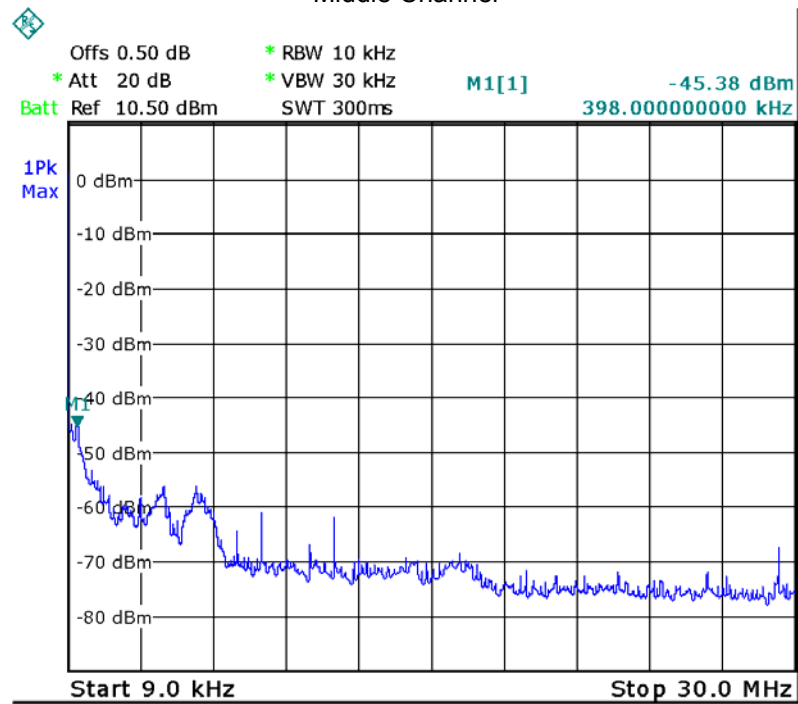


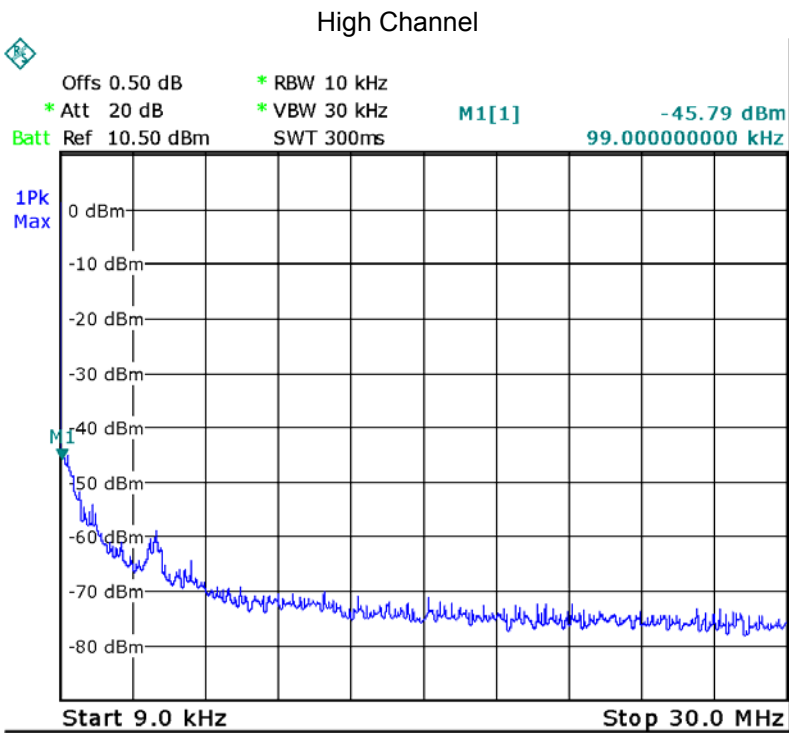

30MHz – 1GHz


802.11b

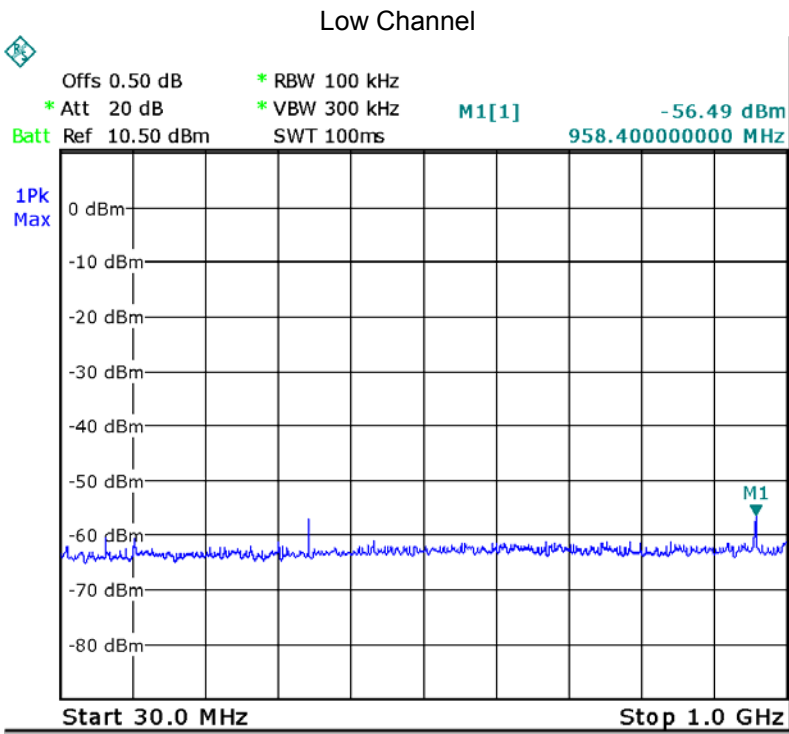

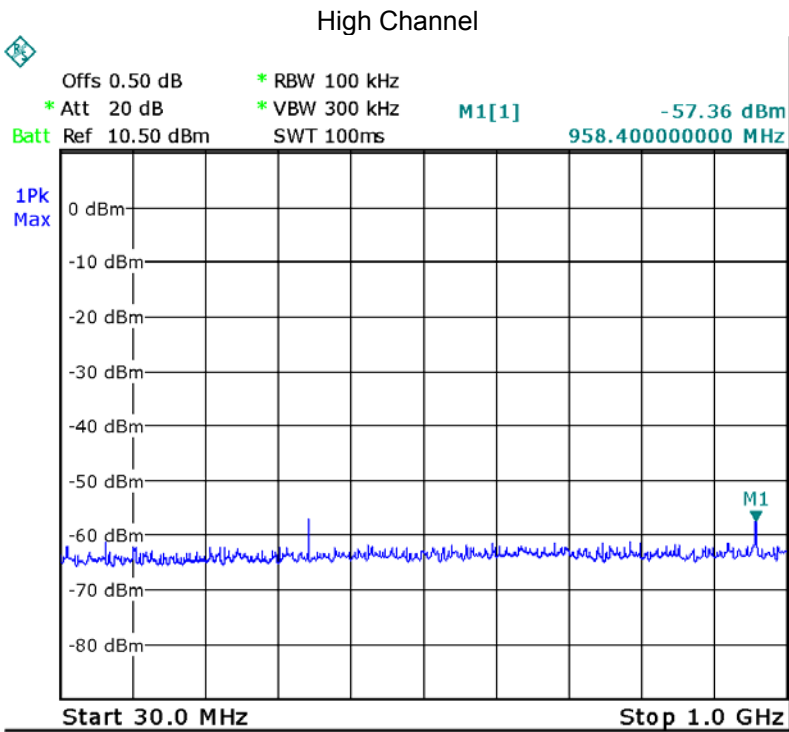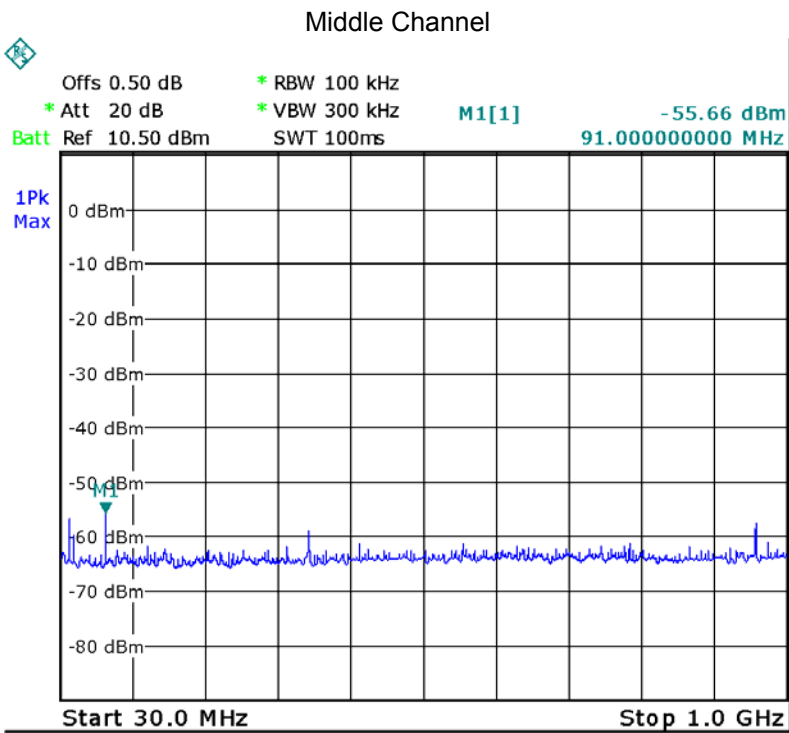




802.11g



Low Channel

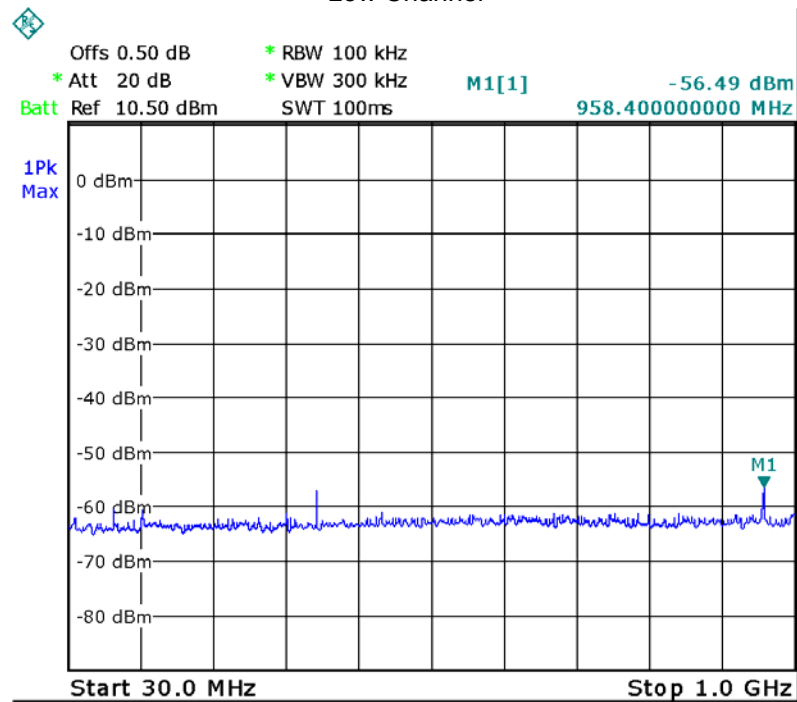

Middle Channel

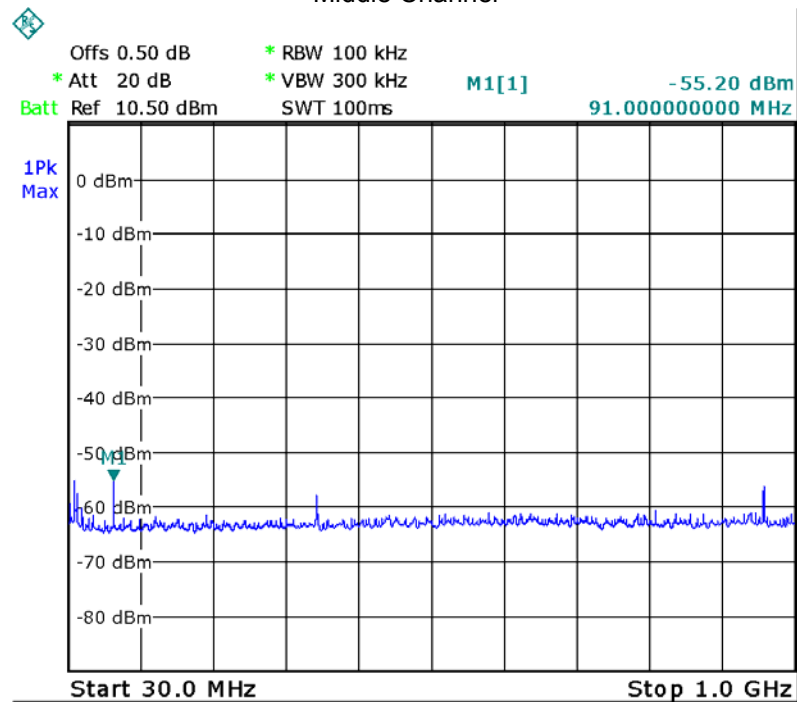


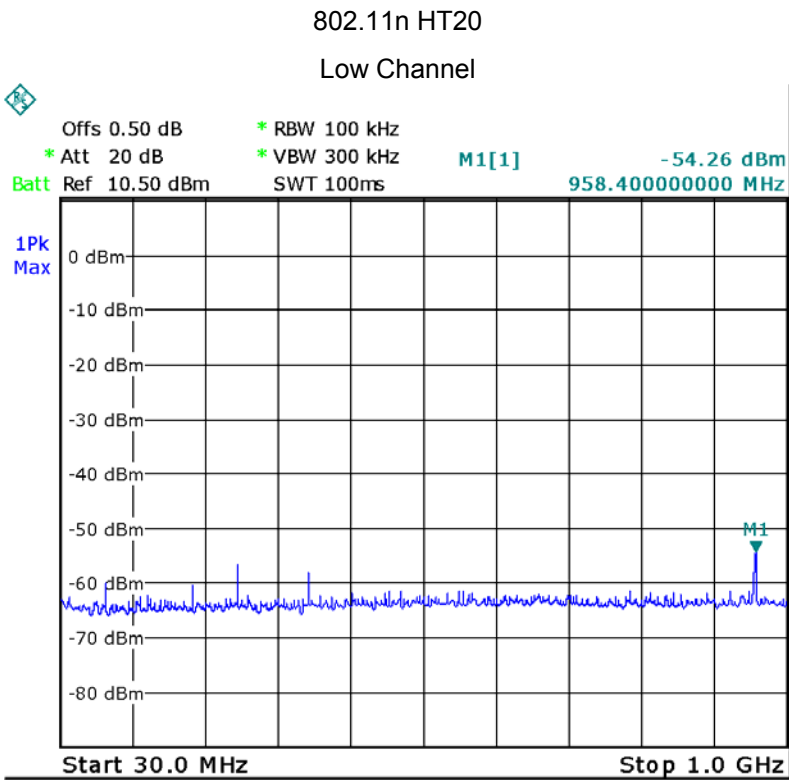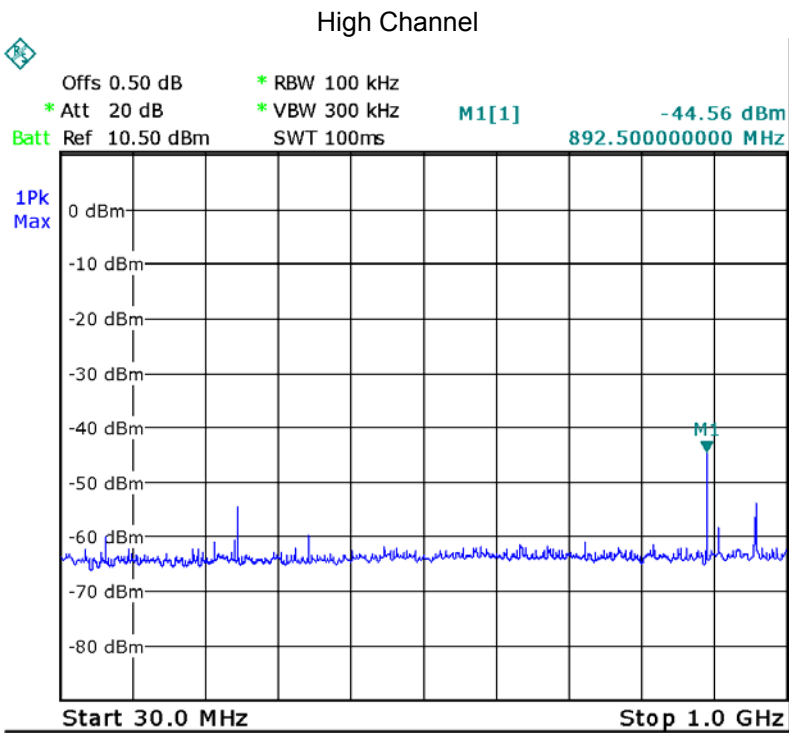

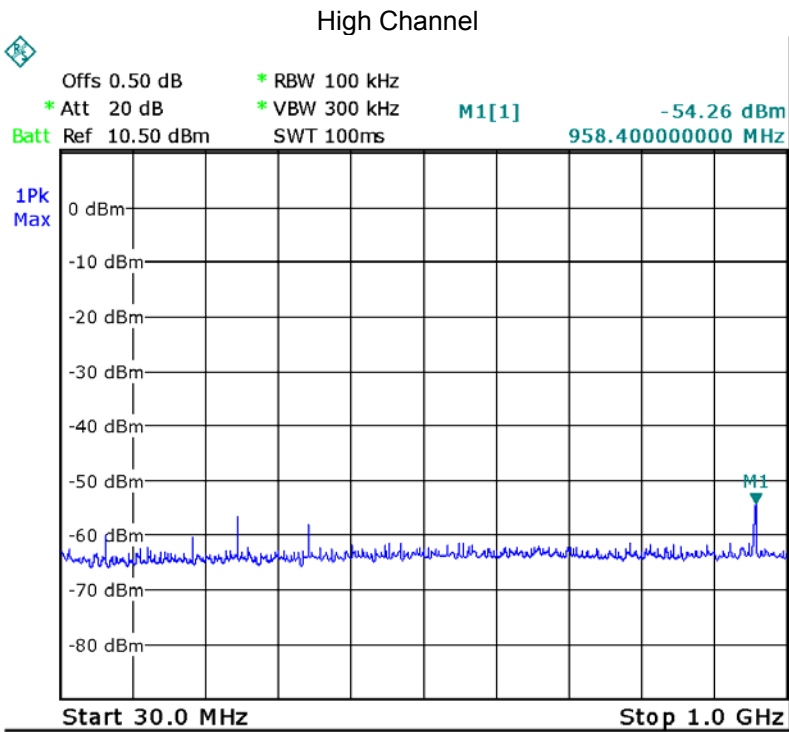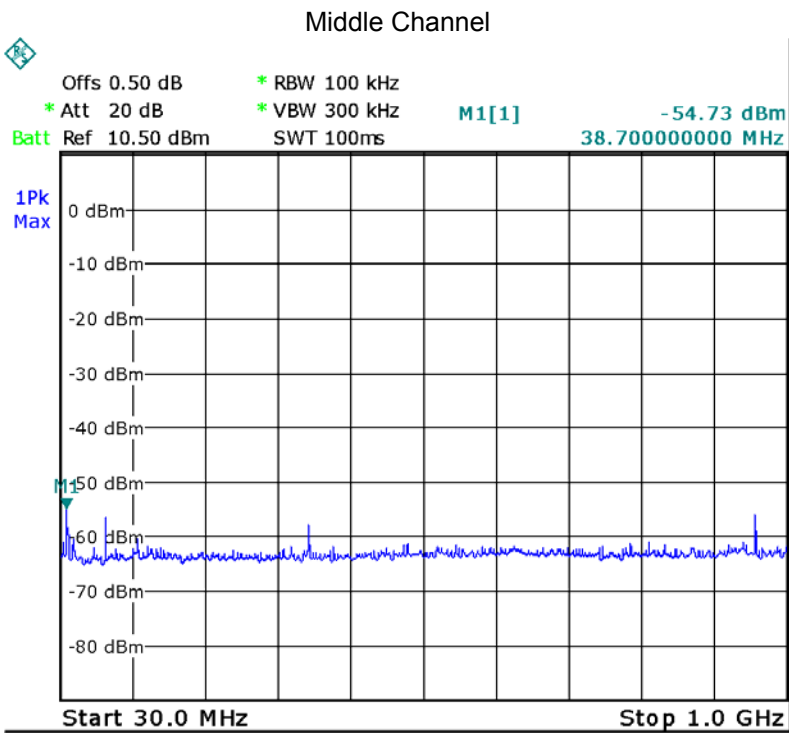




802.11n HT40



Low Channel

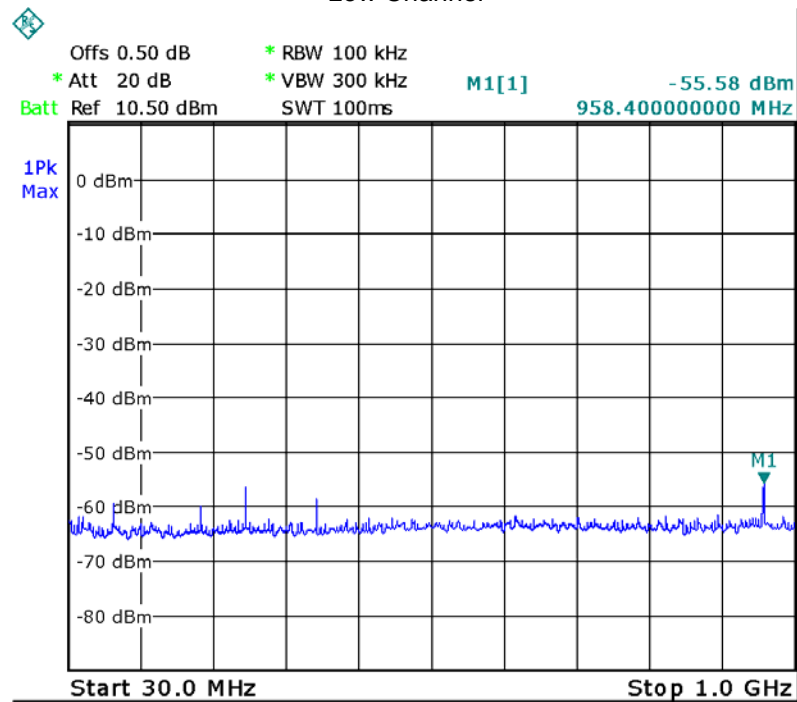

Middle Channel

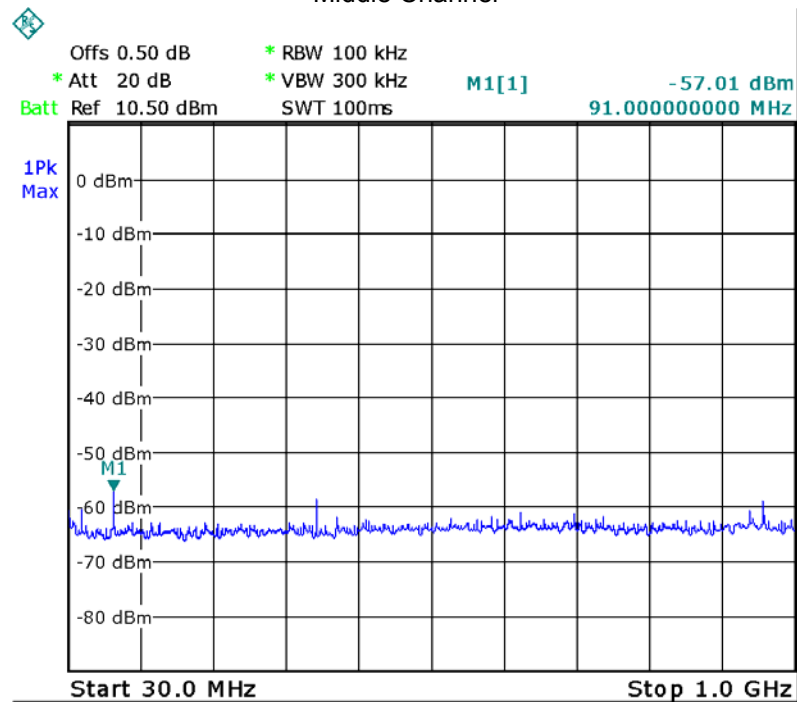

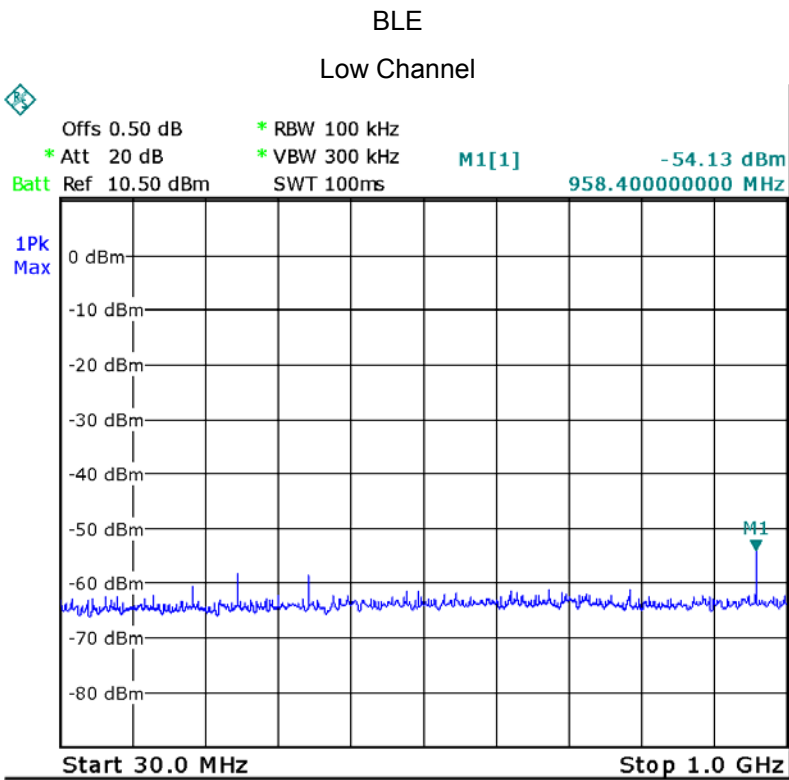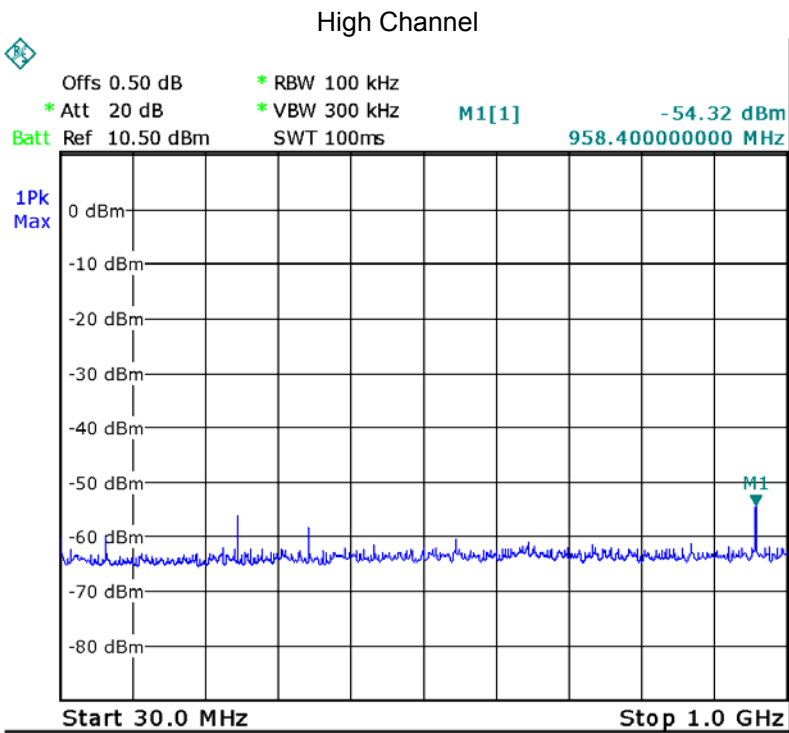

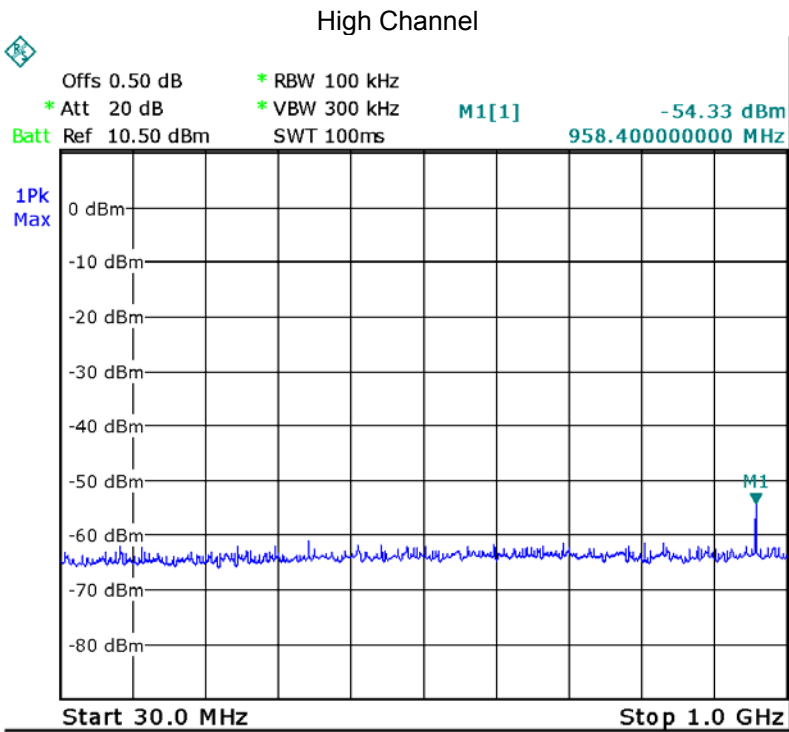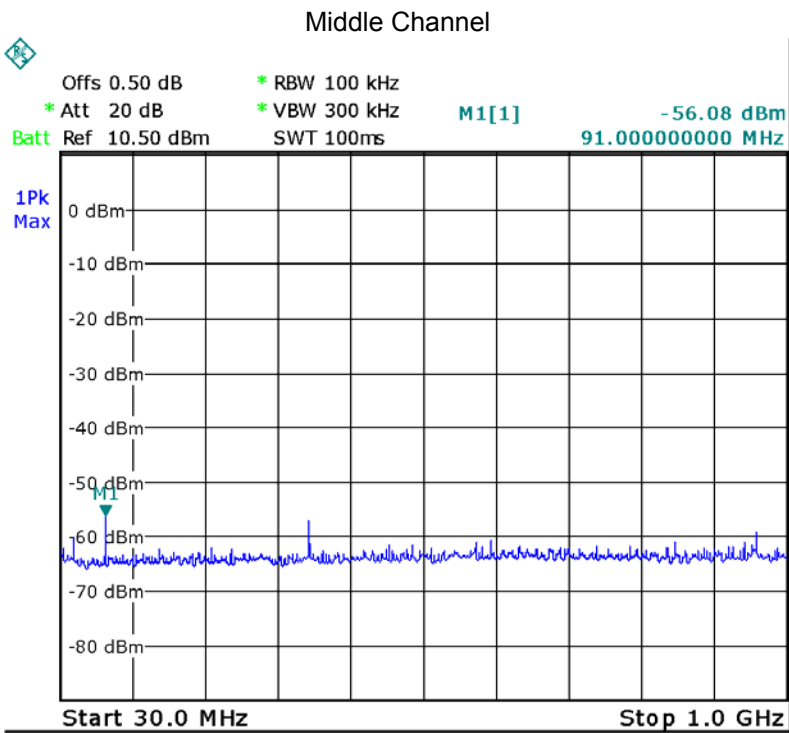


1GHz – 25GHz

802.11b


Low Channel

Fundamental

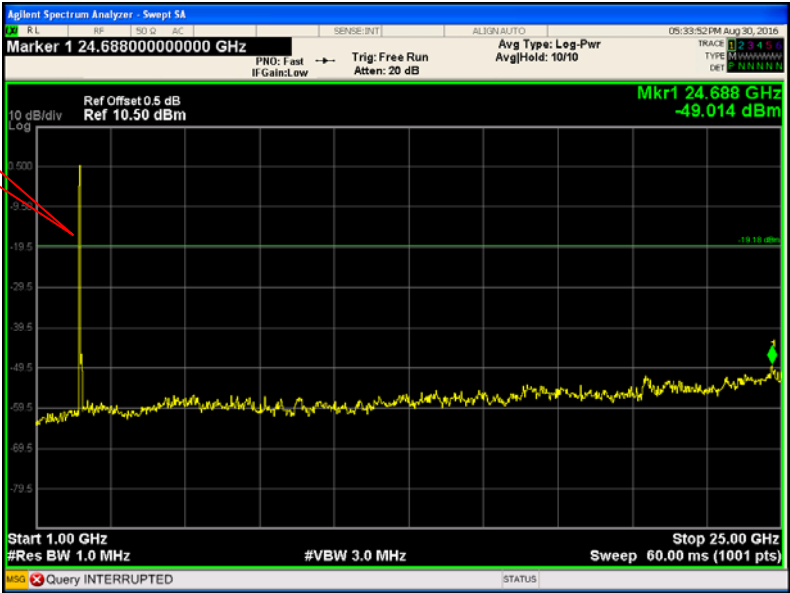


Fundamental

Middle Channel

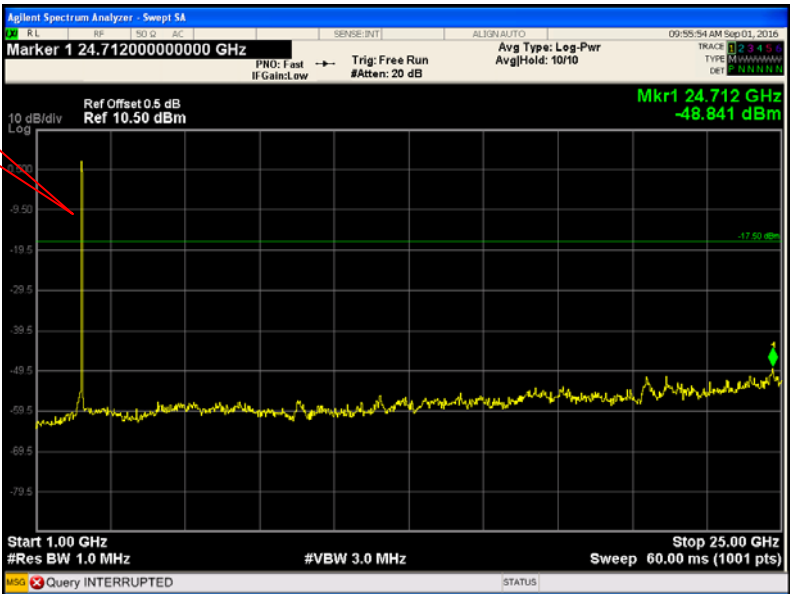

Fundamental


High Channel

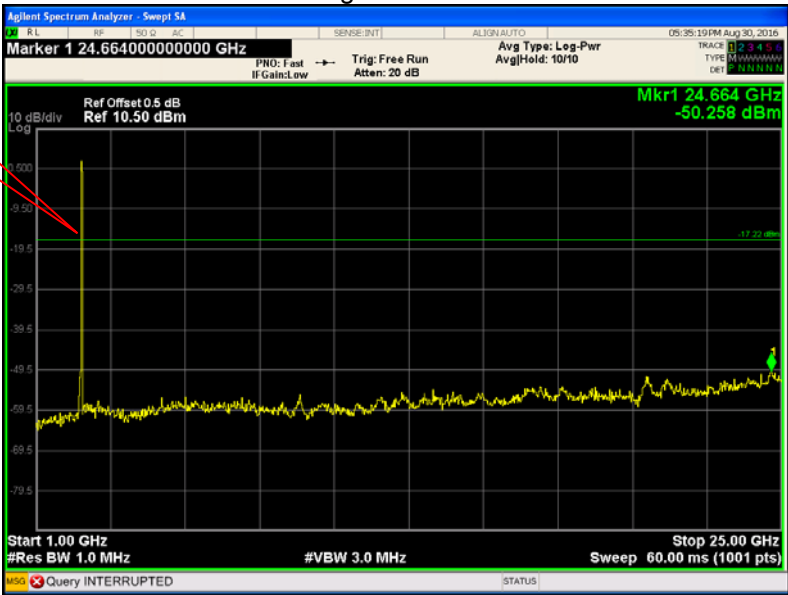

Fundamental


802.11g

Low Channel

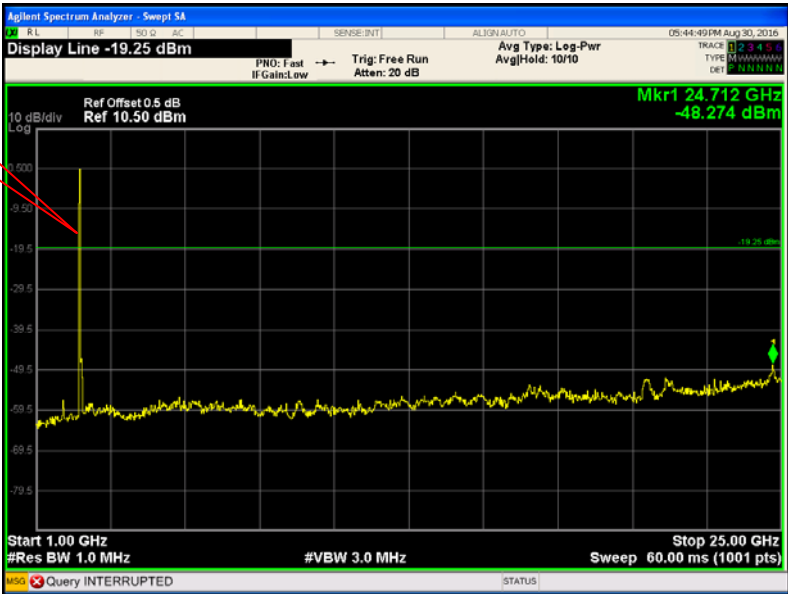


Fundamental

Middle Channel

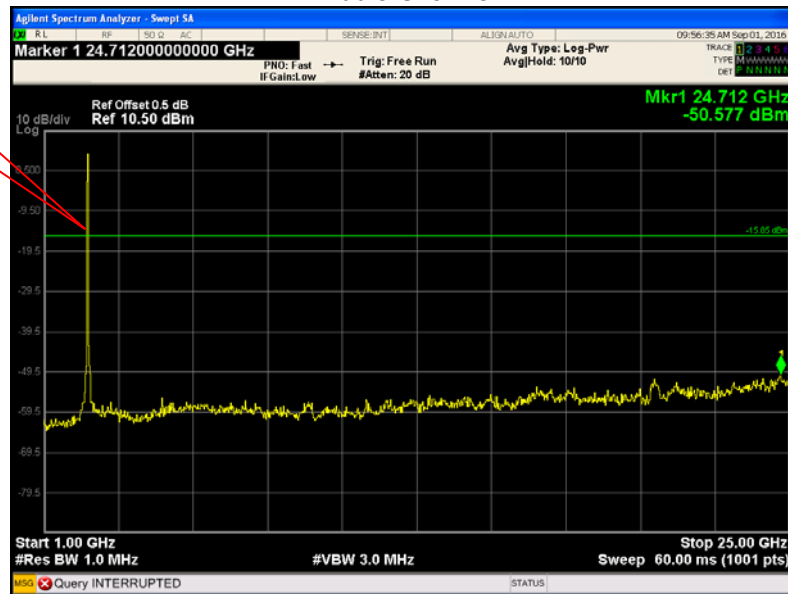

Fundamental


High Channel

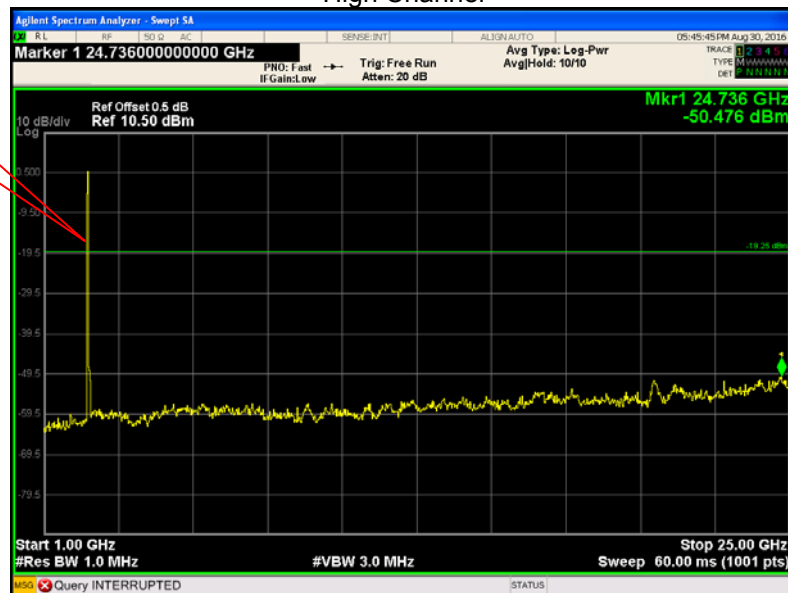

802.11n HT20


Low Channel

Fundamental

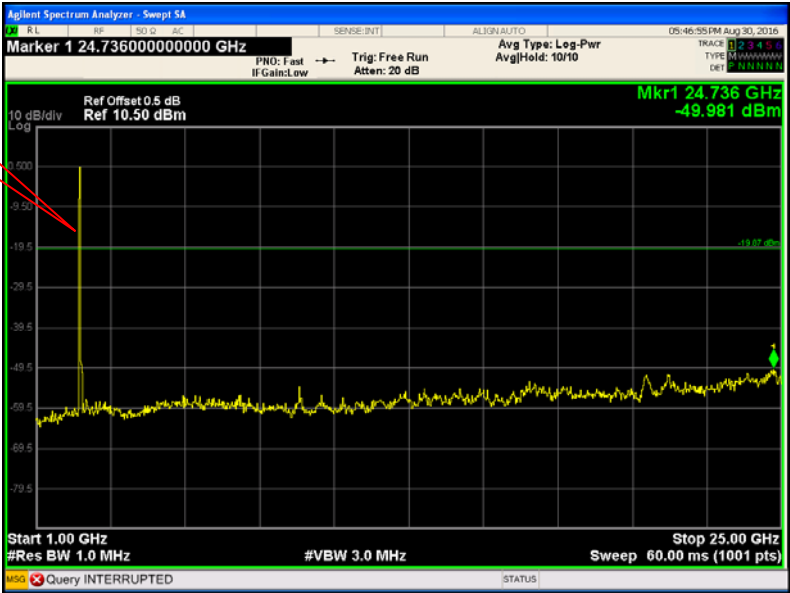


Middle Channel

Fundamental

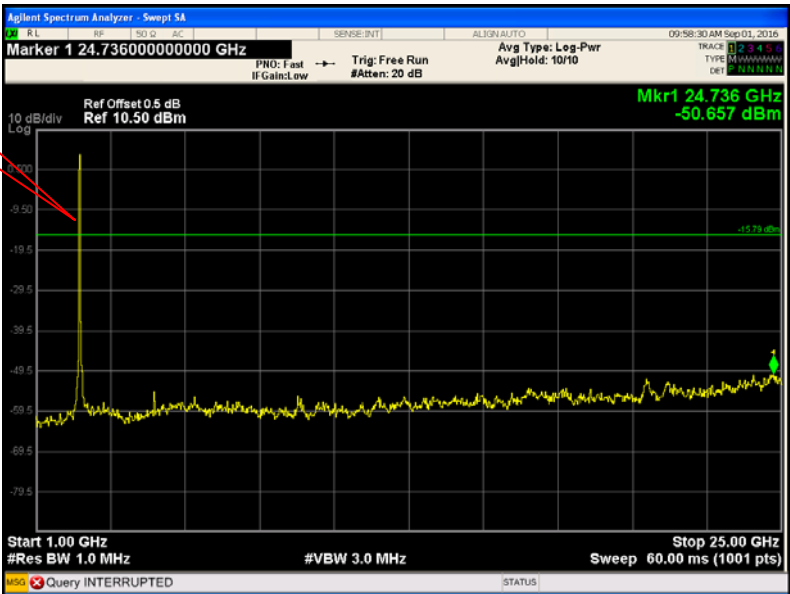

High Channel


Fundamental

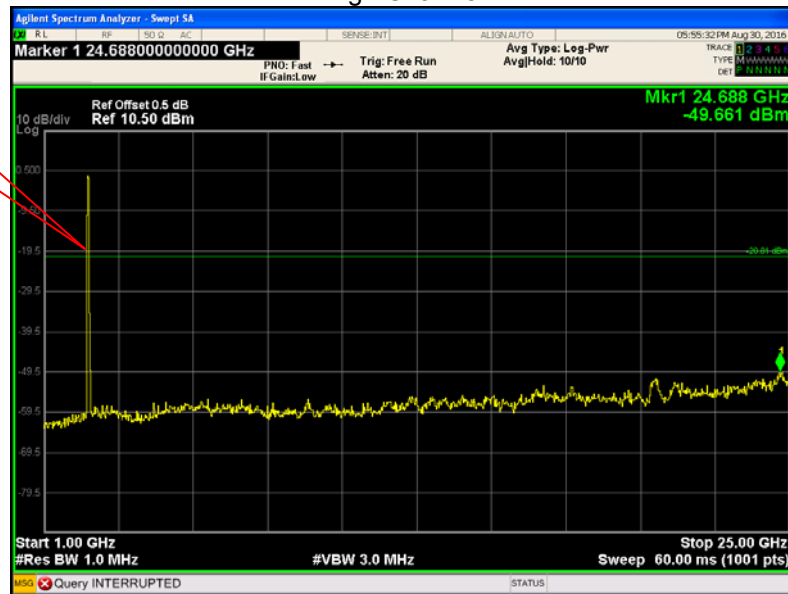

802.11n HT40


Low Channel

Fundamental

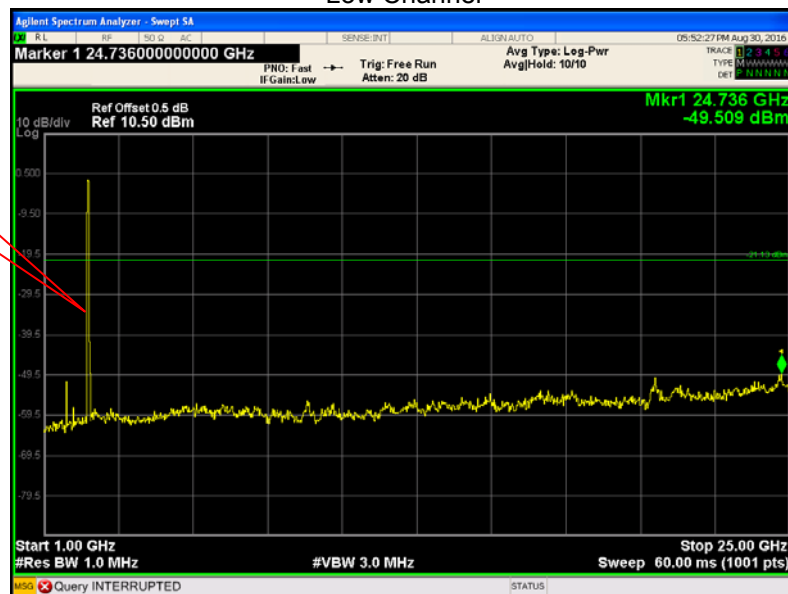


Middle Channel

Fundamental

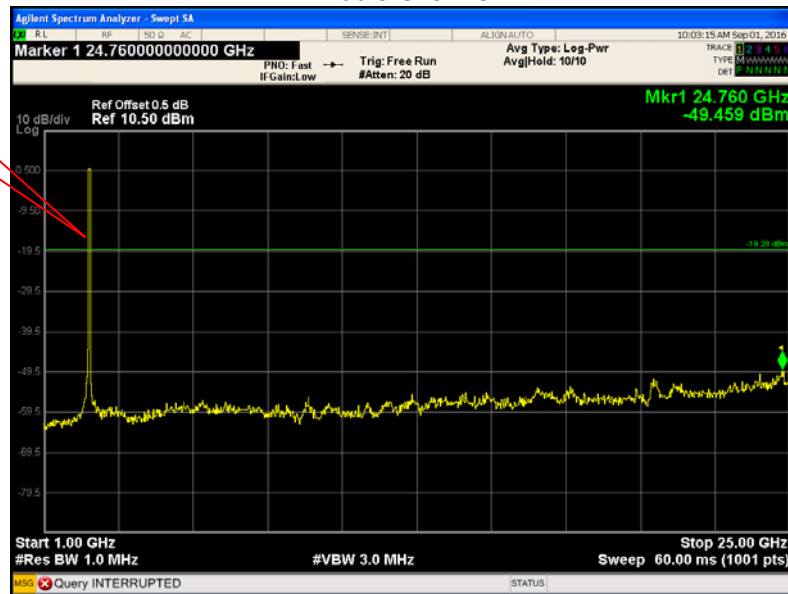

High Channel


Fundamental

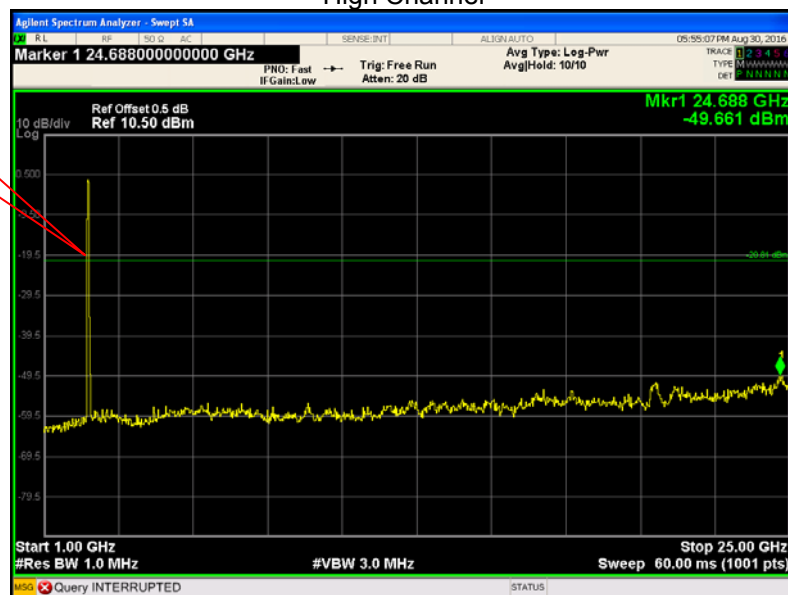

BLE


Low Channel

Fundamental

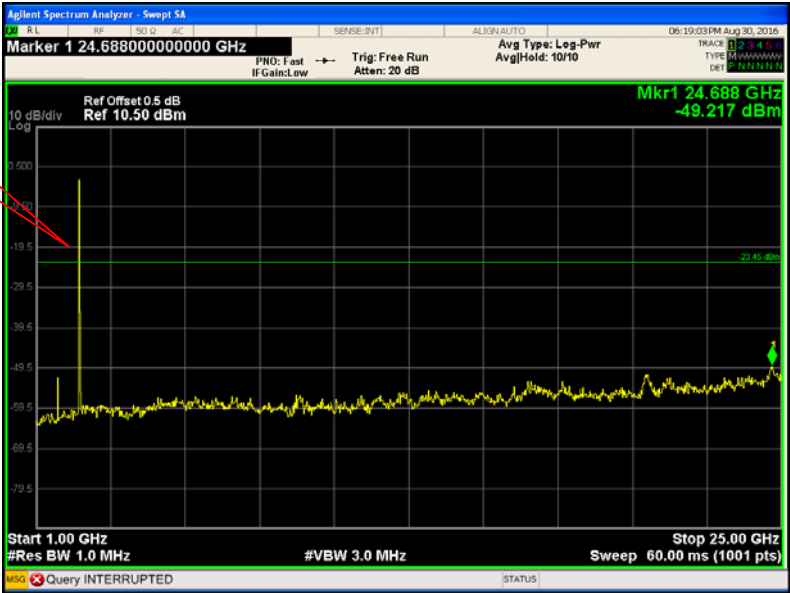


Middle Channel

Fundamental

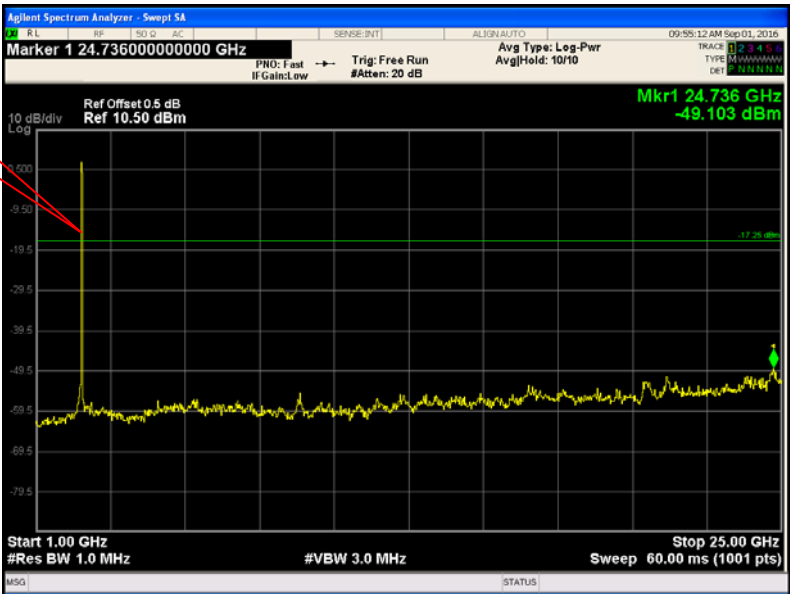

High Channel

Fundamental

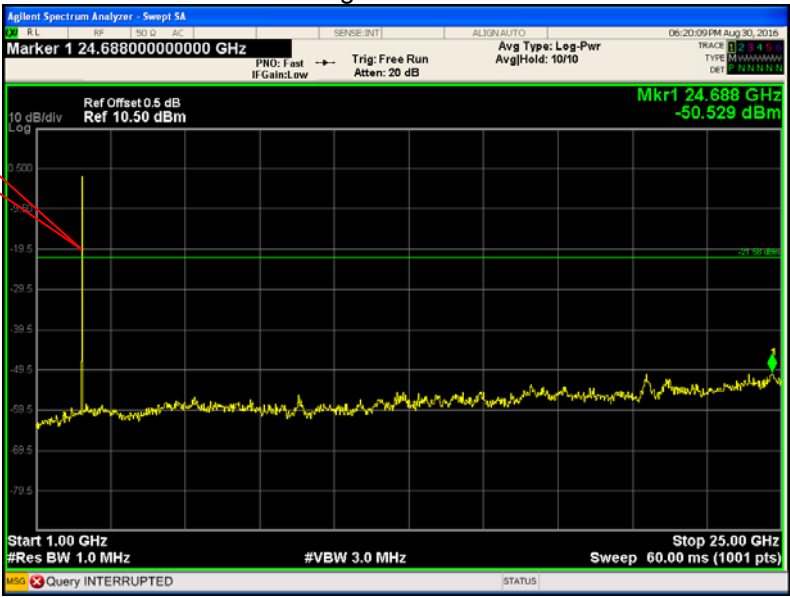

10 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

10.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.2 Test Result


Test result plots shown as follows:

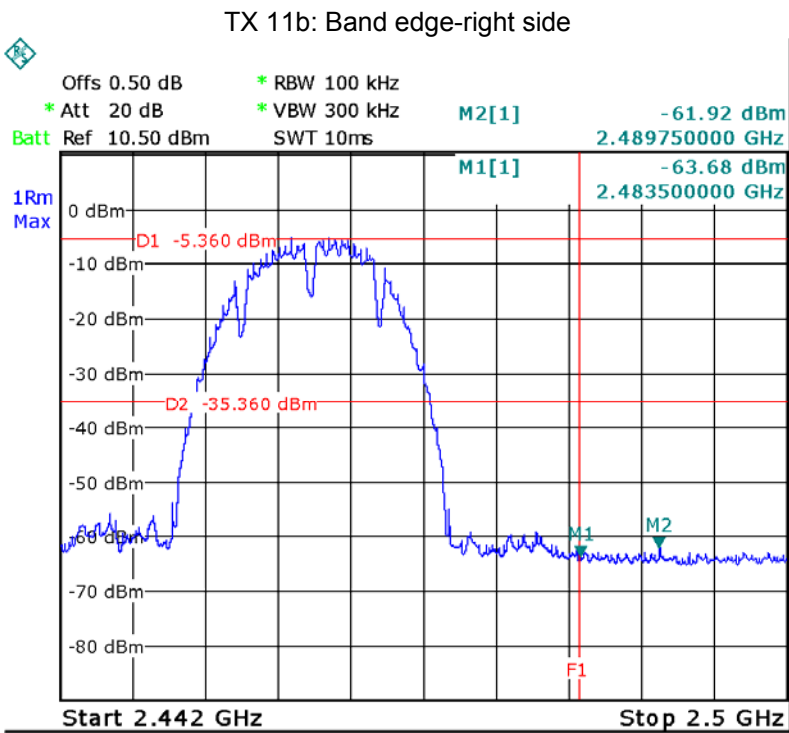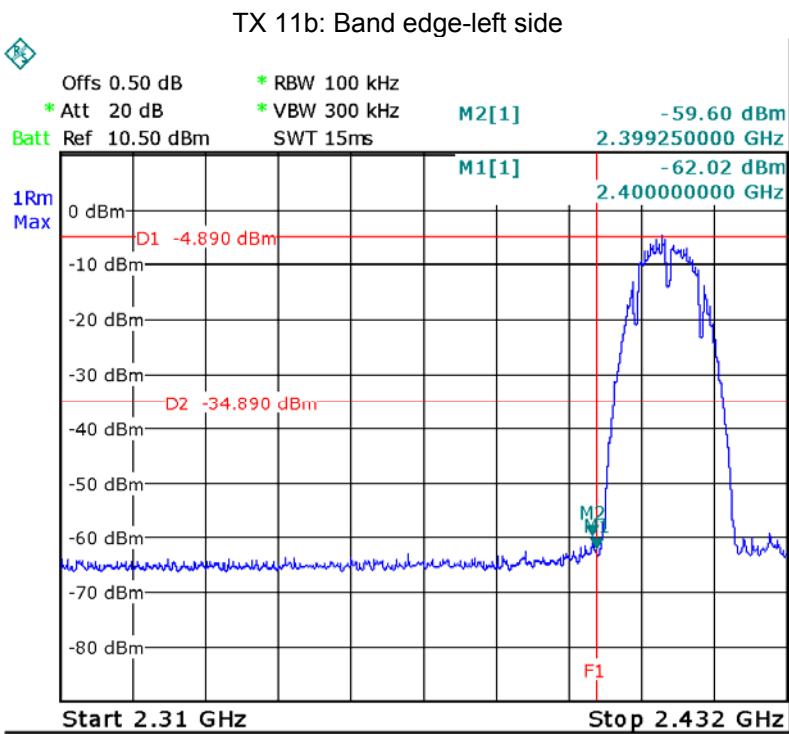


TX 11g: Band edge-left side

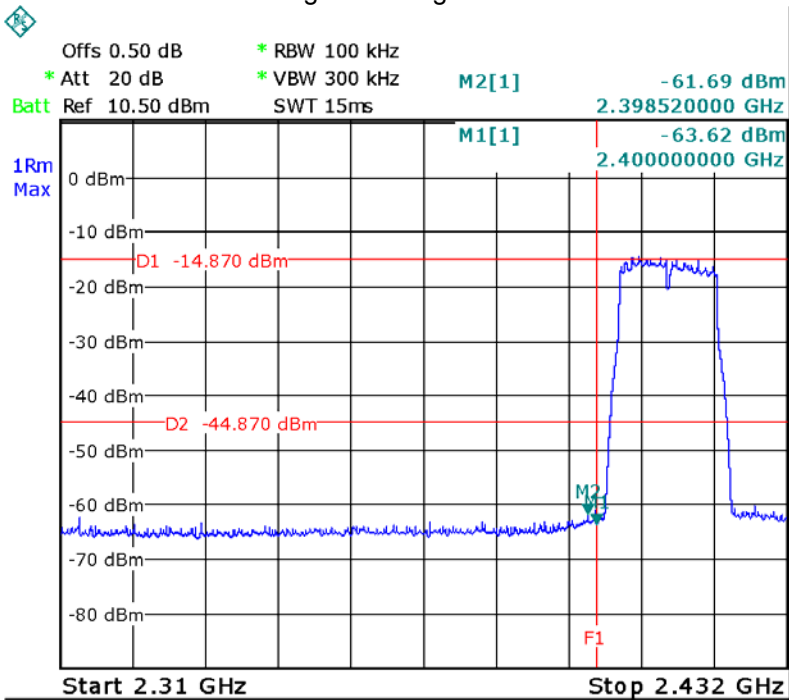


TX 11g: Band edge-right side


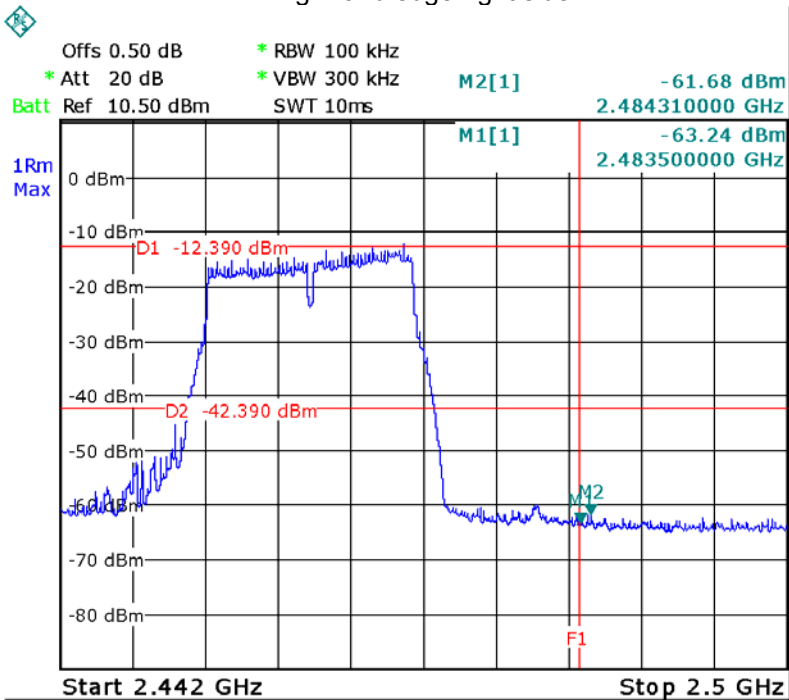




TX 11n HT20: Band edge-left side

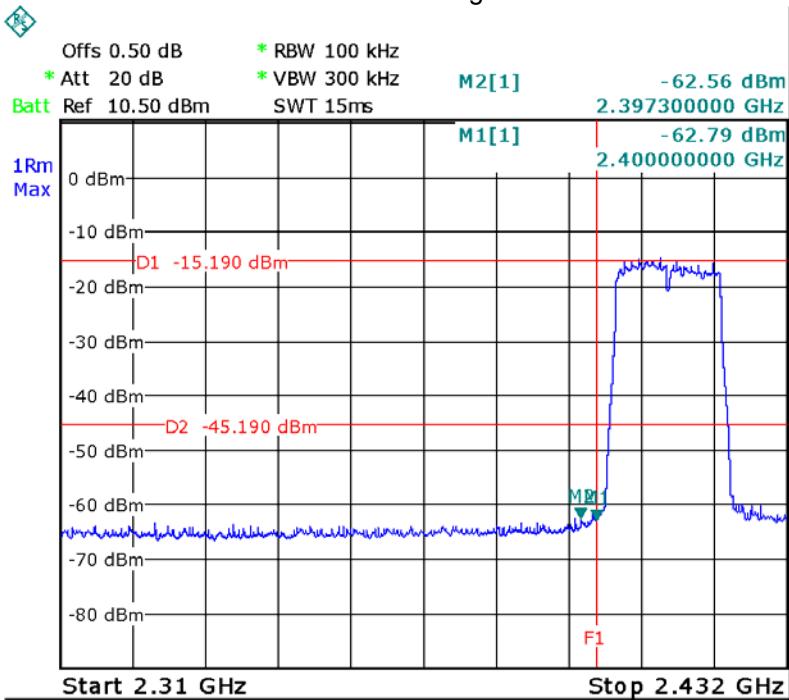

TX 11n HT20: Band edge-right side

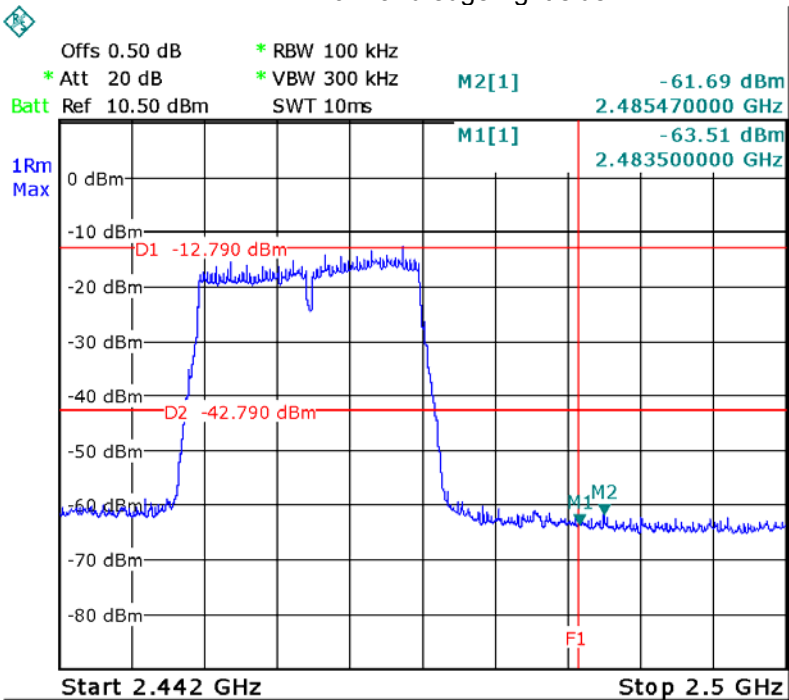

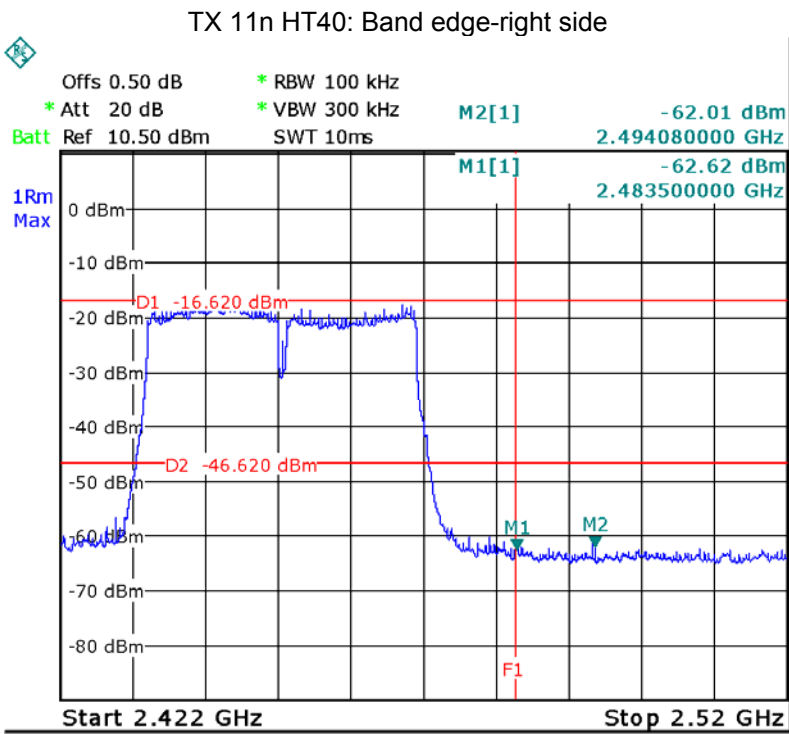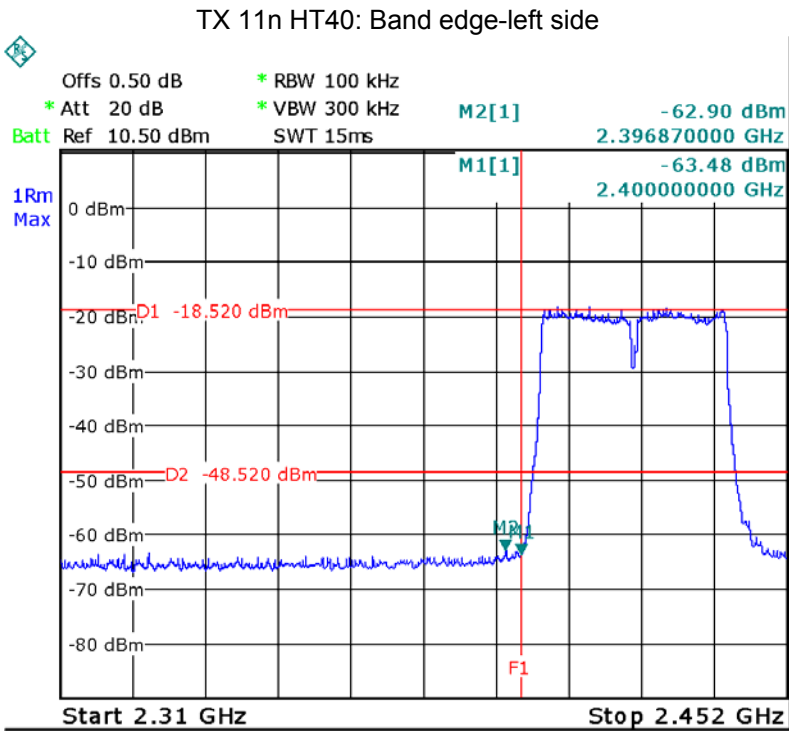

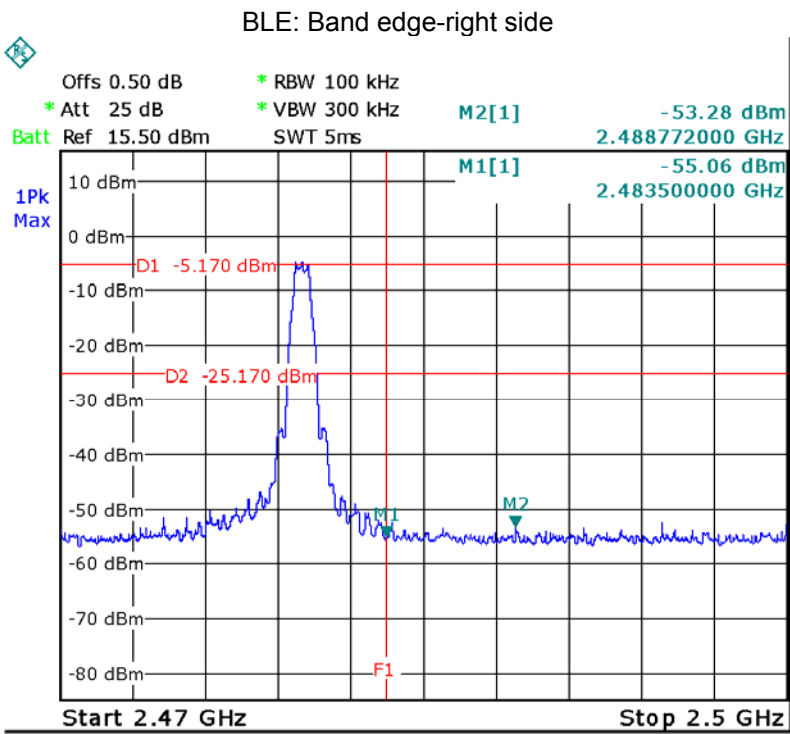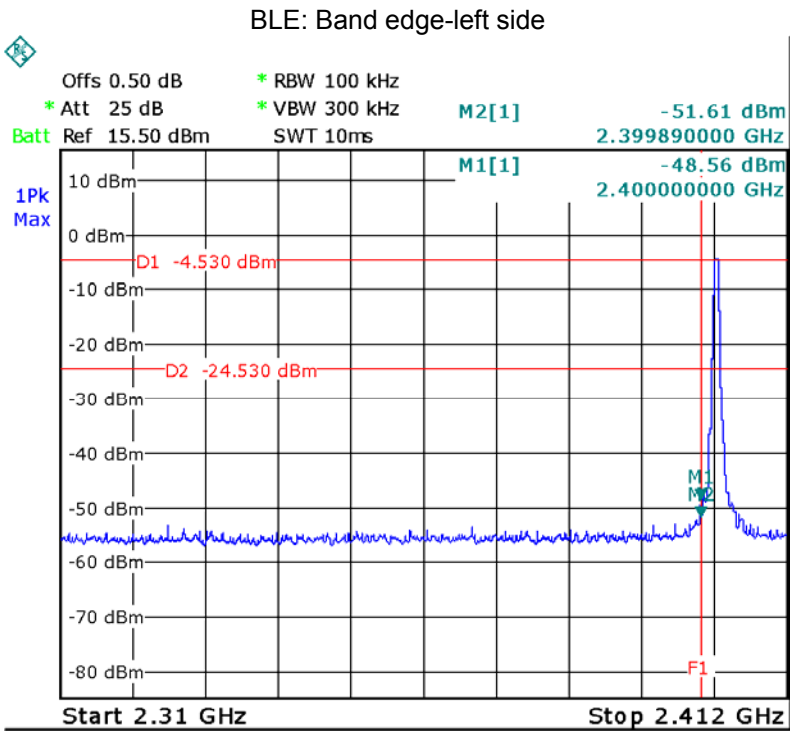

11 6 dB Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016



11.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



11.2 Test Result:



Operation mode	Bandwidth (MHz)		
TX 11b	Channel 1	Channel 6	Channel 11
	10.060	10.060	10.060
TX 11g	Channel 1	Channel 6	Channel 11
	16.417	16.417	16.417
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.515	17.515	17.515
TX 11n HT40	Channel 3	Channel 6	Channel 9
	36.230	36.230	36.230
BLE	Channel 0	Channel 19	Channel 39
	0.707	0.707	0.707



Test result plot as follows:

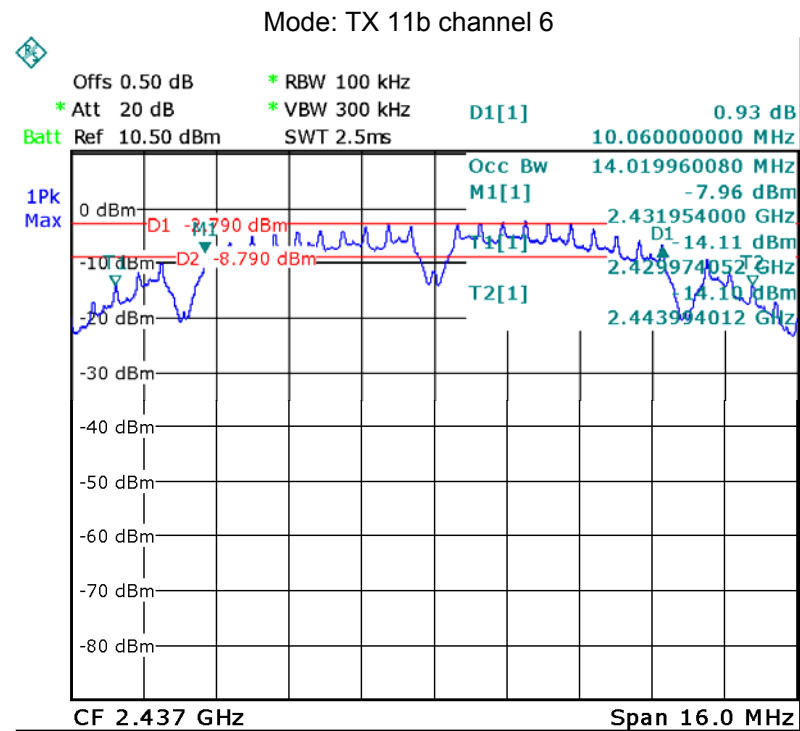
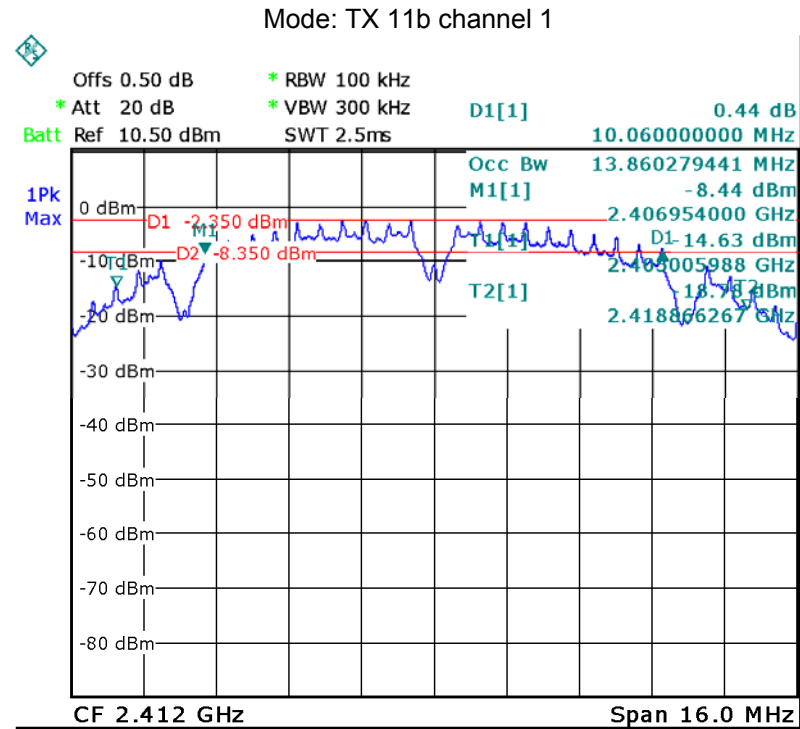


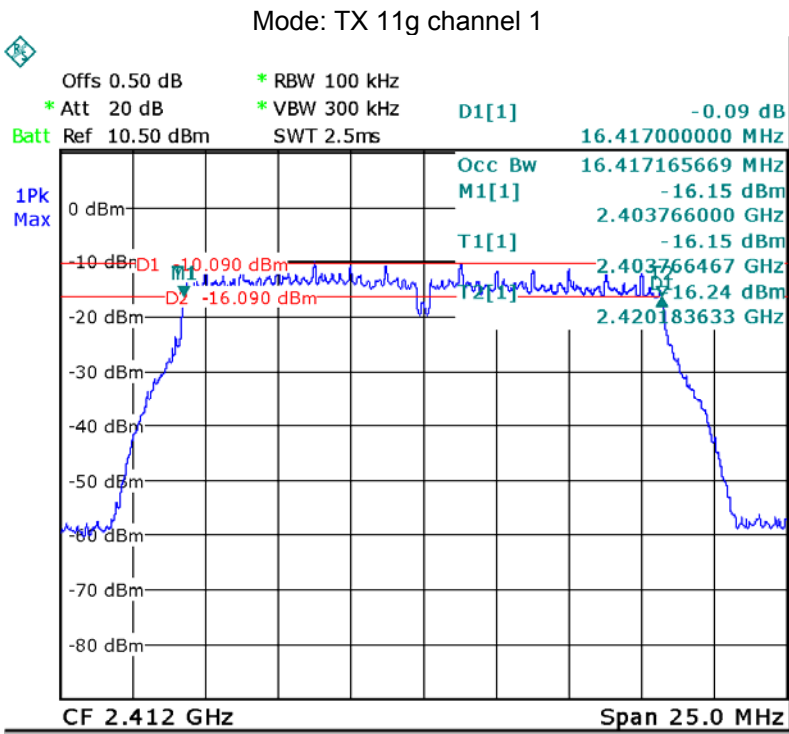
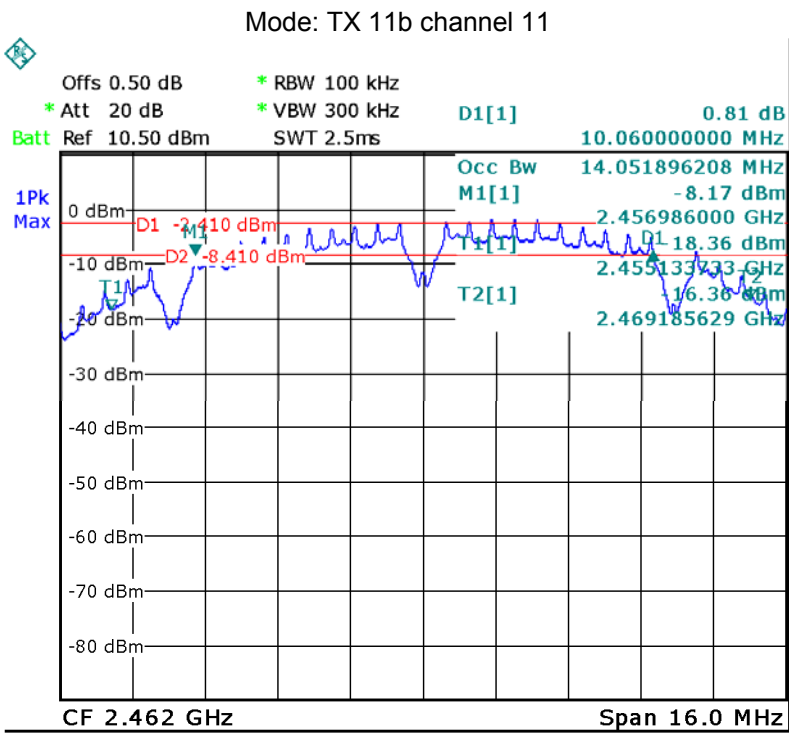


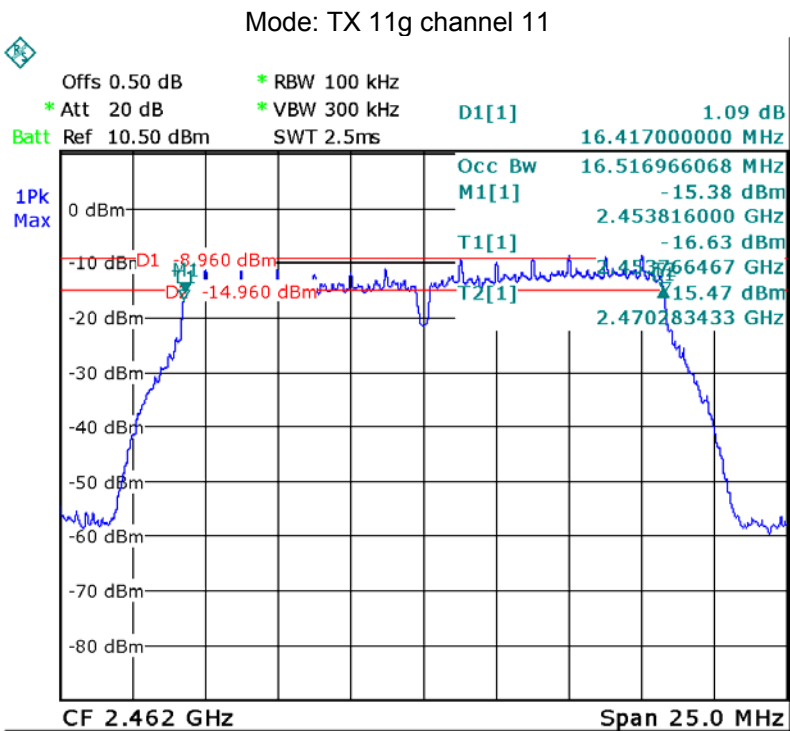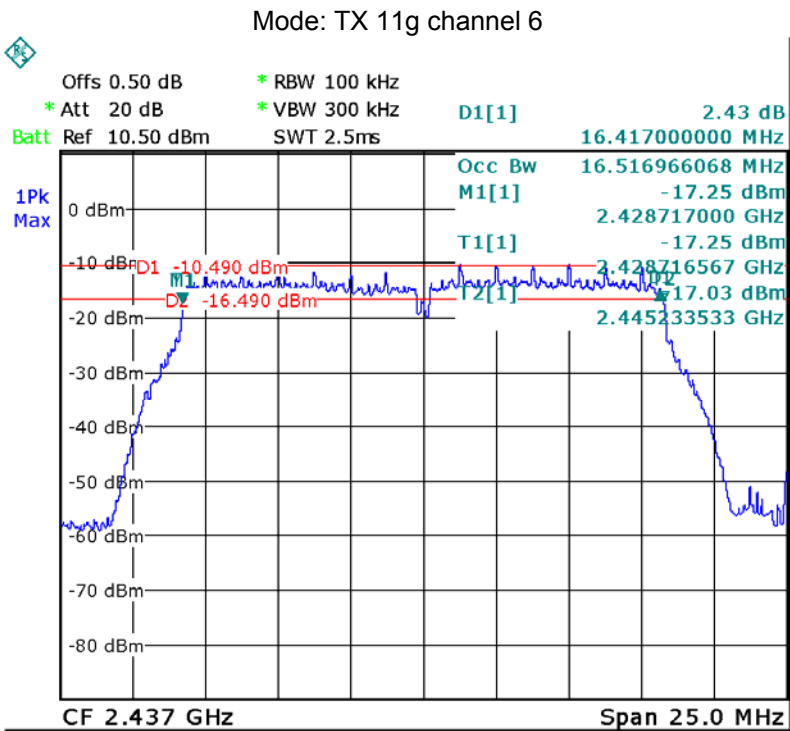


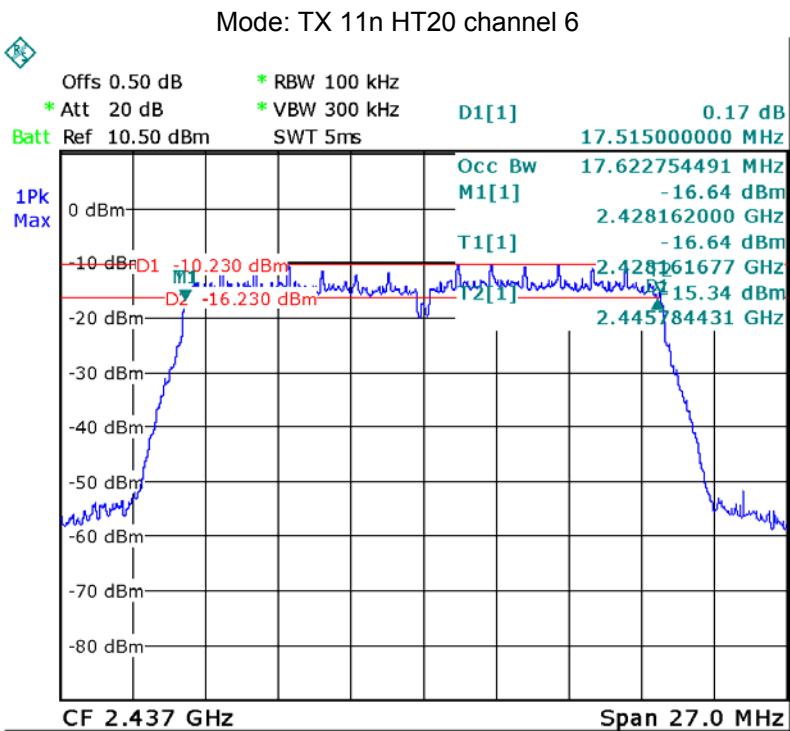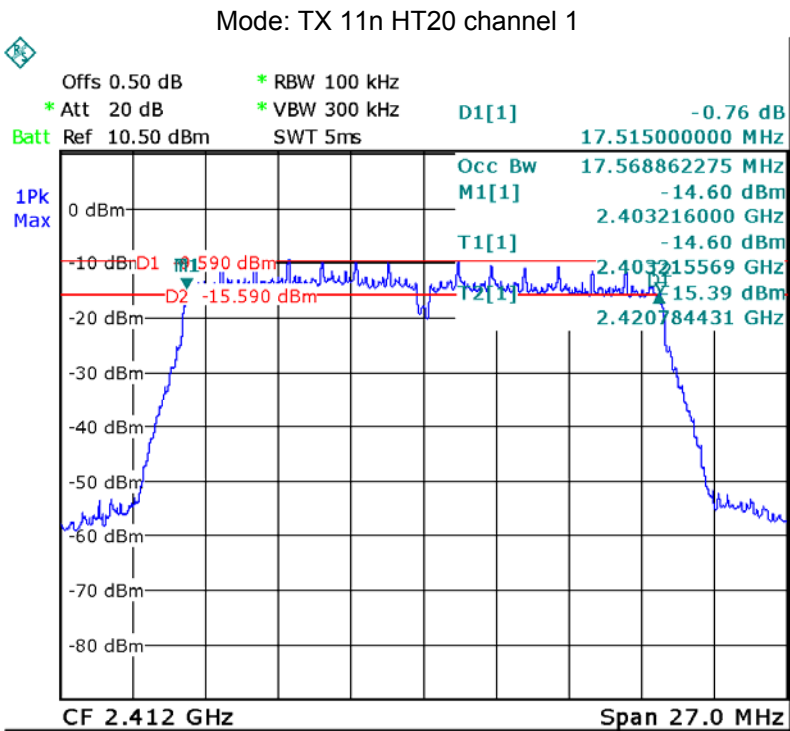

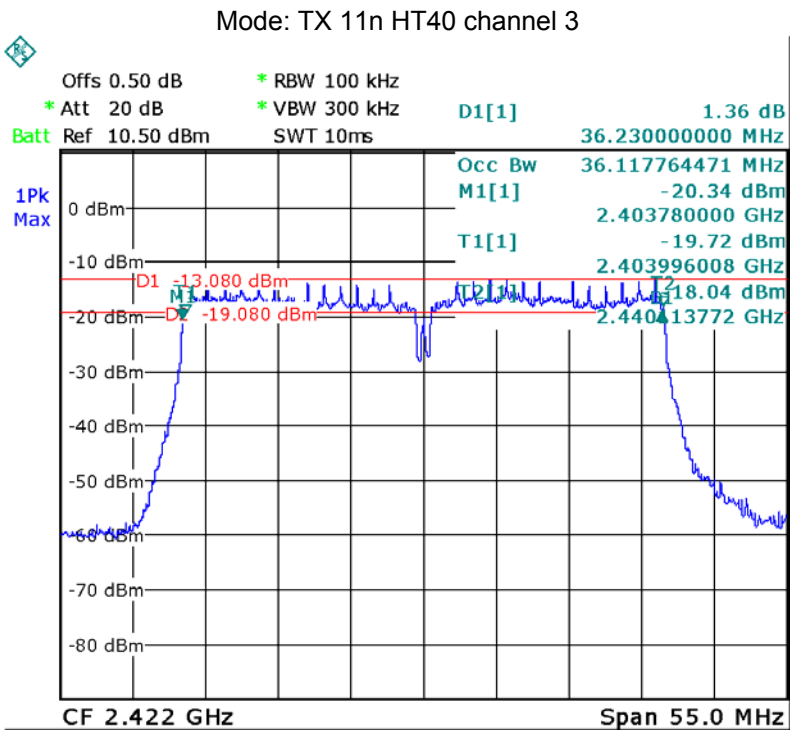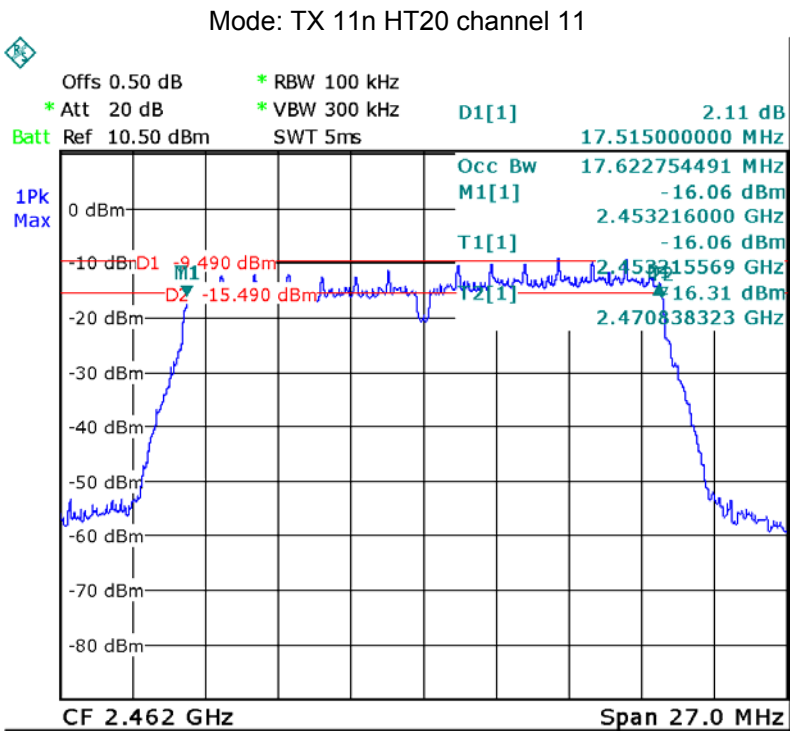

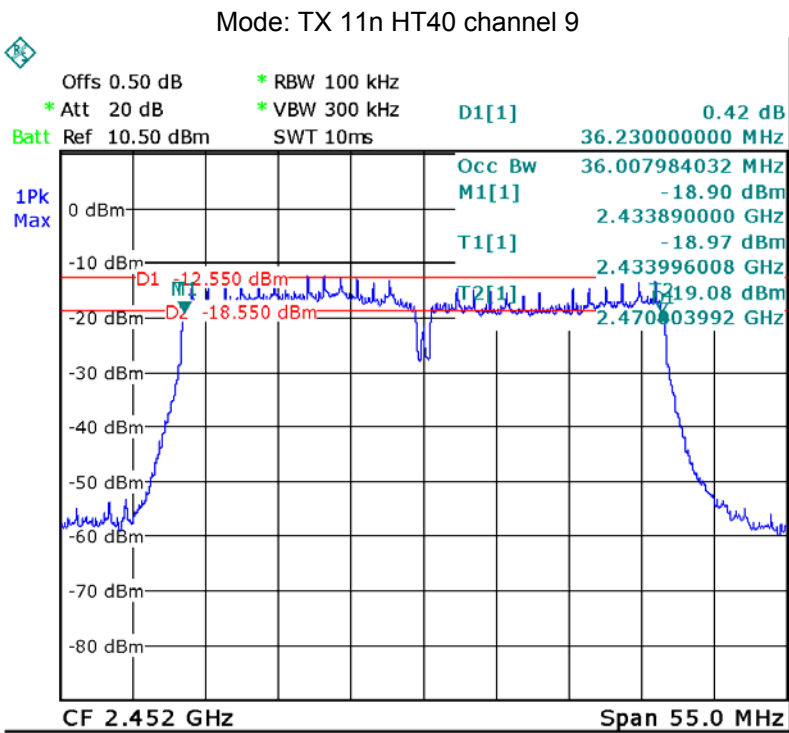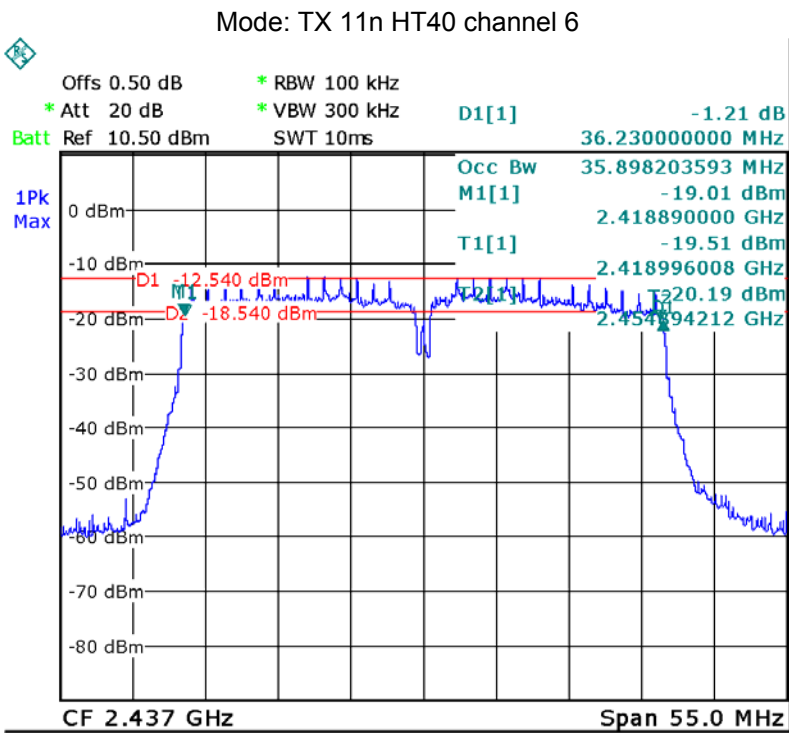

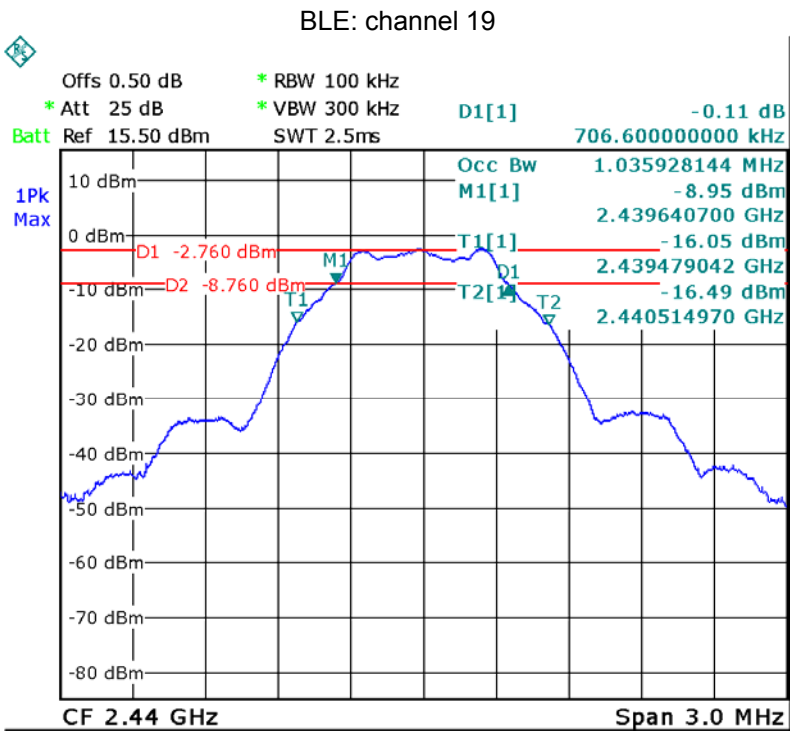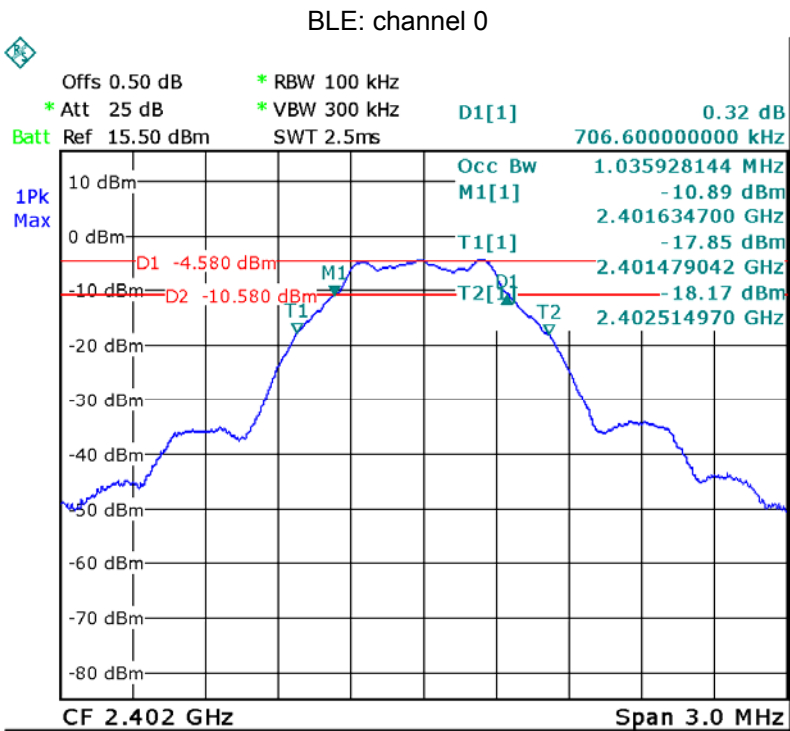

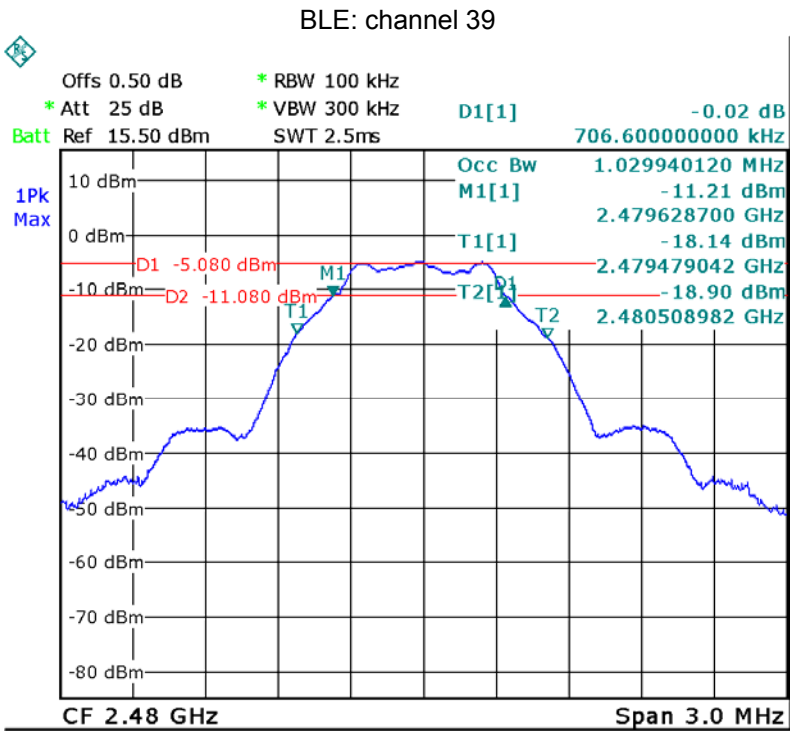

12 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016

12.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the $RBW \geq$ DTS bandwidth.
- b) Set $VBW \geq 3 \times RBW$.
- c) Set $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the $RBW = 1 \text{ MHz}$.
- b) Set the $VBW \geq 3 \times RBW$
- c) Set the $span \geq 1.5 \times$ DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

12.2 Test Result:



Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.41	9.03	9.08
Limit: 1W/30dBm		



Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.10	9.04	9.48
Limit: 1W/30dBm		



Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.42	9.03	9.17
Limit: 1W/30dBm		



Test mode :TX 11n HT40		
Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.47	9.31	9.23
Limit: 1W/30dBm		



BLE		
Maximum Peak Output Power (dBm)		
2402MHz	2440MHz	2480MHz
-3.67	-1.88	-4.21
Limit: 1W/30dBm		

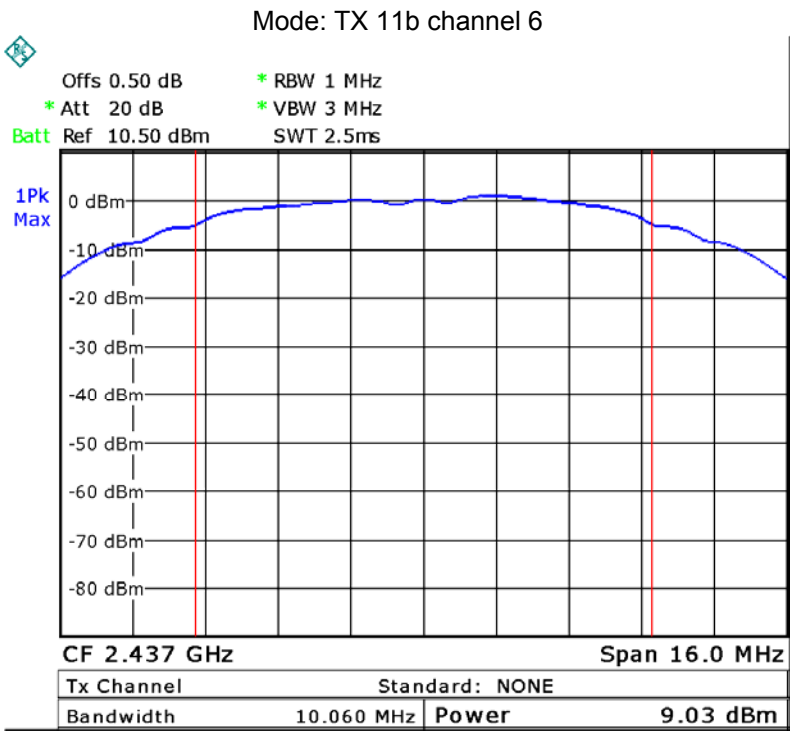
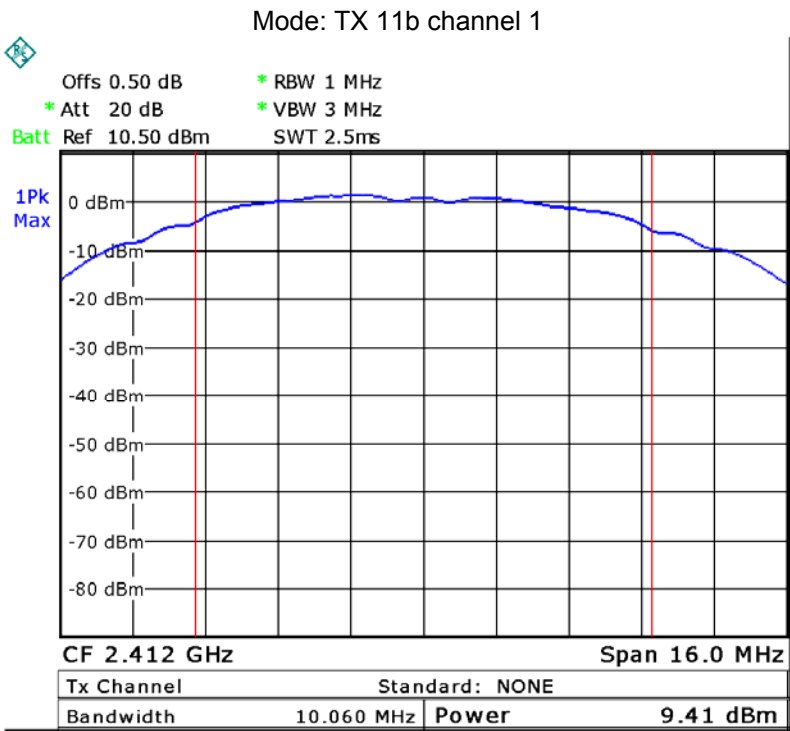


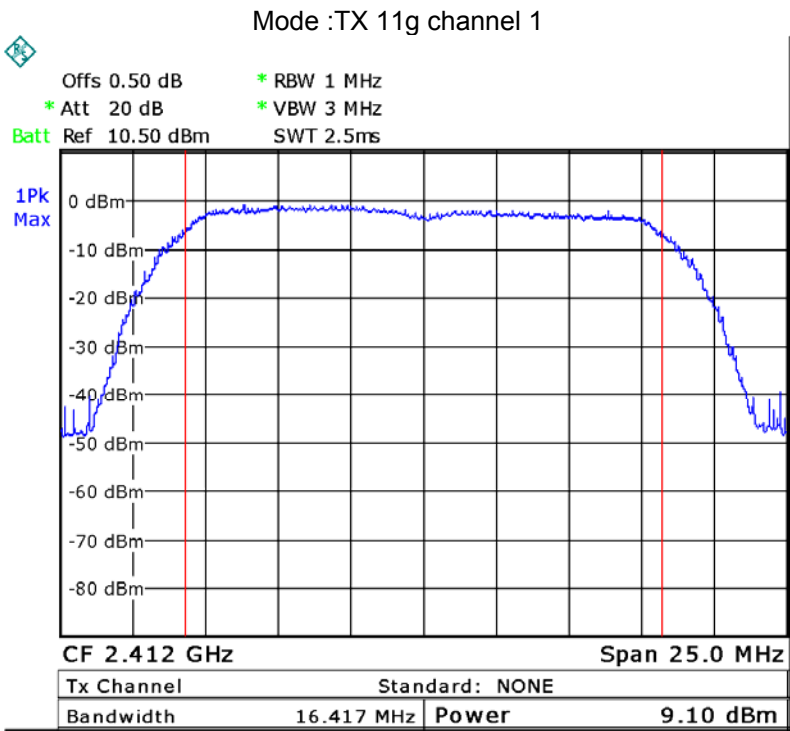
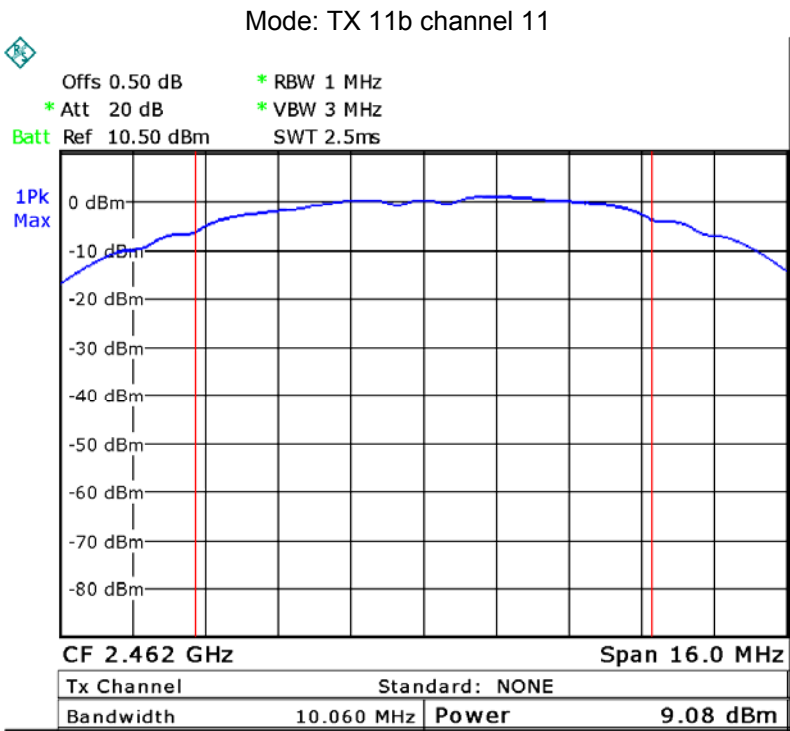


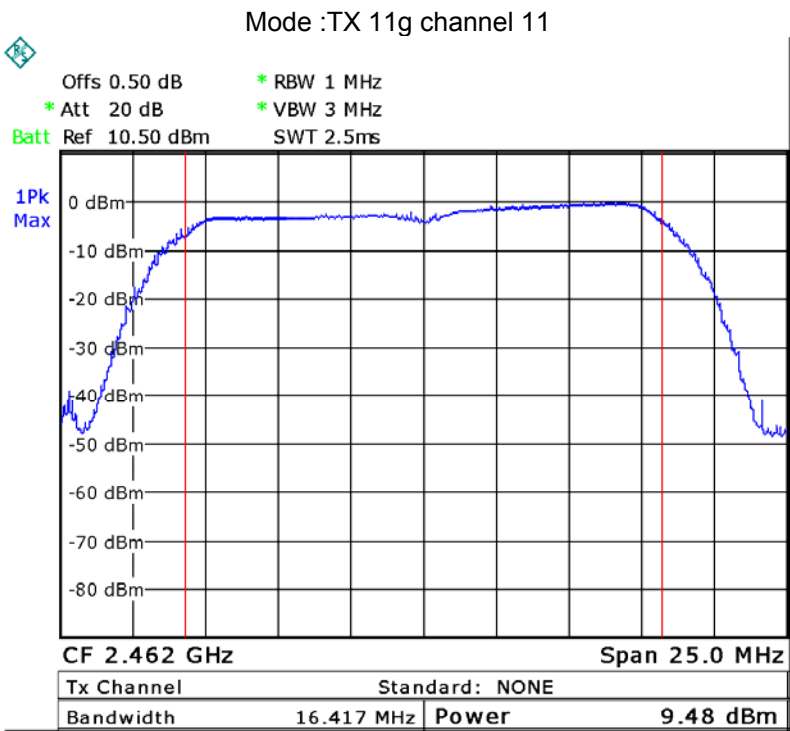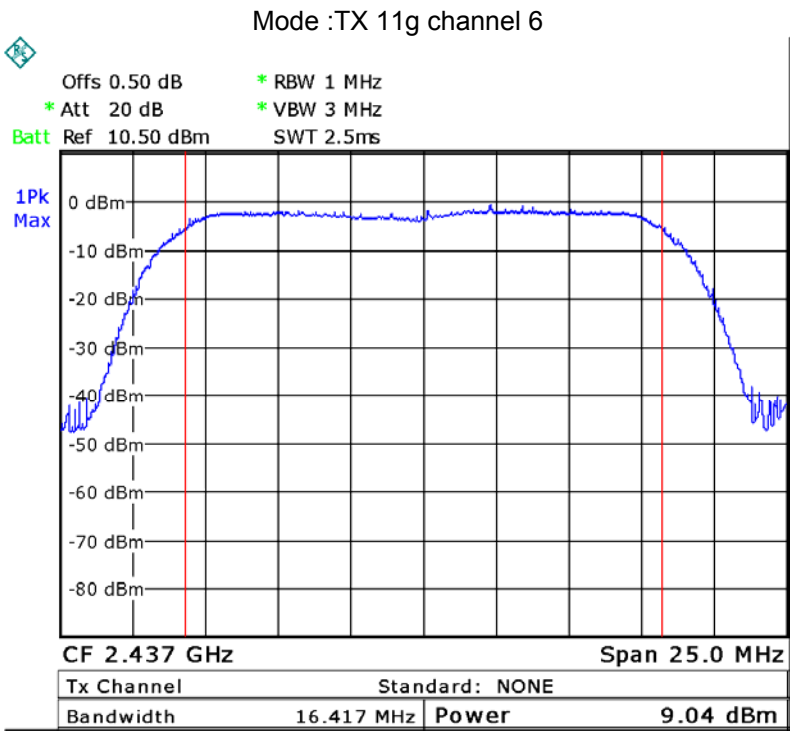


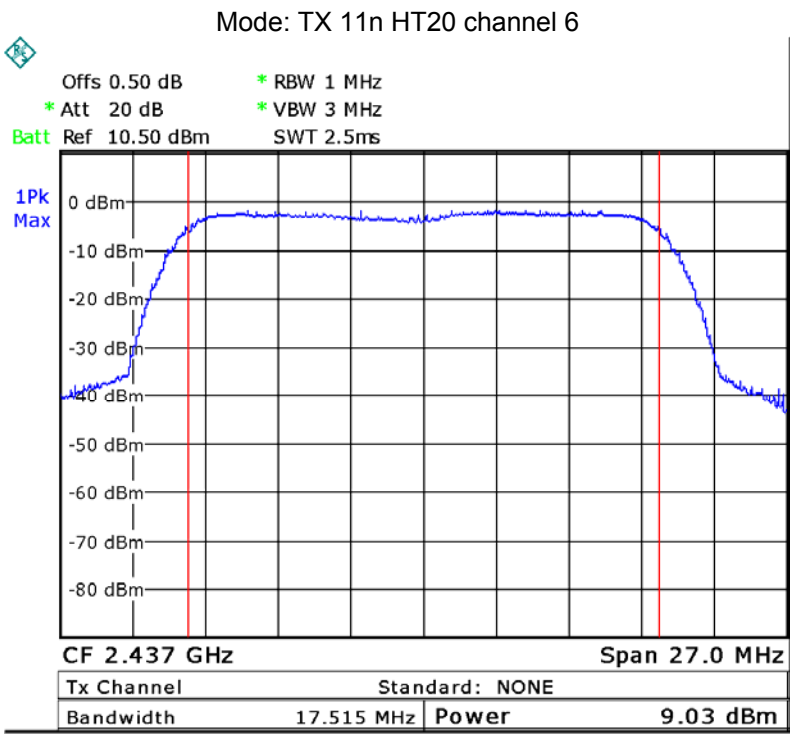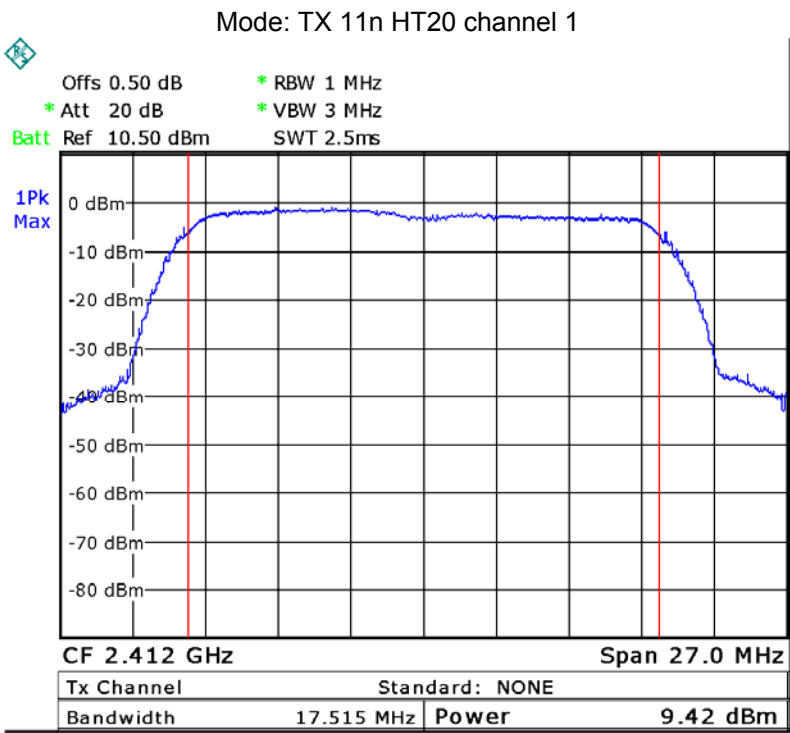

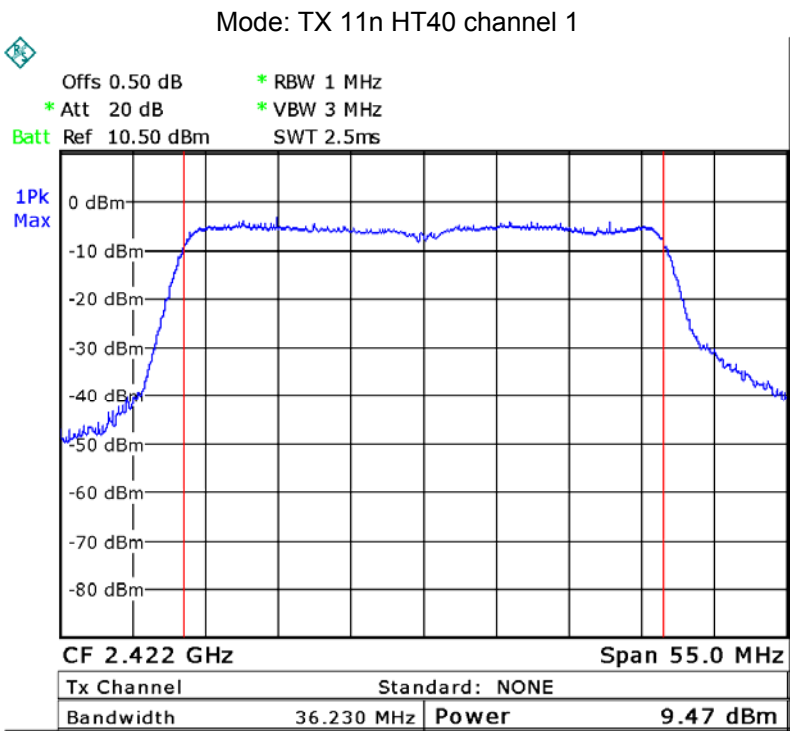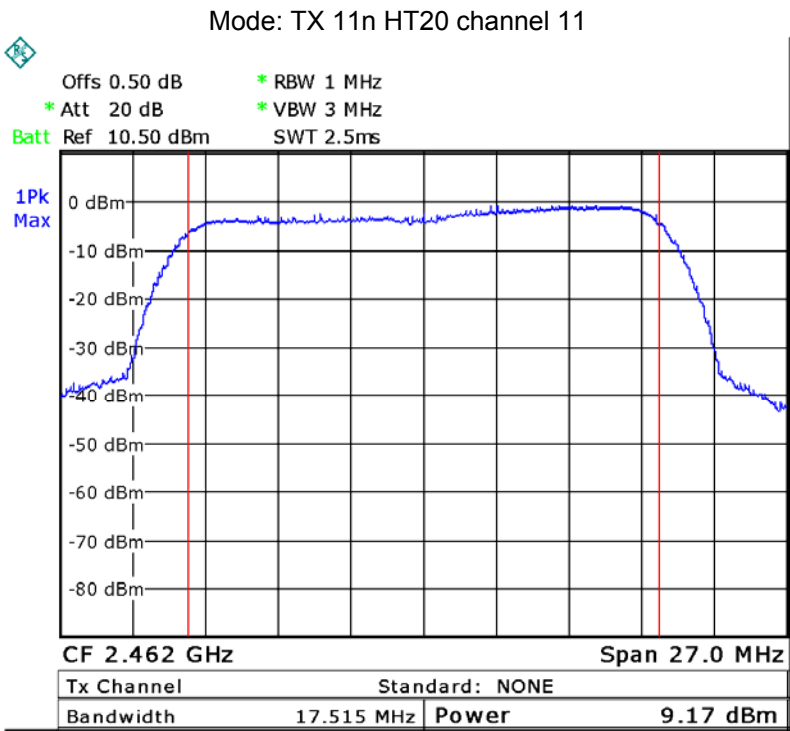

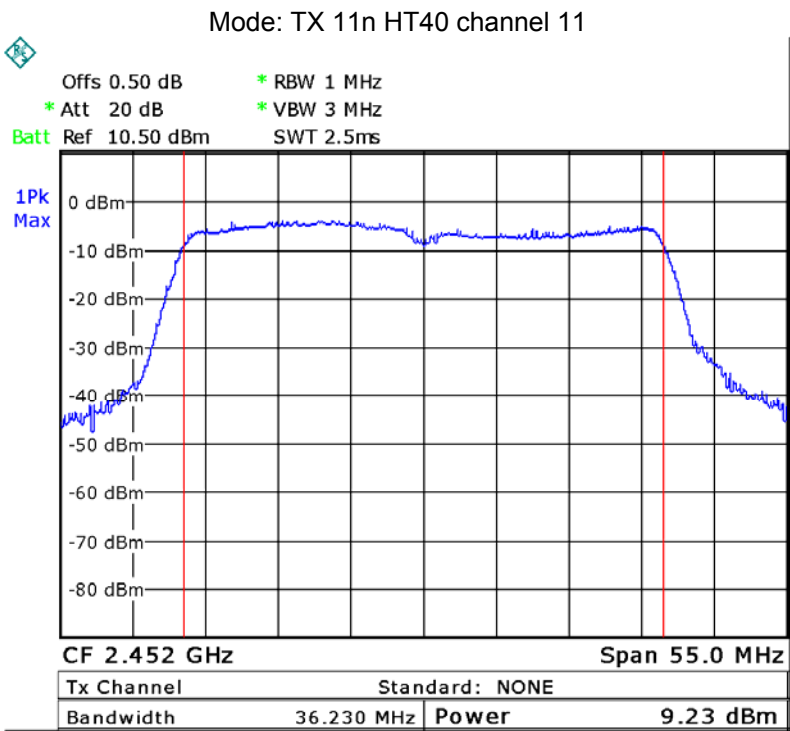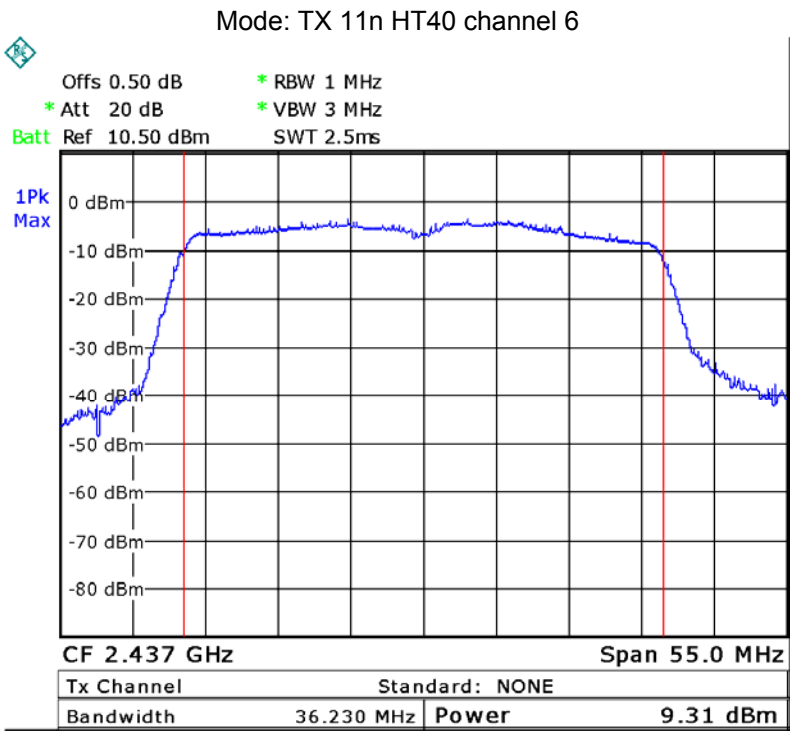

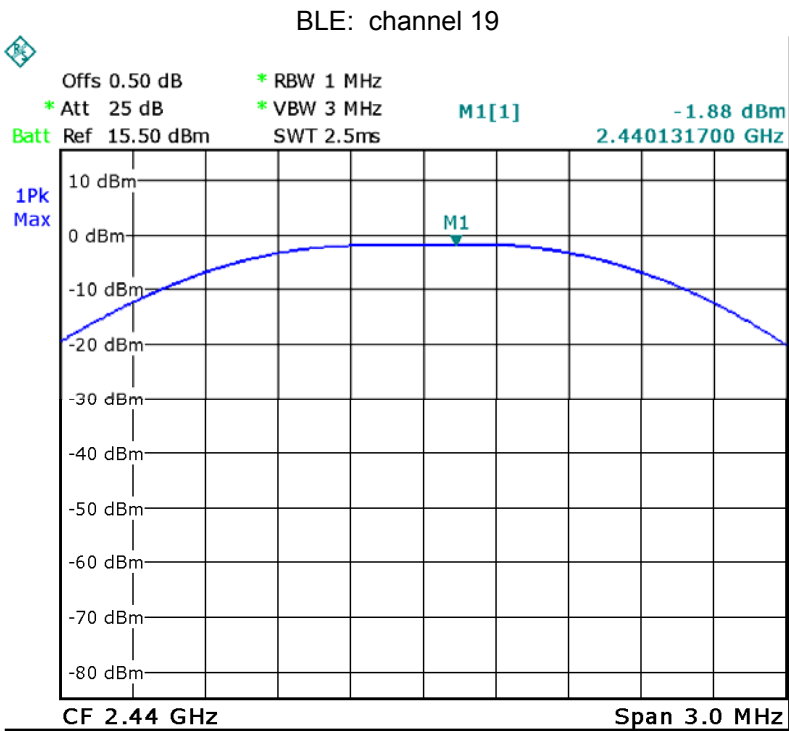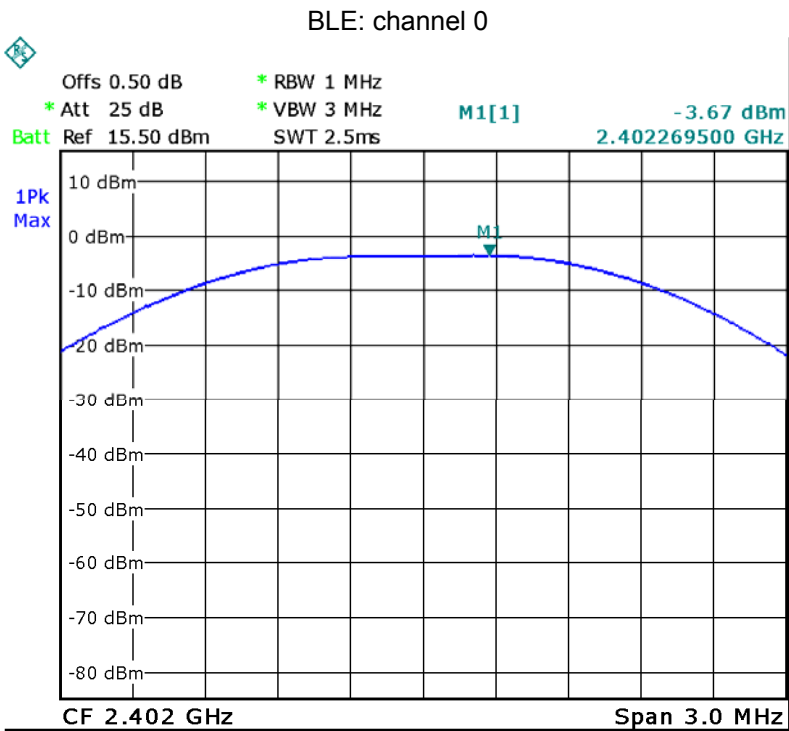

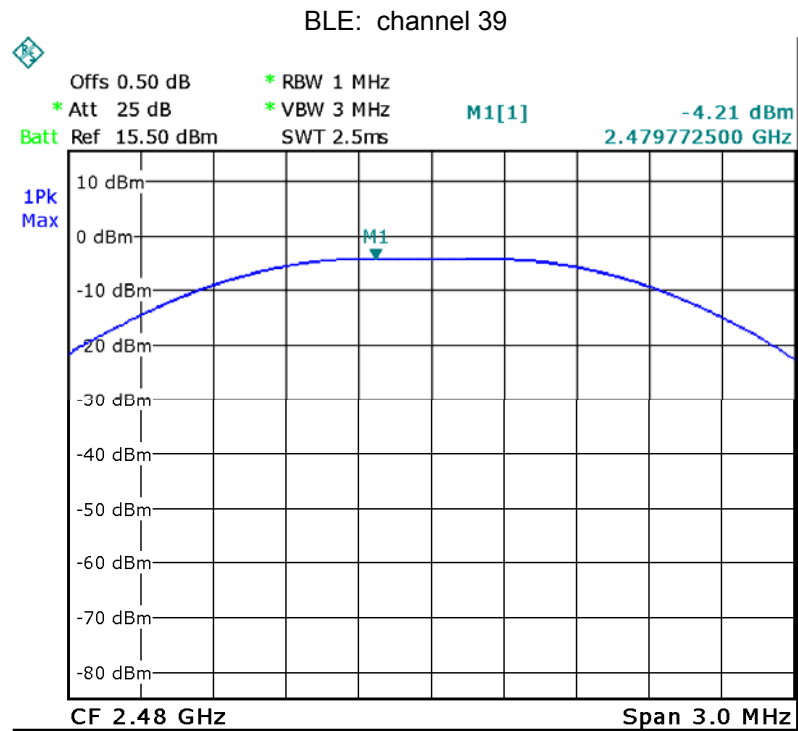

13 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016

13.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

13.2 Test Result:


Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-17.05	-17.97	-16.98
Limit: 8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-22.84	-23.12	-23.15
Limit: 8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-23.17	-22.43	-24.20
Limit: 8dBm per 3kHz		



Test mode :TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-23.37	-26.67	-27.93
Limit: 8dBm per 3kHz		



BLE		
Power Spectral (dBm per 3kHz)		
2402MHz	2440MHz	2480MHz
-19.49	-17.73	-19.92
Limit: 8dBm per 3kHz		


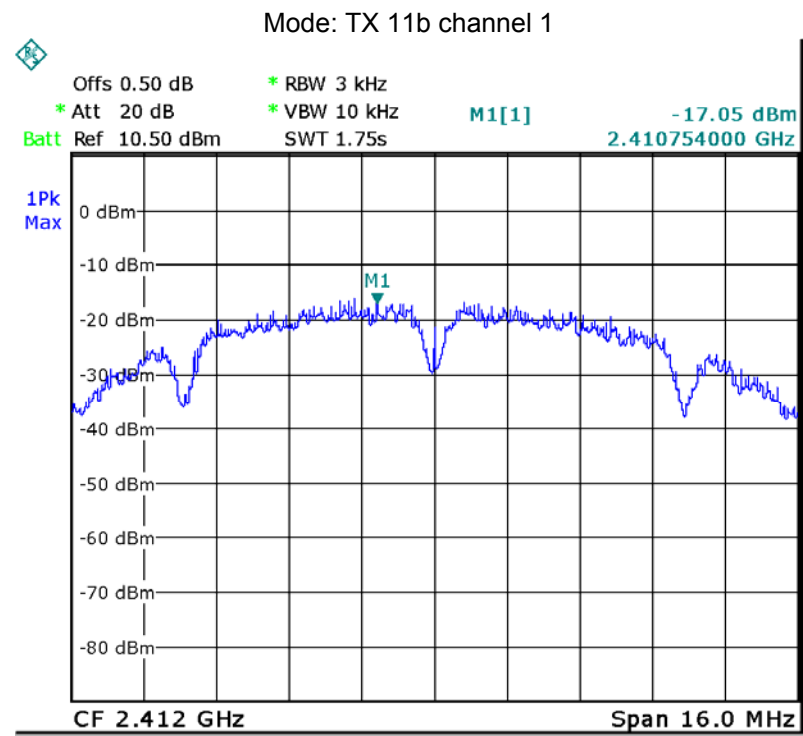


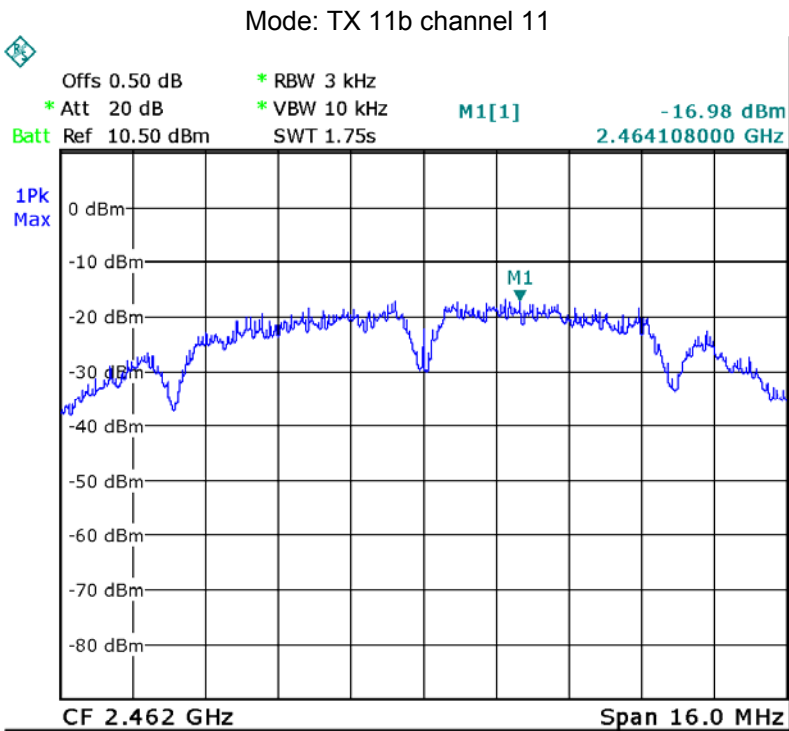
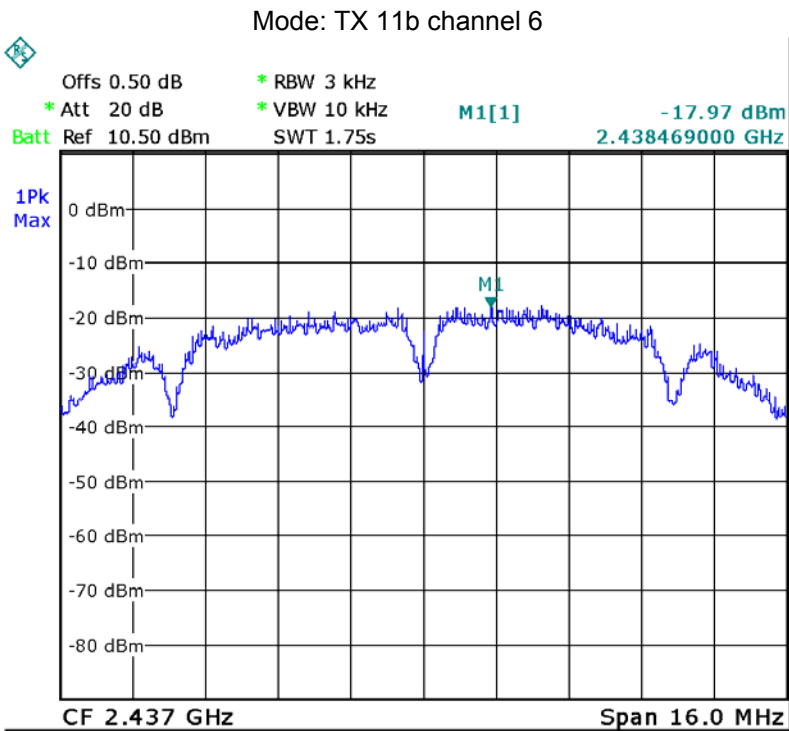


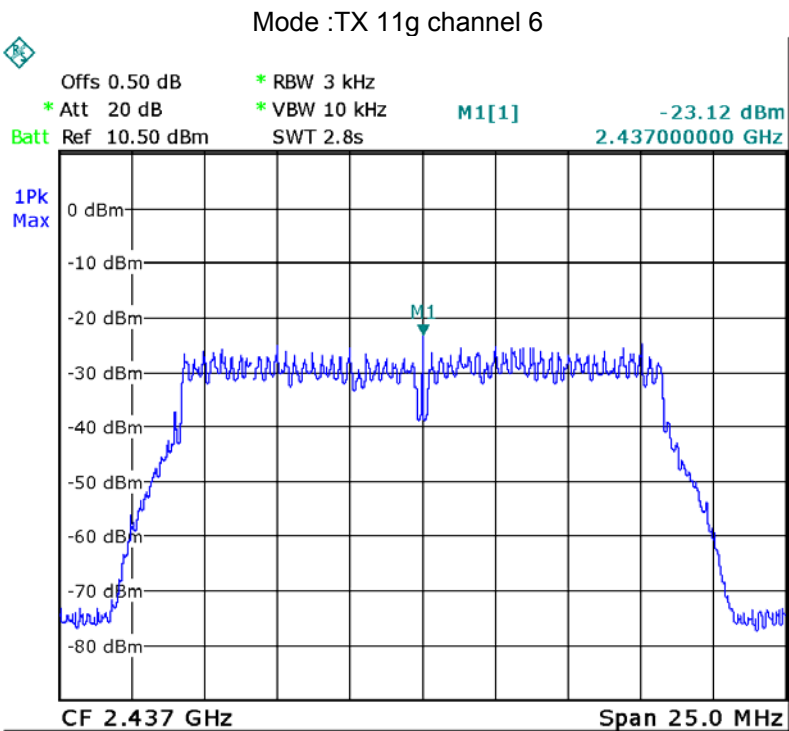
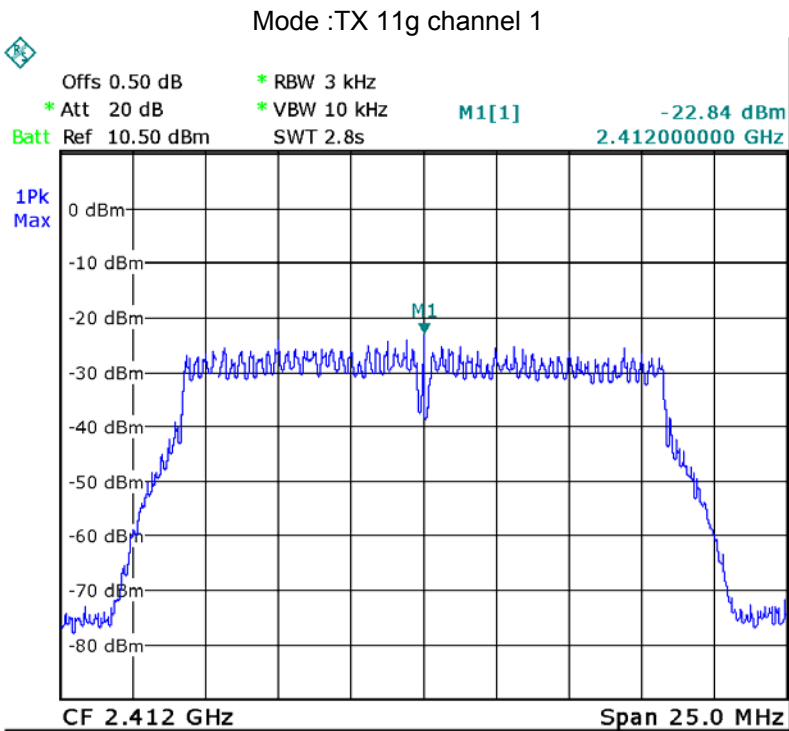


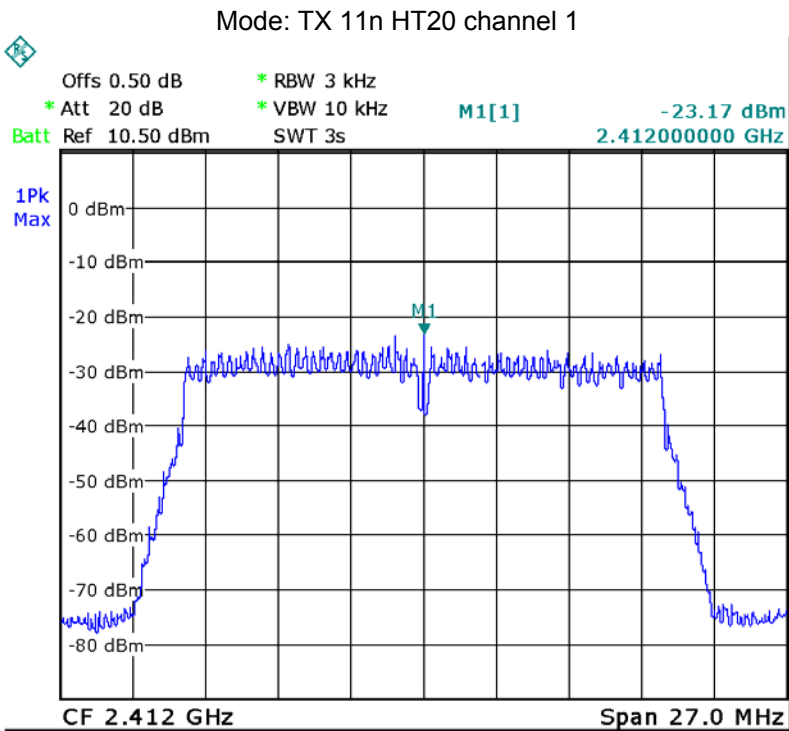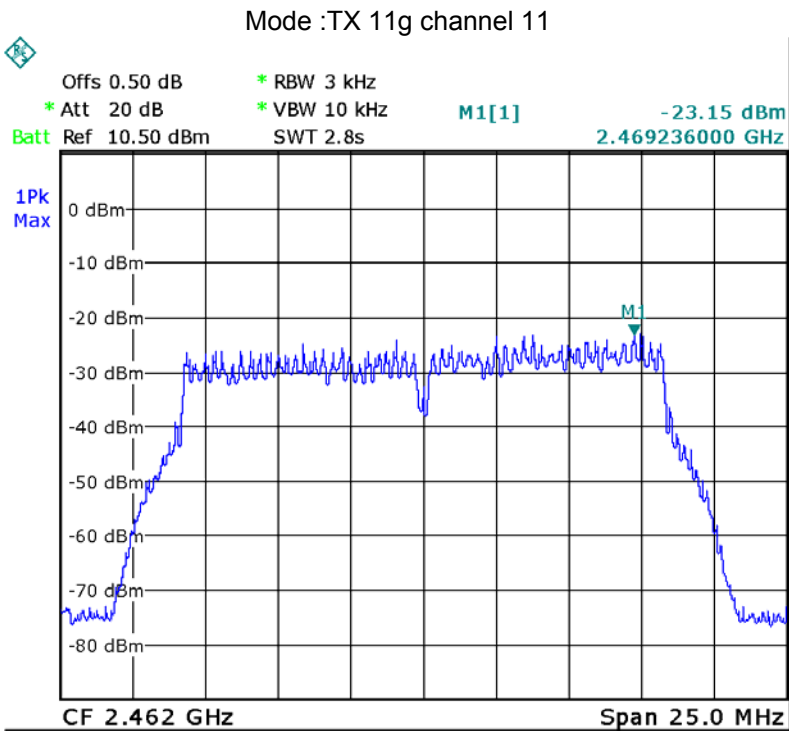

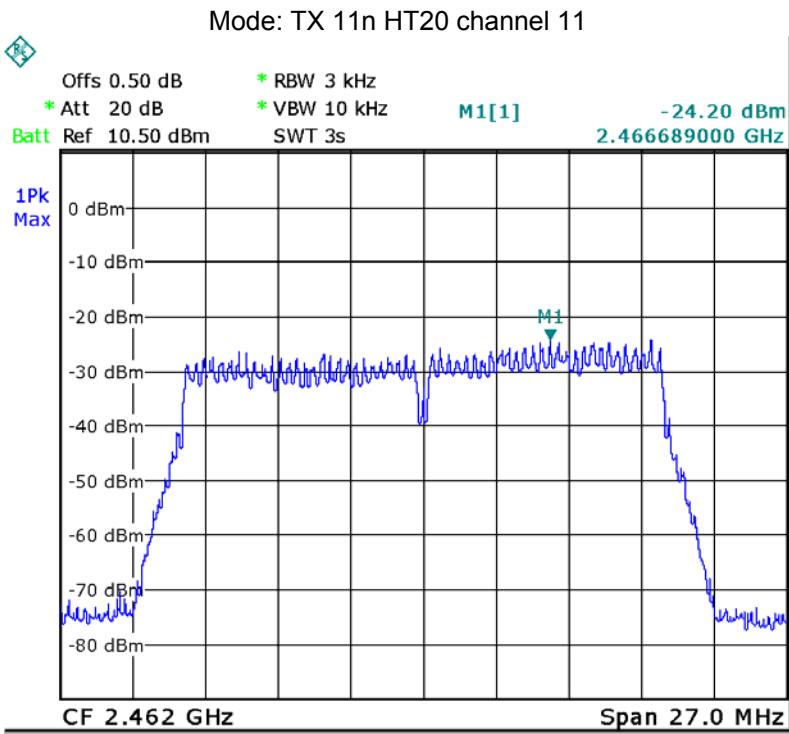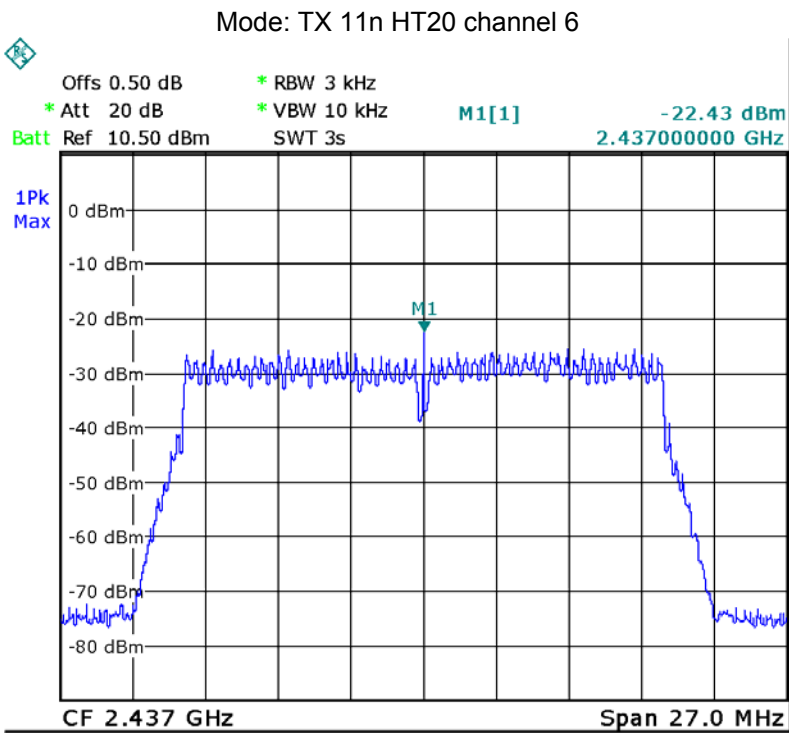

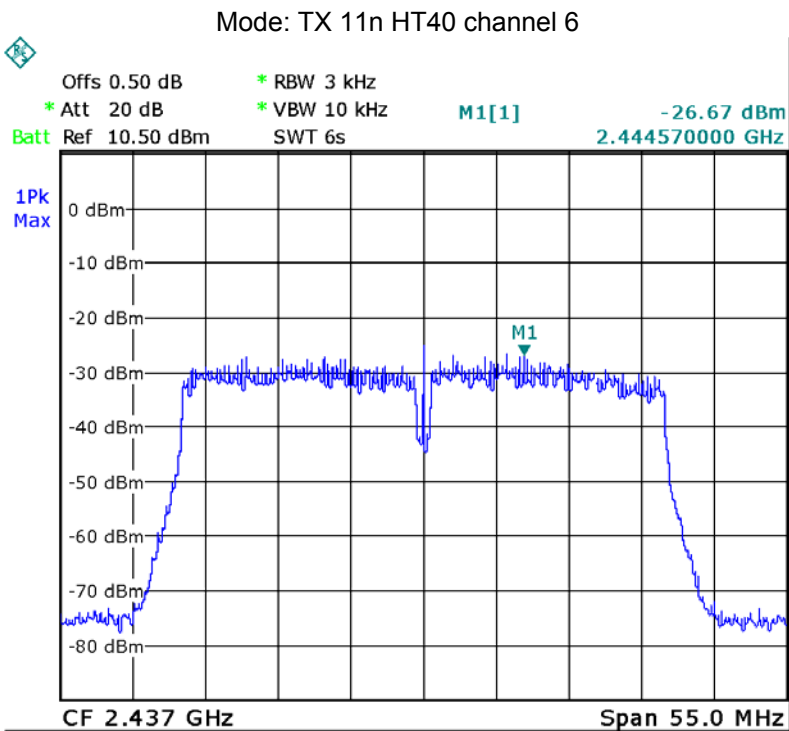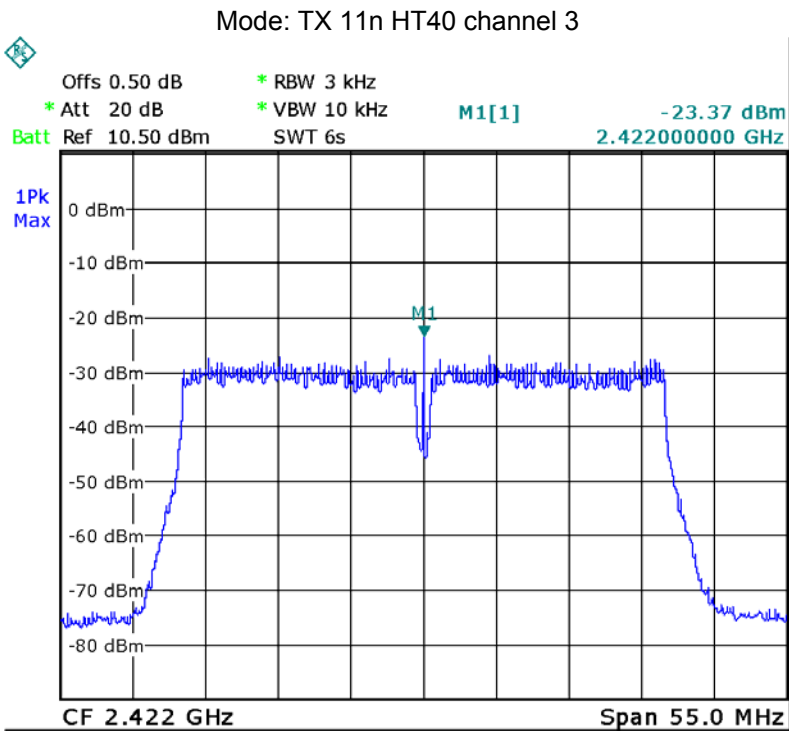

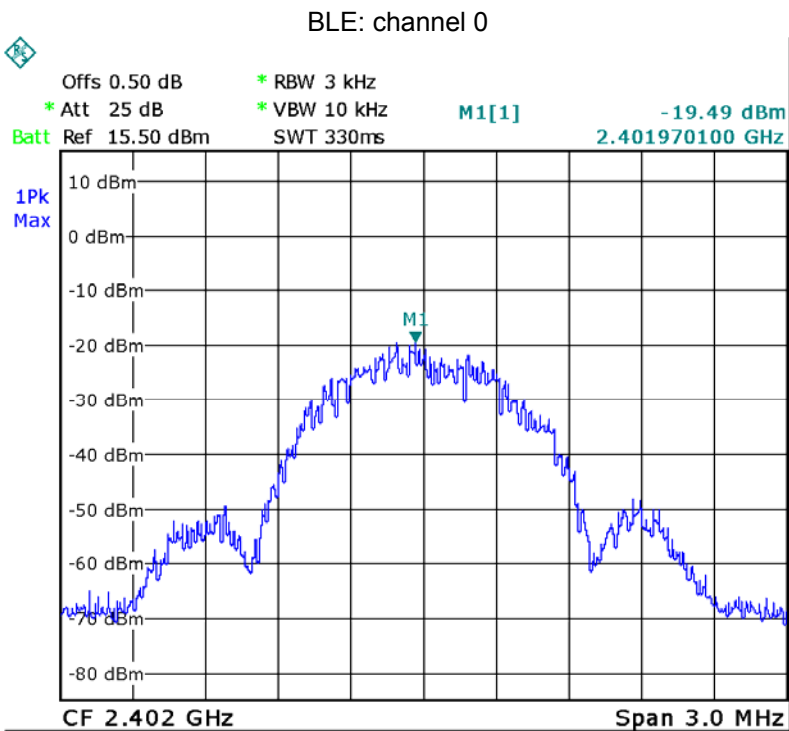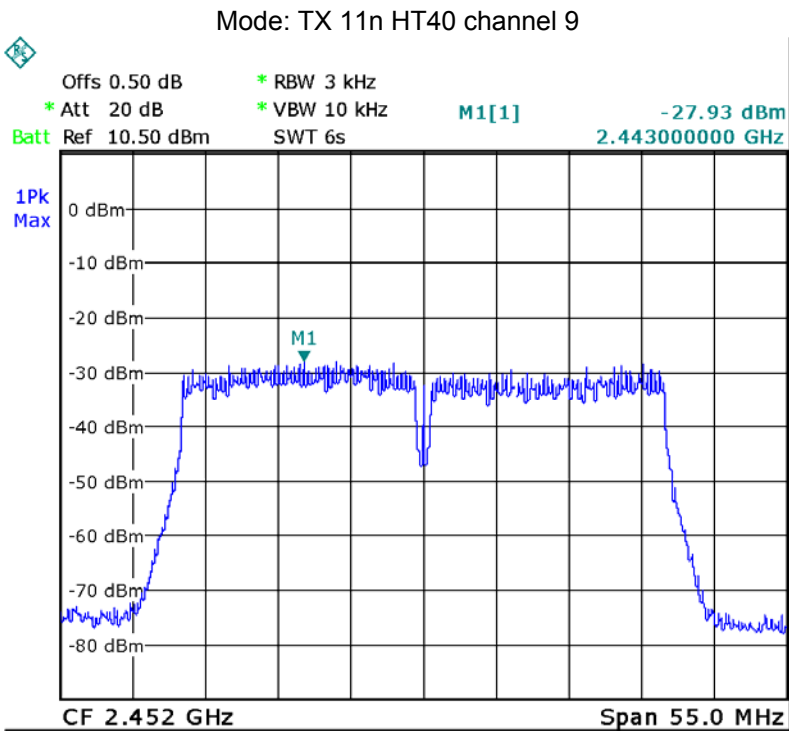

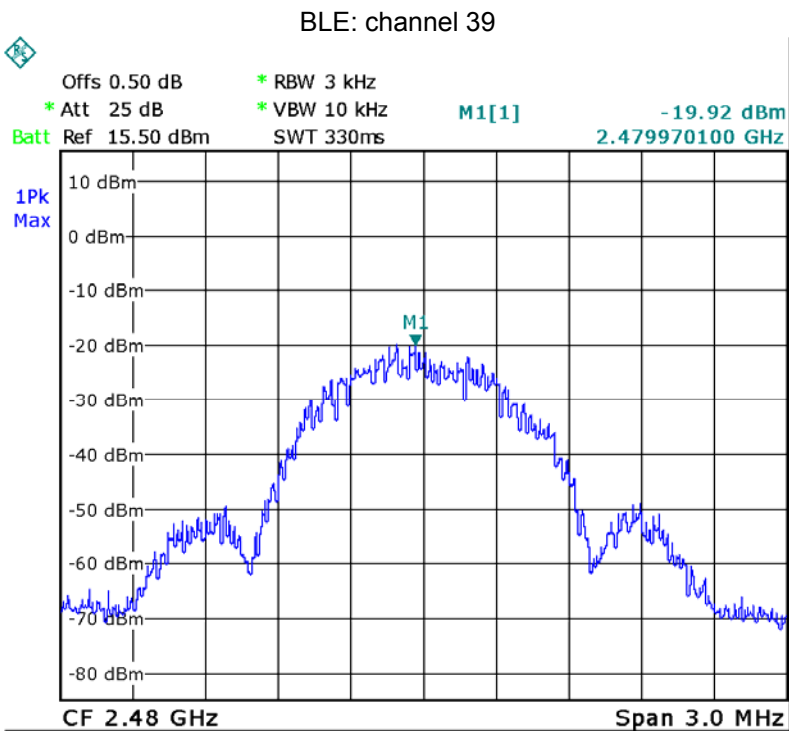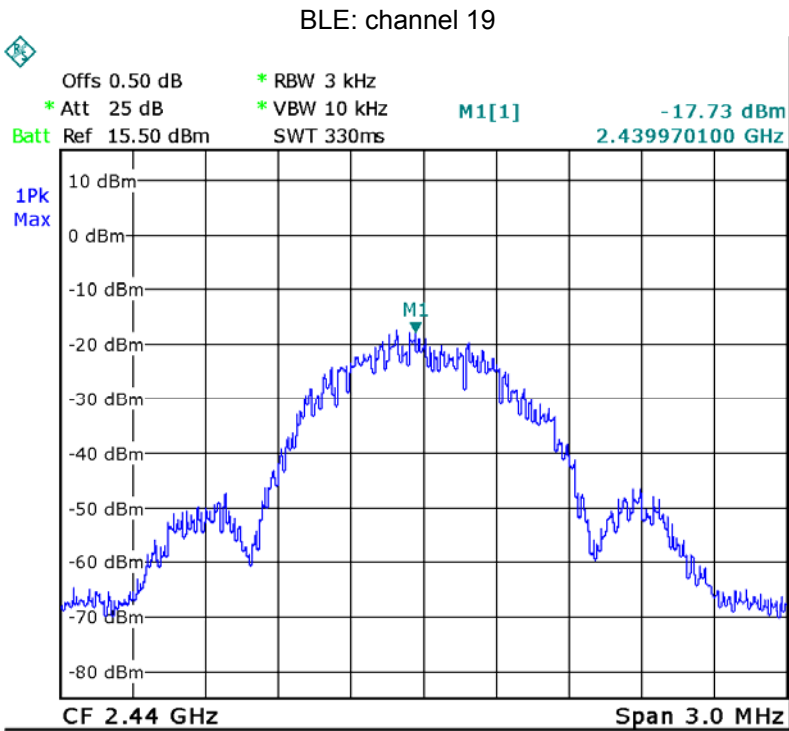

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

15 RF Exposure

Remark: refer to SAR test report: WTS16S0857820E

=====End of Report=====