

Produkte
Products

Prüfbericht - Nr.: 14048915 001			Seite 1 von 17		
<i>Test Report No.:</i>			<i>Page 1 of 17</i>		
Auftraggeber:		geobra Brandstätter Stiftung & Co.KG			
<i>Client:</i>		Brandstätterstraße 2-10			
		90513 Zirndorf			
		Germany			
Gegenstand der Prüfung:		2,4 GHz RC-MODUL-2017 controller			
<i>Test Item:</i>					
Bezeichnung:		30801844	Serien-Nr.:		Engineering sample
<i>Identification:</i>			<i>Serial No.:</i>		
Wareneingangs-Nr.:		A000534369-001~002	Eingangsdatum:		21.04.2017
<i>Receipt No.:</i>			<i>Date of Receipt:</i>		
Prüfart:		TÜV Rheinland Hong Kong Ltd.			
<i>Testing Location:</i>		3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong			
		Hong Kong Productivity Council			
		HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong			
Zustand des Prüfgegenstandes bei Anlieferung:			Test samples are not damaged and suitable for testing.		
<i>Condition of test item at delivery:</i>					
Prüfgrundlage:		FCC Part 15 Subpart C			
<i>Test Specification:</i>		RSS-247 Issue 2			
		ANSI C63.10-2013			
Prüfergebnis:		Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage.			
<i>Test Results:</i>		The above mentioned product was tested and passed .			
Prüflaboratorium:		TÜV Rheinland Hong Kong Ltd.			
<i>Testing Laboratory:</i>		3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong			
geprüft/ tested by:			kontrolliert/ reviewed by:		
10.05.2017 Mika Chan Project Manager 			10.05.2017 Sharon Li Department Manager 		
Datum	Name/Stellung	Unterschrift	Datum	Name/Stellung	Unterschrift
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>	<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>
Sonstiges:		FCC ID: N2T30801844			
<i>Other Aspects</i>		IC: 9285A-30801844			
Abkürzungen:		Abbreviations:			
P(ass) = entspricht Prüfgrundlage		P(ass) = passed			
F(ail) = entspricht nicht Prüfgrundlage		F(ail) = failed			
N/A = nicht anwendbar		N/A = not applicable			
N/T = nicht getestet		N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	5
Test Set-up and Operation Mode.....	6
Principle of Configuration Selection	6
Test Operation and Test Software.....	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
Test Methodology	7
Radiated Emission	7
Field Strength Calculation.....	7
Test Setup Diagram	8
List of Test and Measurement Instruments.....	10
Measurement Uncertainty	11
Results FCC Part 15 – Subpart C / RSS-247 Issue 2.....	12
FCC 15.203 – Antenna Requirement 1.....	Pass..... 12
FCC 15.204 – Antenna Requirement 2.....	N/A..... 12
RSS-Gen 6.3 – External Control.....	Pass..... 12
RSS-Gen 8.3 – Antenna Requirement	Pass..... 12
FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains.....	N/A..... 13
FCC 15.247 (a)(2) / RSS-247 5.2 – 6dB Bandwidth Measurement.....	Pass..... 13
RSS-Gen 6.6 – Occupied Bandwidth.....	Pass..... 13
FCC 15.247(b)(3) / RSS-247 5.4 – Maximum Peak Conducted Output Power.....	Pass..... 14
FCC 15.247(e) / RSS-247 5.2 – Power Spectral Density.....	Pass..... 14

FCC 15.247(d) / RSS-247 5.5 – Spurious Conducted Emissions	Pass.....	15
FCC 15.205/ RSS-Gen 8.9 – Radiated Emissions in Restricted Frequency Bands	Pass.....	16
Appendix 1 – Test protocols		17 pages
Appendix 2 – Test setup		2 pages
Appendix 3 – EUT External Photos		3 pages
Appendix 4 – EUT Internal Photos		6 pages
Appendix 5 – RF exposure information		2 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK
Number of channels	40
Channel separation	2 MHz
Type of antenna	PCB Antenna
Antenna gain (dBi)	5.3 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	No
Nominal voltage	V _{nor} : 4.5 VDC
Independent Operation Modes	Transmitting

Product function and intended use

The equipment under test (EUT) is a Bluetooth low energy device.

FCC ID: N2T30801844/ IC: 9285A-30801844

Models	Product description
30801844	2,4 GHz RC-MODUL-2017 controller

Submitted documents

Circuit Diagram
 Block Diagram
 Technical Description
 User manual
 Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

Special Accessories and Auxiliary Equipment

- none

Countermeasures to achieve EMC Compliance

- none

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

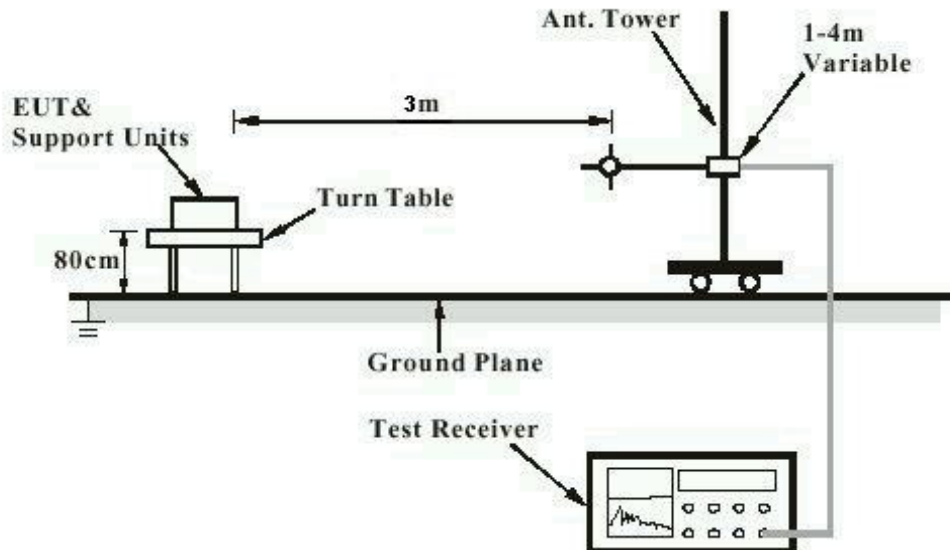

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


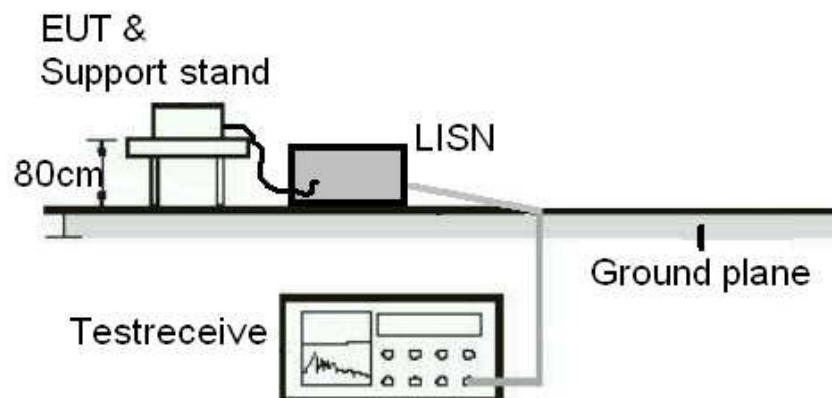


Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)

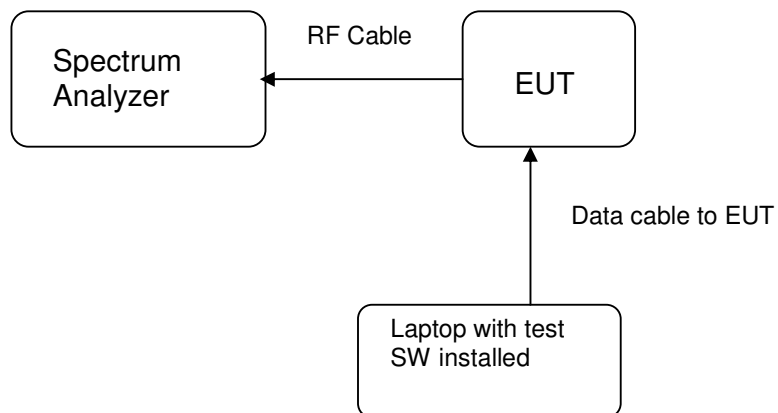

List of Test and Measurement Instruments

Hong Kong Productivity Council (FCC/ IC Registration number: 90656/ 4780A-1)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	25-Apr-17	25-Apr-18
Test Receiver	R & S	ESU40	26-Jul-16	26-Jul-17
Active Loop Antenna	EMCO	6502	27-Oct-16	27-Oct-17
Bi-conical Antenna	R & S	HK116	1-Sep-15	1-Sep-17
Log Periodic Antenna	R & S	HL223	1-Sep-15	1-Sep-17
Standard Gain Horn	ETS-Lindgren	3160-07	3-Mar-16	3-Mar-18
Standard Gain Horn	ETS-Lindgren	3160-08	3-Mar-16	3-Mar-18
Standard Gain Horn	ETS-Lindgren	3160-10	3-Mar-16	3-Mar-18
Double-Ridged Waveguide Horn	EMCO	3116	17-Jun-16	17-Jun-18
Double-Ridged Waveguide Horn	EMCO	3117	22-Jun-16	22-Jun-18
Coaxial cable	Harbour	LL335	10-Jun-16	10-Jun-18
High Frequency Cable	Pasternack	PE3VNA4001-3M	27-Jan-17	27-Jan-18
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	18-Jul-16	18-Jul-18
Preamplifier 18GHz to 40GHz with cable (EMC656)	A.H. Systems, Inc.	PAM-1840VH	27-Jan-17	27-Jan-18
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	28-Oct-15	28-Oct-17

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSV40	22-Jan-17	22-Jan-18

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 2.42\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 4.81\text{dB}$ (9kHz to 30MHz) and $\pm 4.62\text{dB}$ (30MHz to 200MHz) and $\pm 5.67\text{dB}$ (200MHz to 1000MHz) and is $\pm 5.07\text{dB}$ (1GHz to 8.2GHz) and $\pm 4.58\text{dB}$ (8.2GHz to 12.4GHz) and $\pm 4.78\text{dB}$ (12.4GHz to 18GHz)

The estimated combined standard uncertainty for antenna conducted emission is $\pm 2.1\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C / RSS-247 Issue 2

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type: Integral PCB antenna b) Manufacturer and model no: N/A c) Peak Gain: 5.3 dBi	
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		N/A
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

RSS-Gen 6.3 – External Control		Pass
IC Requirement: The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the limits prescribed in the applicable RSS.		
Results:	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict:	Pass	

RSS-Gen 8.3 – Antenna Requirement		Pass
IC Requirement: When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.		
Results:	a) Antenna type: Integral PCB antenna b) Manufacturer: N/A c) model no: N/A d) Gain with reference to an isotropic radiator: 5.3 dBi	
Verdict:	Pass	

FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains	N/A
There is no AC power input or output ports on the EUT.	

FCC 15.247 (a)(2) / RSS-247 5.2 – 6dB Bandwidth Measurement		Pass	
FCC Requirement: Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 4.5 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1			
Channel frequency (MHz)	6 dB left (MHz)	6 dB right (MHz)	6dB bandwidth (kHz)
2402	2401.670	2402.338	668.6
2440	2439.644	2440.347	703.3
2480	2479.647	2480.344	697.5

RSS-Gen 6.6 – Occupied Bandwidth		Pass	
FCC/ IC Requirement : N/A			
Test Specification : RSS-Gen Mode of operation : Tx mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 4.5 Vdc Temperature : 23°C Humidity : 50%			
Results:		Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.	
Frequency (MHz)	Left (MHz)	Right (MHz)	99% bandwidth (MHz)
2402	2401.496	2402.507	1.011
2440	2439.483	2440.525	1.042
2480	2479.483	2480.525	1.042

FCC 15.247(b)(3) / RSS-247 5.4 – Maximum Peak Couducted Output Power			Pass
FCC Requirement: For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 4.5 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1			
Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict
2402	-3.07	1 / 30.0	Pass
2440	-2.75	1 / 30.0	Pass
2480	-2.89	1 / 30.0	Pass

FCC 15.247(e) / RSS-247 5.2 – Power Spectral Density			Pass
FCC Requirement: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 4.5 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1.			
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict
2402	-3.10	8.0	Pass
2440	-2.79	8.0	Pass
2480	-2.92	8.0	Pass

FCC 15.247(d) / RSS-247 5.5 – Spurious Conducted Emissions					Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 4.5 Vdc Temperature : 23 °C Humidity : 50 %					
FCC Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Only the worst cases is shown below. For test protocols refer to Appendix 1					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	9606.0	-44.90	-3.10	-41.80	Pass
2440	9766.0	-45.45	-2.79	-42.66	Pass
2480	7436.0	-44.16	-2.92	-41.24	Pass

FCC 15.205/ RSS-Gen 8.9 – Radiated Emissions in Restricted Frequency Bands			Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Enclosure Detector : Peak Supply voltage : 4.5 Vdc Temperature : 23°C Humidity : 50%			
FCC Requirement: In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).			
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.			
Mode: 2402MHz TX		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2342.051	47.76	74.0 / PK	
2353.974	34.07	54.0 / AV	
Mode: 2402 MHz TX		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2353.461	47.27	74.0 / PK	
2353.974	34.07	54.0 / AV	
Mode: 2440 MHz TX		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
20638.461	36.16	74.0 / PK	
20638.578	29.56	54.0 / AV	
Mode: 2440 MHz TX		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
20712.500	36.68	74.0 / PK	
20712.485	28.53	54.0 / AV	
Mode: 2480MHz TX		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2483.500	48.47	74.0 / PK	
2483.500	39.30	54.0 / AV	
Mode: 2480 MHz TX		Horizontal Polarization	
Freq	Level	Limit/ Detector	

MHz	dBuV/m	dBuV/m
2489.343	47.87	74.0 / PK
2483.500	37.24	54.0 / AV