


Prüfbericht - Nr.: 14024129 001			Seite 1 von 14		
<i>Test Report No.:</i>			<i>Page 1 of 14</i>		
Auftraggeber: <i>Client:</i>		geobra Brandstaetter GmbH & Co. KG Brandstaetterstr.2-10 Postfach 1260 90513 Zirndorf Nuremberg Germany			
Gegenstand der Prüfung: 2.4GHz Wireless Camera <i>Test Item:</i>					
Bezeichnung: <i>Identification:</i>		4879-C		Serien-Nr.: <i>Serial No.:</i>	
				Engineering sample	
Wareneingangs-Nr.: <i>Receipt No.:</i>		00100607149-002		Eingangsdatum: 07.06.2010 <i>Date of Receipt:</i>	
Prüfört: <i>Testing Location:</i>		TÜV Rheinland Hong Kong Ltd. 8/F, Niche Centre, 14 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong			
Prüfgrundlage: <i>Test Specification:</i>		FCC Part 15 Subpart C ANSI C63.4-2003 CISPR 22:1997			
Prüfergebnis: <i>Test Results:</i>		Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .			
Prüflaboratorium: <i>Testing Laboratory:</i>		TÜV Rheinland Hong Kong Ltd. 9-10/F., Emperor International Square, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong			
geprüft/ tested by:			kontrolliert/ reviewed by:		
17.01.2011 Mika Chan Project Engineer			17.01.2010 Sharon Li Project Manager		
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
					
Sonstiges: Other Aspects		FCCID: N2T30829712			
Abkürzungen:		<i>P(ass) = entspricht Prüfgrundlage</i>		Abbreviations:	
<i>F(ail) = entspricht nicht Prüfgrundlage</i>		<i>N/A = nicht anwendbar</i>		<i>P(ass) = passed</i>	
<i>N/T = nicht getestet</i>				<i>F(ail) = failed</i>	
				<i>N/A = not applicable</i>	
				<i>N/T = not tested</i>	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Table of Content

Page

Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations.....	4
Product function and intended use	5
Submitted documents.....	5
Remark.....	5
Special accessories and auxiliary equipment	5
List of Test and Measurement Instruments.....	6
Results FCC Part 15 – Subpart C	7
Subclause 15.203 – Antenna Information.....	Pass7
Subclause 15.204 – Antenna Information.....	Pass7
Subclause 15.247 (a)(1) – Carrier Frequency Separation	Pass7
Subclause 15.247 (a)(1)(iii) – Number of hopping channels	Pass8
Subclause 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time).....	Pass8
Subclause 15.247 (a) – 20 dB Bandwidth.....	Pass9
Subclause 15.247 (a) – Hopping Sequence.....	Pass9
Subclause 15.247 (a) – Equal Hopping Frequency Use	Pass10
Subclause 15.247 (a) – Receiver Input Bandwidth.....	Pass11
Subclause 15.247 (b)(1) – Peak Output Power.....	Pass11
Subclause 15.247 (d) – Band edge compliance of conducted emissions	Pass12
Subclause 15.205 – Band edge compliance of radiated emissions	Pass12
Subclause 15.247 (d) – Spurious Conducted Emissions.....	Pass13
Subclause 15.247 (d) – Spurious Radiated Emissions	Pass13
Appendix 1 – Test protocols	20 pages
Appendix 2 – Test setup Photos.....	2 pages
Appendix 3 – Photo documentation	7 pages

Appendix 4 – Product documentation 15 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2406 - 2478 MHz
Type of modulation	FHSS modulation
Number of channels	19
Channel separation	3.375-6.75 MHz
Type of antenna	Integral
Antenna gain (dBi)	0
Power level	fix
Type of equipment	stand alone
Connection to public utility power line	No
Nominal voltage	V _{nom} : 3V Batteries AAX2
Independent Operation Modes	Connection state - Data Link

Product function and intended use

The EUT is wireless camera which operating at 2.4GHz band. It capture the video and transmits to LCD monitor wirelessly.

Further the LCD monitor contains a wireless webcam function which displays the video information on the computer screen via USB connection.

Submitted documents

Circuit Diagram
Block Diagram
Bill of material
User manual

Remark

-

Special accessories and auxiliary equipment

The product has been tested together with the following additional accessory:

-

List of Test and Measurement Instruments

	Equipment used	Manufacturer	Model No.	S/N	Due Date
☒	Semi-anechoic Chamber	Frankonia	Nil	Nil	27-Apr-11
☒	Test Receiver	R & S	ESU26	100050	25-May-11
☒	Bi-conical Antenna	R & S	HK116	100242	13-Apr-12
☒	Log Periodic Antenna	R & S	HL223	841516/020	13-Apr-12
☒	Coaxial cable 50ohm	Rosenberger	RTK081-05S-05S-10m	LA2-001-10M / 001	07-Dec-10
☒	Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	3950M00241	03-Oct-11
☒	High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	9829213	30-Oct-11
☒	Horn Antenna	EMCO	3115	9002-3351	16-Apr-12
☒	Spectrum Analyser	R & S	FSP 30	100416	17-Sep-12
☒	Active Loop Antenna	EMCO	6502	9107-2651	06-Feb-11
☒	Test Receiver	R & S	ESCS 30	100201	17 Jan 11
☒	Artificial Mains Network	R & S	ESH3-Z5	100230	11 Jan 11

Results FCC Part 15 – Subpart C

Subclause 15.203 – Antenna Information		Pass
Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Results:	Permanent attached antenna	
Verdict:	Pass	

Subclause 15.204 – Antenna Information		Pass
Requirement:	Provide information for every antenna proposed for the use with the EUT	
Results:	a) Antenna type:	Integral
	b) Manufacturer and model no:	N.A.
	c) Gain with reference to an isotropic radiator:	0 dBi
Verdict:	Pass	

Subclause 15.247 (a)(1) – Carrier Frequency Separation		Pass
Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31		
Mode of operation : Tx mode (hopping on), FHSS		
Port of testing : Temporary antenna port		
Detector : Peak		
RBW/VBW : 100 kHz / 300 kHz		
Supply voltage : 3VDC from DC power supply		
Temperature : 23°C		
Humidity : 50%		
Results:	The centre frequencies of the hopping channels are separated by more than the 2/3*20dB bandwidth. For test Results plots refer to Appendix 1, page 2.	
Verdict:	Pass	

Subclause 15.247 (a)(1)(iii) – Number of hopping channels		Pass
Requirement:	Frequency hopping systems operating in the 2400MHz-2483.5MHz bands shall use at least 15 hopping frequencies.	
Test Specification	: FCC Part 15 Subpart A – Subclause 15.31	
Mode of operation	: Tx mode (hopping on), FHSS	
Port of testing	: Temporary antenna port	
Detector	: Peak	
RBW/VBW	: 1 MHz / 3 MHz	
Supply voltage	: 3VDC from DC power supply	
Temperature	: 23°C	
Humidity	: 50%	
Results:	The total number of hopping frequencies is more than 15. For test Results plots refer to Appendix 1, page 3.	
Verdict:	Pass	

Subclause 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time)		Pass
Requirement:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.	
Test Specification	: FCC Part 15 Subpart A – Subclause 15.31	
Mode of operation	: Tx mode (hopping on), FHSS	
Port of testing	: Temporary antenna port	
Detector	: Peak	
RBW/VBW	: 1 MHz / 3 MHz	
Supply voltage	: 3VDC from DC power supply	
Temperature	: 23°C	
Humidity	: 50%	
Results:	Time period calculation = 0.4 x 19 = 7.6s Dwell time = 49 x 5.58 x 10 ⁻³ = 273.42 x 10 ⁻³ <= 400 x 10 ⁻³ s	
For test protocols please refer to Appendix 1, page 4-5.		
Verdict:	Pass	

Subclause 15.247 (a) – 20 dB Bandwidth		Pass	
Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.		
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2406MHz, 2436MHz, 2478MHz), (FHSS) Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 30 kHz / 100 kHz Supply voltage : 3VDC from DC power supply Temperature : 23°C Humidity : 50%			
Results:	For test protocols refer to Appendix 1, page 6-7.		
FHSS Modulation			
Frequency (MHz)	20 dB left (MHz)	20 dB right (MHz)	20dB bandwidth (MHz)
2406	1.568	1.708	3.276
2436	1.666	1.666	3.332
2478	1.596	1.610	3.206

Subclause 15.247 (a) – Hopping Sequence	Pass
Requirement:	The hopping sequence is generated and provided with an example.
Hopping sequence This device operate in the 2.4GHz ISM band, the baseband protocol employ FHSS (Frequency Hopping Spread Spectrum) technology for data communication. It change the communication channel in a pseudo random sequence, it will also monitor the preformance of each channel so that to avoid using over crowded channels. It hops in following 19 channels in a pseudo random way - 2406.375MHz, 2413.125MHz, 2416.500MHz, 2419.875MHz, 2423.250MHz, 2426.625MHz, 2430.000MHz, 2433.375MHz, 2436.750MHz, 2441.250MHz, 2444.625MHz, 2448.000MHz, 2451.375MHz, 2454.750MHz, 2458.125MHz, 2461.500MHz, 2464.875MHz, 2468.250MHz, 2478.375MHz.	

Example data:

Format of each data packet




Hopping Rules

It use adaptive frequency hopping with the above 19 Channels. They are non-overlapped (above 20dBc) in the 2.4GHz ISM band. The channel spacing are at or above 3.375MHz while the channel bandwidth is below 2.500MHz.



In the below graph, there are 3 hopping conditions, Hop A is a normal condition, Hop B is when the channel is interfered by other device. The interfered channels are graded to Good, Bad & Poor, and being monitored to update the garding. Hop C is when some channels are bad, it hops to next good channel.

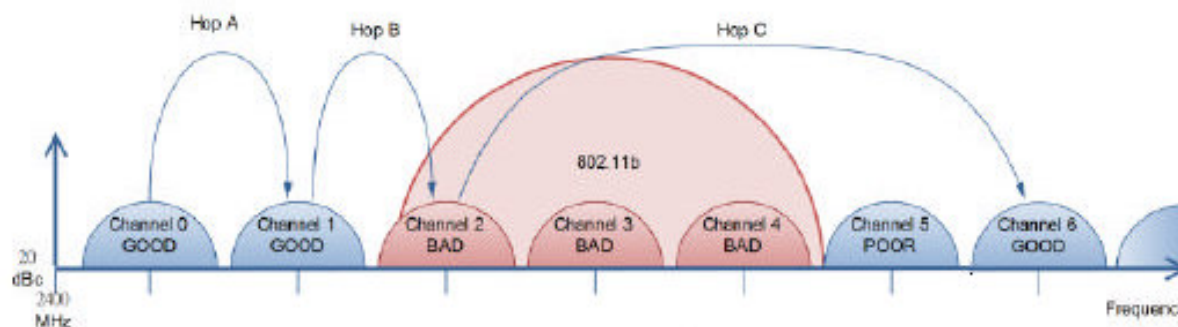

There are number of hopping sequence build- in. Each paired device will select a hopping sequence at "paired". In a selected hopping sequence, there still some pseudo variation so that even if, although very low possibility, two set of "paired" device selected the same hopping sequence, they can still work properly.

Subclause 15.247 (a) – Equal Hopping Frequency Use

Pass

Requirement: Each of the transmitter's hopping channels is used equally on average.

Equal hopping frequency use

In a fixed period, the probability for each available channel to be chosen is equal.

Subclause 15.247 (a) – Receiver Input Bandwidth	Pass
Requirement: The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.	
Receiver input bandwidth The receiver bandwidth is equal to the transmitter bandwidth in the 19 hopping channel mode, which is 5MHz. The receiver bandwidth was verified during RF conformance testing.	

Subclause 15.247 (b)(1) – Peak Output Power				Pass	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2406MHz, 2436MHz, 2478MHz) Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 10 MHz / 10 MHz Supply voltage : 3VDC from DC power supply Temperature : 23°C Humidity : 50%					
Requirement:		For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 Watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 Watts.			
Results:		For test protocols please refer to Appendix 1, page 8-9.			
FHSS Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2406	9.68	1.95	11.630	1 / 30.0	Pass
2436	9.62	1.95	11.570	1 / 30.0	Pass
2478	9.32	1.95	11.270	1 / 30.0	Pass

Subclause 15.247 (d) – Band edge compliance of conducted emissions		Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2406MHz, 2478MHz), FHSS Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3VDC from DC power supply Temperature : 23°C Humidity : 50%		
Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Results:	There is no peak found outside any 100 kHz bandwidth of the operating frequency band. For test protocols refer to Appendix 1, page 10.	

Subclause 15.205 – Band edge compliance of radiated emissions		Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2406MHz, 2478MHz), FHSS Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3VDC from DC power supply Temperature : 23°C Humidity : 50%		
Requirement:	Radiated emissions which fall in the restricted bands, as defined in 15.205 (a), must also comply with the radiated emission limits specified in 15.209(a).	
Results:	There is no peak found in the restricted bands. For test protocols refer to Appendix 1, page 11-18.	

Subclause 15.247 (d) – Spurious Conducted Emissions					Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2406MHz, 2436MHz, 2478MHz), FHSS Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3VDC from DC power supply Temperature : 23 °C Humidity : 50 %					
Requirement:		In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Results:		There is no peak found outside any 100kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(d). For test protocols refer to Appendix 1, page 19-20.			
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2406	no peak found	---	---	---	Pass
2436	4850.000	-46.60	5.65	-52.25	Pass
2478	no peak found	---	---	---	Pass

Subclause 15.247 (d) – Spurious Radiated Emissions		Pass
Test Specification : ANSI C63.4 – 2003 Mode of operation : Tx mode (2406MHz, 2436MHz, 2478MHz), FHSS Port of testing : Enclosure Detector : Peak RBW/VBW : 100 kHz / 300 kHz for $f < 1$ GHz 1 MHz / 3 MHz for $f > 1$ GHz Supply voltage : internal batteries has been activated Temperature : 23°C Humidity : 50%		
Requirement: In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).		
Results: All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.		
Tx frequency 2406MHz		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
624.001	30.70	46 / QP
4811.202	66.34	74.0 / P

4814.183	34.07	54.0 / A
Tx frequency 2406MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
624.001	38.60	46 / QP
4811.234	56.14	74.0 / P
4811.234	32.89	54.0 / A
Tx frequency 2436MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4874.984	60.28	74.0 / P
4871.859	33.13	54.0 / A
Tx frequency 2436MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4872.147	53.64	74.0 / P
4874.934	32.43	54.0 / A
Tx frequency 2478MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4958.397	61.96	74.0 / P
4958.189	34.03	54.0 / A
Tx frequency 2478MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4958.237	57.69	74.0 / P
4955.096	33.75	54.0 / A