

**ROGERS LABS, INC.**

4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

**ENGINEERING TEST REPORT  
FOR  
APPLICATION of  
GRANT of CERTIFICATION**

FOR  
**CFR 47, PART 15C - INTENTIONAL RADIATORS**  
**Paragraph 15.247**  
**Spread Spectrum Frequency Hopping Transmitter**

For

**Advanced Tracking Technology Inc.**

PO Box 168  
Sugar Land, TX 77487  
Paul Glass,

SHADOW TRACKER PREMIER  
Model: ST-869  
Frequency 902-928 MHz  
FCC ID#: N3F-ST869

Test Date: July 25, 2002

Certifying Engineer: *Scot D Rogers*

Scot D. Rogers  
ROGERS LABS, INC.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone: (913) 837-3214  
FAX: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

## TABLE OF CONTENTS

<b>FORWARD:</b>	3
<b>1) APPLICABLE STANDARDS &amp; TEST PROCEDURES</b>	3
2.1033(b) Application for Certification	4
<b>2) EQUIPMENT TESTED</b>	5
<b>3) EQUIPMENT FUNCTION AND TESTING PROCEDURES</b>	5
<b>4) EQUIPMENT AND CABLE CONFIGURATIONS</b>	5
Conducted Emission Test Procedure	5
Radiated Emission Test Procedure:	6
<b>5) LIST OF TEST EQUIPMENT</b>	6
<b>6) UNITS OF MEASUREMENTS</b>	7
<b>7) TEST SITE LOCATIONS</b>	7
<b>8) SUBPART B – UNINTENTIONAL RADIATORS</b>	8
Conducted EMI	8
Radiated EMI	10
Conducted (7 Highest Emissions)	14
Data: General Radiated Emissions from EUT (6 Highest Emissions)	14
Summary of Results for Conducted Emissions	14
Summary of Results for Radiated Emissions	15
Statement of Modifications and Deviations	15
<b>9) SUBPART C - INTENTIONAL RADIATORS</b>	15
15.203 Antenna Requirements	15
15.205 Restricted Bands of Operation	15
Data: Emissions in Restricted Bands	16
Summary of Results for Radiated Emissions in Restricted Bands:	16
15.209 Radiated Emissions Limits; General Requirements	16
Radiated EMI	16
Data: General Radiated Emissions from EUT (6 Highest Emissions)	18
Summary of Results for Radiated Emissions:	18
15.247 Operation in the Band 902-928 MHz	18
Data: Radiated Emissions from EUT	24
Data: Radiated Emissions and substitution power required	25
Summary of Results for Radiated Emissions of Intentional Radiator	25
Statement of Modifications and Deviations	25

**FORWARD:**

The following is submitted for consideration in obtaining a Grant of Certification for spread spectrum intentional radiators per CFR Paragraph 15.247.

Name of Applicant:

Advanced Tracking Technology Inc.  
PO Box 168  
Sugar Land, TX 77487

Model: ST-869 Spread Spectrum Frequency HoppingTransmitter.

FCC I.D.: N3F-ST869.

Frequency Range: 902-928 MHz.

Operating Power: 200 mW Effective radiated measurement).

**1) Applicable Standards & Test Procedures**

a) In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2001 Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247 the following is submitted:

b) Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-1992 Document FCC and documents DA00-1407 and DA00-705.

**2.1033(b) Application for Certification**

(1) Manufacturer: ADVANCED TRACKING TECHNOLOGY INC.  
PO Box 168  
Sugar Land, TX 77487

(2) Identification: Model: ST-869  
FCC I.D.: N3F-ST869

(3) Instruction Book:

Refer to Exhibit for Instruction Manual.

(4) Description of Circuit Functions:

Refer to Exhibit of Operational Description.

(5) Block Diagram with Frequencies:

Refer to Exhibit of Operational Description.

(6) Report of Measurements:

Follows in this Report.

(7) Photographs: Construction, Component Placement, etc.:

Refer to Exhibit for photographs of equipment.

(8) No Peripheral Equipment was Necessary.

(9) Transition Provisions of 15.37 are not being requested.

(10) Frequency hopping Spread Spectrum transmitters:

Compliance with 15.247(a)(1) and the receiver bandwidth requirement are demonstrated in this report and exhibits.

(11) Not Applicable. The EUT is not a Scanning Receiver.

(12) Not Applicable. The EUT does not operate in the 9 - 64 GHz frequency band.

## 2) Equipment Tested

<u>Equipment</u>	<u>Model</u>	<u>FCC I.D. #</u>
EUT	ST-869	N3F-ST869

## 3) Equipment Function and Testing Procedures

The EUT is a 902-928 MHz radio transmitter used to transmit data for use in the industrial market place. The ST-869 SHADOW TRACKER PREMIER is a wireless link used for transmitting information from one remote location to another. The unit typically operates from a direct current voltage source supplied from a 12 volt battery system. For testing purposes, a twelve-volt wall transformer was used to power the unit. The device has an antenna etched onto the printed circuit board. The EUT was tested in all modes of operation.

## 4) Equipment and Cable Configurations

### ***Conducted Emission Test Procedure***

The unit typically operates from a twelve-volt battery supply and has internal power regulation circuitry. For testing purposes, a twelve-volt wall transformer was used to power the unit. The test setup, including the EUT, was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50uH. ROGERS LABS, INC. Advanced Tracking Technology Inc. 4405 W. 259th Terrace MODEL: ST-869 SHADOW TRACKER PREMIER Louisburg, KS 66053 Test #: 02725A FCCID#: N3F-ST869 Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c (15.247) Page 5 of 29

choke. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table.

#### ***Radiated Emission Test Procedure:***

The EUT was placed on a rotatable 1 x 1.5meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in Appendix for EUT placement.

### **5) List of Test Equipment**

A Hewlett Packard 8591EM Spectrum Analyzer was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of Test Equipment.

HP 8591 EM ANALYZER SETTINGS		
CONDUCTED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
9 kHz	30 kHz	Peak / Quasi Peak
RADIATED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak / Quasi Peak
HP 8562A ANALYZER SETTINGS		
RBW	VIDEO BW	DETECTOR FUNCTION
100 kHz	100 kHz	PEAK
1 MHz	1 MHz	Peak / Average

EQUIPMENT	MFG.	MODEL	CAL. DATES	DUE.
LISN	Comp. Design	1762	10/01	10/02
Antenna	ARA	BCD-235-B	7/01	7/02
Antenna	EMCO	3147	10/01	10/02
Antenna	EMCO	3143	4/01	4/02
Analyzer	HP	8591EM	7/01	7/02
Analyzer	HP	8562A	4/01	4/02

## 6) Units of Measurements

Conducted EMI: Data is in dB $\mu$ V; dB referenced to one microvolt.

Radiated EMI: Data is in dB $\mu$ V/m; dB/m referenced to one microvolt per meter.

## 7) Test Site Locations

**Conducted EMI**: The AC powerline conducted emissions tests were performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS.

**Radiated EMI:** The radiated emissions tests were performed At the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 25<sup>th</sup> Terrace, Louisburg, KS.

**Site Approval:** Refer to Appendix for FCC Site Approval Letter, Reference # 90910.

## 8) SUBPART B – UNINTENTIONAL RADIATORS

### ***Conducted EMI***

The EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80cm from the rear of the EUT. The manufacturer supplied AC power wall adapter for the EUT was connected to the LISN. A second LISN was positioned on the floor of the screen room 80cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN

were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each radio frequency emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures one and two for plots of conducted emissions.

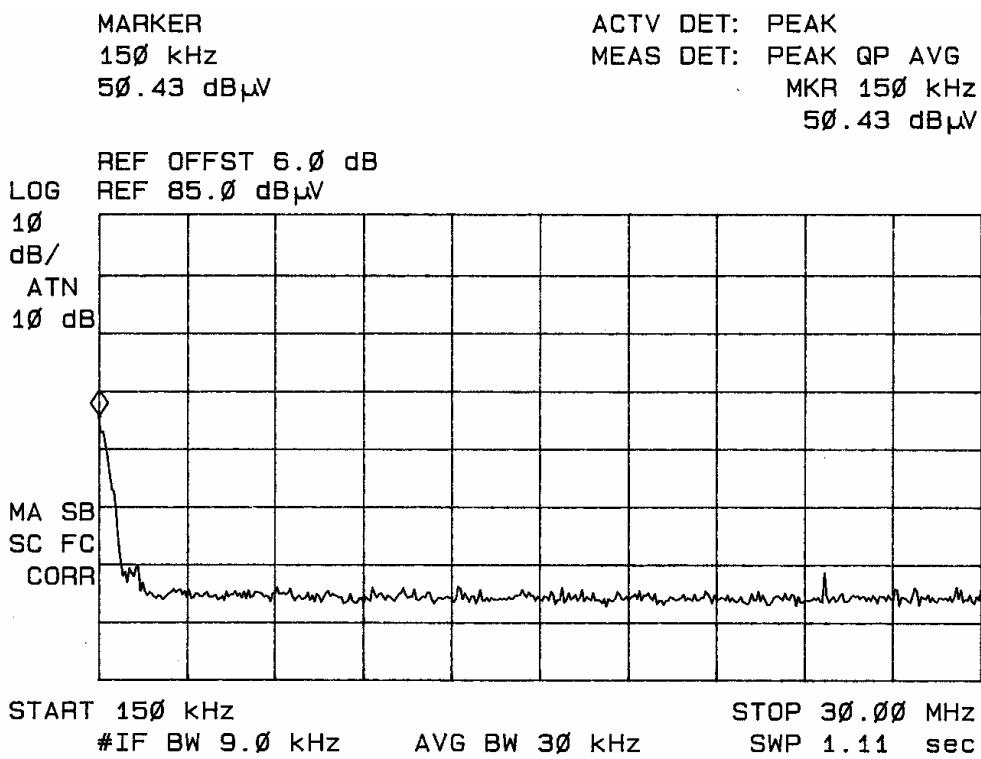


Figure one Conducted Emissions Line 1.

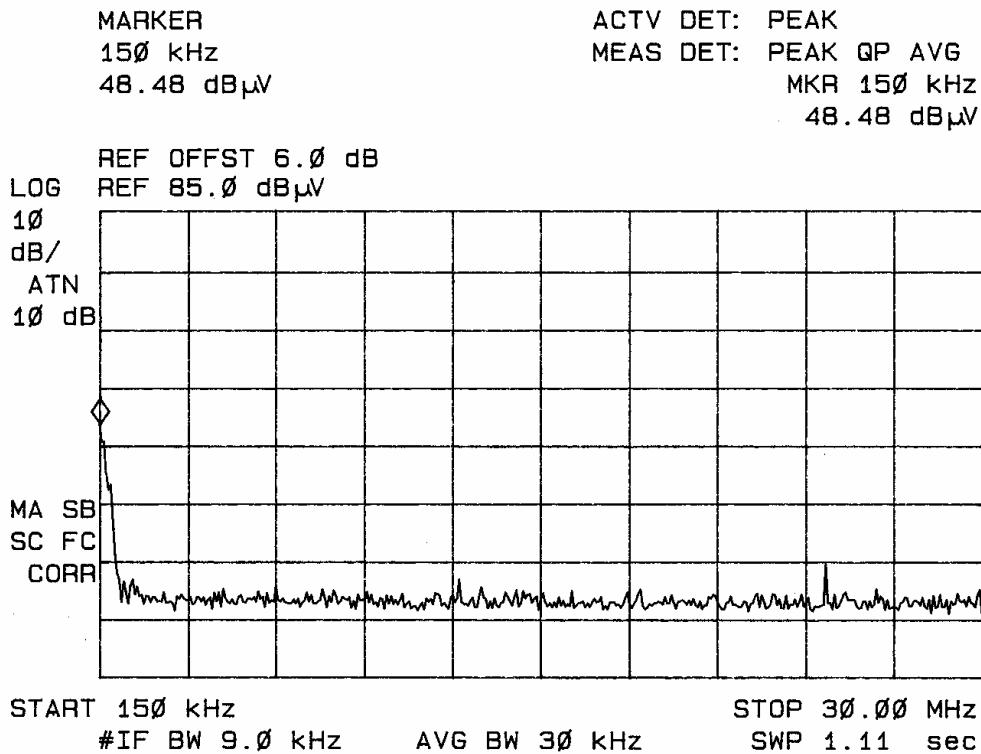


Figure two Conducted Emissions Line 2.

## Radiated EMI

The EUT was arranged in a typical equipment configuration and operated through all of its various modes. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Plots were made of the frequency spectrum from 30 MHz to 10,000 MHz for the preliminary testing. Refer to figures three and four for plots of the radiated emissions spectrum taken in a screen room and figures five and six for antenna conducted emissions of the EUT. The highest radiated emission was then remaximized at this location before final radiated emissions measurements were performed. Final data was

taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 10,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 5 GHz and or, pyramidal horns and mixers from 4 GHz to 10 GHz, notch filters and appropriate amplifiers were utilized.

Sample Calculations:

$$\begin{aligned} \text{RFS} &= \text{Radiated Field Strength} \\ \text{dB}\mu\text{V/m} @ 3\text{m} &= \text{dB}\mu\text{V} + \text{A.F.} - \text{Amplifier Gain} \\ \text{dB}\mu\text{V/m} @ 3\text{m} &= 52.4 + 8.8 - 35 \\ &= 26.2 \end{aligned}$$


MARKER  
166.Ø MHz  
37.78 dB $\mu$ V

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 166.Ø MHz  
37.78 dB $\mu$ V

LOG REF 8Ø.Ø dB $\mu$ V

1Ø  
dB/  
#ATN  
Ø dB

MA SB  
SC FC  
CORR

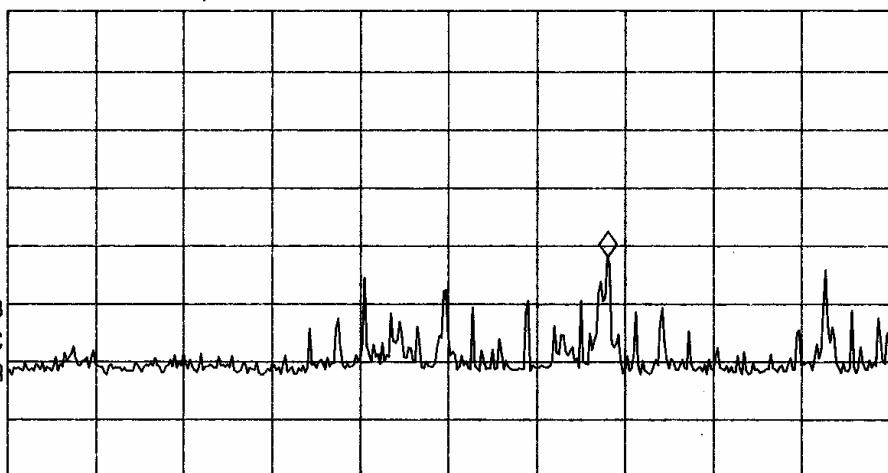

START 3Ø.Ø MHz STOP 23Ø.Ø MHz  
#IF BW 12Ø kHz AVG BW 3ØØ kHz SWP 41.7 msec

Figure three Radiated Emissions taken at 1 meter in screen room.


MARKER  
385 MHz  
38.45 dB $\mu$ V

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 385 MHz  
38.45 dB $\mu$ V

LOG REF 8Ø.Ø dB $\mu$ V

1Ø  
dB/  
#ATN  
Ø dB

VA SB  
SC FC  
CORR

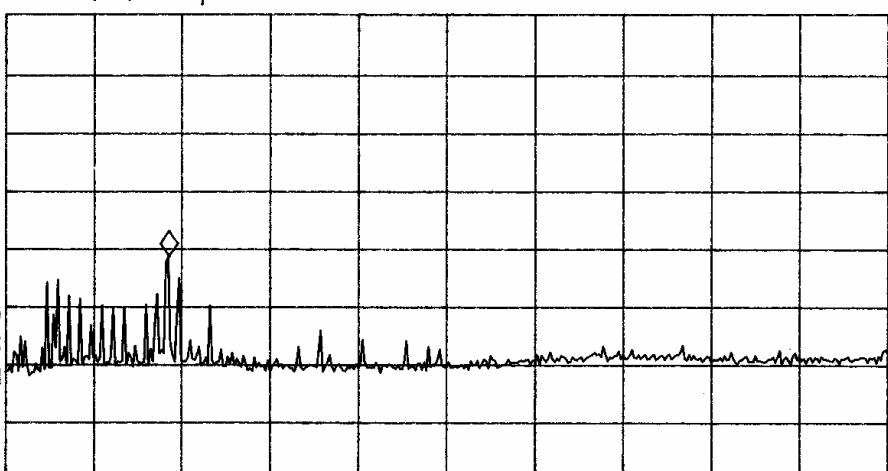

START 2ØØ MHz STOP 1.2ØØ GHz  
#IF BW 12Ø kHz AVG BW 3ØØ kHz SWP 2Ø8 msec

Figure four Radiated Emissions taken at 1 meter in screen room.

ROGERS LABS, INC.

4405 W. 259th Terrace  
Louisburg, KS 66053

Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c (15.247) Page 12 of 29

Advanced Tracking Technology Inc.

MODEL: ST-869 SHADOW TRACKER PREMIER  
Test #: 02725A FCCID#: N3F-ST869

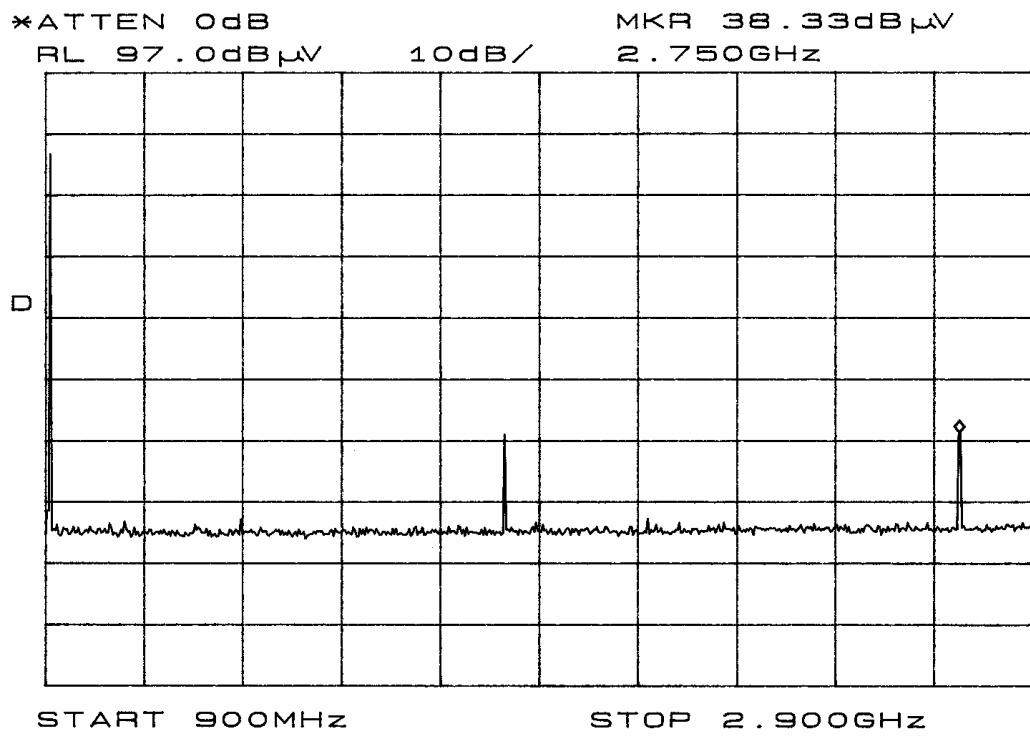


Figure five Antenna Conducted Emissions taken in the screen room

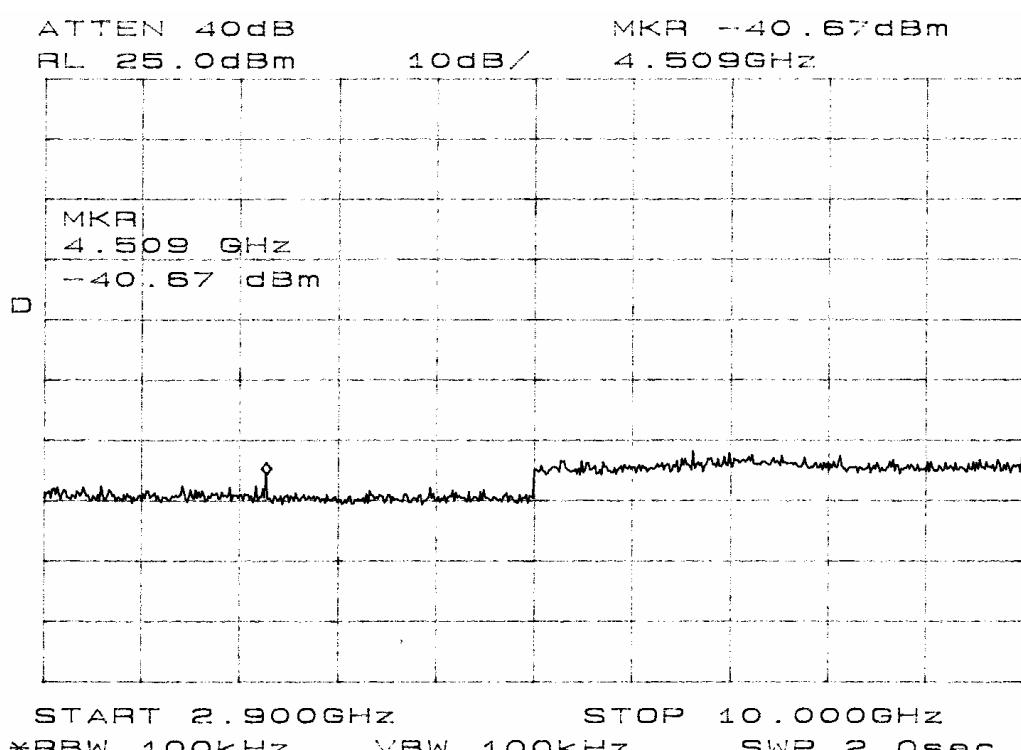


Figure six Antenna Conducted Emissions taken in the screen room.

ROGERS LABS, INC. Advanced Tracking Technology Inc.  
4405 W. 259th Terrace MODEL: ST-869 SHADOW TRACKER PREMIER  
Louisburg, KS 66053 Test #: 02725A FCCID#: N3F-ST869  
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c (15.247) Page 13 of 29  
ShadowTrackerPremierTestPrt.doc 7/31/2002

**Conducted (7 Highest Emissions)**

Frequency band (MHz)	L1 Level (dB $\mu$ V)			L2 Level (dB $\mu$ V)			FCC Limit Q.P. (dB $\mu$ V)
	Peak	Q.P.	AVE	Peak	Q.P.	AVE	
0.15 - 0.5	50.4	44.5	24.8	48.5	43.8	18.4	48
0.5 - 5	43.2	37.3	9.3	40.5	34.5	8.5	48
5 - 10	18.9	14.3	8.1	19.4	14.2	7.9	48
10 - 15	22.6	19.0	14.9	24.2	20.2	16.8	48
15 - 20	19.2	14.2	8.1	19.6	14.7	8.6	48
20 - 25	25.4	22.7	20.5	27.5	25.3	23.4	48
25 - 30	20.1	14.2	7.9	20.4	15.7	9.5	48

Other emissions present had amplitudes at least 10 dB below the limit

**Data: General Radiated Emissions from EUT (6 Highest Emissions)**

Frequency in MHz	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	FCC Class B Limit @ 3m (dB $\mu$ V/m)
171.9	52.4	56.5	8.8	35	26.2	30.3	43.5
214.9	60.0	56.8	11.4	35	36.4	33.2	43.5
270.1	55.4	55.7	13.0	35	33.4	33.7	46.0
282.4	60.4	54.5	12.6	35	38.0	32.1	46.0
306.9	53.4	46.5	14.3	335	32.7	25.8	46.0
356.00	52.6	54.0	15.4	35	33.0	34.4	46.0

Other emissions present had amplitudes at least 10 dB below the limit.

**Summary of Results for Conducted Emissions**

The conducted emissions for the EUT meet the requirements FCC Part 15B CLASS B Digital Devices. The EUT had a 10.7dB minimum margin below the quasi-peak limit. Other emissions were present with recorded data representing worst-case amplitudes.

***Summary of Results for Radiated Emissions***

The radiated emissions for the EUT meet the requirements for FCC Part 15B CLASS B Digital Devices. The EUT had a 1 dB minimum margin below the quasi-peak limit. Other emissions were present with amplitudes at least 10 dB below the limit.

***Statement of Modifications and Deviations***

No modifications to the EUT were required for the unit to meet the FCC Part 15B CLASS B emissions standards. There were no deviations to the specifications.

**9) Subpart C - Intentional Radiators**

As per CFR Part 15, Subpart C, paragraph 5.247 the following information is submitted.

***15.203 Antenna Requirements***

The unit is produced with the antenna etched onto the printed circuit board and has no provision to connect to an external antenna. The requirements of 15.203 are met there are no deviations or exceptions to the specification.

***15.205 Restricted Bands of Operation***

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were checked at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other

ROGERS LABS, INC. Advanced Tracking Technology Inc.  
4405 W. 259th Terrace MODEL: ST-869 SHADOW TRACKER PREMIER  
Louisburg, KS 66053 Test #: 02725A FCCID#: N3F-ST869  
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c (15.247) Page 15 of 29  
ShadowTrackerPremierFstRpt.doc 7/31/2002

significant emission was observed which fell into the restricted bands of operation.

#### Sample Calculations:

$$\begin{aligned}
 \text{RFS (dB}\mu\text{V/m @ 3m)} &= \text{FSM(dB}\mu\text{V)} + \text{A.F.(dB)} - \text{Gain(dB)} \\
 &= 35.9 + 6.7 - 35 \\
 &= 7.6
 \end{aligned}$$

#### Data: Emissions in Restricted Bands

Frequency in MHz	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	FCC Class B Limit @ 3m (dB $\mu$ V/m)
116.7	35.9	48.8	6.7	35	7.6	20.5	43.5
171.9	52.4	56.5	8.8	35	26.2	30.3	43.5
214.9	60.0	56.8	11.4	35	36.4	33.2	43.5
270.1	55.4	55.7	13.0	35	33.4	33.7	46.0
282.4	60.4	54.5	12.6	35	38.0	32.1	46.0

#### ***Summary of Results for Radiated Emissions in Restricted Bands:***

The radiated emissions for the EUT meet the requirements for FCC Part 15C Intentional Radiators. The EUT had a 7.1 dB minimum margin below the quasi-peak limit. No other emissions were found in the restricted frequency bands. Other emissions were present with amplitudes at least 10 dB below the FCC Limits.

#### ***15.209 Radiated Emissions Limits; General Requirements***

##### **Radiated EMI**

The EUT was arranged in a typical equipment configuration and operated through all of its various modes. Preliminary testing was performed in a screen room with the EUT positioned

1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Emissions were checked in the screen room from 30 to 10,000 MHz and plots were made of the frequency spectrum from 30 MHz to 10,000 MHz for the preliminary testing. The highest radiated emission was then maximized at this location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the open field test site at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 10,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna polarization between horizontal and vertical. Antennas used were Broadband Biconical from 30 MHz to 200 MHz, Biconilog from 30 MHz to 1000 MHz, Log Periodic from 200 MHz to 5 GHz, and/or Pyramidal Horns from 4 GHz to 10 GHz.

## Sample Calculations:

$$\begin{aligned}
 \text{RFS} &= \text{Radiated Field Strength} \\
 \text{dB}\mu\text{V/m} @ 3\text{m} &= \text{dB}\mu\text{V} + \text{A.F.} - \text{Amplifier Gain} \\
 \text{dB}\mu\text{V/m} @ 3\text{m} &= 52.4 + 8.8 - 35 \\
 &= 26.2
 \end{aligned}$$

**Data: General Radiated Emissions from EUT (6 Highest Emissions)**

Frequency in MHz	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	FCC Class B Limit @ 3m (dB $\mu$ V/m)
171.9	52.4	56.5	8.8	35	26.2	30.3	43.5
214.9	60.0	56.8	11.4	35	36.4	33.2	43.5
270.1	55.4	55.7	13.0	35	33.4	33.7	46.0
282.4	60.4	54.5	12.6	35	38.0	32.1	46.0
306.9	53.4	46.5	14.3	335	32.7	25.8	46.0
356.00	52.6	54.0	15.4	35	33.0	34.4	46.0

Other emissions present had amplitudes at least 10 dB below the limit.

***Summary of Results for Radiated Emissions:***

The radiated emissions for the EUT meet the requirements for FCC Part 15C Intentional Radiators. The EUT had a 7.1 dB minimum margin below the quasi-peak limit. Other emissions were present with amplitudes at least 10 dB below the FCC Limits.

***15.247 Operation in the Band 902-928 MHz***

The power output was measured on an open field testsite at a three-meter distance. Data was taken per Paragraph 2.1046(a) and 15.247. The 902 and 928 MHz band edges are protected due to the 902.4 - 927.6 MHz channels used for frequency of operation. Refer to figures seven through thirteen showing

ROGERS LABS, INC.

Advanced Tracking Technology Inc.

4405 W. 259th Terrace

MODEL: ST-869 SHADOW TRACKER PREMIER

Louisburg, KS 66053

Test #: 02725A FCCID#: N3F-ST869

Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c (15.247) Page 18 of 29

SahdowTrackerPremierfstrRpt.doc 7/31/2002

plots taken for the EUT displaying compliance with the specifications.

(a) The EUT is a frequency hopping spread spectrum intentional radiator utilizing at least 25 hopping channels.

The 20-dB bandwidth of 315 kHz meets the requirements of greater than 250 and less than 500 kHz wide with the average time of occupancy on any frequency not greater than 0.4 seconds within a ten-second-time period.

Information showing compliance for time of occupancy and hopping sequence are displayed below.

This is the pseudo random channel lookup table...

```
flash const unsigned char TX_TABLE[ ] = { 0, 26, 4, 10, 46, 34, 14, 40,
6, 20, 36, 16, 22, 12, 24, 44, 18, 28, 32, 8, 38, 30, 42, 2, 48 };
```

This routine initiates the channel change for the next TX channel. The routine sequentially goes through the channels in the randomized table above. This guarantees that all channels are used equally.

```
void GotoNextTxChannel (void)
{
tx_channel++;
if ( tx_channel > 24 )
{
tx_channel = 0; //start at beginning of table
while ( scan_timer ); //check for FCC time limit
scan_timer = FCC_TIME; //reset 10 second timer
}
```

The Data Radio utilizes two methods for limiting channel occupancy to 400 mS per channel in a 10-second interval. When the radio is streaming data, packet transmissions are set at 150 mS. By guaranteeing that each channel is used equally there is no possibility of any channel transmitting more than 400 mS in any 10-second period. The second limitation is imposed using a simple software driven timer. Each time the transmitter uses channel 1 in the transmit hop table a 10 second timer is started. In the event the radio goes through the entire table and back to channel 1 before the 10 seconds has elapsed, the radio is forced to wait in receive mode the remainder of the 10-second period. These two tests applied together guarantee that the ST-869 will not, in any case, exceed the channel occupancy limitations set forth by the FCC part 15.247 rules for frequency hopping transmitters.


(b) The maximum peak output power of the unit was measured at three meters on the open area test site since the unit has no provision to connect an antenna port. The substitution method was used to extract the maximum output

power produced by the EUT. The amplitudes of each emission and spurious emission were measured at a distance of 3 meters from the FSM antenna at the OATS. The amplitude of each emission was maximized by varying the FSM antenna height, polarization, and by rotating the turntable. A Biconilog Antenna was used for measuring emissions from 30 to 1000 MHz, Log Periodic Antenna for 200 to 5000 MHz and Pyramidal Horn Antennas from 4 GHz to 10 GHz. Emissions were measured in dB $\mu$ V/m at three-meters.

Sample calculation.

$$\begin{aligned}\text{dB}\mu\text{V/m}@ 3\text{m} &= \text{FSM} + \text{A.F.} + \text{cable loss} \\ &= 96.8 + 23.2 - 0 \\ &= 120.0\end{aligned}$$

(c) The band edges are protected due to the frequency of operation of the EUT.

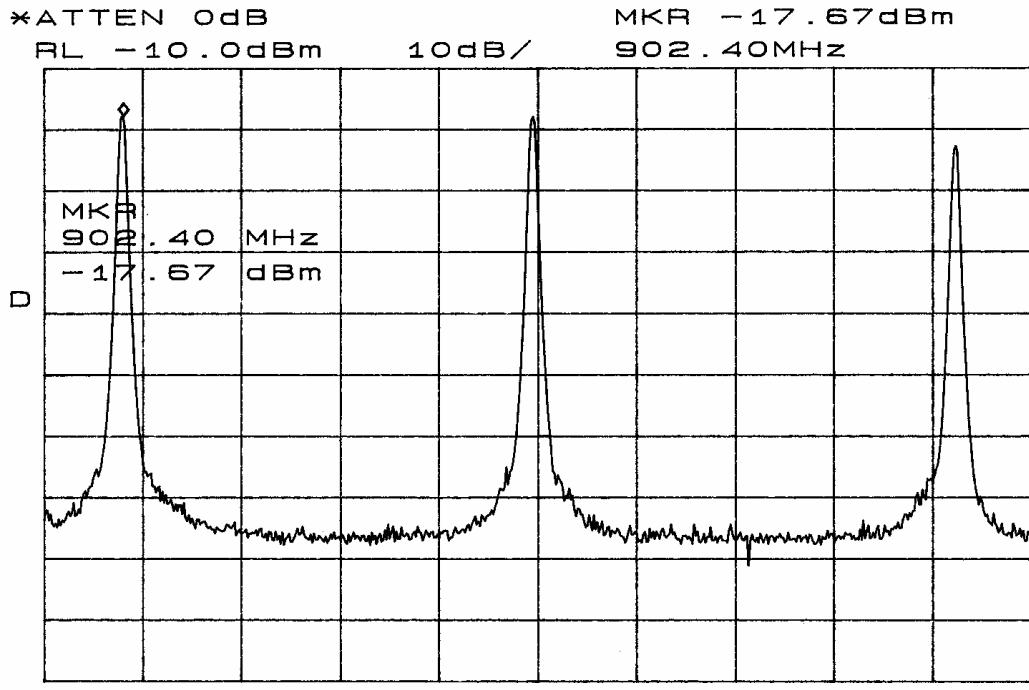

START 900.00MHz STOP 930.00MHz  
 \*RBW 100kHz VBW 100kHz SWP 50ms

Figure seven Maximum Power output plot taken in a screen room

MARKER Δ  
 145.50 msec  
 -49.44 dB

ACTV DET: PEAK  
 MEAS DET: PEAK QP  
 MKR 145.50 msec  
 -49.44 dB

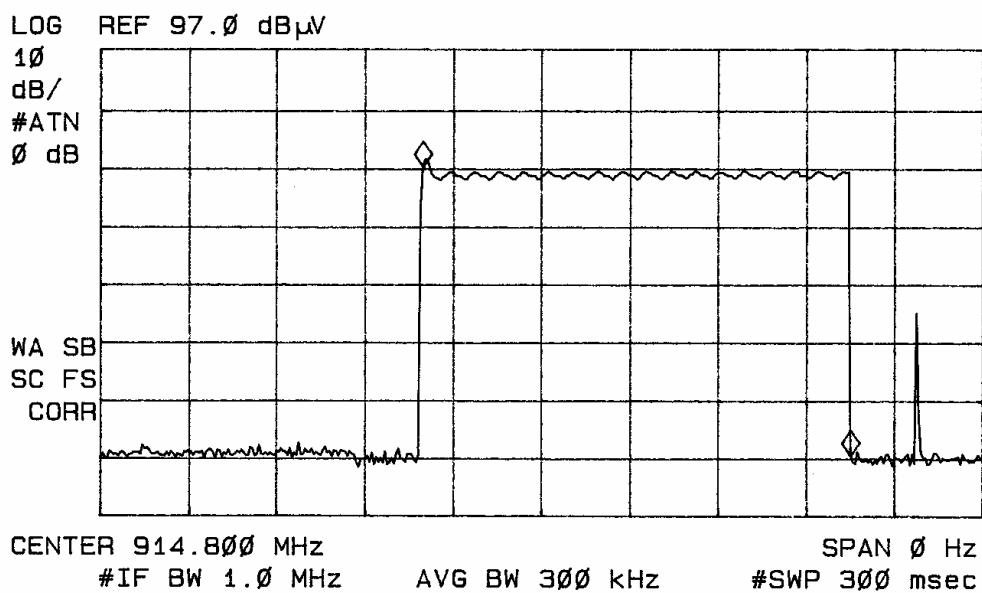


Figure eight Dwell Time of Occupancy.

MARKER  $\Delta$   
260 kHz  
-3.68 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 260 kHz  
-3.68 dB

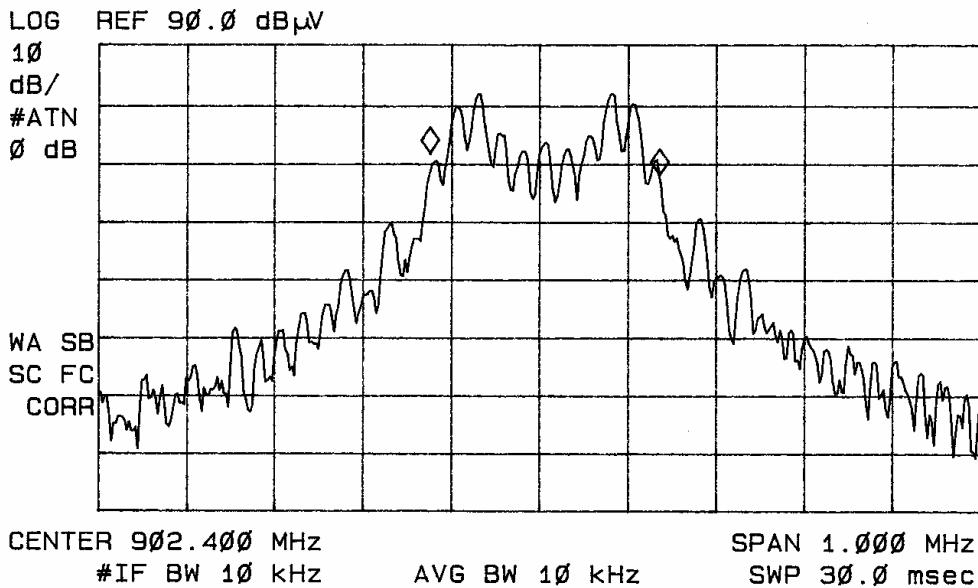


Figure nine 20-dB bandwidth.

MARKER  $\Delta$   
263 kHz  
3.65 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 263 kHz  
3.65 dB

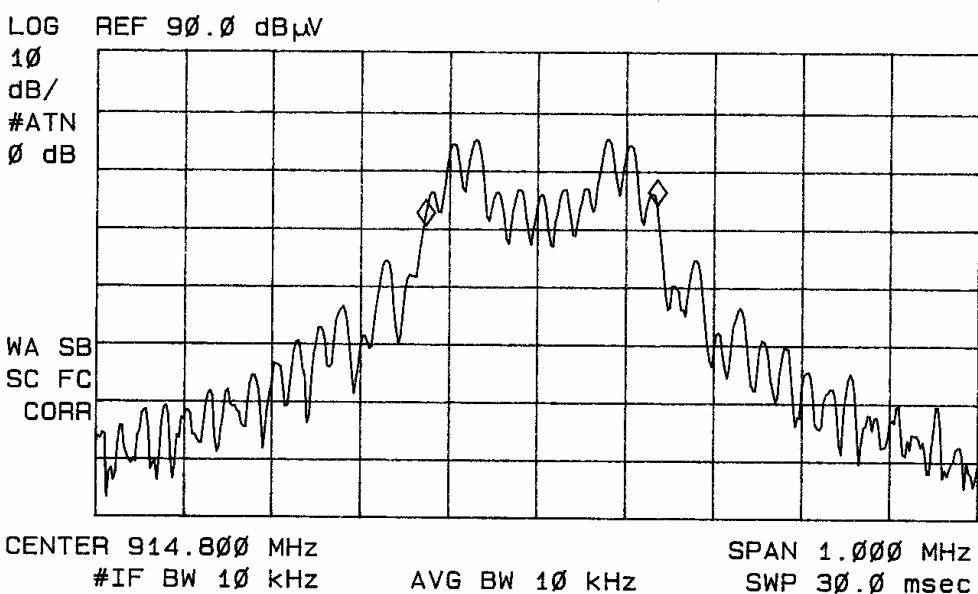


Figure ten 20-dB bandwidth.

MARKER  $\Delta$   
268 kHz  
2.68 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 268 kHz  
2.68 dB

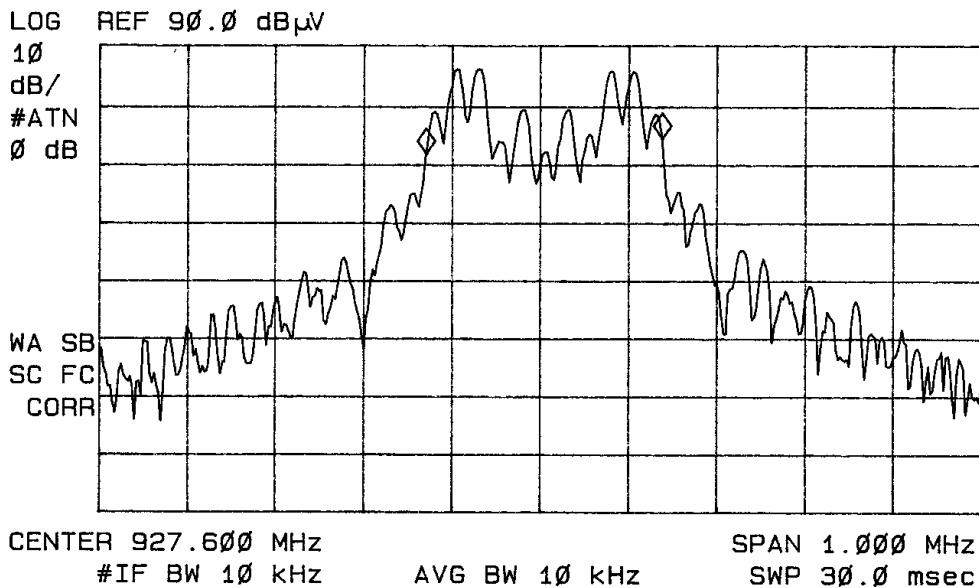


Figure eleven 20-dB bandwidth.

MARKER  $\Delta$   
810 kHz  
-.43 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 810 kHz  
-.43 dB

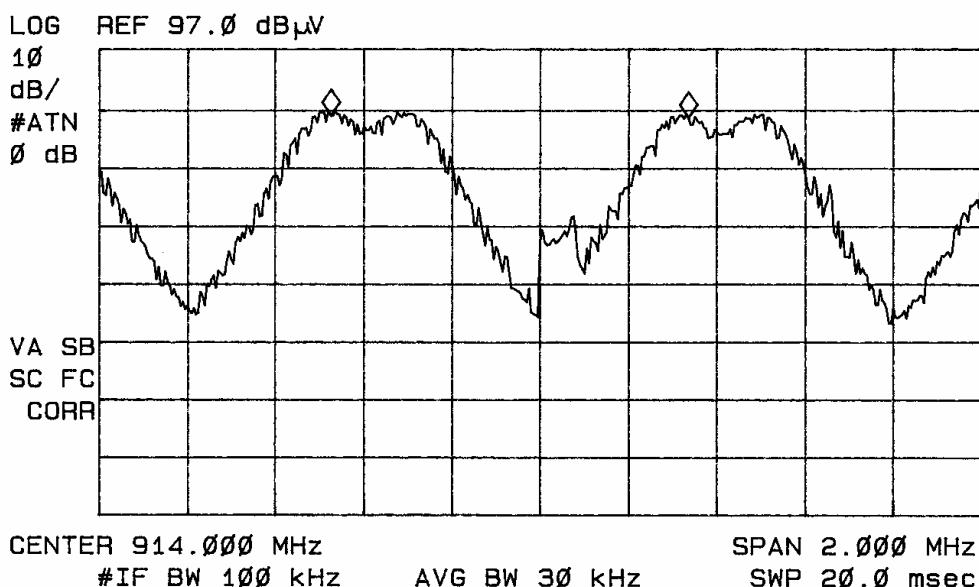


Figure twelve Channel Spacing.

MARKER  $\Delta$   
850 kHz  
-2.19 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 850 kHz  
-2.19 dB

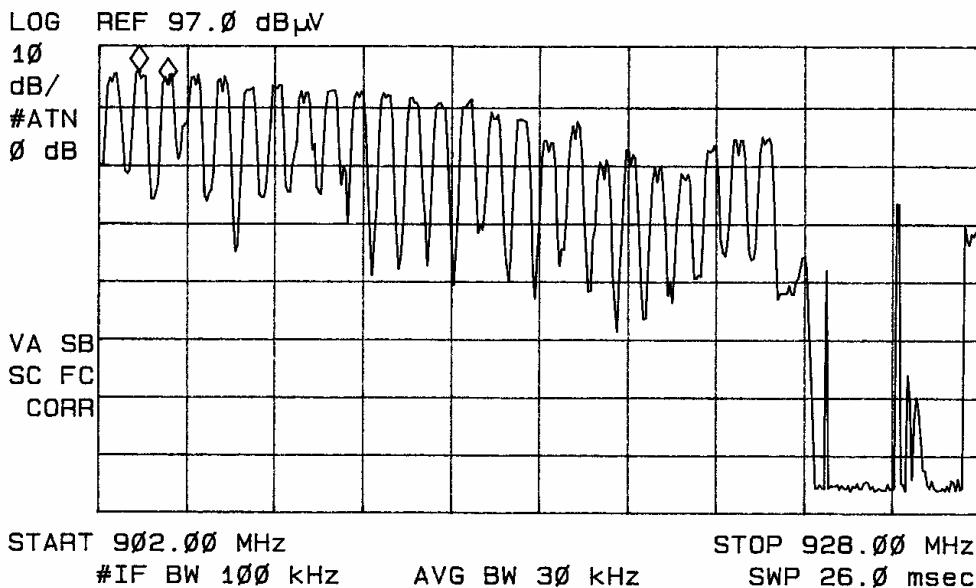


Figure thirteen plot showing at least 25 hopping channels.

### Data: Radiated Emissions from EUT

Emission Frequency (MHz)	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)
902.4	96.8	88.8	23.2	0	120.0	112.0	--
1804.8	28.5	39.0	29.4	21.5	36.4	46.9	54.0
2707.6	38.8	37.6	33.0	21.5	50.3	49.1	54.0
3609.6	35.3	35.2	37.0	21.5	50.8	50.7	54.0
4512.0	30.0	30.8	41.0	21.5	49.5	50.3	54.0
914.8	95.0	88.7	23.2	0	118.2	111.9	--
1903.6	24.3	24.0	29.4	21.5	32.2	31.9	54.0
2892.5	24.6	24.1	33.0	21.5	36.1	35.6	54.0
3881.4	23.1	24.7	37.0	21.5	38.6	40.2	54.0
4870.4	21.6	23.1	41.0	21.5	41.1	42.6	54.0
927.6	94.0	85.4	23.2	0	117.2	108.6	--
1855.2	26.5	30.0	29.4	21.5	34.4	37.9	54.0
2782.8	34.3	27.1	33.0	21.5	45.8	38.6	54.0
3710.4	35.4	34.8	37.0	21.5	50.9	50.3	54.0
4638.0	25.1	22.6	41.0	21.5	44.6	42.1	54.0

ROGERS LABS, INC.

4405 W. 259th Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Advanced Tracking Technology Inc.

MODEL: ST-869 SHADOW TRACKER PREMIER

Test #: 02725A FCCID#: N3F-ST869

Test to: FCC Parts 2 and 15c (15.247) Page 24 of 29

ShadowTrackerPremierFstRpt.doc 7/31/2002

### Data: Radiated Emissions and substitution power required

Frequency of Emission	Amplitude of emission		Signal level to dipole required to reproduce	
	Horizontal	Vertical	Horizontal	Vertical
(MHz)	dB $\mu$ V	dB $\mu$ V	dBm	dBm
902.4	96.8	88.8	22.6	14.0
914.8	95.0	88.7	21.2	14.1
927.6	94.0	85.4	20.5	12.8

### ***Summary of Results for Radiated Emissions of Intentional Radiator***

The EUT had a 3.1 dB margin below the limit for the harmonic emissions. The radiated emissions for the EUT meet the requirements for FCC Part 15.247 Intentional Radiators. There are no measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 10 dB below the FCC Limits. The specification of 15.247 are met, there are no deviations or exceptions to the requirements.

### ***Statement of Modifications and Deviations***

No modifications to the EUT were required for the unit to meet the FCC Part 15C emissions standards. There were no deviations to the specifications.

**APPENDIX**

Model: ST-869 SHADOW TRACKER PREMIER

1. Test Equipment List
2. Rogers Qualifications
3. FCC Site Approval Letter

**TEST EQUIPMENT LIST FOR ROGERS LABS, INC.**

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

<u>List of Test Equipment:</u>	<u>Calibration Date:</u>
Scope: Tektronix 2230	2/02
Wattmeter: Bird 43 with Load Bird 8085	2/02
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/02
H/V Power Supply: Fluke Model: 408B (SN: 53)	2/02
R.F. Generator: HP 606A	2/02
R.F. Generator: HP 8614A	2/02
R.F. Generator: HP 8640B	2/02
Spectrum Analyzer: HP 8562A,	7/02
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591 EM	7/02
Frequency Counter: Leader LDC 825	2/02
Antenna: EMCO Biconilog Model: 3143	5/02
Antenna: EMCO Log Periodic Model: 3147	10/01
Antenna: Antenna Research Biconical Model: BCD 235	7/02
Antenna: EMCO Dipole Set 321C	2/02
Antenna: C.D. B-101	2/02
Antenna: Solar 9229-1 & 9230-1	2/02
Antenna: EMCO 6509	2/02
Audio Oscillator: H.P. 201CD	2/02
R.F. Power Amp 65W Model: 470A-1010	2/02
R.F. Power Amp 50W M185 10-501	2/02
R.F. PreAmp CPPA-102	2/02
Shielded Room 5 M x 3 M x 3.0 M (101 dB Integrity)	
LISN 50 $\mu$ Hy/50 ohm/0.1 $\mu$ f	10/01
LISN Compliance Eng. 240/20	2/02
Peavey Power Amp Model: IPS 801	2/02
Power Amp A.R. Model: 10W 1010M7	2/02
Power Amp EIN Model: A301	2/02
ELGAR Model: 1751	2/02
ELGAR Model: TG 704A-3D	2/02
ESD Test Set 2010i	2/02
Fast Transient Burst Generator Model: EFT/B101	2/02
Current Probe: Singer CP105	2/02
Current Probe: Solar 91081N	2/02
Field Intensity Meter: EFM018	2/02
KEYTEK Ecat Surge Generator	2/02
07/20/2002	

**QUALIFICATIONS**

of

**SCOT D. ROGERS, ENGINEER****ROGERS LABS, INC.**

Mr. Rogers has approximately 13 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

**POSITIONS HELD:**

Systems Engineer:	A/C Controls Mfg. Co., Inc.
	6 Years
Electrical Engineer:	Rogers Consulting Labs, Inc.
	5 Years
Electrical Engineer:	Rogers Labs, Inc.
	Current

**EDUCATIONAL BACKGROUND:**

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

  
Scot D. RogersJuly 25, 2002  
Date

1/11/00

ROGERS LABS, INC. Advanced Tracking Technology Inc.  
4405 W. 259th Terrace MODEL: ST-869 SHADOW TRACKER PREMIER  
Louisburg, KS 66053 Test #: 02725A FCCID#: N3F-ST869  
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c (15.247) Page 28 of 29  
ShadowTrackerPremierFstRpt.doc 7/31/2002

FEDERAL COMMUNICATIONS COMMISSION  
Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD. 21046

December 08, 2000

Registration Number: 90910

Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053

Attention: Scot D. Rogers


Re: Measurement facility located at Louisburg  
3 & 10 meter site  
Date of Listing: December 08, 2000

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, E-Filing, OET Equipment Authorization Electronic Filing.

Sincerely,



Thomas W Phillips  
Electronics Engineer