



FCC & IC Test Report

FCC ID: N42-IPBC001

IC: 4579A-IPBC001

Product Name:	Intelliprox Blue Controller
Trademark:	
Model Name :	IPBC001
Prepared For :	Keri Systems, Inc.
Address :	2305 Bering Drive, San Jose, CA 95131, USA
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101, Yousong Road, Longhua New District, Shenzhen, China
Test Date:	Jun. 28 - Jul. 05, 2017
Date of Report :	Jul. 05, 2017
Report No.:	BCTC-LH170803434E



TEST RESULT CERTIFICATION

Applicant's name..... : Keri Systems, Inc.

Address..... : 2305 Bering Drive, San Jose, CA 95131, USA

Manufacture's Name..... : Shenzhen RDM Tag Master Co., LTD.

Address..... : 9H,B Block,7 Building,Baoneng Science and Technology Park,No.1 Qingxiang Road,Longhua Street,Longhua District,Shenzhen, China.

Product description

Product name.....: Intelliprox Blue Controller

Trademark.....: 

Model and/or type reference : IPBC001

Standards..... : RSS-247 Issue 2, February 2017
RSS-Gen Issue 4, November 2014
FCC Part15.247
ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Snow Zeng

Reviewer(Supervisor): Jade Yang

Approved(Manager): Carson Zhang



**Table of Contents**

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 TEST RESULTS	12
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 RADIATED EMISSION LIMITS	15
3.2.2 TEST PROCEDURE	16
3.2.3 DEVIATION FROM TEST STANDARD	16
3.2.4 TEST SETUP	17
3.2.5 EUT OPERATING CONDITIONS	18
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	19
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	20
3.2.8 TEST RESULTS (1GHZ~25GHZ)	22
4 . POWER SPECTRAL DENSITY TEST	28
4.1 APPLIED PROCEDURES / LIMIT	28
4.1.1 TEST PROCEDURE	28
4.1.2 DEVIATION FROM STANDARD	28
4.1.3 TEST SETUP	28
4.1.4 EUT OPERATION CONDITIONS	28
4.1.5 TEST RESULTS	29



Table of Contents	Page
5 . BANDWIDTH TEST	31
5.1 APPLIED PROCEDURES / LIMIT	31
5.1.1 TEST PROCEDURE	31
5.1.2 DEVIATION FROM STANDARD	31
5.1.3 TEST SETUP	31
5.1.4 EUT OPERATION CONDITIONS	31
5.1.5 TEST RESULTS	32
6 . PEAK OUTPUT POWER TEST	34
6.1 APPLIED PROCEDURES / LIMIT	34
6.1.1 TEST PROCEDURE	34
6.1.2 DEVIATION FROM STANDARD	34
6.1.3 TEST SETUP	34
6.1.4 EUT OPERATION CONDITIONS	34
6.1.5 TEST RESULTS	35
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	36
7.1 DEVIATION FROM STANDARD	37
7.2 TEST SETUP	37
7.3 EUT OPERATION CONDITIONS	37
7.4 TEST RESULTS	38
8 . ANTENNA REQUIREMENT	39
8.1 STANDARD REQUIREMENT	39
8.2 EUT ANTENNA	39
9 . TEST SEUUP PHOTO	40
10 . EUT PHOTO	42



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

RSS-247 and FCC PART 15C.247			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-GEN	Conducted Emission	N/A	
15.247 (a)(2) RSS-247	6dB Bandwidth	PASS	
15.247 (b) RSS-247	Peak Output Power	PASS	
15.247 (c) RSS-247 RSS-GEN	Radiated Spurious Emission	PASS	
15.247 (d) RSS-247	Power Spectral Density	PASS	
15.205 RSS-247	Band Edge Emission	PASS	
15.203 RSS-247	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add. : No.101,Yousong Road,Longhua New District, Shenzhen,China

FCC Registered No.: 187086

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Intelliprox Blue Controller	
Trade Name		
Model Name	IPBC001	
Model Difference	N/A	
Product Description	The EUT is a Intelliprox Blue Controller	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Bit Rate of Transmitter	2Mbps
	Number Of Channel	40 CH
	Antenna type:	PCB antenna
	Antenna Gain (dBi)	1.0dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Power	DC 12V from adapter	
hardware version	HV01	
Software version	V1.0	
Serial number	--	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	20	2440		
02	2404	21	2442		
~	~	~	~		
9	2418	39	2478		
10	2420	40	2480		



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH20
Mode 3	CH40
Mode 4	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH20
Mode 3	CH40

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted &Radiated Emission Test

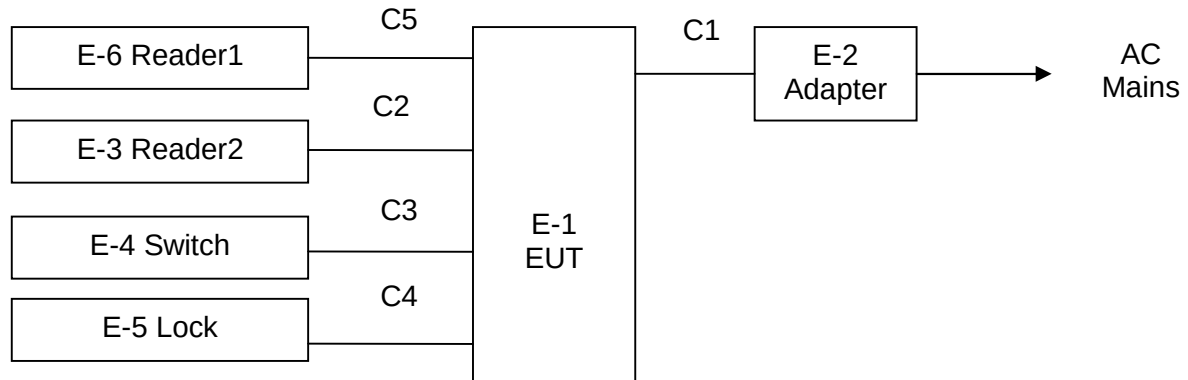

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Intelliprox Blue Controller	N/A	IPBC001	N/A	EUT
E-2	Adapter	N/A	GLS-091000G	N/A	I/P: AC 100-240V 50/60Hz O/P: DC 9V/1A
E-3	Reader	N/A	NXT-3R	N/A	
E-4	Switch	N/A	001	N/A	
E-5	Lock	N/A	021	N/A	
E-6	Reader	N/A	NXT-3R	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C1	No	No	0.8m	DC Line
C2	No	No	0.8m	Control Line
C3	No	No	0.8m	Control Line
C4	No	No	0.8m	DC Line
C5	No	No	0.8m	Control Line

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	MY45109572	2016.08.24	2017.08.23
2	Test Receiver	R&S	ESPI	101396	2016.08.24	2017.08.23
3	Bilog Antenna	SCHWARZBECK	VULB9160	VULB9160-3369	2016.08.24	2017.08.23
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.07.06	2017.07.05
5	Spectrum Analyzer	Agilent	N9020A	MY5051041	2016.07.06	2017.07.05
6	Horn Antenna	SCHWARZBECK	9120D	9120D-1275	2016.08.24	2017.08.23
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05
8	Amplifier	SCHWARZBECK	BBV9718	9718-270	2016.08.24	2017.08.23
9	Amplifier	SCHWARZBECK	BBV9743	9743-119	2016.08.24	2017.08.23
10	Loop Antenna	ARA	PLIntelliprox Blue Controller30/B	1029	2016.07.06	2017.07.05
11	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05
12	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.07.06	2017.07.05
13	RF cables	R&S	N/A	N/A	2016.07.06	2017.07.05
14	966 Chamber	ChengYu	966 Room	966	2016.07.06	2017.07.05

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-101165-ha	2016.08.24	2017.08.23
2	LISN	R&S	NSLK8126	8126466	2016.08.24	2017.08.23
3	LISN	R&S	NSLK8126	8126487	2016.08.24	2017.08.23
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.08.24	2017.08.23
5	RF cables	R&S	R204	R20X	2016.08.24	2017.08.23



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

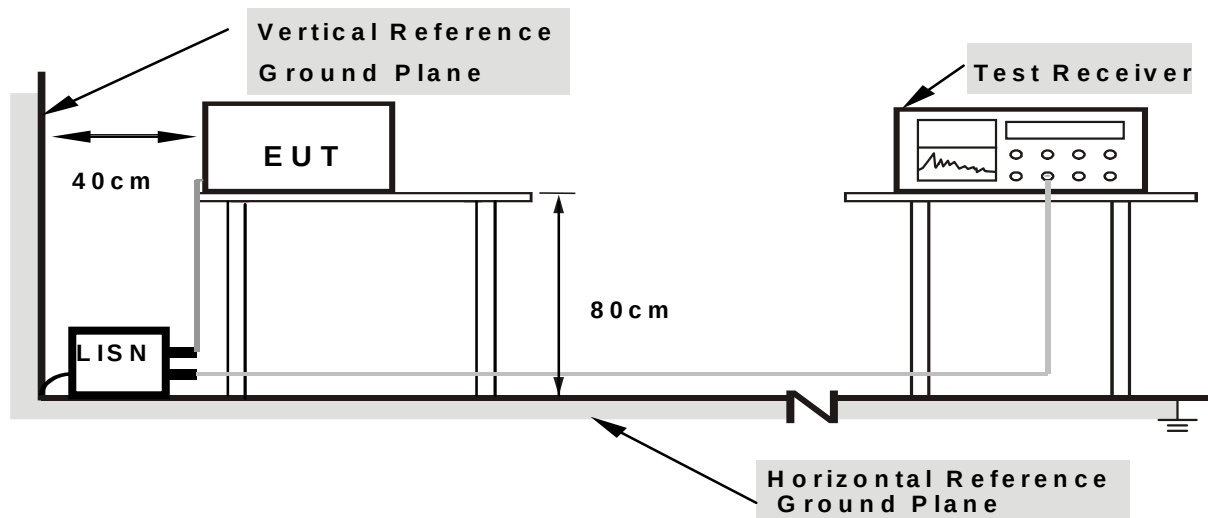

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

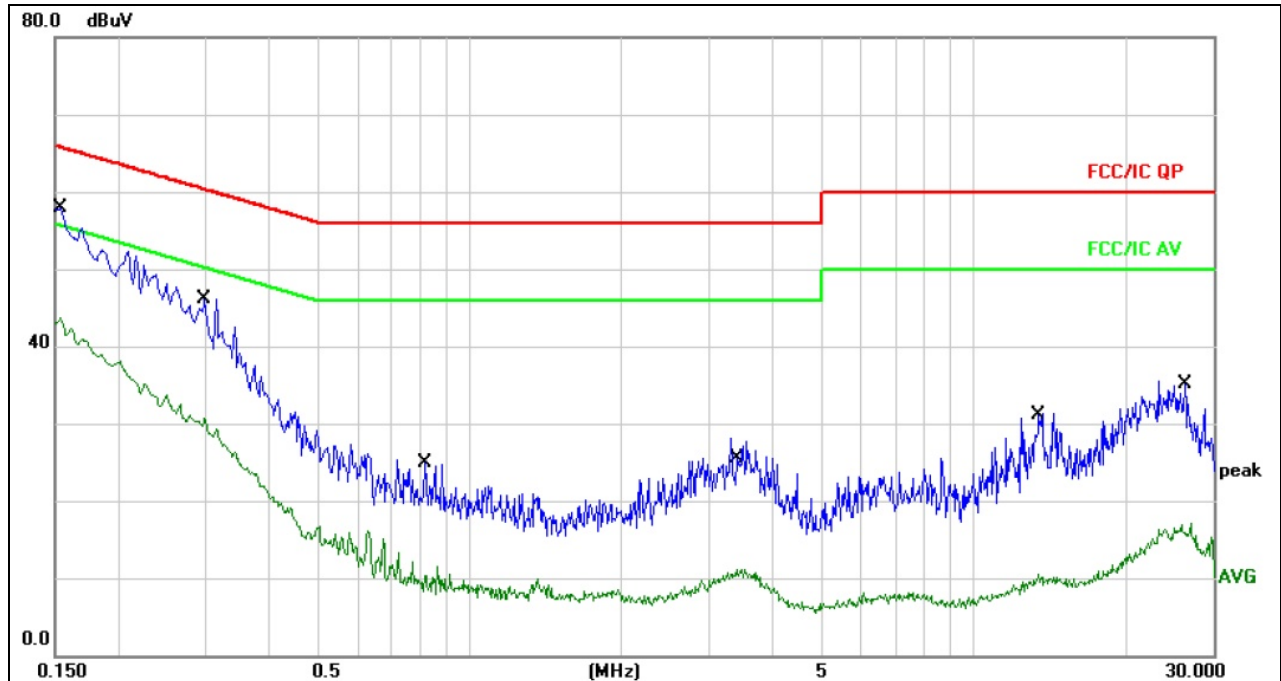


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1539	47.79	10.05	57.84	65.78	-7.94	QP	
2		0.1539	33.62	10.05	43.67	55.78	-12.11	AVG	
3		0.2980	36.08	10.09	46.17	60.30	-14.13	QP	
4		0.2980	20.67	10.09	30.76	50.30	-19.54	AVG	
5		0.8139	14.68	10.15	24.83	56.00	-31.17	QP	
6		0.8139	1.33	10.15	11.48	46.00	-34.52	AVG	
7		3.3820	17.62	10.18	27.80	56.00	-28.20	QP	
8		3.3820	0.93	10.18	11.11	46.00	-34.89	AVG	
9		13.5100	21.18	10.14	31.32	60.00	-28.68	QP	
10		13.5100	0.43	10.14	10.57	50.00	-39.43	AVG	
11		26.3260	24.85	10.20	35.05	60.00	-24.95	QP	
12		26.3260	6.86	10.20	17.06	50.00	-32.94	AVG	



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

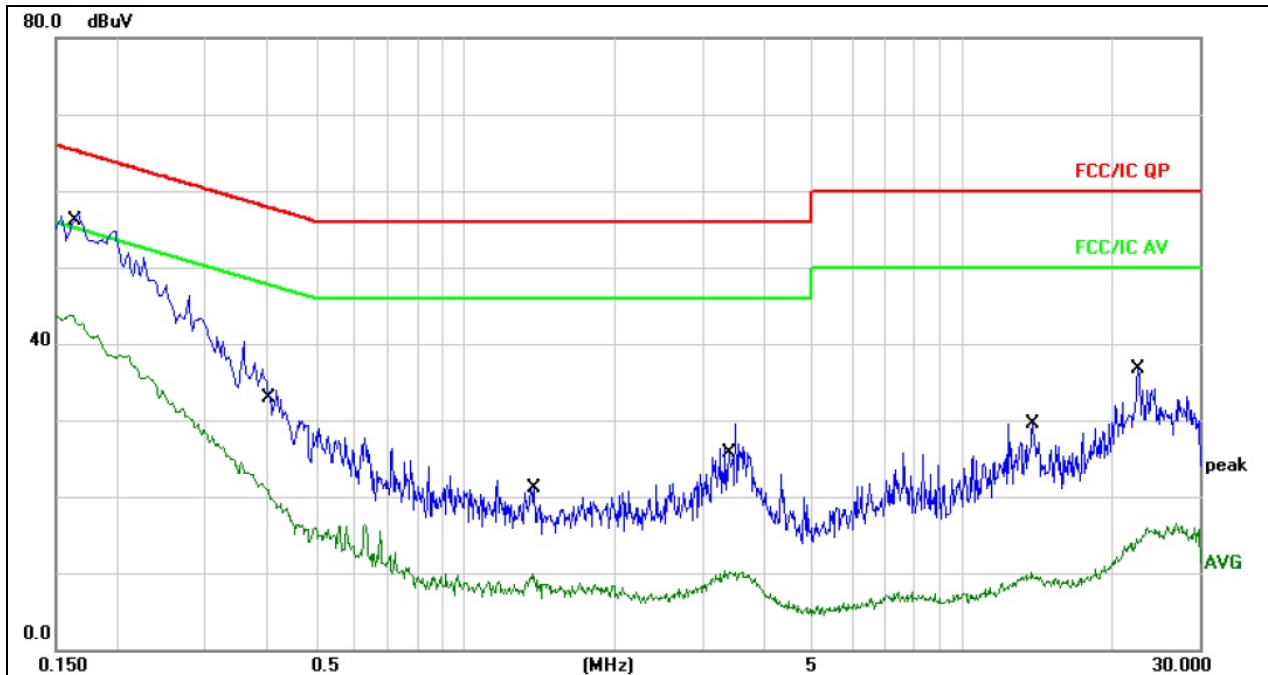

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1	*	0.1620	47.00	10.05	57.05	65.36	-8.31	QP	
2		0.1620	33.68	10.05	43.73	55.36	-11.63	AVG	
3		0.4100	22.56	10.11	32.67	57.65	-24.98	QP	
4		0.4100	9.53	10.11	19.64	47.65	-28.01	AVG	
5		1.3660	11.02	10.17	21.19	56.00	-34.81	QP	
6		1.3660	-0.25	10.17	9.92	46.00	-36.08	AVG	
7		3.4180	19.33	10.18	29.51	56.00	-26.49	QP	
8		3.4180	-0.03	10.18	10.15	46.00	-35.85	AVG	
9		13.8300	19.34	10.14	29.48	60.00	-30.52	QP	
10		13.8300	-0.13	10.14	10.01	50.00	-39.99	AVG	
11		22.5380	26.52	10.19	36.71	60.00	-23.29	QP	
12		22.5380	4.68	10.19	14.87	50.00	-35.13	AVG	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

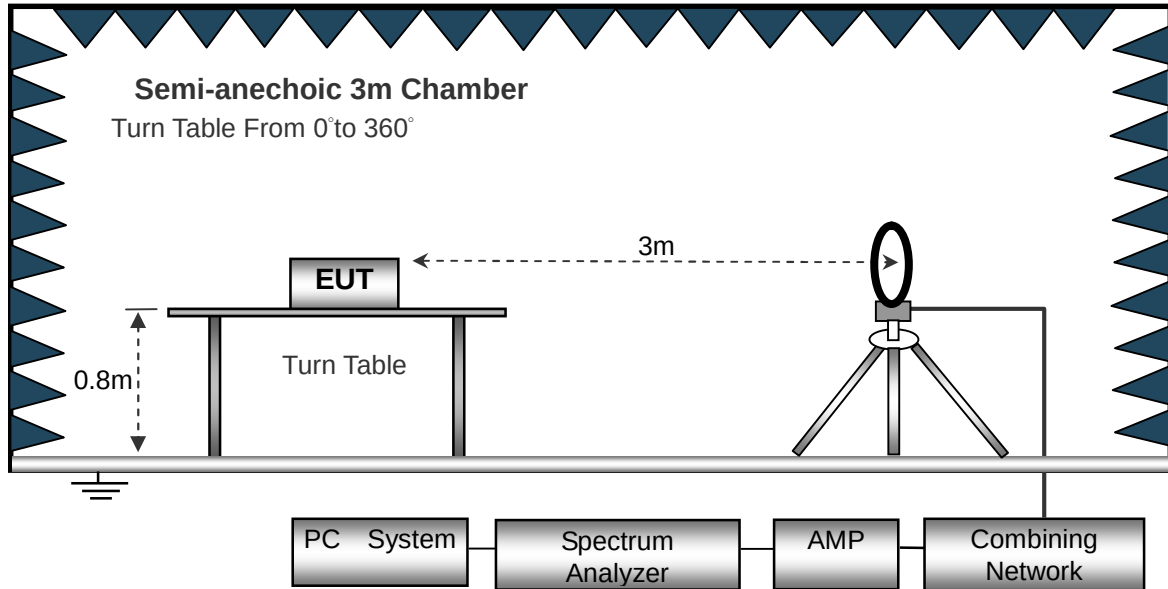

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

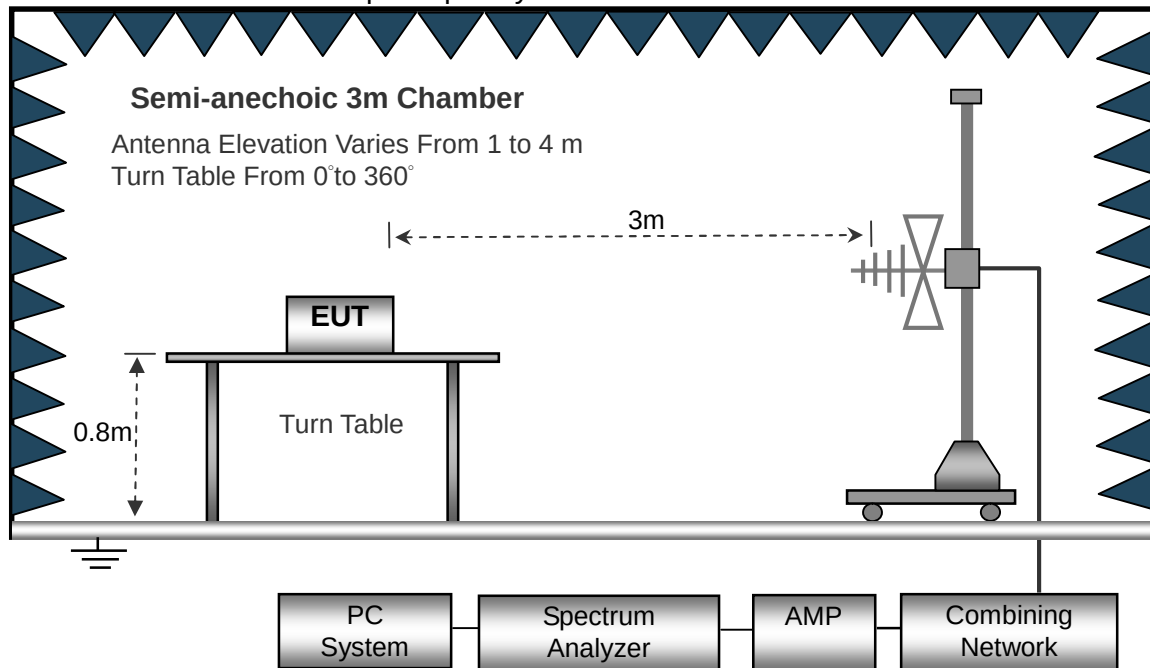

(C) Radiated Emission Test-Up Frequency Above 1GHz

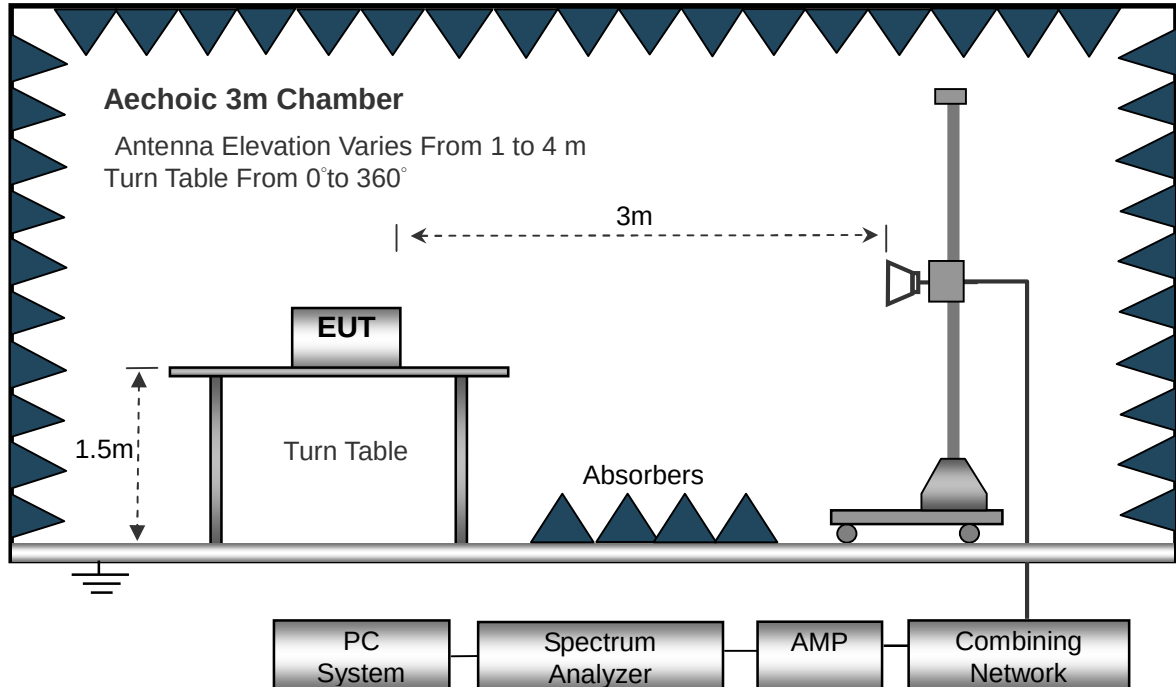**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 9V from adapter(AC 120V/60Hz)
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 9V from adapter(AC 120V/60Hz)		
Test Mode :	Mode 4		

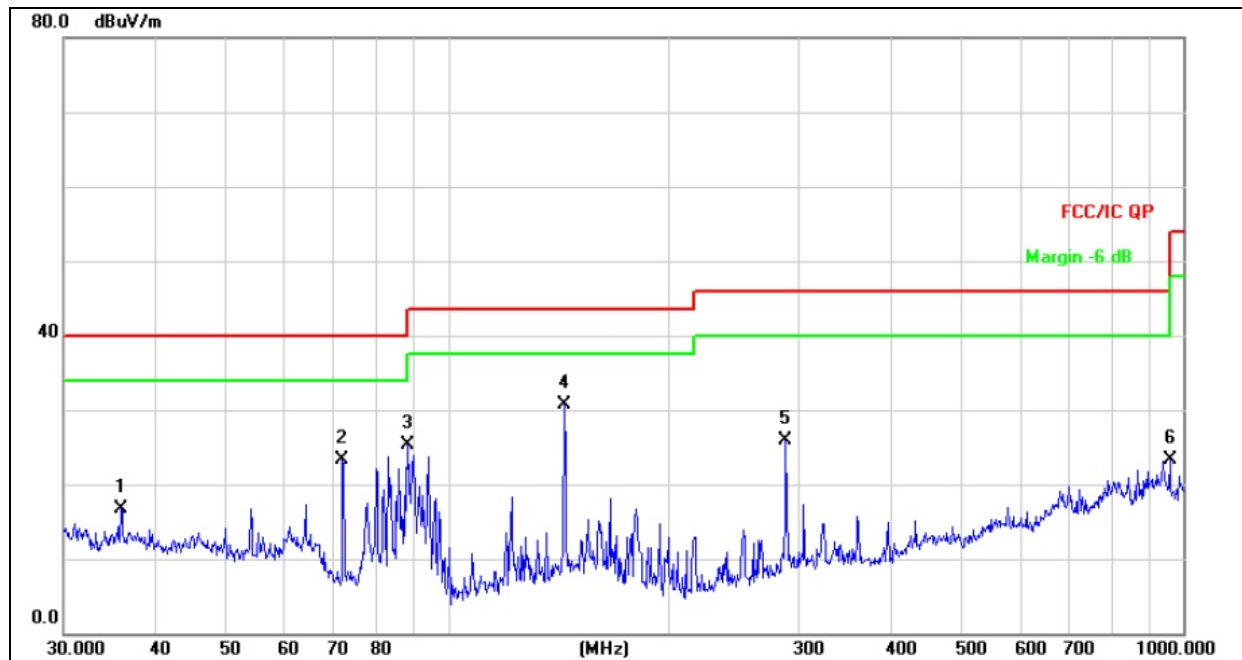


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		35.8746	25.28	-8.58	16.70	40.00	-23.30	QP
2		71.8320	38.40	-15.19	23.21	40.00	-16.79	QP
3		88.0329	43.02	-17.75	25.27	43.50	-18.23	QP
4	*	143.8295	43.86	-13.18	30.68	43.50	-12.82	QP
5		287.9904	38.89	-12.89	26.00	46.00	-20.00	QP
6		958.7943	23.70	-0.42	23.28	46.00	-22.72	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 9V from adapter(AC 120V/60Hz)		
Test Mode :	Mode 4		

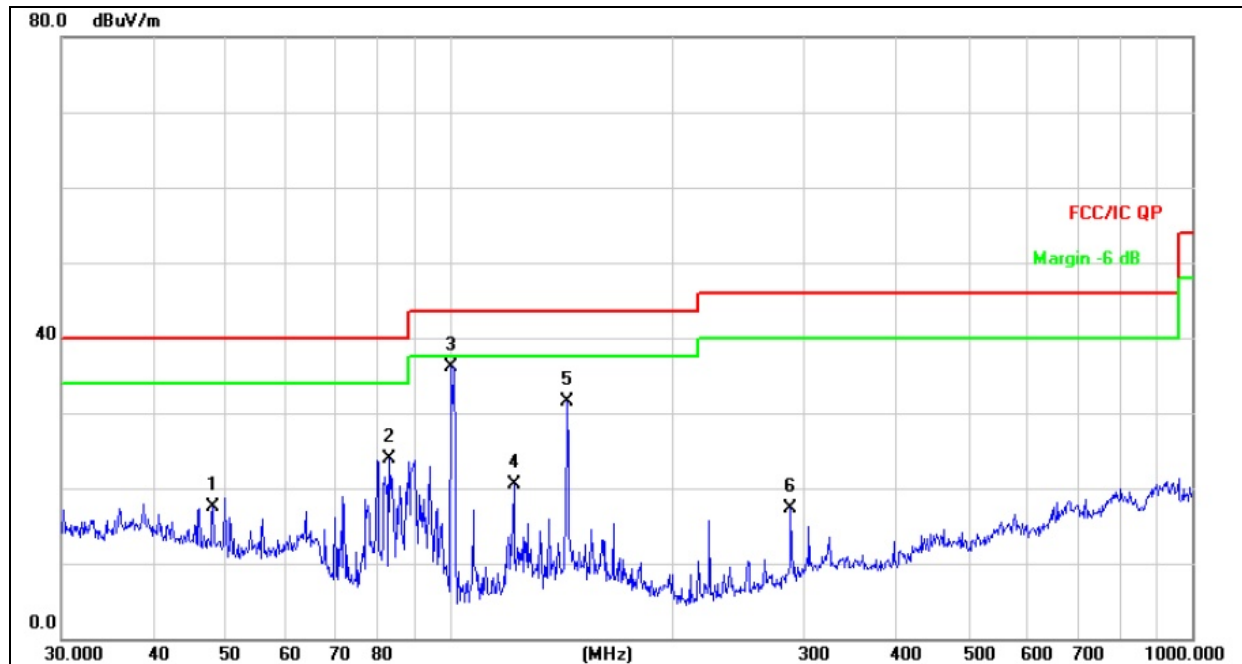

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		47.9940	27.38	-9.96	17.42	40.00	-22.58	QP
2		82.9385	42.06	-18.12	23.94	40.00	-16.06	QP
3	*	100.2286	52.58	-16.46	36.12	43.50	-7.38	QP
4		121.9755	35.02	-14.60	20.42	43.50	-23.08	QP
5		143.8295	44.66	-13.18	31.48	43.50	-12.02	QP
6		287.9904	30.14	-12.89	17.25	46.00	-28.75	QP



3.2.8 TEST RESULTS (1GHZ~25GHZ)



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2402									
V	4804.00	63.32	38.06	7.78	23.25	56.29	74.00	-17.71	PK
V	4804.00	47.73	38.06	7.78	23.25	40.70	54.00	-13.30	AV
V	7206.00	61.72	38.45	8.13	23.71	55.11	74.00	-18.89	PK
V	7206.00	45.39	38.45	8.13	23.71	38.78	54.00	-15.22	AV
V	16132.00	55.70	38.75	10.36	26.57	53.88	74.00	-20.12	PK
H	4804.00	63.52	38.06	7.78	23.25	56.49	74.00	-17.51	PK
H	4804.00	47.56	38.06	7.78	23.25	40.53	54.00	-13.47	AV
H	7206.00	61.94	38.45	8.13	23.71	55.33	74.00	-18.67	PK
H	7206.00	44.39	38.45	8.13	23.71	37.78	54.00	-16.22	AV
H	16132.00	54.78	38.75	10.36	26.57	52.96	74.00	-21.04	PK
operation frequency:2440									
V	4880.00	63.59	38.11	7.82	23.61	56.91	74.00	-17.09	PK
V	4880.00	47.21	38.11	7.82	23.61	40.53	54.00	-13.47	AV
V	7320.00	61.56	38.51	8.28	23.96	55.29	74.00	-18.71	PK
V	7320.00	45.04	38.51	8.28	23.93	38.74	54.00	-15.26	AV
V	16132.00	55.74	38.75	10.36	26.57	53.92	74.00	-20.08	PK
H	4880.00	63.78	38.11	7.82	23.61	57.10	74.00	-16.90	PK
H	4880.00	47.53	38.11	7.82	23.61	40.85	54.00	-13.15	AV
H	7320.00	61.66	38.51	8.28	23.96	55.39	74.00	-18.61	PK
H	7320.00	44.29	38.51	8.28	23.93	37.99	54.00	-16.01	AV
H	16132.00	54.82	38.75	10.36	26.57	53.00	74.00	-21.00	PK
operation frequency:2480									
V	4960.00	64.38	38.26	7.96	23.83	57.91	74.00	-16.09	PK
V	4960.00	47.86	38.26	7.96	23.83	41.39	54.00	-12.61	AV
V	7440.00	61.34	38.72	8.31	24.03	54.96	74.00	-19.04	PK
V	7440.00	44.91	38.72	8.31	24.03	38.53	54.00	-15.47	AV
V	16132.00	55.73	38.75	10.36	26.57	53.91	74.00	-20.09	PK
H	4960.00	64.57	38.26	7.96	23.83	58.10	74.00	-15.90	PK
H	4960.00	47.77	38.26	7.96	23.83	41.30	54.00	-12.70	AV
H	7440.00	63.02	38.72	8.31	24.03	56.64	74.00	-17.36	PK
H	7440.00	44.76	38.72	8.31	24.03	38.38	54.00	-15.62	AV
H	16132.00	54.72	38.75	10.36	26.57	52.90	74.00	-21.10	PK

Remark:



1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.





For conducted
2402MHz

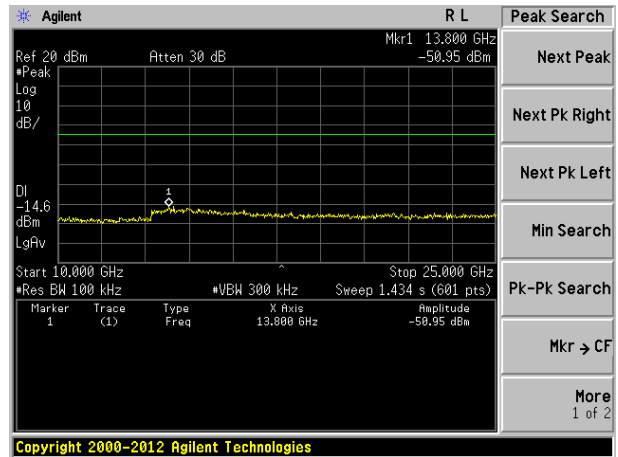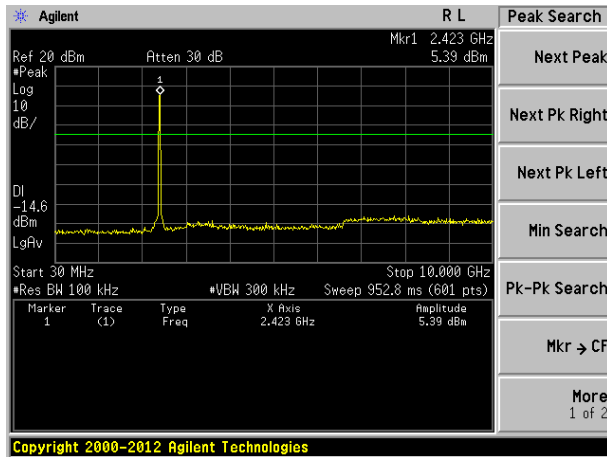

2440MHz

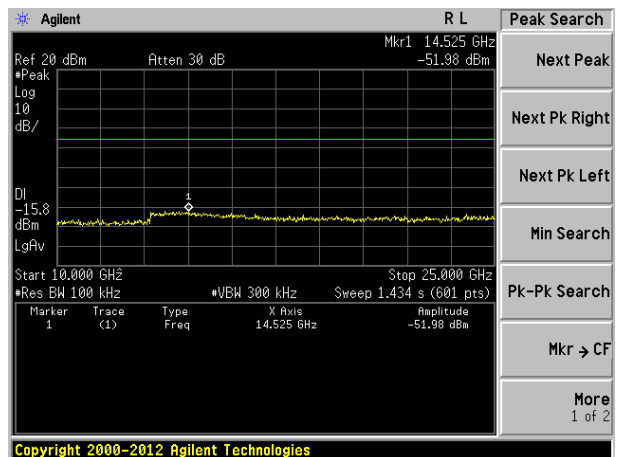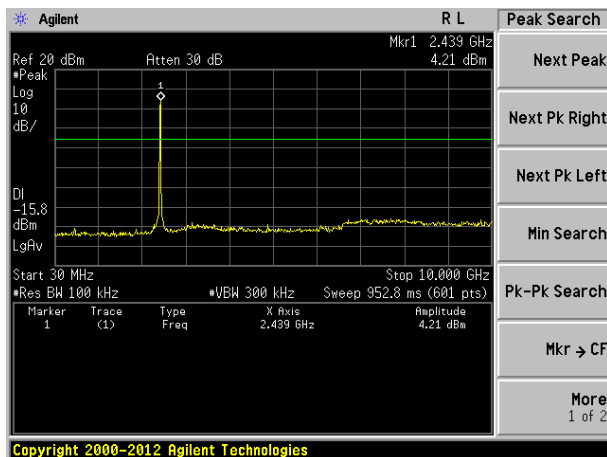

2480MHz

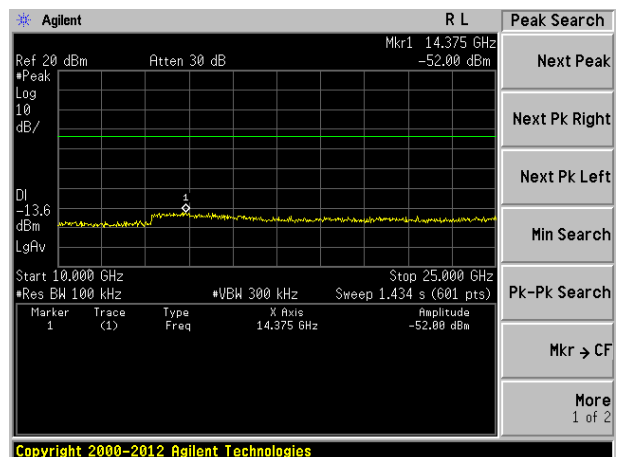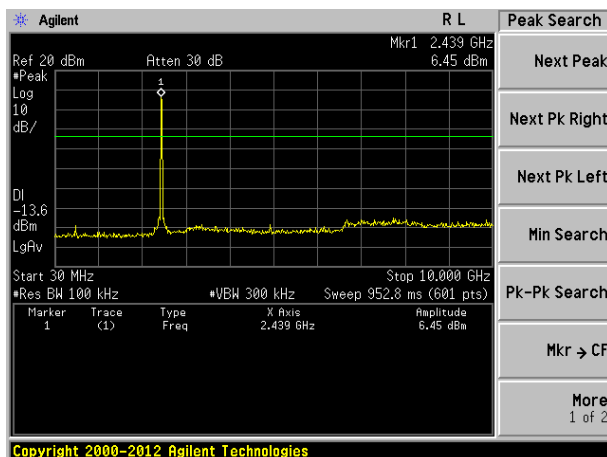



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

RSS-247 Issue 2, February 2017

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

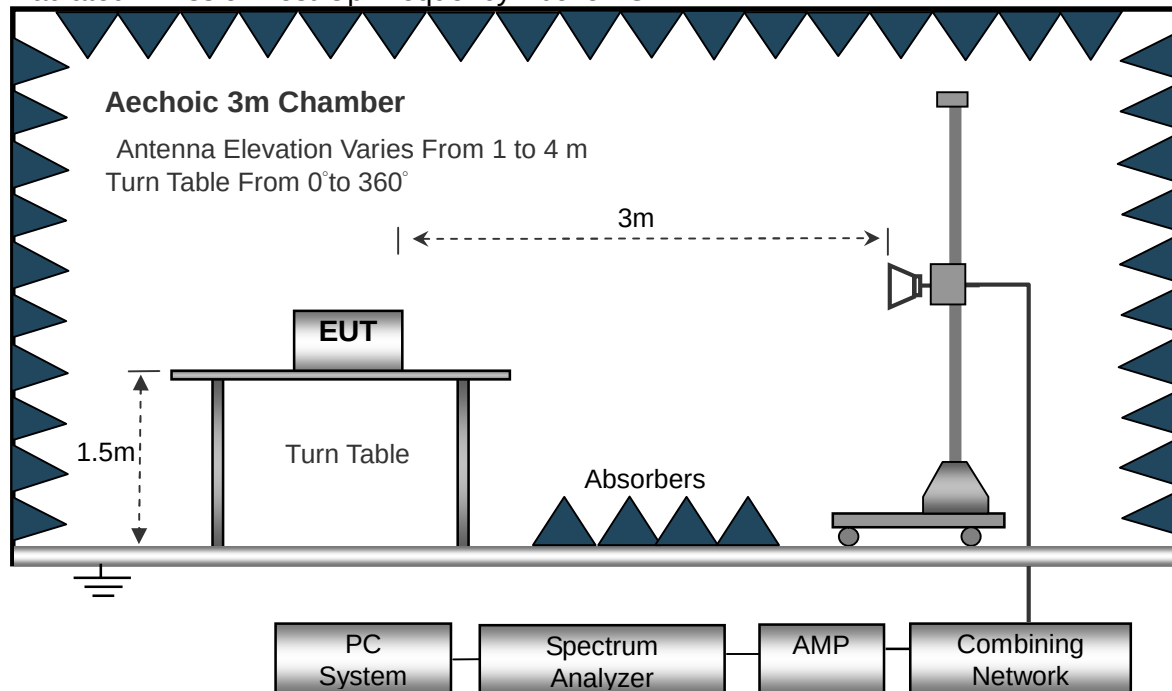

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

The plot only show the Horizontal's average data.




3.3.6 TEST RESULT

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission evel	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	67.22	38.06	7.42	20.15	56.73	74.00	-17.27	PK
V	2390.00	55.82	38.06	7.42	20.15	45.33	54.00	-8.67	AV
V	2400.00	67.42	38.06	7.42	20.15	56.93	74.00	-17.07	PK
V	2400.00	55.41	38.06	7.42	20.15	44.92	54.00	-9.08	AV
H	2390.00	67.50	38.06	7.42	20.15	57.01	74.00	-16.99	PK
H	2390.00	55.85	38.06	7.42	20.15	45.36	54.00	-8.64	AV
H	2400.00	67.37	38.06	7.42	20.15	56.88	74.00	-17.12	PK
H	2400.00	55.79	38.06	7.42	20.15	45.30	54.00	-8.70	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

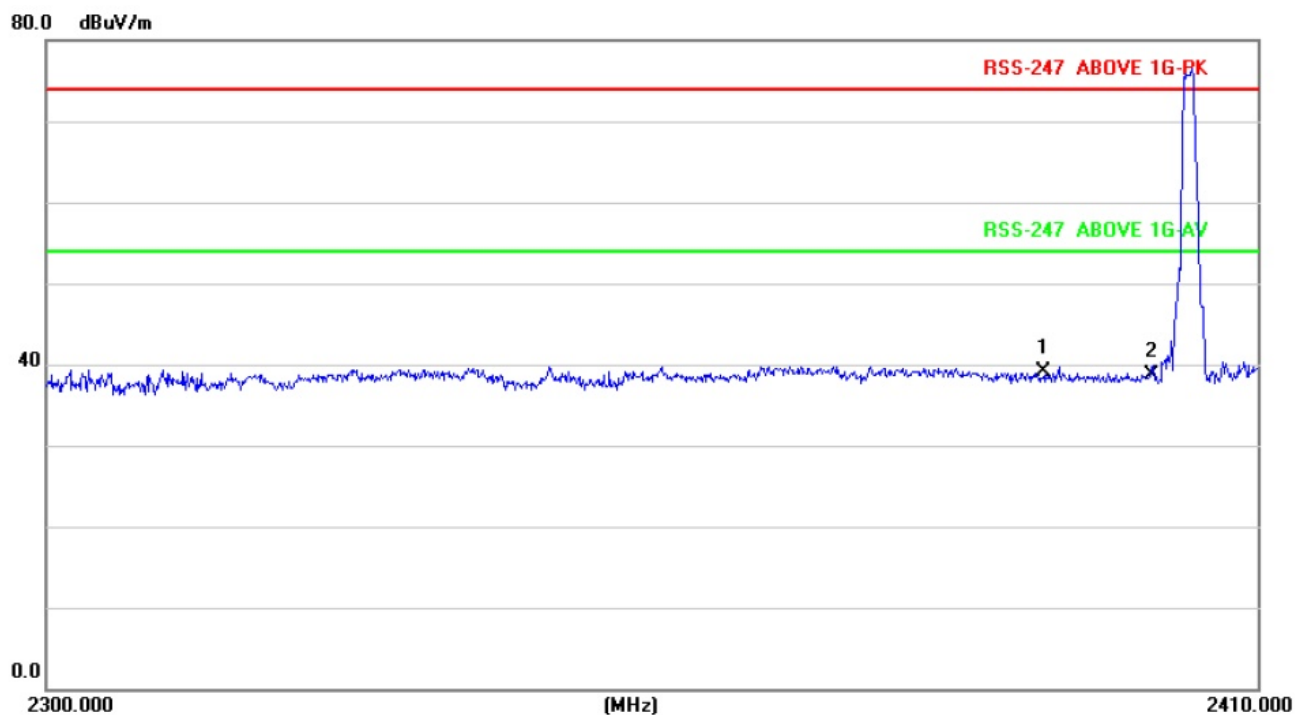




Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2480									
V	2483.50	67.42	38.17	7.42	20.51	57.18	74.00	-16.82	PK
V	2483.50	56.06	38.17	7.42	20.51	45.82	54.00	-8.18	AV
V	2500.00	67.36	38.20	7.45	20.54	57.15	74.00	-16.85	PK
V	2500.00	55.52	38.20	7.45	20.54	45.31	54.00	-8.69	AV
H	2483.50	67.54	38.17	7.42	20.51	57.30	74.00	-16.70	PK
H	2483.50	56.10	38.17	7.42	20.51	45.86	54.00	-8.14	AV
H	2500.00	67.16	38.20	7.45	20.54	56.95	74.00	-17.05	PK
H	2500.00	56.37	38.20	7.45	20.54	46.16	54.00	-7.84	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

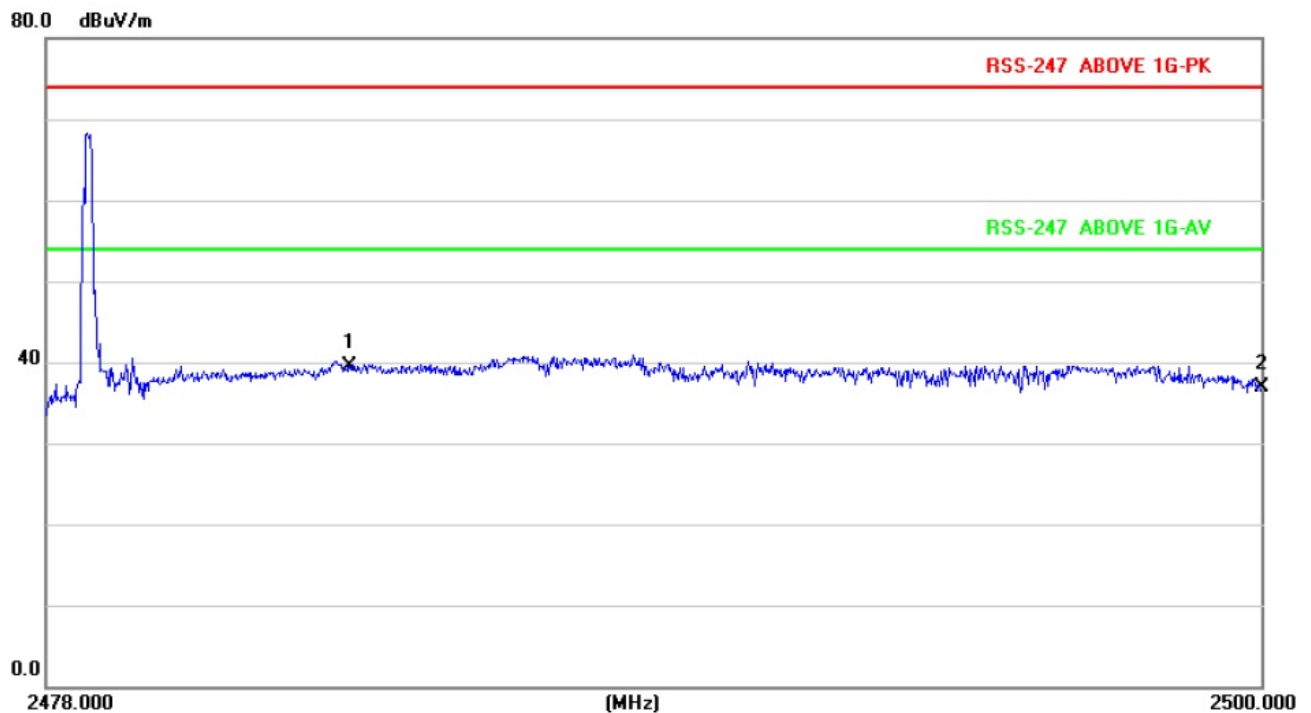



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 RSS-247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



4.1.5 TEST RESULTS


Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 9V from adapter(AC 120V/60Hz)
Test Mode :	TX Mode /CH01, CH20, CH40		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2402 MHz	-4.79	8	PASS
2440 MHz	-4.99	8	PASS
2480 MHz	-4.72	8	PASS

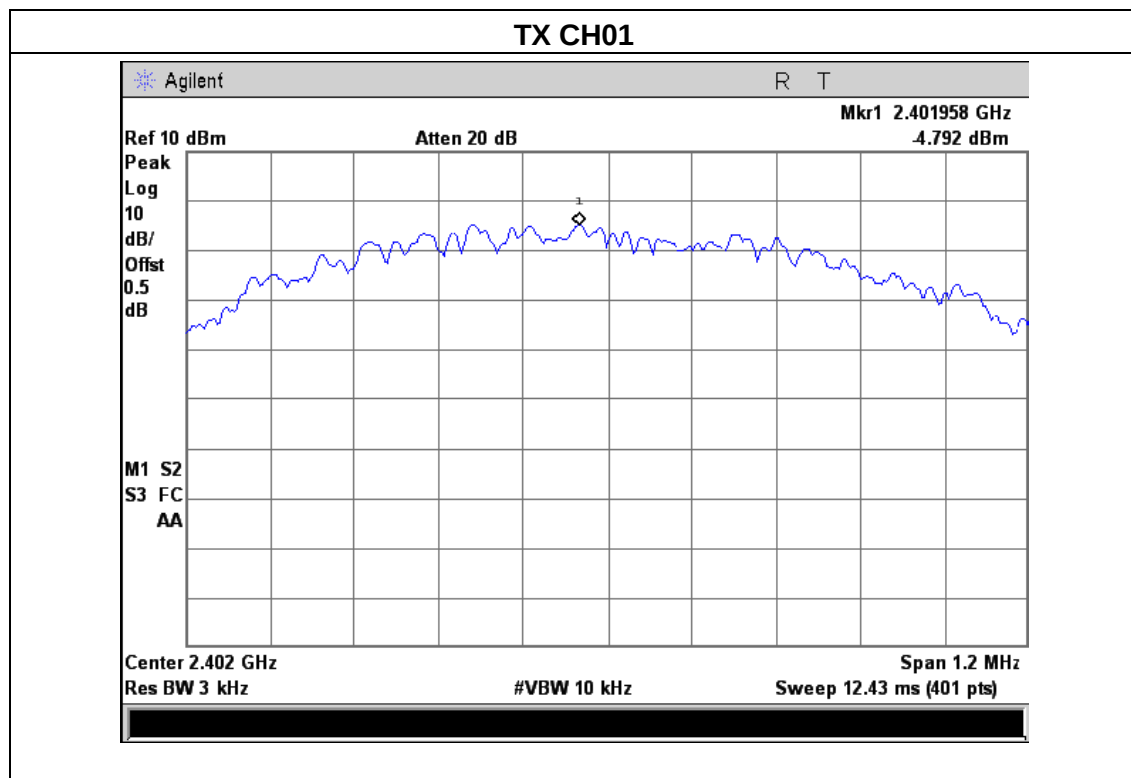




TX CH20

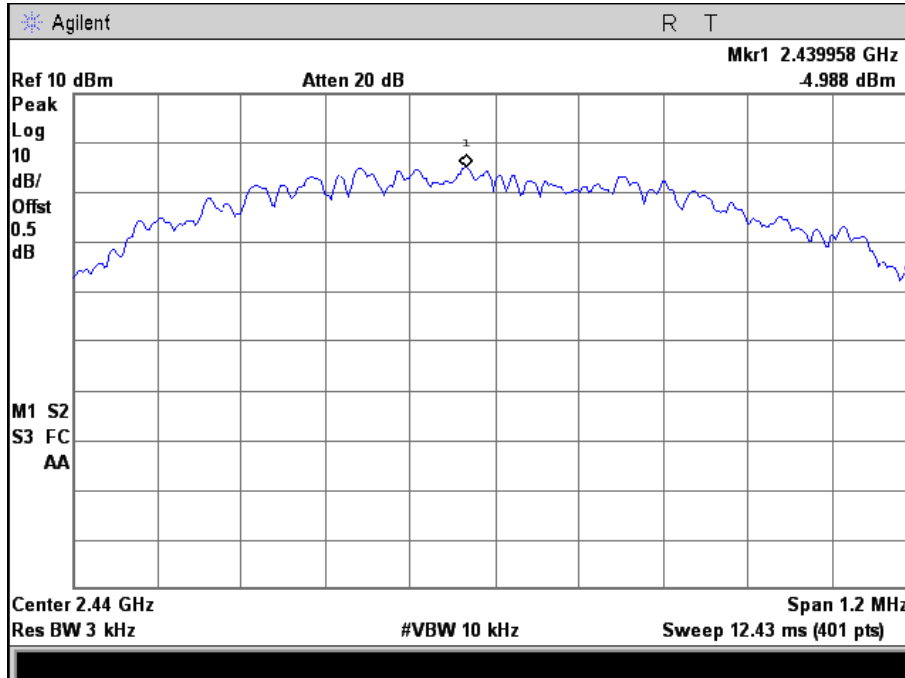

TX CH40

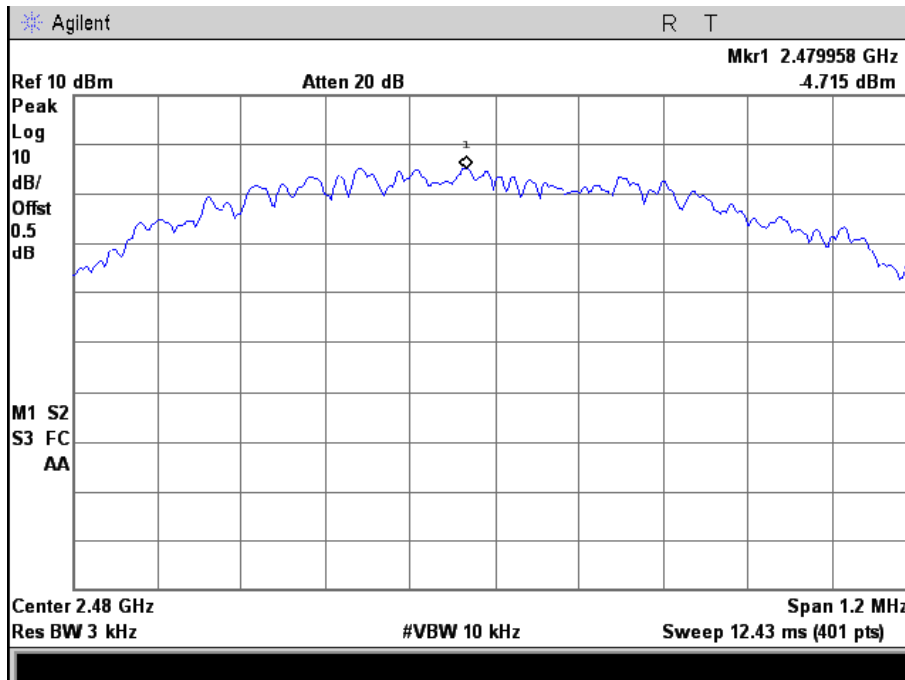



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2) RSS-247	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.5 TEST RESULTS


Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 9V from adapter(AC 120V/60Hz)
Test Mode :	TX Mode /CH01, CH20, CH40		

Channel	Frequency (MHz)	6dB bandwidth (KHz)	99dB bandwidth (KHz)	Limit (kHz)	Result
Low	2402	730.818	1.062	500	Pass
Middle	2440	734.282	1.056	500	Pass
High	2480	743.221	1.055	500	Pass

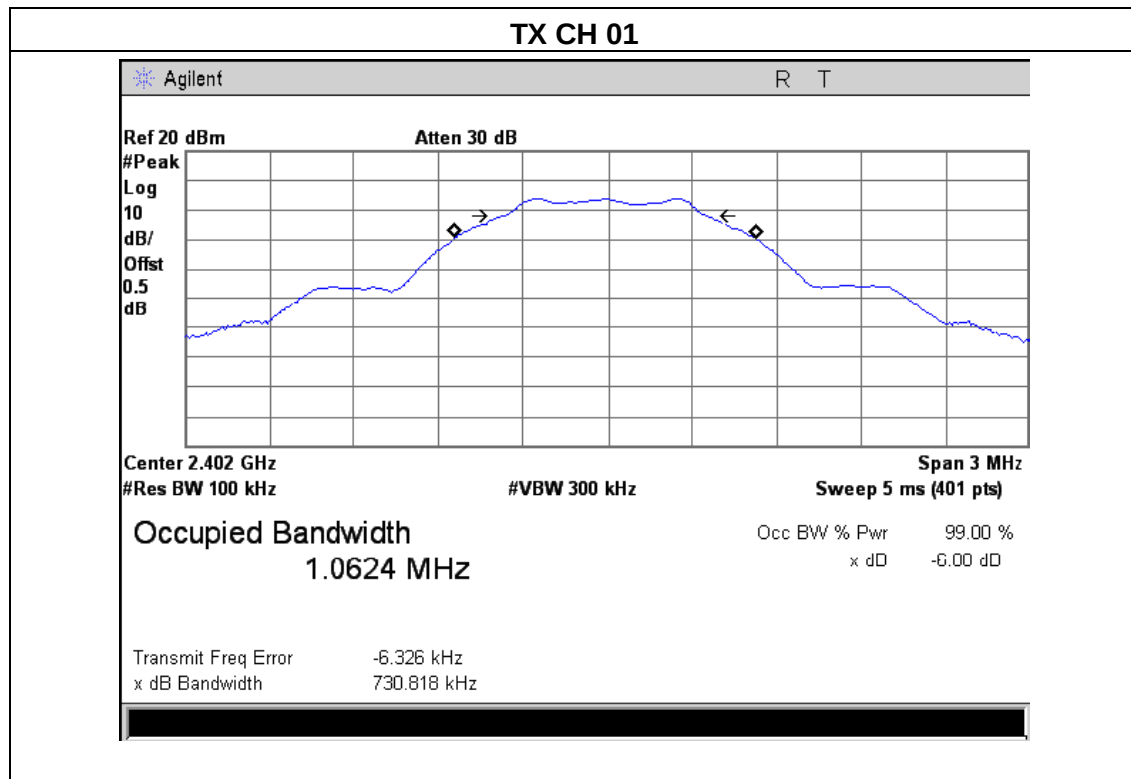




TX CH 20

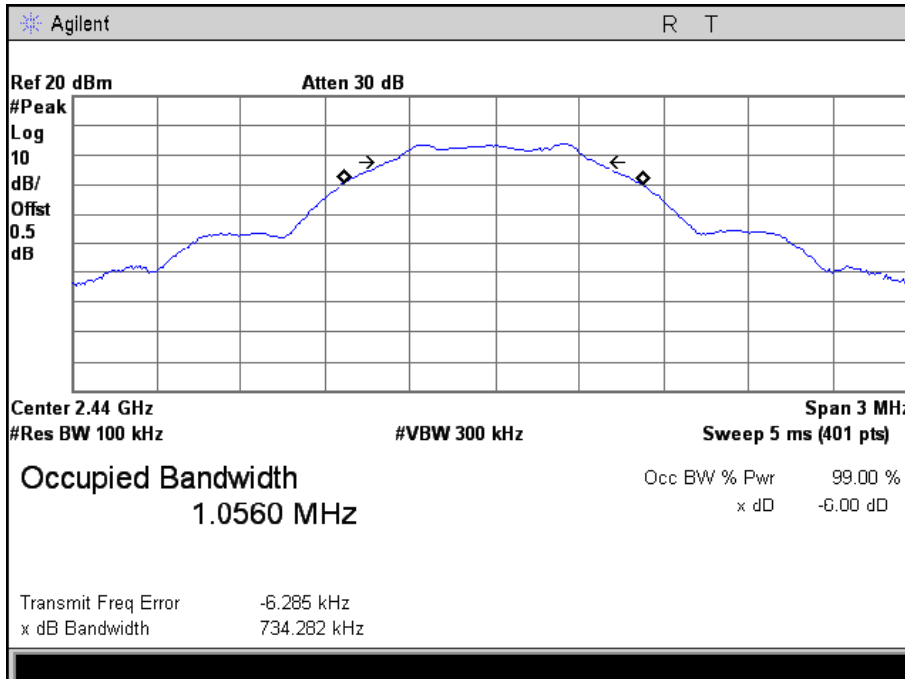

TX CH 40

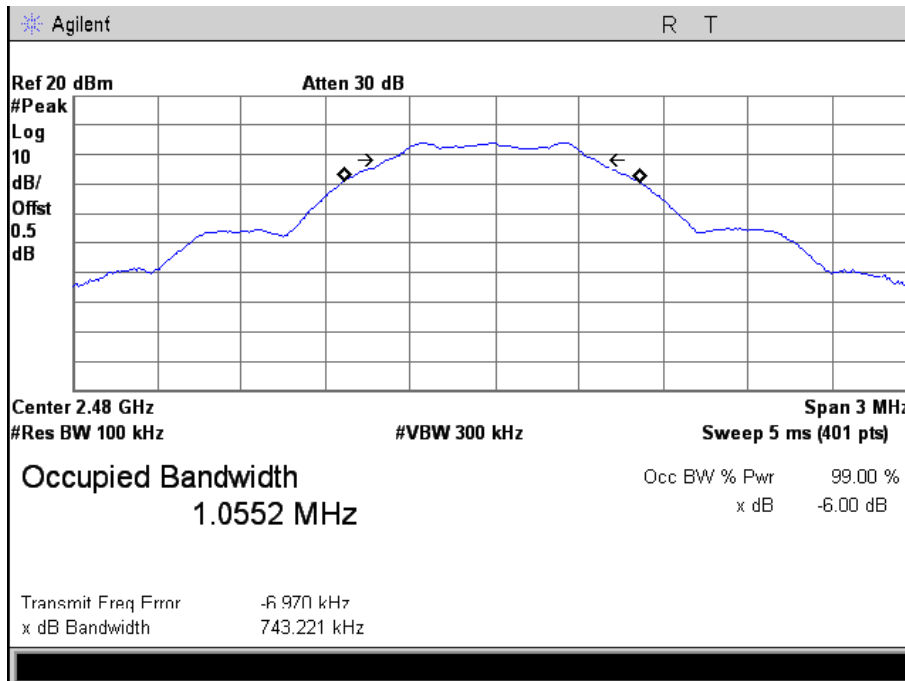



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS-247	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 9V from adapter(AC 120V/60Hz)
Test Mode :	TX Mode		

TX Mode				
Test Channe	Frequency	Output Power(PK)	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2402	1.23	2.23	30
CH20	2440	1.18	2.18	30
CH40	2480	1.24	2.24	30

EIRP=power+ Antenna Gain (numeric)



7. BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.



7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP

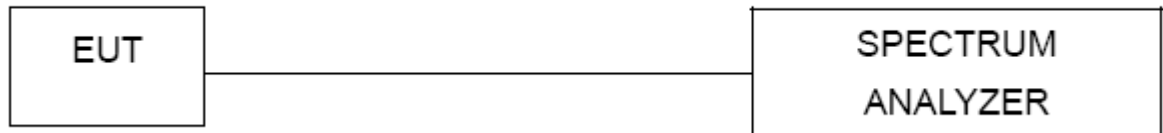


7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.4 TEST RESULTS

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 9V from adapter(AC 120V/60Hz)

Band Edge, Left Side

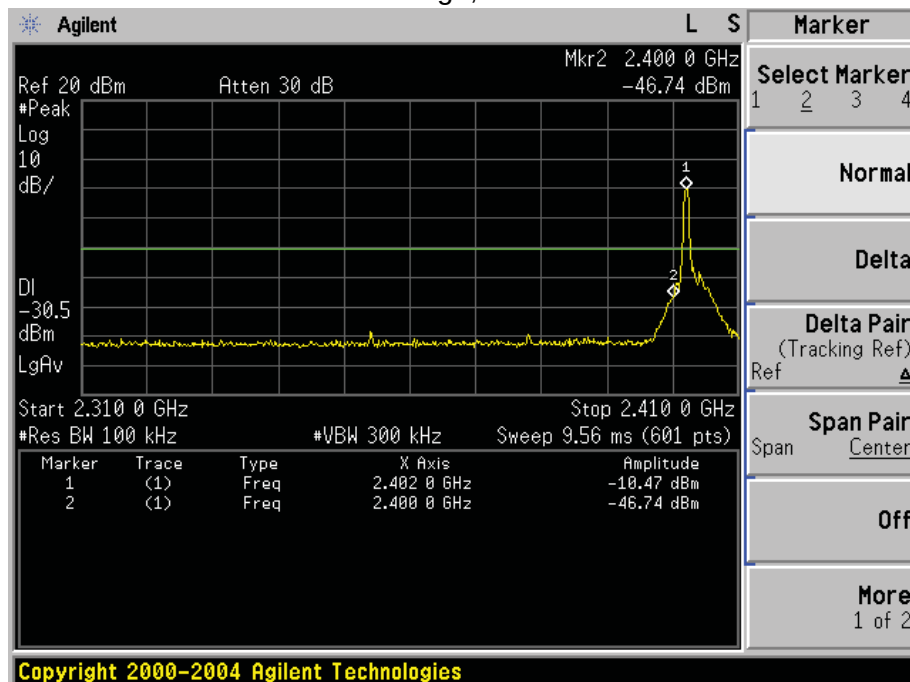

Band Edge, Right Side

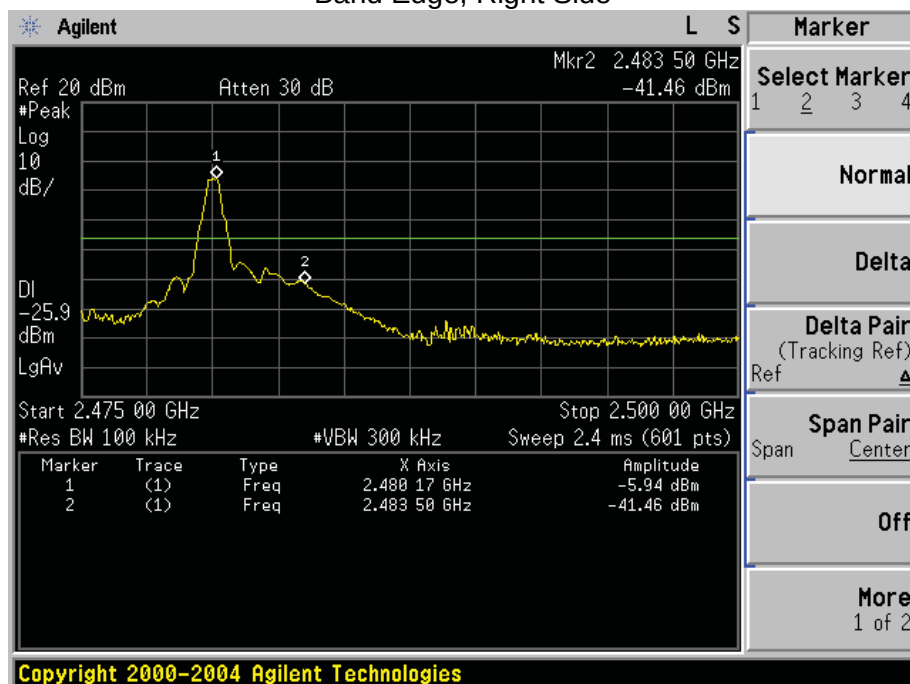



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is PCB antenna,. It comply with the standard requirement.

9. TEST SEUUP PHOTO

Radiated Emission

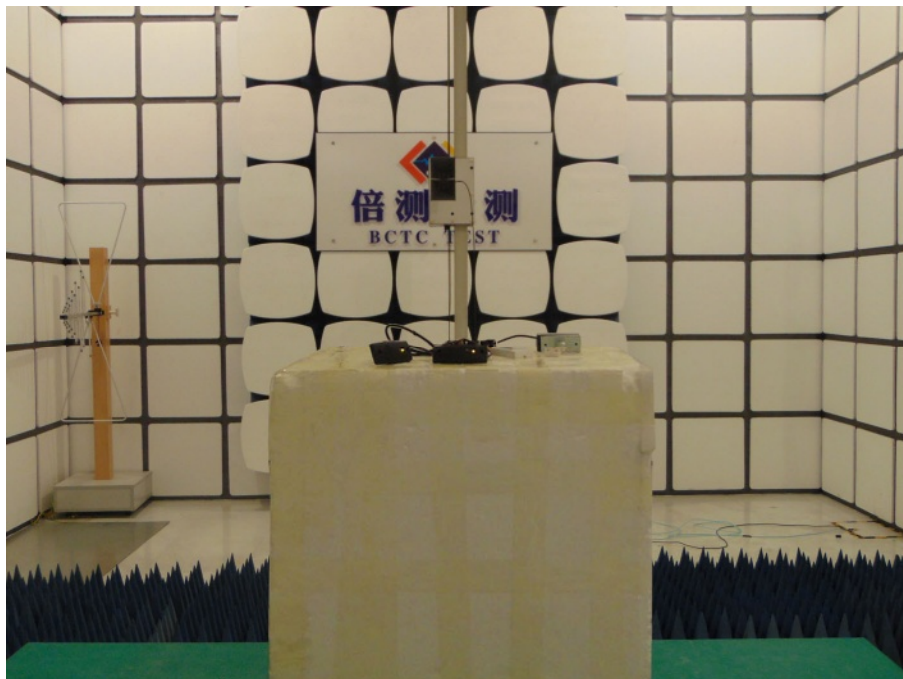
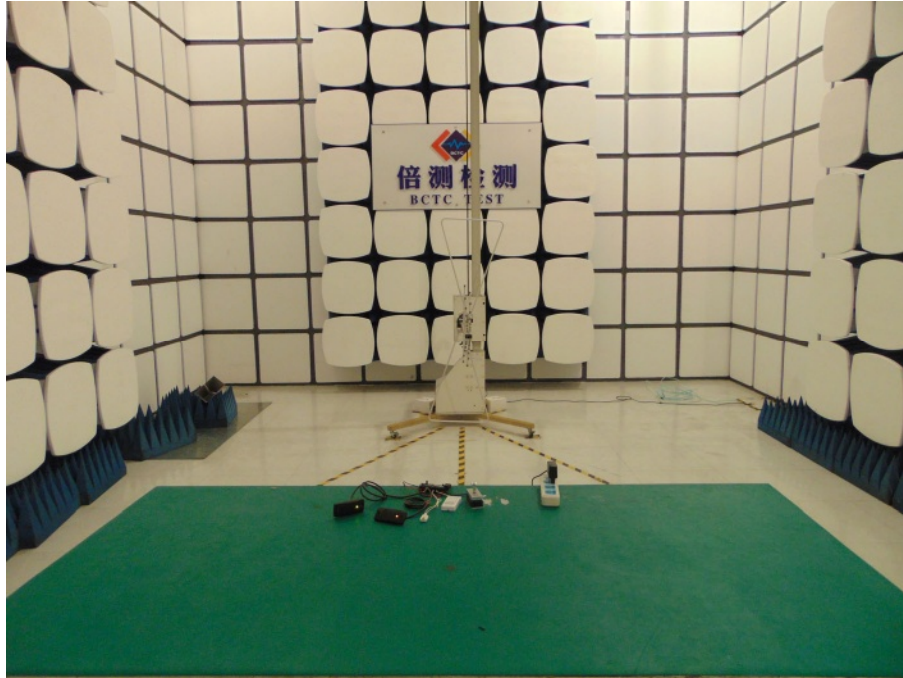




Conducted Emission



10. EUT PHOTO

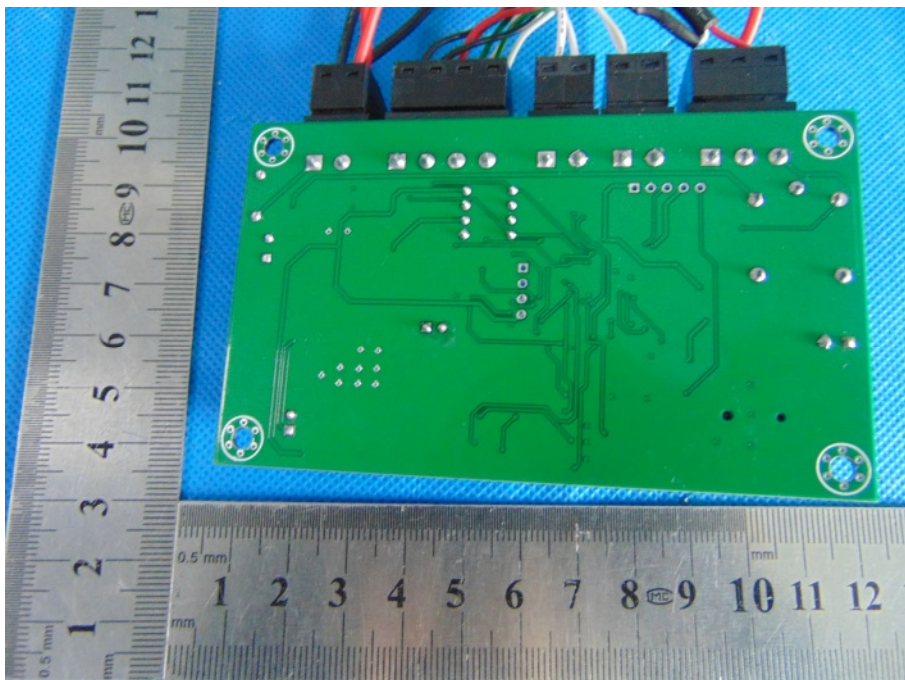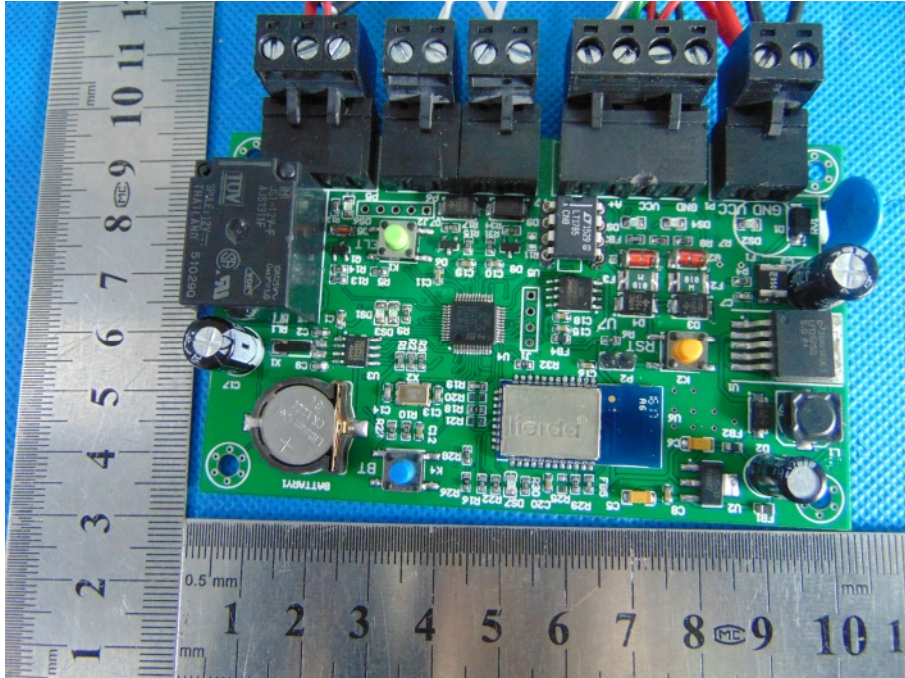

***** END OF REPORT *****