


WinTrend FCC ID: N4BWT6010
USB HUB Power fr.PC LINE A


PCTEST Engineering Lab.

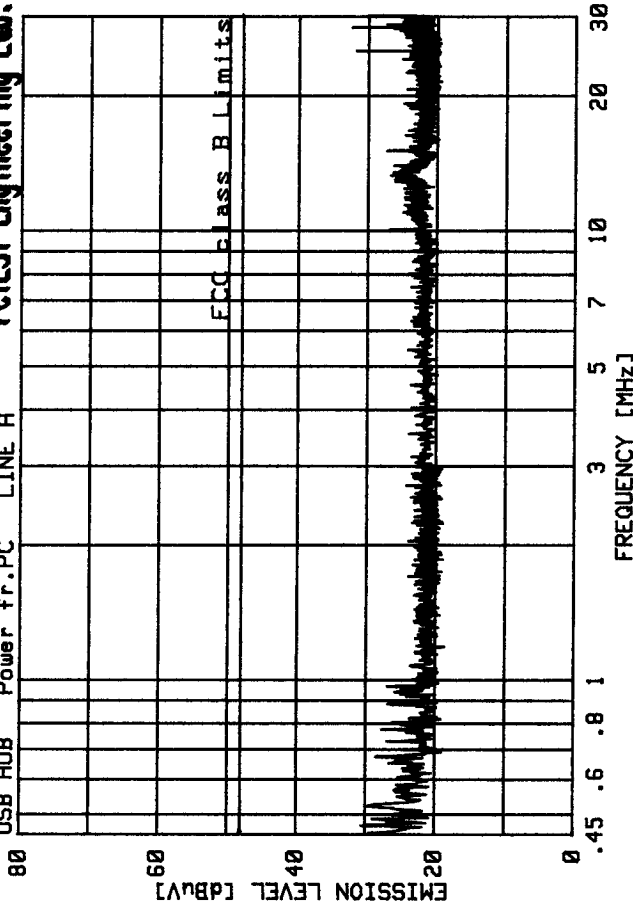

No.	Freq. [MHz]	Quasi-Pk Average [dBuV]	QP-AV Emission [dB]	Limit [dBuV]	Margin [dB]
1	28.229	31.49	-	48.00	-16.51
2	25.006	30.25	-	48.00	-17.75
3	.453	25.04	-	48.00	-22.96
4	29.937	28.88	-	48.00	-19.12
5	.518	27.21	-	48.00	-20.79
6	.453	25.30	-	48.00	-22.70
7	29.937	28.88	-	48.00	-19.12
8	.459	24.34	-	48.00	-23.66
9	.655	25.15	-	48.00	-22.85
10	.769	22.19	-	48.00	-25.81

WinTrend FCC ID: N4BWT6010
USB HUB Power fr.PC LINE B

PCTEST Engineering Lab.

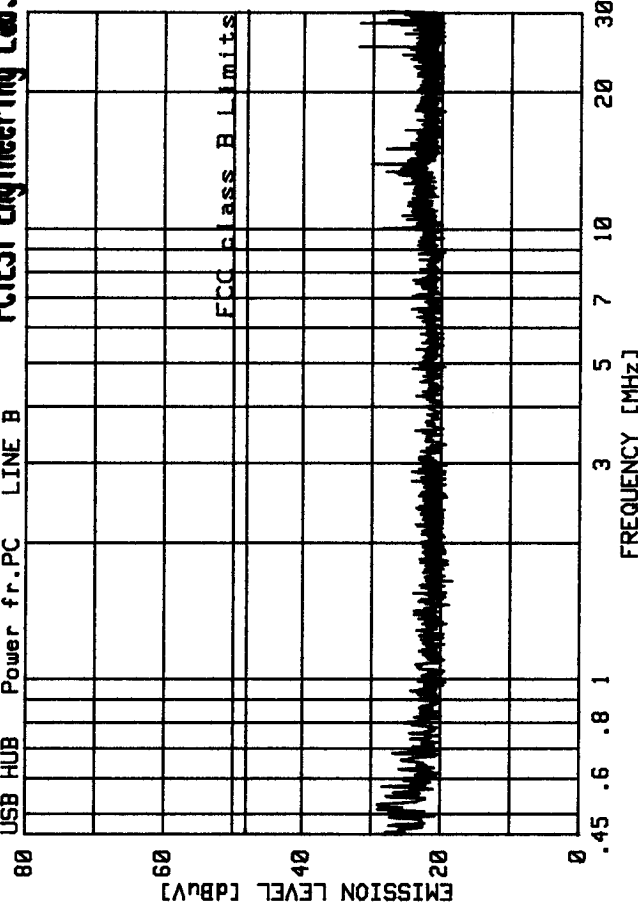


No.	Freq. [MHz]	Quasi-Pk Average [dBuV]	QP-AV Emission [dB]	Limit [dBuV]	Margin [dB]
1	25.006	30.35	-	48.00	-17.65
2	28.230	31.43	-	48.00	-16.57
3	13.851	26.26	-	48.00	-21.74
4	.518	26.93	-	48.00	-21.07
5	.518	27.06	-	48.00	-20.94
6	29.937	28.93	-	48.00	-19.07
7	9.983	26.39	-	48.00	-21.61
8	.550	23.34	-	48.00	-24.66
9	13.320	25.40	-	48.00	-22.60
10	14.954	27.95	-	48.00	-20.05

Power from AC/DC Adapter

WinTrend FCC ID: N4BWT6010
Universal Serial Bus Hub LINE A


PCTEST Engineering Lab.

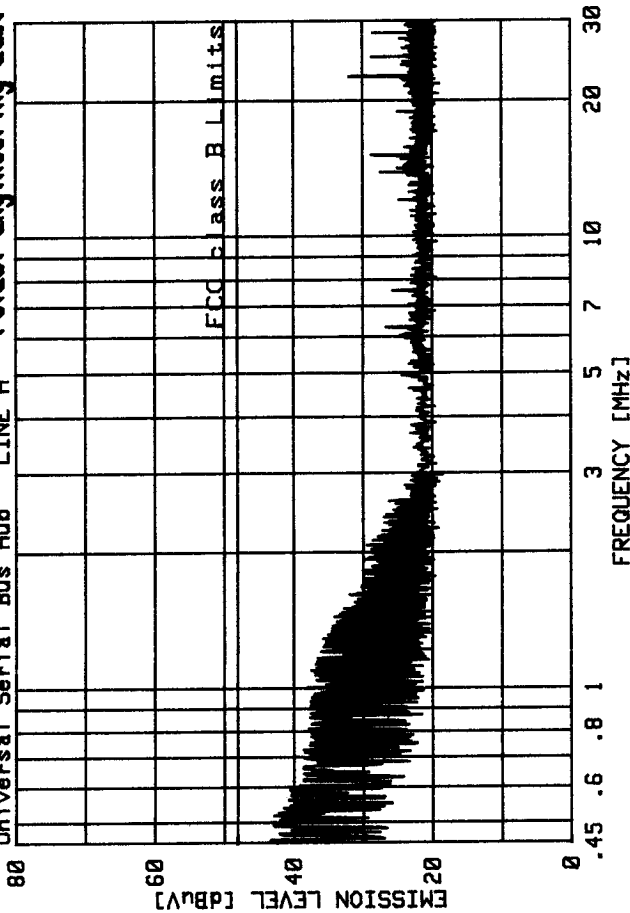

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Average [dBuV]	QP-AV Emission [dB]	Limit [dBuV]	Margin [dB]
1	.454	37.23	-	-	48.00	-10.77
2	.481	36.63	-	-	48.00	-11.37
3	.496	36.38	-	-	48.00	-11.62
4	.451	37.26	-	-	48.00	-10.74
5	.478	36.73	-	-	48.00	-11.27
6	.510	36.12	-	-	48.00	-11.88
7	.534	35.46	-	-	48.00	-12.54
8	.567	34.70	-	-	48.00	-13.30
9	.471	37.03	-	-	48.00	-10.97
10	.580	34.10	-	-	48.00	-13.90

WinTrend FCC ID: N4BWT6010
Universal Serial Bus Hub LINE B

PCTEST Engineering Lab.

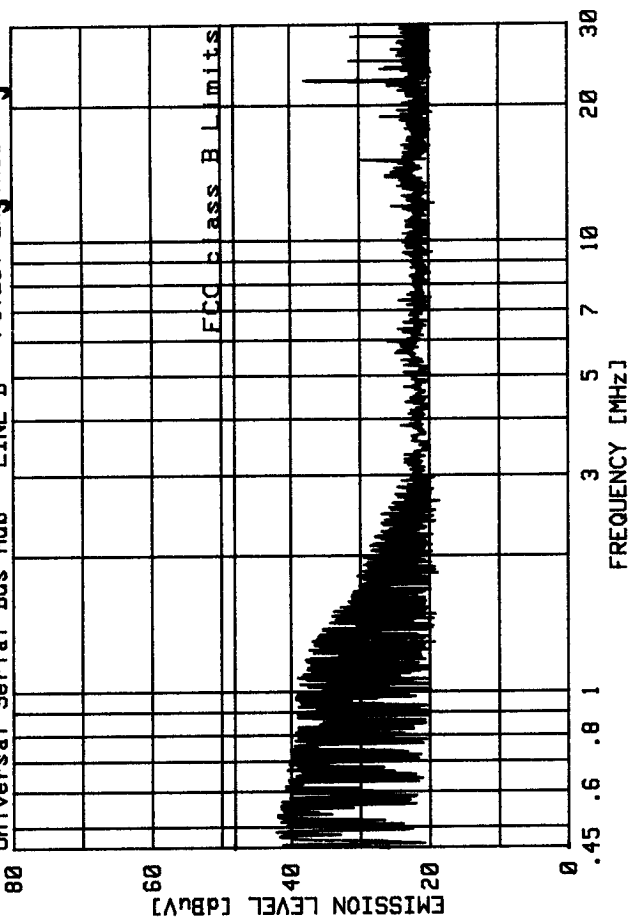

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Average [dBuV]	QP-AV Emission [dB]	Limit [dBuV]	Margin [dB]
1	.463	35.00	-	-	48.00	-12.20
2	.510	35.38	-	-	48.00	-12.62
3	.450	35.98	-	-	48.00	-12.02
4	.484	35.53	-	-	48.00	-12.47
5	.535	35.26	-	-	48.00	-12.74
6	.545	35.20	-	-	48.00	-12.80
7	.451	36.02	-	-	48.00	-11.98
8	.593	34.83	-	-	48.00	-13.17
9	.605	34.50	-	-	48.00	-13.50
10	.471	35.55	-	-	48.00	-12.45