

FCC Report

Applicant: FLYSKY RC MODEL TECHNOLOGY CO., LTD
Address of Applicant: West building3, Huangjianyuan Ind, Park QIAOLI North Gate Changping Town Dongguan CN.

Equipment Under Test (EUT)

Product Name: 2CH Gun Radio
Model No.: BSD-GT2
FCC ID: N4ZFBSDGT2
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2012
Date of sample receipt: July 08, 2013
Date of Test: July 08-09, 2013
Date of report issued: July 09, 2013
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.


This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	July 09, 2013	Original

Prepared By:



Date:

July 09, 2013

Project Engineer

Check By:



Date:

July 09, 2013

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
5.7 DESCRIPTION OF SUPPORT UNITS	7
5.8 TEST INSTRUMENTS LIST	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT:	9
6.2 CONDUCTED EMISSIONS	10
6.3 CONDUCTED PEAK OUTPUT POWER	11
6.4 20dB EMISSION BANDWIDTH	13
6.5 CARRIER FREQUENCIES SEPARATION	15
6.6 HOPPING CHANNEL NUMBER	17
6.7 DWELL TIME	18
6.8 BAND EDGE	22
6.8.1 <i>Conducted Emission Method</i>	22
6.8.2 <i>Radiated Emission Method</i>	24
6.9 SPURIOUS EMISSION	26
6.9.1 <i>Conducted Emission Method</i>	26
6.9.2 <i>Radiated Emission Method</i>	29
7 TEST SETUP PHOTO	35
8 EUT CONSTRUCTIONAL DETAILS	37

4 Test Summary

Test Item	Section	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	N/A
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	FLYSKY RC MODEL TECHNOLOGY CO., LTD
Address of Applicant:	West building3, Huangjianyuan Ind, Park QIAOLI North Gate Changping Town Dongguan CN.
Manufacturer:	FLYSKY RC MODEL TECHNOLOGY CO., LTD
Address of Manufacturer:	West building3, Huangjianyuan Ind, Park QIAOLI North Gate Changping Town Dongguan CN.
Factory:	FLYSKY RC MODEL TECHNOLOGY CO., LTD
Address of Factory:	West building3, Huangjianyuan Ind, Park QIAOLI North Gate Changping Town Dongguan CN.

5.2 General Description of EUT

Product Name:	2CH Gun Radio
Model No.:	BSD-GT2
Operation Frequency:	2404MHz~2476.5MHz
Channel numbers:	16
Modulation type:	GFSK
Antenna Type:	Integral
Antenna gain:	2dBi
Power supply:	DC 6.0V (4*1.5V "AA" Size Battery)

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2404.0	5	2420.5	9	2440.0	13	2460.5
2	2405.5	6	2425.5	10	2445.5	14	2465.5
3	2410.5	7	2430.5	11	2450.5	15	2470.5
4	2415.5	8	2435.5	12	2455.5	16	2476.5

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2404.0MHz
The middle channel	2440.0MHz
The Highest channel	2476.5MHz

5.3 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
<i>Remark: During the test, the new battery was used.</i>	

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.5 Test Location

All other tests were performed at: Global United Technology Services Co., Ltd. Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China Tel: 0755-27798480 Fax: 0755-27798960
--

5.6 Other Information Requested by the Customer

None.

5.7 Description of Support Units

None.

5.8 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2013	Mar. 28 2015
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 6, 2012	Dec. 5, 2013
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 02 2013	Jul. 01 2014
5	Loop Antenna	ZHINAN	ZN30900A	GTS220	Feb. 24 2013	Feb. 23 2014
6	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 24 2013	Feb. 23 2014
7	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2013	June 27 2014
8	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 29 2013	Mar. 28 2014
9	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
10	Coaxial Cable	GTS	N/A	GTS213	Mar. 30 2013	Mar. 29 2014
11	Coaxial Cable	GTS	N/A	GTS211	Mar. 30 2013	Mar. 29 2014
12	Coaxial cable	GTS	N/A	GTS210	Mar. 30 2013	Mar. 29 2014
13	Coaxial Cable	GTS	N/A	GTS212	Mar. 30 2013	Mar. 29 2014
14	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 02 2013	Jul. 01 2014
15	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 02 2013	Jul. 01 2014
16	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2013	June 27 2014
17	Band filter	Amindeon	82346	GTS219	Mar. 30 2013	Mar. 29 2014

6 Test results and Measurement Data

6.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
-----------------------	-------------------------------------

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:


(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:


The antenna is Integral Antenna, the best case gain of the antenna is 2dBi

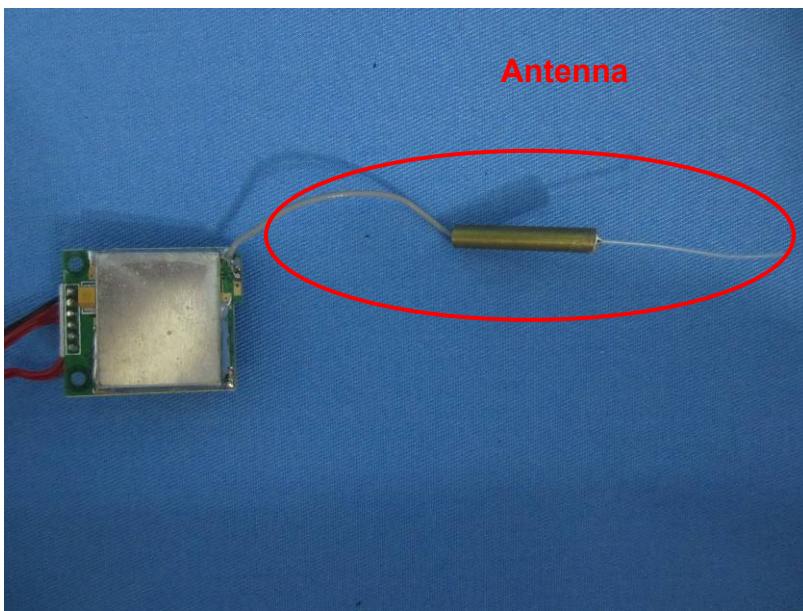

6.2 Conducted Emissions

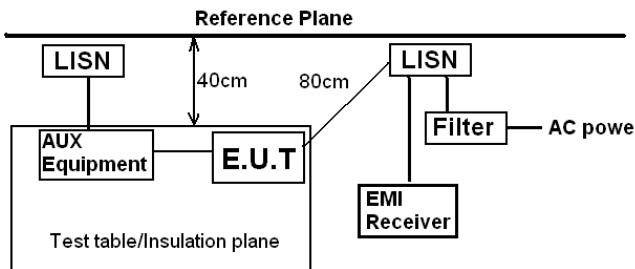
Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2009																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test setup:	 <p>Reference Plane</p> <p>LISN</p> <p>40cm</p> <p>80cm</p> <p>AUX Equipment</p> <p>E.U.T</p> <p>Test table/Insulation plane</p> <p>LISN</p> <p>Filter</p> <p>AC power</p> <p>EMI Receiver</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 																
Test Instruments:	Refer to section 5.8 for details																
Test mode:	N/A																
Test results:	N/A																
Remark:	Due to the EUT is powered by battery, this test does not apply.																

6.3 Conducted Peak Output Power

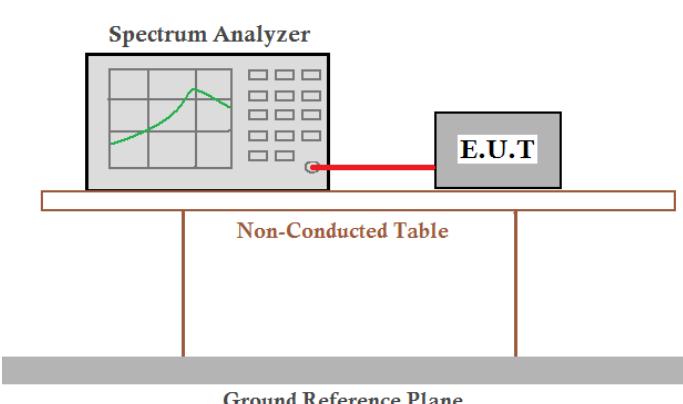
Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	DA 00-705, ANSI C63.10:2009
Limit:	20.97dBm
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	15.13	20.97	Pass
Middle	15.34		
Highest	14.95		

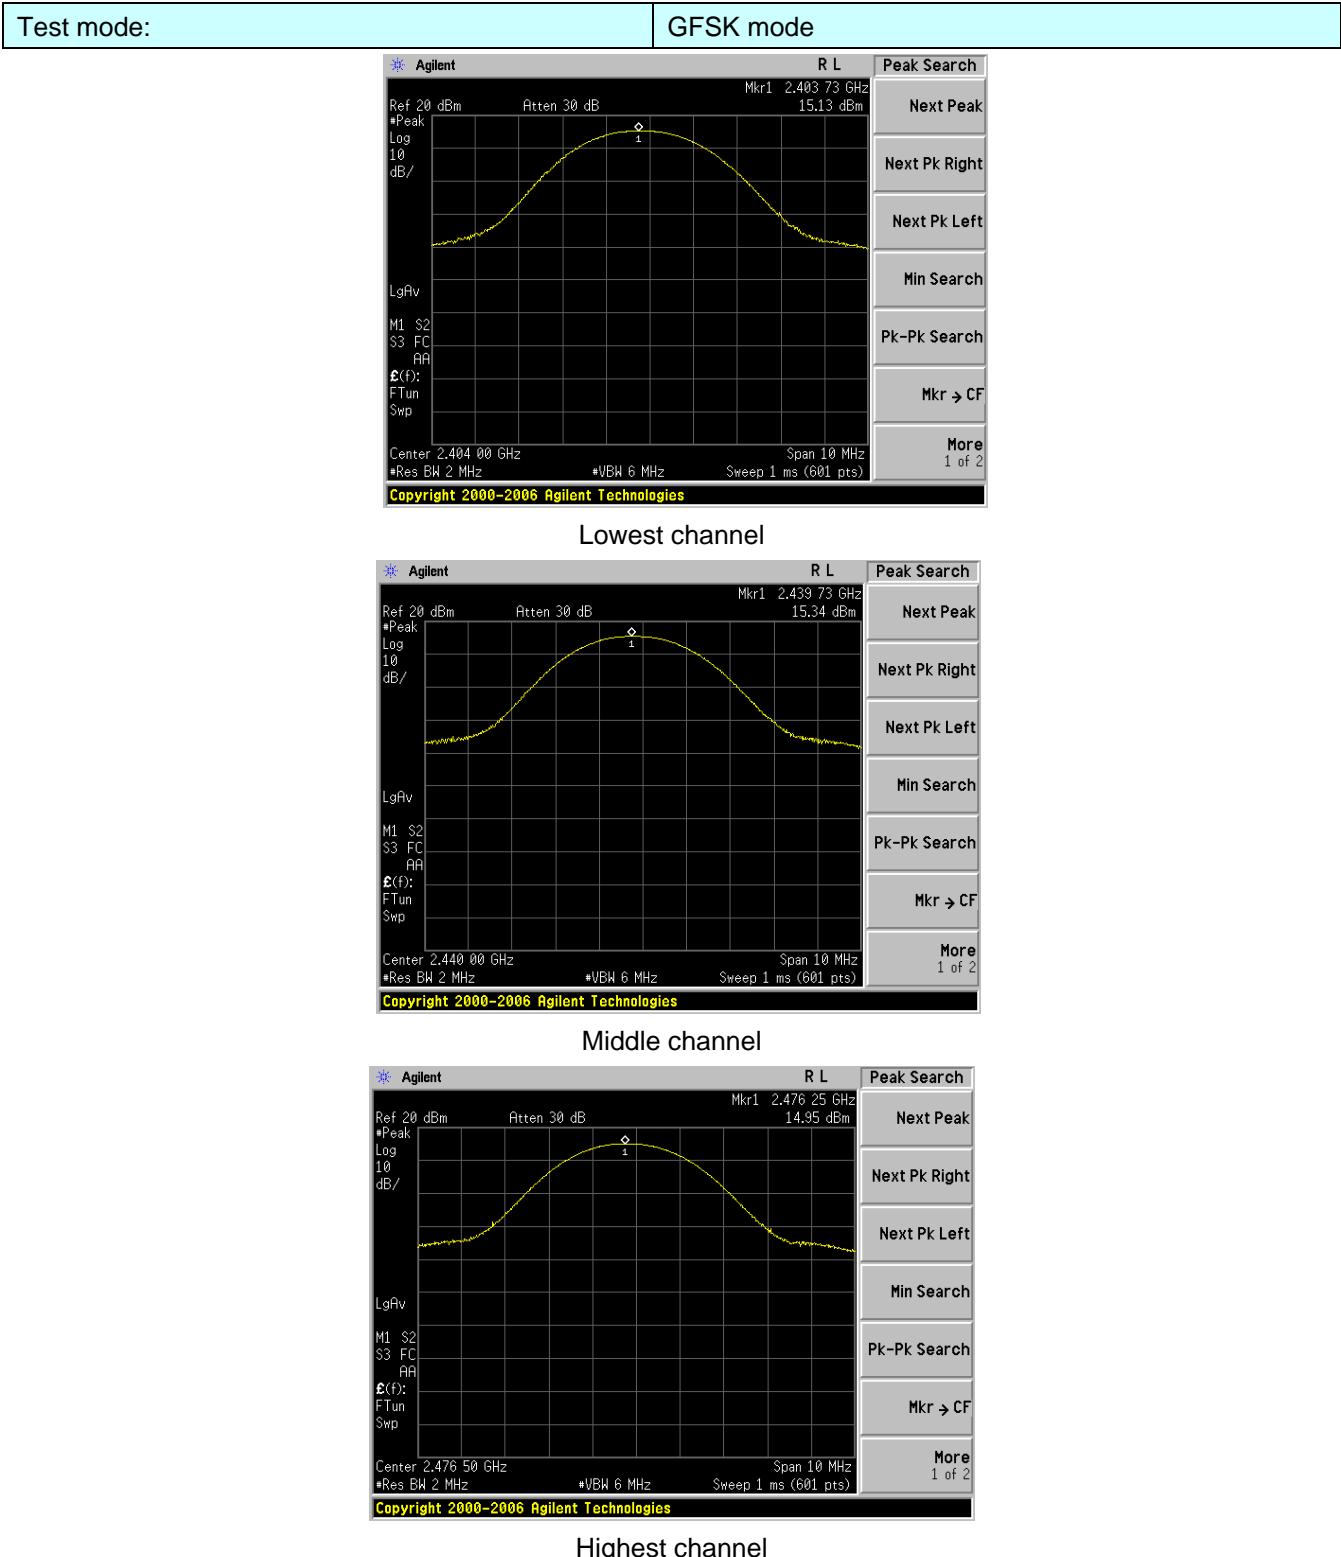
Test plot as follows:


6.4 20dB Emission Bandwidth

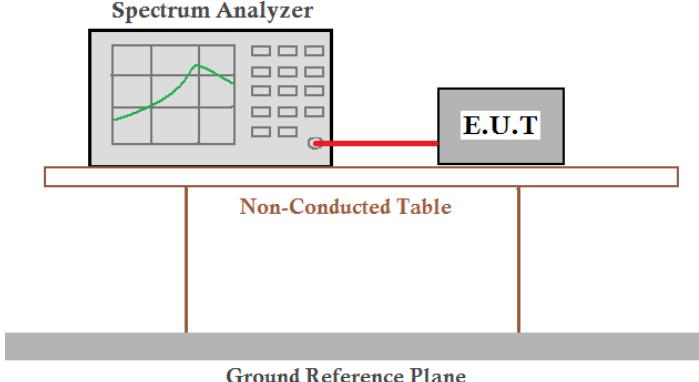
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	DA 00-705, ANSI C63.10:2009
Limit:	N/A
Test setup:	 <p>The diagram illustrates the test setup. A 'Spectrum Analyzer' is connected to a 'Non-Conducted Table'. On the table, there is a 'E.U.T' (Equipment Under Test). The table is positioned above a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Test channel	20dB Emission Bandwidth (MHz)	Result
Lowest	1.051	Pass
Middle	1.050	
Highest	1.051	

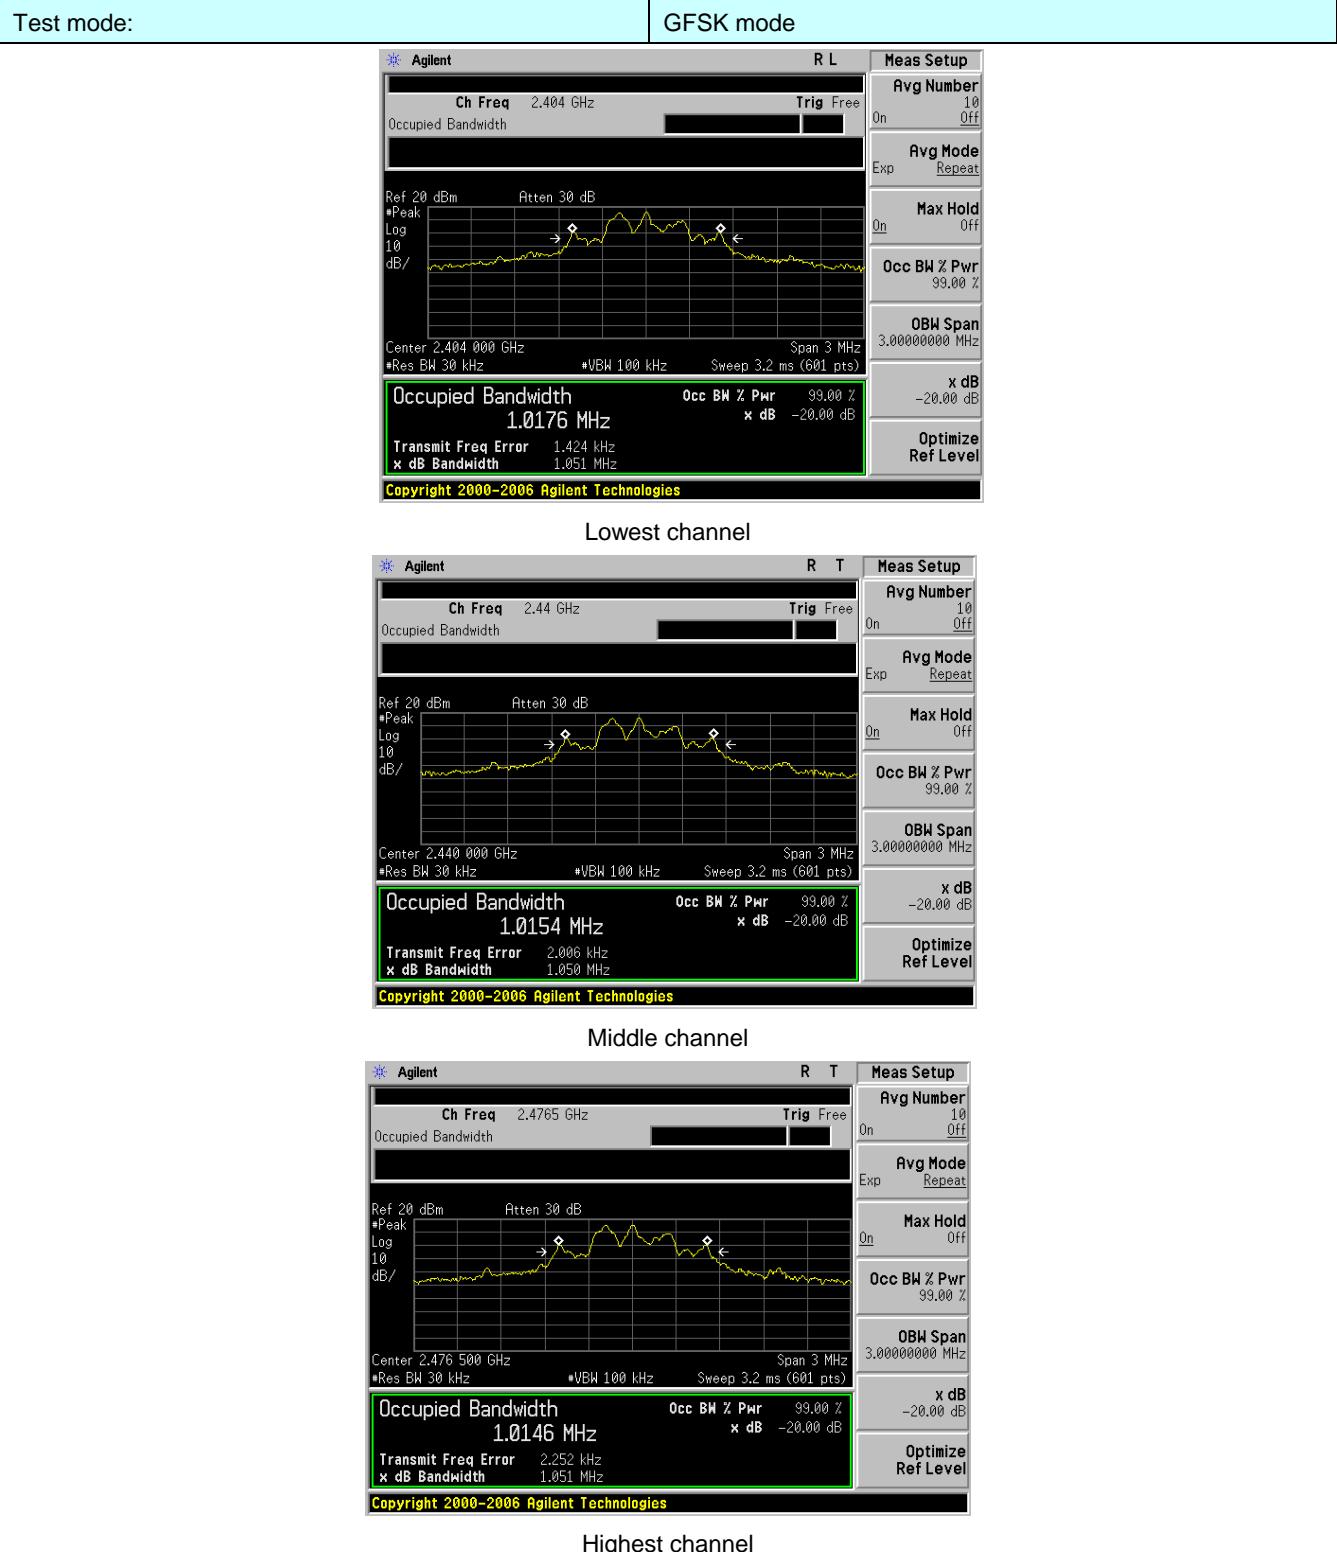Test plot as follows:


6.5 Carrier Frequencies Separation

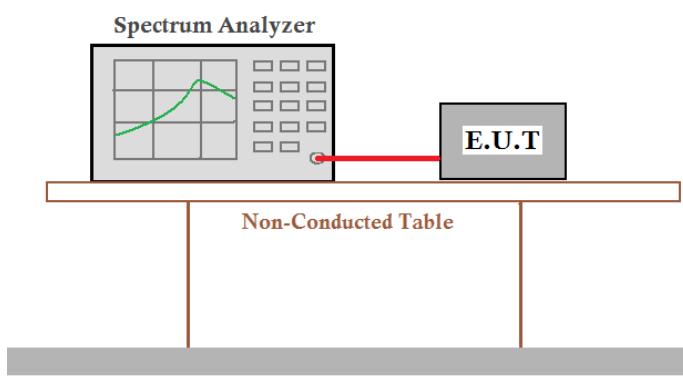
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	DA 00-705, ANSI C63.10:2009
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1500	700	Pass
Middle	5500	700	Pass
Highest	6000	700	Pass

Note: According to section 6.4


Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1050	700

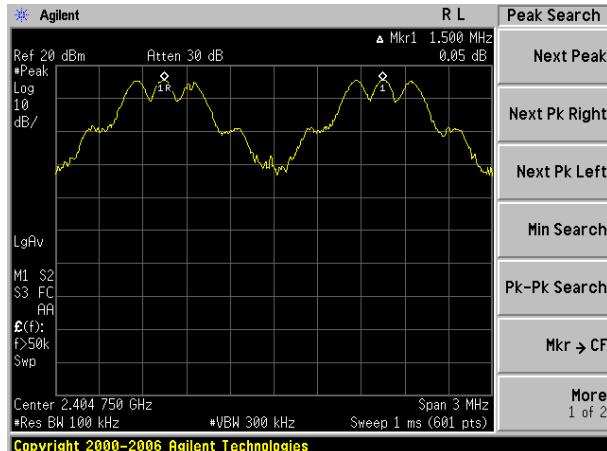Test plot as follows:


Lowest channel

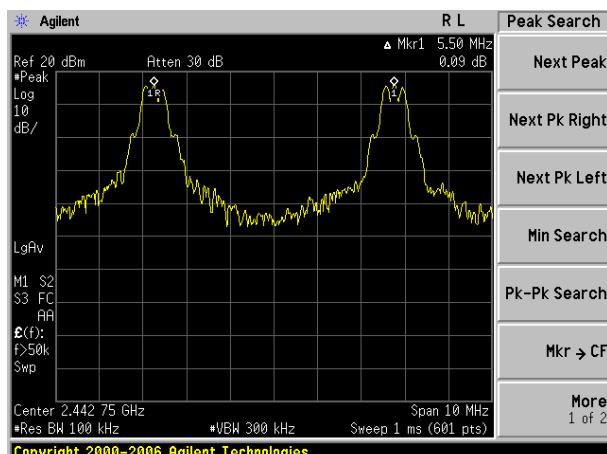


Middle channel

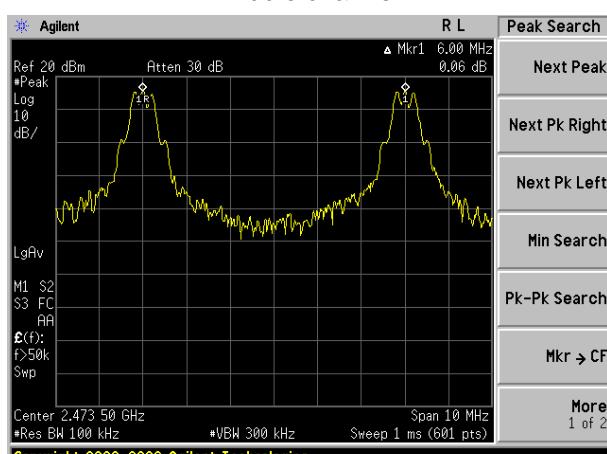


Highest channel

6.6 Hopping Channel Number

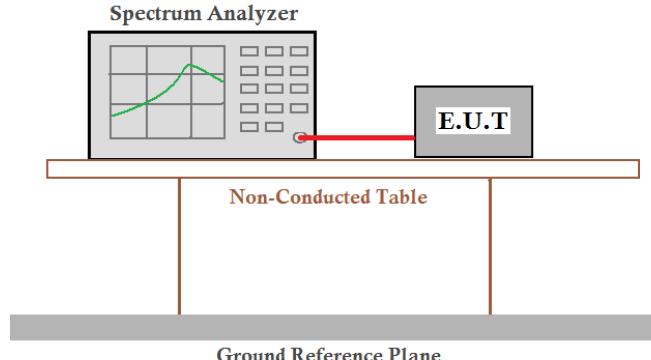
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	DA 00-705, ANSI C63.10:2009
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	16	15	Pass

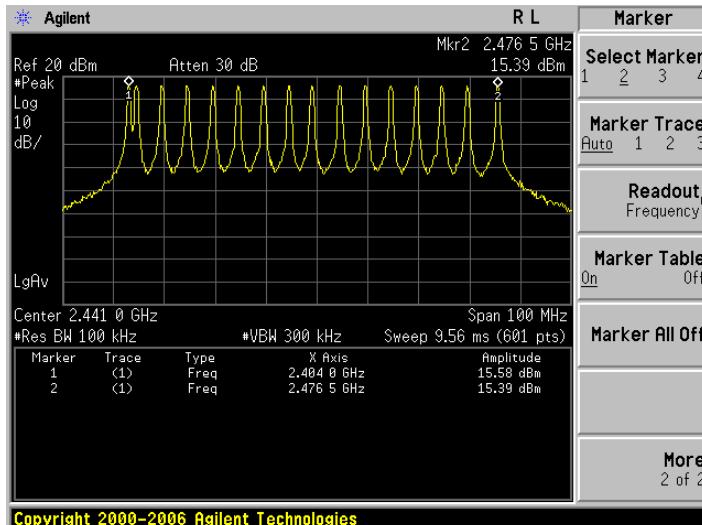

6.7 Dwell Time

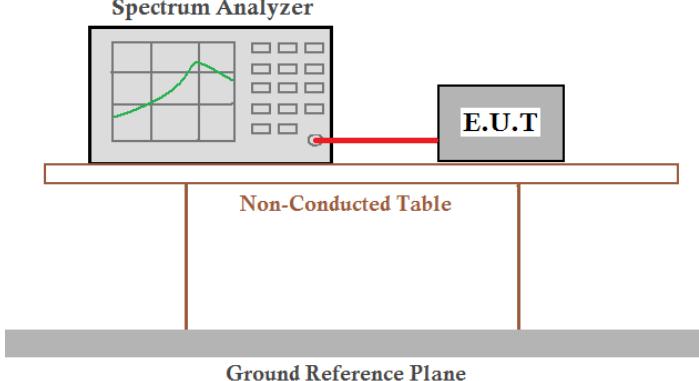Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	DA 00-705, ANSI C63.10:2009
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


Frequency	Ton (ms)	Dwell time(ms)	Limit(ms)	Result
2.404GHz	0.5599	143.33	400	Pass
2.440GHz	0.5599	143.33	400	Pass
2.4765GHz	0.5599	143.33	400	Pass

The formula as below:


Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=0.5599ms*40*0.4*16=143.33ms

Test plot as follows:

Frequency:	2404MHz
------------	---------

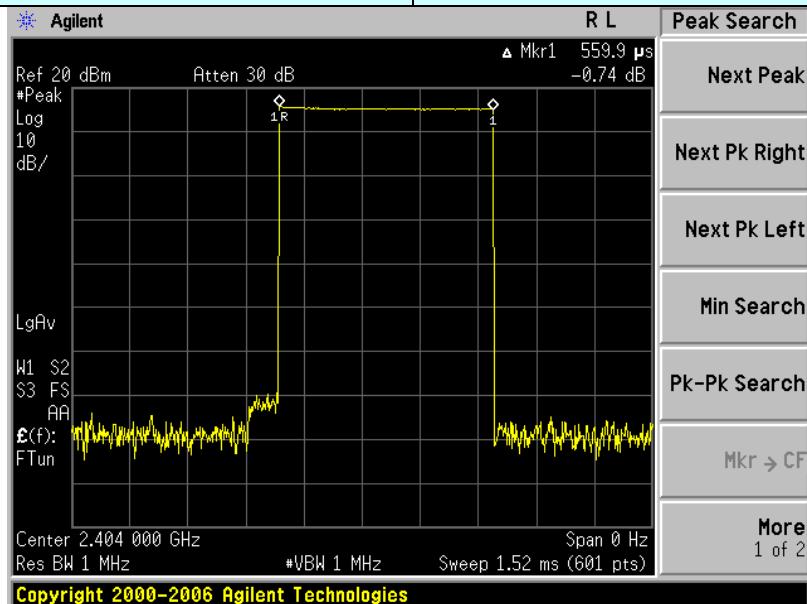


Ton

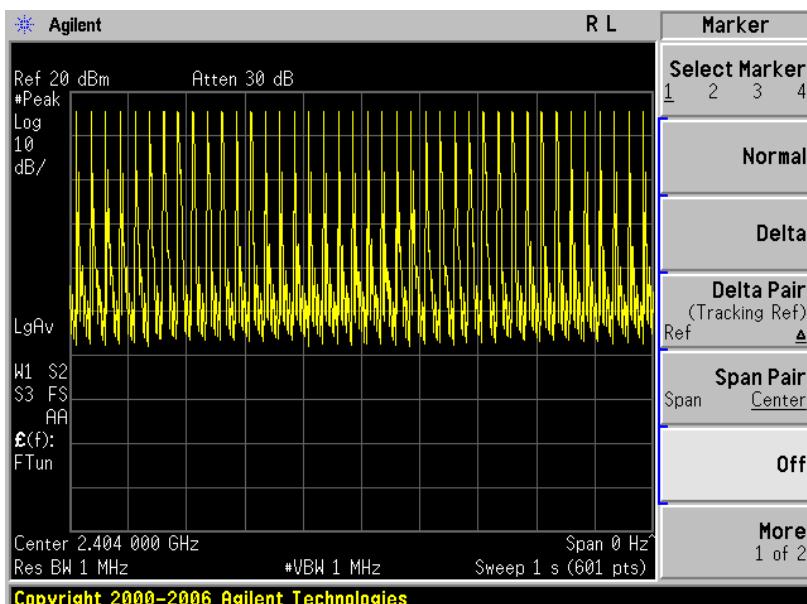


Ton times in 1s

Frequency:	2440MHz
------------	---------

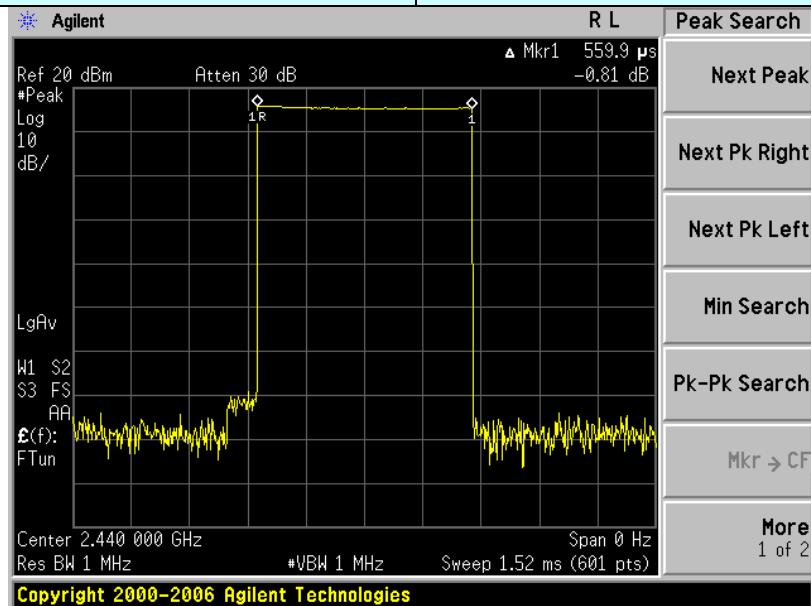


Ton

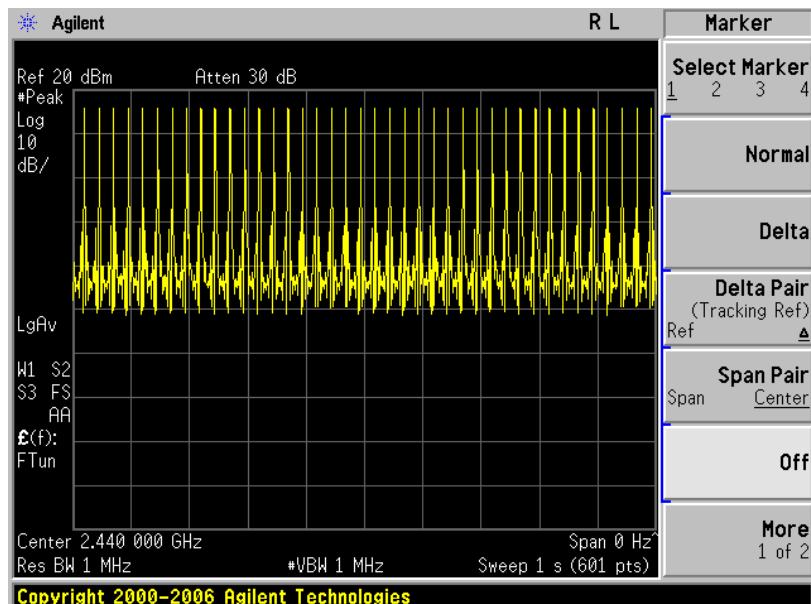


Ton times in 1s

Frequency:	2476.5MHz
------------	-----------

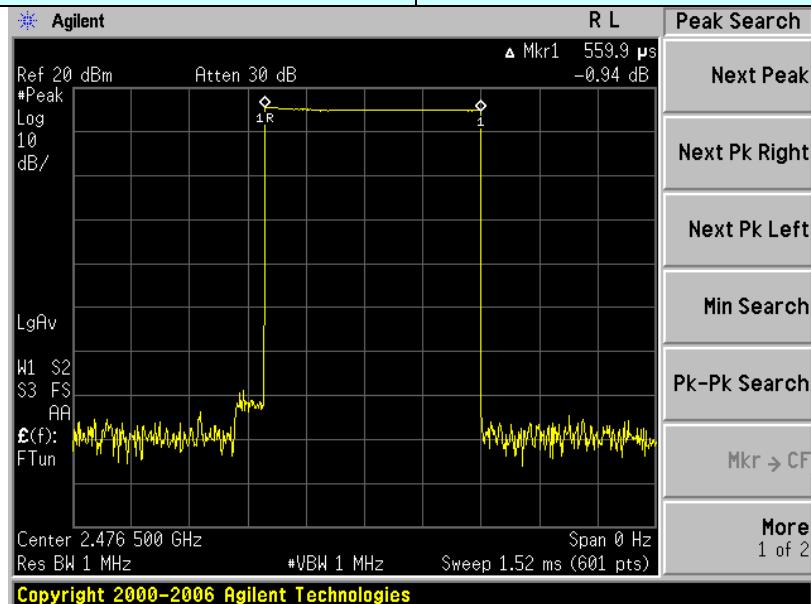


Ton

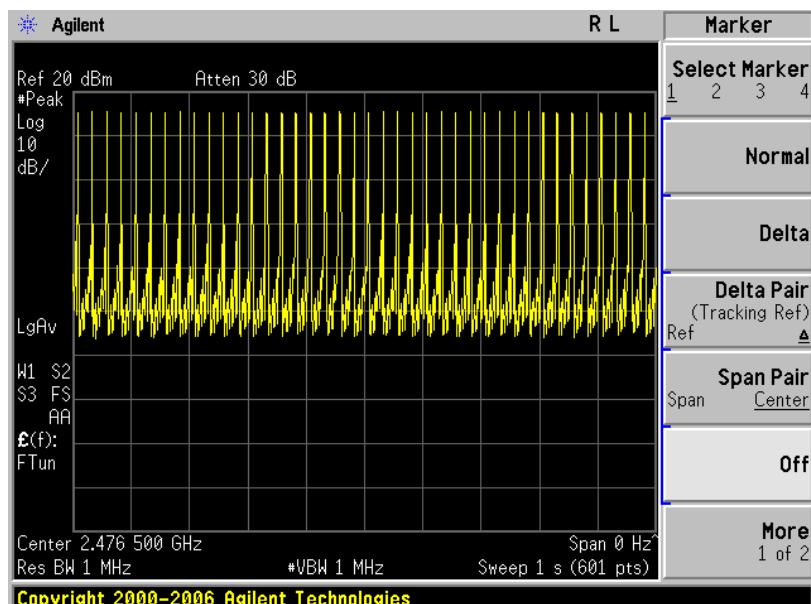


Ton times in 1s

6.8 Band Edge

6.8.1 Conducted Emission Method

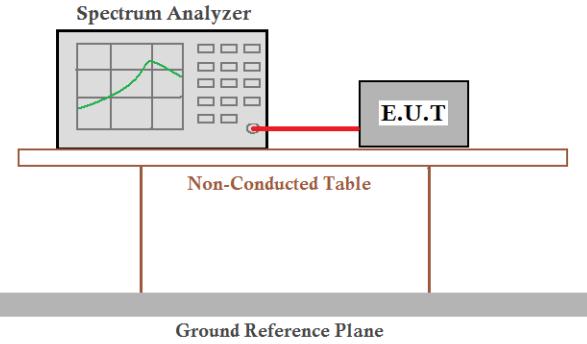
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	DA 00-705, ANSI C63.10:2009
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Test plot as follows:

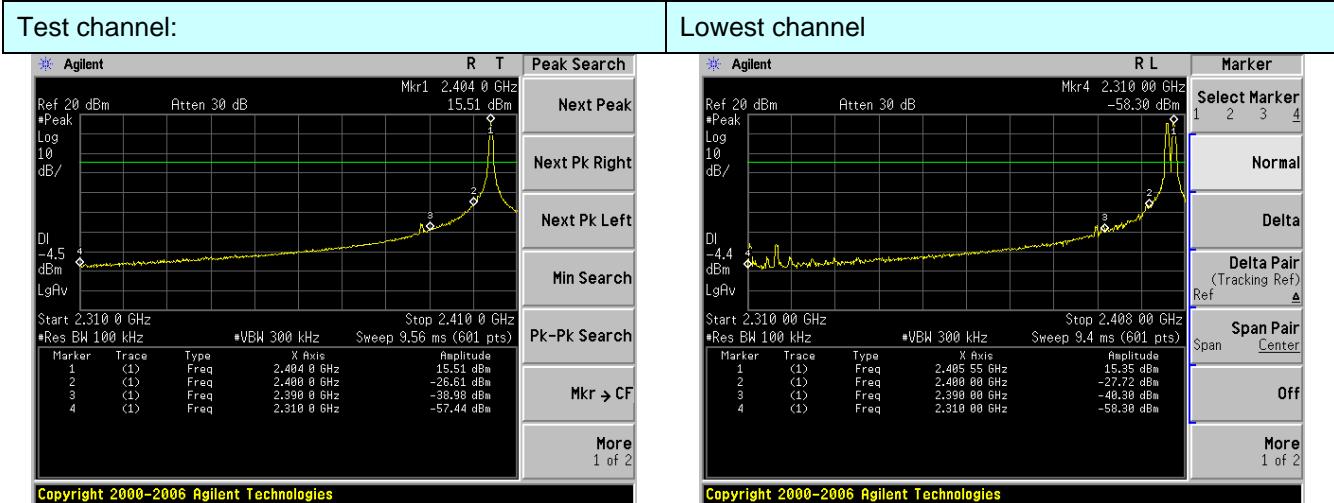

No-hopping mode


Hopping mode

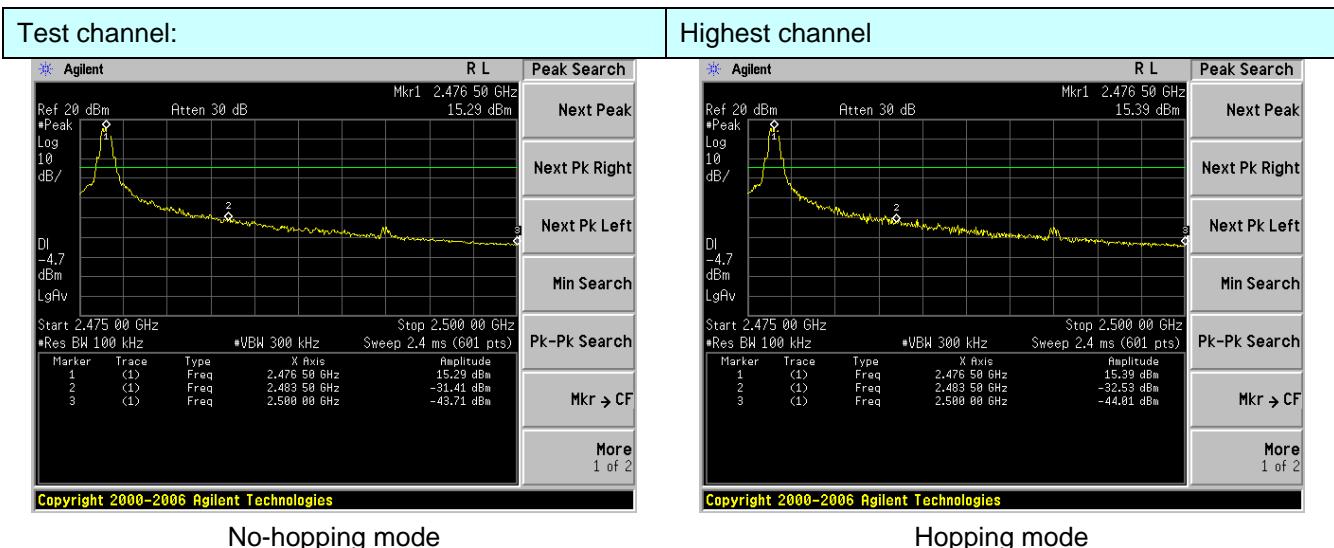

No-hopping mode

Hopping mode

6.8.2 Radiated Emission Method

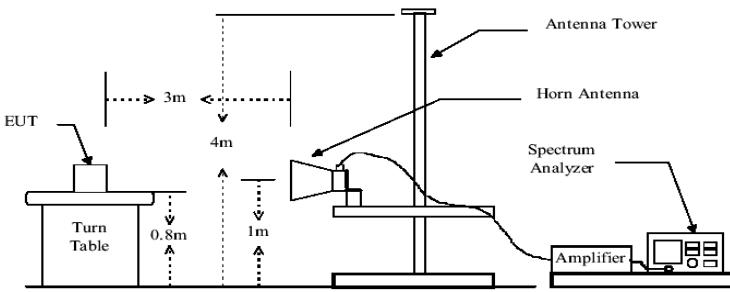Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Frequency Range:	All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
	Above 1GHz	Peak	1MHz	10Hz	Average Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	Above 1GHz	54.00		Average Value					
	Above 1GHz	74.00		Peak Value					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 								
Test Instruments:	Refer to section 5.8 for details								
Test mode:	Refer to section 5.3 for details								
Test results:	Pass								

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	42.08	27.59	5.38	30.18	44.87	74.00	-29.13	Horizontal
2400.00	59.52	27.58	5.39	30.18	62.31	74.00	-11.69	Horizontal
2390.00	41.50	27.59	5.38	30.18	44.29	74.00	-29.71	Vertical
2400.00	56.26	27.58	5.39	30.18	59.05	74.00	-14.95	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	32.31	27.59	5.38	30.18	35.10	54.00	-18.90	Horizontal
2400.00	33.67	27.58	5.39	30.18	36.46	54.00	-17.54	Horizontal
2390.00	32.17	27.59	5.38	30.18	34.96	54.00	-19.04	Vertical
2400.00	34.33	27.58	5.39	30.18	37.12	54.00	-16.88	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	45.55	27.53	5.47	29.93	48.62	74.00	-25.38	Horizontal
2500.00	42.37	27.55	5.49	29.93	45.48	74.00	-28.52	Horizontal
2483.50	43.71	27.53	5.47	29.93	46.78	74.00	-27.22	Vertical
2500.00	42.55	27.55	5.49	29.93	45.66	74.00	-28.34	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.76	27.53	5.47	29.93	36.83	54.00	-17.17	Horizontal
2500.00	32.54	27.55	5.49	29.93	35.65	54.00	-18.35	Horizontal
2483.50	32.53	27.53	5.47	29.93	35.60	54.00	-18.40	Vertical
2500.00	32.50	27.55	5.49	29.93	35.61	54.00	-18.39	Vertical


Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.

6.9 Spurious Emission


6.9.1 Conducted Emission Method

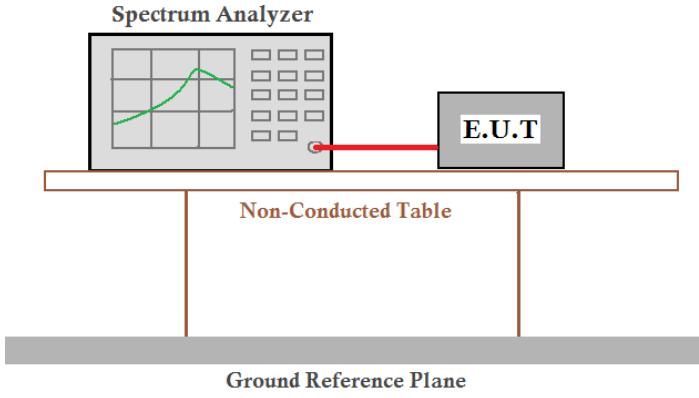Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

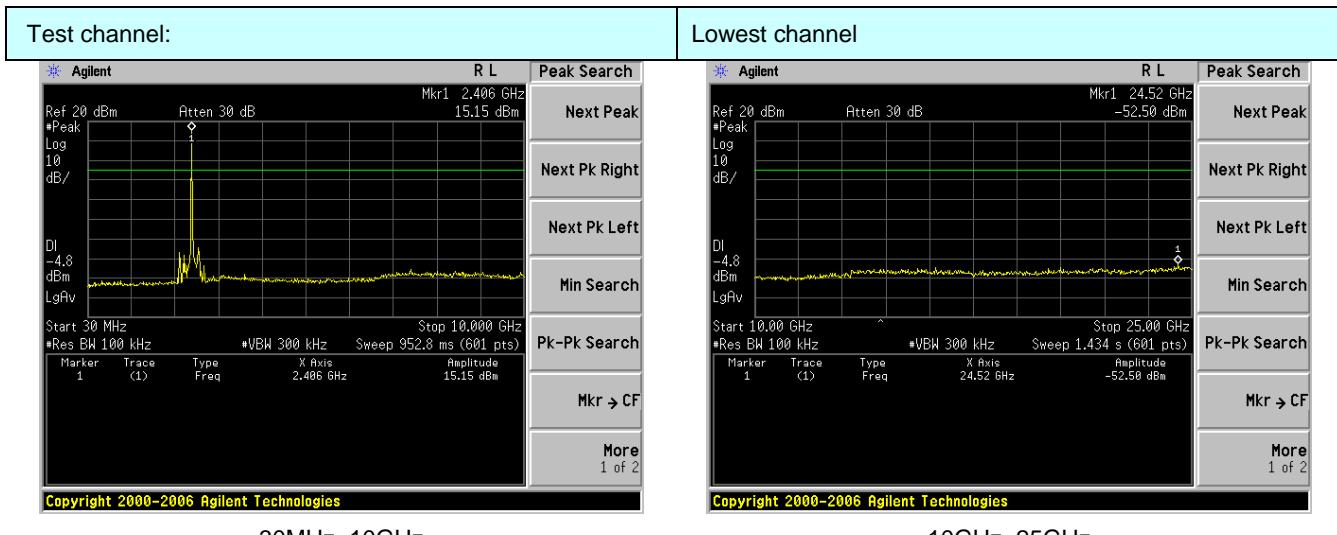


30MHz~10GHz

10GHz~25GHz

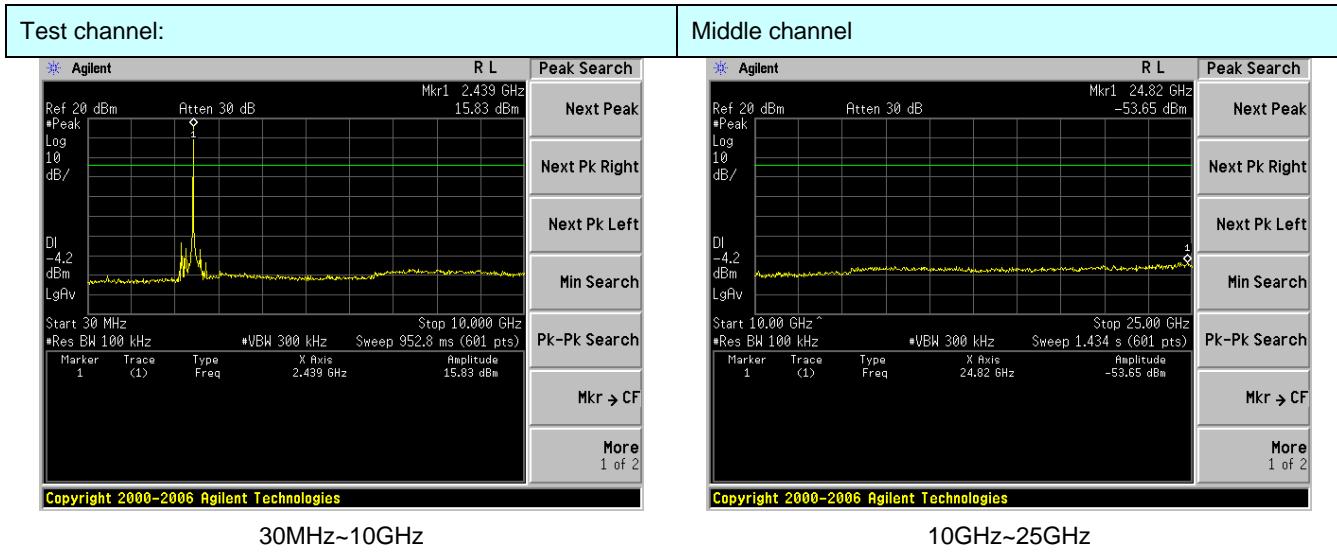


30MHz~10GHz

10GHz~25GHz

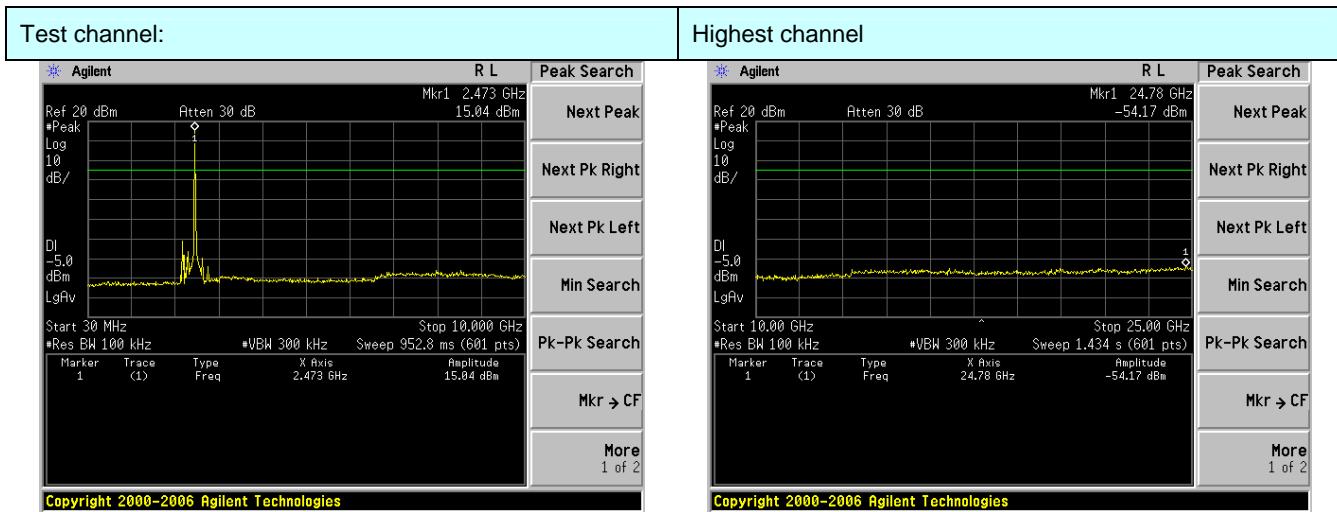

6.9.2 Radiated Emission Method

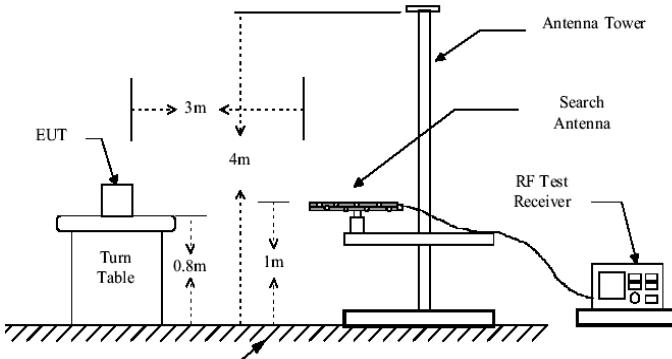Test Requirement:	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10: 2009						
Test Frequency Range:	9kHz to 25GHz						
Test site:	Measurement Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Value		
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak		
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
		Peak	1MHz	10Hz	Average		
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark			
	2400MHz-2483.5MHz		94.00	Average Value			
			114.00	Peak Value			
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance 3m			
	0.009MHz-1.705MHz	2400/F(KHz)	QP				
	0.490MHz-1.705MHz	24000/F(KHz)	QP				
	1.705MHz-30MHz	30	QP				
	30MHz-88MHz	100	QP				
	88MHz-216MHz	150	QP				
	216MHz-960MHz	200	QP				
	960MHz-1GHz	500	QP				
	Above 1GHz	500	Average				
		5000	Peak				
Test setup:	Below 1GHz						
							
	Above 1GHz						

Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement data:
■ Below 30MHz

Frequency (kHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit @3m (dBuV/m)	Over Limit (dB)	ANT. Polarization
164.00	67.56	21.58	0.20	0.00	89.34	103.31	-13.97	Vertical
733.00	*					70.30		Vertical
1250.00	*					65.67		Vertical
164.00	64.31	21.58	0.20	0.00	86.09	103.31	-17.22	Horizontal
733.00	*					70.30		Horizontal
1250.00	*					65.67		Horizontal

Remark:

1. Limit dBuV/m @3m = Limit dBuV/m @300m+ 80, Limit dBuV/m @3m = Limit dBuV/m @30m + 40
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

“*”, means this data is the too weak instrument of signal is unable to test.

■ 30MHz ~ 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
38.08	43.13	15.11	0.64	32.06	26.82	40.00	-13.18	Vertical
68.15	45.41	11.34	0.93	31.89	25.79	40.00	-14.21	Vertical
96.10	39.98	14.90	1.16	31.75	24.29	43.50	-19.21	Vertical
159.78	55.73	10.64	1.63	32.02	35.98	43.50	-7.52	Vertical
201.39	43.66	12.60	1.85	32.14	25.97	43.50	-17.53	Vertical
878.32	39.48	22.87	4.77	31.21	35.91	46.00	-10.09	Vertical
40.99	37.70	15.57	0.67	32.05	21.89	40.00	-18.11	Horizontal
104.54	37.91	14.73	1.23	31.78	22.09	43.50	-21.41	Horizontal
159.78	41.45	10.64	1.63	32.02	21.70	43.50	-21.80	Horizontal
284.98	38.96	14.75	2.29	32.17	23.83	46.00	-22.17	Horizontal
432.55	39.05	17.53	3.01	31.78	27.81	46.00	-18.19	Horizontal
968.93	38.55	23.55	5.11	31.22	35.99	54.00	-18.01	Horizontal

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4808.00	33.41	31.78	8.60	24.17	49.62	74.00	-24.38	Vertical
7212.00	34.68	36.15	11.65	26.39	56.09	74.00	-17.91	Vertical
9616.00	32.33	38.01	14.14	25.45	59.03	74.00	-14.97	Vertical
12020.00	*					74.00		Vertical
14424.00	*					74.00		Vertical
4808.00	37.16	31.78	8.60	24.17	53.37	74.00	-20.63	Horizontal
7212.00	36.67	36.15	11.65	26.39	58.08	74.00	-15.92	Horizontal
9616.00	35.45	38.01	14.14	25.45	62.15	74.00	-11.85	Horizontal
12020.00	*					74.00		Horizontal
14424.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4808.00	21.41	31.78	8.60	24.17	37.62	54.00	-16.38	Vertical
7212.00	21.87	36.15	11.65	26.39	43.28	54.00	-10.72	Vertical
9616.00	17.96	38.01	14.14	25.45	44.66	54.00	-9.34	Vertical
12020.00	*					54.00		Vertical
14424.00	*					54.00		Vertical
4808.00	25.70	31.78	8.60	24.17	41.91	54.00	-12.09	Horizontal
7212.00	25.03	36.15	11.65	26.39	46.44	54.00	-7.56	Horizontal
9616.00	20.52	38.01	14.14	25.45	47.22	54.00	-6.78	Horizontal
12020.00	*					54.00		Horizontal
14424.00	*					54.00		Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- “**”, means this data is the too weak instrument of signal is unable to test.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	34.05	31.85	8.66	24.10	50.46	74.00	-23.54	Vertical
7320.00	33.78	36.37	11.72	26.71	55.16	74.00	-18.84	Vertical
9760.00	31.35	38.35	14.25	25.36	58.59	74.00	-15.41	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	37.61	31.85	8.66	24.10	54.02	74.00	-19.98	Horizontal
7320.00	37.85	36.37	11.72	26.71	59.23	74.00	-14.77	Horizontal
9760.00	34.87	38.35	14.25	25.36	62.11	74.00	-11.89	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	22.05	31.85	8.66	24.10	38.46	54.00	-15.54	Vertical
7320.00	21.94	36.37	11.72	26.71	43.32	54.00	-10.68	Vertical
9760.00	17.75	38.35	14.25	25.36	44.99	54.00	-9.01	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	26.15	31.85	8.66	24.10	42.56	54.00	-11.44	Horizontal
7320.00	25.10	36.37	11.72	26.71	46.48	54.00	-7.52	Horizontal
9760.00	19.60	38.35	14.25	25.36	46.84	54.00	-7.16	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “**”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4953.00	33.65	31.93	8.73	24.03	50.28	74.00	-23.72	Vertical
7429.50	33.99	36.59	11.79	27.03	55.34	74.00	-18.66	Vertical
9906.00	29.89	38.81	14.38	25.26	57.82	74.00	-16.18	Vertical
12382.50	*					74.00		Vertical
14859.00	*					74.00		Vertical
4953.00	36.42	31.93	8.73	24.03	53.05	74.00	-20.95	Horizontal
7429.50	36.87	36.59	11.79	27.03	58.22	74.00	-15.78	Horizontal
9906.00	32.40	38.81	14.38	25.26	60.33	74.00	-13.67	Horizontal
12382.50	*					74.00		Horizontal
14859.00	*					74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4953.00	21.65	31.93	8.73	24.03	38.28	54.00	-15.72	Vertical
7429.50	22.55	36.59	11.79	27.03	43.90	54.00	-10.10	Vertical
9906.00	17.07	38.81	14.38	25.26	45.00	54.00	-9.00	Vertical
12382.50	*					54.00		Vertical
14859.00	*					54.00		Vertical
4953.00	24.96	31.93	8.73	24.03	41.59	54.00	-12.41	Horizontal
7429.50	25.65	36.59	11.79	27.03	47.00	54.00	-7.00	Horizontal
9906.00	17.45	38.81	14.38	25.26	45.38	54.00	-8.62	Horizontal
12382.50	*					54.00		Horizontal
14859.00	*					54.00		Horizontal


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

7 Test Setup Photo


Radiated Emission

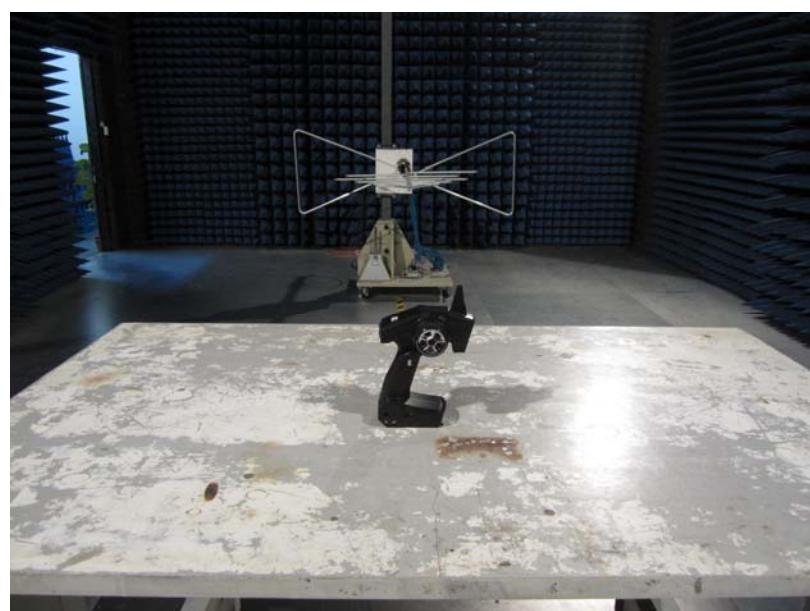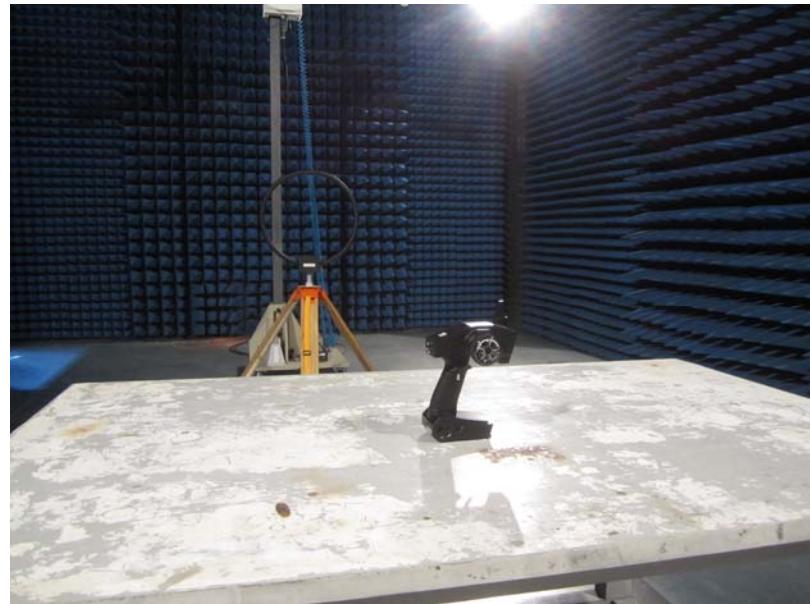


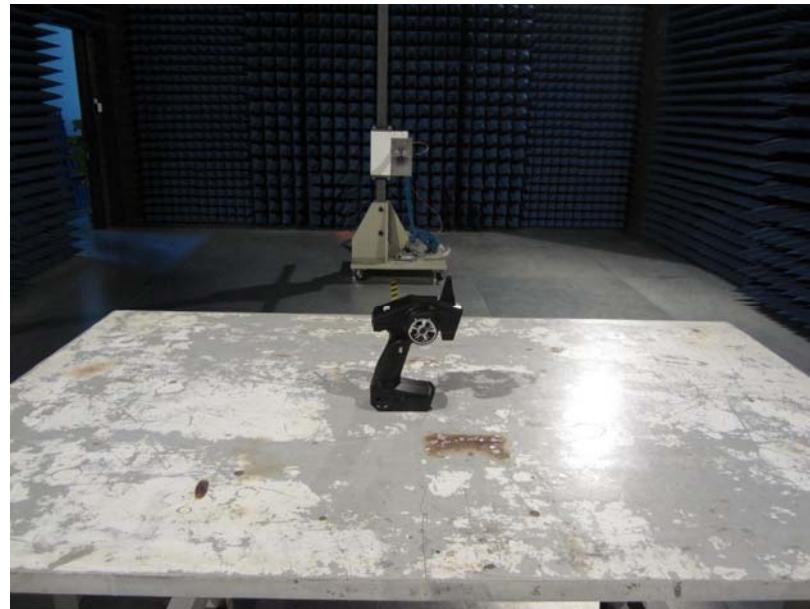




8 EUT Constructional Details





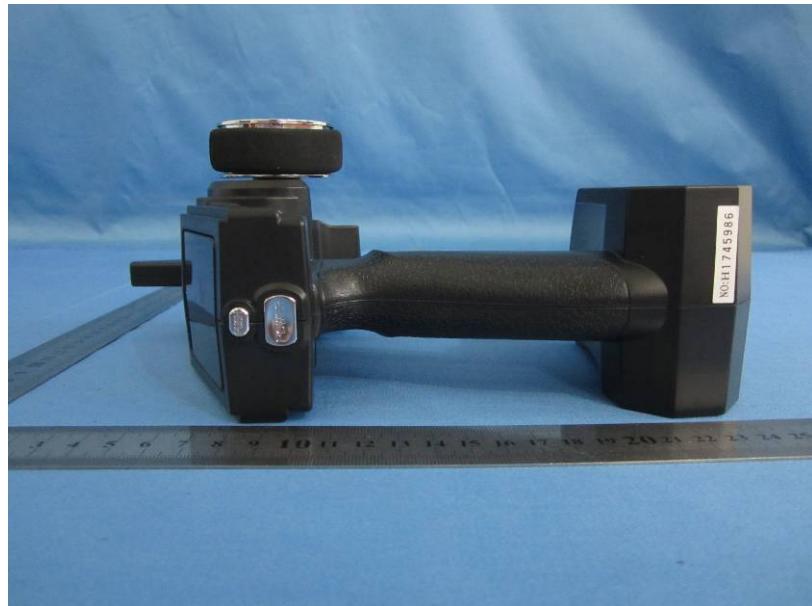



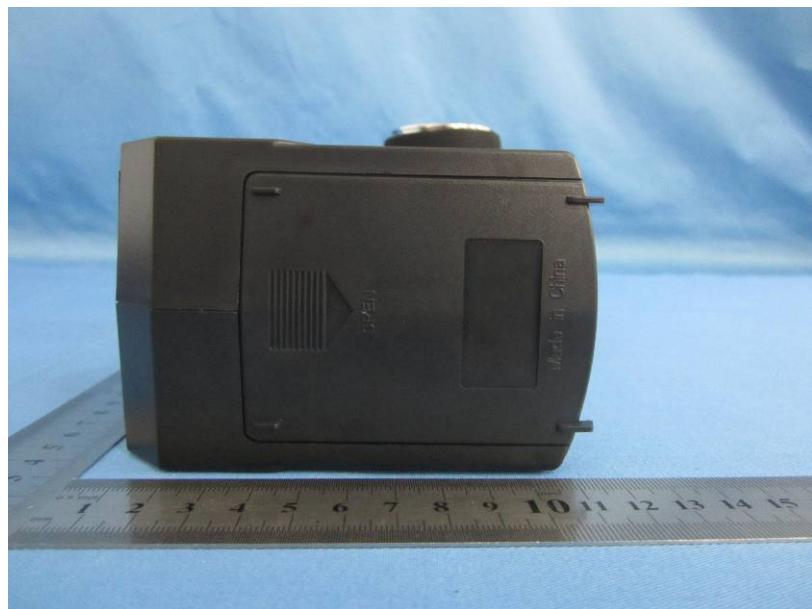


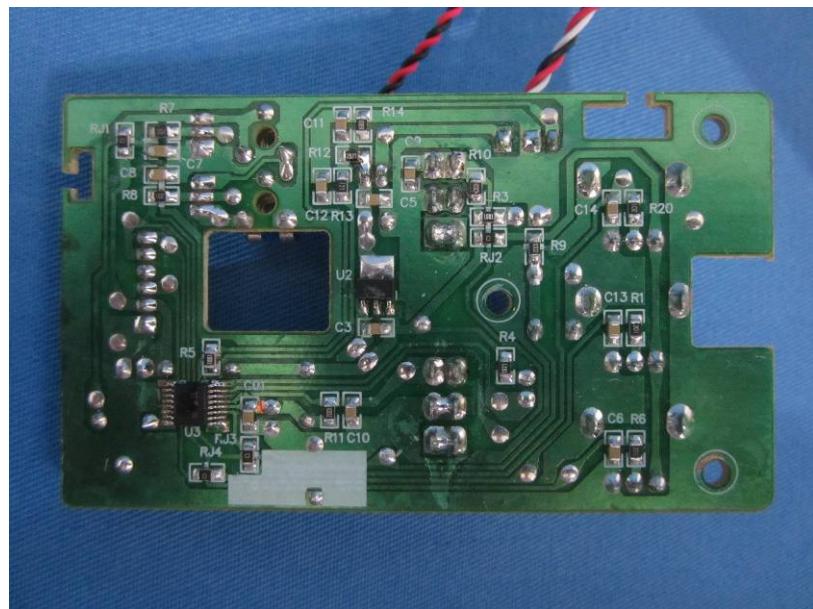

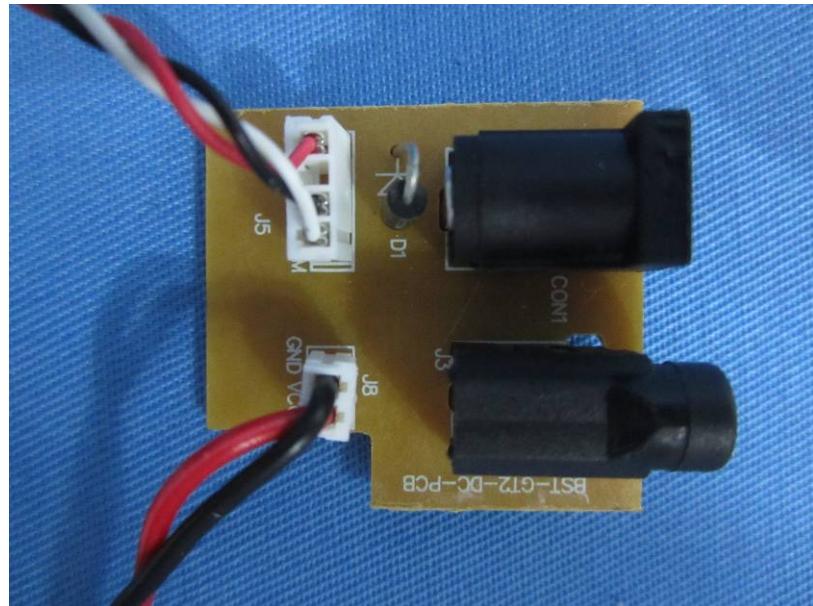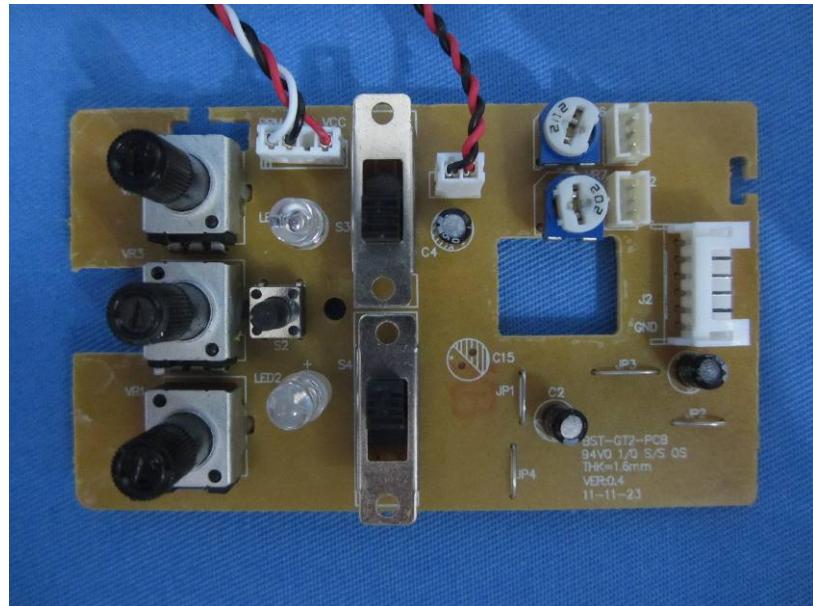

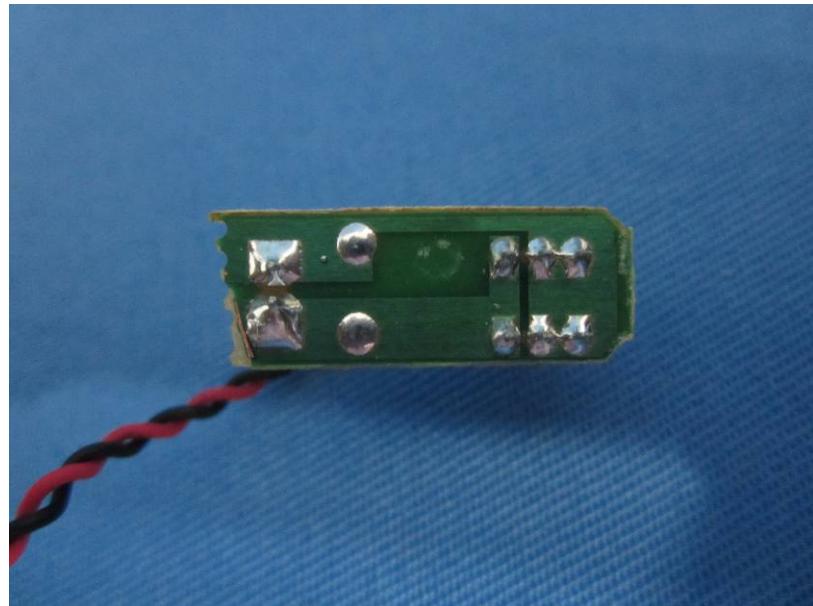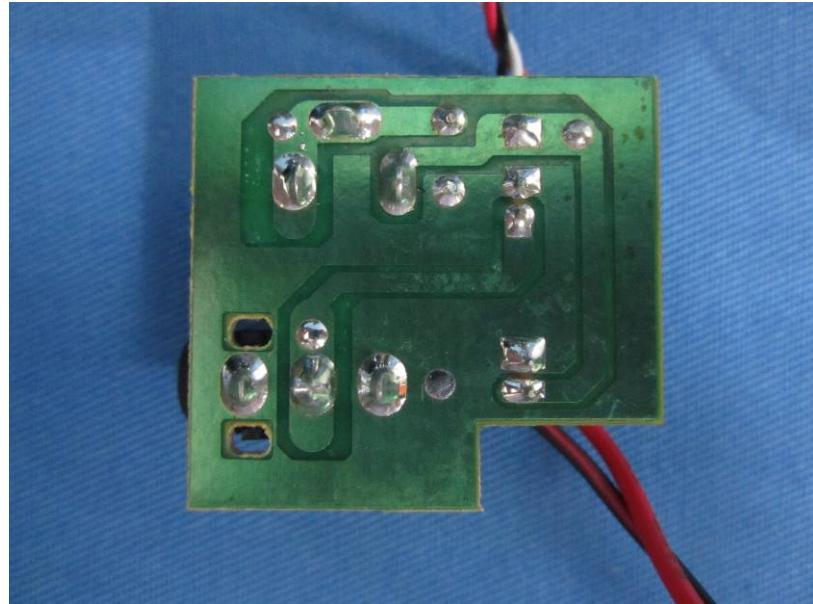

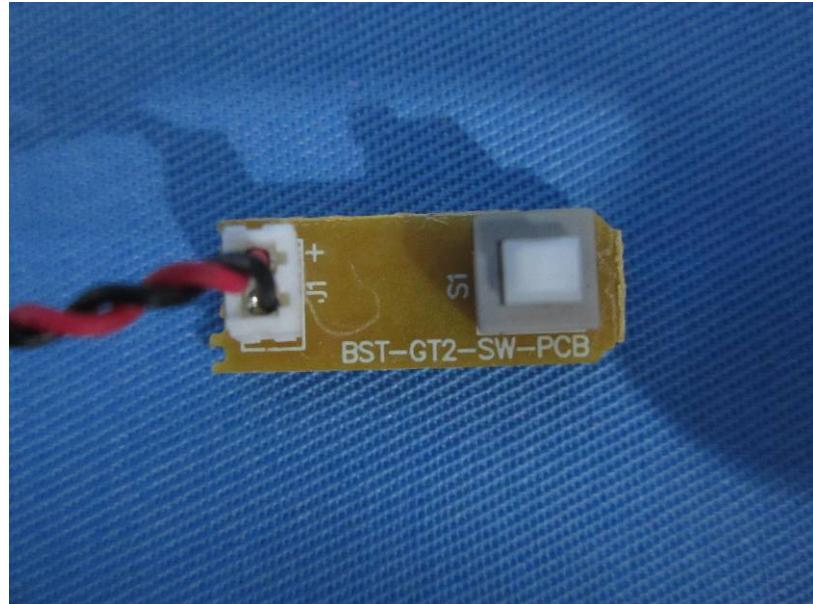

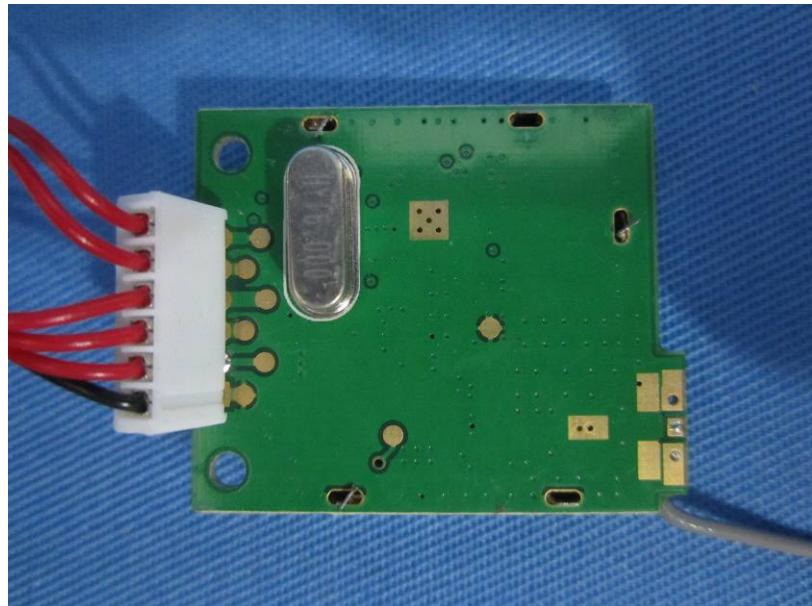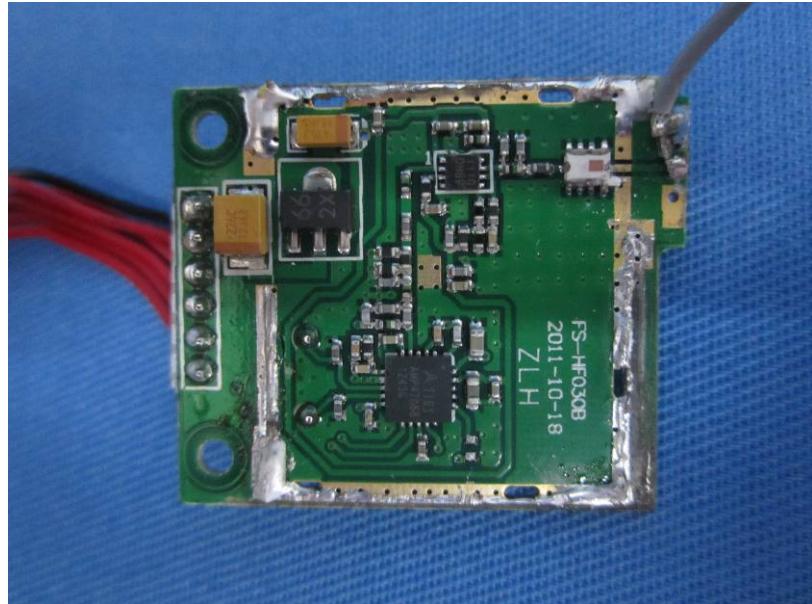

-----end---