

# FCC Report

**Applicant:** FLYSKY RC MODEL TECHNOLOGY CO., LTD

**Address of Applicant:** West building3, Huangjianyuan Ind, Park QIAOLI North Gate Changping Town, Dongguan, China

**Manufacturer:** ShenZhen FLYSKY Technology Co.,Ltd

**Address of Manufacturer:** 16F, Huafeng Building, No. 6006 Shennan Road, Futian District, Shenzhen, Guangdong, China

**Factory:** FLYSKY RC MODEL TECHNOLOGY CO., LTD

**Address of Factory:** West building3, Huangjianyuan Ind, Park QIAOLI North Gate Changping Town, Dongguan, China

## Equipment Under Test (EUT)

**Product Name:** Noble(NB4)

**Model No.:** FG4, NB4

**Trade Mark:** FLYSKY

**FCC ID:** N4ZFG400

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** March 04, 2019

**Date of Test:** March 05-13, 2019

**Date of report issued:** March 14, 2019

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



The stamp contains the text: "GTS", "Global United", "TECHNOLOGY SERVICES", "CO., LTD.", and "2019".

Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Report No.	Version No.	Date	Description
GTS201804000259F01	00	September 11, 2018	Original
GTS201903000020F01	01	March 14, 2019	Change PCB

Prepared By:




Date:

March 14, 2019

Project Engineer

Check By:



Date:

March 14, 2019

Reviewer

### 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION .....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 TEST FACILITY .....	7
5.4 TEST LOCATION .....	7
5.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
5.6 DESCRIPTION OF SUPPORT UNITS .....	7
5.7 ADDITIONAL INSTRUCTIONS .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA .....	10
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 RADIATED EMISSION METHOD .....	14
8 TEST SETUP PHOTO .....	19
9 EUT CONSTRUCTIONAL DETAILS .....	21

## 4 Test Summary

Test Item	Section	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	N/A
20dB Occupied Bandwidth	15.247 (a)(1)	N/A
Carrier Frequencies Separation	15.247 (a)(1)	N/A
Hopping Channel Number	15.247 (a)(1)	N/A
Dwell Time	15.247 (a)(1)	N/A
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	N/A
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	N/A

Pass: The EUT complies with the essential requirements in the standard.

Remark : Test according to ANSI C63.10:2013.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	Noble(NB4)
Model No.:	FG4, NB4
Test Model No:	FG4
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are color and model name for commercial purpose.</i>	
Serial No.:	N/A
Hardware Version:	FG4-V1.4
Software Version:	Flysky Noble V1.0.3.6
Test sample(s) ID:	GTS201903000020-1
Sample(s) Status	Engineer sample
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	63
Modulation technology:	CSS, GMSK
Antenna Type:	Integral Antenna
Antenna gain:	2dBi
Power supply:	DC 3.7-4.2V 2600mAh Rechargeable Battery Or DC 5V 1A 4300mAh by external Battery

Remark: The system works in the frequency range of 2402MHz to 2480MHz. This band has been divided to 63 independent channels. Each radio system uses 32 different channels; the minimum channel separation is  $\geq 1.25\text{MHz}$ . By using various switch-on times, hopping scheme and channel frequencies, the system can guarantee a jamming free radio transmission. The channel list is below.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402.4063	17	2421.9087	33	2441.4111	49	2462.0709
2	2403.6252	18	2423.1276	34	2442.63	50	2463.2898
3	2404.8441	19	2424.3465	35	2445.0063	51	2464.5087
4	2406.063	20	2425.5654	36	2446.2252	52	2465.7276
5	2407.2819	21	2426.7843	37	2447.4441	53	2466.9465
6	2408.5008	22	2428.0032	38	2448.663	54	2468.1654
7	2409.7197	23	2429.2221	39	2449.8819	55	2469.3843
8	2410.9386	24	2430.441	40	2451.1008	56	2470.6032
9	2412.1575	25	2431.6599	41	2452.3197	57	2471.8221
10	2413.3764	26	2432.8788	42	2453.5386	58	2473.041
11	2414.5953	27	2434.0977	43	2454.7575	59	2474.2599
12	2415.8142	28	2435.3166	44	2455.9764	60	2475.4788
13	2417.0331	29	2436.5355	45	2457.1953	61	2476.6977
14	2418.252	30	2437.7544	46	2458.4142	62	2477.9166
15	2419.4709	31	2438.9733	47	2459.6331	63	2479.1355
16	2420.6898	32	2440.1922	48	2460.852	64	

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402.0/2404.8MHz
The middle channel	2440.0/2442.6MHz
The Highest channel	2480.0/2479.1MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
-------------------	------------------------------------

## 5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

## 5.4 Test Location

All other tests were performed at:  Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960
--

## 5.5 Other Information Requested by the Customer

None.
-------

## 5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC Approval
DELTA	ADAPTER	ADP-60ADT	N/A	DELTA

## 5.7 Additional Instructions

EUT Software Settings:

Mode	Special test firmware was pre-built-in by manufacturer		
GFSK	Channel	Frequency (MHz)	Level Set
	Lowest	2402/2404.8	TX level : default
	Middle	2440/242.6	
	Highest	2480/2479.1	

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 27 2018	June. 26 2019
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 27 2018	June. 26 2019
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 27 2018	June. 26 2019
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 27 2018	June. 26 2019
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 27 2018	June. 26 2019
9	Coaxial Cable	GTS	N/A	GTS211	June. 27 2018	June. 26 2019
10	Coaxial cable	GTS	N/A	GTS210	June. 27 2018	June. 26 2019
11	Coaxial Cable	GTS	N/A	GTS212	June. 27 2018	June. 26 2019
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 27 2018	June. 26 2019
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 27 2018	June. 26 2019
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 27 2018	June. 26 2019
15	Band filter	Amindeon	82346	GTS219	June. 27 2018	June. 26 2019
16	Power Meter	Anritsu	ML2495A	GTS540	June. 27 2018	June. 26 2019
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 27 2018	June. 26 2019
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 27 2018	June. 26 2019
19	Splitter	Agilent	11636B	GTS237	June. 27 2018	June. 26 2019
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 27 2018	June. 26 2019
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 20 2018	Oct. 19 2019
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 20 2018	Oct. 19 2019
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 20 2018	Oct. 19 2019
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 27 2018	June. 26 2019


Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 27 2018	June. 26 2019
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 27 2018	June. 26 2019
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 27 2018	June. 26 2019
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 27 2018	June. 26 2019

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 27 2018	June. 26 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 27 2018	June. 26 2019
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 27 2018	June. 26 2019
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 27 2018	June. 26 2019
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 27 2018	June. 26 2019
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 27 2018	June. 26 2019
8	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 27 2018	June. 26 2019


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 27 2018	June. 26 2019
2	Barometer	ChangChun	DYM3	GTS255	June. 27 2018	June. 26 2019

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

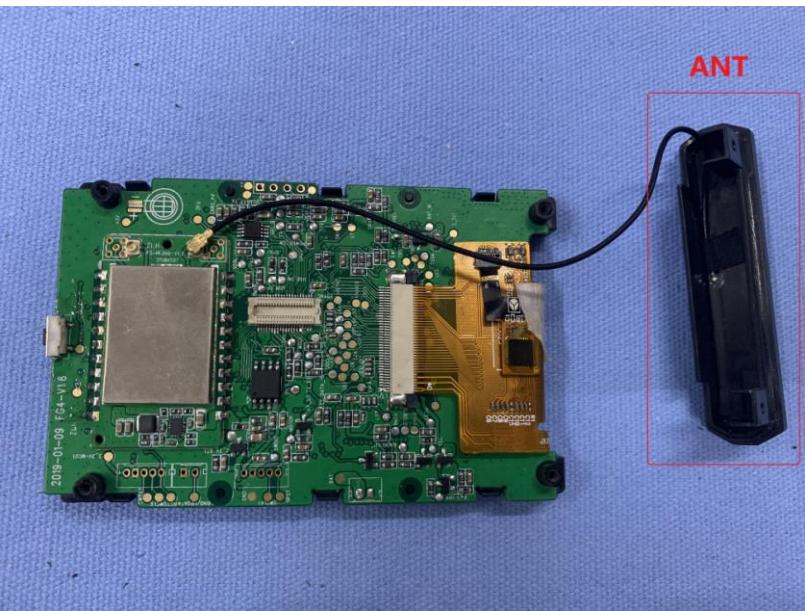
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<b>15.203 requirement:</b>	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>15.247(c) (1)(i) requirement:</b>	
(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
<b>EUT Antenna:</b>	
<i>The antenna is integral Antenna, the best case gain of the antenna is 2dBi</i>	
	

## 7.2 Conducted Emissions

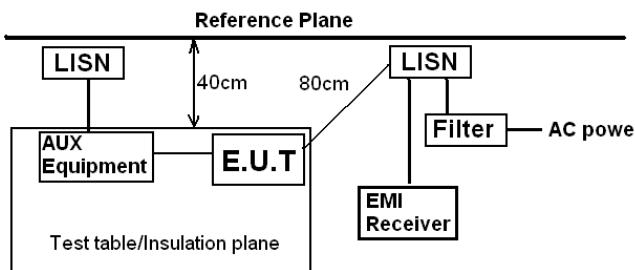Test Requirement:	FCC Part15 C Section 15.207																		
Test Method:	ANSI C63.10:2013																		
Test Frequency Range:	150KHz to 30MHz																		
Class / Severity:	Class B																		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																		
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>					Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																		
	Quasi-peak	Average																	
0.15-0.5	66 to 56*	56 to 46*																	
0.5-5	56	46																	
5-30	60	50																	
	<small>* Decreases with the logarithm of the frequency.</small>																		
Test setup:	 <p><i>Remark</i>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>																		
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>																		
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.: 1 012mbar														
Test Instruments:	Refer to section 6.0 for details																		
Test mode:	Refer to section 5.2 for details																		
Test results:	Pass																		


**Measurement data:**

Test mode:	Transmitting mode	Phase Polarity:	Line
------------	-------------------	-----------------	------

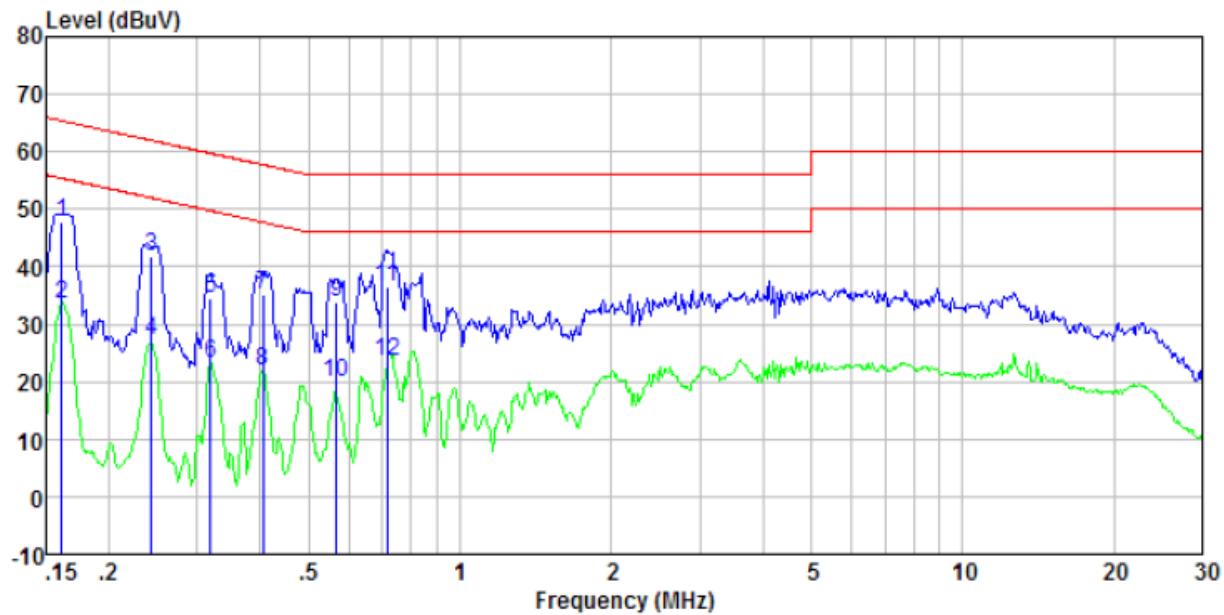

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.16	47.22	0.40	0.08	47.70	65.38	-17.68	QP
0.16	33.15	0.40	0.08	33.63	55.38	-21.75	Average
0.24	41.37	0.40	0.11	41.88	62.00	-20.12	QP
0.24	26.65	0.40	0.11	27.16	52.00	-24.84	Average
0.32	34.10	0.39	0.10	34.59	59.75	-25.16	QP
0.32	22.86	0.39	0.10	23.35	49.75	-26.40	Average
0.41	34.58	0.35	0.11	35.04	57.73	-22.69	QP
0.41	21.35	0.35	0.11	21.81	47.73	-25.92	Average
0.57	33.30	0.29	0.12	33.71	56.00	-22.29	QP
0.57	19.61	0.29	0.12	20.02	46.00	-25.98	Average
0.72	36.04	0.26	0.13	36.43	56.00	-19.57	QP
0.72	23.19	0.26	0.13	23.58	46.00	-22.42	Average

Test mode:	Transmitting mode	Phase Polarity:	Neutral
------------	-------------------	-----------------	---------

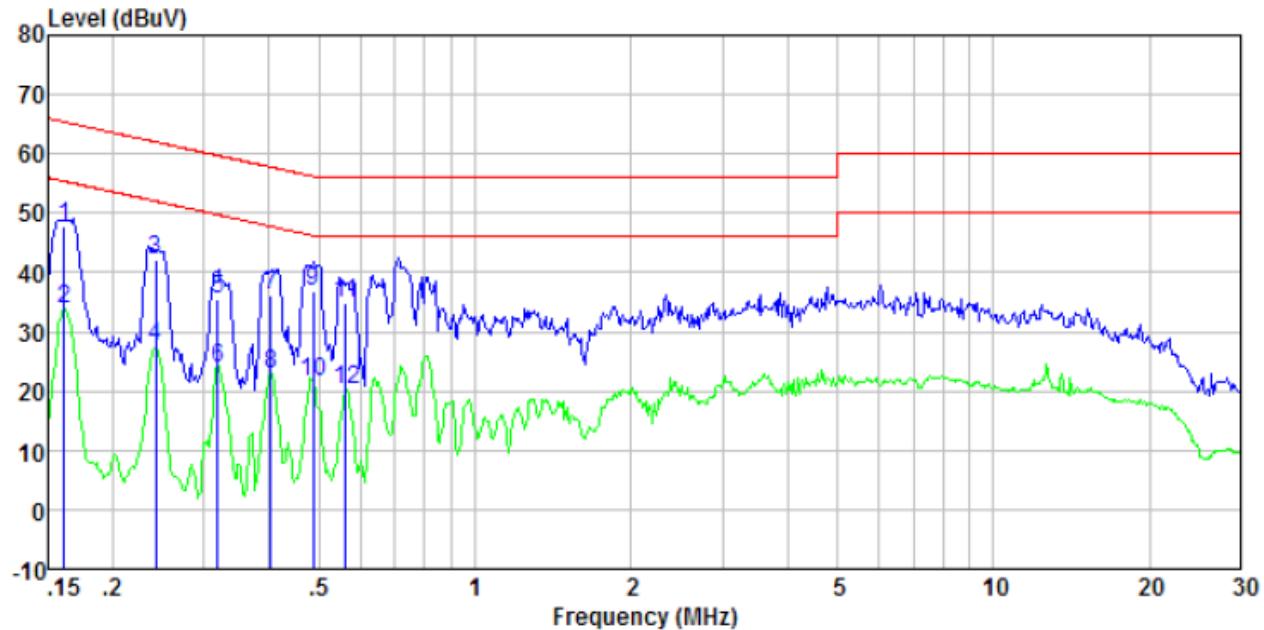




Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.16	47.20	0.40	0.08	47.68	65.38	-17.70	QP
0.16	33.44	0.40	0.08	33.92	55.38	-21.46	Average
0.24	41.58	0.40	0.11	42.09	62.04	-19.95	QP
0.24	27.10	0.40	0.11	27.61	52.04	-24.43	Average
0.32	35.06	0.39	0.10	35.55	59.75	-24.20	QP
0.32	23.45	0.39	0.10	23.94	49.75	-25.81	Average
0.40	35.85	0.35	0.11	36.31	57.77	-21.46	QP
0.40	22.52	0.35	0.11	22.98	47.77	-24.79	Average
0.49	36.45	0.32	0.11	36.88	56.23	-19.35	QP
0.49	21.25	0.32	0.11	21.68	46.23	-24.55	Average
0.56	34.53	0.30	0.12	34.95	56.00	-21.05	QP
0.56	19.64	0.30	0.12	20.06	46.00	-25.94	Average

#### Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

### 7.3 Radiated Emission Method

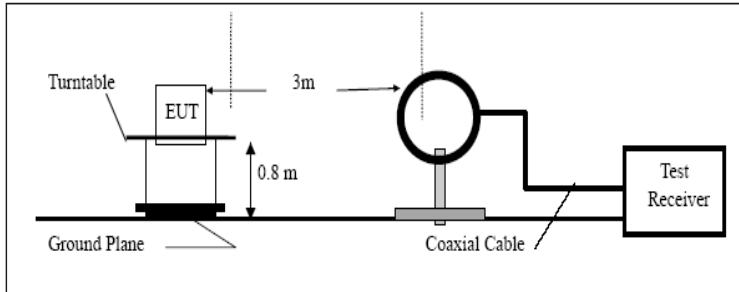Test Requirement:	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	9kHz to 25GHz						
Test site:	Measurement Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Value		
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak		
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
		Peak	1MHz	10Hz	Average		
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance 3m			
	0.009MHz-0.490MHz	2400/F(KHz)	QP				
	0.490MHz-1.705MHz	24000/F(KHz)	QP				
	1.705MHz-30MHz	30	QP				
	30MHz-88MHz	100	QP				
	88MHz-216MHz	150	QP				
	216MHz-960MHz	200	QP				
	960MHz-1GHz	500	QP				
	Above 1GHz	500	Average				
		5000	Peak				
Test setup:	Below 30MHz						
							
	Below 1GHz						

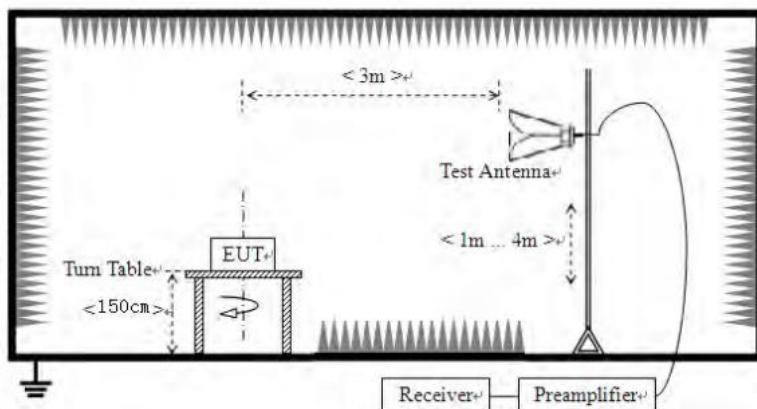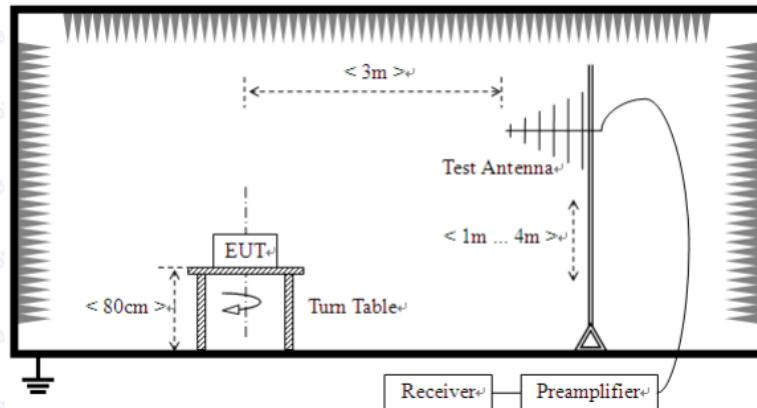

Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or</li> </ol>
-----------------	--

	average method as specified and then reported in a data sheet.				
Test Instruments:	Refer to section 5.8 for details				
Test mode:	Refer to section 5.2 for details				
Temp. / Hum.	Temp.:	25 °C	Humid.:	52%	Press.: 1 012mbar
Test results:	Pass				

*Remark:*

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


**Measurement data:**

- Below 30MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


■ 30MHz ~ 1GHz

Horizontal:

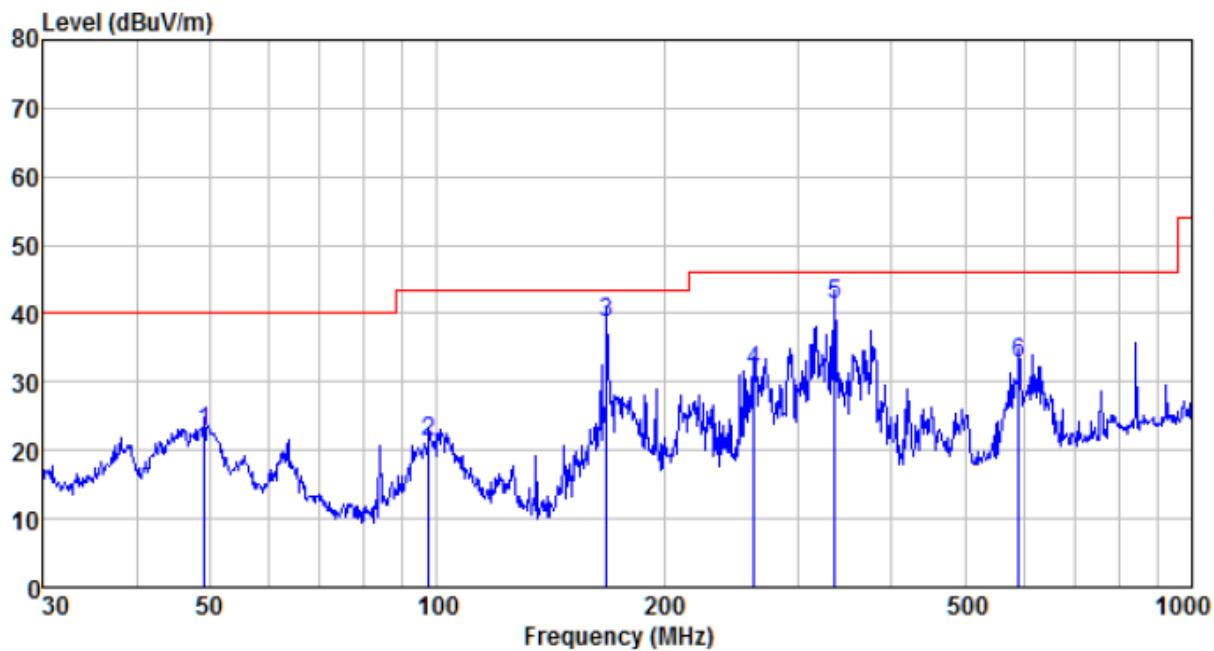

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Level dBuV	Limit level dBuV/m	Over limit dB	Remark
49.187	45.79	12.29	0.76	36.14	22.70	40.00	-17.30	QP
97.456	45.04	11.86	1.17	36.70	21.37	43.50	-22.13	QP
167.824	65.65	8.46	1.67	37.18	38.60	43.50	-4.90	QP
262.896	54.30	12.55	2.19	37.39	31.65	46.00	-14.35	QP
336.035	61.93	14.29	2.55	37.46	41.31	46.00	-4.69	QP
588.905	47.38	19.23	3.68	37.54	32.75	46.00	-13.25	QP

Vertical:

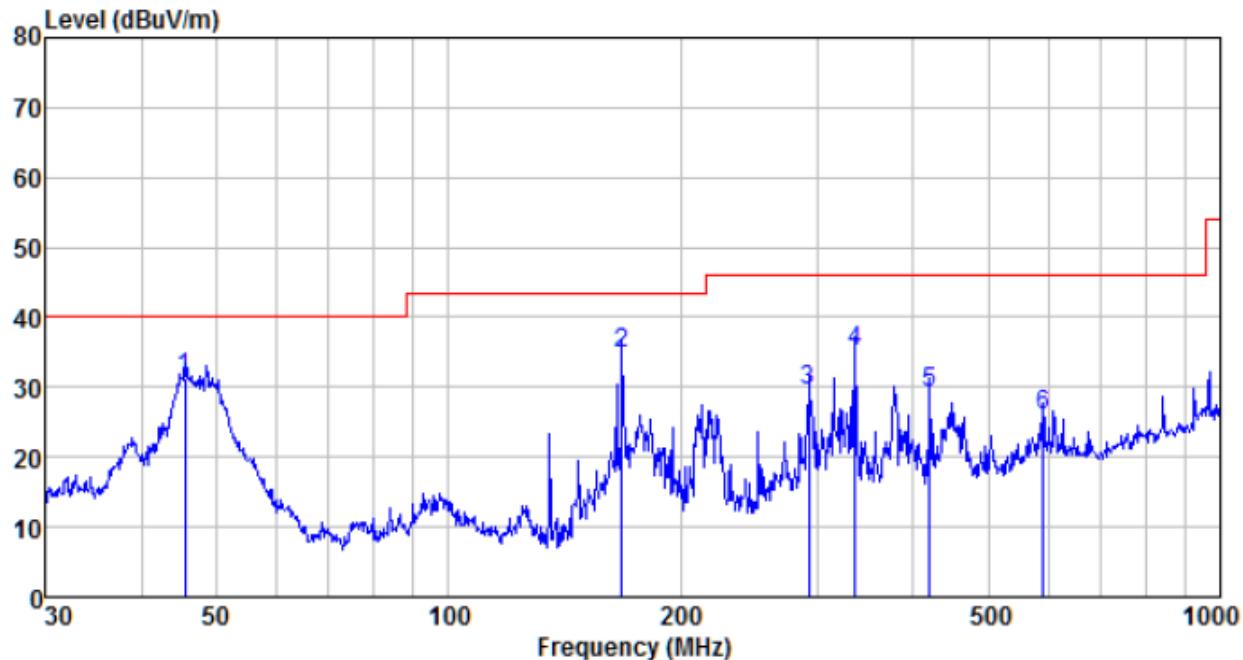


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
45.535	54.24	12.26	0.72	35.96	31.26	40.00	-8.74	QP
167.824	61.99	8.46	1.67	37.18	34.94	43.50	-8.56	QP
293.084	51.31	13.42	2.32	37.41	29.64	46.00	-16.36	QP
336.035	55.76	14.29	2.55	37.46	35.14	46.00	-10.86	QP
420.580	48.11	15.75	2.95	37.52	29.29	46.00	-16.71	QP
588.905	40.47	19.23	3.68	37.54	25.84	46.00	-20.16	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 8 Test Setup Photo

Radiated Emission

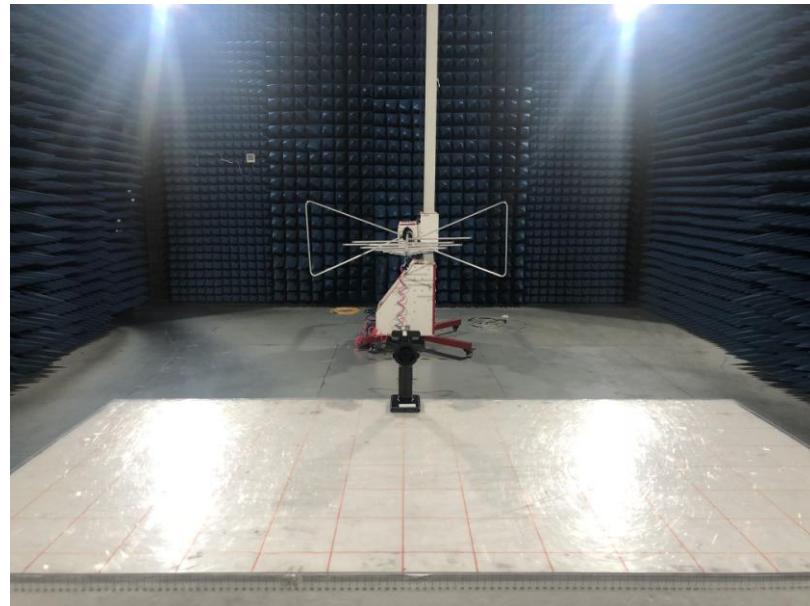




Conducted Emission





## 9 EUT Constructional Details





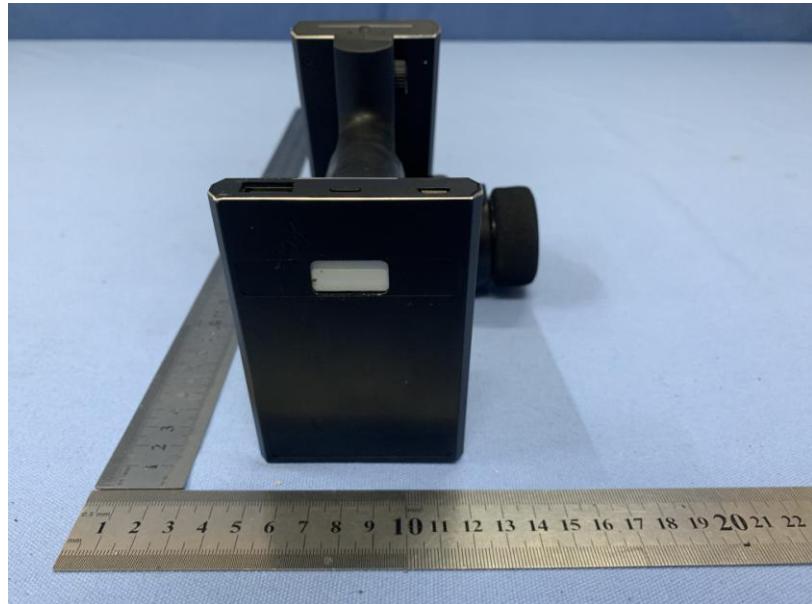


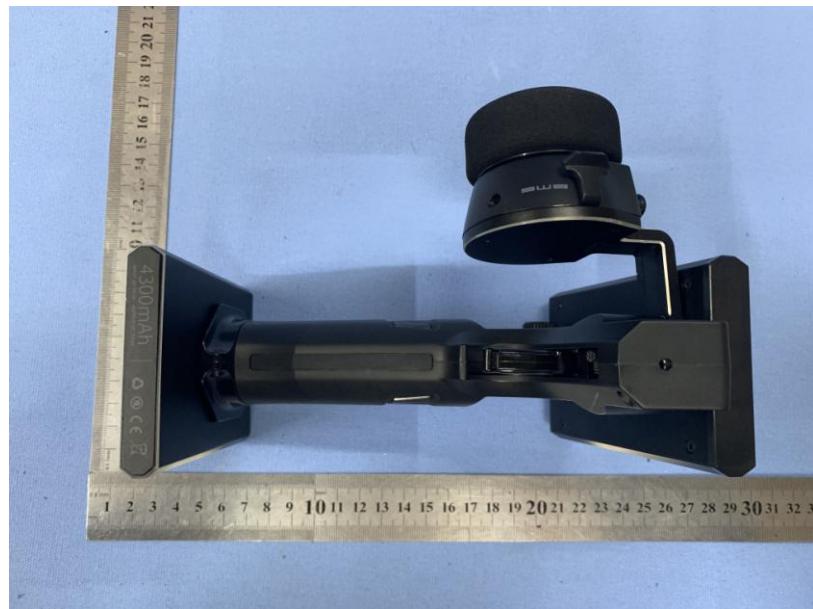
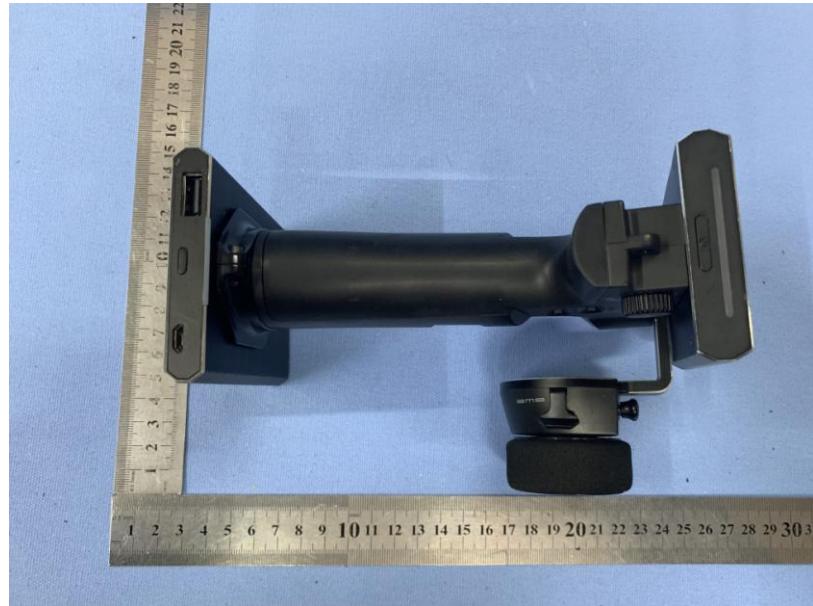





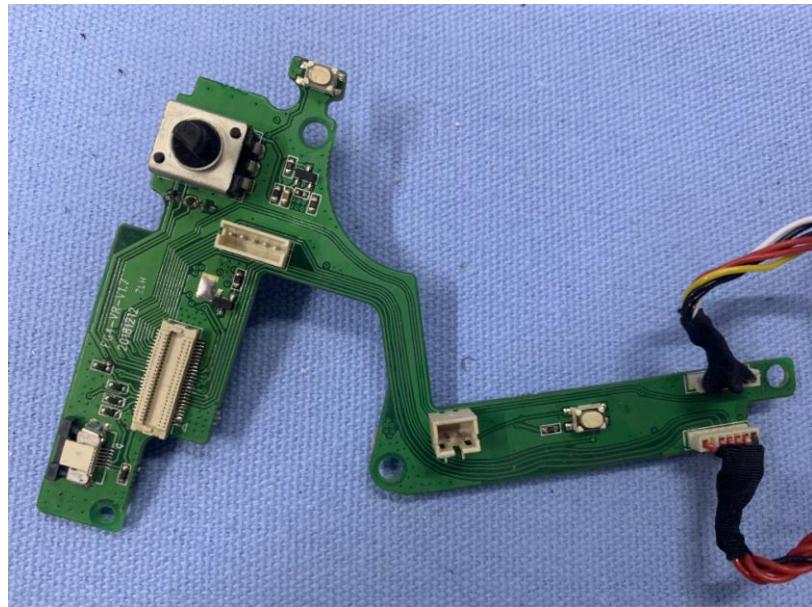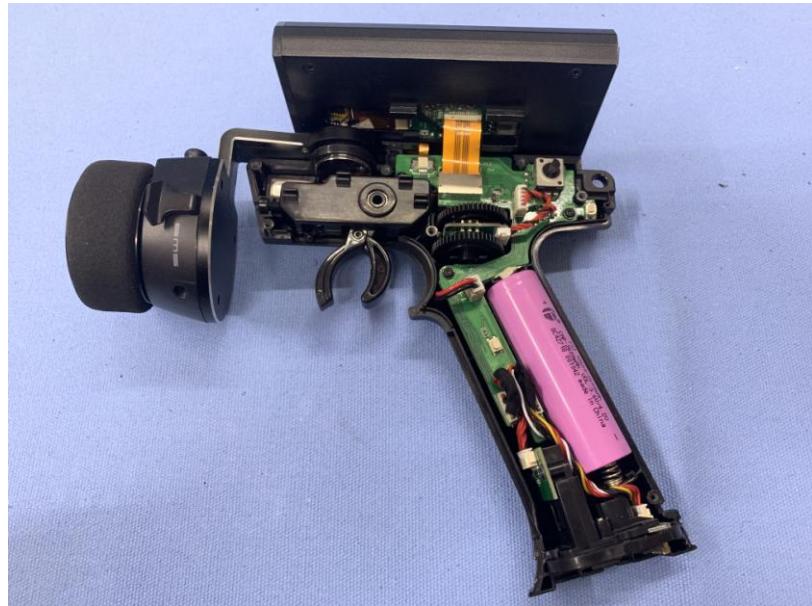


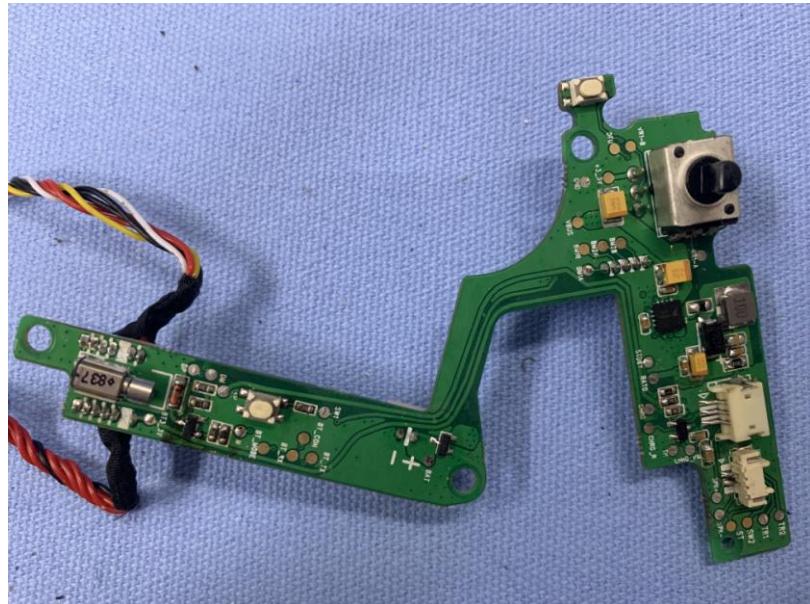

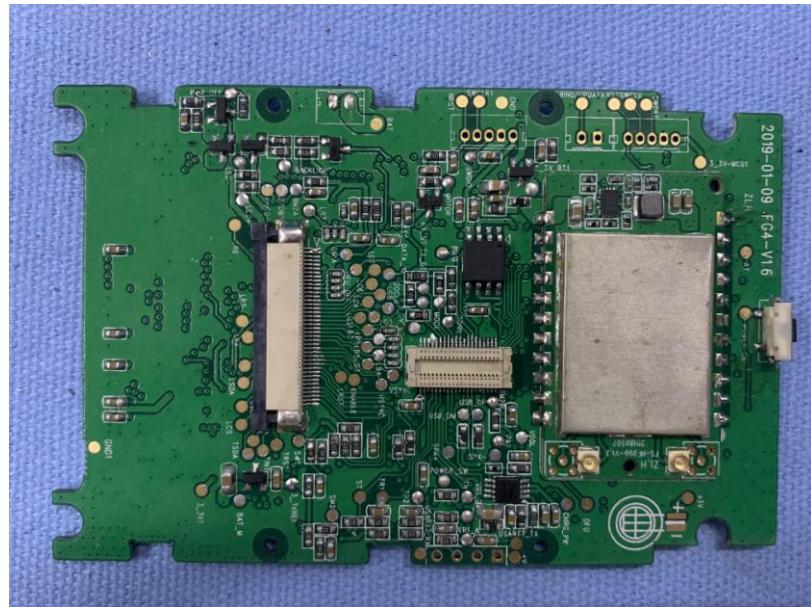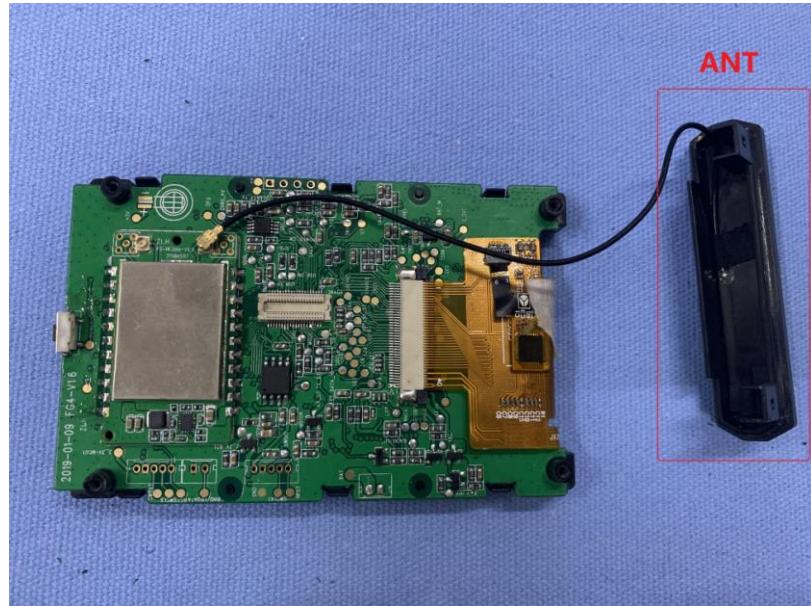

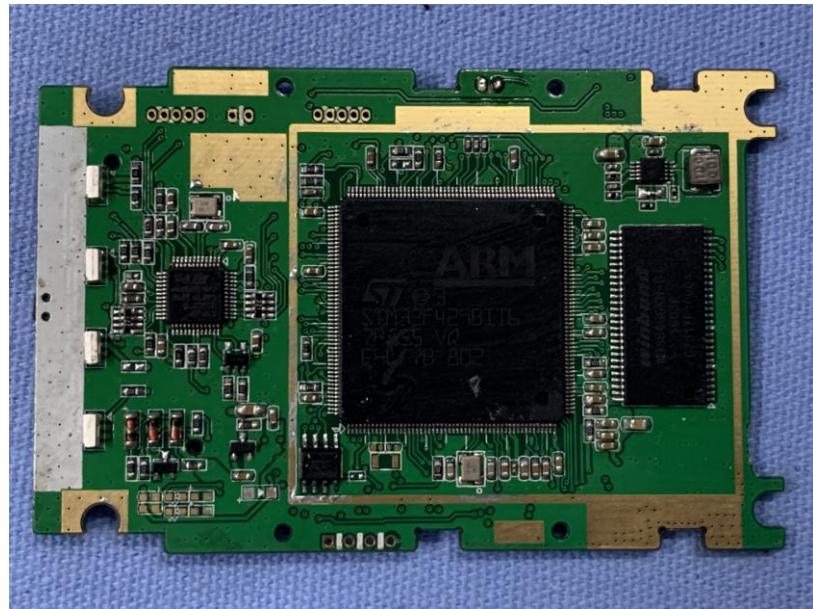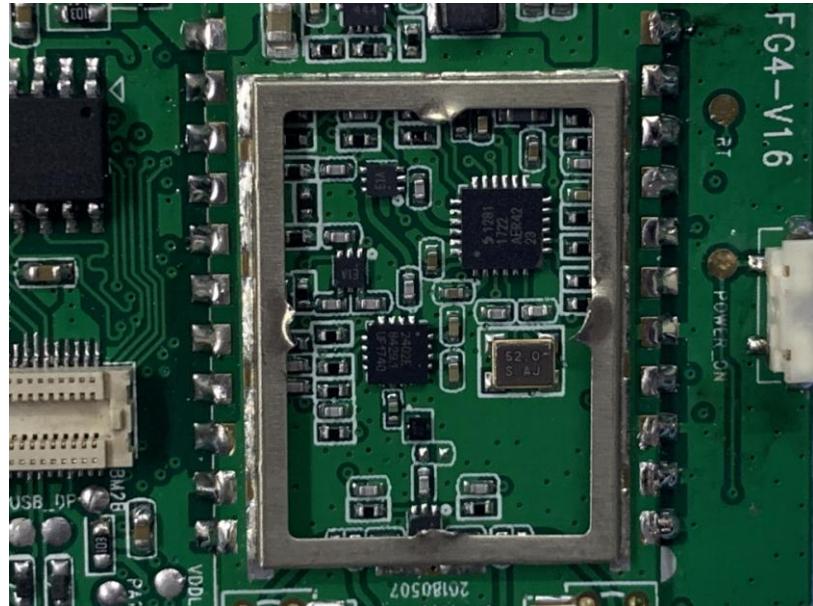

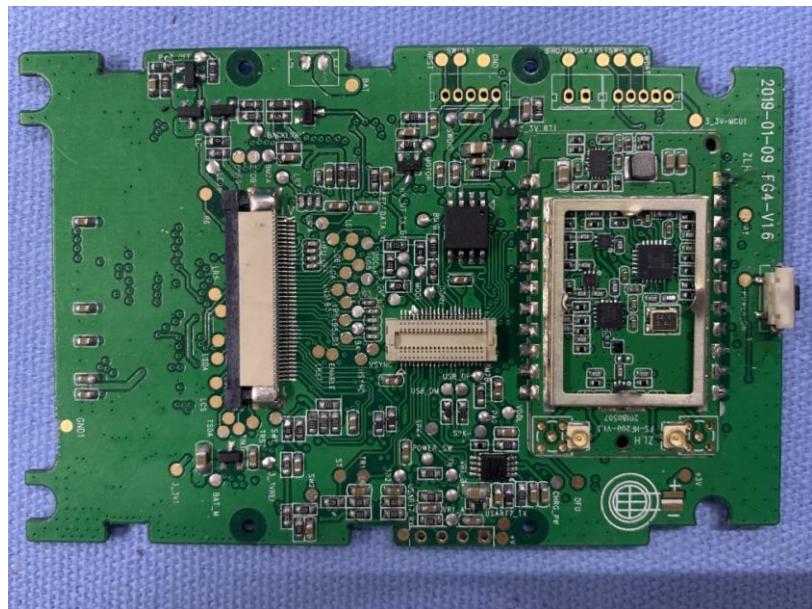

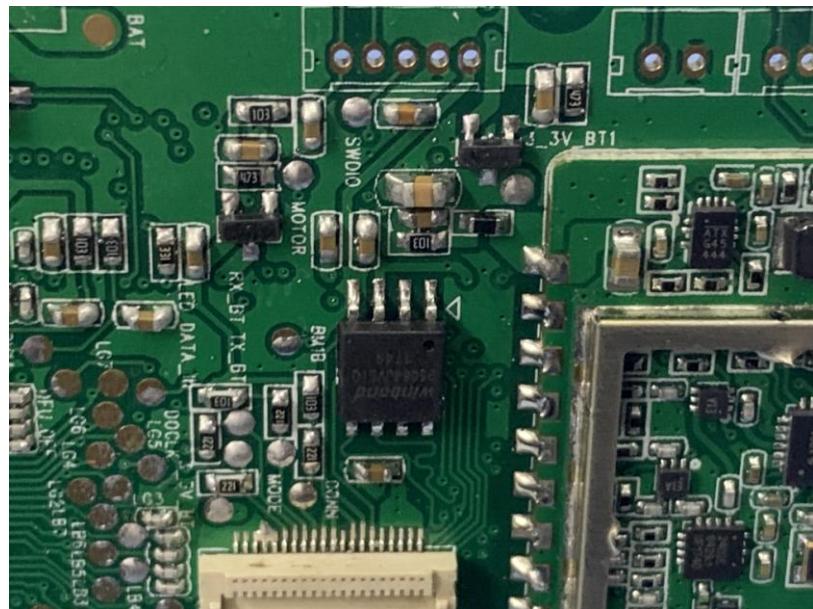

---End---