

INTERACTIVE
DISPLAYS

Interactive Displays Limited

5 Thames Park
Lester Way
Wallingford
Oxfordshire OX10 9TJ
United Kingdom

Tel: +44 (0) 1491 835984
Fax: +44 (0) 1491 836020

Federal Communications Commission
Equipment Approval Services
7435 Oakland Mills Road
COLUMBIA MD 21046

19th February 1999

For the attention of Joe Dichoso – jdichoso@fcc.gov – FCC Application Processing Branch

RE: FCC ID N5B RP-FP-PL
Interactive Displays Limited
Correspondence Ref No: 5323
Reply to your email 12/23/1998

Dear Mr Dichoso

In response to the above email:

Item 1:	Photo's of the controller box, with and without the cover lid, and of the circuit board on both sides within this controller box. Please note this is the only circuit within the equipment. The touchscreen has no circuit-board and consists of passive resistance membranes, busbars and electrical circuit wire only.
Item 2 & 3:	The touchscreen and controller have been re-tested with peripherals as registered to comply with ANSI C63.4 and the Report No: B0604706/2 dated January 1999 is herewith re-submitted. This includes the line conducted test data and photo's of the configuration.

We have uploaded the above via your internet email address for advance advise. The package including photographs and report is being sent by courier by air today.

We trust this will now enable early approval of our application.

Yours sincerely
for Interactive Displays Limited

Mike Botting
Design & Production Engineer

FCC LABORATORY
EST

Mar 1 5 08 '99

Enc.

REPORT ON
FCC Emissions Testing of a Displaymate Touchscreen

Report No B0604706/2

January 1999

REPORT ON

FCC Emissions Testing of a Displaymate Touchscreen

Report No BO604706/2

January 1999

PREPARED FOR

Interactive Displays Limited
5 Thames Park
Lesterway
Wallingford
Oxfordshire
OX10 9TS

APPROVED BY

Jensen Adams

J J ADAMS
Manager, Civil EMC Test - Birmingham

DATED

23rd January 1999

DISTRIBUTION

Mitsubishi Electric

1 Copy

TÜV Product Service

1 Copy

Copy No 1

Total No of Pages 17

REPORT BODY CONTENT

		<u>Page Number</u>
1	Status Page	3
2	Brief Summary of Results	4
3	EUT Modification Chronology	4
4	System Configuration During EMC Testing	5
4.1	Emissions Testing	5
4.2	Peripherals used during testing	5
5	Radiated Emissions 30MHz to 2000MHz	6
5.1	Enclosure Port - Test Procedure	6
5.2	Enclosure Port - Test Results	7
6	Conducted Emissions 450kHz to 30MHz	8
6.1	AC Power Port - Test Procedure	8
6.2	AC Power Port - Test Results	9
	6.2.1 Live Line	9
	6.2.2 Neutral Line	10
7	Emission Testing Instrumentation	11
8	System Measurement Uncertainty	12
9	Radiated Emissions Plots	13
9.1	30MHz to 200MHz	13
9.2	200MHz to 1000MHz	13
10	Conducted Emissions Plots	14
10.1	Live Line	14
10.2	Neutral Line	14
11	Test Configurations	15
11.1	Radiated Emissions	15
11.2	Conducted Emissions	16
12	FCC Site Compliance Letter	17

1 STATUS PAGE

OBJECTIVE	To undertake measurements to determine the Equipment Under Test's (EUT's) compliance with the specifications.
MANUFACTURING DESCRIPTION	Displaymate Touchscreen
MANUFACTURER	Interactive Displays Ltd
MANUFACTURERS MODEL NUMBER	RP96
SERIAL NUMBER	Screen (DAV0014) Controller (97242)
TEST SPECIFICATION NUMBER	FCC Part 15 Subpart B; 1 st January 1997
REGISTRATION NUMBER	BO604706/2
QUANTITY OF ITEMS TESTED	One
SECURITY CLASSIFICATION OF EUT	Unclassified
DISPOSAL	Service Receipt Note
REFERENCE NUMBER	747
DATE	21 st January 1999
ORDER NUMBER	1507
START OF TEST	21 st January 1999
FINISH OF TEST	21 st January 1999
TEST ENGINEERS	J J Adams J J Laydon M A N Terry
RELATED DOCUMENTS	ANSI C63.4 1988. Methods of Measurements of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 10kHz to 1GHz.

2 BRIEF SUMMARY OF RESULTS

Table 2 below shows a brief summary of the results obtained.

Specification and Section Number	Test	EUT Modification State	Result
FCC Part 15 Subpart B	Radiated Emissions 30MHz - 2000MHz Enclosure Port	0	Pass in MU
FCC Part 15 Subpart B	Conducted Emissions 450kHz to 30MHz	0	Pass in MU

Table 2

MU = Measurement taken is within the measurement uncertainty of the measurement system.

3 EUT MODIFICATION CHRONOLOGY

Table 3 below details modifications necessary in order for the EUT to pass the relevant tests applied.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As Supplied by Manufacturer	Not Applicable	Not Applicable

Table 3

4 SYSTEM CONFIGURATION DURING EMC TESTING

4.1 Emissions Testing

The Displaymate - Touchscreen Display with all associated cabling was set-up simulating a typical user installation within the test area, then retested in accordance with the specification.

The EUT was supported by a metal frame and placed on a 0.8m high table above the ground plane. The communication cable from the Touchscreen Display was connected via the "controller" to a Personal Computer, operating under Windows 95, and powered with a 110VAC 60Hz supply voltage.

The Personal Computer was running the "Displays" software which continuously monitored the Touchscreen for activation's. A motor operated "mechanical finger" was positioned in front of the Touchscreen. The finger touched the display every 3/4 seconds, monitored by the Personal Computer.

4.2 Drive Equipment/External Peripherals used during testing

ITEM	MANUFACTURER	MODEL	SERIAL NUMBER
Personal Computer	Hewlett Packard	Pavillion System 3240 DS3344	NL81340108
Keyboard	Hewlett Packard	FDA - 104EB	FDKB 7248382
Mouse	Hewlett Packard	P/N 518Z - 8864 M/N M - S 3A	LZB 74760209
Monitor	Hewlett Packard	D5258A	DK 73272094

Table 4.2

5 RADIATED EMISSIONS 30MHz to 1000MHz

5.1 Enclosure Port - Test Procedure

A preliminary profile of the Radiated Emissions was obtained by placing the Equipment Under Test (EUT) in a Characterisation Chamber; measurements were taken at a 3m distance. Measurements of emissions from the EUT were obtained with the Measurement Antenna in Horizontal and Vertical Polarisations. The characterisation produced a list of the highest emissions and their associated antenna polarisation.

The EUT was then transferred to the Open Field Site and placed on a remotely controlled turntable. Using the information from the preliminary profiling of the EUT, a search was made of the frequency spectrum from 30MHz to 1000MHz. The list of the highest emissions was then confirmed or updated under Open Site conditions. These emissions were then formally measured using a Quasi-Peak Detector and measurement bandwidth of 120kHz which meets the CISPR requirements for frequencies below 1000MHz. The readings were maximised by adjusting the antenna height, polarisation and turntable azimuth, in accordance with the specification. The details of these highest emissions were then recorded in the Job Log Book. Details of the highest emissions are presented in Table 5.2.

The emissions have been measured at 3m.

The Radiated Emissions measurements were made using a Rohde and Schwarz ESDP Test Receiver, and a Hewlett Packard Spectrum Analyser above 1000MHz.

The climatic conditions recorded at the time of this test were:-

Temperature - 17.4°C Relative Humidity - 59.0%rh Atmospheric Pressure - 1008HPa

The test was performed in accordance with FCC Part 15 Subpart B.

5.2 Enclosure Port - Test Results

Equipment Designation : Unintentional Radiator.

The EUT met the Class B requirements of FCC Part 15 Subpart B Paragraph 15.109 (a) for Radiated Emissions, configured at modification state 0, for the test applied.

The emissions have been measured at 3m.

Open Field Results

The levels of the six highest emissions measured in accordance with the specification are presented in Table 5.2 below.

Frequency	Pol	Hgt	Azm	Uncorrected Level at 3m	Cable Loss	Antenna Factor	Field Strength at 3m		Margin	Specification Limit	
MHz	H/V	cm	deg	dB μ V	dB	dB	dB μ V/m	μ V/m	dB	dB μ V/m	μ V/m
40.158	V	100	247	16.8	0.7	18.4	35.9	62.4	4.1	40.0	100.0
50.011	V	100	275	16.9	1.0	15.4	33.3	46.2	6.7	40.0	100.0
53.300	V	100	259	16.5	1.0	14.4	31.9	39.3	8.1	40.0	100.0
73.682	V	100	306	25.6	1.0	6.1	32.7	43.1	7.3	40.0	100.0
78.223	V	100	290	26.2	1.1	6.3	33.6	47.8	5.5	40.0	100.0
82.334	V	100	309	26.5	1.1	6.9	34.5	53.1	6.4	40.0	100.0

Table 5.2

The margin between the specification requirements and all other emissions was 8.8dB or more below the specification limit.

Note: Abbreviations for table 5.2

H	Horizontal Polarisation	V	Vertical Polarisation
Pol	Polarisation	Hgt	Height
deg	degree	Azm	Azimuth

Procedure Test Performed in accordance with ANSI C63.4.

Performed by M A N Terry, EMC Engineer
 J J Adams, EMC Engineer

6 CONDUCTED EMISSIONS 0.45MHz to 30MHz

6.1 AC Power Port - Test Procedure

All Conducted Emission Measurements were undertaken within the Characterisation Chamber. Conducted Emissions measurements were undertaken on the Live and Neutral Lines.

The emissions were formally measured using a Quasi-Peak Detector which meets the CISPR requirements. The details of the highest emissions were then recorded in the Job Log Book. Details of the highest emissions for the Live and Neutral Lines are presented in Tables 6.2.1 and 6.2.2 respectively.

The Conducted Emissions measurements were made using a Rohde & Schwarz ESH-3 Test Receiver and ESH3 - Z5 LISN.

The climatic conditions recorded at the time of this test were:-

Temperature - 17.4°C Relative Humidity - 59.0%rh Atmospheric Pressure - 1008HPa

The test was performed in accordance with FCC Part 15 Subpart B.

6.2 AC Power Port - Test Results

6.2.1 Live Line

Equipment Designation : Unintentional Radiator - Live Line

The measured EUT emissions were below the Class B requirements of FCC Part 15 Subpart B Paragraph 15.107 (a) for Conducted Emissions on the Live Line. However a number of emissions detected were below the specification limit by a margin less than the measurement uncertainty of the measurement system.

Conducted Emissions Live Line

A search was made of the frequency spectrum from 450kHz to 30MHz. The levels of the eight highest emissions were measured in accordance with the specification and are presented in Table 6.2.1 below.

Frequency MHz	Uncorrected Quasi-Peak Level		LISN Factor	Pulse Limiter	Cable Loss	Quasi-Peak Level		Margin dB	Quasi-Peak Specification Limit	
	dB μ V	μ V				dB μ V	μ V		dB μ V	μ V
5.532	36.8	69.1	0.3	9.8	0.2	47.1	226.5	0.9	48.0	250.0
5.550	37.1	71.6	0.3	9.8	0.2	47.4	234.4	0.6	48.0	250.0
5.568	37.1	71.6	0.3	9.8	0.2	47.4	234.4	0.6	48.0	250.0
5.595	37.1	71.6	0.3	9.8	0.2	47.4	234.4	0.6	48.0	250.0
5.613	37.0	70.8	0.3	9.8	0.2	47.3	231.7	0.7	48.0	250.0
5.631	36.9	69.9	0.3	9.8	0.2	47.2	229.0	0.8	48.0	250.0
5.649	36.8	69.1	0.3	9.8	0.2	47.1	226.5	0.9	48.0	250.0
5.676	36.4	66.1	0.3	9.8	0.2	46.7	216.3	1.3	48.0	250.0

Table 6.2.1

Note: * Measurement not performed; see text above.

The margin between the specification requirements and all other emissions was 3.2dB or more below the specified Quasi-Peak limit when measured with a Quasi-Peak detector.

Procedure Test performed in accordance with ANSI C63.4.

Performed by M A N Terry, EMC Engineer.
J J Laydon, EMC Engineer.

MANDATORY REQUIREMENT

6.2.2 Neutral Line

Equipment Designation : Unintentional Radiator. Neutral Line

The measured EUT emissions were below the Class B requirements of FCC Part 15 Subpart B Paragraph 15.107 (a) for Conducted Emissions on the Neutral Line. However a number of emissions detected were below the specification limit by a margin less than the measurement uncertainty of the measurement system.

Conducted Emissions Neutral Line

A search was made of the frequency spectrum from 450kHz to 30MHz. The levels of the nine highest emissions were measured in accordance with the specification and are presented in Table 6.2.2 below.

Frequency MHz	Uncorrected Quasi-Peak Level		LISN Factor	Pulse Limiter	Cable Loss	Quasi-Peak Level		Margin dB	Quasi-Peak Specification Limit	
	dB μ V	μ V				dB μ V	μ V		dB μ V	μ V
5.433	36.1	63.8	0.3	9.8	0.2	46.4	208.9	1.6	48.0	250.0
5.487	37.1	71.6	0.3	9.8	0.2	47.4	234.4	0.6	48.0	250.0
5.514	37.4	74.1	0.3	9.8	0.2	47.7	242.6	0.3	48.0	250.0
5.550	37.6	75.8	0.3	9.8	0.2	47.9	248.3	0.1	48.0	250.0
5.568	37.6	75.8	0.3	9.8	0.2	47.9	248.3	0.1	48.0	250.0
5.595	37.5	74.9	0.3	9.8	0.2	47.8	245.4	0.2	48.0	250.0
5.622	37.4	74.1	0.3	9.8	0.2	47.7	242.6	0.3	48.0	250.0
5.640	37.3	73.2	0.3	9.8	0.2	47.6	239.8	0.4	48.0	250.0
5.658	37.1	71.6	0.3	9.8	0.2	47.4	234.4	0.6	48.0	250.0

Table 6.2.2

Note: * Measurement not performed; see text above.

The margin between the specification requirements and all other emissions was 3.4dB or more below the specified Quasi-Peak limit when measured with a Quasi-Peak detector.

Procedure Test performed in accordance with ANSI C63.4.

Performed by M A N Terry, EMC Engineer.
J J Laydon, EMC Engineer.

7 EMISSION TESTING INSTRUMENTATION

Instrument	Manufacturer	Type No	EMC No
Computer	Opus	PCV	CV5
Test Receiver	Rohde and Schwarz	ESVP	1806
Test Receiver	Rohde and Schwarz	ESVP	1807
Test Receiver	Rohde and Schwarz	ESH3	1805
Spectrum Monitor	Rohde and Schwarz	EZM	1811
Biconical Antenna	Emco	3110	1847
Log Periodic Antenna	Emco	3146	1850
Turntable & Controller	British Turntables	RH253	1858
Automatic Antenna Mast & Controller	Emco	1050	1844/5
Antenna Mast	Electrometrics	AMU74A	1853
Plotter	Hewlett Packard	7550A	-
Open Area Test Site	Assessment Services	OATS 2	2280
Thermohydrograph	Rotronic	A1 Hygrometer	3162
HPA Monitor	Diplex	-	1932
60Hz 110 VAC Power Supply	California Instruments	1251 WP	SNL03874

8 SYSTEM MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems, in accordance with the recommendations of NIS 81 Edition 1, May 1994 are :-

For Radiated Emissions, Quasi-Peak Measurements using the ESVP Test Receiver:-

Measurement Uncertainty when using the Bicon Antenna Amplitude is: $\pm 3.6\text{dB}$
Measurement Uncertainty when using the Log Periodic Antenna Amplitude is: $\pm 2.9\text{dB}$
Measurement Uncertainty for Frequency is: $5\text{ppm} \pm 500\text{Hz}$


For Conducted Emissions, Quasi-Peak measurements using a Rohde & Schwarz ESH-3 Test Receiver:-

Frequency	$\pm 15\text{ppm} + 50\text{Hz}$
Amplitude	$\pm 2.3\text{dB}$

9 RADIATED EMISSIONS PLOTS


9.1 30MHz - 200MHz

dBuV/m

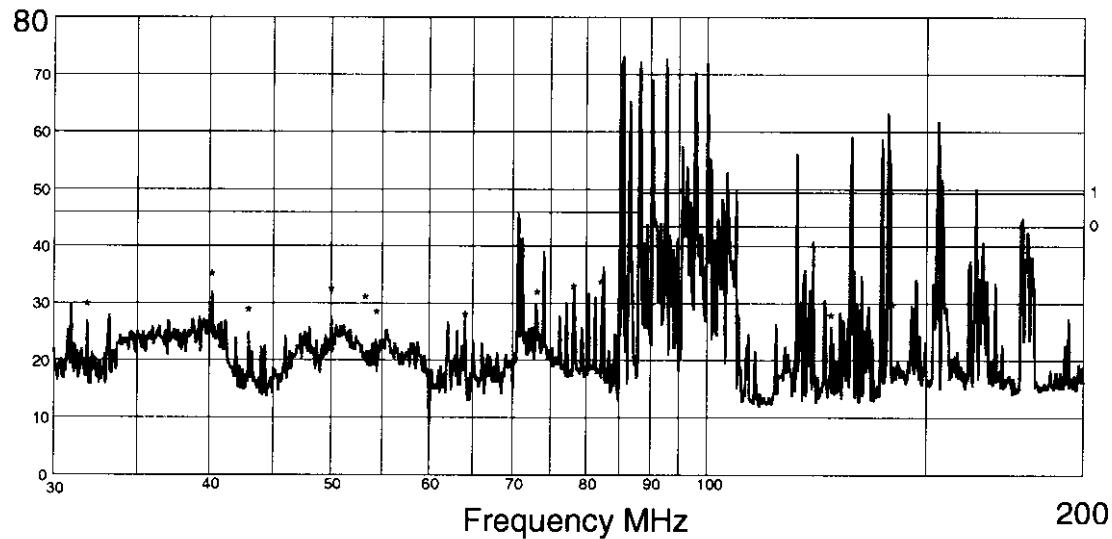


9.2 200MHz - 1000MHz

dBuV/m

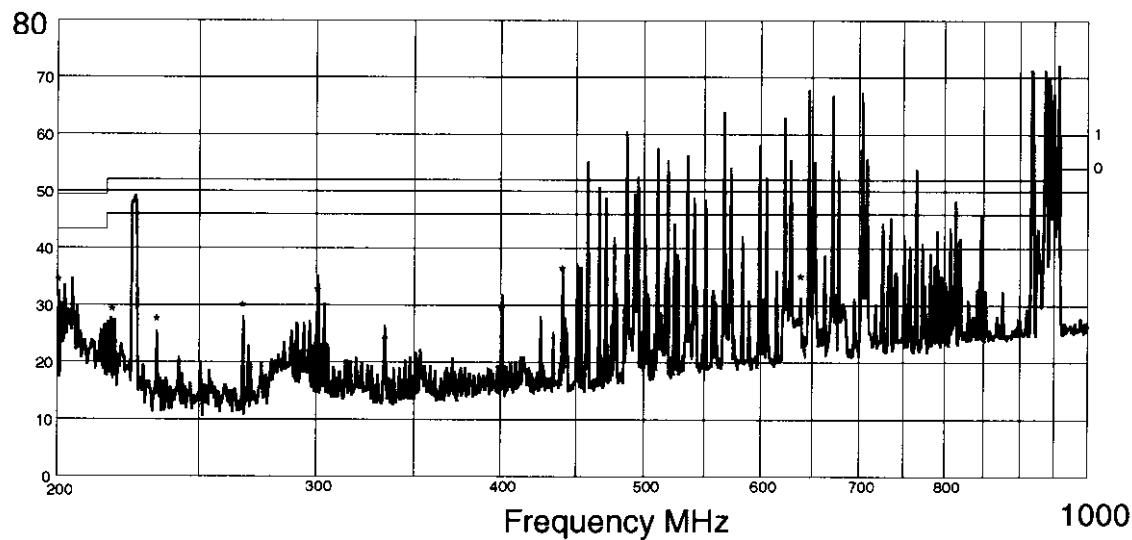


10 CONDUCTED EMISSIONS PLOTS

10.1 Live Line

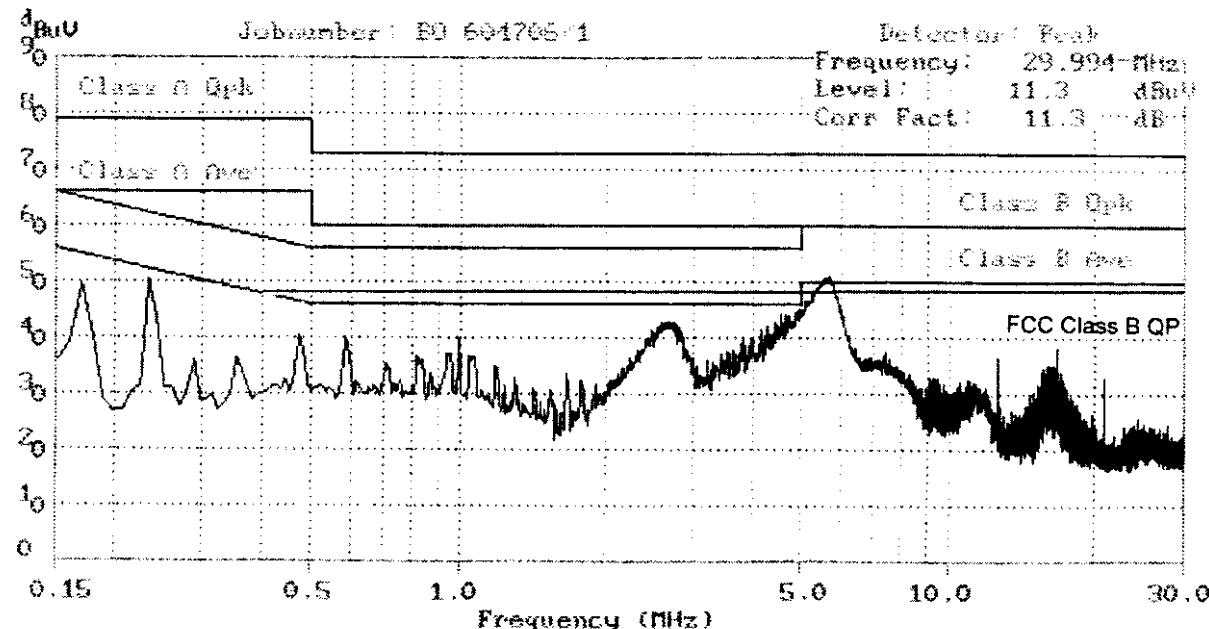


10.2 Neutral Line

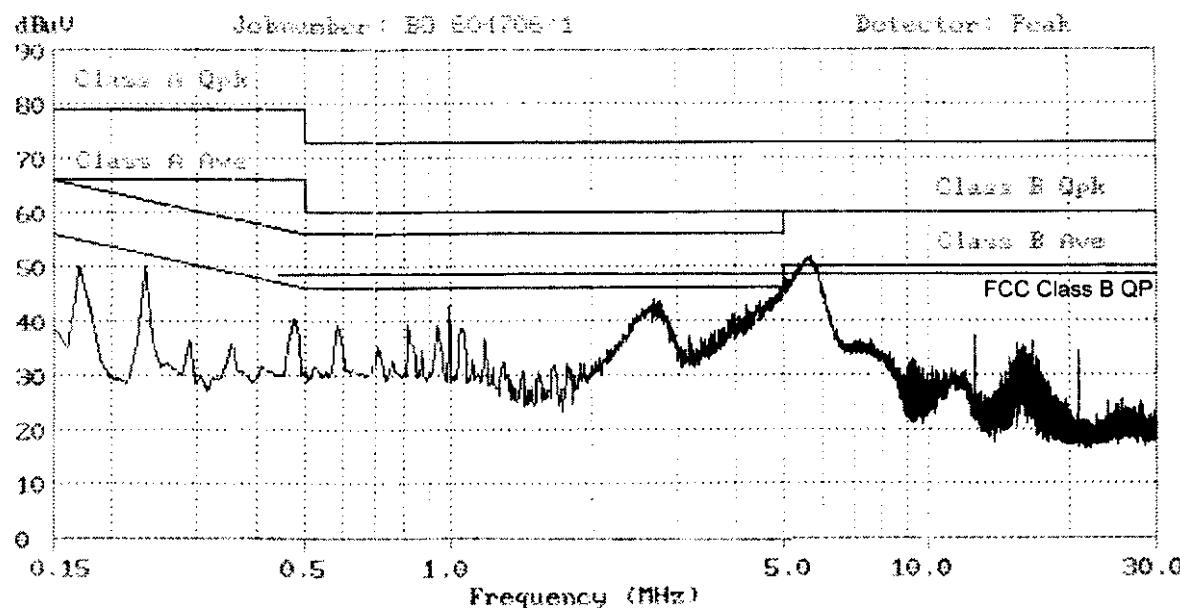

11 TEST CONFIGURATIONS

11.1 Radiated Electric Field Emissions

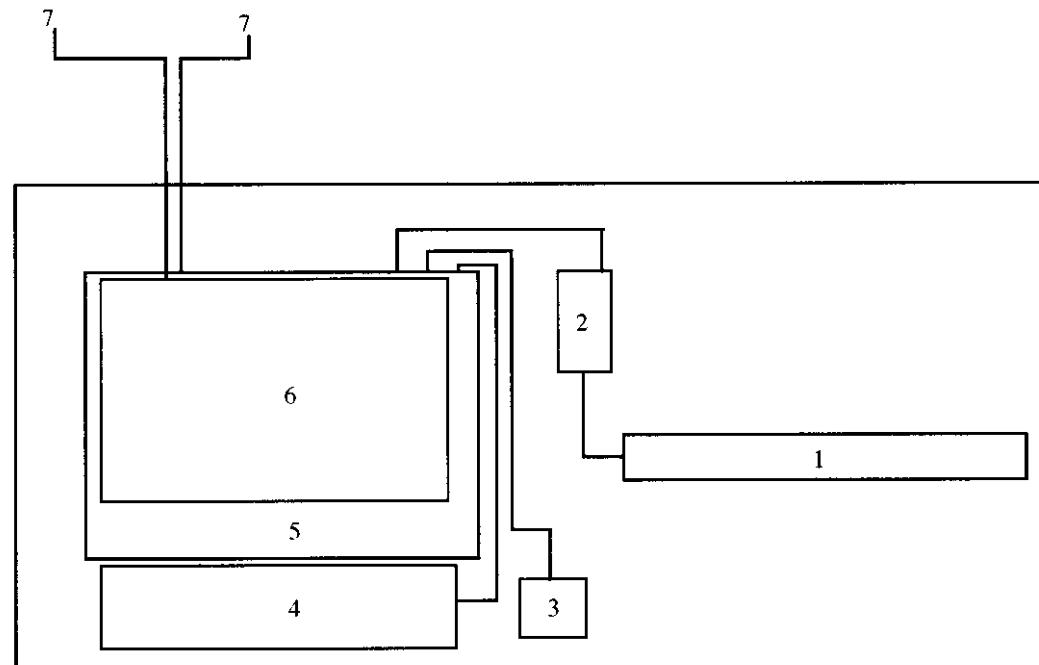


Basic Layout Configuration Used During Radiated Emissions Testing

1. Displaymate Touchscreen	2. Controller	3. Mouse	4. Keyboard
5. Personal Computer	6. Monitor	7. Power	




Photograph of the Radiated Emissions Testing Configuration

11.2 Conducted Emissions

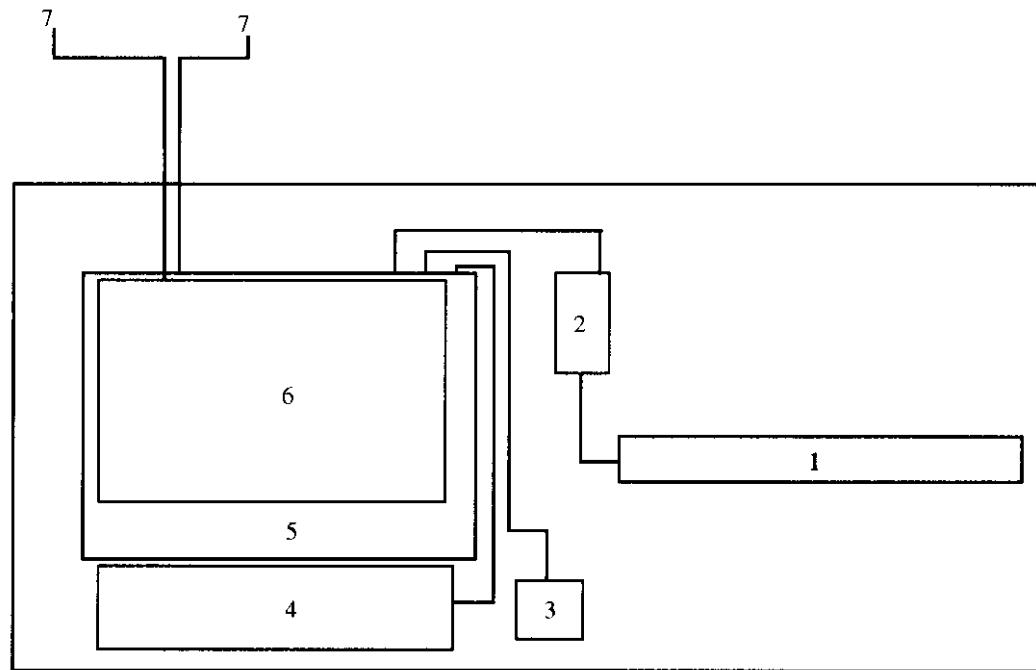

Basic Layout Configuration Used During Conducted Emissions Testing

1. Displaymate Touchscreen	2. Controller	3. Mouse	4. Keyboard
5. Personal Computer	6. Monitor	7. Power	

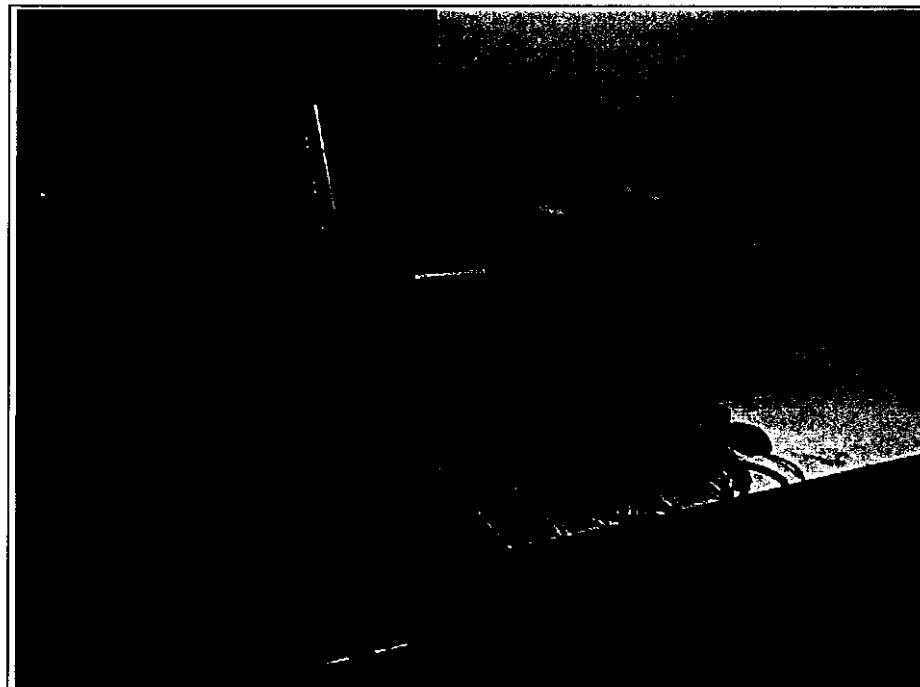

Photograph of the Conducted Emissions Testing Configuration

12 **FCC SITE COMPLIANCE LETTER**

FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1585 (ext-218)
Facsimile: 301-344-2050

October 20, 1997

IN REPLY REFER TO
31040/SIT
1300F2

Assessment Services
Segensworth Road Titchfield
Fareham Hampshire
England PO15 5RH

Attention: K. F. Archer


Re: Measurement facility located at Bearley
(3 and 10 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is updated monthly and is available on the Laboratory's Public Access Link (PAL) at 301-725-1072, and also on the Internet at the FCC Website www.fcc.gov/oet/info/database/testsite/.

Sincerely,



Thomas W. Phillips
Electronics Engineer
Customer Service Branch