

**TEST REPORT CONCERNING THE COMPLIANCE OF A
RECEIVER / IMMOBILIZER FOR A
REMOTE KEYLESS ENTRY SYSTEM (RKE),
BRAND VALEO, MODEL A04IAA
WITH 47 CFR PART 15 (JULY 10, 2008).**

10011201.fcc02
February 08, 2010

FCC listed : 90828
Industry Canada : 2932G-1
VCCI Registered : R-1518, C-1598
R&TTE, LVD, EMC Notified Body : 1856

TÜV Rheinland EPS B.V.
P.O. Box 15
9822 ZG Niekerk (NL)
Smidshornerweg 18
9822 TL Niekerk (NL)

Telephone: +31 594 505005
Telefax: +31 594 504804

E-mail: info@tuv-eps.com
Web: www.tuv-eps.com

MEASUREMENT/TECHNICAL REPORT

Brand: VALEO
Model : A04IAA
FCC ID: N5F-A04IAA

February 08, 2010

This report concerns: Original grant/certification ~~Class 2 change~~ ~~Verification~~

Equipment type: Receiver / Immobilizer for a Remote Keyless Entry System (RKE)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii) ? Yes No n.a.

Report prepared by:

Name	:	Richard van der Meer
Company name	:	TÜV Rheinland EPS B.V.
Address	:	Smidshornerweg 18
Postal code/city	:	9822 TL Niekerk
Mailing address	:	P.O. Box 15
Postal code/city	:	9822 ZG Niekerk
Country	:	The Netherlands
Telephone number	:	+ 31 594 505 005
Telefax number	:	+ 31 594 504 804
E-mail	:	info@tuv-eps.com

The data taken for this test and report herein was done in accordance with 47 CFR Part 15 (July 10, 2008) and the measurement procedures of ANSI C63.4-2003. TÜV Rheinland EPS B.V. at Niekerk, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment Under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: February 08, 2010

Signature:



O. Hoekstra
Senior Engineer Telecom TÜV Rheinland EPS B.V.

Description of test item

Test item (EUT)	:	Receiver / Immobilizer for a Remote Keyless Entry System (RKE)
Manufacturer	:	Valeo Securite Habitacle
Brand	:	Valeo
Model(s)	:	A04IAA
Serial number(s)	:	--
Receipt date	:	January 15, 2010

Applicant information

Applicant's representative	:	Mr. R. Tiné
Company	:	RFC Technology & Norms
Address	:	5, Rue du Chant des Oiseaux
Postal code	:	78360
City	:	Montesson
Country	:	France
Telephone number	:	+33 1 30157822
Telefax number	:	+33 130157823

Test(s) performed

Location	:	Niekerk
Test(s) started	:	January 20, 2010
Test(s) completed	:	January 21, 2010
Purpose of test(s)	:	Equipment Authorization (Original grant/certification)
Test specification(s)	:	47 CFR Part 15 (July 10, 2008)

Test engineer(s)	:	R. van der Meer	
Report written by	:	R. van der Meer	
Report date	:	February 08, 2010	

This report is in conformity with NEN-EN-ISO/IEC 17025: 2005
 This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland EPS B.V.
 The test results relate only to the item(s) tested.

Table of contents

1	General information.....	.5
1.1	Product description.....	.5
1.1.1	Introduction.....	.5
1.2	Related submittal(s) and/or Grant(s).....	.5
1.2.1	General.....	.5
1.3	Tested system details.....	.5
1.3.1	Description of input and output ports.....	.7
1.4	Test methodology.....	.7
1.5	Test facility.....	.7
1.6	Test conditions.....	.7
2	System test configuration.....	.8
2.1	Justification.....	.8
2.2	EUT mode of operation.....	.8
2.3	Special accessories.....	.8
2.4	Equipment modifications.....	.8
2.5	Product Labeling.....	.8
2.6	Block diagram of the EUT.....	.8
2.7	Schematics of the EUT.....	.8
2.8	Part list of the EUT.....	.8
3	Radiated emission data.....	.9
3.1	Radiated field strength measurements (30 MHz – 3.14 GHz, E-field).....	.9
3.2	Radiated field strength measurements (frequency range of 0.009-30 MHz, H-field), Average and Quasi-Peak values.....	10
4	Conducted emission data.....	11
4.1	Conducted emission data of the EUT.....	11
5	Carrier stability under special conditions.....	11
5.1.1	At 85% and 115% of rated voltage supply level.....	11
6	Plots of measurement data.....	12
6.1	Bandwidth of the emission.....	12
7	List of utilized test equipment.....	13

1 General information.

1.1 Product description.

1.1.1 Introduction.

The EUT is a Receiver / Immobilizer for a Radio Frequency (RF) Remote Keyless Entry System (RKE) that allows the driver to remotely control the door locking and unlocking of his vehicle. The Receiver part receives signals (313,85 MHz) from the RF key with transponder (FCC ID: N5F-A04IAA) in order to operate remote control via the vehicles ECU control unit. The Immobilizer part transmits on very low power levels a 125 kHz signal to the RF Key with Transponder to authorize starting of the vehicle when the right key is inserted.

The content of this report and measurement results have not been changed other than the way of presenting the data.

1.2 Related submittal(s) and/or Grant(s).

1.2.1 General.

This test report supports the original grant/certification in equipment authorization files under registration number.
FCC ID: N5F-A04IAA.

1.3 Tested system details.

Details and an overview of the system and all of its components, as it has been tested, may be found below.

EUT	:	Receiver / Immobilizer for a Remote Keyless Entry System (RKE)
Manufacturer	:	Valeo Securite Habitacle
Brand	:	Valeo
Model	:	A04IAA
Serial number	:	--
Voltage Supply	:	12 V (vehicle battery)
Voltage input rating	:	6 to 16 Vdc
Voltage output rating	:	n.a.
Current input rating	:	<230 mA
Antenna	:	Internal
Operating frequency	:	Receiver: 313.85 MHz, Immobilizer Transmit: 125 kHz
Bandwidth	:	Receiver: 300 kHz, Immobilizer: ± 10 kHz
Modulation	:	Receiver: FSK Immobilizer: ASK
Baud rate	:	Receiver: 4.8 Kbits/s $\pm 0.01\%$
Coding mode Receiver	:	Manchester
Coding mode	:	Write operations: Binary Pulse Length Modulation (BPLM), Read operations: Manchester
Immobilizer	:	
Number of channels	:	1
Remarks	:	n.a.



Photo 1: the tested Receiver / Immobilizer

1.3.1 Description of input and output ports.

The EUT is vehicle battery operated only and has CAN bus input and output ports present.

1.4 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15 (july 10, 2008), sections 15.31, 15.35 and 15.209.

The test methods, which have been used, are based on ANSI C63.4: 2003.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters.

Radiated emission tests below 30 MHz were performed at a measurement distance of 3 meters.

To calculate the field strength level from these results to the appropriate distance at which the limit is specified, the appropriate extrapolation factor is used.

The receivers are switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

1.5 Test facility.

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland EPS B.V., located in Niekerk, 9822 TL Smidshornerweg 18, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948(10-1-06 edition).

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-1. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

1.6 Test conditions.

Normal test conditions:

Temperature (*)	: +15°C to +35°C
Relative humidity(*)	: 20 % to 75 %
Supply voltage	: 115VAC/60Hz to the AC/DC Power Supply
Air pressure	: 950 – 1050 hPa

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

2 System test configuration.

2.1 Justification.

An EUT was supplied with modifications which enabled a constant transmit mode for testing purposes.
All tests were done with a stabilized power supply feeding the EUT.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4: 2003.

2.2 EUT mode of operation.

The EUT has been tested in receive mode for the receiver part and the immobilizer part in modulated transmit mode, i.e. the EUT is transmitting while continuously transmitting data.

All test set ups have been documented in pictures in the documentation package which will be submitted to the Commission.

2.3 Special accessories.

No special accessories are used and/or needed to achieve compliance.

2.4 Equipment modifications.

No modifications have been made to the equipment in order to achieve compliance.

2.5 Product Labeling

The product labeling information is available in the technical documentation package.

2.6 Block diagram of the EUT.

The block diagram is available in the technical documentation package.

2.7 Schematics of the EUT.

The schematics are available in the technical documentation package.

2.8 Part list of the EUT.

The part list is available in the technical documentation package.

3 Radiated emission data.

3.1 Radiated field strength measurements (30 MHz – 3.14 GHz, E-field)

Frequency (MHz)	Measurement results @3m Vertical (dBuV)	Measurement results @3m Horizontal (dBuV)	Correction factor (dB)	Results after correction Vertical (dBuV/m)	Results after correction Horizontal (dBuV/m)	Limits @3m (dBuV/m)	Pass/Fail
313.85	8	8	18.2	26.2	26.2	46	Pass
627.80	8	8	27.4	35.4	35.4	46	Pass
941.55	8	8	34.4	42.4	42.4	46	Pass
1255.40	20	20	6.2	26.2	26.2	54	Pass
1569.25	20	20	6.2	26.2	26.2	54	Pass
1883.10	20	20	6.2	26.2	26.2	54	Pass
2196.95	20	20	6.2	26.2	26.2	54	Pass
2510.80	20	20	6.2	26.2	26.2	54	Pass
2824.65	20	20	9.3	29.3	29.3	54	Pass
3138.50	20	20	9.3	29.3	29.3	54	Pass

Table 1 Radiated emissions of the EUT

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.35 and 15.209 are depicted in table 1.

Notes:

1. Table 1 show Peak detector values of the emissions, since the peak levels are already within limits for Average and Quasi-peak.
2. Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.
3. All values given in Table 1 are that of the noise floor, there were no emissions from the EUT detectable above the noisefloor.
4. Measurement uncertainty is $\pm 5.0\text{dB}$.
5. A peak detector was used with a resolution bandwidth of 120 kHz, above 1000 MHz a peak detector was used with a bandwidth of 1 MHz.
6. The reported field strength values are the worst case values at the indicated frequency. The receiving antenna was varied in horizontal and vertical orientations and also in height (between 1m and 4m).
7. The EUT was tested in horizontal and vertical orientations but showed no difference between these orientations. Worst case values noted. Refer to the Testsetup photographs report for testpositions.

Test engineer

Signature : 
 Name : Richard van der Meer
 Date : January 20, 2009

3.2 Radiated field strength measurements (frequency range of 0.009-30 MHz, H-field), Average and Quasi-Peak values.

Frequency (MHz)	(a) Measurement results (dB μ V)	Detector	(b) Antenna factor	(c) Cable loss	(d) Distance Extrapolation factor	Measurement results (calculated a+b+c-d)	Limits
						dB(μ V)/m	
3 meters						dB	dB(μ V)/m
0.125	34.7	Av	20.1	1	80	-24.2	25.7 @ 300m
0.178	12	Av	20.0	1	80	n.i.	22.6 @ 300m
0.250	28	Av	20.0	1	80	n.i.	19.6 @ 300m
0.375	n.i.	Av	20.0	1	80	n.i.	16.1 @ 300m
0.500	n.i.	Qp	20.0	1	40	n.i.	33.6 @ 30m
0.625	n.i.	Qp	20.0	1	40	n.i.	31.7 @ 30m
0.750	15	Qp	20.0	1	40	-4.0	30.1 @ 30m
0.875	15	Qp	20.0	1	40	-4.0	28.8 @ 30m
1.000	15	Av	19.7	1	40	-4.3	27.6 @ 30m
1.250	15	Av	19.7	1	40	-4.3	25.7 @ 30m
2.59	15	Av	19.7	1	40	-4.3	29.5 @ 30m
5.95	15	Av	19.5	1	40	-4.5	29.5 @ 30m
6.09	15	Av	19.5	1	40	-4.5	29.5 @ 30m
9.18	15	Av	19.6	1	40	-4.4	29.5 @ 30m

Table 2 Radiated emissions of the EUT, in the frequency range 0.009 – 30 MHz

The results of the radiated emission tests in the frequency range 0.009 – 30 MHz, carried out in accordance with 47 CFR Part 15 section 15.209 are depicted in table 2.

Notes:

- Calculated measurement results are obtained by using the 40dB/decade factor (antenna factor and cable loss is included). i.e at 0.125 MHz: $34.7 \text{ dBuV} + 20.1\text{dB} + 1\text{dB} - 80\text{dB} = -24.2 \text{ dBuV/m}$.
- A resolution bandwidth of 9kHz was used during testing
- n.i. Indicates that no field strength values could be measured on the listed frequencies or in the listed frequency range.
- Field strength values of radiated emissions at frequencies not listed in table 2 are more than 20 dB below the applicable limit
- The loop antenna was varied in horizontal and vertical orientations and also around it's axis. The reported value is the worst case found at the reported frequency.
- The EUT was tested in horizontal and vertical orientations but showed no difference between these orientations. Worst case values noted.
- Measurement uncertainty is $\pm 5.0\text{dB}$

Test engineer

Signature : 

Name : R. van der Meer
 Date : January 20, 2009

4 Conducted emission data.

4.1 Conducted emission data of the EUT.

Not applicable, the EUT is (vehicle) battery operated only.


5 Carrier stability under special conditions.

5.1.1 At 85% and 115% of rated voltage supply level

Not applicable, battery operated.

6 Plots of measurement data

6.1 Bandwidth of the emission

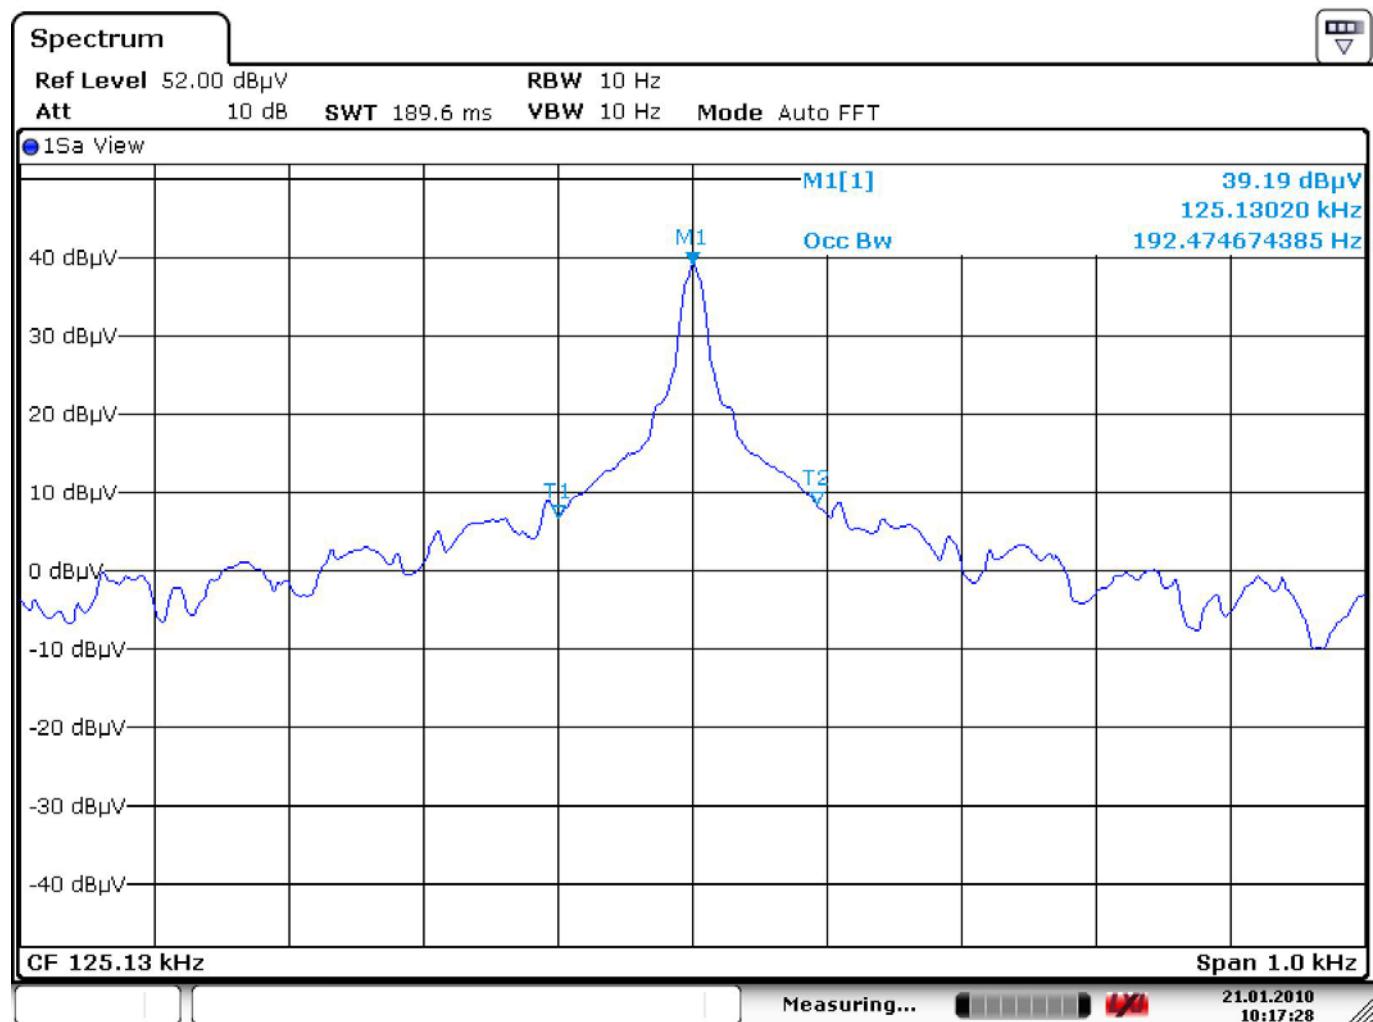

Date: 21.JAN.2010 10:17:28

Plot 1: Occupied bandwidth of the emission, 192.5 Hz as measured with a spectrum analyzer

7 List of utilized test equipment.

Inventory number	Description	Brand	Model	Last cal.	Next cal.
12484	Guide horn antenna	Emco	3115	04/2009	04/2010
15453	Active loopant. 60 cm	Chase	HLA6120	05/2009	05/2010
15633	Biconilog Testantenna	Chase	CBL 6111B	02/2009	02/2010
15677	Measuring receiver	R&S	ESCS30	04/2009	04/2010
99069	Coax 5m RG213 OATS	NMi Certin B.V.	CABLE 5M OATS	11/2009	11/2010
99070	Coax 15m RG213 OATS	NMi Certin B.V.	CABLE 15M OATS	11/2009	11/2010
99071	Coax OATS ground	NMi Certin B.V.	CABLE OATS	11/2009	11/2010
99107	Controller OATS	Heinrich Deisel	4630-100	NA	NA
99547	Temperature-Humiditymeter	Europe supplies	WS-7082	10/2009	10/2010
99580	OATS	Comtest	FCC listed: 90828	08/2008	08/2011
99608	Controller (OATS)	EMCS	DOC202	NA	NA
99609	Antenna mast	EMCS	AP-4702C	NA	NA
99624	Power Supply	Wolfsen	EA-3005	12/2009	12/2010
99683	Loopantenna 6cm	--	7405-901	09/2009	09/2010
99699	Measuring receiver	R&S	ESCI	12/2009	12/2010
99733	Spectrum Analyzer	R&S	FSV30	05/2009	05/2010

NA= Not Applicable