

CTC advanced
member of RWTÜV group



Bundesnetzagentur

BNetzA-CAB-02/21-102

TEST REPORT

Test report no.: 1-4505/17-01-02-A



Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Applicant

Valeo Comfort and Driving Assistance

76 rue Auguste Perret - ZI Europarc
94046 CRETEIL CEDEX / FRANCE
Phone: +33 1 48 84 54 00
Fax: -/-
Contact: Jerome Hugot
e-mail: jerome.hugot@valeo.com
Phone: +33 1 48 84 57 14

Manufacturer

Valeo Comfort and Driving Assistance
76 rue Auguste Perret - ZI Europarc
94046 CRETEIL CEDEX / FRANCE

Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 210 Issue 9 Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Activity Key
Model name:	FK1A
FCC ID:	N5F-FK1A
IC:	3248A-FK1A
Frequency band	260 MHz to 470 MHz
Technology tested:	Proprietary
Antenna:	Integrated antenna
Power supply:	3.0 V DC by CR2032 battery
Temperature range:	-20°C to +65°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

p.o.

Andreas Luckenbill
Lab Manager
Radio Communications & EMC

Test performed:

p.o.

Yves Olsommer
Testing Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s and references	4
4	Test environment	5
5	Test item	5
5.1	General description	5
5.2	Additional information	5
6	Description of the test setup	6
6.1	Shielded semi anechoic chamber	7
6.2	Shielded fully anechoic chamber	8
6.3	Test setup for normalized measurement configurations	9
7	Sequence of testing	10
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	10
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	11
7.3	Sequence of testing radiated spurious 1 GHz to 12.75 GHz	12
8	Measurement uncertainty	13
9	Summary of measurement results	14
9.1	Additional comments	14
10	Measurement results	15
10.1	Timing of the transmitter	15
10.2	Switch off time	18
10.3	Emission bandwidth	20
10.4	Field strength of the fundamental	23
10.5	Field strength of the harmonics and spurious	25
10.6	Receiver spurious emission	33
Annex A	Glossary	36
Annex B	Document history	37
Annex C	Accreditation Certificate	37

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-4505/17-01-02 and dated 2017-10-24

2.2 Application details

Date of receipt of order:	2016-10-25
Date of receipt of test item:	2017-01-04
Person(s) present during the test:	-/-

Emission bandwidth, field strength of the fundamental, field strength of the harmonics and spurious and receiver spurious emission measurements:

Start of test:	2017-01-04
End of test:	2017-01-23

Timing of the transmitter and switch off timer measurements:

Start of test:	2017-10-23
End of test:	2017-10-23

2.3 Test laboratories sub-contracted

None

3 Test standard/s and references

Test standard	Date	Description
47 CFR Part 15	-/-	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 9	August 2016	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS - Gen Issue 4	November 2014	Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

Guidance	Version	Description
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices

4 Test environment

Temperature :	T_{nom}	+22 °C during room temperature tests
	T_{max}	No tests under extreme conditions required.
	T_{min}	No tests under extreme conditions required.
Relative humidity content :		42 %
Barometric pressure :		1023 hpa
Power supply :	V_{nom}	3.0 V DC by CR2032 battery
	V_{max}	No tests under extreme conditions required.
	V_{min}	No tests under extreme conditions required.

5 Test item

5.1 General description

Kind of test item :	Activity Key
Type identification :	FK1A
HMN :	-/-
PMN :	Activity Key
HVIN :	FK1A
FVIN :	-/-
S/N serial number :	-/-
HW hardware status :	B104570-A
SW software status :	V08.38 (Customer mode), V08.50 (CW mode)
Frequency band :	260 MHz to 470 MHz Low channel: 433.20 MHz High channel: 434.64 MHz
Type of radio transmission :	Modulated carrier
Use of frequency spectrum :	
Type of modulation :	FSK
Number of channels :	2
Antenna :	Integrated antenna
Power supply :	3.0 V DC by CR2032 battery
Temperature :	-20°C to +65°C

5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report:

1-4505/17-01-01_AnnexA
 1-4505/17-01-01_AnnexB
 1-4505/17-01-01_AnnexD

6 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlkl!	Attention: extended calibration interval	*)	next calibration ordered / currently in progress
NK!	Attention: not calibrated		

6.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

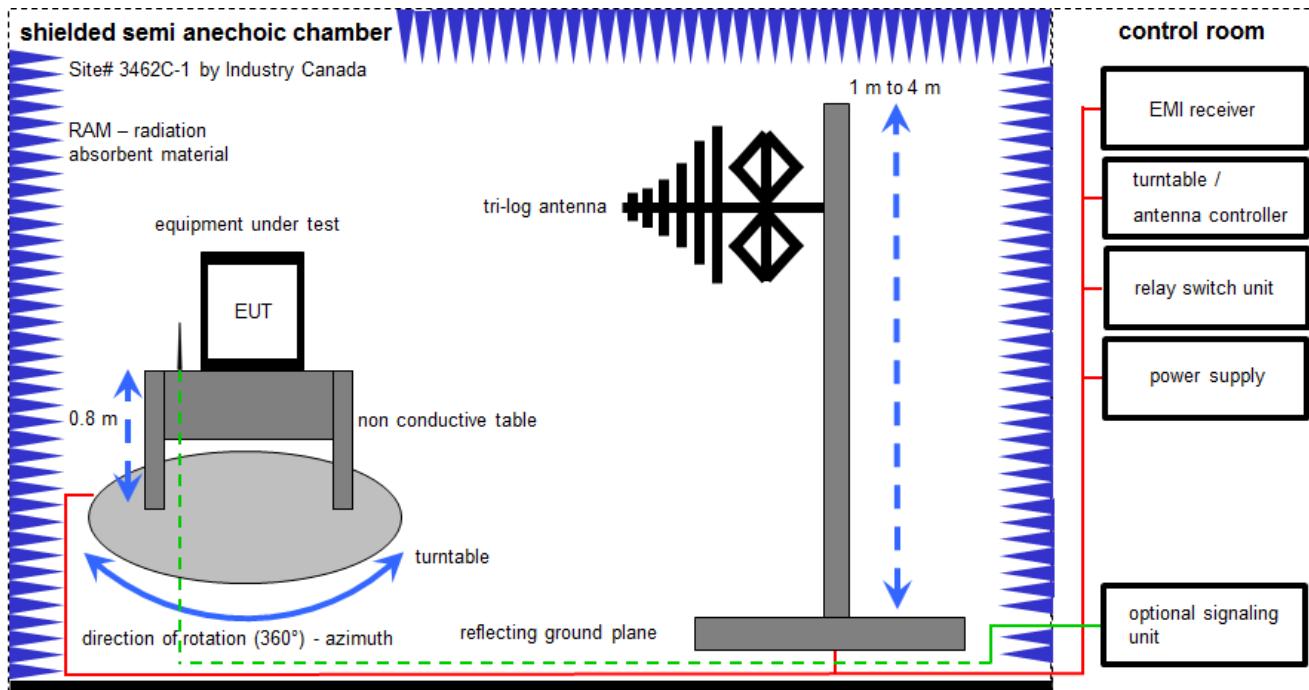

Measurement distance: tri-log antenna 10 meter

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

FS [dB μ V/m] = 12.35 [dB μ V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB μ V/m] (35.69 μ V/m)

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Meßkabine 1	HF-Absorberhalle	MWB AG 300023	-/-	300000551	ne	-/-	-/-
3	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vlKI!	02.02.2016	01.02.2018
4	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
5	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
6	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
7	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	25.04.2016	25.04.2018
8	A	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	31.01.2017	30.01.2018

6.2 Shielded fully anechoic chamber

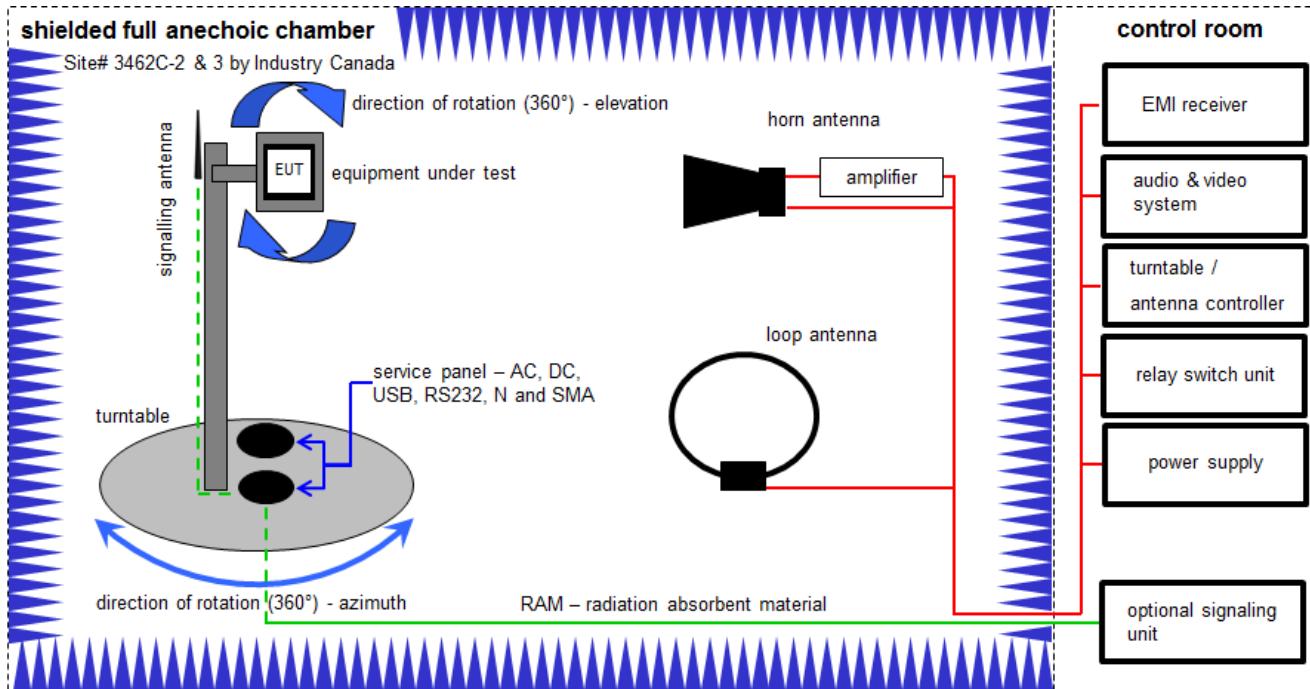

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS [\text{dB}\mu\text{V}/\text{m}] = 40.0 [\text{dB}\mu\text{V}/\text{m}] + (-35.8) [\text{dB}] + 32.9 [\text{dB}/\text{m}] = 37.1 [\text{dB}\mu\text{V}/\text{m}] (71.61 \mu\text{V}/\text{m})$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	C, D	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vlKI!	07.07.2017	06.07.2019
2	B	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	k	07.07.2017	06.07.2019
3	C	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne	-/-	-/-
4	D	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
5	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	318	300003696	k	23.05.2017	22.05.2020
6	C, D	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22051	300004483	ev	-/-	-/-
7	A, B, C, D	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
8	A, B, C, D	Computer	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A54 21	300004591	ne	-/-	-/-
9	A, B, C, D	NEXIO EMV-Software	BAT EMC V3.16.0.49	EMCO	-/-	300004682	ne	-/-	-/-
10	A, B, C, D	Anechoic chamber	-/-	TDK	-/-	300003726	ne	-/-	-/-
11	A, B, C, D	EMI Test Receiver 9kHz-26,5GHz	ESR26	R&S	101376	300005063	vlKI!	13.09.2016	13.03.2018

6.3 Test setup for normalized measurement configurations

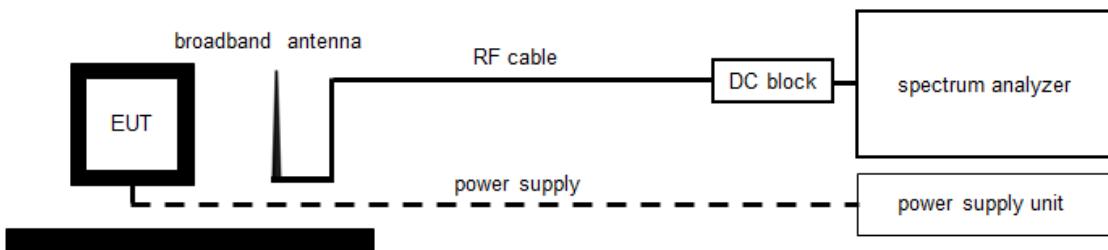

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)

Example calculation:

$$OP [dBm] = -65.0 [dBm] + 50 [dB] - 20 [dBi] + 5 [dB] = -30 [dBm] (1 \mu W)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal- and Spectrum Analyzer	FSW26	R&S	101455	300004528	k	25.01.2017	24.01.2018
2	A	RF-Cable SRD021 No. 7	Enviroflex 316 D	Huber & Suhner	-/-	400001317	ev	01.02.2017	31.01.2018

7 Sequence of testing

7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0° to 360°. In case of the 2-axis positioner is used the elevation axis is also rotated from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premereasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.3 Sequence of testing radiated spurious 1 GHz to 12.75 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premereasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Signal bandwidth	± RBW
Maximum output field strength	± 3 dB
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB

9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 9, Annex A	See table!	2017-11-22	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	C	NC	NA	NP	Remark
§ 15.35 (c) RSS-GEN	Timing of the transmitter (Duty cycle correction factor)	Nominal	Nominal					-/-
§ 15.231 (a) (1) RSS-210 Issue 9	Switch off time	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.231 (b) (3) (c) RSS-210 Issue 9	Emission bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.231 (b) RSS-210 Issue 9	Field strength of Fundamental	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.209 RSS-210 Issue 9	Field strength of harmonics and spurious	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.209 RSS-GEN	Receiver spurious emissions (radiated)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Note: C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

9.1 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

10 Measurement results


10.1 Timing of the transmitter

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	See plots
Resolution bandwidth:	10 kHz
Video bandwidth:	10 kHz
Span:	Zero
Trace-Mode:	Single sweep
Test setup:	See chapter 6.3 A


Limits:

FCC	IC
(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.	

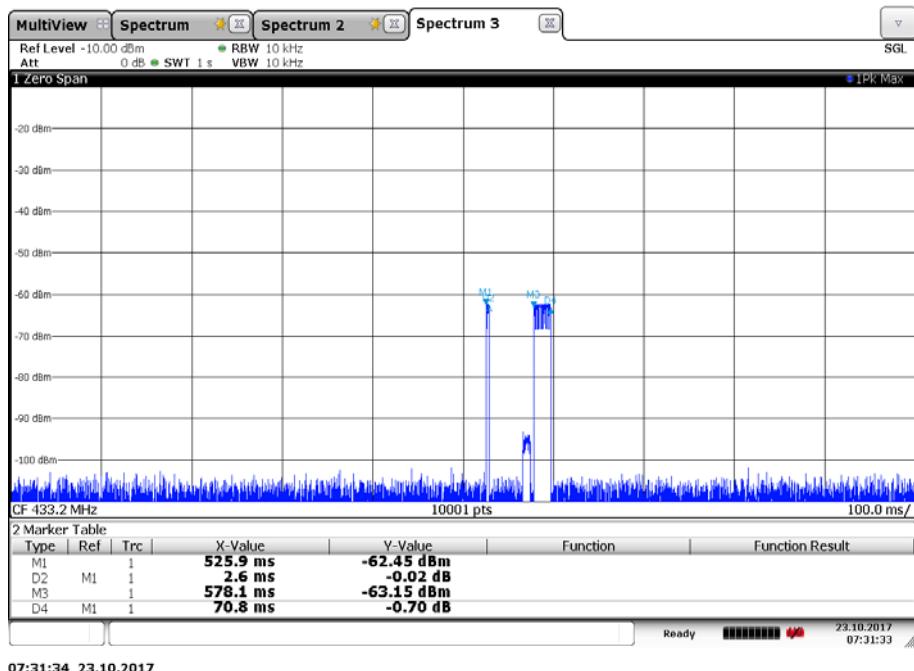Result:**Plot 1: Transmit burst, 433.20 MHz**

Transmit time (Tx on) = 73.4 ms
 Tx on + Tx off = 100 ms (1 burst per 100 ms)

The peak-to-average correction factor is calculated with $20 \times \log [Tx\ on / (Tx\ on + Tx\ off)]$.
 Hereby the peak-to-average correction factor is -2.69 dB.

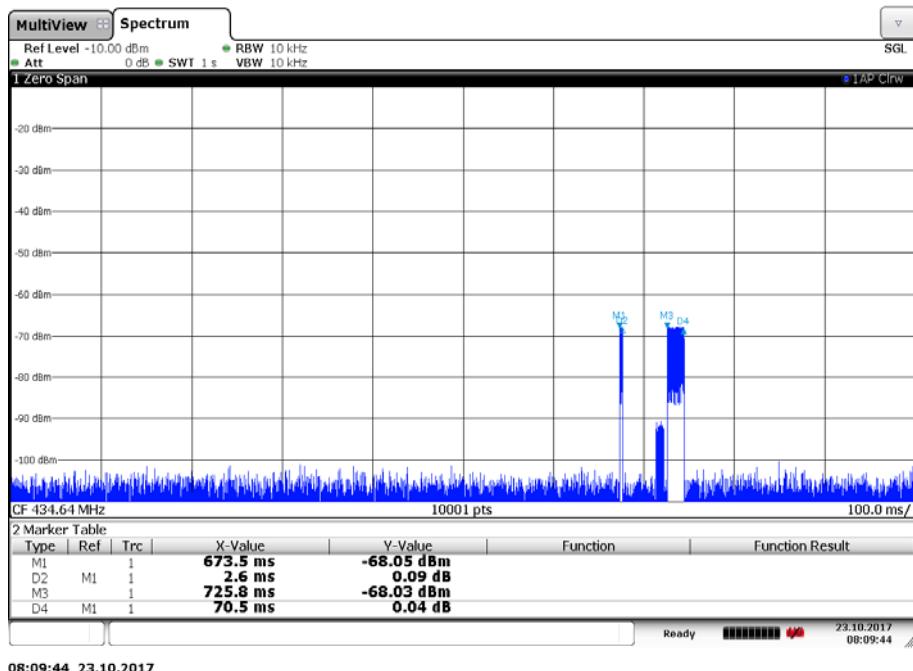Plot 2: Transmit burst, 434.64 MHz

Transmit time (Tx on) = 73.1 ms
 Tx on + Tx off = 100 ms (1 burst per 100 ms)

The peak-to-average correction factor is calculated with $20 \times \log [Tx\ on / (Tx\ on + Tx\ off)]$.
 Hereby the peak-to-average correction factor is -2.71 dB.

10.2 Switch off time

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	10 s
Resolution bandwidth:	10 kHz
Video bandwidth:	10 kHz
Span:	Zero
Trace-Mode:	Single sweep
Test setup:	See chapter 6.3 A

Limits:


FCC	IC
A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	

Results:**Plot 1: TX on time, low channel, 433.20 MHz**

The EUT automatically ceases transmission within 71 ms

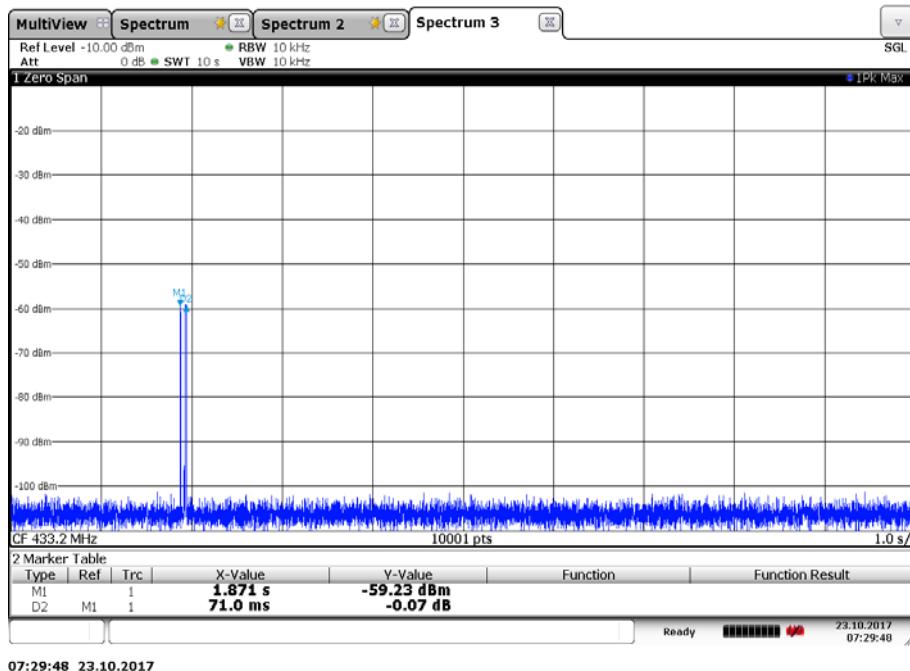**Plot 2: TX on time, high channel, 434.64 MHz**

The EUT automatically ceases transmission within 71 ms

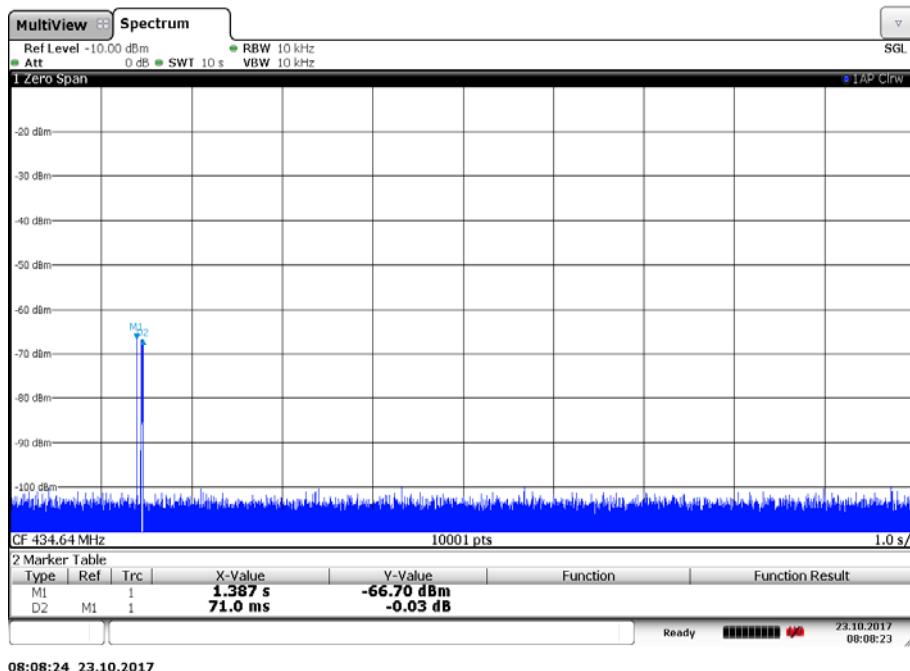

10.3 Emission bandwidth

Measurement:



Measurement of the 99 % bandwidth of the modulated signal

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	2 kHz
Video bandwidth:	2 kHz
Span:	1 MHz
Trace-Mode:	Max. hold
Test setup:	See chapter 6.3 A
Measurement uncertainty:	See chapter 8


Limits:

FCC	IC
433.20 MHz: The OBW shall not be wider than 0.25 % of the center frequency, here maximum 1.0830 MHz.	
434.64 MHz: The OBW shall not be wider than 0.25 % of the center frequency, here maximum 1.0866 MHz.	


Channel / MHz	Test conditions		Signal bandwidth / kHz	
	Mode		OBW 99%	20 dB-bandwidth
433.20	T _{nom}	V _{nom}	91.1	94.9
434.64	T _{nom}	V _{nom}	92.2	92.9

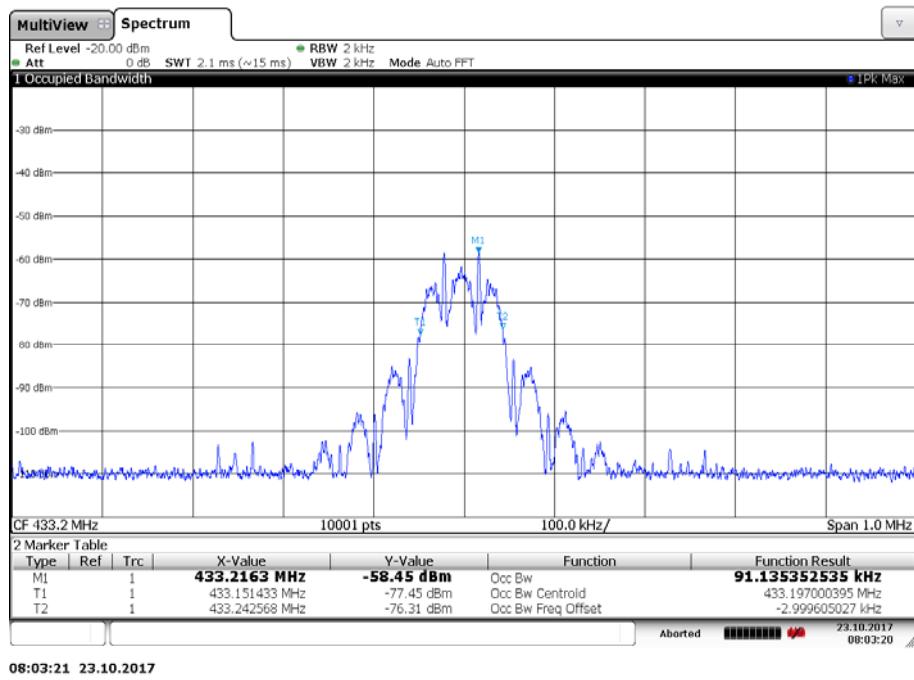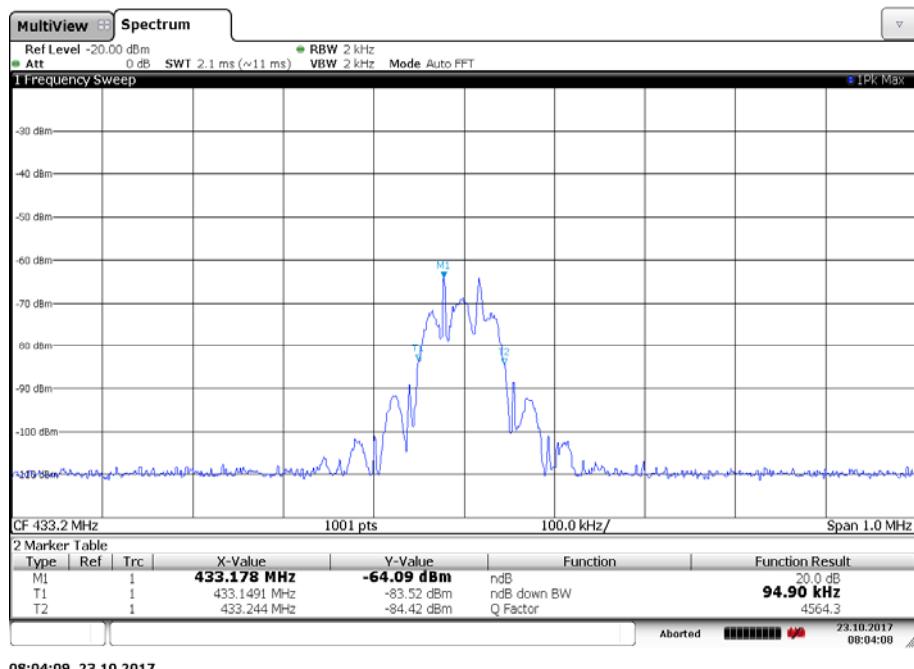Plots:**Plot 1: 99% bandwidth, 433.20 MHz****Plot 2: 20 dB bandwidth, 433.20 MHz**

Plot 3: 99% bandwidth, 434.64 MHz

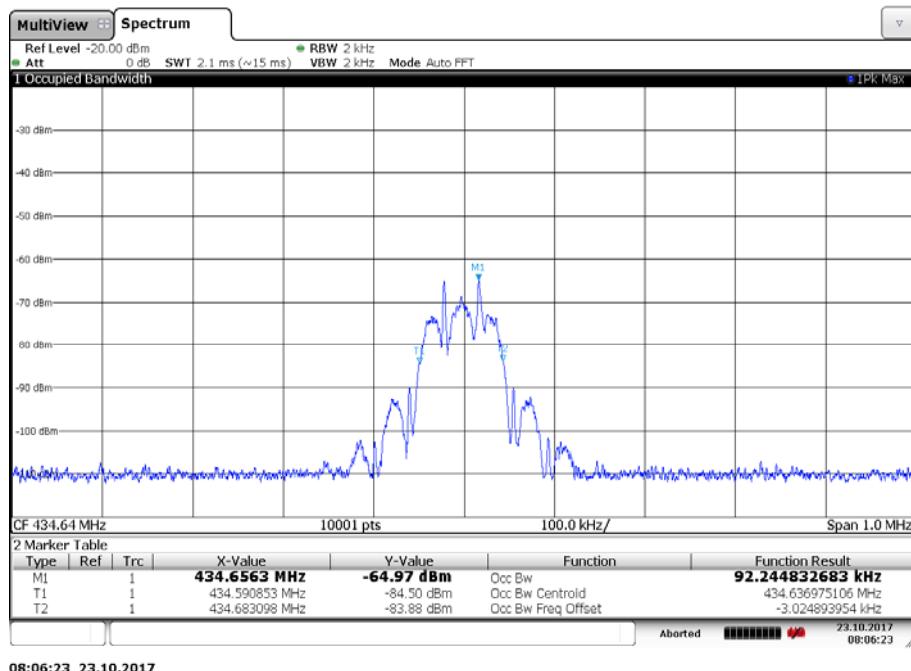

Plot 4: 20 dB bandwidth, 434.64 MHz

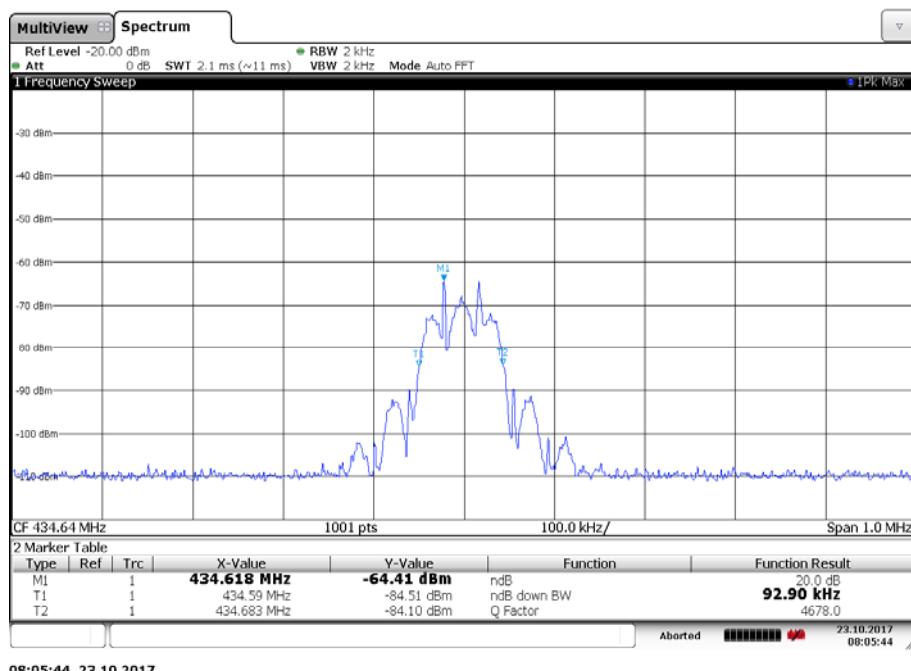

10.4 Field strength of the fundamental

Measurement:

Measurement parameter	
Detector:	Peak / pulse averaging / quasi peak
Sweep time:	Auto
Resolution bandwidth:	120 kHz
Video bandwidth:	3 x RBW
Span:	Zero
Trace-Mode:	Max. hold
Test setup:	See chapter 6.2 A
Measurement uncertainty:	See chapter 8

Limits:

FCC	IC	
Field strength of the fundamental.		
In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:		
Fundamental Frequency (MHz)	Field strength of Fundamental (μ V/m)	Measurement distance (m)
40.66 – 40.70	2,250	3
70-130	1,250	3
130-174	*1,250 to 3,750	3
174-260	3,750	3
260-470	*3,750 to 12,500	3
Above 470	12,500	3

*) Linear interpolations

Results:

433.20 MHz

Test conditions		Maximum power (dB μ V/m at 3 m distance)		Limit
Mode		Peak	Average	Average
T _{nom}	V _{nom}	78.1	75.4*	80.8

*Value recalculated from the peak value with a correction factor of -2.69 acc. Chapter 10.1

434.64 MHz

Test conditions		Maximum power (dB μ V/m at 3 m distance)		Limit
Mode		Peak	Average	Average
T _{nom}	V _{nom}	78.5	75.8*	80.9

*Value recalculated from the peak value with a correction factor of -2.71 acc. Chapter 10.1

10.5 Field strength of the harmonics and spurious

Measurement:

Measurement parameter	
Detector:	Peak / average / quasi peak
Sweep time:	Auto
Resolution bandwidth:	200 Hz / 9 kHz / 120 kHz / 1 MHz
Video bandwidth:	3 x RBW
Span:	See plots
Trace-Mode:	Max. hold
Test setup:	See chapter 6.1 A & 6.2 B, C, D
Measurement uncertainty:	See chapter 8

Limits:

FCC	IC	
Field strength of the fundamental.		
In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:		
Fundamental Frequency (MHz)	Field strength of spurious (μ V/m)	Measurement distance (m)
40.66 – 40.70	225	3
70-130	125	3
130-174	125 to 375	3
174-260	375	3
260-470	375 to 1,250	3
Above 470	1,250	3

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

FCC		IC
Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
above 960	500	3

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:


- for the band 130-174 MHz, μ V/m at 3 meters = $56.81818(F) - 6136.3636$;
- for the band 260-470 MHz, μ V/m at 3 meters = $41.6667(F) - 7083.3333$.

Results:


f [MHz]	Detector	Limit max. allowed [dB μ V/m]	Amplitude of emission [dB μ V/m]	Results
All emissions were more than 10 dB below the peak limit. For emissions between 30 MHz and 1 GHz see result table below the plot.				

Plots: 433.20 MHz

Plot 1: 9 kHz to 30 MHz

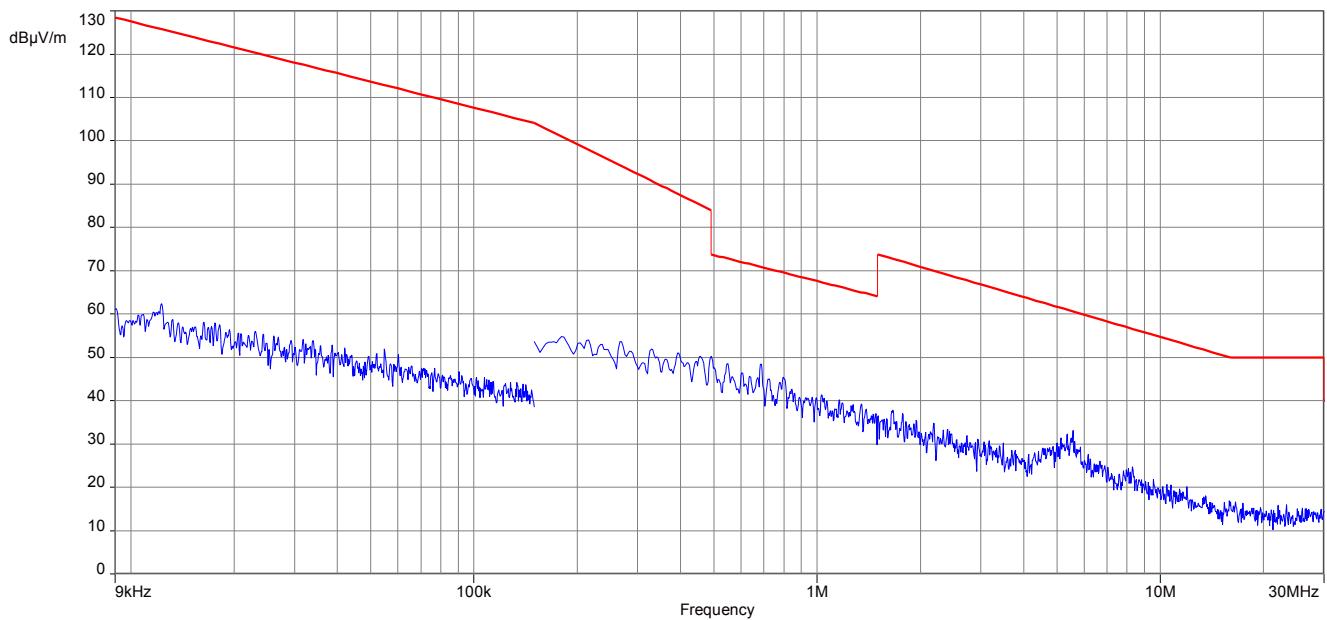


Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization

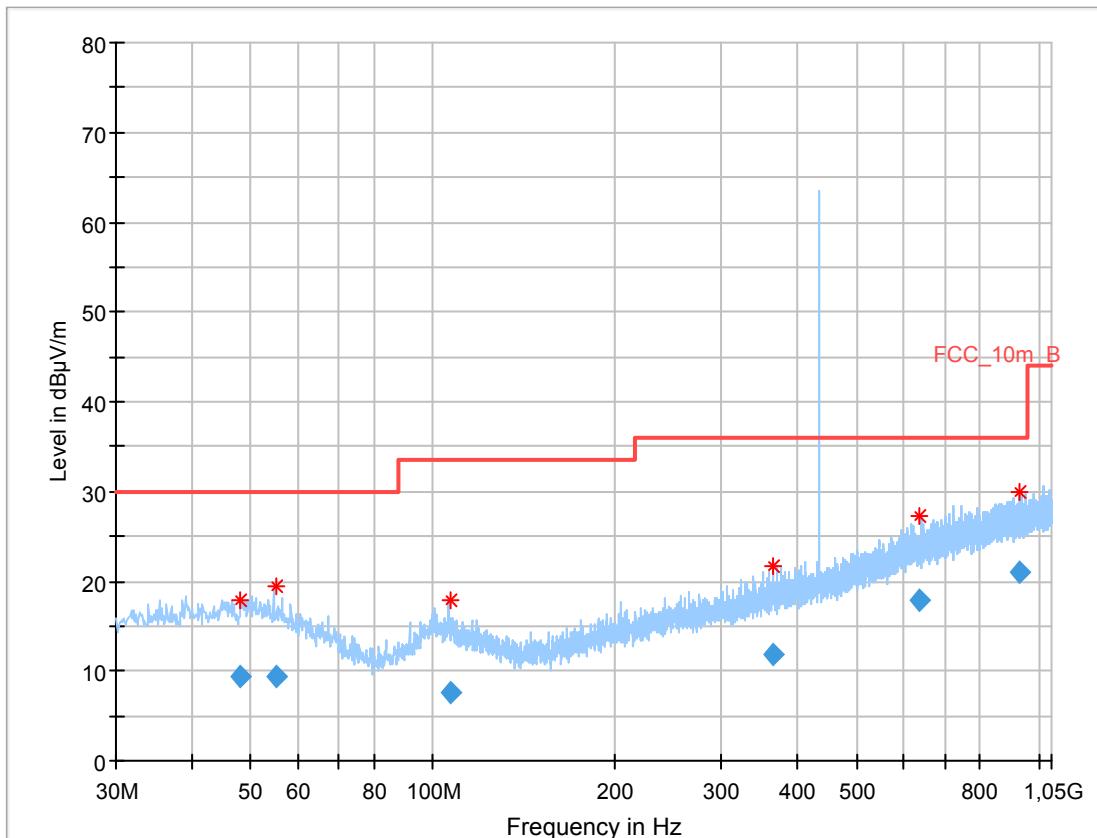


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
48.129	9.29	30.0	20.71	1000	120	101.0	V	260.0	13.7
54.962	9.42	30.0	20.58	1000	120	101.0	V	80.0	13.1
106.746	7.57	33.5	25.93	1000	120	101.0	V	261.0	11.5
365.649	11.93	36.0	24.07	1000	120	98.0	H	190.0	16.3
637.656	17.94	36.0	18.06	1000	120	170.0	V	280.0	21.0
929.090	21.10	36.0	14.90	1000	120	170.0	H	81.0	24.3

Plot 3: 1 GHz to 6 GHz, vertical & horizontal polarization

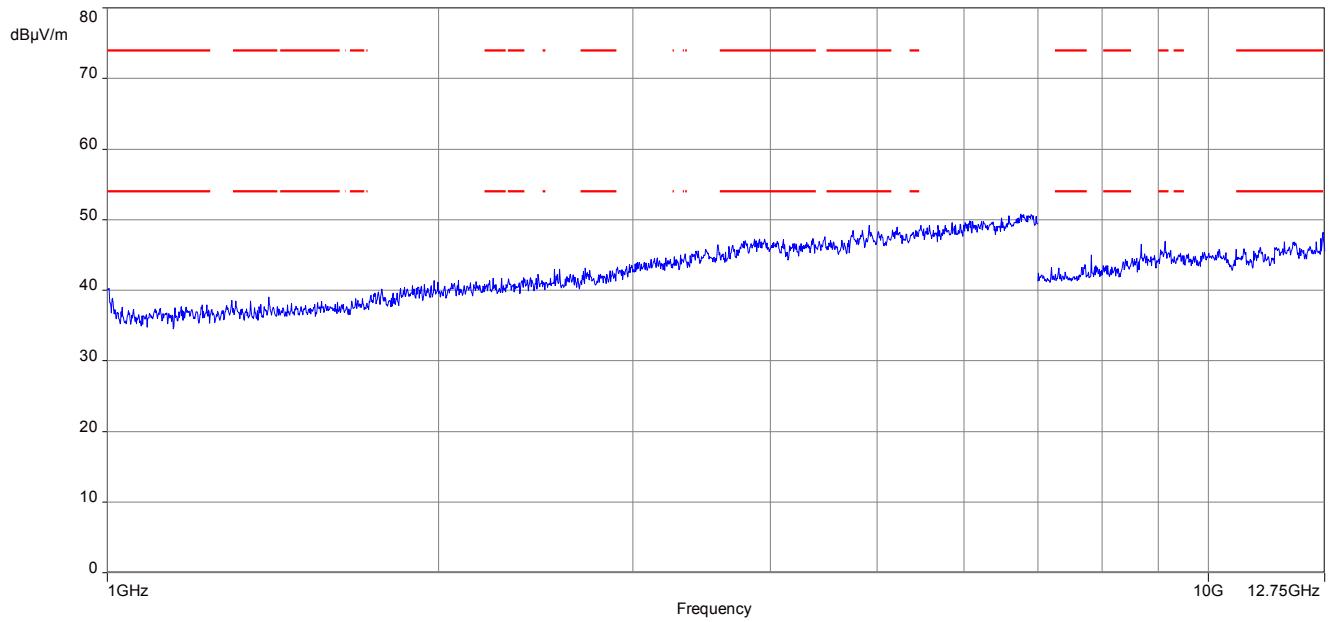


Plots: 434.64 MHz

Plot 1: 9 kHz to 30 MHz

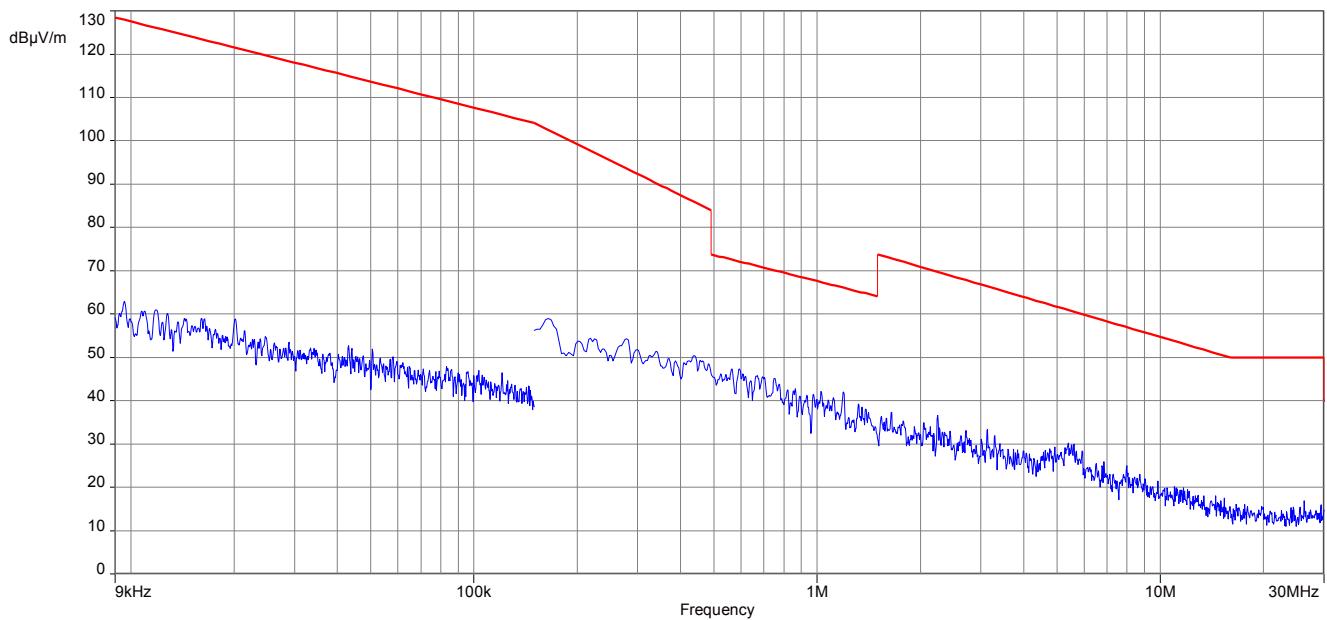


Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization

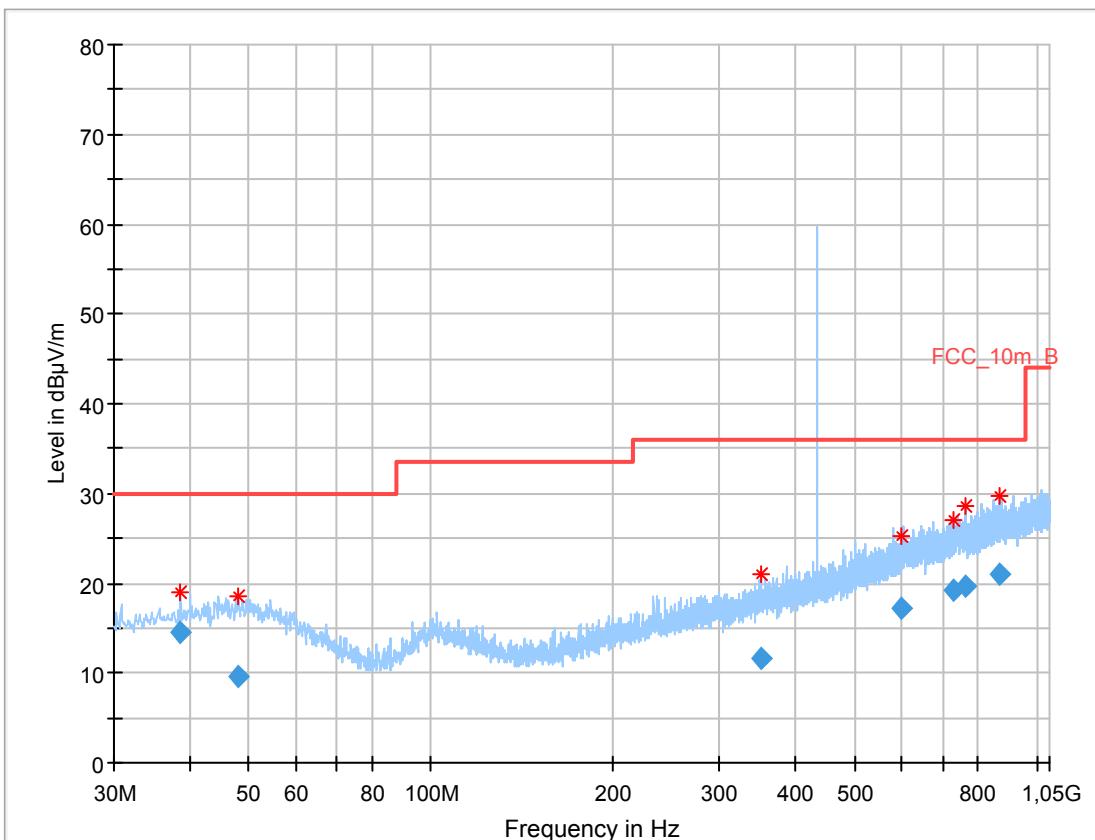

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.708	14.53	30.0	15.47	1000	120	101.0	V	280.0	13.1
47.929	9.55	30.0	20.45	1000	120	98.0	V	100.0	13.7
350.310	11.65	36.0	24.35	1000	120	101.0	V	-8.0	16.0
598.764	17.26	36.0	18.74	1000	120	98.0	H	170.0	20.7
726.877	19.12	36.0	16.88	1000	120	170.0	V	190.0	22.2
762.797	19.62	36.0	16.38	1000	120	170.0	H	190.0	22.7
866.267	21.04	36.0	14.96	1000	120	101.0	H	260.0	23.7

Plot 3: 1 GHz to 6 GHz, vertical & horizontal polarization

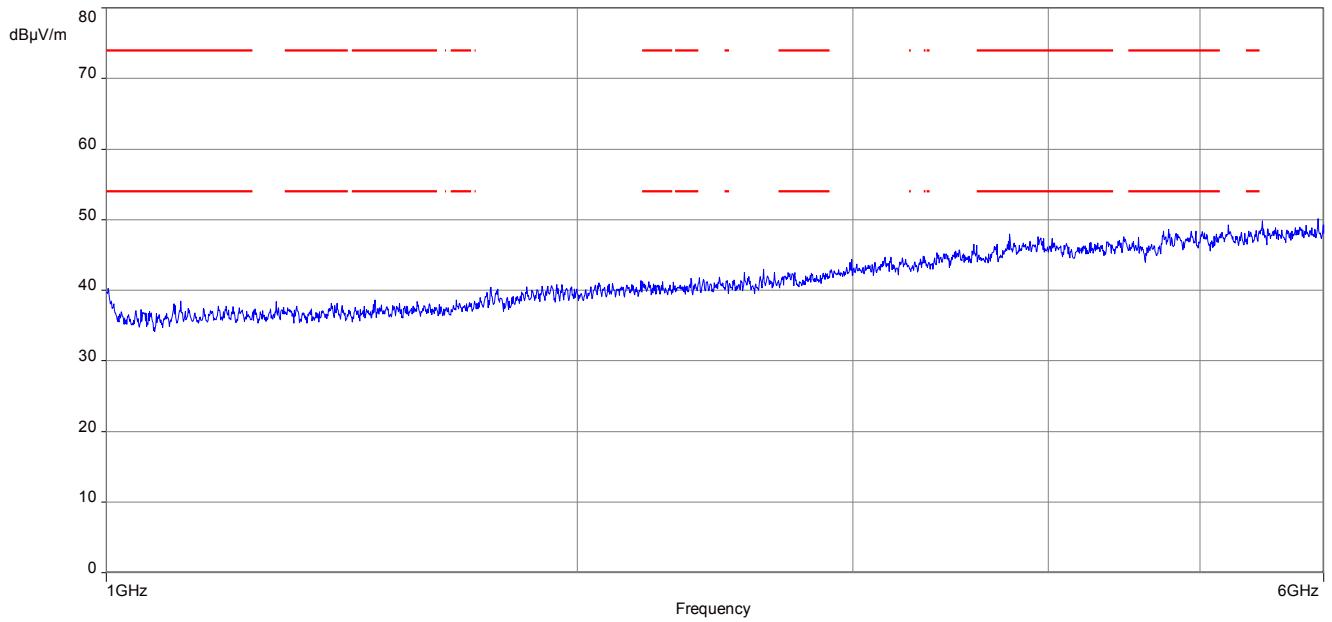

10.6 Receiver spurious emission

Measurement:


Measurement parameter	
Detector:	Peak / average / quasi peak
Sweep time:	Auto
Resolution bandwidth:	120 kHz / 1 MHz
Video bandwidth:	3 x RBW
Span:	See plots
Trace mode:	Max. hold
Test setup:	See chapter 6.1 A & 6.2 C, D
Measurement uncertainty:	See chapter 8

Limits:

FCC		IC
Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3


Results:

f [MHz]	Detector	Limit max. allowed [dB μ V/m]	Amplitude of emission [dB μ V/m]	Results
All emissions were more than 20 dB below the peak limit. For emissions between 30 MHz and 1 GHz see result table below the plot.				

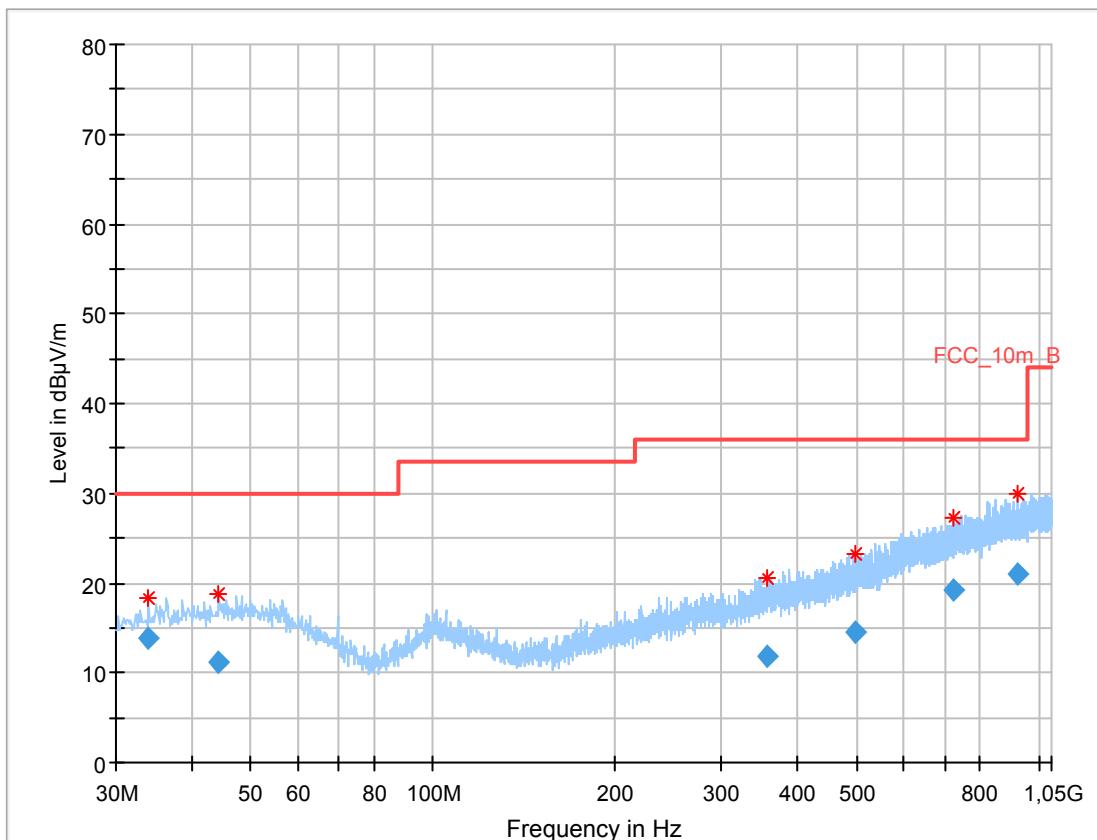Plots:**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.987	13.90	30.0	16.10	1000	120	101.0	V	-10.0	12.5
44.277	11.13	30.0	18.87	1000	120	100.0	V	280.0	13.6
356.088	11.80	36.0	24.20	1000	120	170.0	V	80.0	16.1
496.956	14.61	36.0	21.39	1000	120	170.0	V	-8.0	18.6
723.532	19.16	36.0	16.84	1000	120	101.0	H	261.0	22.1
923.086	21.10	36.0	14.90	1000	120	170.0	V	262.0	24.3

Plot 2: 1 GHz to 6 GHz, vertical & horizontal polarization

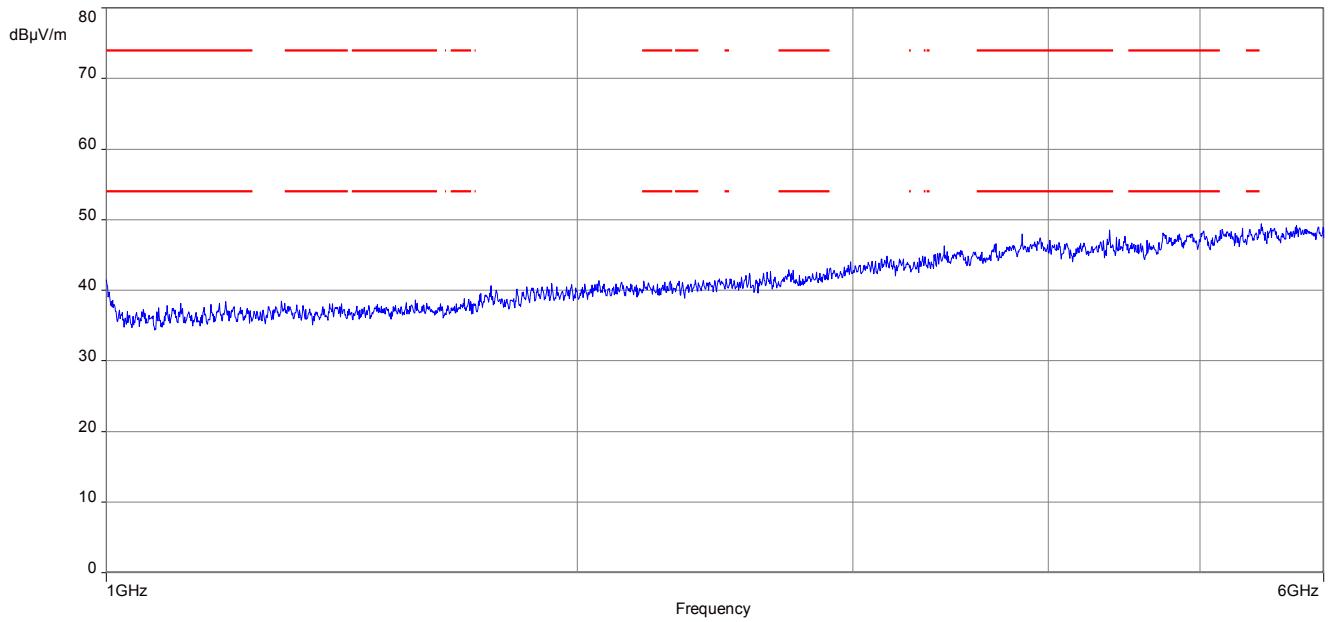

Annex A Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standard Institute
EN	European Standard
FCC	Federal Communication Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

Annex B Document history

Version	Applied changes	Date of release
-/-	Initial release	2017-10-24
A	Editorial corrections	2017-11-22

Annex C Accreditation Certificate

<p>first page</p> <p> Deutsche Akkreditierungsstelle</p> <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Beiliehene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV Unterzeichnerin der Multilateralen Abkommen von EA, ILAC und IAF zur gegenseitigen Anerkennung</p> <p>Akkreditierung </p> <p>Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium CTC advanced GmbH Untertürkheimer Straße 6-10, 66111 Saarbrücken</p> <p>die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:</p> <ul style="list-style-type: none"> Funk Mobilfunk (GSM / DCS) + OTA Elektromagnetische Verträglichkeit (EMV) Produktsicherheit SAR / EMF Umwelt Smart Card Technology Bluetooth® Automotive Wi-Fi-Services Kanadische Anforderungen US-Anforderungen Akustik Near Field Communication (NFC) <p><small>Die Akkreditierungskunde gilt nur in Verbindung mit dem Bescheid vom 25.11.2016 mit der Akkreditierungsnr. D-PL-12076-01, und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 63 Seiten.</small></p> <p><small>Registrierungsnummer der Urkunde: D-PL-12076-01-01</small></p> <p></p> <p>Frankfurt, 25.11.2016 Im Auftrag Dipl.-Ing. Ralf Eigner Abteilungsleiter <small>Unter Konservierung der Rückseite</small></p>	<p>last page</p> <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Standort Berlin Spittelmarkt 10 10117 Berlin</p> <p>Standort Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Standort Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>Die auszugsweise Veröffentlichung der Akkreditierungskunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in unveränderlicher Form.</p> <p>Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.</p> <p>Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I, S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (ABl. L 218 vom 9. Juli 2008, S. 30).</p> <p>Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.</p> <p>Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iafnu.org</p>
--	---

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

<http://www.dakks.de/as/ast/d/D-PL-12076-01-03.pdf>