

FCC ID: N5GUF70

## EMI - TEST REPORT

- FCC Part 15.247 -



Test Report No. :	T36016-00-00HU	15. May 2012
		Date of issue

Type / Model Name : UF70 Certum

Product Description : RFID UHF Reader

**Applicant** : Brooks Automation GmbHAddress : Gartenstr. 19  
D-95490 Mistelgau**Manufacturer** : Brooks Automation GmbHAddress : Gartenstr. 19  
D-95490 Mistelgau**Licence holder** : Brooks Automation GmbHAddress : Gartenstr. 19  
D-95490 Mistelgau

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>POSITIVE</b>
--	-----------------



The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

**FCC ID: N5GUF70**
**Contents**

<b>1 TEST STANDARDS</b>	<b>3</b>
<b>2 SUMMARY</b>	<b>4</b>
<b>3 EQUIPMENT UNDER TEST</b>	<b>6</b>
3.1 Photo documentation of the EUT – Detailed photos see Attachment A	6
3.2 Test setup	6
3.3 Power supply system utilised	6
3.4 Short description of the EUT	6
<b>4 TEST ENVIRONMENT</b>	<b>8</b>
4.1 Address of the test laboratory	8
4.2 Environmental conditions	8
4.3 Statement of the measurement uncertainty	8
4.4 Measurement Protocol for FCC, VCCI and AUSTEL	9
<b>5 TEST CONDITIONS AND RESULTS</b>	<b>10</b>
5.1 Conducted emissions	10
5.2 20 dB bandwidth	16
5.3 Maximum peak conducted output power	21
5.4 Spurious RF conducted emissions	23
5.5 Spurious radiated emissions	29
5.6 Hopping sequence	33
5.7 Equal hopping frequency use	34
5.8 Receiver input bandwidth	34
5.9 Dwell time	35
5.10 Channel separation	38
5.11 Quantity of hopping channels	40
5.12 Antenna application - Detailed photos see Attachment A	43
5.13 Maximum permissible exposure (MPE) – See Attachment B	44
<b>6 USED TEST EQUIPMENT AND ACCESSORIES</b>	<b>45</b>

**FCC ID: N5GUF70**

## **1 TEST STANDARDS**

The tests were performed according to following standards:

### **FCC Rules and Regulations Part 15, Subpart A - General (October, 2011)**

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

### **FCC Rules and Regulations Part 15, Subpart B - Unintentional Radiators (October, 2011)**

Part 15, Subpart B, Section 15.107	AC Line conducted emissions,
Part 15, Subpart B, Section 15.109	Radiated emissions, general requirements

### **FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2011)**

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

### **FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969**

Part 1, Subpart I, Section 1.1310	Radiofrequency radiation exposure limits
Part 1, Subpart 2, Section 2.1093	Radiofrequency radiation exposure evaluation: portable device

### **OET Bulletin 65, 65A, 65B, 65C Edition 97-01, August 1997 – Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.**

ANSI C63.10: 2009	Testing Unlicensed Wireless Devices
ANSI C95.1:1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
CISPR 16-4-2: 2003	Uncertainty in EMC measurement
CISPR 22: 2005 EN 55022: 2006	Information technology equipment

**FCC ID: N5GUF70**

## 2 SUMMARY

## **GENERAL REMARKS:**

The frequency range was scanned from 9 kHz to 10 GHz.

All emissions not reported in this test report were more than 10 dB below the specified limit.

The EuT is a frequency hopping system using 52 channels in the frequency band from 902 to 928 MHz.

Following antenna is provided with the UF70 Certum:

- MT – 242025/NRH/K antenna: Polarization RHCP, (7.5 dBic)

The EuT is declared as Class B digital device.


It is not possible to set the EuT only in receiving mode.

Screenshot of the supportet test software:

### Tag reading mode:



### Manual mode:

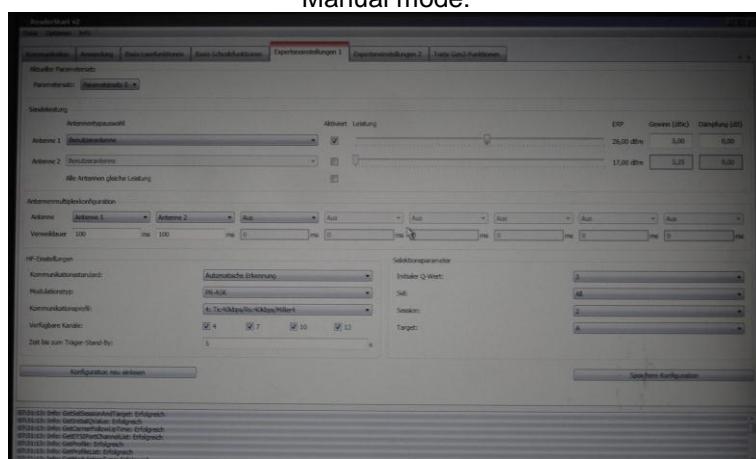

**FCC ID: N5GUF70****FINAL ASSESSMENT:**

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 17. April 2012

Testing concluded on : 23. April 2012

Checked by: \_\_\_\_\_ Tested by: \_\_\_\_\_

---

Thomas Weise  
Dipl.-Ing.(FH)  
Laboratory Manager

---


Markus Huber

FCC ID: N5GUF70

### **3 EQUIPMENT UNDER TEST**

#### **3.1 Photo documentation of the EUT – Detailed photos see Attachment A**

#### **3.2 Test setup**

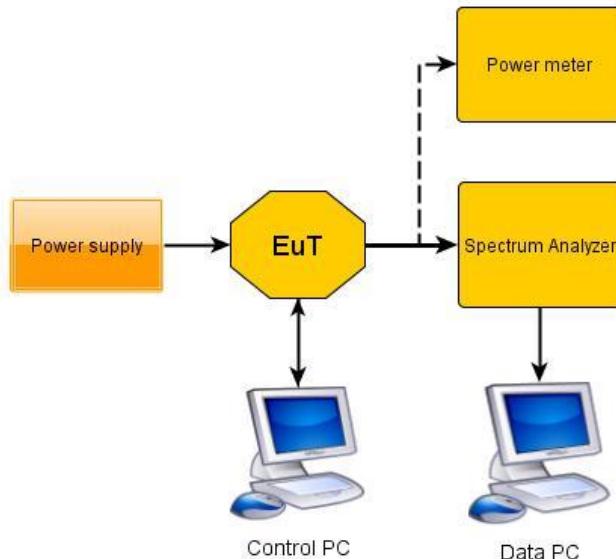

#### **3.3 Power supply system utilised**

Power supply voltage: : Primary: 100-240 V / 50-60 Hz / 1φ  
 Secondary: 24 V DC

#### **3.4 Short description of the EUT**

The EuT is a UHF RFID reader system. It can read active and passive Tags in the frequency range from 902 to 928 MHz.

Number of tested samples: 1  
 Serial number: 00 – 002D – UF70

#### **EUT operation mode:**

The equipment under test was operated during the measurement under the following conditions:

- TAG reading mode supplying 30.0 dBm

- Standby mode

-

-

**FCC ID: N5GUF70****EUT configuration:**

**The following peripheral devices and interface cables were connected during the measurements:**

- Test software Model : Supplied by manufacturer
- Lap Top Model : Fa. mikes-testingpartners gmbh
- Antenna Model : MT – 242025/NRH/K
- Power supply – CINCON ELECTRONICS Model : TRG45A240, S/N:45240-0001100
- \_\_\_\_\_ Model : \_\_\_\_\_
- customer specific cables

FCC ID: N5GUF70

## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

**mikes-testingpartners gmbh**  
Ohmstrasse 2-4  
94342 Strasskirchen  
Germany

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

### 4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader may notice that tolerances within the calibration of the equipment and facilities may cause additional uncertainty. The measurement uncertainty is calculated for all measurements listed in this test report acc. to CISPR 16-4-2 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurement“ and documented in the mikes-testingpartners gmbh quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, mikes-testingpartners gmbh, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component diversity and modifications in production process of devices may result in additional deviation. If necessary, refer to the test lab for the actual measurement uncertainty for the specific test. The manufacturer has the sole responsibility of continued compliance of the EUT.

## FCC ID: N5GUF70

### 4.4 Measurement Protocol for FCC, VCCI and AUSTEL

#### 4.4.1 GENERAL INFORMATION

##### 4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

##### 4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

FCC ID: N5GUF70

## 5 TEST CONDITIONS AND RESULTS


### 5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

#### 5.1.1 Description of the test location

Test location: Shielded Room S2

#### 5.1.2 Photo documentation of the test set-up

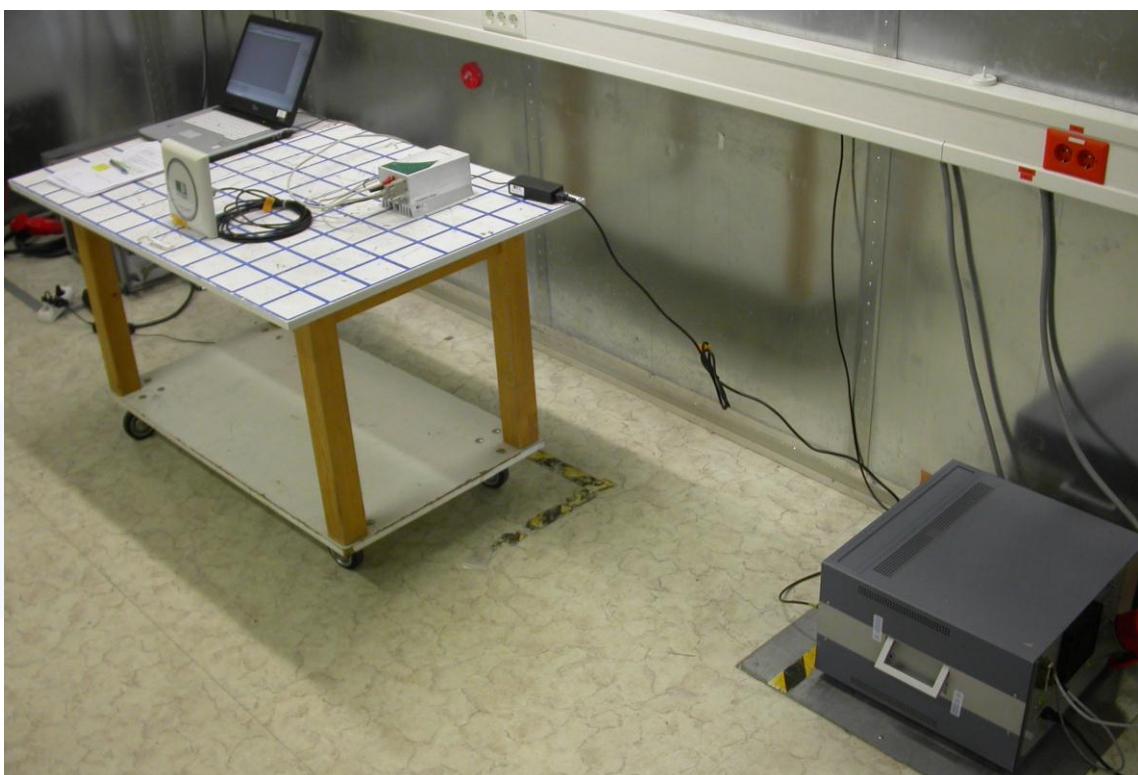

## FCC ID: N5GUF70

### 5.1.3 Applicable standard

According to FCC Part 15C, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

### 5.1.4 Description of Measurement

The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a line impedance stabilization network (LISN) with  $50 \Omega/50 \mu\text{H}$  (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded.

To convert between dB $\mu$ V and  $\mu\text{V}$ , the following conversions apply:

$$\text{dB}\mu\text{V} = 20 \log \mu\text{V}$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

### 5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz  
 Min. limit margin 12.4 dB at 0.155 kHz

The requirements are **FULFILLED**.

**Remarks:** For detailed test result please refer to following test protocols.

---



---




---

**FCC ID: N5GUF70**
**5.1.6 Test protocol**

Test point: L1  
 Operation mode: Tag reading mode supplying 30.0 dBm  
 Remarks:

Result: Passed

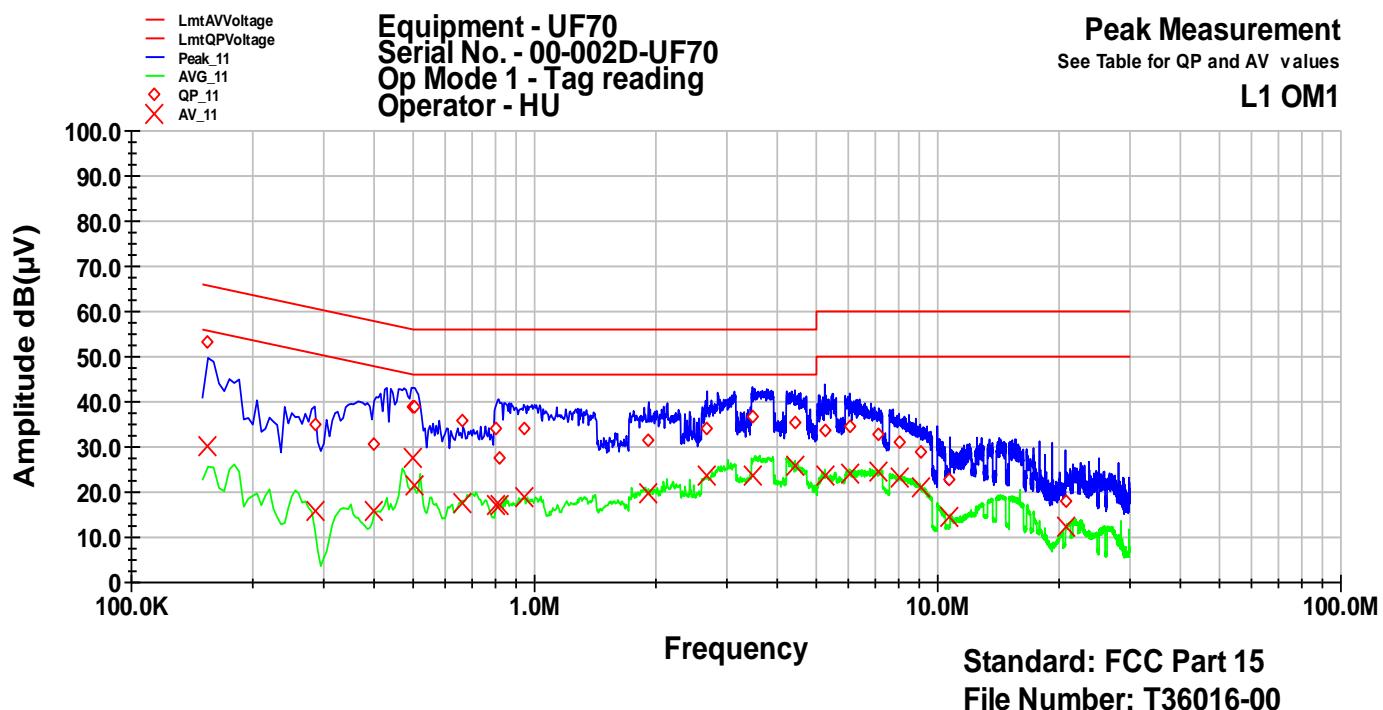


Frequency	QP Level	QP Margin	QP Limit	AV Level	AV Margin	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.155	53.3	-12.4	65.7	30.3	-25.4	55.7
0.285	35.1	-25.5	60.7	15.7	-34.9	50.7
0.4	30.7	-27.2	57.9	15.7	-32.1	47.9
0.5	39.0	-17.0	56.0	27.4	-18.6	46.0
0.505	38.7	-17.3	56.0	21.4	-24.6	46.0
0.665	35.7	-20.3	56.0	17.5	-28.5	46.0
0.8	34.1	-21.9	56.0	16.9	-29.1	46.0
0.815	27.4	-28.6	56.0	17.3	-28.7	46.0
0.94	34.1	-21.9	56.0	18.9	-27.1	46.0
1.92	31.6	-24.4	56.0	20.0	-26.0	46.0
2.68	34.0	-22.0	56.0	23.5	-22.5	46.0
3.47	36.6	-19.4	56.0	23.5	-22.5	46.0
4.425	35.2	-20.8	56.0	25.8	-20.2	46.0
5.245	33.5	-26.5	60.0	23.5	-26.5	50.0
6.045	34.5	-25.5	60.0	24.1	-25.9	50.0
7.135	32.7	-27.3	60.0	24.5	-25.5	50.0
8.015	31.1	-28.9	60.0	23.4	-26.6	50.0
9.04	29.0	-31.0	60.0	21.1	-28.9	50.0
10.725	22.9	-37.1	60.0	14.6	-35.4	50.0
20.72	18.0	-42.0	60.0	12.2	-37.8	50.0

**FCC ID: N5GUF70**

Test point N  
 Operation mode: Tag reading mode supplying 30.0 dBm  
 Remarks:

Result: Passed

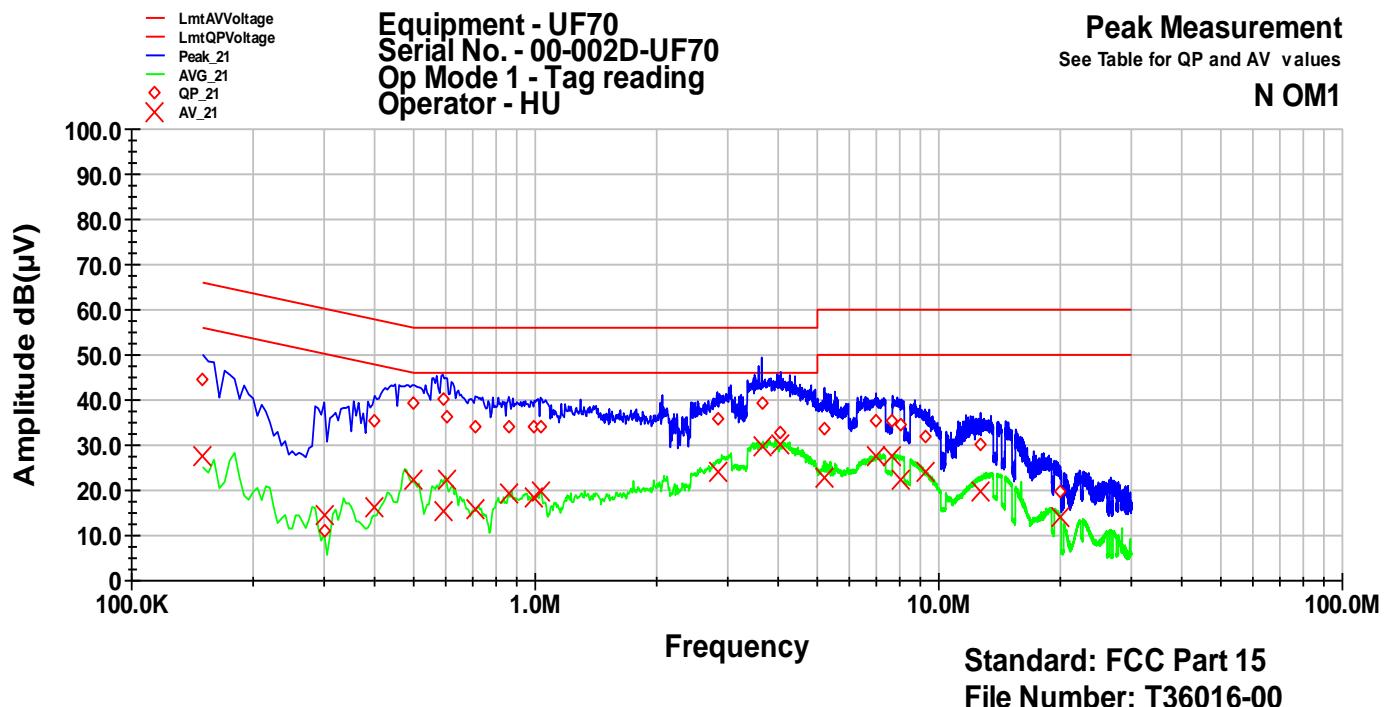


Frequency	QP Level	QP Margin	QP Limit	AV Level	AV Margin	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.15	44.6	-21.4	66.0	27.5	-28.5	56.0
0.3	11.2	-49.0	60.2	14.6	-35.6	50.2
0.4	35.6	-22.2	57.9	16.1	-31.7	47.9
0.5	39.3	-16.7	56.0	22.5	-23.5	46.0
0.59	40.1	-15.9	56.0	15.4	-30.5	46.0
0.605	36.2	-19.8	56.0	22.4	-23.6	46.0
0.71	34.0	-22.0	56.0	16.0	-30.0	46.0
0.86	34.2	-21.8	56.0	19.3	-26.7	46.0
0.995	34.1	-21.9	56.0	18.6	-27.4	46.0
1.03	34.2	-21.8	56.0	19.7	-26.3	46.0
2.825	35.6	-20.4	56.0	23.9	-22.1	46.0
3.64	39.2	-16.8	56.0	29.7	-16.3	46.0
4.055	32.8	-23.2	56.0	30.1	-15.9	46.0
5.205	33.7	-26.3	60.0	22.7	-27.3	50.0
6.985	35.3	-24.7	60.0	27.5	-22.5	50.0
7.68	35.4	-24.6	60.0	27.7	-22.3	50.0
8.08	34.7	-25.3	60.0	22.5	-27.5	50.0
9.235	31.9	-28.1	60.0	24.0	-26.0	50.0
12.675	30.1	-29.9	60.0	20.0	-30.0	50.0
20.005	19.9	-40.1	60.0	14.2	-35.8	50.0

**FCC ID: N5GUF70**

Test point: L1  
 Operation mode: Standby mode  
 Remarks:

Result: Passed

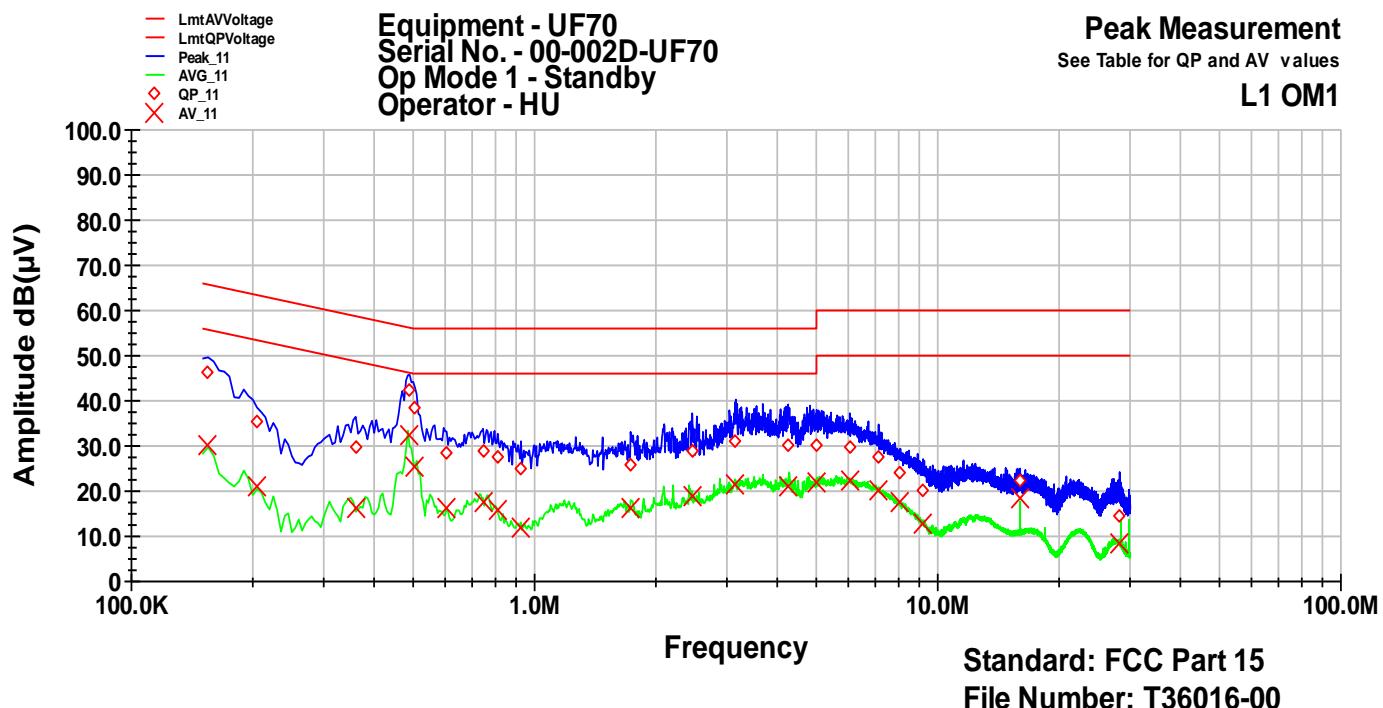

Frequency	QP Level	QP Margin	QP Limit	AV Level	AV Margin	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.155	46.1	-19.6	65.7	30.3	-25.4	55.7
0.205	35.2	-28.2	63.4	21.2	-32.2	53.4
0.36	29.6	-29.1	58.7	16.4	-32.3	48.7
0.49	42.5	-13.6	56.2	32.5	-13.7	46.2
0.505	38.6	-17.4	56.0	25.6	-20.4	46.0
0.605	28.6	-27.4	56.0	16.1	-29.9	46.0
0.745	28.8	-27.2	56.0	17.8	-28.3	46.0
0.81	27.6	-28.4	56.0	15.8	-30.2	46.0
0.925	25.0	-31.0	56.0	12.1	-33.9	46.0
1.73	26.0	-30.0	56.0	16.5	-29.5	46.0
2.46	28.8	-27.2	56.0	19.1	-26.9	46.0
3.155	31.3	-24.8	56.0	21.3	-24.7	46.0
4.255	30.3	-25.7	56.0	21.1	-24.9	46.0
5.005	30.2	-29.8	60.0	21.8	-28.2	50.0
6.05	30.0	-30.0	60.0	22.2	-27.8	50.0
7.13	27.4	-32.6	60.0	20.4	-29.6	50.0
8.075	24.2	-35.8	60.0	17.4	-32.6	50.0
9.195	20.0	-40.0	60.0	12.7	-37.3	50.0
16	22.5	-37.5	60.0	18.6	-31.4	50.0
28.245	14.3	-45.7	60.0	8.4	-41.6	50.0

**FCC ID: N5GUF70**

Test point


N

Operation mode:

Standby mode

Remarks:

Result: Passed

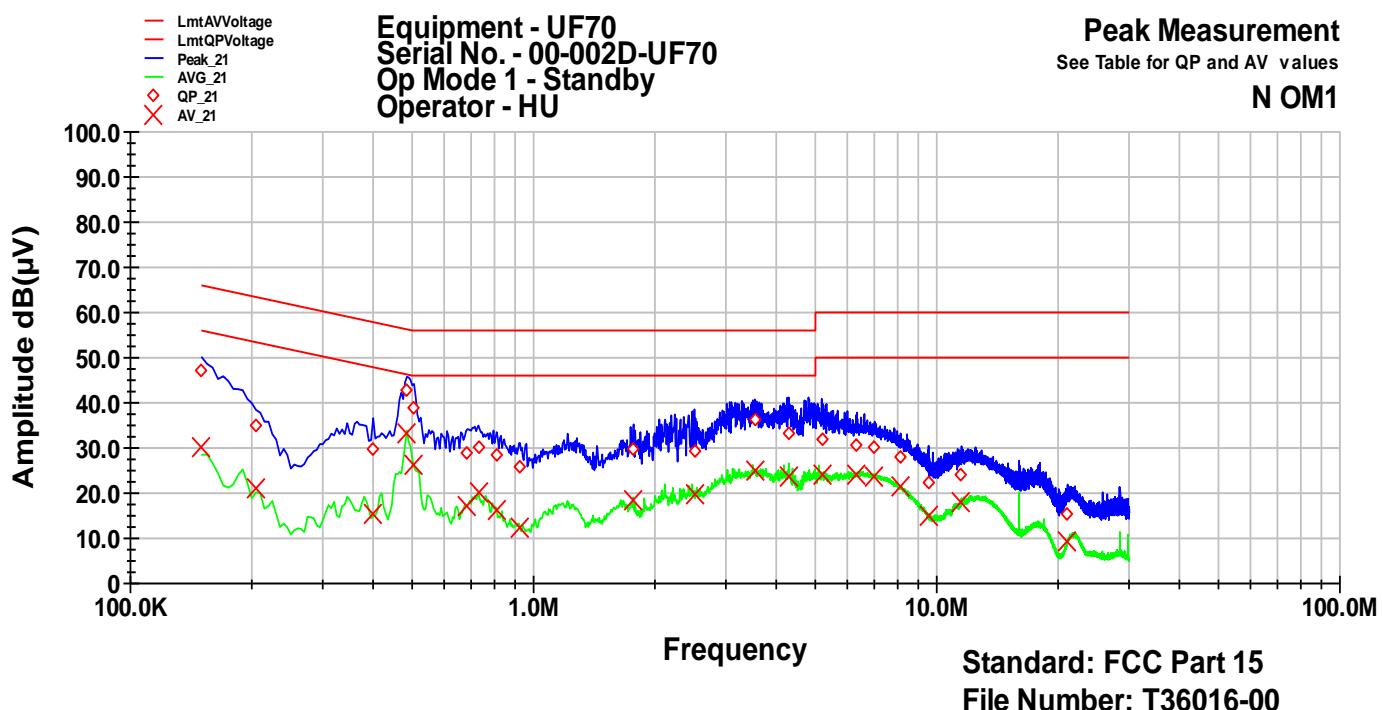

Frequency	QP Level	QP Margin	QP Limit	AV Level	AV Margin	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.15	47.0	-19.0	66.0	30.2	-25.8	56.0
0.205	35.1	-28.3	63.4	21.1	-32.3	53.4
0.4	29.8	-28.1	57.9	15.4	-32.5	47.9
0.485	42.9	-13.3	56.3	33.2	-13.1	46.3
0.505	39.0	-17.0	56.0	26.1	-19.9	46.0
0.685	29.0	-27.0	56.0	17.3	-28.8	46.0
0.73	30.4	-25.6	56.0	20.0	-26.0	46.0
0.81	28.6	-27.4	56.0	16.1	-29.9	46.0
0.925	26.0	-30.0	56.0	12.4	-33.6	46.0
1.77	29.9	-26.1	56.0	18.4	-27.6	46.0
2.505	29.3	-26.7	56.0	19.9	-26.1	46.0
3.54	36.3	-19.7	56.0	25.1	-20.9	46.0
4.29	33.3	-22.7	56.0	23.7	-22.3	46.0
5.18	32.1	-27.9	60.0	24.0	-26.0	50.0
6.335	30.8	-29.2	60.0	23.9	-26.1	50.0
7.01	30.0	-30.0	60.0	23.7	-26.3	50.0
8.13	27.8	-32.2	60.0	21.3	-28.7	50.0
9.54	22.5	-37.5	60.0	15.0	-35.0	50.0
11.51	24.2	-35.8	60.0	17.8	-32.2	50.0
21.095	15.3	-44.7	60.0	9.3	-40.7	50.0

## FCC ID: N5GUF70

### 5.2 20 dB bandwidth

For test instruments and accessories used see section 6 Part **MB**.

#### 5.2.1 Description of the test location

Test location: Shielded Room S5

#### 5.2.2 Photo documentation of the test set-up



#### 5.2.1 Applicable standard

According to FCC Part 15C, Section 15.247(a):

Frequency hopping systems shall have hopping carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 5.2.2 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or the first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

## FCC ID: N5GUF70

### 5.2.3 Test result

Power setting 30.0 dBm:

Channel No.	-20 dB Bandwidth below peak (kHz)
CH 1 (902.25 MHz)	68.0
CH 26 (914.75 MHz)	68.0
CH 52 (927.75 MHz)	68.0

Bandwidth limit according to FCC Part15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	Limit -20 db bandwidth (kHz)
902-928	≥ 50	< 250

The requirements are **FULFILLED**.

**Remarks:** For detailed test result please refer to following test protocol.

---



---





---

## FCC ID: N5GUF70


### 5.2.4 Test protocol

Channel 1  
902.25 MHz

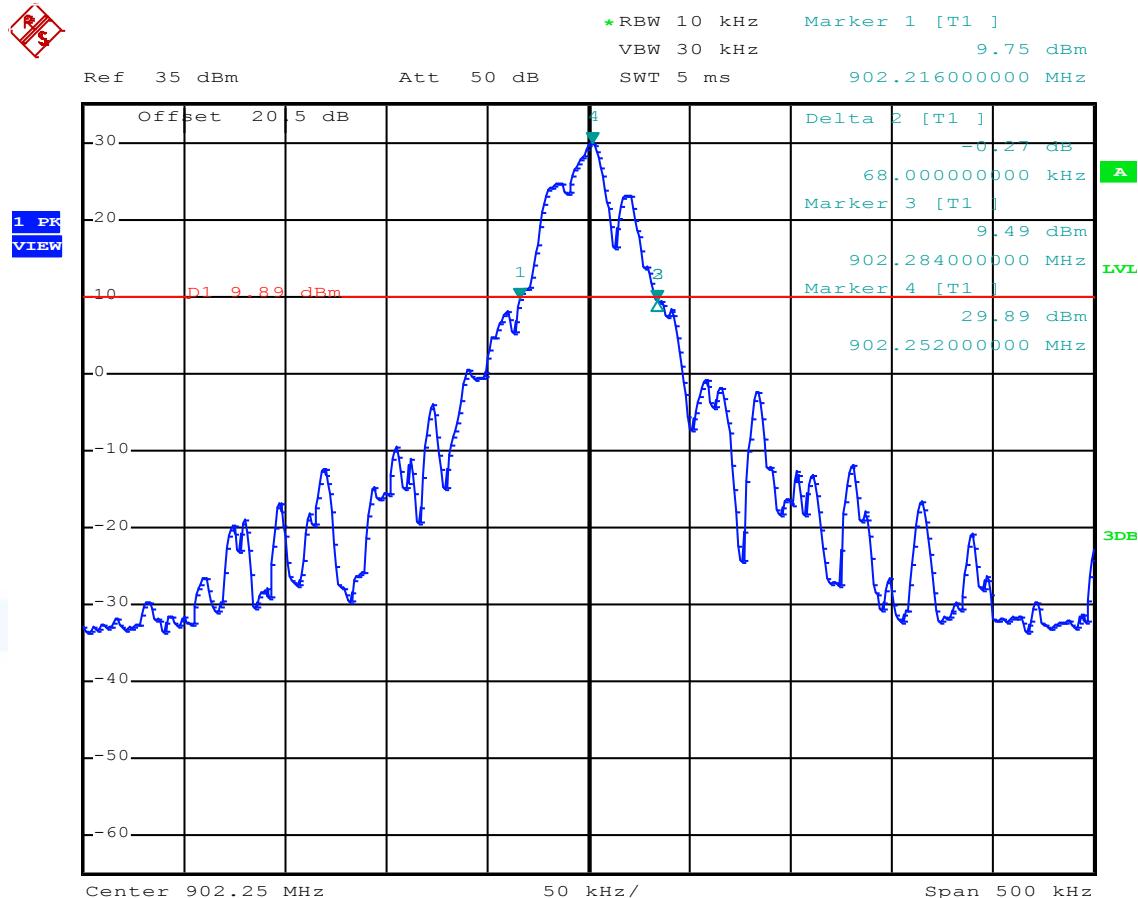

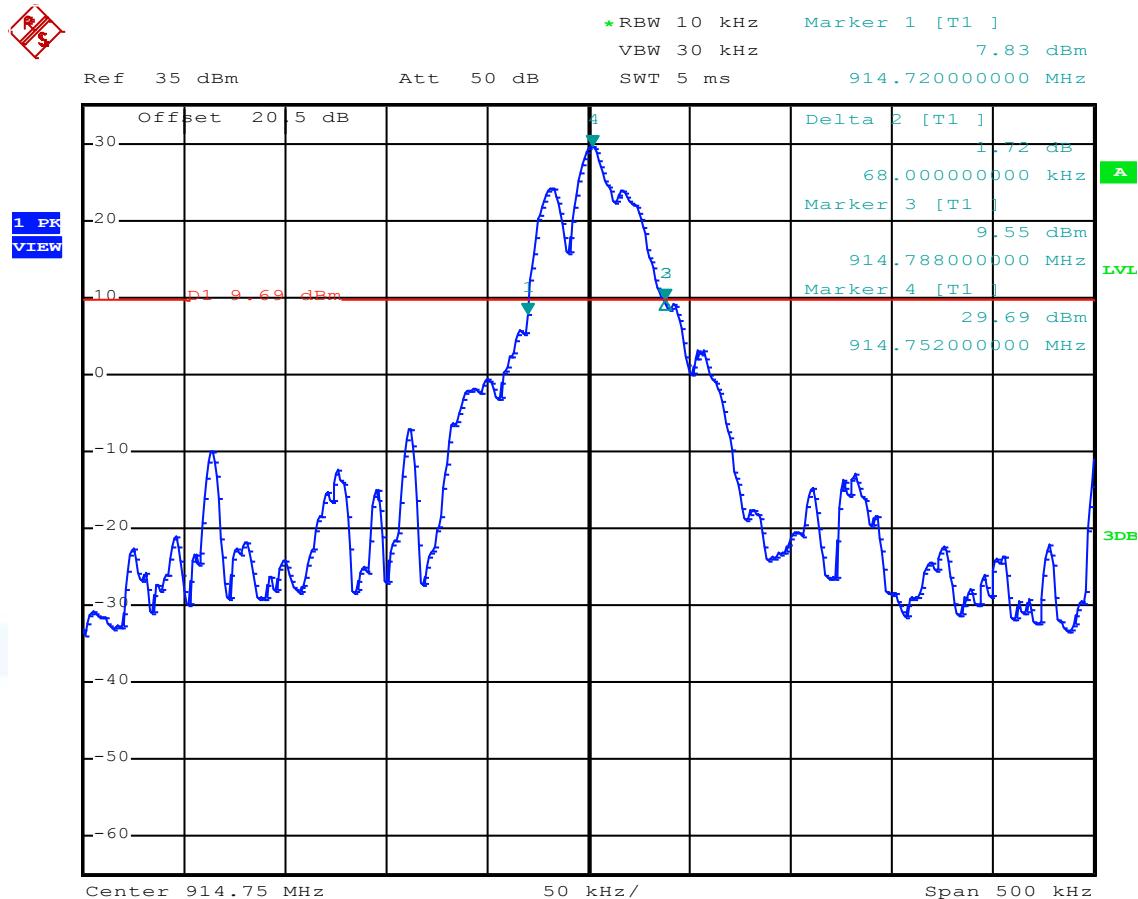**FCC ID: N5GUF70**
**Channel 25**  
**914.75 MHz**


**FCC ID: N5GUF70**

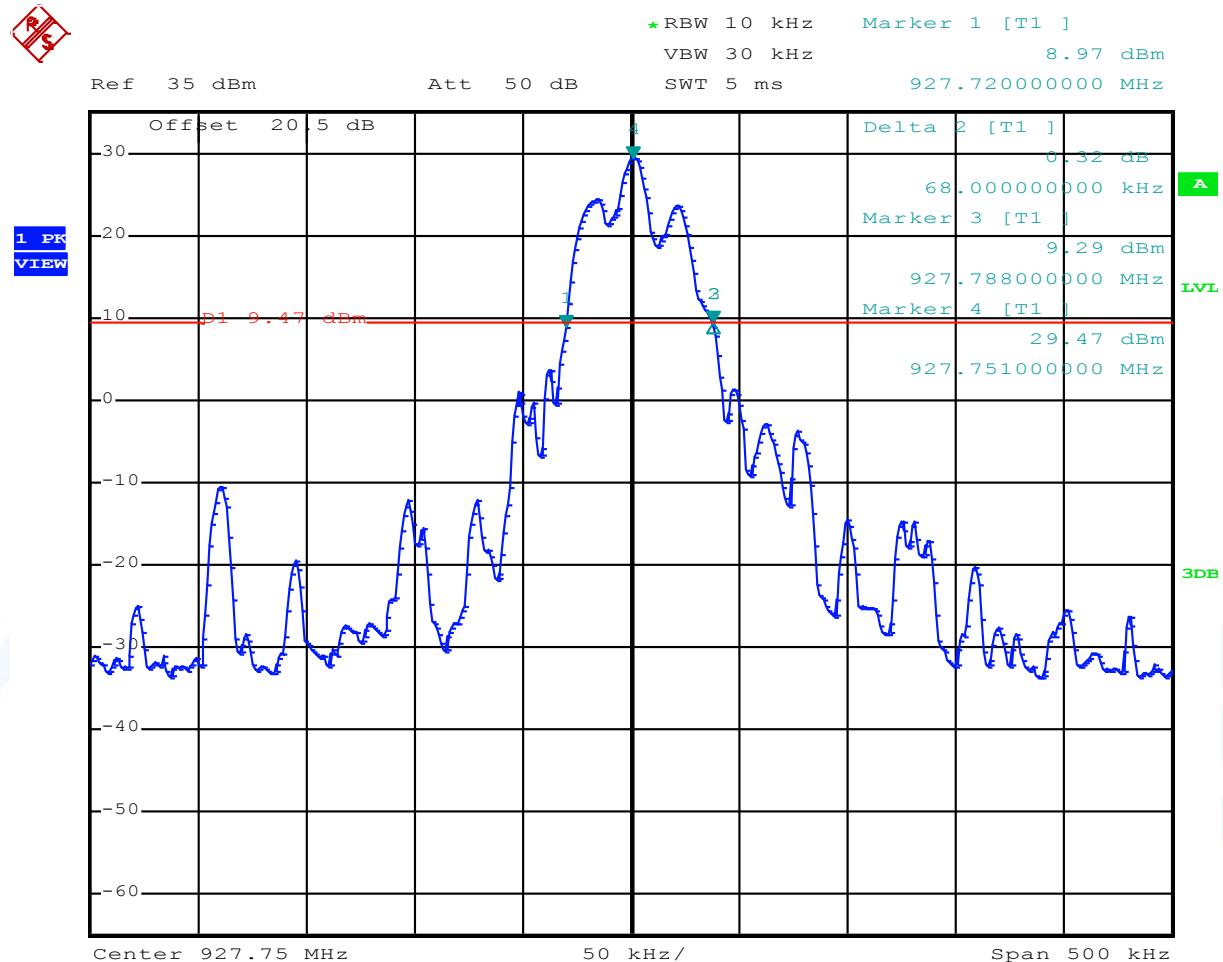 Channel 52  
 927.75 MHz


## FCC ID: N5GUF70


### 5.3 Maximum peak conducted output power

For test instruments and accessories used see section 6 Part CPC 2.

#### 5.3.1 Description of the test location

Test location: Shielded Room S5

#### 5.3.2 Photo documentation of the test set-up

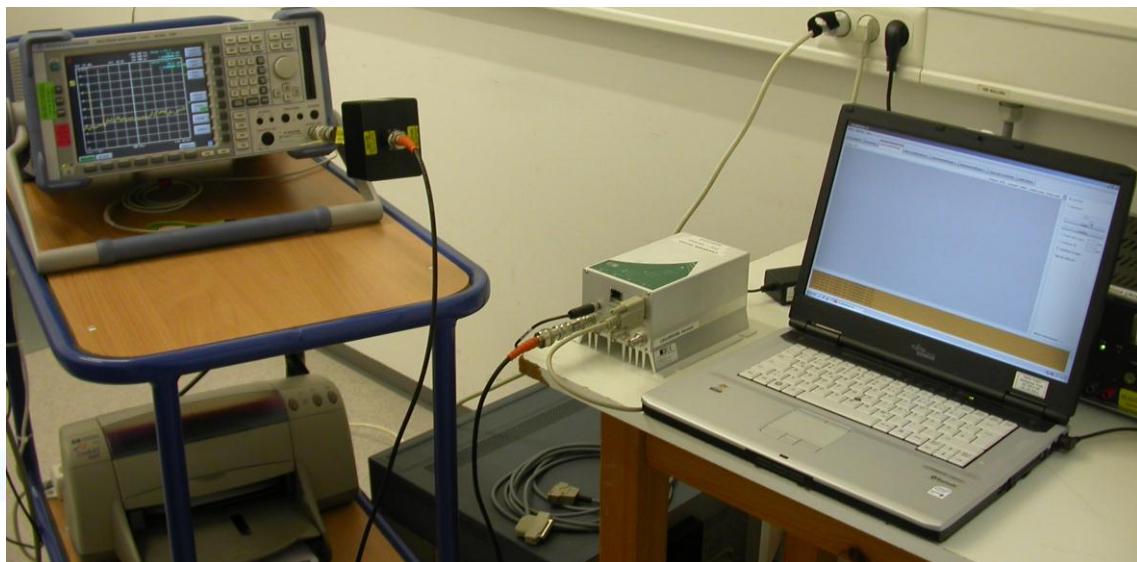

#### 5.3.3 Applicable standard

According to FCC Part 15C, Section 15.247(b)(2):

For frequency hopping systems operating in the 902-928 MHz band the maximum peak conducted output power shall not exceed the limit of 1 watt for systems employing at least 50 hopping channels.

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.3.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode using the assigned frequency.

Spectrum analyser settings:

RBW	100 kHz	Sweep time	5 ms (Auto)
VBW	100 kHz	Power Mode	Max. hold
Detector	Peak	Span	400 kHz

**FCC ID: N5GUF70**
**5.3.5 Test result**

Power setting 30.0 dBm  
=>Antenna MT – 242025/NRH/K, antenna gain: 4.5 dBi

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Delta (dB)
1	902.25	28.32	30.0	-1.68
26	914.75	29.21	30.0	-0.79
52	927.75	28.76	30.0	-1.24

**Note:** Test cable loss and fixed attenuation of 20 dB are included in the analyzer reading (Transducer factor).

Peak Power Limit according to FCC Part 15C, Section 15.247(b)(2):

Frequency (MHz)	Hopping channels	Hop. CH carrier frequ. separation	Peak Power Limit	
			(dBm)	(W)
<b>902-928</b>	<b>≥ 50</b>		<b>30</b>	<b>1.0</b>

The requirements are **FULFILLED**.

**Remarks:**

---



---



---



---

## FCC ID: N5GUF70

### 5.4 Spurious RF conducted emissions

For test instruments and accessories used see section 6 Part **SEC1, SEC2 and SEC3**.

#### 5.4.1 Description of the test location

Test location: Shielded Room S5

#### 5.4.2 Photo documentation of the test set-up



#### 5.4.3 Applicable standard

According to FCC Part 15C, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency band 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

#### 5.4.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode at the assigned frequency.

Spectrum analyzer settings:

RBW	100 kHz
VBW	300 kHz
Detector	Max. peak
Trace:	Max. hold
Sweep time	auto

**FCC ID: N5GUF70**
**5.4.5 Test result**

Power setting 30.0 dBm

<b>Hopping frequency from 902.25 to 927.75 MHz, max. level 29.93 dBm</b>			
Frequency (MHz)	Peak power * (dBm)	Limit (-20 dB) (dBm)	Delta (dB)
1828.0	-39.39	9.93	-49.32

\* Fixed attenuation of 20 dB is included in the Peak power.

 The requirements are **FULFILLED**.

**Remarks:**

All spurious emissions falling in restricted bands have been measured radiated.

For detailed results please refer to following test protocols.


In the frequency range from 9 kHz to 30 MHz no emissions could be measured.

Test was performed in frequency hopping mode from 902.25 to 927.75 MHz.

This mode represents the worst case mode of the EuT.


**FCC ID: N5GUF70**

Conducted RF emission from 9 kHz to 30 MHz

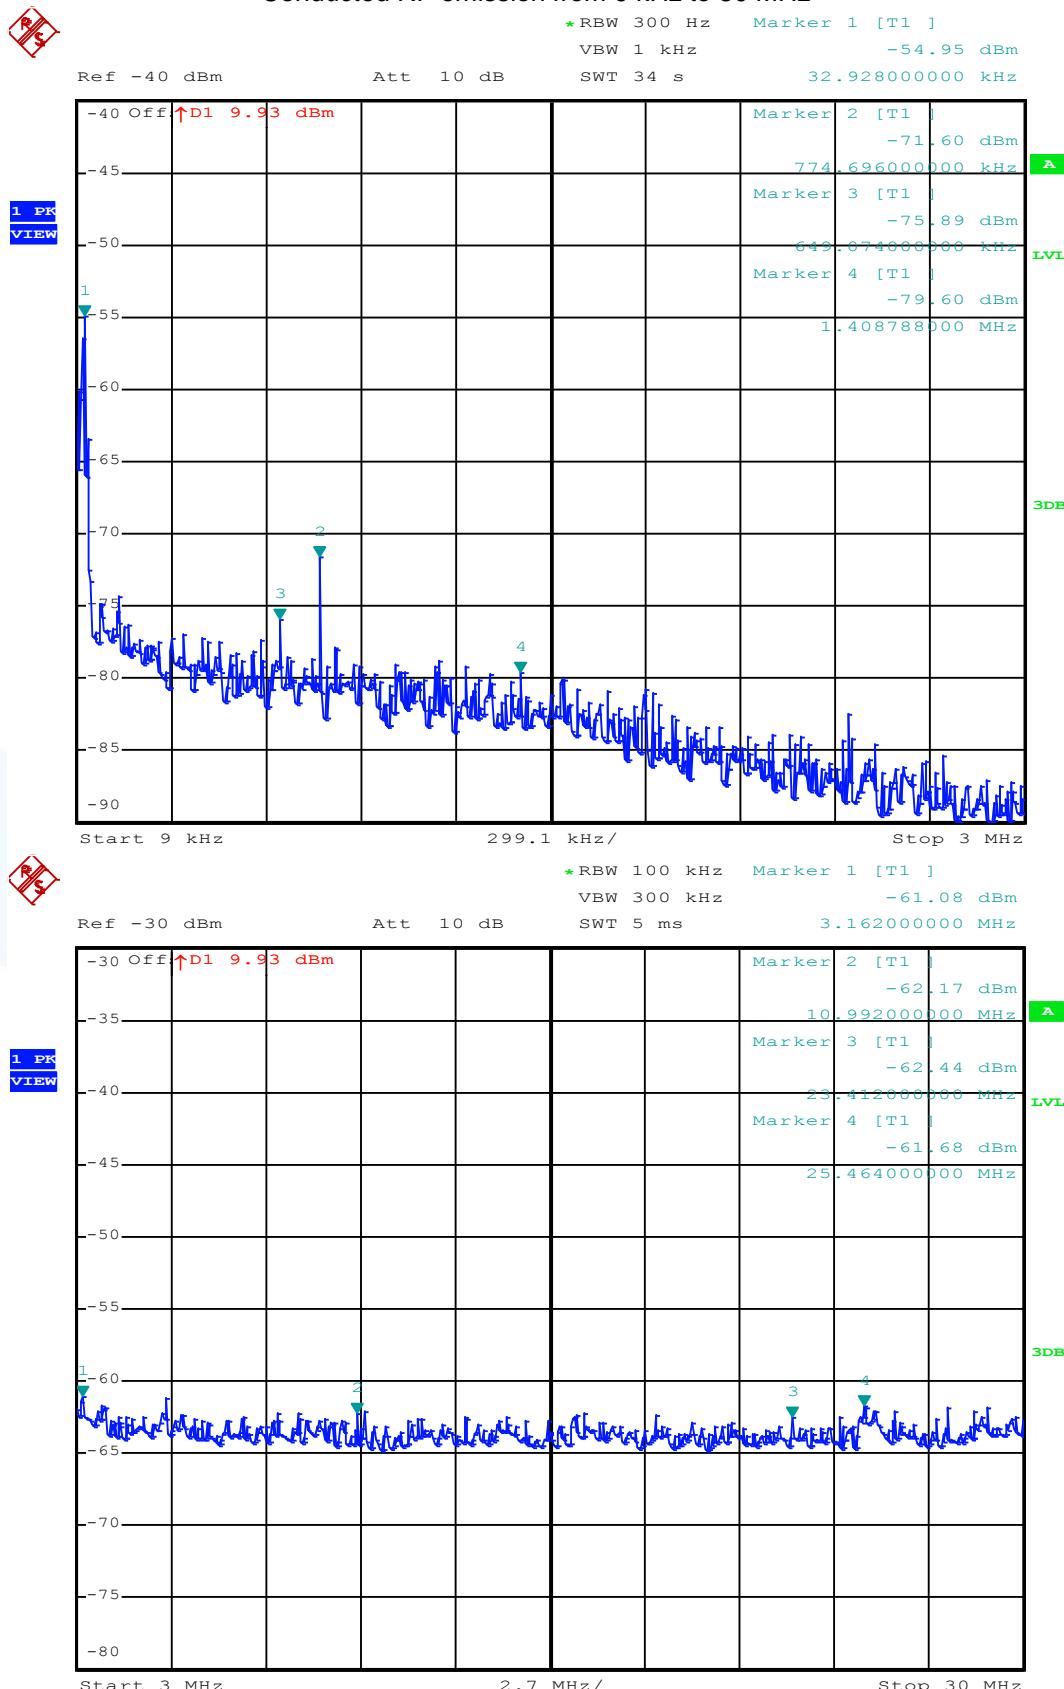


**FCC ID: N5GUF70**

Conducted RF emission from 30 to 1000 MHz

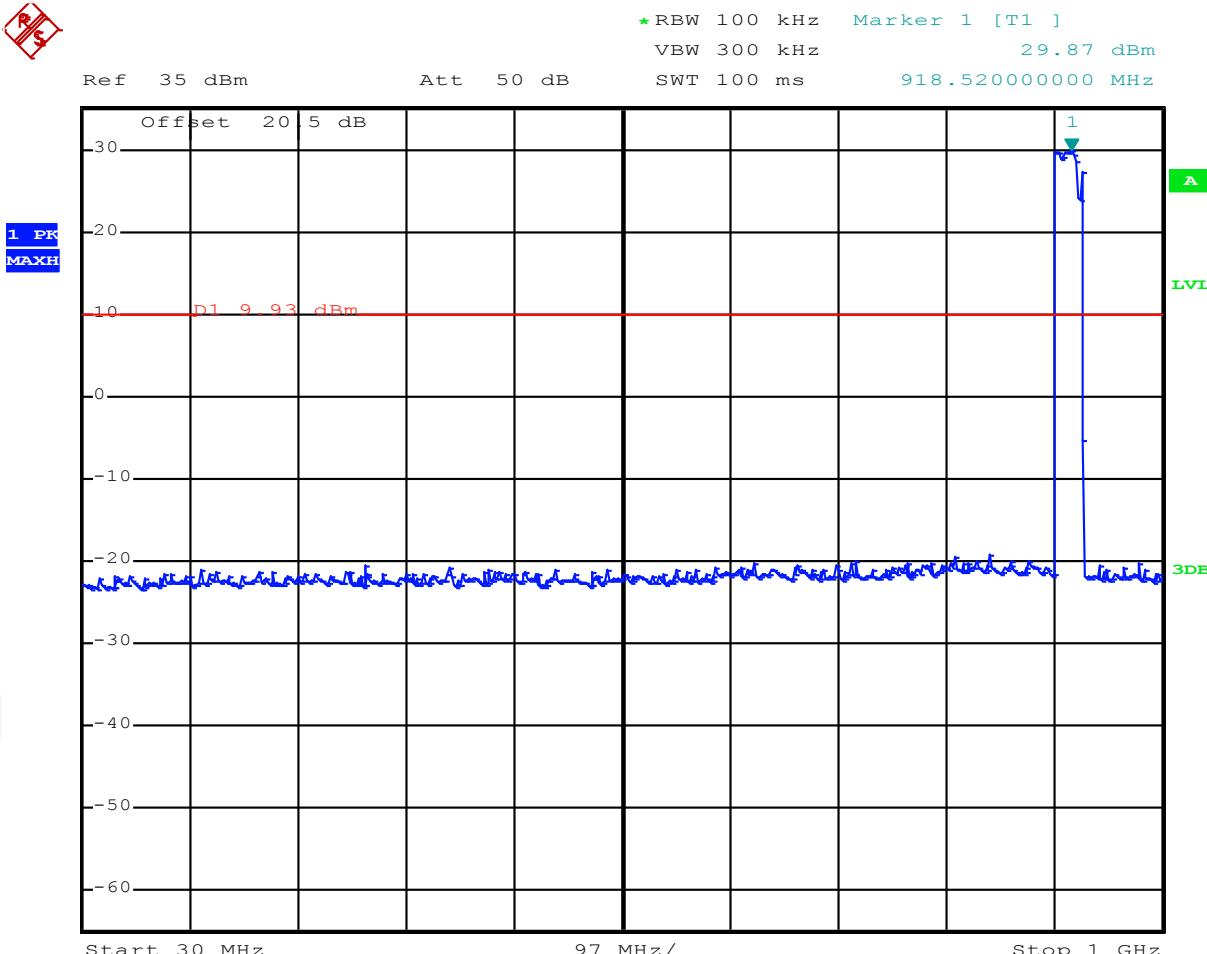


**FCC ID: N5GUF70**

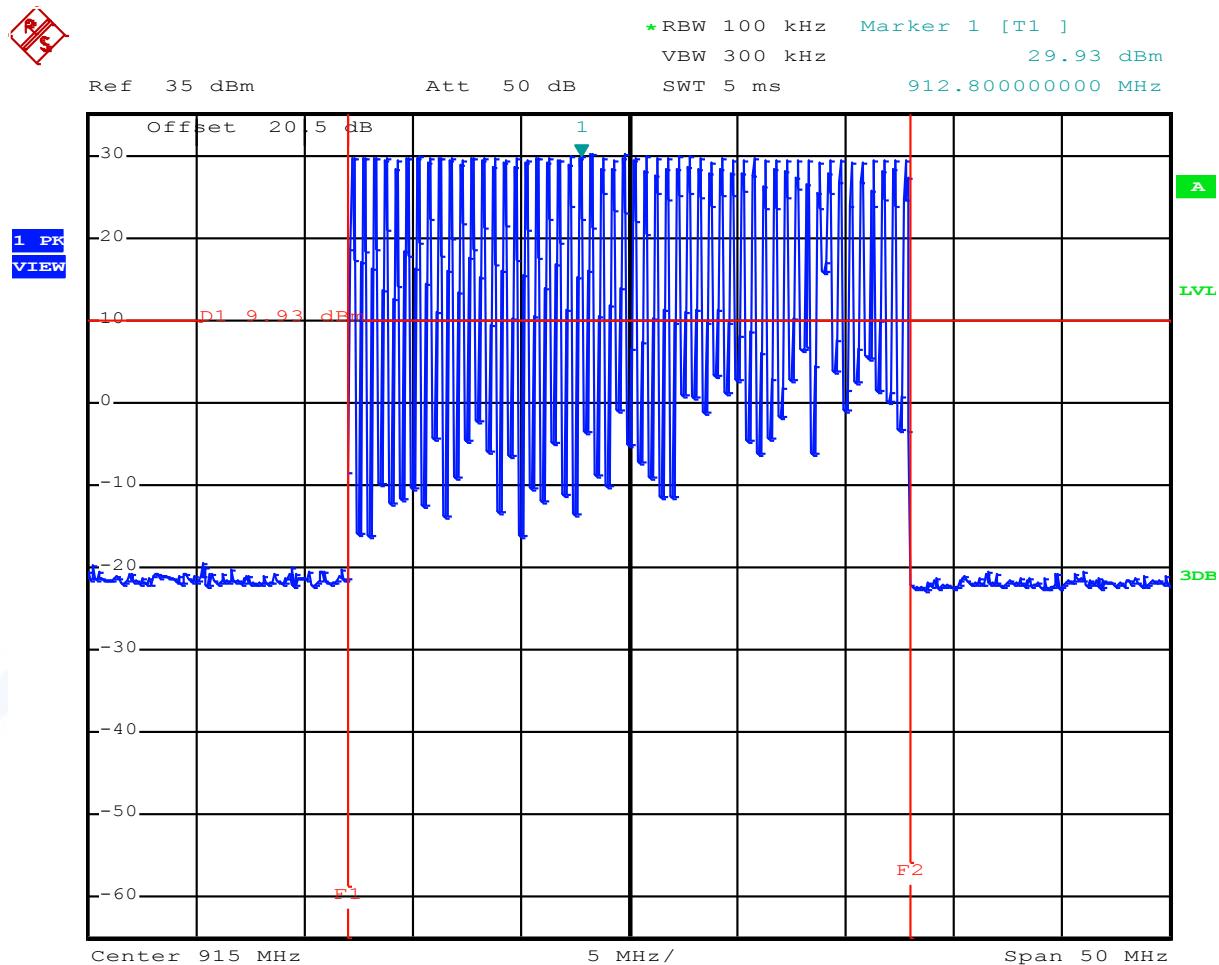 Conducted RF emission from 30 to 1000 MHz  
 (Band edge)


**FCC ID: N5GUF70**

Conducted RF emission from 1 to 10 GHz

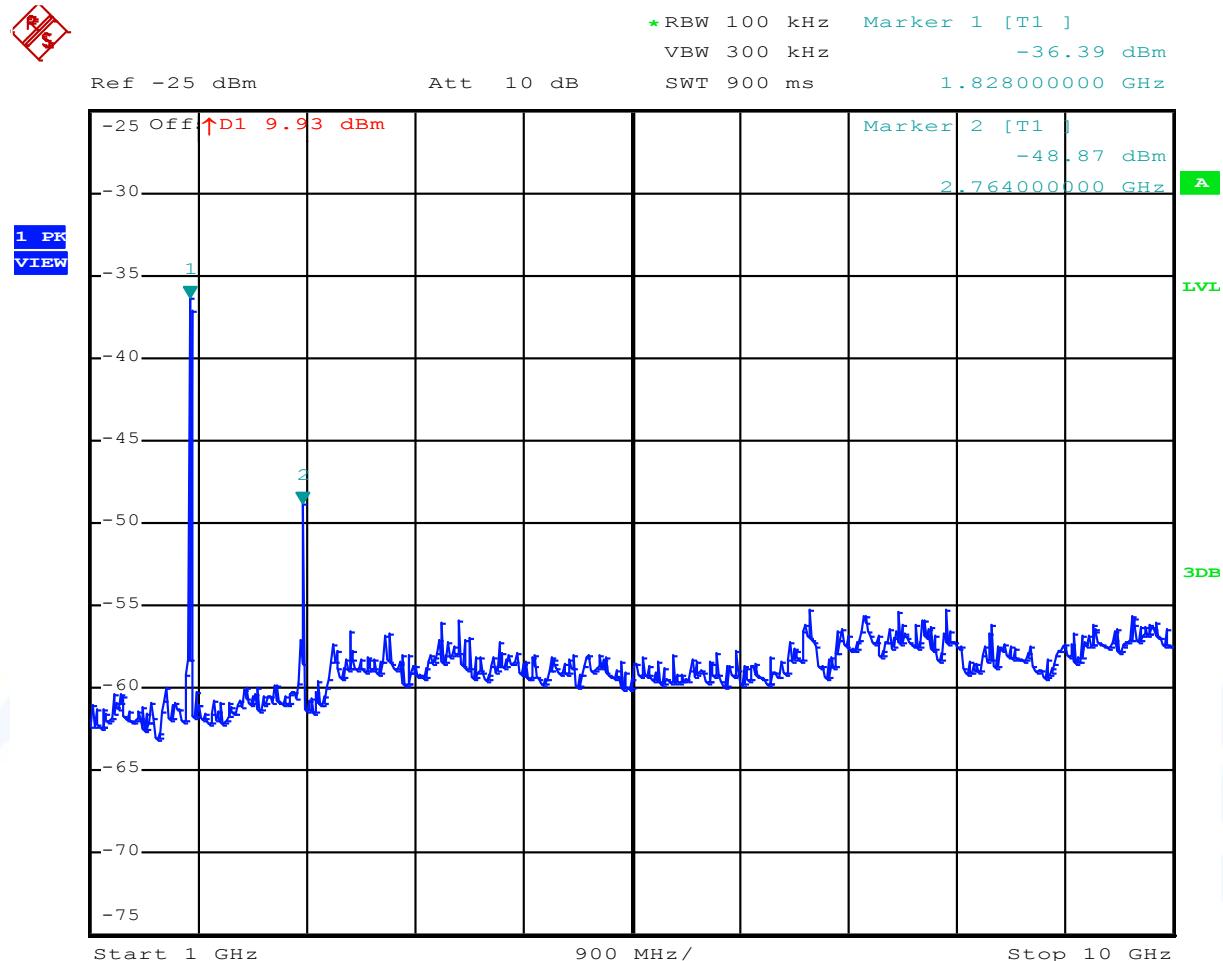

Note: Signal level no. 2 is located in restricted band (2690 – 2900 MHz).

FCC ID: N5GUF70

## 5.5 Spurious radiated emissions

For test instruments and accessories used see section 6 Part **SER 1, SER 2, SER 3**.

### 5.5.1 Description of the test location

Test location: OATS1  
Test distance: 3 metres

Test location: Anechoic Chamber A2  
Test distance: 3 metres

### 5.5.2 Photo documentation of the test set-up



## FCC ID: N5GUF70



### 5.5.3 Applicable standard

According to FCC Part 15, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency bands 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a) (see Section 15.205(c)).

### 5.5.4 Description of Measurement

Radiated spurious emissions from the EUT are measured in the frequency range of 9 kHz to 1000 MHz using a tuned receiver and appropriate broadband linear polarized antennas. The measurements are made with 120 kHz bandwidth and quasi-peak detection (200 Hz, 9 kHz up to 30 MHz). The EUT was placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the equipment under test will be in accordance to ANSI C63.4. The antenna was positioned 3 metres horizontally from the EUT. To locate maximum emissions from the EUT the antenna is shifted in height from 1 to 4 metres, after the EUT is rotated 360 degrees. The measurement scan is made in horizontal and vertical polarization of the antenna.

For the radiated measurement up from 1 GHz to maximum frequency as specified in Section 15.33, a spectrum analyzer and appropriate linear polarized antennas are used. The EUT is placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the EUT will be in accordance to ANSI C63.4. The antenna was positioned 3 m horizontally from the EUT. To locate maximum emissions the EUT was rotated 360 degrees in the fully anechoic chamber. The measurement scan is made in horizontal and vertical polarization of the antenna. For testing above 1 GHz, if the emission level of the EUT in peak mode complies with the average limit is 20 dB lower, then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported.

## FCC ID: N5GUF70

### 5.5.5 Test result

#### 5.5.5.1 Radiated emission test $f < 1$ GHz

In the frequency range from 9 kHz to 30 MHz no radiated emissions could be measured.

In frequency range from 30 MHz to 1 GHz:

The table shows an extract of the critical values:

Frequency (MHz)	Reading Vert. (dB $\mu$ V)	Reading Hor. (dB $\mu$ V)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dB $\mu$ V/m)	Level Hor. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Dlimit (dB)
142,15	5,7		13,1		18,8		43,5	-24,7
154,84	8,6		13,5		22,1		43,5	-21,4
331,78	9,3		17,1		26,4		46,0	-19,6
75,85		12,3		11,3		23,6	40,0	-16,4
120,98		16,8		12,4		29,2	43,5	-14,3
163,07		14,8		14,1		28,9	43,5	-14,6
212,50		18,0		11,8		29,8	43,5	-13,7
39,82		9,0		12,9		21,9	40,0	-18,1
42,09	16,8		14,4		31,2		40,0	-8,8

#### 5.5.5.2 Radiated emission test $f > 1$ GHz

Power setting 30.0 dBm

=>Antenna MT – 242025/NRH/K, antenna gain: 4.5 dBi

Frequency (GHz)	L: PK (dB $\mu$ V)	L: AV (dB $\mu$ V)	Bandwidth (kHz)	Correct. (dB)	L: PK dB( $\mu$ V/m)	L: AV dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
2.710	52.8	40.9	1000	-9.6	43.1	31.3	54.0	-22.7

\*) Average values were measured with spectrum analyzer by the following settings

RBW: 1 MHz

VBW: 10 Hz

Sweep: Auto

Radiated limits according to FCC Part 15C, Section 15.209(a) for spurious emissions:

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (metres)
	( $\mu$ V/m)	dB( $\mu$ V/m)	
0.009 - 0.490	2400/F(kHz)		300
0.490 - 1.705	24000/F(kHz)		30
1.705 - 30	30	29,5	30
30 - 88	100	40	3
88 - 216	150	43,5	3
216 - 960	200	46	3
Above 960	500	54	3

## FCC ID: N5GUF70

### Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209: (Refer to section 5.5.5.1)

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

The requirements are **FULFILLED**.

**Remarks:** During the test the EUT was set into TX continuous mode with normal modulation.

The measurement was performed up to the 10<sup>th</sup> harmonic (10000 MHz).

Test was performed in frequency hopping mode from 902.25 to 927.75 MHz.

This mode represents the worst case mode of the EuT.

## FCC ID: N5GUF70

### 5.6 Hopping sequence

Requirement according to FCC Part 15C, Section 15.247(a):

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.


**Remarks:** The channel is represented by a pseudo-random hopping sequence hopping through the 52

RF-channels.

For detailed information about the hopping sequence, please refer to

“Theory of Operation Manual”.

#### 5.6.1 Test protocol

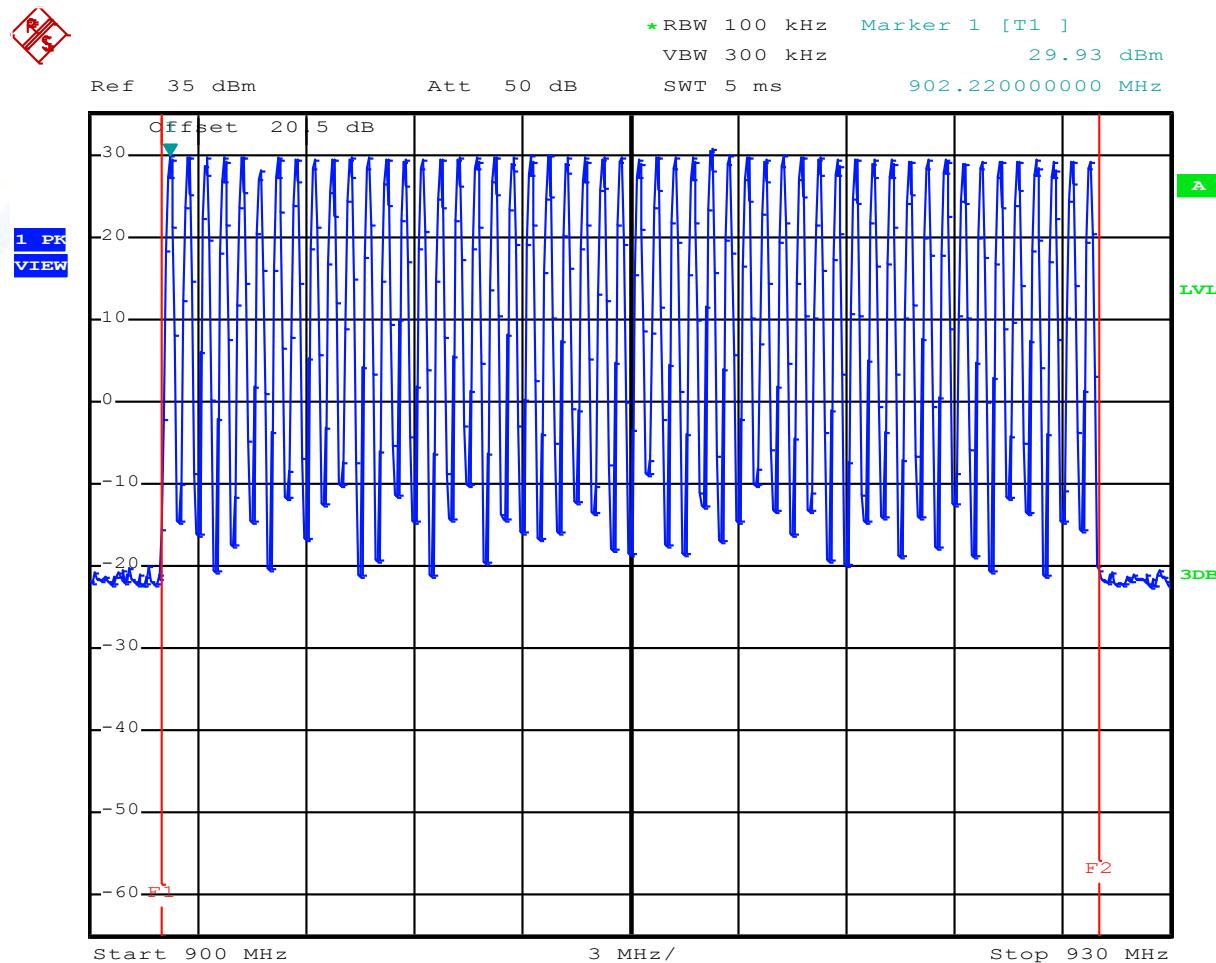

## FCC ID: N5GUF70

### 5.7 Equal hopping frequency use

Requirement according to FCC Part 15C, Section 15.247(a):  
Each frequency must be used equally on the average by each transmitter.

**Remarks:** The device fulfills the requirement according to FCC Part 15C, Section 15.247(a).  
The manufacturer declares in the system manual that this function is controlled via software.  
For detailed information about the hopping sequence, please refer to  
“Theory of Operation Manual”.

### 5.8 Receiver input bandwidth

Requirement according to FCC Part 15C, Section 15.247(a):  
The system receivers shall have input bandwidth that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signal.

**Remarks:** The receiver bandwidth is equal to the transmitter bandwidth in the 52 hopping channel mode.  
(Declared by the manufacturer.)  
For detailed information about the hopping sequence, please refer to  
“Theory of Operation Manual”.

## FCC ID: N5GUF70

### 5.9 Dwell time

For test instruments and accessories used see section 6 Part DC.

#### 5.9.1 Description of the test location

Test location: Shielded Room S5

#### 5.9.2 Photo documentation of the test set-up



#### 5.9.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(i):

Frequency hopping systems operating in the 902-928 MHz band: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

#### 5.9.4 Description of Measurement

The measurement was done using a spectrum analyser in time domain function and able to store the maximum time of a period. This time period has been stored and added up the appropriate time intervals the hopping system has applied this channel.

**FCC ID: N5GUF70**
**5.9.5 Test result**

Channel frequency (MHz)	Pulse Time (ms)	Number of Bursts (in 1 time period)	Dwell time (ms)
914.75	380	1	380

Requirement according to FCC Part15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	time of one period (s)	Limit dwell time, AV (ms)
902-928	≥ 50	20	< 400

The requirements are **FULFILLED**.

**Remarks:** For detailed test result please refer to following test protocol.

---



---




---

## FCC ID: N5GUF70

### 5.9.6 Test protocol

Time of occupancy (Dwell time)

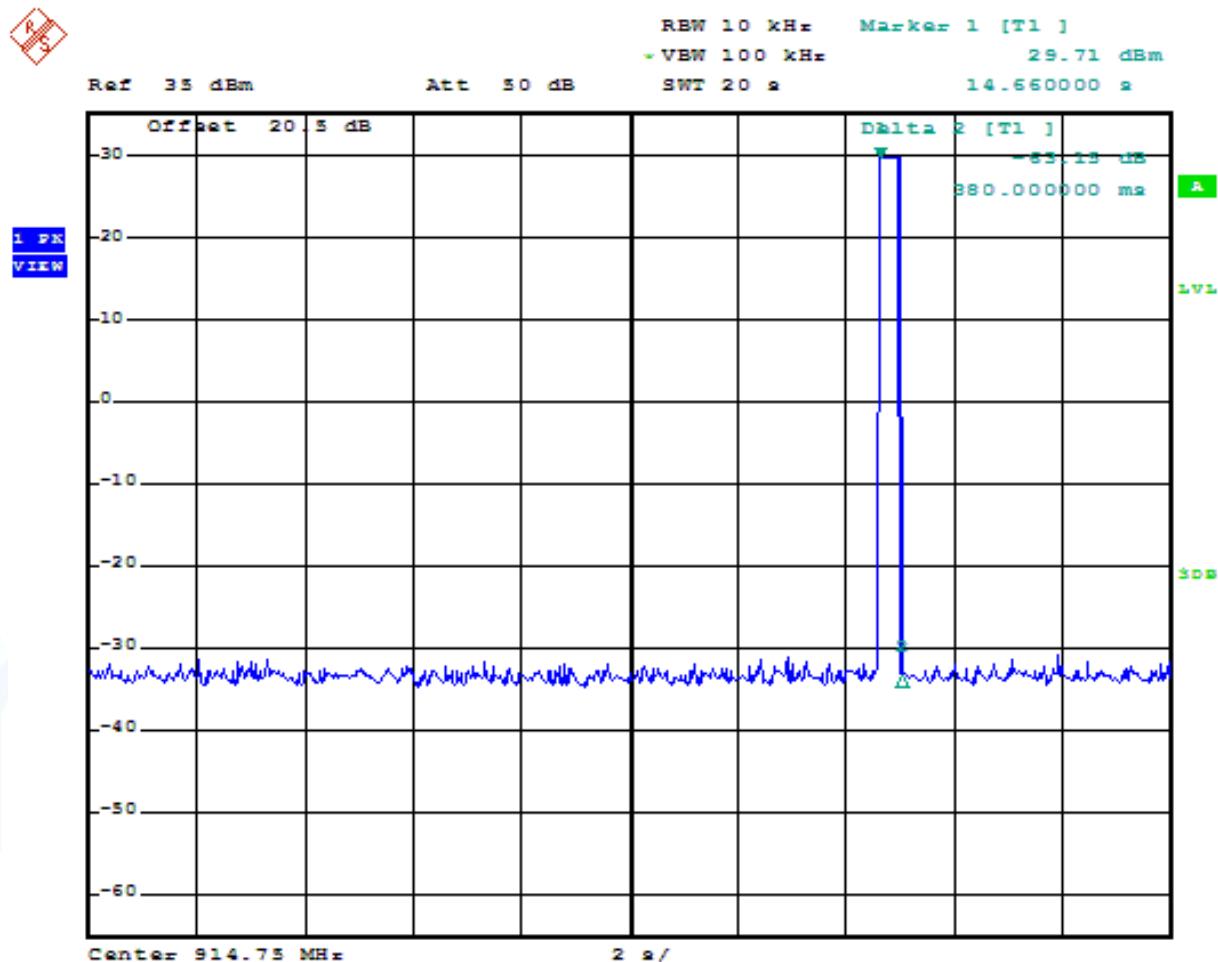

## FCC ID: N5GUF70


### 5.10 Channel separation

For test instruments and accessories used see section 6 Part **MB**.

#### 5.10.1 Description of the test location

Test location: Shielded Room S5

#### 5.10.2 Photo documentation of the test set-up

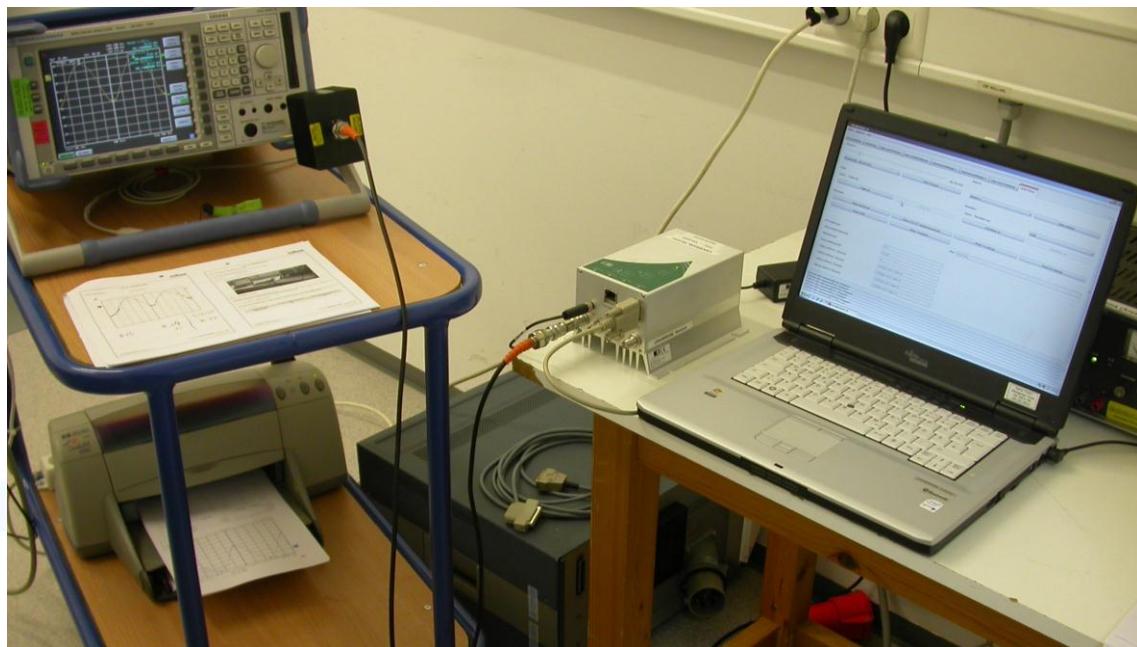

#### 5.10.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 5.10.4 Description of Measurement

This measurement was done by using a spectrum analyser. The Span of the analyzer was set wide enough to capture 2 frequencies. The result of the channel separation was compared with the 20 dB bandwidth and recorded.

#### 5.10.5 Test result

Channel 1 (MHz)	Channel 2 (MHz)	Channel separation (kHz)
902.25	902.75	500

## FCC ID: N5GUF70

Limit according to FCC Part 15C, Section 15.247(a):


Frequency (MHz)	Hopping channels	Limit channel separation (kHz)
All systems		> 25 kHz or 20 dB bandwidth, which ever is greater
2400-2483.5	$\geq 15$	

The requirements are **FULFILLED**.

**Remarks:** For detailed test result please refer to following test protocol.

### 5.10.6 Test protocol

#### Channel separation

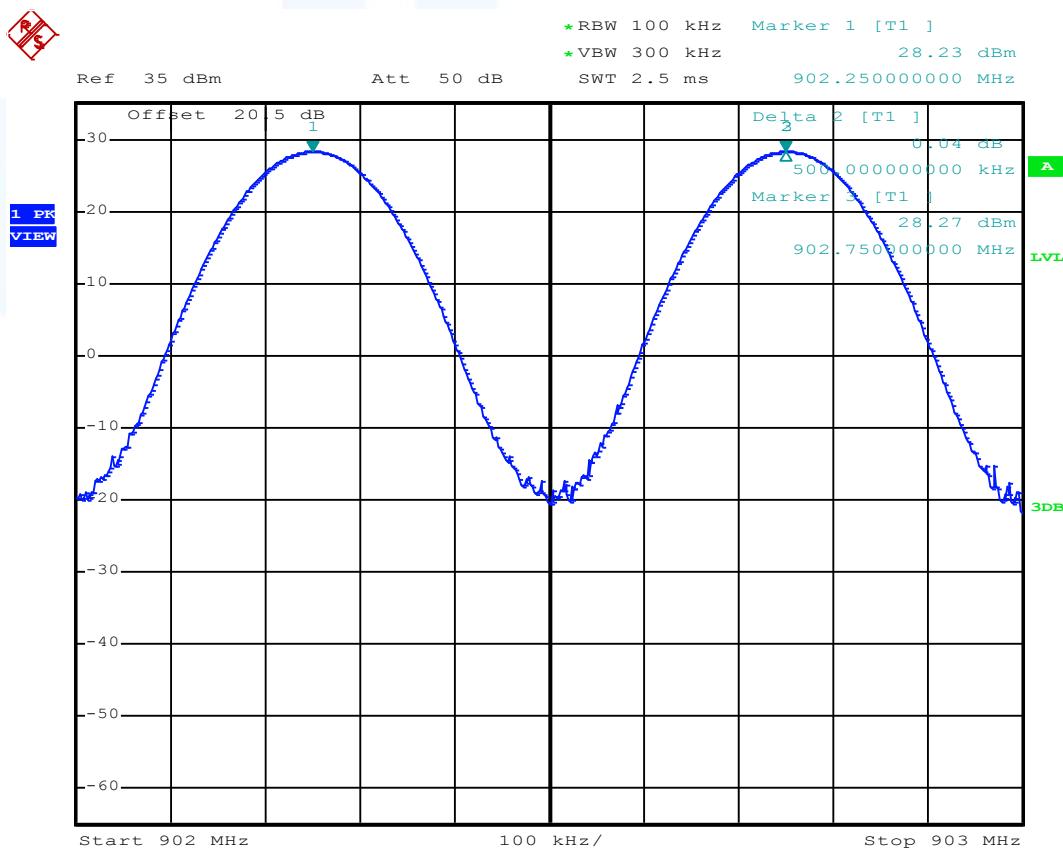

## FCC ID: N5GUF70

### 5.11 Quantity of hopping channels

For test instruments and accessories used see section 6 Part **MB**.

#### 5.11.1 Description of the test location

Test location: Shielded Room S5

#### 5.11.2 Photo documentation of the test set-up



#### 5.11.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(1)(i):

For frequency hopping systems operating in the 902-928 MHz band: If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.

#### 5.11.4 Description of Measurement

This measurement was done by using a spectrum analyser. The EuT was transmitting at its maximum data rate. The Span of the analyzer was set wide enough to capture the frequency band from 902-928 MHz.

#### 5.11.5 Test result

Hopping channel frequency range	Quantity of hopping channels value	Quantity of hopping channels minimum limit
902-928 MHz	52	50

**FCC ID: N5GUF70**

Limit according to FCC Part 15C, Section 15.247(1):

Frequency range (MHz)	LIMIT (Quantity of Hopping Channels)			
	20dB Bandwidth < 250kHz	20dB Bandwidth > 250kHz	20dB Bandwidth < 1 MHz	20dB Bandwidth > 1MHz
902 - 928	50	25	---	---

The requirements are **FULFILLED**.

**Remarks:** For detailed test result please refer to following test protocol.

---

---


---

---

## FCC ID: N5GUF70

### 5.11.6 Test protocol

#### Quantity of hopping channel

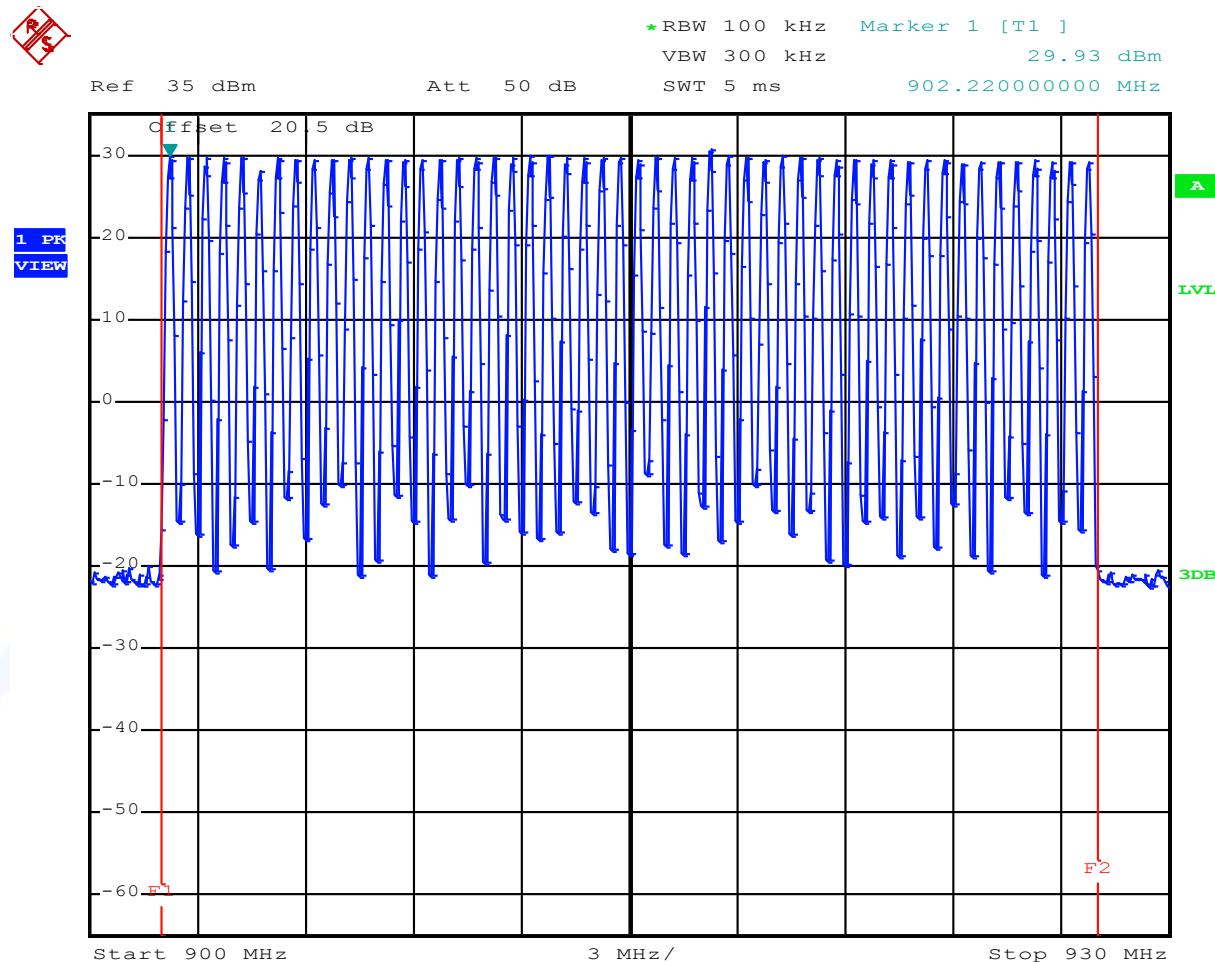

## FCC ID: N5GUF70

### 5.12 Antenna application - Detailed photos see Attachment A

#### 5.12.1 Applicable standard

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has reverse TNC plugs to connect the defined antennas supplied by the manufacturer.  
All supplied antennas meet the requirements of part 15.203 and 15.204.

#### 5.12.2 Antenna requirements

According to FCC Part 15C, Section 15.247 (b)(4):

The conducted output power limit specified in paragraph (b) of 15.247 is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2) and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

## FCC ID: N5GUF70

### 5.13 Maximum permissible exposure (MPE) – See Attachment B

For test instruments and accessories used see section 6 Part CPC 2.

#### 5.13.1 Description of the test location

Test location: None

#### 5.13.2 Applicable standard

According to FCC Part 15, Section 15.247(i):

Systems operating under the provisions of this section shall be operated in a manner that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

The test methods used comply with ANSI/IEEE C95.1, "IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz".

This test report shows the compliance with the limits for Maximum Permissible Exposure (MPE) specified in FCC Part 1, Section 1.1310 and the criteria to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in FCC Part 1, Section 1.1307(b).

#### 5.13.3 Description of Measurement

The maximum total power input to the antenna has been measured conducted as described in clause 5.3 of this document. Through the Friis transmission formula, the known maximum gain of the antenna and the maximum power, the MPE can be calculated in a defined distance away from the product.

$$\text{Friis transmission formula: } P_d = \frac{P_{out} * G}{4 * \Pi * r^2}$$

where

$P_d$  = power density ( $\text{mW/cm}^2$ )

$P_{out}$  = output power to antenna (mW)

G = gain of antenna (linear scale)

r = distance between antenna and observation point (cm)

**Remarks:** For detailed test result please refer Attachment B.

---

---

---

---

**FCC ID: N5GUF70**

## **6 USED TEST EQUIPMENT AND ACCESSORIES**

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	ESHS 30 ESH 2 - Z 5 N-4000-BNC N-1500-N ESH 3 - Z 2 SP 103 /3.5-60	02-02/03-05-002 02-02/20-05-004 02-02/50-05-138 02-02/50-05-140 02-02/50-05-155 02-02/50-05-182	30/06/2012 12/05/2012 05/10/2012	30/06/2011 12/05/2011 09/07/2012	09/07/2012	09/01/2012 05/04/2012
CPC 2	FSP 30 Inmet 18N50W-20 dB	02-02/11-05-001 02-02/50-10-001	05/10/2012	05/10/2011		
DC	FSP 30 Inmet 18N50W-20 dB	02-02/11-05-001 02-02/50-10-001	05/10/2012	05/10/2011		
MB	FSP 30 Inmet 18N50W-20 dB	02-02/11-05-001 02-02/50-10-001	05/10/2012	05/10/2011		
SEC 1-3	FSP 30 WHJS 1000-10EE Inmet 18N50W-20 dB	02-02/11-05-001 02-02/50-05-070 02-02/50-10-001	05/10/2012	05/10/2011		
SER 1	FMZB 1516 ESCI S10162-B KK-EF393-21N-16 NW-2000-NB	01-02/24-01-018 02-02/03-05-005 02-02/50-05-031 02-02/50-05-033 02-02/50-05-113	21/11/2012	21/11/2011	16/02/2013	16/02/2012
SER 2	ESVS 30 VULB 9168 S10162-B KK-EF393-21N-16 NW-2000-NB	02-02/03-05-006 02-02/24-05-005 02-02/50-05-031 02-02/50-05-033 02-02/50-05-113	20/06/2012 16/03/2013	20/06/2011 16/03/2012	16/09/2012	16/03/2012
SER 3	FSP 30 AFS4-01000400-10-10P-4 AMF-4F-04001200-15-10P AFS5-12001800-18-10P-6 3117 Sucoflex N-1600-SMA Sucoflex N-2000-SMA	02-02/11-05-001 02-02/17-05-003 02-02/17-05-004 02-02/17-06-002 02-02/24-05-009 02-02/50-05-073 02-02/50-05-075	05/10/2012 16/02/2013	05/10/2011 16/02/2012		