



**SGS-CSTC Standards Technical
Services (Shanghai) Co., Ltd.**

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5678
ee.shanghai@sgs.com

Report No.: SHEM121200187204
Page 1 of 51

FCC Part 15E TEST REPORT

Application No. :	SHEM1212001872RF
Applicant:	Signeo International Limited
FCC ID:	N5J-SOULP910B
IC :	10303A-SOULP910B
Equipment Under Test (EUT):	
NOTE: The following sample(s) submitted was/were identified on behalf of the client as	
Product Name:	Portable Wireless Entertainment System
Brand Name:	Not supplied by the client
Model:	P910B
Added Model:	N/A
Standards:	FCC PART 15 Subpart C: 2012
Date of Receipt:	Dec.31, 2012
Date of Test:	Feb.26, 2013 to Apr.13, 2013
Date of Issue:	Apr.22, 2013
Test Result :	PASS *

*In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Joe
Apr. 2013

Tony Wu
E&E Section Manager

SGS-CSTC (Shanghai) Co., Ltd.

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	/	Apr.22, 2013	/	Original

Authorized for issue by:				
Engineer		Zenger Zhang		Zenger Zhang
		Print Name		
Clerk		Amy Wang		Amy Wang
		Print Name		
Reviewer		Keny Xu		Keny. xu
		Print Name		



3 Test Summary

TEST ITEM	FCC REFERANCE	IC REFERANCE	Test Procedure	RESULT
Power line conducted emission	15.407(b)(6) 15.207	RSS-Gen Issue 8 Clause 7.2.4	ANSI C63.4,2009	Pass
Peak Transmit Power	15.407(a)(1)	RSS-210 Issue 8 Annex 9	KDB 789033 D01 v01r02 C)	Pass
Peak Power Spectral Density	15.407(a)(1)	RSS-210 Issue 8 Annex 9	KDB 789033 D01 v01r02 D)	Pass
Peak Power Excursion	15.407(a)(6)	RSS-210 Issue 8 Annex 9	KDB 789033 D01 v01r02 F)	Pass
Electric Field Strength Spurious Emissions	15.407(b)(1)(6)(7) 15.205 15.209	RSS-210 Issue 8 Annex 9	KDB 789033 D01 v01r02 G)2)	Pass
Radiated Emission BandEdge	15.407(b)(5)(7) 15.205	---	KDB 789033 D01 v01r02 G)1)	Pass
Frequency stability	FCC Part15 407 (g)	---	----	Pass
Occupied bandwidth	---	RSS-Gen Issue 3 Clause 4.6.1	RSS-Gen Issue 3 Clause 4.6.1	Tested

4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 DETAILS OF E.U.T.	5
5.3 DESCRIPTION OF SUPPORT UNITS	5
5.4 ACCESSORIES OF PRODUCT:	6
5.5 DETAILS OF TEST MODE	6
5.6 TEST LOCATION	7
5.7 TEST FACILITY	7
6 EQUIPMENTS USED DURING TEST	8
7 TEST RESULTS	10
7.1 E.U.T. OPERATION	10
7.2 CONDUCTED EMISSIONS ON MAINS TERMINALS	11
7.3 PEAK TRANSMIT POWER	15
7.4 PEAK POWER SPECTRAL DENSITY	19
7.5 PEAK POWER EXCURSION	23
7.6 ELECTRIC FIELD STRENGTH SPURIOUS EMISSIONS	27
7.7 RADIATED EMISSION BAND EDGE	35
7.8 FREQUENCY STABILITY	44
7.9 OCCUPIED BANDWIDTH TEST	46
8 TEST SETUP PHOTOGRAPHS	50
9 EUT CONSTRUCTIONAL DETAILS	50
END	44

5 General Information

5.1 Client Information

Applicant :	Signeo International Limited
Applicant Address:	6/F, Enterprise Square Three, 39 Wang Chiu Road, Kownloon Bay, Hong Kong
Manufacturer:	Not supplied by the client
Manufacturer Address:	Not supplied by the client
Factory:	Not supplied by the client

5.2 Details of E.U.T.

EUT Name:	Portable Wireless Entertainment System				
Brand Name:	Not supplied by the client				
Model No:	P910B				
Power Supply:	AC 100V-240V				
Test Band and Channels :	5.2GHz Band Channel Description:				
	Channel of Tranmitter	Frequency(MHz)			
	Low	5180			
	Mid	5210			
	High	5240			
Modulation Type:	QPSK				
Antenna Type:	Integral antenna(Antenna Gain 2.0dBi)				

5.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.	Supplied By
iPhone	Apple	A1332	N/A	SGS
Speaker	Guangdong Shantou Zhongwang Electronics Co., Ltd.	CT-338	N/A	SGS
USB memory	Kingston	8G	N/A	SGS

5.4 Accessories of Product:

Adapter:	Manufacturer:	N/A	
	Model No.:	GM150-2400600	
	Rated Input:	AC 100V-240V 50-60Hz 2.5A	
	Rated Output:	DC24.0V 6A	
	Cable length:	AC port:	180cm (3 wires)
		DC port:	150 cm

5.5 Details of Test Mode

Test Mode	Description of Test Mode
Tri Band Mode	Keep the EUT to continue transmitting.

5.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
No.588 West Jindu Road, Songjiang District, Shanghai, China.201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.

6 Equipments Used during Test

 Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2012-04-13	2013-04-12
2	Line impedance stabilization network (LISN)	SCHWARZBECK	NSLK8127	8127-490	2012-11-15	2013-11-14
3	Line impedance stabilization network (LISN)	ETS	3816/2	00034161	2012-11-15	2013-11-14

 Radiated Spurious Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2012-06-02	2013-06-01
2	Antenna	SCHWARZBECK	VULB9168	9168-313	2012-11-15	2013-11-14
3	CONTROLLER	INNCO	CO200	474	2012-11-15	2013-11-14
4	Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2012-11-15	2013-11-14
5	Antenna	SCHWARZBECK	BBHA9170	9170-373	2012-11-15	2013-11-14
6	Low nosie amplifier	LNA6900	TESEQ	71033	2012-11-15	2013-11-14

 RF Conducted Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2012-06-03	2013-06-01
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2012-06-03	2013-06-01
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2012-06-03	2013-06-01
4	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2012-06-03	2013-06-01
5	Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91703 73	2012-11-15	2013-11-14
6	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2012-10-09	2013-10-08
7	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co.;Ltd	BY-2009P	--	2012-10-09	2013-10-08
8	CLAMP METER	FLUKE	316	86080010	2012-06-03	2013-06-01
9	Thermo-Hygrometer	ZHICHEN	ZC1-2	01050033	2012-10-09	2013-10-08

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

10	High-low temperature cabinet	Shanghai YuanZhen	GW2050	--	2012-06-03	2013-06-01
11	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT1800.0/2000.0-0.2/40-5SSK	11	2012-06-03	2013-06-01
12	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT800.0/880.0-0.2/40-5SSK	9	2012-06-03	2013-06-01
13	High pass Filter	FSCW	HP 12/2800-5AA2	19A45-02	2012-06-03	2013-06-01
14	Low nosie amplifier	TESEQ	LNA6900	70133	2012-06-03	2013-06-01
15	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2012-06-03	2013-06-01
16	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2012-06-03	2013-06-01

7 Test Results

7.1 E.U.T. Operation

Input voltage: AC 120V

Operating Environment:

Temperature: 25.0 °C

Humidity: 45 % RH

Atmospheric Pressure: 1013 mbar

EUT Operation: The EUT has been tested under operating condition.

Test program was used to control the EUT for staying in continuous transmitting mode is programmed.

For 5.2GHz Band Channel Low (5180MHz) Middle(5210MHz)
High(5240MHz)

7.2 Conducted Emissions on Mains Terminals

Test Requirement: FCC Part 15E.407(b)(6) and 15.207

RSS-Gen Issue 8 Clause 7.2.4

Test Method: ANSI C63.4:2009

Test Result: Pass

Test Voltage: AC 120V 60Hz

Frequency Range: 150 KHz to 3.6 GHz


Class/Severity: Class B

Test mode: Tri Band mode

Limit:

Frequency range MHz	Class B Limits dB (µV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Test Setup and Procedure

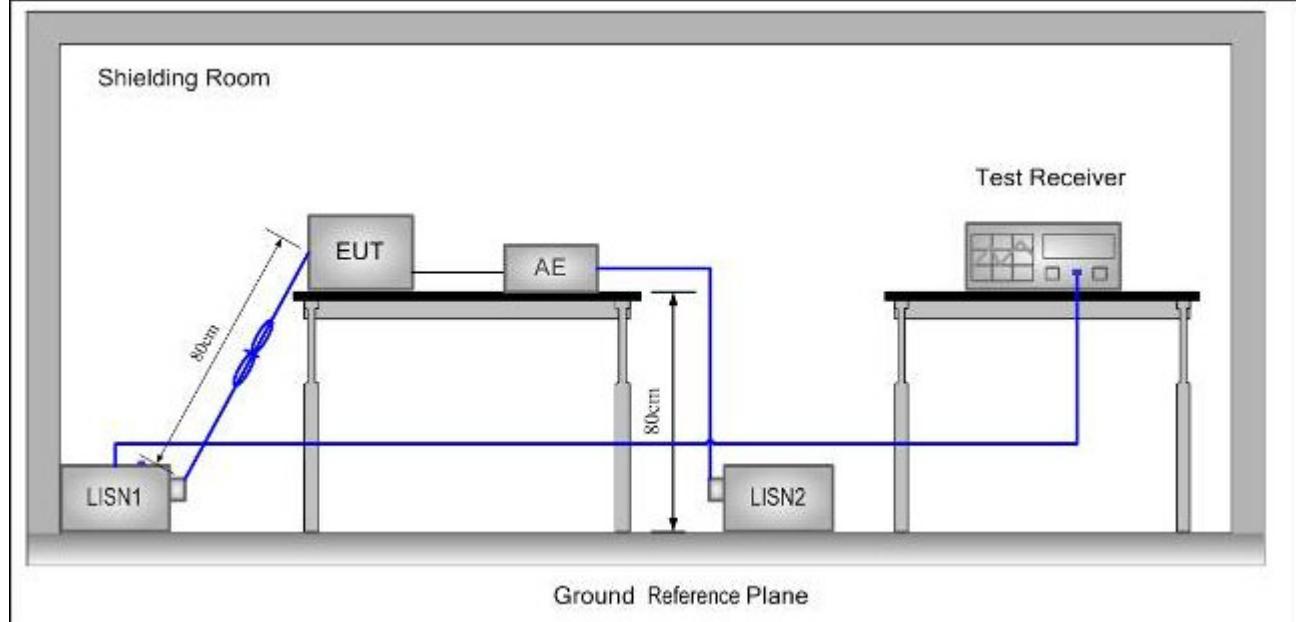

1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT was connected to a second LISN, which was bonded to the ground reference plane in the same way as the



LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded

3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment was at least 0.8 m from the LISN.

Measurement Data


Pre-scan was performed with peak detected on all ports, Quasi-peak & average measurements were performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Quasi-peak and Average test results.

Level = Read Level + LISN/ISN Factor + Cable Loss.


Test Mode: Tri Band mode

Test Port: AC Live Line

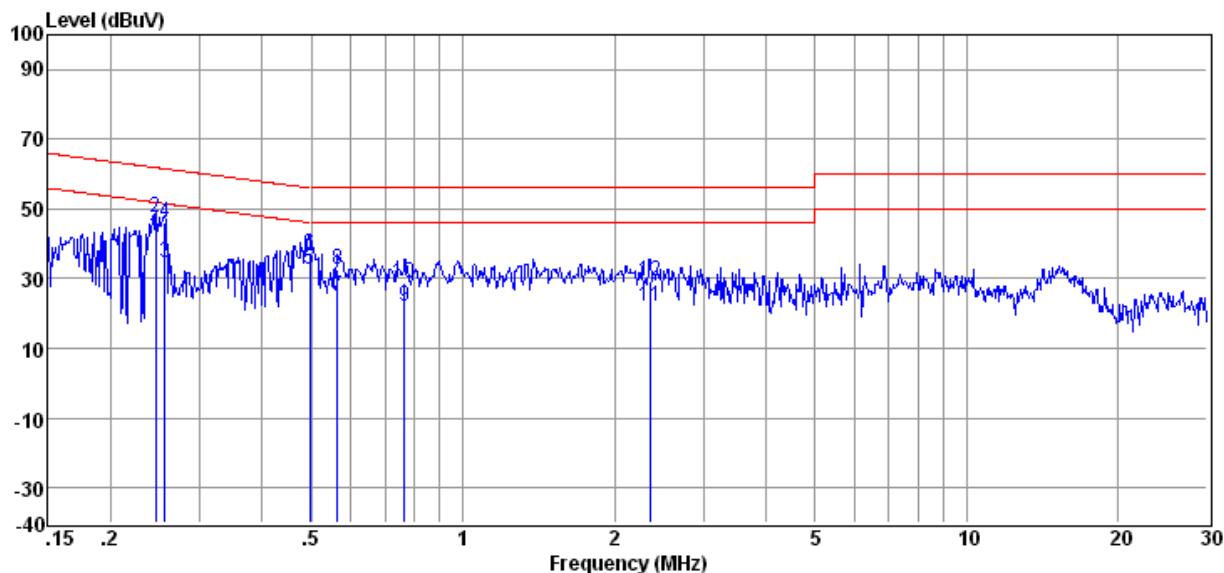

Freq (MHz)	Read Level (dB μ V)	LISN Factor (dB)	Cable Loss (dB)	Level (dB μ V)	Limit Line (dB μ V)	Over Limit (dB)	Detector	Phase
0.246	42.20	0.12	0.10	42.42	51.91	-9.49	Average	LINE
0.246	47.54	0.12	0.10	47.76	61.91	-14.15	QP	LINE
0.256	34.35	0.12	0.10	34.57	51.56	-16.99	Average	LINE
0.256	45.89	0.12	0.10	46.11	61.56	-15.45	QP	LINE
0.497	32.46	0.20	0.10	32.76	46.05	-13.29	Average	LINE
0.497	36.65	0.20	0.10	36.95	56.05	-19.10	QP	LINE
0.564	24.54	0.20	0.10	24.84	46.00	-21.16	Average	LINE
0.564	32.30	0.20	0.10	32.60	56.00	-23.40	QP	LINE
0.767	21.81	0.20	0.10	22.11	46.00	-23.89	Average	LINE
0.767	28.63	0.20	0.10	28.93	56.00	-27.07	QP	LINE
2.358	21.77	0.30	0.11	22.18	46.00	-23.82	Average	LINE
2.358	28.64	0.30	0.11	29.05	56.00	-26.95	QP	LINE

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

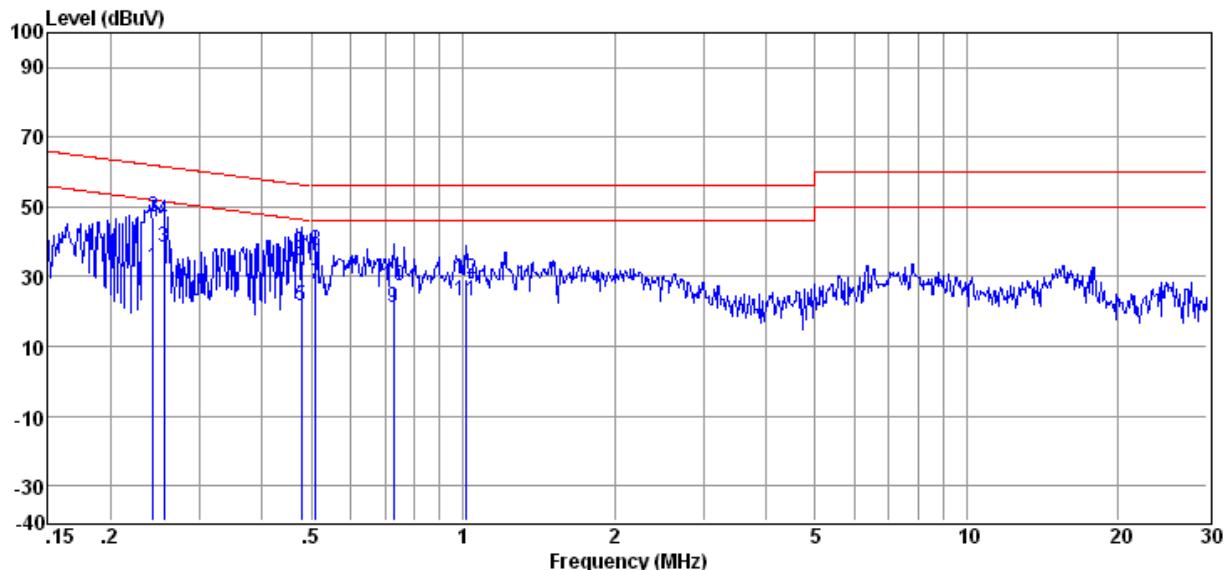Test Mode: Tri Band mode**Test Port:** AC Neutral Line

Freq (MHz)	Read Level (dB μ V)	LISN Factor (dB)	Cable Loss (dB)	Level (dB μ V)	Limit Line (dB μ V)	Over Limit (dB)	Detector	Phase
0.243	32.64	0.11	0.10	32.85	52.00	-19.15	Average	NEUTRAL
0.243	46.64	0.11	0.10	46.85	62.00	-15.15	QP	NEUTRAL
0.255	38.07	0.12	0.10	38.29	51.60	-13.31	Average	NEUTRAL
0.255	45.97	0.12	0.10	46.19	61.60	-15.41	QP	NEUTRAL
0.479	21.45	0.19	0.10	21.74	46.36	-24.62	Average	NEUTRAL
0.479	34.31	0.19	0.10	34.60	56.36	-21.76	QP	NEUTRAL
0.510	27.67	0.20	0.10	27.97	46.00	-18.03	Average	NEUTRAL
0.510	37.08	0.20	0.10	37.38	56.00	-18.62	QP	NEUTRAL
0.727	20.97	0.20	0.10	21.27	46.00	-24.73	Average	NEUTRAL
0.727	27.14	0.20	0.10	27.44	56.00	-28.56	QP	NEUTRAL
1.016	22.52	0.20	0.10	22.82	46.00	-23.18	Average	NEUTRAL
1.016	28.94	0.20	0.10	29.24	56.00	-26.76	QP	NEUTRAL

7.3 Peak Transmit Power

Test Requirement:	FCC Part 15 407 (a) (1) RSS-210 Issue 8 Annex 9
Standard Applicable:	According to section 15.407(a) (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10log B, where B is the 26- dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Measuremet Producet:	<ol style="list-style-type: none">1. Place the EUT on the table and set it in transmitting mode.2. Remove the antenna from the EUT and then connect a low loss RF calbe from the antenna port to the spectrum.3. Set the occur band to the entire emission bandwitdh of the signal.4. Record the max.channel power reading <p>Repeat above procedures until all the frequency measured were complete.</p>
Limit:	$\leq 16\text{dBm}$
	Note: For 5.15-5.25GHz band the Minimum 26BW is 15.96MHz. So the minimum limit is $4\text{dBm} + 10\log B = 16\text{dBm} < 17\text{dBm}$.

Measurement Result:

For Antenna A 5180-5240MHz Band:


CH	Frequency (MHz)	Reading RMS Power (dBm)	Cable Loss (dB)	Output RMS Power (dBm)	PEAK POWER LIMIT (dBm)	Result
LOW	5180	1.79	1.9	3.69	16	PASS
MID	5210	1.41	1.9	3.31	16	PASS
HIGH	5240	1.50	1.9	3.40	16	PASS

For Antenna B 5180-5240MHz Band:


CH	Frequency (MHz)	Reading RMS Power (dBm)	Cable Loss (dB)	Output RMS Power (dBm)	PEAK POWER LIMIT (dBm)	Result
LOW	5180	4.70	1.9	6.60	16	PASS
MID	5210	4.13	1.9	6.03	16	PASS
HIGH	5240	4.26	1.9	6.16	16	PASS

Test plot as follows:


Test mode:	5.2GHz Band Antenna A	Test channel:	Low
------------	-----------------------	---------------	-----

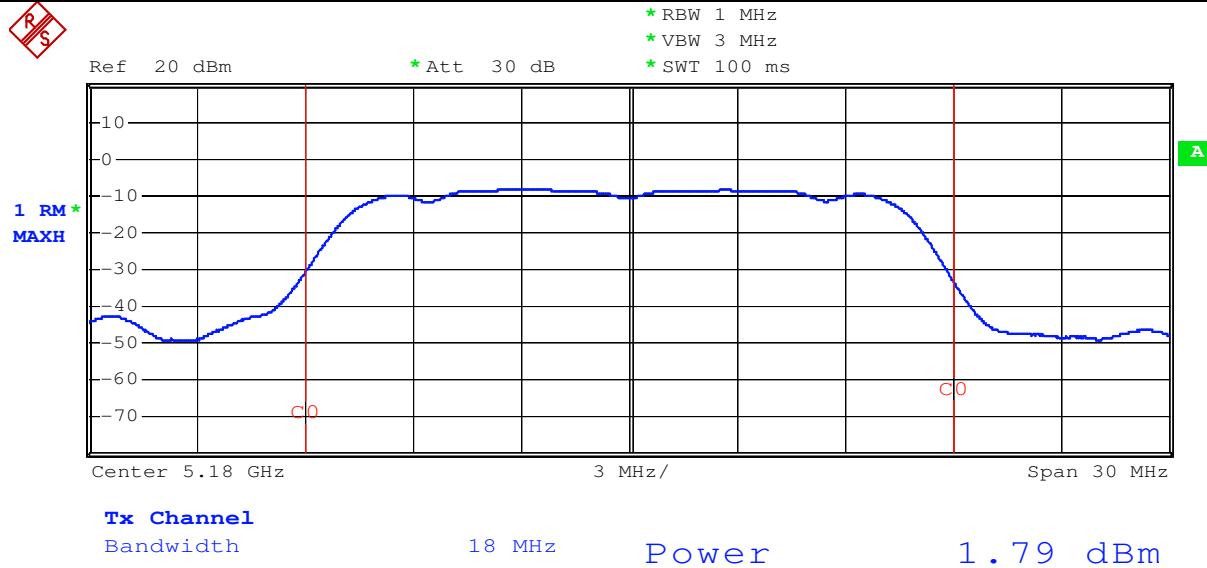

Test mode:	5.2GHz Band Antenna A	Test channel:	Middle
------------	-----------------------	---------------	--------

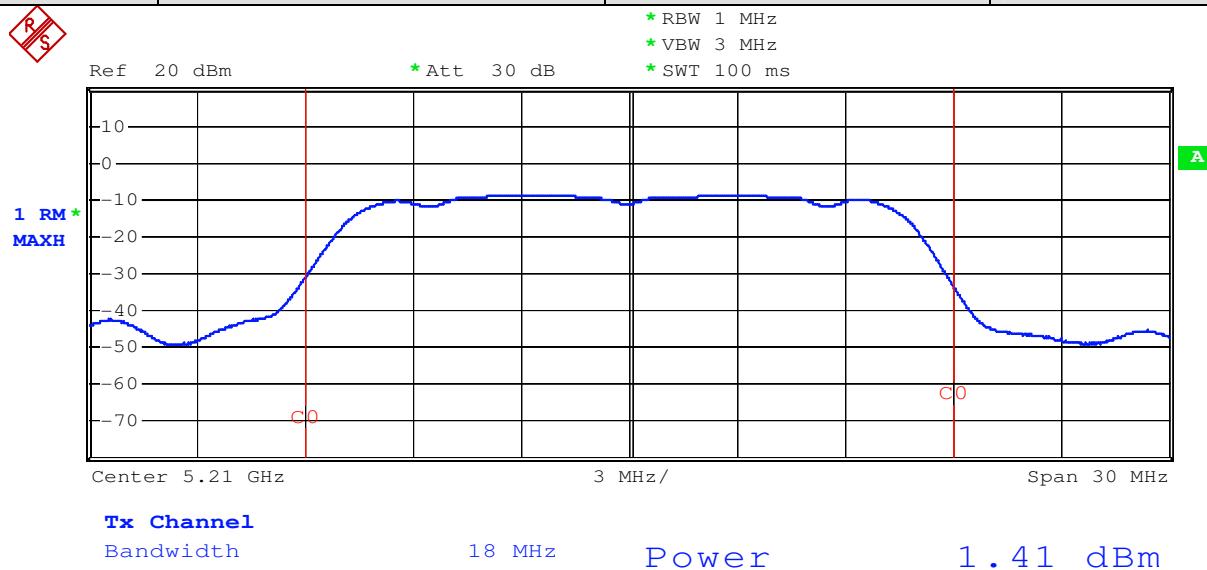


Test mode:	5.2GHz Band Antenna A	Test channel:	High
------------	-----------------------	---------------	------

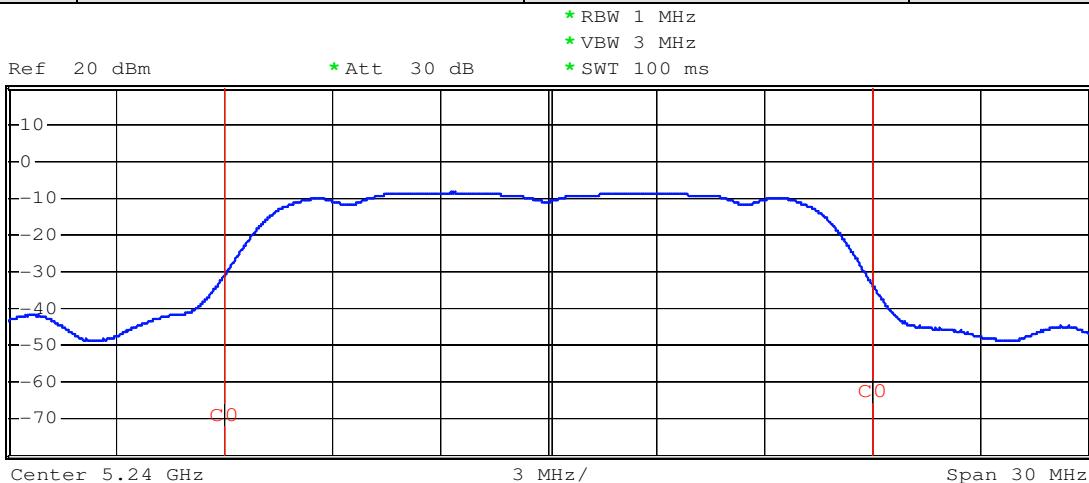


Tx Channel
Bandwidth 18 MHz Power 1.50 dBm

Test mode:	5.2GHz Band Antenna B	Test channel:	Low
------------	-----------------------	---------------	-----

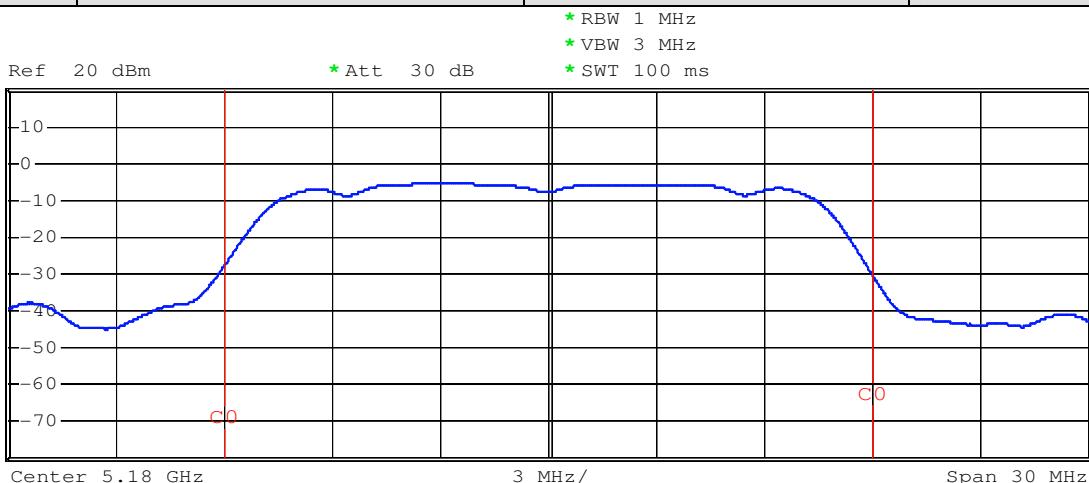


Tx Channel
Bandwidth 18 MHz Power 4.70 dBm

Test mode:	5.2GHz Band Antenna B	Test channel:	Middle
------------	-----------------------	---------------	--------

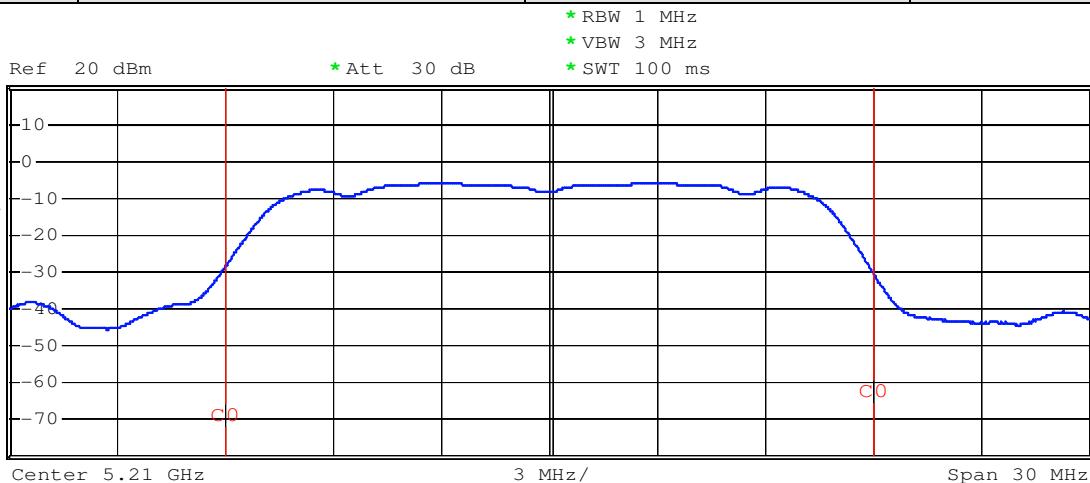

Tx Channel
Bandwidth 18 MHz Power 4.13 dBm

Test mode:	5.2GHz Band Antenna B	Test channel:	High
------------	-----------------------	---------------	------

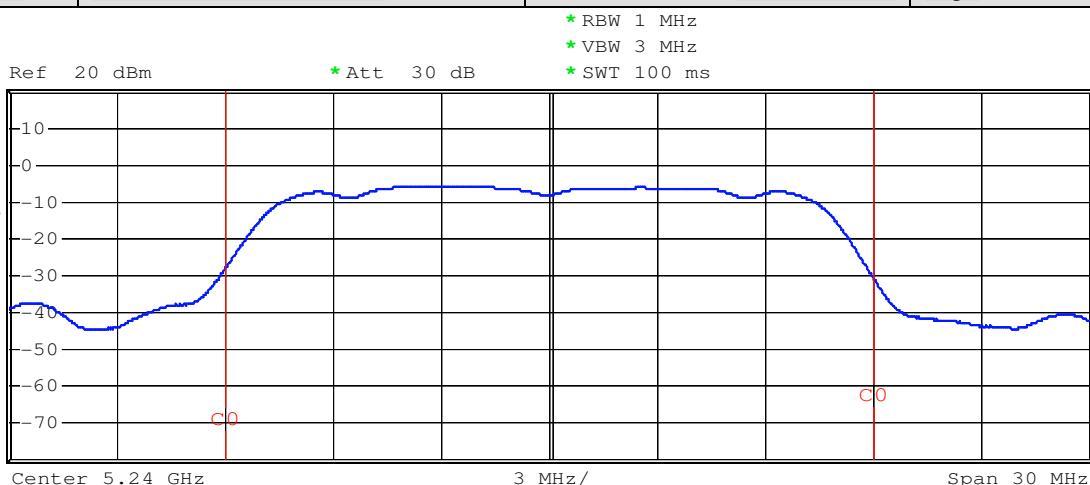

Tx Channel
Bandwidth 18 MHz Power 4.26 dBm

7.4 Peak Power Spectral Density

Test Requirement:	FCC Part15 407(a)(1) RSS-210 Issue 8 Annex 9
Test date:	Mar. 28, 2012
Standard Applicable:	According to section 15.407(a), (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10log B, where B is the 26- dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Measurement Procedure:	The EUT was tested according to UNII test procedure of KDB 789033 for compliance to FCC 47CFR 15.407 requirements. Set RBW=1MHz, Set VBW=3MHz, Span=50MHz, Sweep time=Auto, Set detector=Peak detector.

Measurement Result:


For Antenna A 5180-5240MHz Band:

CH	Frequency (MHz)	Reading (dBm)	Cable Loss (dB)	RF Power Density (dBm)	Limit (dBm)	Result
LOW	5180	-8.52	1.9	-6.62	4	PASS
MID	5210	-8.33	1.9	-6.43	4	PASS
HIGH	5240	-8.69	1.9	-6.79	4	PASS


For Antenna B 5180-5240MHz Band:

CH	Frequency (MHz)	Reading (dBm)	Cable Loss (dB)	RF Power Density (dBm)	Limit (dBm)	Result
LOW	5180	-5.65	1.9	-3.75	4	PASS
MID	5210	-5.63	1.9	-3.73	4	PASS
HIGH	5240	-5.91	1.9	-4.01	4	PASS


Test mode:	5.2GHz Band Antenna A	Test channel:	Low
------------	-----------------------	---------------	-----

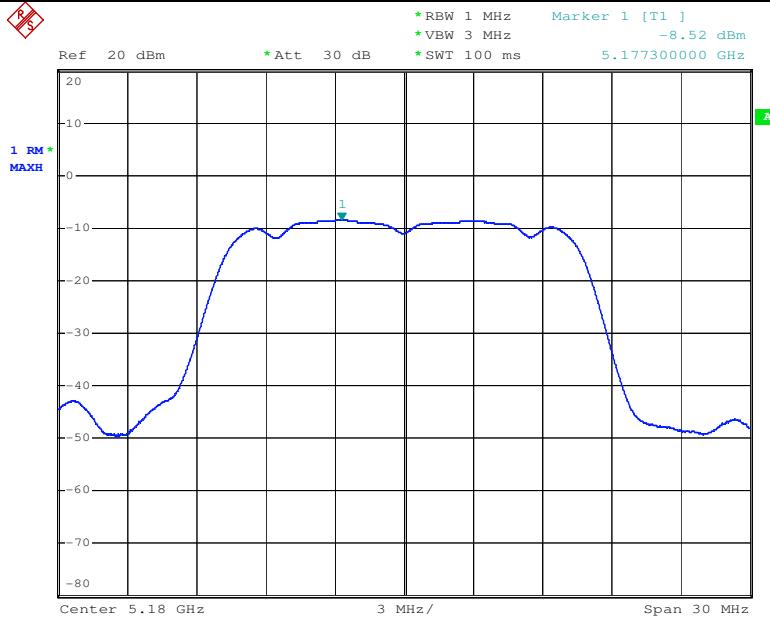


Test mode:	5.2GHz Band Antenna A	Test channel:	Middle
------------	-----------------------	---------------	--------

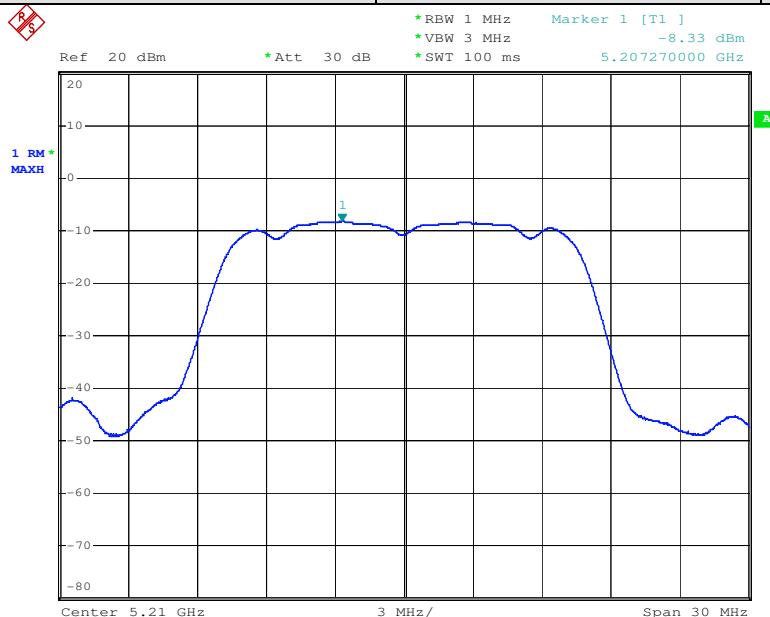


Test mode:	5.2GHz Band Antenna A	Test channel:	High
------------	-----------------------	---------------	------

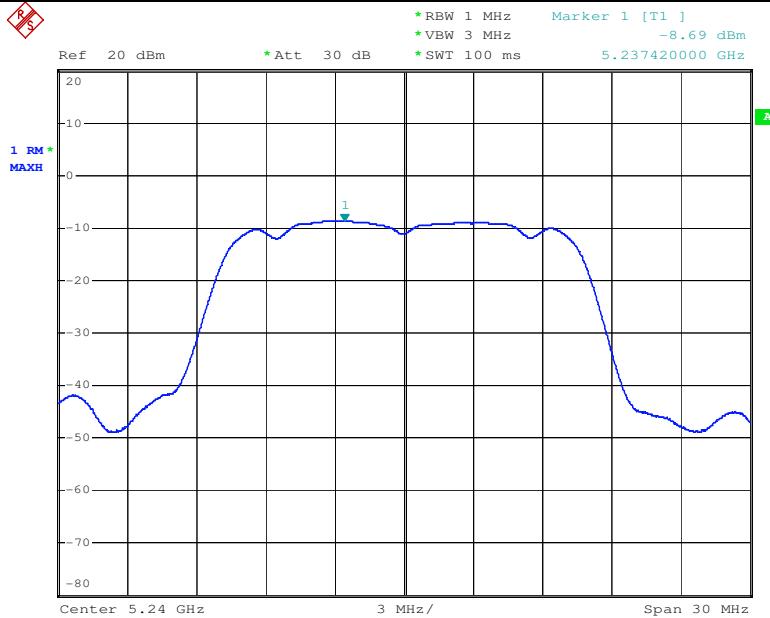


Test mode:	5.2GHz Band Antenna B	Test channel:	Low
------------	-----------------------	---------------	-----

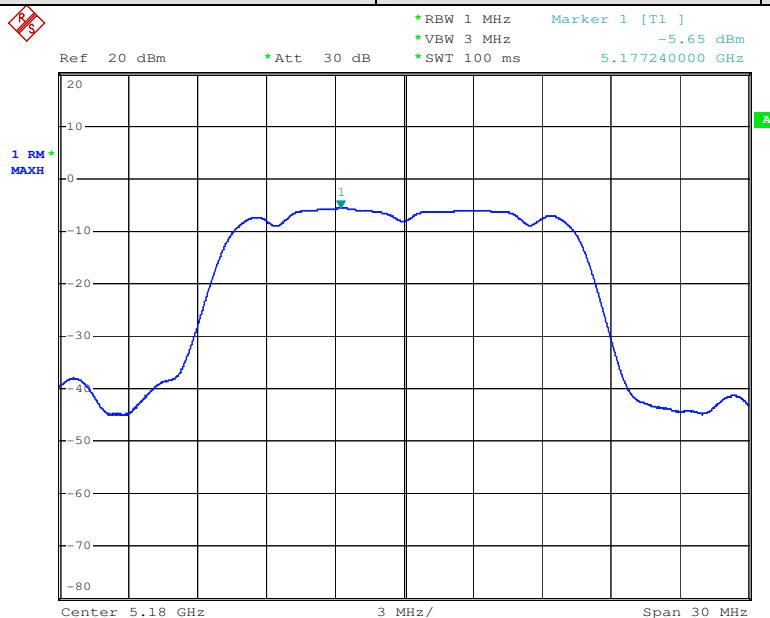

Test mode:	5.2GHz Band Antenna B	Test channel:	Middle
------------	-----------------------	---------------	--------

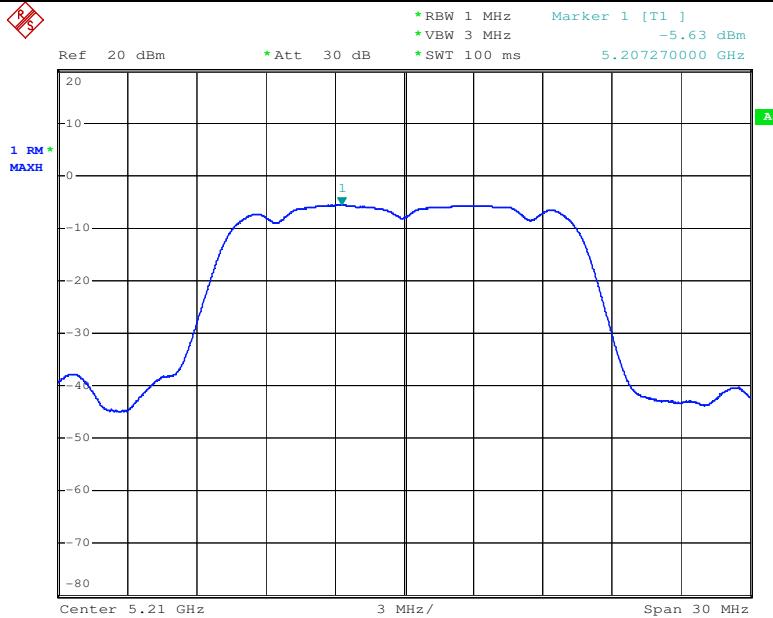

Test mode:	5.2GHz Band Antenna B	Test channel:	High
------------	-----------------------	---------------	------

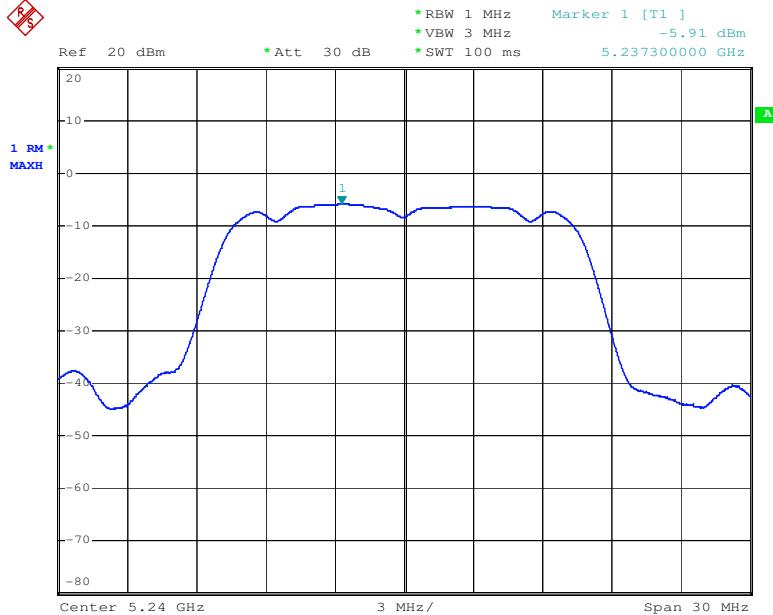

7.5 Peak Power Excursion

Test Requirement: FCC Part15 407(a)(6)
RSS-210 Issue 8 Annex 9

Standard Applicable: According to section 15.407(a) and KDB 789033

(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Measurement Procedure:

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emission bandwidth.
3. Find the maximum of the peak-max-hold spectrum.
set RBW=1MHz,VBW \geq 3MHz, Detector=peak, Trace mode=max-hold
4. allow the sweeps to continue until the trace stabilizes.
5. Use the peak search function to find the peak of the spectrum.
6. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD

Note: PPSD reference section 6.3

Limit:

	Frequency Band	Limit
	5.15 – 5.25 GHz	13dB

Measurement Result:


For Antenna A 5180-5240MHz Band:

CH	Frequency (MHz)	Measure Value (dBm)	PPSD (dBm)	Peak power excursion (dB)	Limit (dBm)	Result
LOW	5180	-5.01	-8.52	3.51	13	PASS
MID	5210	-4.65	-8.33	3.68	13	PASS
HIGH	5240	-5.19	-8.69	3.50	13	PASS


For Antenna B 5180-5240MHz Band:

CH	Frequency (MHz)	Measure Value (dBm)	PPSD (dBm)	Peak power excursion (dB)	Limit (dBm)	Result
LOW	5180	-2.07	-5.65	3.58	13	PASS
MID	5210	-2.06	-5.63	3.57	13	PASS
HIGH	5240	-2.22	-5.91	3.69	13	PASS


Test mode:	5.2GHz Band Antenna A	Test channel:	Low
------------	-----------------------	---------------	-----

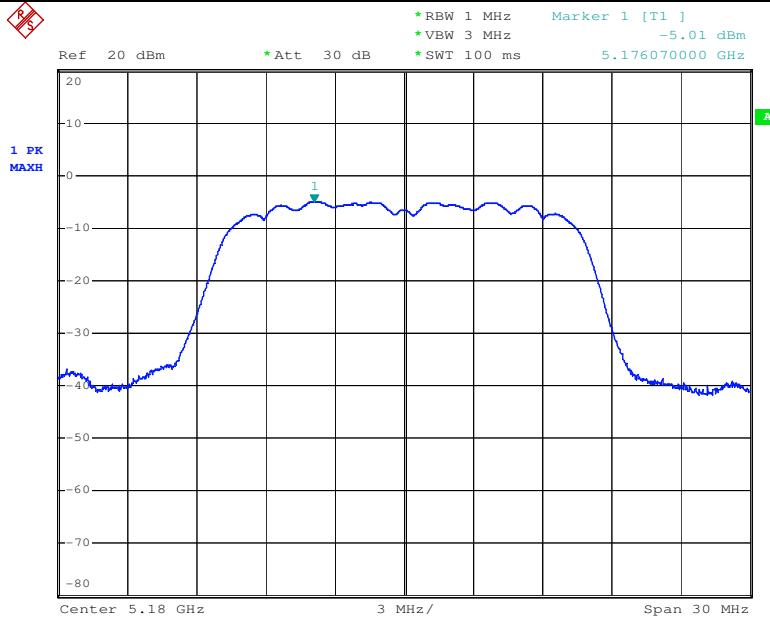


Test mode:	5.2GHz Band Antenna A	Test channel:	Middle
------------	-----------------------	---------------	--------

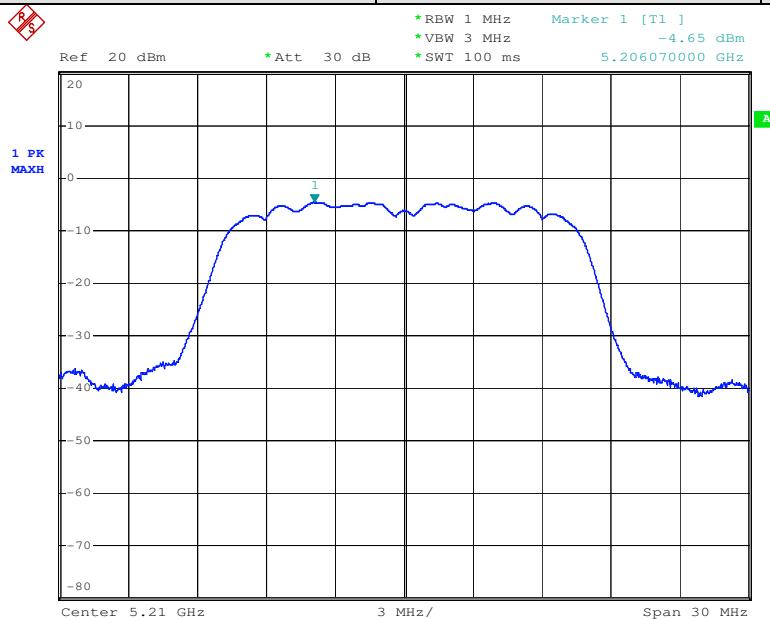


Test mode:	5.2GHz Band Antenna A	Test channel:	High
------------	-----------------------	---------------	------

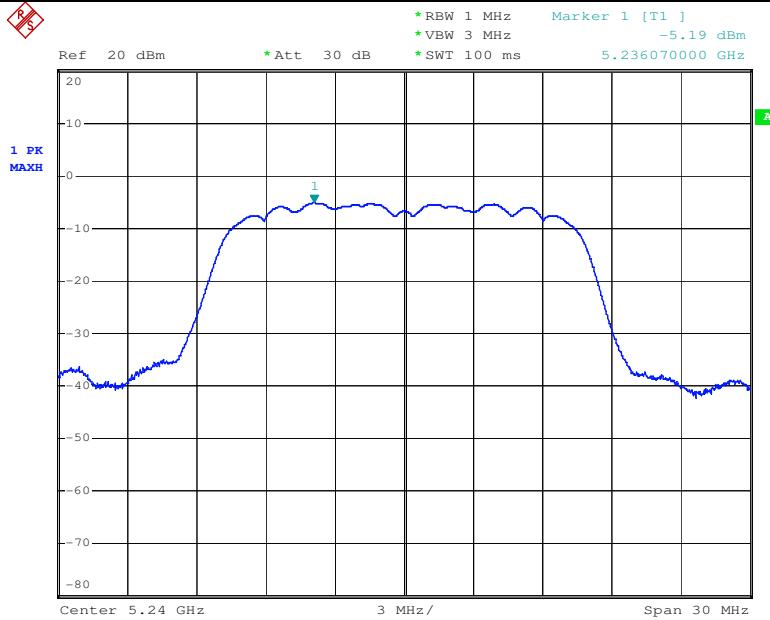


Test mode:	5.2GHz Band Antenna B	Test channel:	Low
------------	-----------------------	---------------	-----

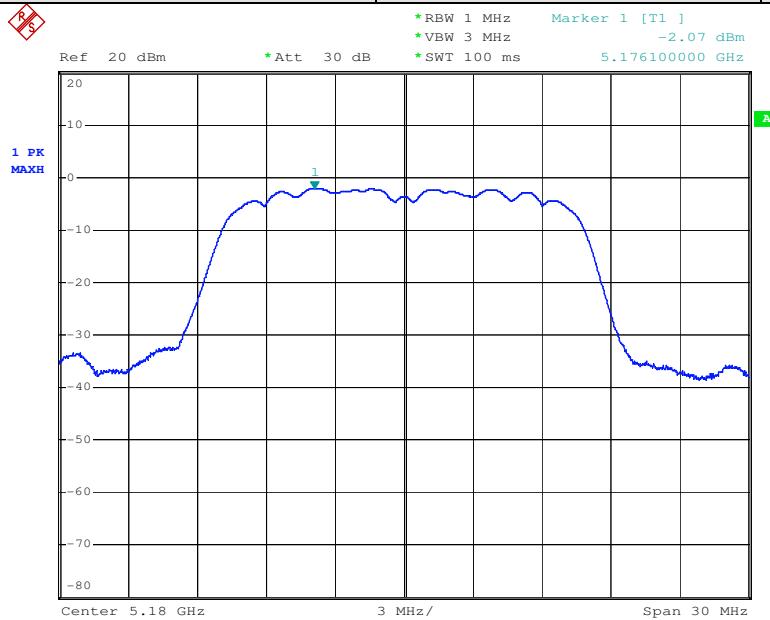

Test mode:	5.2GHz Band Antenna B	Test channel:	Middle
------------	-----------------------	---------------	--------

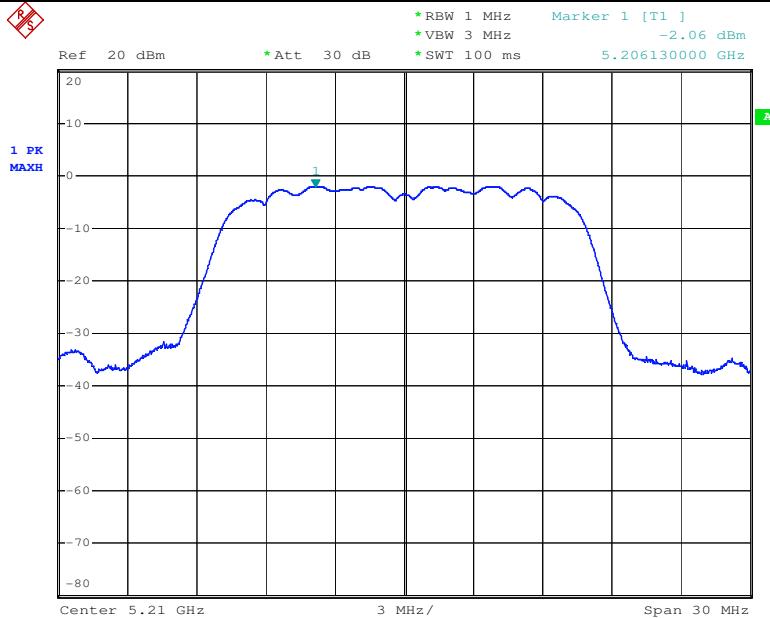

Test mode:	5.2GHz Band Antenna B	Test channel:	High
------------	-----------------------	---------------	------

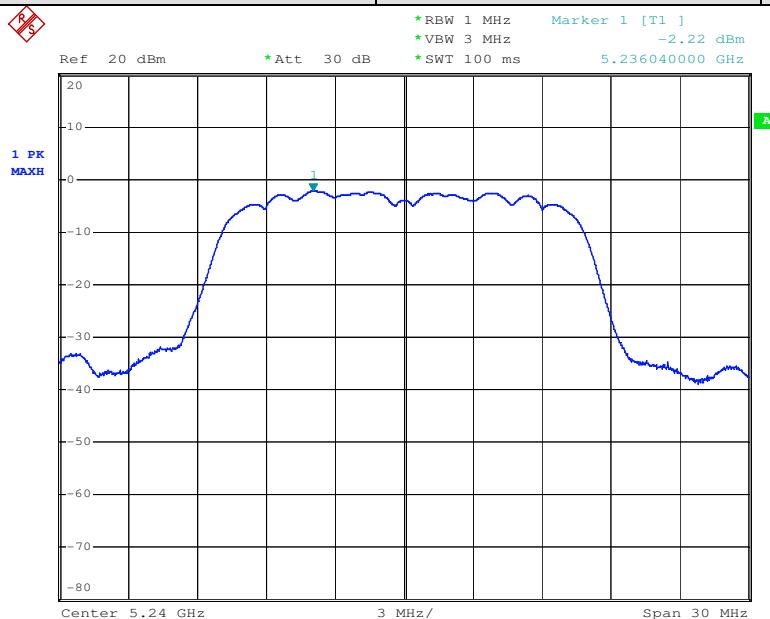

7.6 Electric Field Strength Spurious Emissions

Test Requirement: FCC Part15 407(b)(1)(6)(7) and FCC Part 15.209
RSS-210 Issue 8 Annex 9

Standard Applicable: According to section 15.407(b)

(1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Pre-test with the Horizontal, Vertical and other status towards to the test antenna. To find the worst status.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.

Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector applies (30 MHz - 1000 MHz). 1MHz resolution bandwidth and Peak detector apply (1000 MHz – 25GHz)

Above 1GHz

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO.

5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

Limit:

According to the general radiated limits in 15.209 as following



Frequency (MHz)	Field strength (microvolts/meter)	Field strength (dBuV/m)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Limits of unwanted emission out of the restricted bands in 15.407

Operation Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB μ V/m) *
5150-5250	-27	68.3

Note: 1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts)}$$

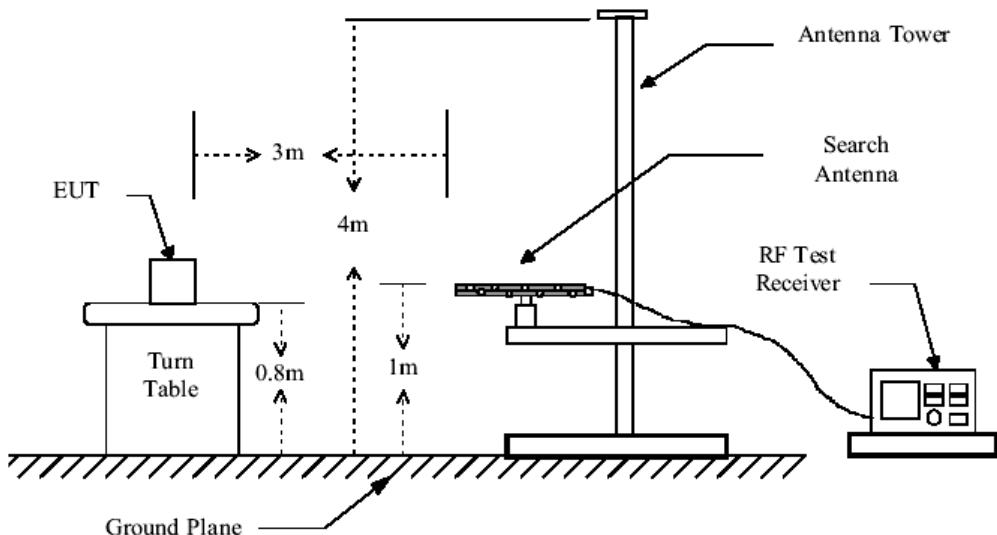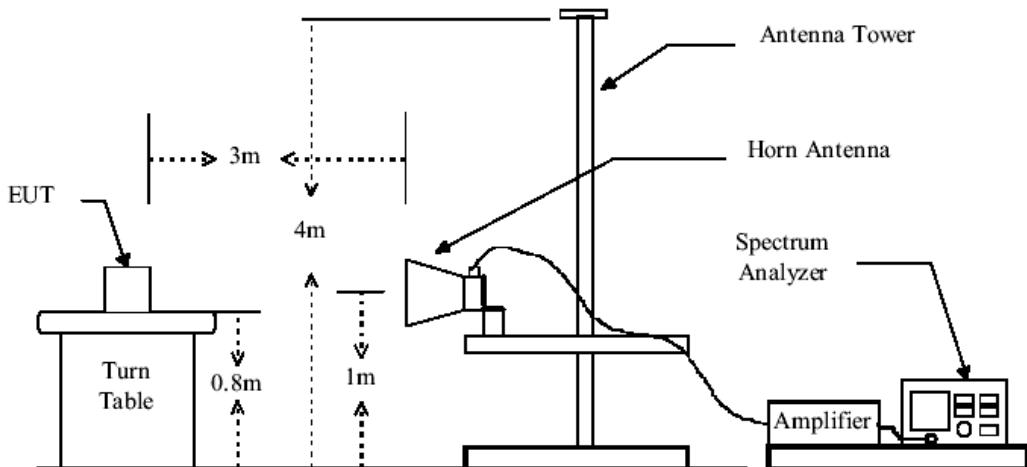**Radiated Test Set-up:
Radiated Emission Test Set-up, Frequency Below 1000MHz****Radiated Emission Test Set-up Frequency Over 1GHz**


Low noise amplifier was used below 1GHz, High pass Filter was used above 1GHz.

Tests results:

From the pre-test the worst status is the EUT Horizontal towards to the antenna. Below is the worst test results.

Operation Mode: 5.2GHz Band

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement Antenna: Horizontal

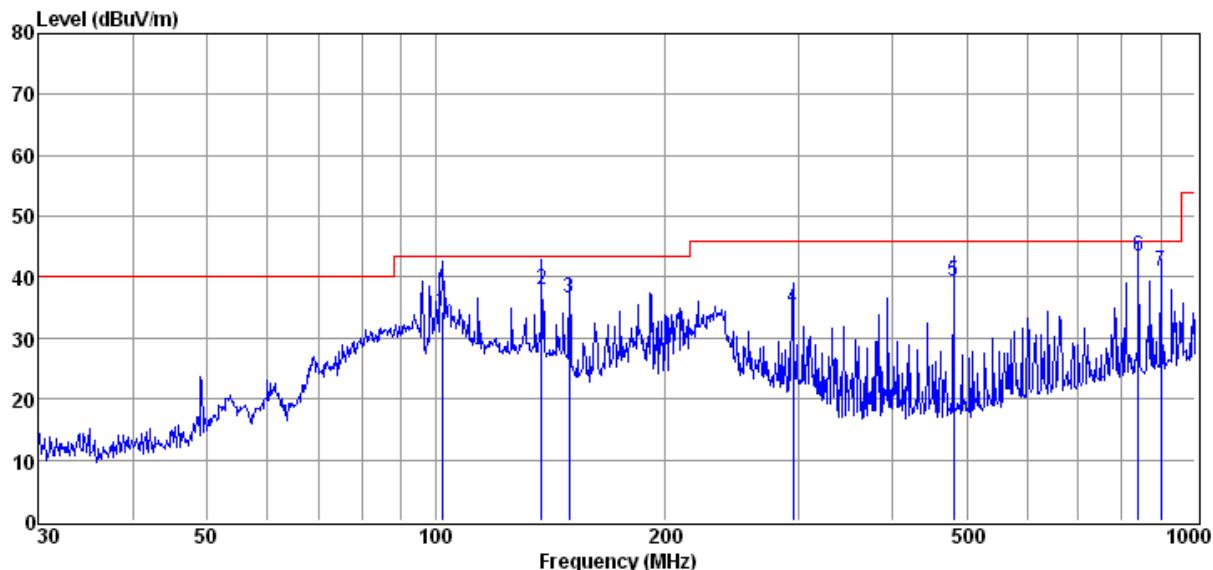


Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Preamp Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	102.00	48.75	9.38	24.70	1.05	34.48	43.50	-9.02	QP
2	137.90	49.36	12.00	24.70	1.22	37.88	43.50	-5.62	QP
3	150.01	47.32	12.70	24.70	1.27	36.59	43.50	-6.91	QP
4	295.15	45.28	12.26	24.50	1.93	34.97	46.00	-11.03	QP
5	480.53	44.87	16.34	24.38	2.55	39.38	46.00	-6.62	QP
6	842.13	41.30	22.54	23.90	3.54	43.48	46.00	-2.52	QP
7	900.15	38.13	22.90	23.80	3.65	40.88	46.00	-5.12	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Antenna: Vertical

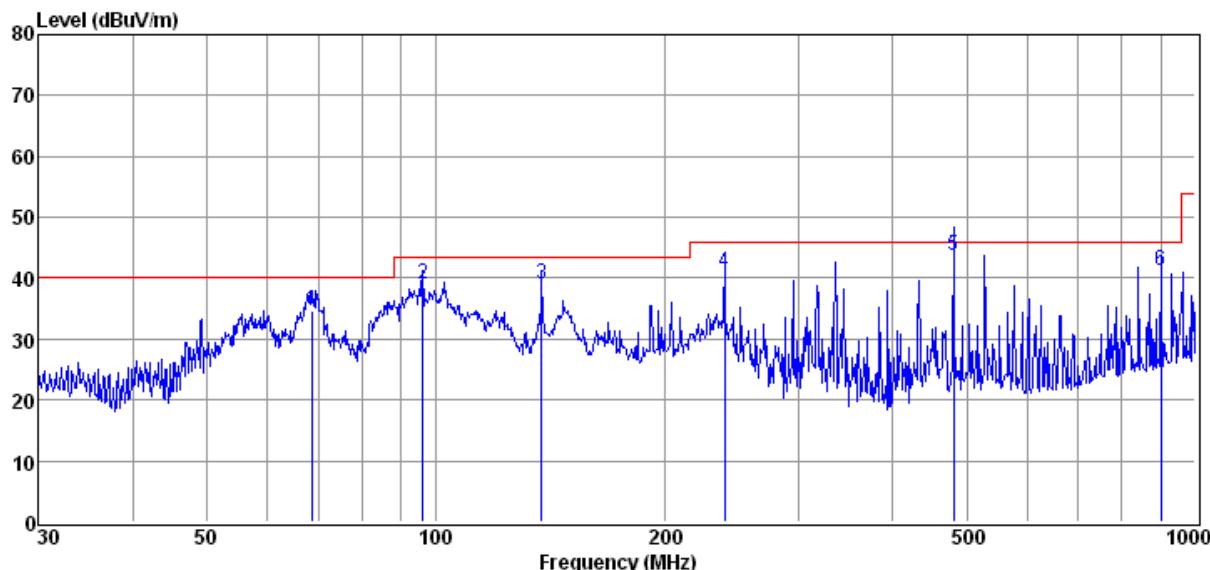

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Preamp Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector
1	68.63	47.60	10.99	24.70	0.79	34.68	40.00	-5.32	QP
2	96.10	53.87	8.93	24.70	1.00	39.10	43.50	-4.40	QP
3	137.90	50.75	11.79	24.70	1.22	39.06	43.50	-4.44	QP
4	239.99	53.39	10.40	24.50	1.69	40.98	46.00	-5.02	QP
5	480.53	49.31	16.34	24.38	2.55	43.82	46.00	-2.18	QP
6	900.15	38.60	22.90	23.80	3.65	41.35	46.00	-4.65	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit

Above 1GHz Peak and Average Spurious Emissions Measurement

EUT mode: Antenna A**Test Antenna: Horizontal****Test Channel: Low**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3445.00	45.95	-6.48	39.47	54	14.53	peak
2	9517.00	38.08	11.89	49.97	54	4.03	peak
3	13915.56	34.18	9.93	44.11	54	9.89	AVG
4	13920.00	45.28	9.94	55.22	74	18.78	peak
5	15569.00	45.45	10.74	56.19	74	17.81	peak
6	15574.18	34.26	10.75	45.01	54	8.99	AVG

Test Antenna: Vertical**Test Channel: Low**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3428.00	47.11	-6.49	40.62	54	13.38	peak
2	9551.00	38.40	11.84	50.24	54	3.76	peak
3	13894.70	34.55	9.87	44.42	54	9.58	AVG
4	13903.00	44.97	9.89	54.86	74	19.14	peak
5	15410.02	34.53	10.44	44.97	54	9.03	AVG
6	15416.00	45.98	10.45	56.43	74	17.57	peak

Test Antenna: Horizontal**Test Channel: Middle**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3428.00	45.98	-6.49	39.49	54	14.51	peak
2	7868.00	40.22	7.74	47.96	54	6.04	peak
3	10214.00	39.02	10.92	49.94	54	4.06	peak
4	15530.20	34.44	10.67	45.11	54	8.89	AVG
5	15535.00	45.28	10.67	55.95	74	18.05	peak

Test Antenna: Vertical

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3394.00	51.02	-6.55	44.47	54	9.53	peak
2	7613.00	40.25	7.74	47.99	54	6.01	peak
3	9772.00	38.37	11.52	49.89	54	4.11	peak
4	13848.24	34.87	9.74	44.61	54	9.39	AVG
5	13852.00	45.81	9.75	55.56	74	18.44	peak

Test Antenna: Horizontal**Test Channel: High**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3411.00	50.83	-6.51	44.32	54	9.68	peak
2	9534.00	38.17	11.86	50.03	54	3.97	peak
3	13920.00	45.36	9.94	55.30	74	18.7	peak
4	13923.00	33.58	9.96	43.54	54	10.46	AVG
5	15212.00	46.25	10.12	56.37	74	17.63	peak
6	15216.00	35.12	10.16	45.28	54	8.72	AVG

Test Antenna: Vertical**Test Channel: High**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3411.00	50.83	-6.51	44.32	54	9.68	peak
2	9534.00	38.17	11.86	50.03	54	3.97	peak
3	13920.00	45.36	9.94	55.30	74	18.7	peak
4	13920.18	34.39	9.94	44.33	54	9.67	AVG
5	15210.88	34.63	10.12	44.75	54	9.25	AVG
6	15212.00	46.25	10.12	56.37	74	17.63	peak

EUT mode: Antenna B**Test Antenna: Horizontal****Test Channel: Low**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3394.00	49.57	-6.55	43.02	54	10.98	peak
2	10367.00	41.92	10.74	46.66	54	7.34	peak
3	13920.00	45.47	9.94	55.41	74	18.59	peak
4	13920.42	39.59	9.94	49.53	54	4.47	AVG
5	15290.44	40.10	10.24	50.34	54	3.66	AVG
6	15297.00	45.54	10.26	55.80	74	18.20	peak

Test Antenna: Vertical**Test Channel: Low**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3462.00	47.33	-6.44	40.89	54	13.11	peak
2	9466.00	38.07	11.79	49.86	54	4.14	peak
3	13883.36	34.51	9.84	44.35	54	9.65	AVG
4	13886.00	45.54	9.84	55.38	74	18.62	peak
5	15288.40	35.02	10.24	45.26	54	8.74	AVG
6	15297.00	46.18	10.26	56.44	74	17.56	peak

Test Antenna: Horizontal**Test Channel: Middle**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3924.00	41.22	-2.48	38.74	54	15.26	peak
2	9262.00	37.09	10.98	48.07	54	5.93	peak
3	13778.82	34.47	9.54	44.01	54	9.99	AVG
4	13784.00	45.09	9.56	54.65	74	19.35	peak
5	15577.44	33.82	10.77	44.59	54	9.41	AVG
6	15586.00	44.83	10.78	55.61	74	18.39	peak

Test Antenna: Vertical

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3428.00	50.86	-6.49	44.37	54	9.63	peak
2	7919.00	40.83	7.74	48.57	54	5.43	peak
3	9568.00	39.02	11.81	50.83	54	3.17	peak
4	13879.06	34.78	9.83	44.61	54	9.39	AVG
5	13886.00	46.57	9.84	56.41	74	17.59	peak

Test Antenna: Horizontal**Test Channel: High**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3771.00	41.06	-2.95	38.11	54	15.89	peak
2	7766.00	39.84	7.74	47.58	54	6.42	peak
3	9568.00	37.91	11.81	49.72	54	4.28	peak
4	13764.62	34.89	9.51	44.40	54	9.6	AVG
5	13767.00	46.30	9.51	55.81	74	18.19	peak

Test Antenna: Vertical**Test Channel: High**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3411.00	48.92	-6.51	42.41	54	11.59	peak
2	7817.00	40.25	7.74	47.99	54	6.01	peak
3	9517.00	38.11	11.89	50.00	54	4.00	peak
4	13760.68	34.76	9.50	44.26	54	9.74	AVG
5	13767.00	45.52	9.51	55.03	74	18.97	peak

Remark: No other radiation has been found

Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

Remark: No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.

7.7 Radiated Emission Band Edge

Test Requirement: FCC Part15 407(b)(5)(7) and FCC Part 15.205

Standard Applicable: According to section 15.407(b)

(5) The above emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: 40.0 dB μ V/m between 30MHz & 88MHz;

43.5 dB μ V/m between 88MHz & 216MHz;

46.0 dB μ V/m between 216MHz & 960MHz;

AV 54.0 dB μ V/m PK 74.0 dB μ V/m above 960MHz.

Measurement Procedure: The EUT was setup according to ANSI 63.10,2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47 CFR 15.407 requirements. The EUT is placed on a turn table which is 0.8 m above ground. The turn table is rotated 360 degrees to determine to the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level.


This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C 63.10:2009 on radiated measurement.

Spectrum analyzer parameters setting as shown below:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

Radiated Emission Test Set-up Frequency Over 1GHz

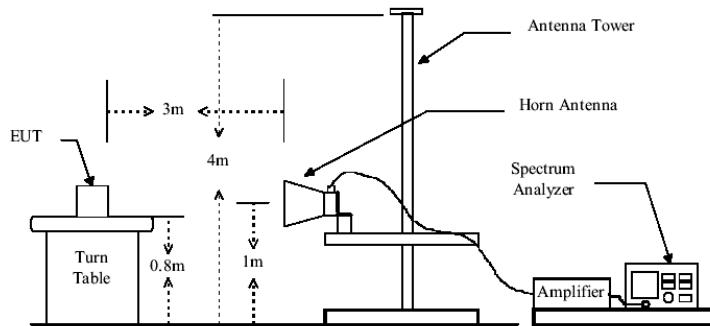


The field strength is calculated by adding the Antenna Factor, Preamplifier Factor & Cable Factor. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

Radiated Bandedge Measurement Result:

Test mode: 5.2GHz Band Antenna A Test channel: Low


Horizontal, Peak Detector:

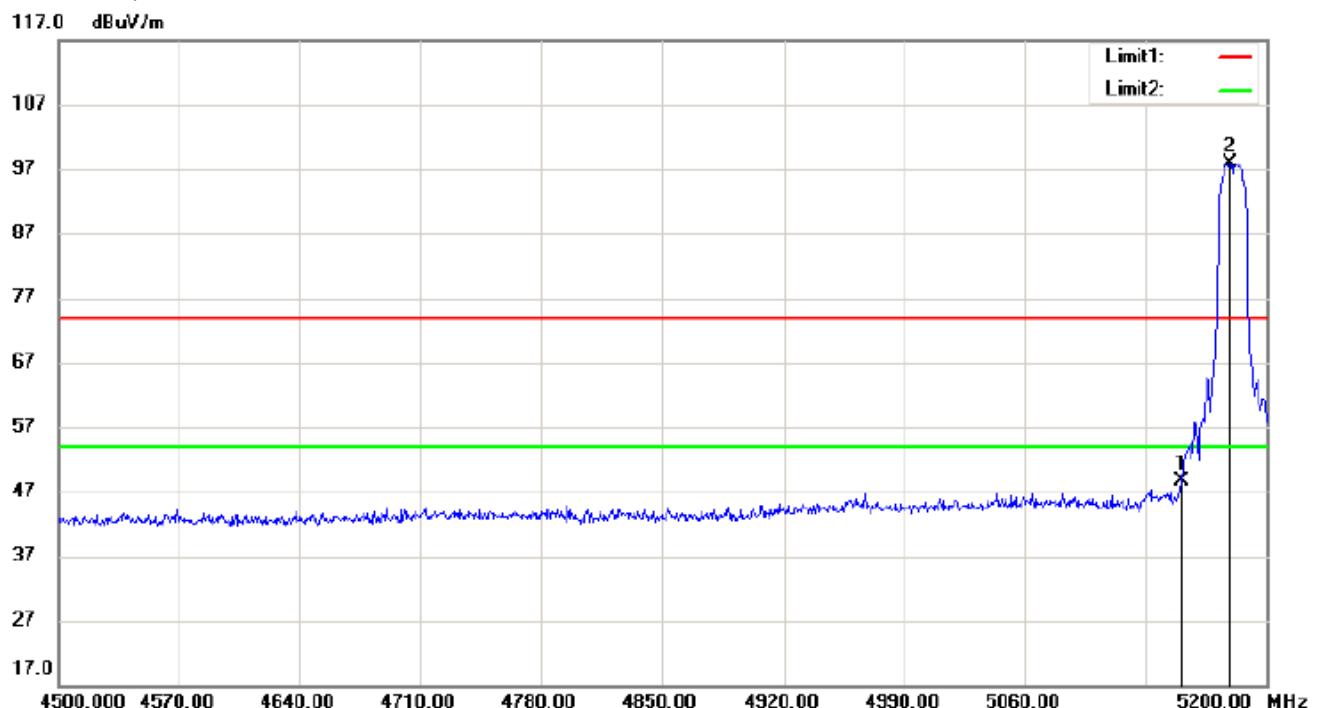

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5151.00	47.97	0.74	48.71	54	5.29	peak
2	5179.00	97.20	0.76	97.96	54	-43.96	peak


Vertical , Peak Detector:

117.0 dBuV/m

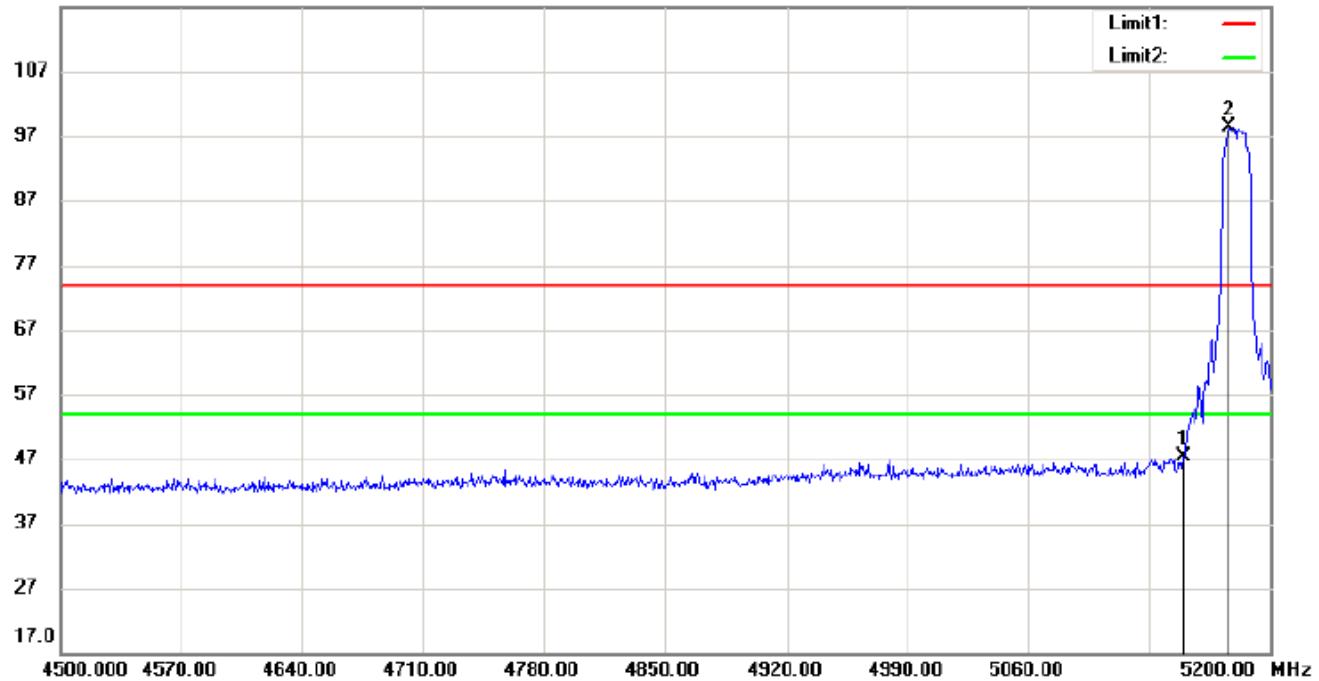

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.30	46.53	0.74	47.27	54	6.73	peak
2	5176.20	97.57	0.76	98.33	54	-44.33	peak


Test mode:	5.2GHz Band Antenna A	Test channel:	High
------------	-----------------------	---------------	------

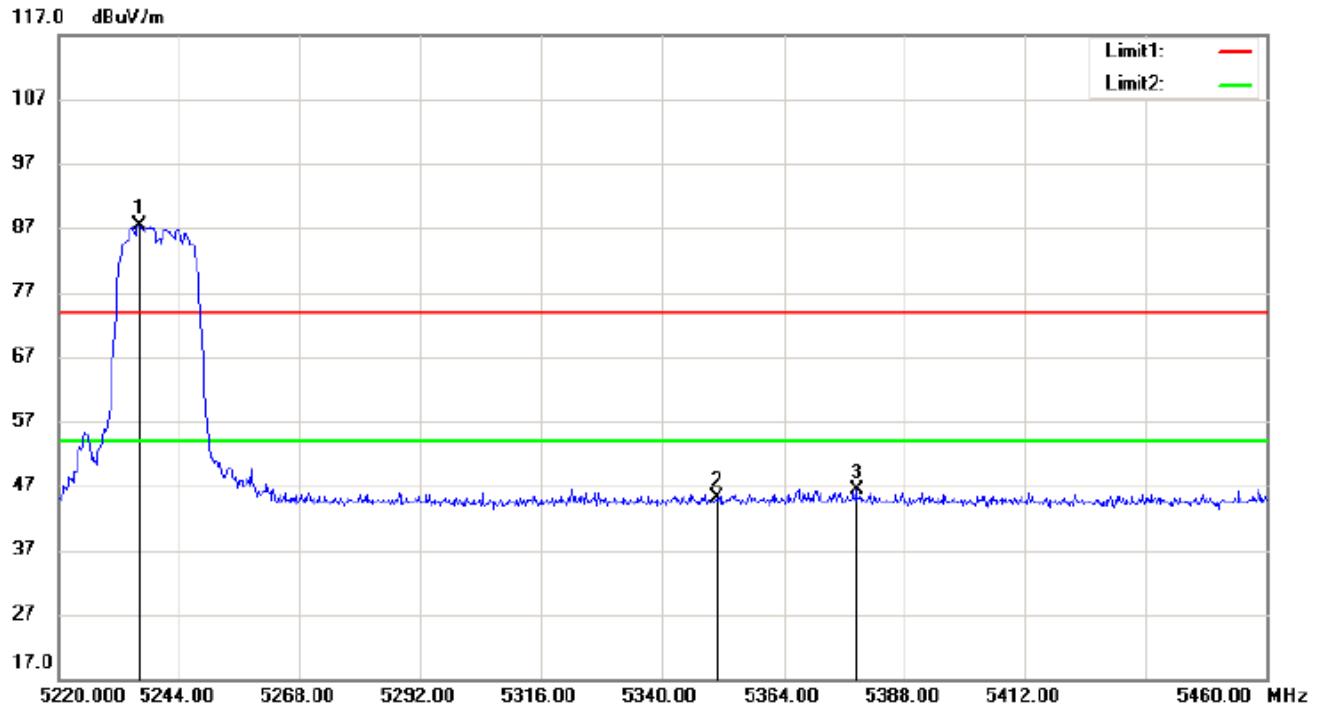Horizontal, Peak Detector:

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5236.08	86.60	0.82	87.42	54	-33.42	peak
2	5350.80	44.27	0.92	45.19	54	8.81	peak
3	5378.40	45.41	0.94	46.35	54	7.65	peak

Vertical , Peak Detector:

117.0 dBuV/m

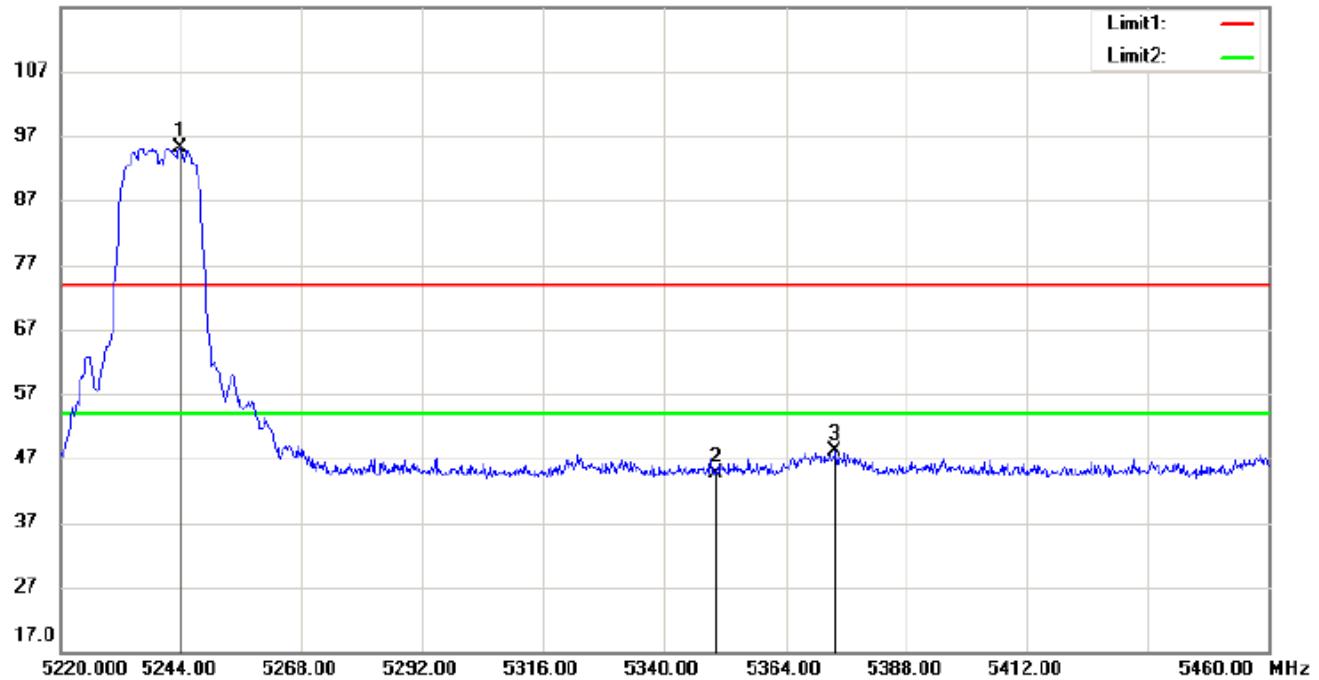


Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5243.76	94.23	0.83	95.06	54	-41.06	peak
2	5350.80	43.83	0.92	44.75	54	9.25	peak
3	5373.84	47.24	0.94	48.18	54	5.82	peak

Test mode:	5.2GHz Band Antenna B	Test channel:	Low
------------	-----------------------	---------------	-----

Horizontal, Peak Detector:


117.0 dBuV/m

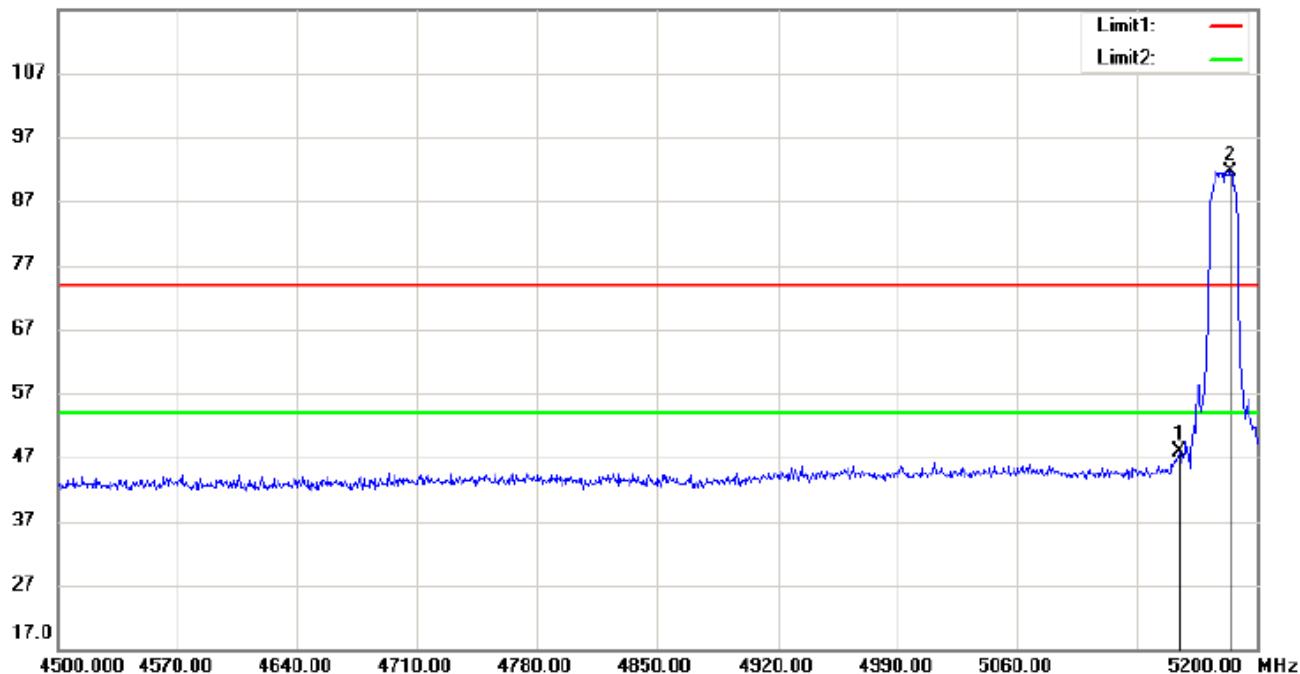

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5154.50	47.17	0.75	47.92	54	6.08	peak
2	5184.60	90.90	0.78	91.68	54	-37.68	peak

Vertical , Peak Detector:

117.0 dBuV/m

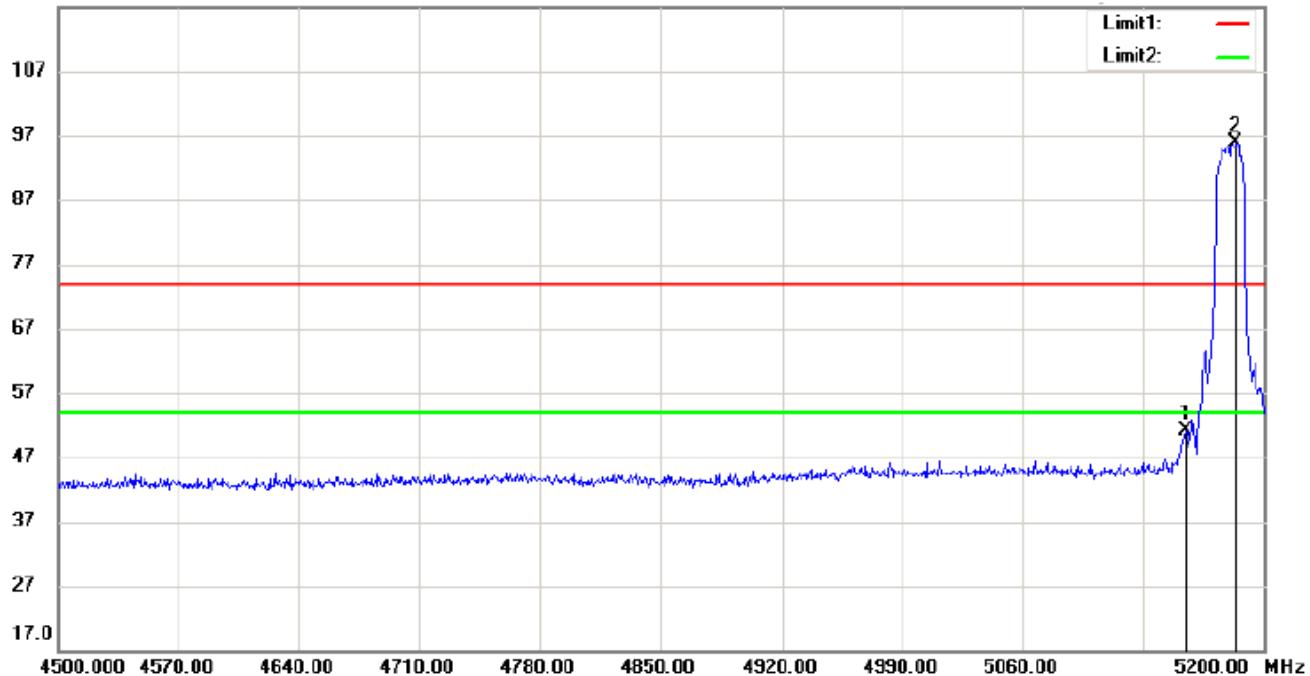


Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5154.50	50.29	0.75	51.04	54	2.96	peak
2	5183.90	95.10	0.78	95.88	54	-41.88	peak

Test mode:	5.2GHz Band Antenna B	Test channel:	High
------------	-----------------------	---------------	------

Horizontal, Peak Detector:


117.0 dBuV/m

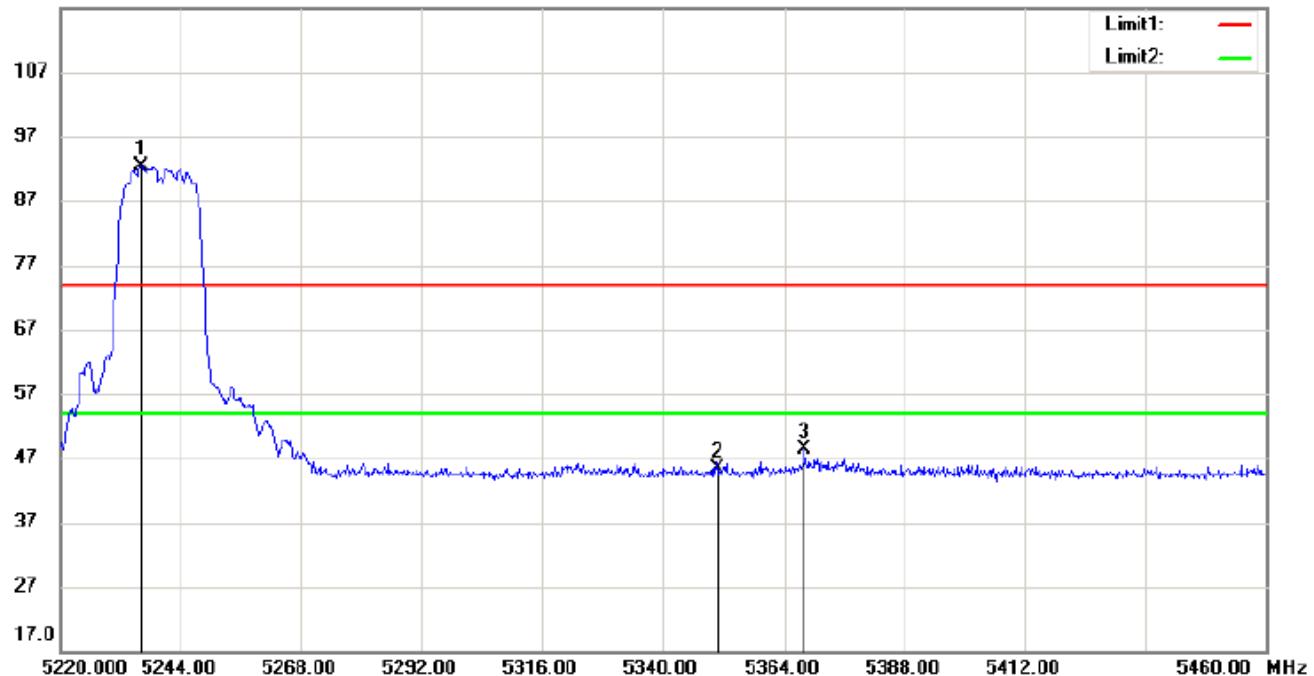

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5236.08	91.59	0.82	92.41	54	-38.41	peak
2	5350.80	44.47	0.92	45.39	54	8.61	peak
3	5368.08	47.48	0.93	48.41	54	5.59	peak

Vertical , Peak Detector:

117.0 dBuV/m

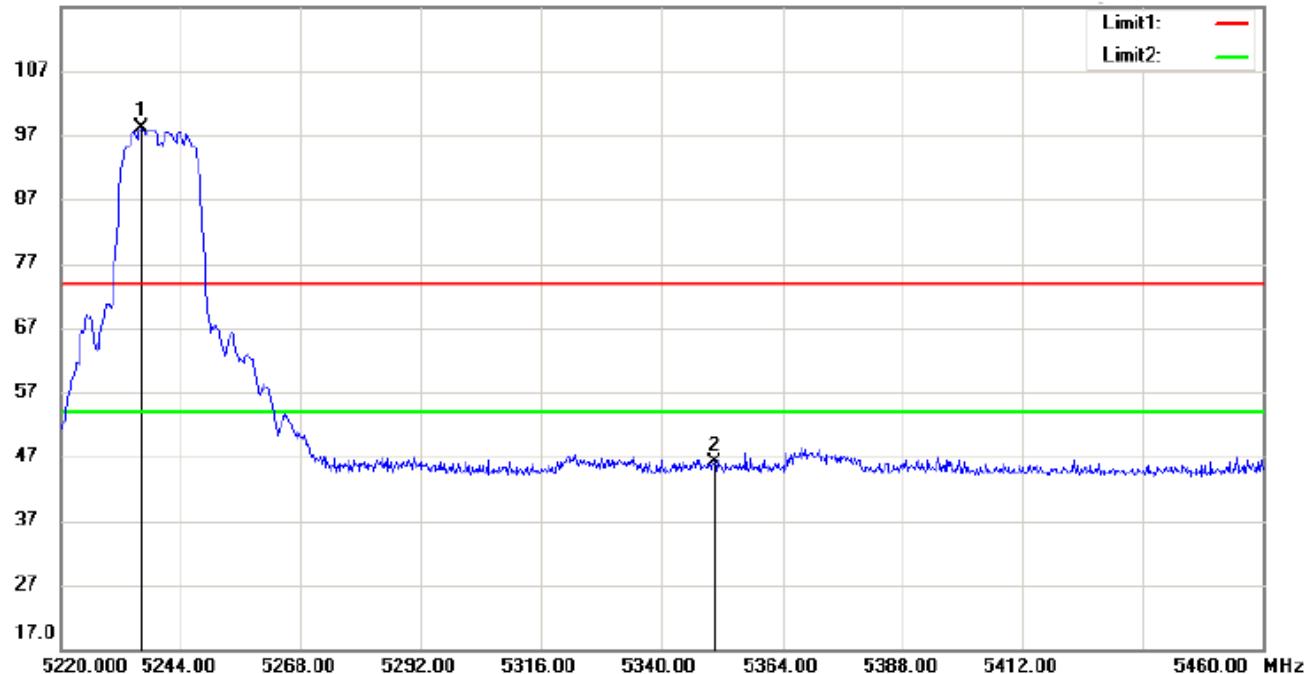

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5236.08	97.23	0.82	98.05	54	-44.05	peak
2	5350.32	45.28	0.92	46.20	54	7.80	peak

Remark: No any other emission which fall in restricted bands can be detected and be reported.

Test Level = Receiver Reading + Antenna Factor + Cable Loss- Preamplifier Factor

All frequencies within the "Restricted bands" have been evaluated to compliance. Section 15.205 Restricted bands of operation.

7.8 Frequency stability


Test requirement: FCC Part15 407 (g)

Standard Applicable: According to section 15.407(g), the manufacturers of UNII devices are responsible for ensuing frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user manual.

Test Procedure:

- 1) Set up the EUT on lowest channel and the highest channel
- 2) Test the EUT in the lowest channel and the Highest channel ,
- 3) Select the lowest operating frequency of the equipment under test.
- 4) Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
- 5) Adjust the centre frequency of spectrum analyzer on any frequency be measured.
- 6) Measure the frequency range by spectrum analyzer Marker function. set the Spectrum Analyzer as below:
 - Span: Wide enough to capture the complete power envelope, including all side bands
 - RBW: 100KHz
 - VBW: 100KHz
 - Detector function: RMS average
 - Trace mode: Max Hold
 - Sweep time: 1minute
- 7) Using the marker of the spectrum analyzer, find the the lowest frequency of the spectrum envelope This frequency shall be recorded as FL.
- 8) Select the highest operating frequency of the equipment under test.
- 9) Using the same set as step 6), find the highest frequency of the spectrum envelope. This frequency shall be recorded as FH.
- 10) Pretest the EUT at different transmission rate and worst case data in the report.

Test setup:

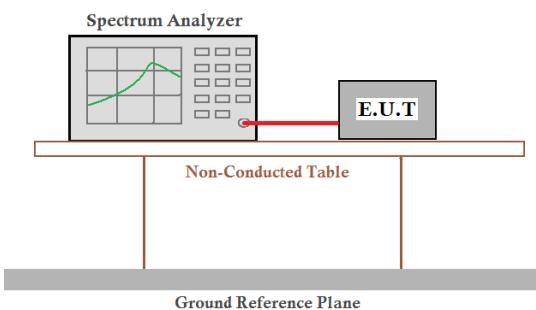



**Test Data:
Antenna A**

Test Conditions		Nominal Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Result
Temp (°C)	Volt (V AC)				
$T_{\text{nom}} (25)$	$V_{\text{nom}} (120)$	5180	5169.35	$F_L > 5150$	Pass
		5240	5248.65	$F_H < 5250$	Pass
$T_{\text{min}} (-20)$	$V_{\text{min}} (138)$	5180	5171.53	$F_L > 5150$	Pass
		5240	5248.56	$F_H < 5250$	Pass
	$V_{\text{max}} (102)$	5180	5172.37	$F_L > 5150$	Pass
		5240	5248.44	$F_H < 5250$	Pass
$T_{\text{max}} (55)$	$V_{\text{min}} (138)$	5180	5175.49	$F_L > 5150$	Pass
		5240	5248.72	$F_H < 5250$	Pass
	$V_{\text{max}} (102)$	5180	5174.68	$F_L > 5150$	Pass
		5240	5248.51	$F_H < 5250$	Pass

Antenna B

Test Conditions		Nominal Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Result
Temp (°C)	Volt (V AC)				
$T_{\text{nom}} (25)$	$V_{\text{nom}} (120)$	5180	5174.06	$F_L > 5150$	Pass
		5240	5248.95	$F_H < 5250$	Pass
$T_{\text{min}} (-20)$	$V_{\text{min}} (138)$	5180	5175.03	$F_L > 5150$	Pass
		5240	5249.02	$F_H < 5250$	Pass
	$V_{\text{max}} (102)$	5180	5174.83	$F_L > 5150$	Pass
		5240	5248.74	$F_H < 5250$	Pass
$T_{\text{max}} (55)$	$V_{\text{min}} (138)$	5180	5174.94	$F_L > 5150$	Pass
		5240	5248.67	$F_H < 5250$	Pass
	$V_{\text{max}} (102)$	5180	5174.88	$F_L > 5150$	Pass
		5240	5248.77	$F_H < 5250$	Pass


7.9 Occupied Bandwidth Test

Test Requirement:	RSS-Gen Issue 3 Clause 4.6.1
Standard Applicable	According to the section RSS-Gen Issue 3 Clause 4.6.1
EUT Setup	The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions set at 120kHz, the video bandwidth set at 300kHz.


Measurement Result:**For 5180-5240MHz Band**

Test Mode	Channel	Frequency (MHz)	Bandwidth (MHz)
Antenna A	Low	5180	15.09
	Middle	5210	15.09
	High	5240	15.09
Antenna B	Low	5180	15.09
	Middle	5210	15.09
	High	5240	15.09


Test mode:	5.2GHz Band Antenna A	Test channel:	Low
------------	-----------------------	---------------	-----

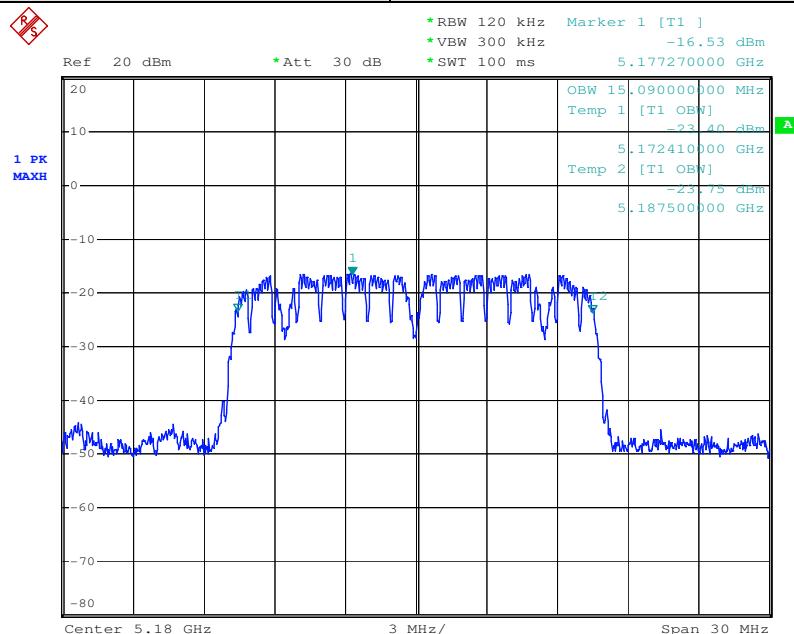


Test mode:	5.2GHz Band Antenna A	Test channel:	Middle
------------	-----------------------	---------------	--------

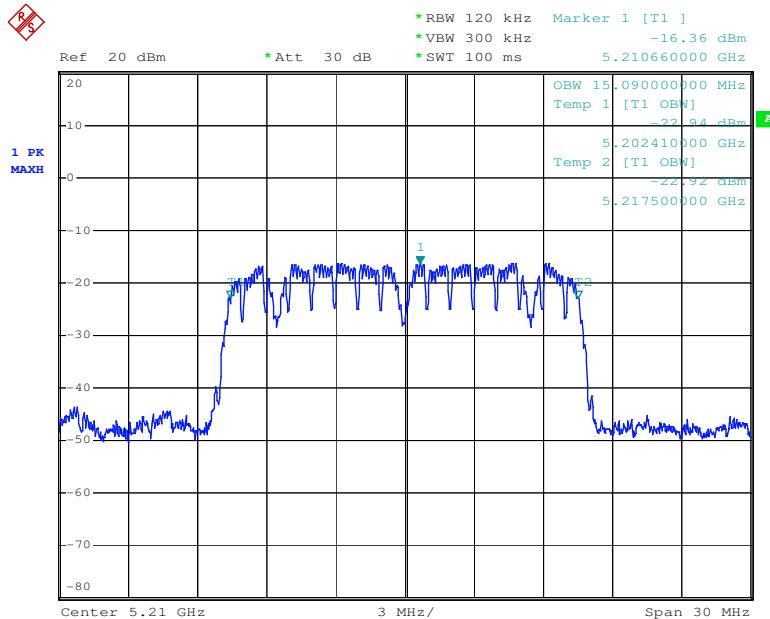


Test mode:	5.2GHz Band Antenna A	Test channel:	High
------------	-----------------------	---------------	------

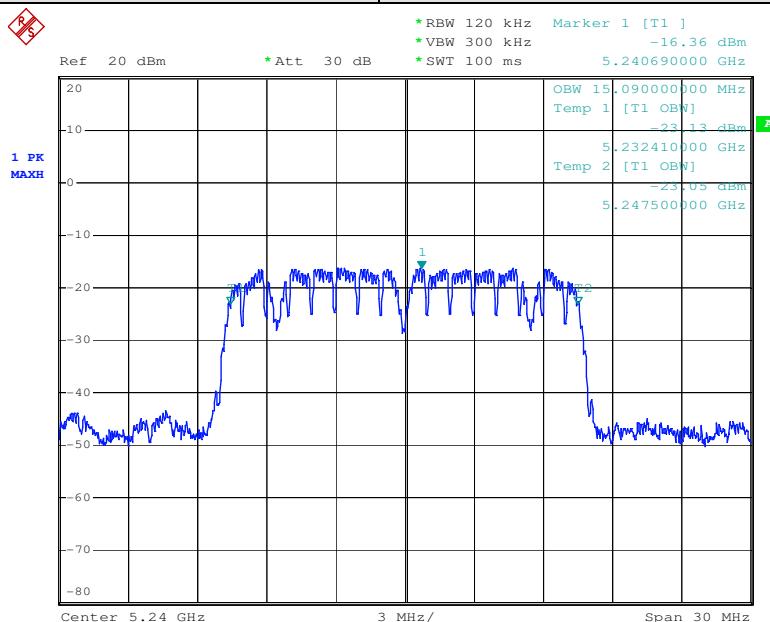


Test mode:	5.2GHz Band Antenna B	Test channel:	Low
------------	-----------------------	---------------	-----

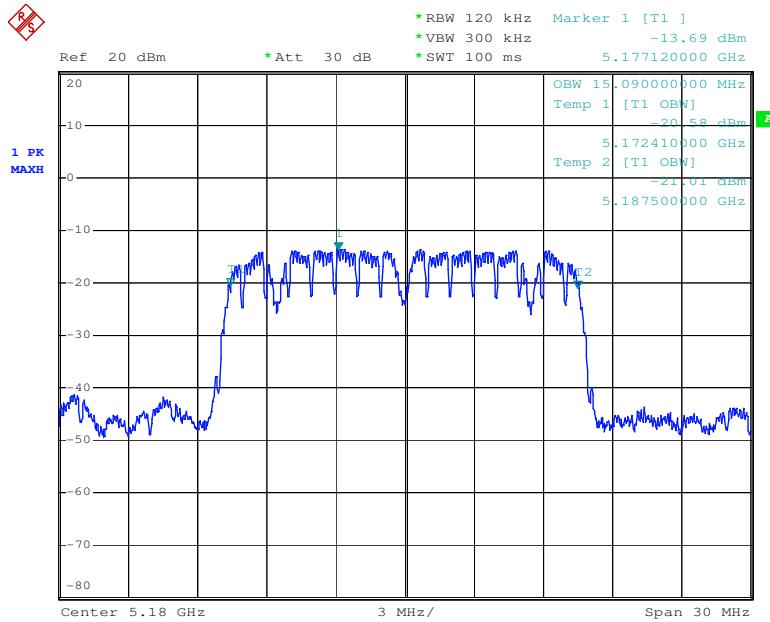

Test mode:	5.2GHz Band Antenna B	Test channel:	Middle
------------	-----------------------	---------------	--------

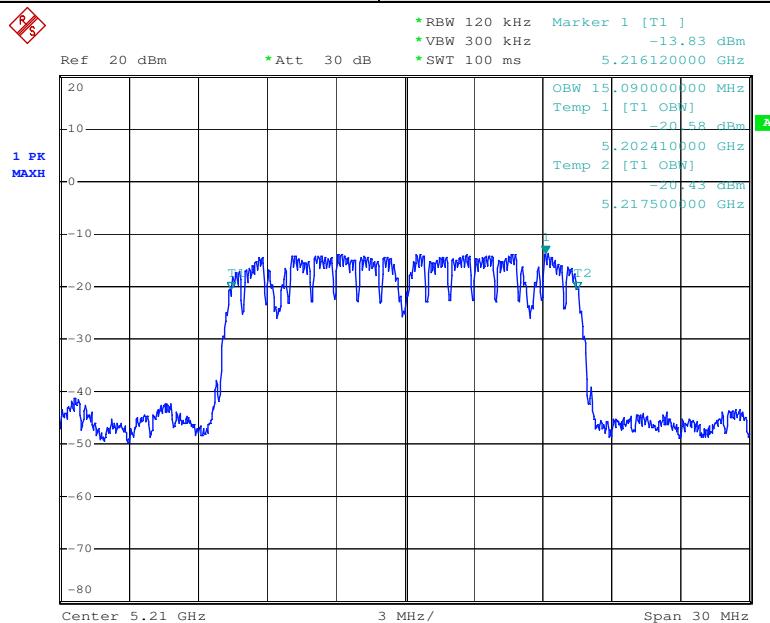

Test mode:	5.2GHz Band Antenna B	Test channel:	High
------------	-----------------------	---------------	------

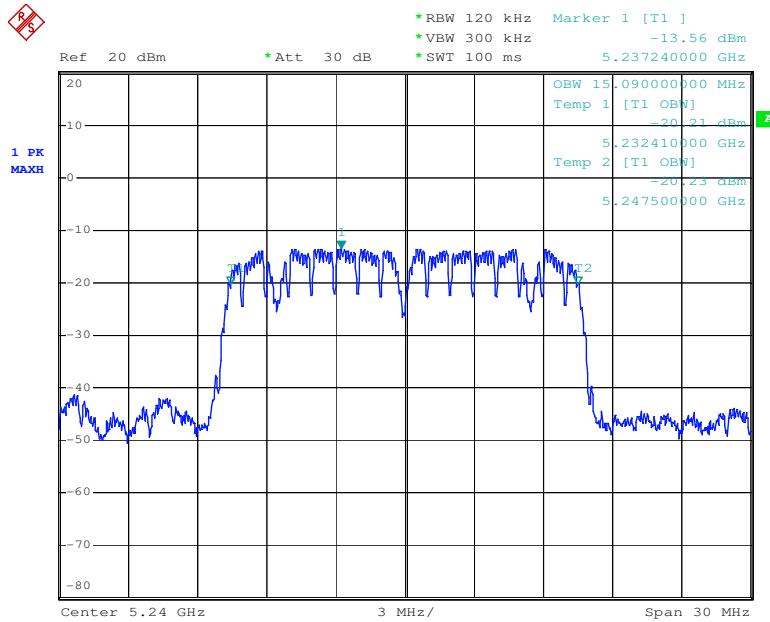



8 Test Setup Photographs

Refer to the < P910B_Test Setup photos>.

9 EUT Constructional Details

Refer to the < P910B _External Photos > & < P910B _Internal Photos >.

End of Report