

Test Report

INTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 15 C and INDUSTRY CANADA REQUIREMENTS

Equipment Under Test: 2.4 GHz Transceiver

Type/ Model: DRC-DR D3

Manufacturer: Scanreco AB
Årsta Skolgränd 22
SE-47144 Stockholm
SWEDEN

Customer: Scanreco AB
Årsta Skolgränd 22
SE-47144 Stockholm
SWEDEN

FCC Rule Part: 15.247: 2012
IC Rule Part: RSS-210, Issue 8, 2010
RSS-GEN Issue 4, 2014

KDB: Filing and Measurement Guidelines for
Frequency Hopping Spread Spectrum Systems
DA 00-705 (March 30, 2000)

Date: February 6, 2015

Issued by:



Timo Hietala
Testing Engineer

Date: February 6, 2015

Checked by:



Janne Nyman
Compliance Specialist

PRODUCT DESCRIPTION	3
Equipment Under Test (EUT)	3
Ratings and declarations	3
Power Supply	3
GENERAL REMARKS.....	4
Disclaimer	4
SUMMARY OF TESTING.....	5
EUT Test Conditions during Testing	5
TEST RELTS	6
Hopping Channel Carrier Frequencies Separation	6
Number of Hopping Channels	7
Average Time of Occupancy of Hopping Frequency	8
Duty cycle correction factor, Transmit time in 100 ms	10
LIST OF TEST EQUIPMENT	11
Conducted Emissions.....	11
Radiated Emissions.....	11

Equipment Under Test (EUT)

Wireless System-on-Module

Type/ Model: DRC-DR D3

Serial Number: -

DRC-DR D3 is a 2.4 GHz radio module that supports frequency hopping.

The sample had an antenna connector and an external antenna.

Conducted measurements were made with the sample having an external antenna. Measurements were made from the antenna connector (SMA).

Classification of the device

Fixed device	☐
Mobile Device (Human body distance > 20cm)	☒
Portable Device (Human body distance < 20cm)	☐

Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

Ratings and declarations

Operating Frequency Range (OFR):	2405 – 2480 MHz
Channels:	16
Channel separation:	5 MHz
Conducted power:	19.84 dBm
Transmission technique:	FHSS
Modulation:	GFSK
Integrated antenna gain:	-
External antenna gain:	4.0 dBi

Power Supply

The following wall charger was used during the tests (supplied with 115 V/ 60 Hz).

Charger:

Manufacturer:	Friwo Mobile Power GmbH
Model:	FW7600/05
Serial number:	-
Input voltage:	100-240 VAC
Rated current:	0.09A max
Rated frequency:	50-60 Hz
Output voltage:	5 V DC
Output current:	0.65A max

Disclaimer

This test report is issued under SGS Fimko general terms of delivery (available on request and accessible at www.fi.sgs.com). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated: (a) the results shown in this document refer only to the sample(s) tested and (b) such sample(s) are retained for three months. This document cannot be reproduced except in full, without prior approval of SGS Fimko.

Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

Summary of Testing

SUMMARY OF TESTING

Test Specification	Description of Test	Result
15.247(a)(1) / RSS-210 A8.1	Hopping Channel Carrier Frequency Separation	PASS
§15.247(a)(1)(iii) / RSS-210 A8.1	Number of Hopping Frequencies	PASS
§15.247(a)(1)(iii) / RSS-210 A8.1	Average Time of Occupancy of Hopping Frequency	PASS

EUT Test Conditions during Testing

The EUT was configured into the wanted channel and was in continuous transmit mode during all the tests.

Following channels were used during the tests:

Channel	Frequency/ MHz
LOW	2405
MID	2440
HIGH	2480

Test Facility

☐ Testing Location / address: FCC registration number: 90598	SGS Fimko Ltd Särkiniementie 3 FI-00210, HELSINKI FINLAND
☒ Testing Location / address: FCC registration number: 178986 Industry Canada registration number: 8708A-2	SGS Fimko Ltd Karakaarenkuja 4 FI-02610, ESPOO FINLAND

Hopping Channel Carrier Frequencies Separation

Standard: ANSI C63.10 (2013)
Tested by: PKA
Date: 31.10.2014
Temperature: 22.7 °C
Humidity: 37 % RH


FCC Rule: 15.247(a)(1)

Frequency hopping systems with an output power less than 125mW shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test result

Table 1. Hopping channel carrier frequencies separation test result.

Data rate	Measured separation	Measured 20 dB BW	Limit	Result
1 Mbps	5.022 MHz	2.822 MHz	1.881 MHz	PASS
Limit:	25 kHz or 2/3 of the 20 dB bandwidth of the hopping channel whichever is greater			

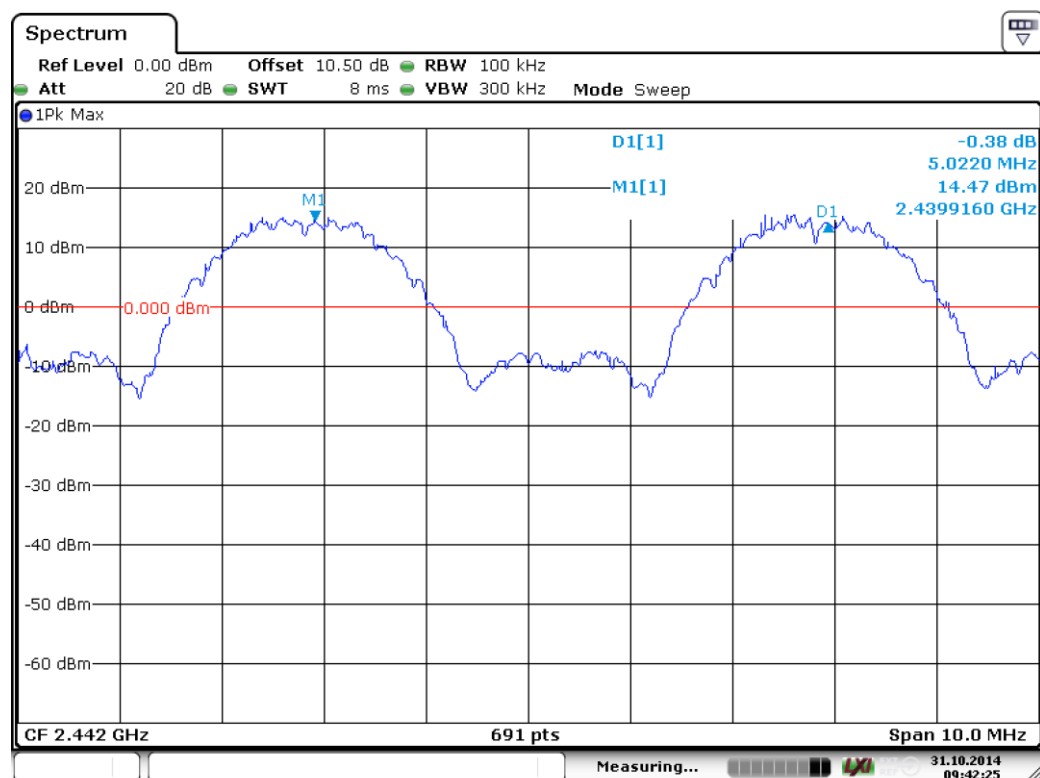

Date: 31.OCT.2014 09:42:25

Figure 1. Measured hopping channels carrier frequency separation.

Number of Hopping Channels


Standard: ANSI C63.10 (2013)
Tested by: PKA
Date: 31.10.2014
Temperature: 22.7 °C / 23.1 °C
Humidity: 37 % / 38 % RH

FCC Rule: 15.247(a)(1)(iii)

For frequency hopping systems operating in the 2400 – 2483.5 MHz band shall use at least 15 channels.

Channels measured: 16

Result: PASS

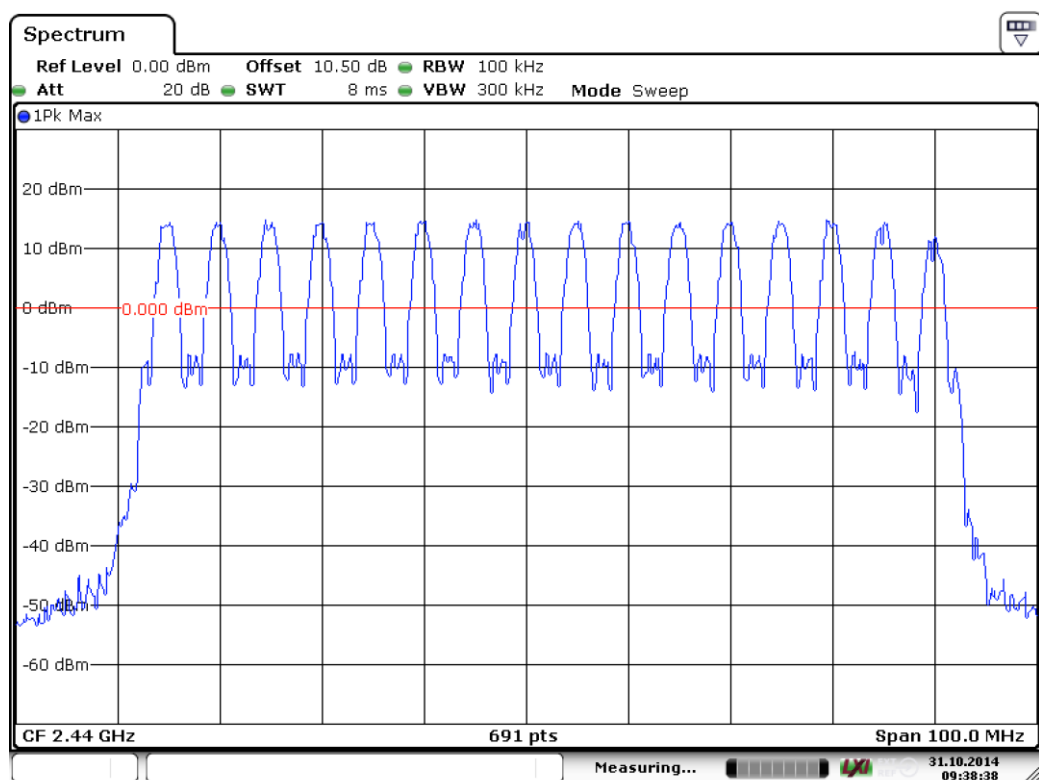

Date: 31.OCT.2014 09:38:37

Figure 2. 16 channels.

Average Time of Occupancy of Hopping Frequency

Standard:	ANSI C63.10	(2013)
Tested by:	PKA	
Date:	31.10.2014	
Temperature:	22.7 °C	
Humidity:	37 % RH	

FCC Rule: 15.247(a)(1)(iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Time of occupancy calculation:


Number of channels = 16

Measurement period = $0.4 \text{ s} \times 16 = 6.4 \text{ s}$

Number of transmission cycles in measurement period = 83


Time of occupancy = (single duration) x (repetition) = $4.2783 \text{ ms} \times 83 \text{ times} = 355.1 \text{ ms}$

Average Time of Occupancy of Hopping Frequency

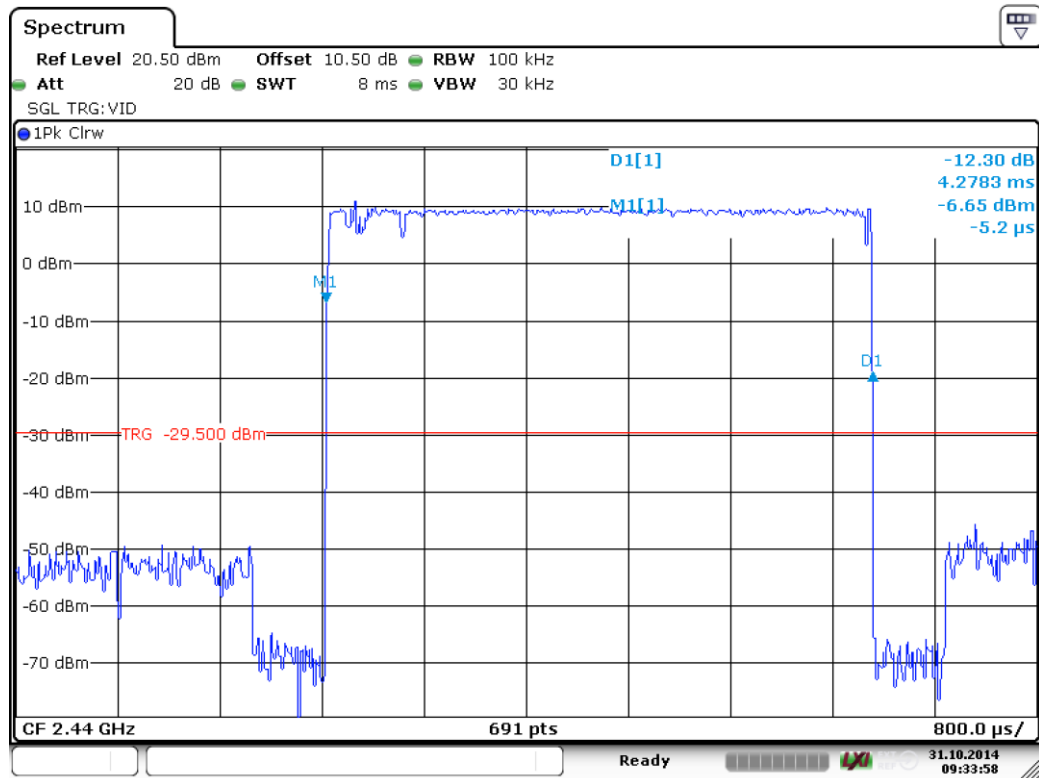

Date: 31.OCT.2014 09:33:58

Figure 3. One channel dwell time.

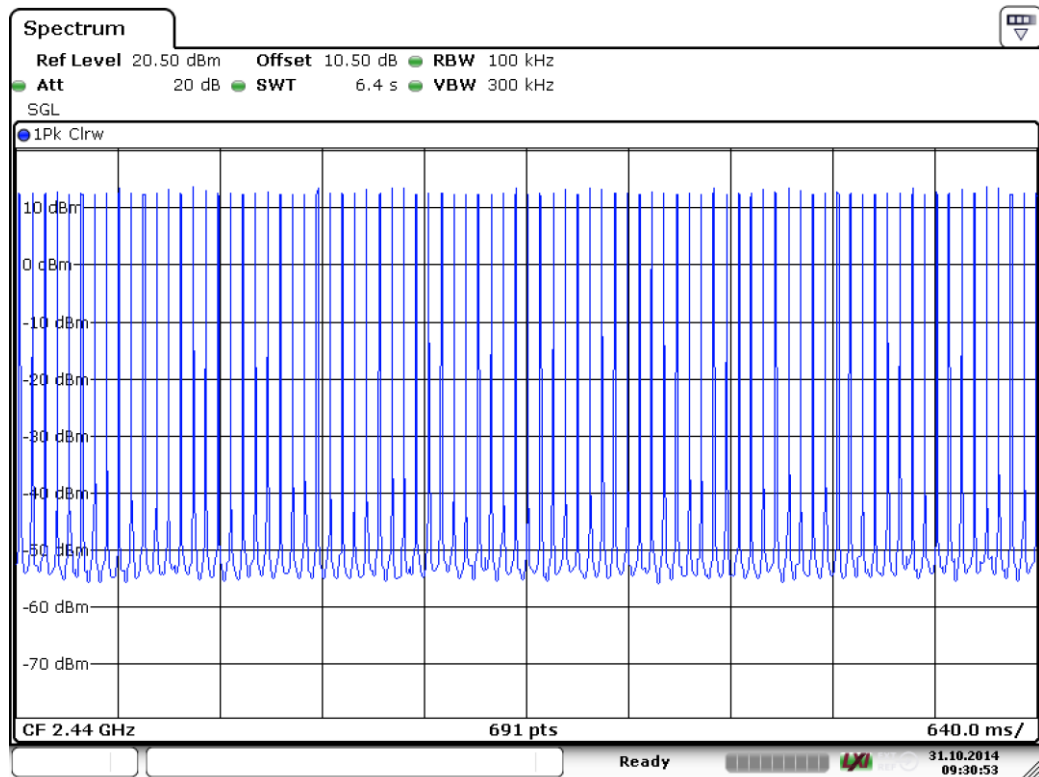

Date: 31.OCT.2014 09:30:53

Figure 4. Hopping on, number of transmissions, channel 2440MHz, 83 transmissions

Duty cycle correction factor, Transmit time in 100 ms

Standard:	ANSI C63.10	(2013)
Tested by:	PKA	
Date:	31.10.2014	
Temperature:	22.7 °C	
Humidity:	37 % RH	

Spectrum analyzer with zero span was used to investigate spectrum.

15.35(c) Unless otherwise specified, e.g. § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

Test data

Pulse period (T) = 6.4s/83=77.1ms

Pulses/100ms=2

Length of one pulse = 4.278ms

DutyCycleCorrectionFactor=20*log(Tocc/100)=20*log(2*4.278/100)=-21.35dB

LIST OF TEST EQUIPMENT
LIST OF TEST EQUIPMENT
Conducted Emissions

Equipment	Manufacturer	Type	Serial no	Inv.no
TEST RECEIVER	ROHDE & SCHWARZ	ESU 26	100185	8453
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-
PULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	#1	8359
LISN	ROHDE & SCHWARZ	ESH3-Z5	863794/014	8019
AC Power Source	CALIFORNIA INSTRUMENTS	5001 iX Series II	58209	7826

Radiated Emissions

Equipment	Manufacturer	Type	Serial no	Inv.no
TEST RECEIVER	ROHDE & SCHWARZ	ESU 26	100185	8453
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-
ANTENNA (30-1000 MHz)	SCHWARZBECK	VULB 9168	8168-503	8911
ANTENNA MAST	DEISEL	MA240	240/455	5017
TURNTABLE	DEISEL	DS420	-	5015
CONTROLLER	COMTEST	HD100	100/457	5018
AC Power Source	CALIFORNIA INSTRUMENTS	5001 iX Series II	58209	7826

All used measurement equipment was calibrated (if required).