

**FCC PART 15 CLASS B
EMI MEASUREMENT AND TEST REPORT
FOR**

WANG'S INTERNATIONAL INC..

14317 E. Don Julian Road
City Of Industry, CA 91746

FCC ID: N5TPL940T

September 22, 1998

This Report Concerns: ☒ Original Report	Equipment Type: Transmitter, ITE
Test Engineer: Philip Wei	
Test Date: September 18, 1998	
Certified By:  John Y. Chan - Director, Compliance Engineering	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street, Suite 2 Sunnyvale, CA 94086 (408) 732-9162	

Note: This report may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 OBJECTIVE.....	3
1.3 RELATED SUBMITTAL(S)/GRANT(S):	3
1.4 TEST METHODOLOGY.....	3
1.5 TEST FACILITY.....	3
1.6 TEST EQUIPMENT LIST	4
1.7 EQUIPMENT UNDER TEST (EUT)	4
1.8 SUPPORT EQUIPMENT.....	4
1.9 EUT CONFIGURATION DETAILS AND LIST.....	4
1.10 EXTERNAL I/O CABLING	4
2 - SYSTEM TEST CONFIGURATION.....	5
2.1 JUSTIFICATION	5
2.2 BLOCK DIAGRAM.....	5
2.3 TEST SETUP BLOCK DIAGRAM.....	6
2.4 EQUIPMENT MODIFICATIONS	7
3 - CONDUCTED EMISSIONS TEST DATA	8
4 - RADIATED EMISSION DATA	9
4.1 EUT SETUP	9
4.2 SPECTRUM ANALYZER SETUP.....	9
4.3 TEST PROCEDURE	9
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	9
4.5 SUMMARY OF TEST RESULTS.....	10
4.6 RADIATED EMISSIONS TEST RESULT DATA	10
5- FCC PRODUCT LABELING AND WARNING STATEMENT.....	11
5.1 FCC ID LABEL	11
5.2 PROPOSED LABEL LOCATION ON EUT	11
5.3 FCC WARNING STATEMENT.....	11
6 - CONDUCTED AND RADIATED SETUP PHOTOGRAPHS.....	12
6.1 RADIATED EMISSION PHOTOGRAPH – FRONT VIEW	12
6.2 RADIATED EMISSION PHOTOGRAPH – REAR VIEW.....	13
7 – EUT PHOTOGRAPHS	14
7.1 EUT: TOP VIEW.....	14
7.2 EUT: BOTTOM VIEW	15
7.3 EUT: INSIDE COMPONENT VIEW	16
7.4 EUT: INSIDE CIRCUIT VIEW	17
APPENDIX A –EUT BLOCK DIAGRAM.....	18
APPENDIX B – PLOT OF CONDUCTED EMISSION TEST DATA.....	19
APPENDIX C – USER MANUAL.....	20
APPENDIX D – AGENCY AUTHORIZATION LETTER	21

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *WANG'S INTERNATIONAL INC.*, model *PL940T* or the "EUT" as referred to in this report is a Transmitter which measures 2.5" L x 1.75" W x 0.75" H.

1.2 Objective

This Class B report is prepared on behalf of *WANG'S INTERNATIONAL INC.* in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules and to ICES-003 of the Canadian Interference-Causing Equipment Regulations.

The objective of the manufacturer is to demonstrate compliance with FCC Class B limits for conducted and radiated margin and to ICES-003 requirements for ~~Information Technology Equipment~~.

1.3 Related Submittal(s)/Grant(s):

No Related Submittals

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 -1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Suite 2, Sunnyvale, California, USA.

Test sites at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on

December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-674 and R-657. The test sites has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program

(NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1993, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167.

1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Data
HP	Spectrum Analyzer	8568B	2610A02165	2/6/99
HP	Spectrum Analyzer	8593B	2919A00242	3/20/99
HP	Amplifier	8349B	2644A02662	3/20/99
HP	Quasi-Peak Adapter	85650A	917059	2/6/99
HP	Amplifier	8447E	1937A01046	2/6/99
A.H. System	Horn Antenna	SAS0200/571	261	2/27/99
Com-Power	Log Periodic Antenna	AL-100	16005	1/2/99
Com-Power	Biconical Antenna	AB-100	14012	1/2/99
Solar Electronics	LISN	8012-50-R-24-BNC	968447	3/28/99
Com-Power	LISN	LI-200	12208	12/20/98
Com-Power	LISN	LI-200	12005	12/20/98
BACL	Data Entry Software	DES1	0001	12/20/98

1.7 Equipment Under Test (EUT)

Manufacturer	Description	Model	Serial Number	FCC ID
WANG'S INTERNATIONAL INC.	Transmitter	PL940T	5862	N5TPL940T

1.8 Support Equipment

NOT APPLICABLE

1.9 EUT Configuration Details and List

NOT APPLICABLE.

1.10 External I/O Cabling

NOT APPLICABLE

2 - SYSTEM TEST CONFIGURATION

2.1 Justification


The EUT was configured for testing in a typical fashion (as normally used in a typical application).

The final qualification test was performed with the EUT operating at normal mode.

2.2 Block Diagram

Appendix A contains a copy of the EUT's block diagram as reference.

2.3 Test Setup Block Diagram

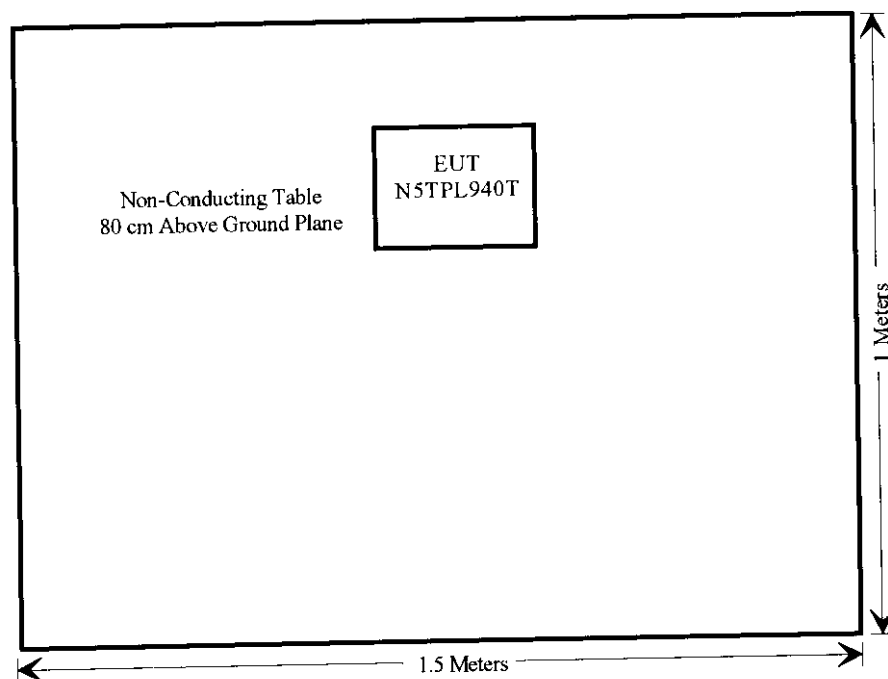

2.4 Equipment Modifications

No modifications were necessary for the EUT to comply.

3 - CONDUCTED EMISSIONS TEST DATA

Not Applicable because of battery operation.

4 - RADIATED EMISSION DATA

4.1 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the ANSI C63.4 - 1992. The specification used was the FCC Class B limits.

The spacing between the peripherals was 10 cm.

External I/O cables are draped over edge of test table or bundled when necessary.

4.2 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR 15.33, since the internal processor speed operates below 108 MHz, the EUT was tested to 1000 MHz. 2

During the radiated emission test, the spectrum analyzer was set with the following configurations: 0

Start Frequency	30 MHz	2 0
Stop Frequency	1000 MHz	
Sweep Speed	Auto	
IF Bandwidth	100 kHz	
Video Bandwidth	1 MHz	
Quasi-Peak Adapter Bandwidth	120 kHz	
Quasi-Peak Adapter Mode	Normal	
Resolution Bandwidth	1MHz	

4.3 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (less than -4 dBμV), and are distinguished with a "Qp" in the data table.

The EUT was operating at normal to represent worst case results during final qualification test. Therefore, this configuration was used for final test data recorded in the table(s) listed under section 4.7 of this report.

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Class B Limit}$$

4.5 Summary of Test Results

According to the final data in section 4.6, the EUT complied with the FCC Class B standards and these test results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, and had the worst margin of:

-14.9 dB μ V at 314.70 MHz in the Horizontal polarization for Normal operating mode.

4.6 Radiated Emissions Test Result Data

4.6.1 See the graph 2. Duration time = 0.15s, which is smaller than 5s.

4.6.2 Final Test Data for Normal Operating Mode, 30 to 1000 MHz, Fundamental Frequency
Per 15.231 (b) - Maximized.


INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTE AMPLITUDE	FCC CLASS B	
Frequency	Ampl.	Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit	Margin
MHz	dB μ V/m	Degree	Meter	H/ V	dB μ V/m	dB	dB	dB μ V/m	dB μ V/m	dB
314.70	63.8	0	1	H	14.2	5.7	23.0	60.7	75.6	-14.9 " On "
314.70	63.4	0	1	H	14.2	5.7	23.0	60.3	75.6	-15.3 " Off "
314.70	63.9	0	1	V	13.2	5.7	23.0	59.8	75.6	-15.8 " On "
314.70	63.9	0	1	V	13.2	5.7	23.0	59.8	75.6	-15.8 " Off "

4.6.3 The bandwidth of the emission shall be no wider than 0.25% of the center frequency for a device . See the graph. The bandwidth is 200KHz, which is 0.06%.

4.6.4 Preliminary scan. 30-1000 MHz. No emission within 10dB of the class B limits were found.

5— FCC PRODUCT LABELING AND WARNING STATEMENT


5.1 FCC ID Label

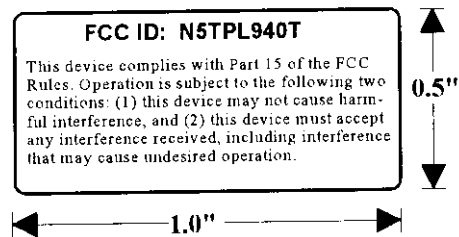

Specifications: Text is black in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT.

5.2 Proposed Label Location on EUT

EUT Rear View

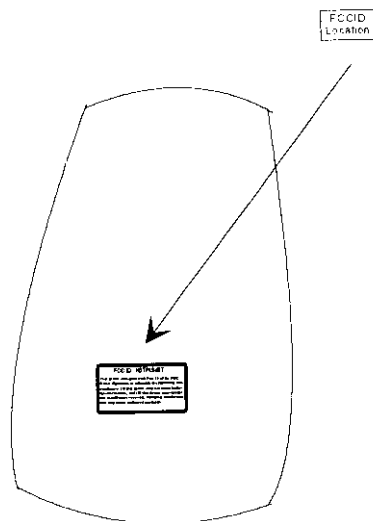

5.3 FCC Warning Statement

The FCC Warning Statement is included in the product manual. A proposed sample of the statement is presented in Appendix C of this report as reference.

Bay Area Compliance Laboratory, Corp.

Company Name: Wang's International

Test Engineer: Philip Wei

EUT Description: Transmitter

Date: 01/15/99

File Name: 990115B1

Test Setup: EUT Only

Per FCC Rules Section 15.231

Run#1: Per 15.231 (a,2)

See Graph 3&4, Duration time = 0.025s(ON) & 0.038s(OFF), which are smaller than 5s.

Run # 2: Final Maximized Scan. 30-1000MHz.

Fundermental Frequency

Frequency	Reading	Direction	Hight	Polar	Antenna Loss	Cable loss	Amplifier	Correction Factor	FCC B	FCC B	Button
MHz	dBuV	Degree	Meter	H / V	dBuV	dBuV	dBuV	dBuV	Limit	Margin	On/Off
314.70	72.5	0	1	h	15.9	3.7	21.6	70.5	75.6	-5.1	On
314.70	72.3	0	1.0	h	15.9	3.7	21.6	70.3	75.6	-5.3	Off
314.70	71.4	0	1	v	15.9	3.7	21.6	69.4	75.6	-6.2	On
314.70	68.5	0	1	v	15.9	3.7	21.6	66.5	75.6	-9.1	Off

Run # 2: Final Maximized Scan. 300-35000MHz.


10 Harmonics of Fundermental Frequency

Frequency	Reading	Direction	Hight	Polar	Antenna Loss	Cable loss	Amplifier	Correction Factor	FCC B	FCC B	Button
MHz	dBuV	Degree	Meter	H / V	dBuV	dBuV	dBuV	dBuV	Limit	Margin	On/Off
944.12	48.5	0	1	h	24.4	3.7	22.7	53.9	55.6	-1.7	3th-Off
944.12	48.3	0	1	h	24.4	3.7	22.7	53.7	55.6	-1.9	3th-On
629.40	51.7	0	1.0	h	20.2	3.1	21.4	53.6	55.6	-2.0	2th-Off
629.40	51.1	0	1.0	h	20.2	3.1	21.4	53.0	55.6	-2.6	2th-On
1258.80	42.7	0	1	v	25.9	3.7	19.7	52.6	55.6	-3.0	4th-Off
1258.80	42.4	0	1	h	25.9	3.7	19.7	52.3	55.6	-3.3	4th-On
944.12	46.9	0	1	v	24.4	3.7	22.7	52.3	55.6	-3.3	3th-Off
1258.81	42.2	0	1	h	25.9	3.7	19.7	52.1	55.6	-3.5	4th-Off
1258.81	41.6	0	1	v	25.9	3.7	19.7	51.5	55.6	-4.1	4th-On
1573.42	43.2	0	1	v	25.3	2.6	19.8	51.3	55.6	-4.3	5th-On
1888.25	42.1	0	1	h	25.3	2.6	19.8	50.2	55.6	-5.4	6th-On
629.41	47.9	0	1	v	20.2	3.1	21.4	49.8	55.6	-5.8	2th-Off
2202.98	37.9	0	1	h	28.1	3.4	19.8	49.5	55.6	-6.1	7th-On
1573.42	41.4	0	1	h	25.3	2.6	19.8	49.5	55.6	-6.1	5th-Off
944.12	43.8	0	1	v	24.4	3.7	22.7	49.2	55.6	-6.4	3th-On
1573.42	40.8	0	1	v	25.3	2.6	19.8	48.9	55.6	-6.7	5th-Off
1888.25	39.5	0	1	h	25.3	2.6	19.8	47.6	55.6	-8.0	6th-Off
629.41	45.2	0	1	v	20.2	3.1	21.4	47.1	55.6	-8.5	2th-On
1573.42	37.7	0	1	h	25.3	2.6	19.8	45.8	55.6	-9.8	5th-On
2517.69	32.5	0	1	v	29.0	3.7	19.8	45.3	55.6	-10.3	8th-Off

2202.98	31.6	0	1	v	28.1	3.4	19.8	43.2	55.6	-12.4	7th-On
3147.09	28.4	0	1	h	30.3	4.0	20.0	42.7	55.6	-12.9	10th-Off
2202.98	30.8	0	1	h	28.1	3.4	19.8	42.4	55.6	-13.2	7th-Off
3147.09	28.1	0	1	v	30.3	4.0	20.0	42.4	55.6	-13.2	10th-Off
3147.09	27.8	0	1	v	30.3	4.0	20.0	42.1	55.6	-13.5	10th-On
2832.37	28.8	0	1	h	29.0	3.7	19.8	41.6	55.6	-14.0	9th-On
2517.69	28.5	0	1	h	29.0	3.7	19.8	41.3	55.6	-14.3	8th-On
2202.98	29.2	0	1	v	28.1	3.4	19.8	40.8	55.6	-14.8	7th-Off
2832.37	27.8	0	1	v	29.0	3.7	19.8	40.6	55.6	-15.0	9th-On
2517.69	26.9	0	1	v	29.0	3.7	19.8	39.7	55.6	-15.9	8th-On
2832.37	26.8	0	1	v	29.0	3.7	19.8	39.6	55.6	-16.0	9th-Off
1888.25	31.4	0	1	v	25.3	2.6	19.8	39.5	55.6	-16.1	6th-Off
1888.25	31.3	0	1	v	25.3	2.6	19.8	39.4	55.6	-16.2	6th-On
3147.09	24.3	0	1	h	30.3	4.0	20.0	38.6	55.6	-17.0	10th-On
2517.69	25.3	0	1	h	29.0	3.7	19.8	38.1	55.6	-17.5	8th-Off
2832.37	23.6	0	1	h	29.0	3.7	19.8	36.4	55.6	-19.2	9th-Off
Run#4: The bandwidth of the fundermental emission shall be wider than 0.25% of center frequency											
for devices operating above 70 Mhz and below 900Mhz											
See Graph #2, the EUT 20db bandwidth is 39 Khz which is 0.012% of the center frequency(314.70Mhz)											
Run#5: Preliminary scan:											
No emission within 10db of the class B limits were found.											

WANG, S INTERNATIONAL TRANSMIT UNIT
REF 97.0 dBμV ATTEN 0 dB
MKR Δ 39 KHZ
0.40 dB
10 dB/

DL
56.3
dBμV

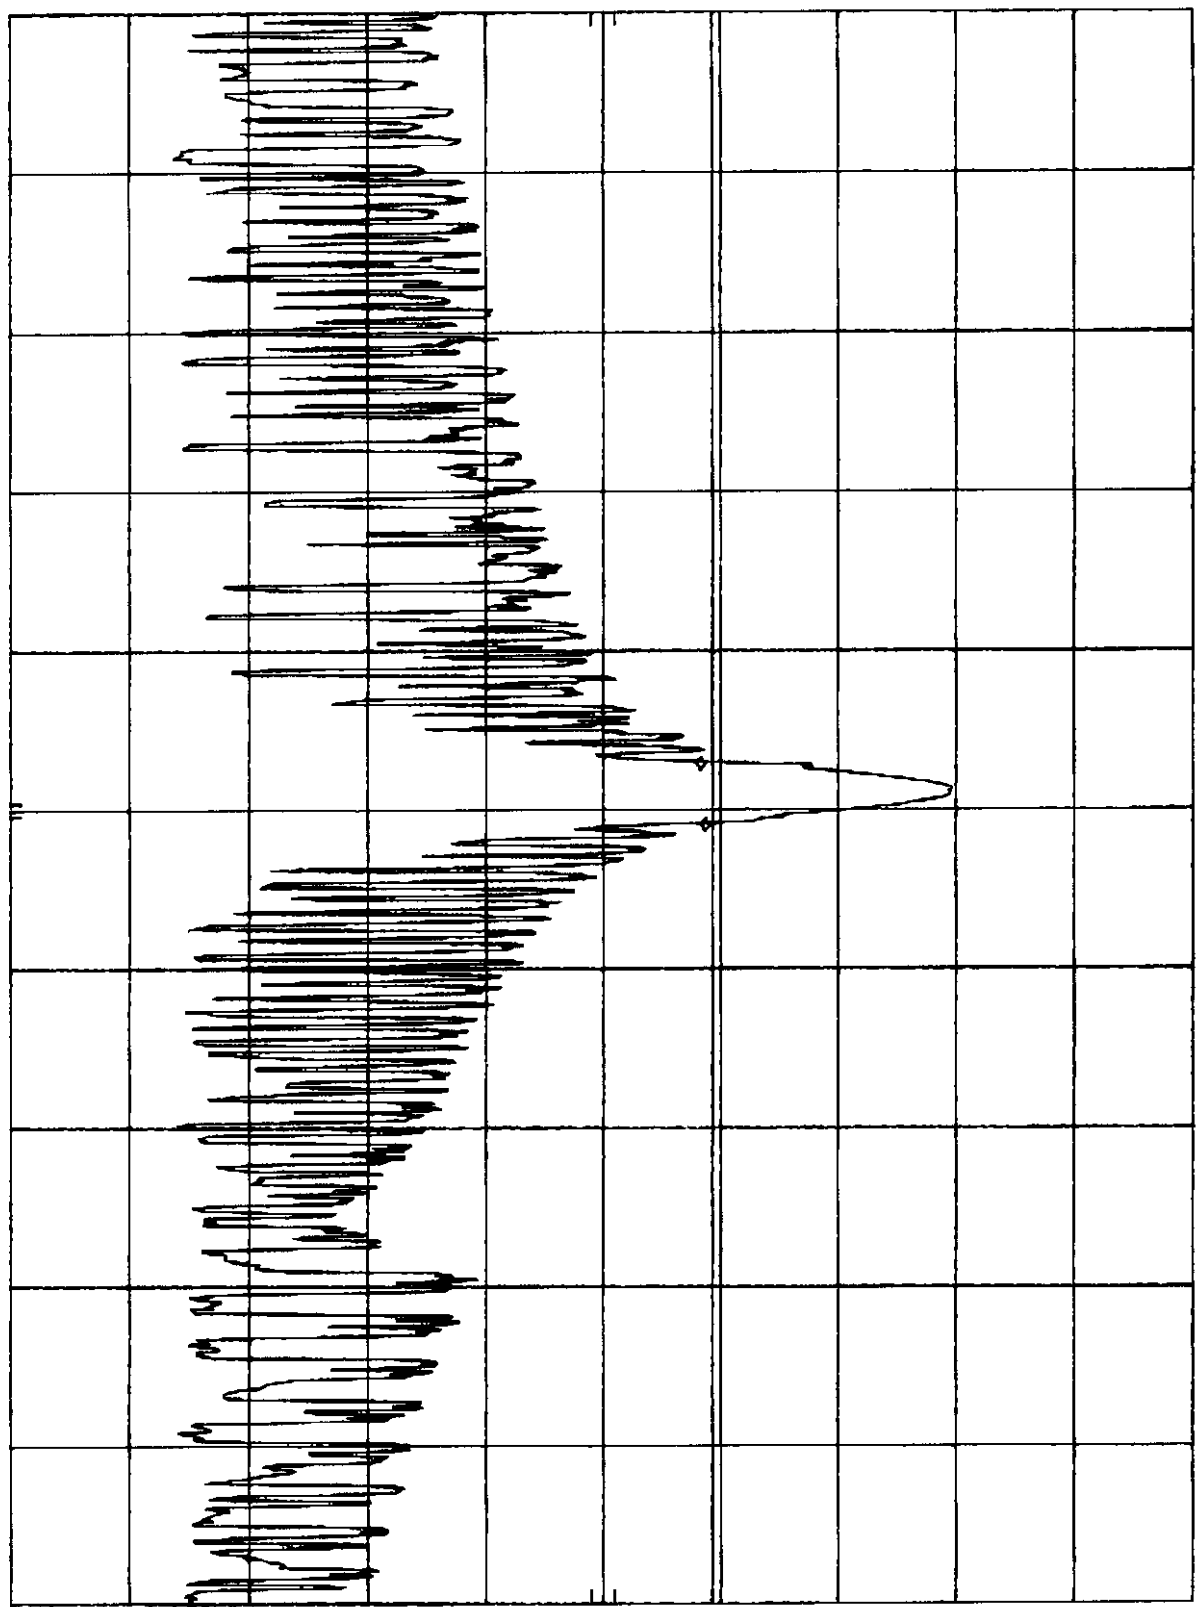


CENTER 314.71 MHZ
RES BW 10 KHZ
VBW 10 KHZ
SPAN 1.00 MHZ
SWP 30.0 msec

#3

hp

10 dB/

WANG. S INTERNATIONAL TRANSMIT UNIT MKR Δ 38.00 msec
REF 97.0 dB μ V ATTN 0 dB -58.20 dB

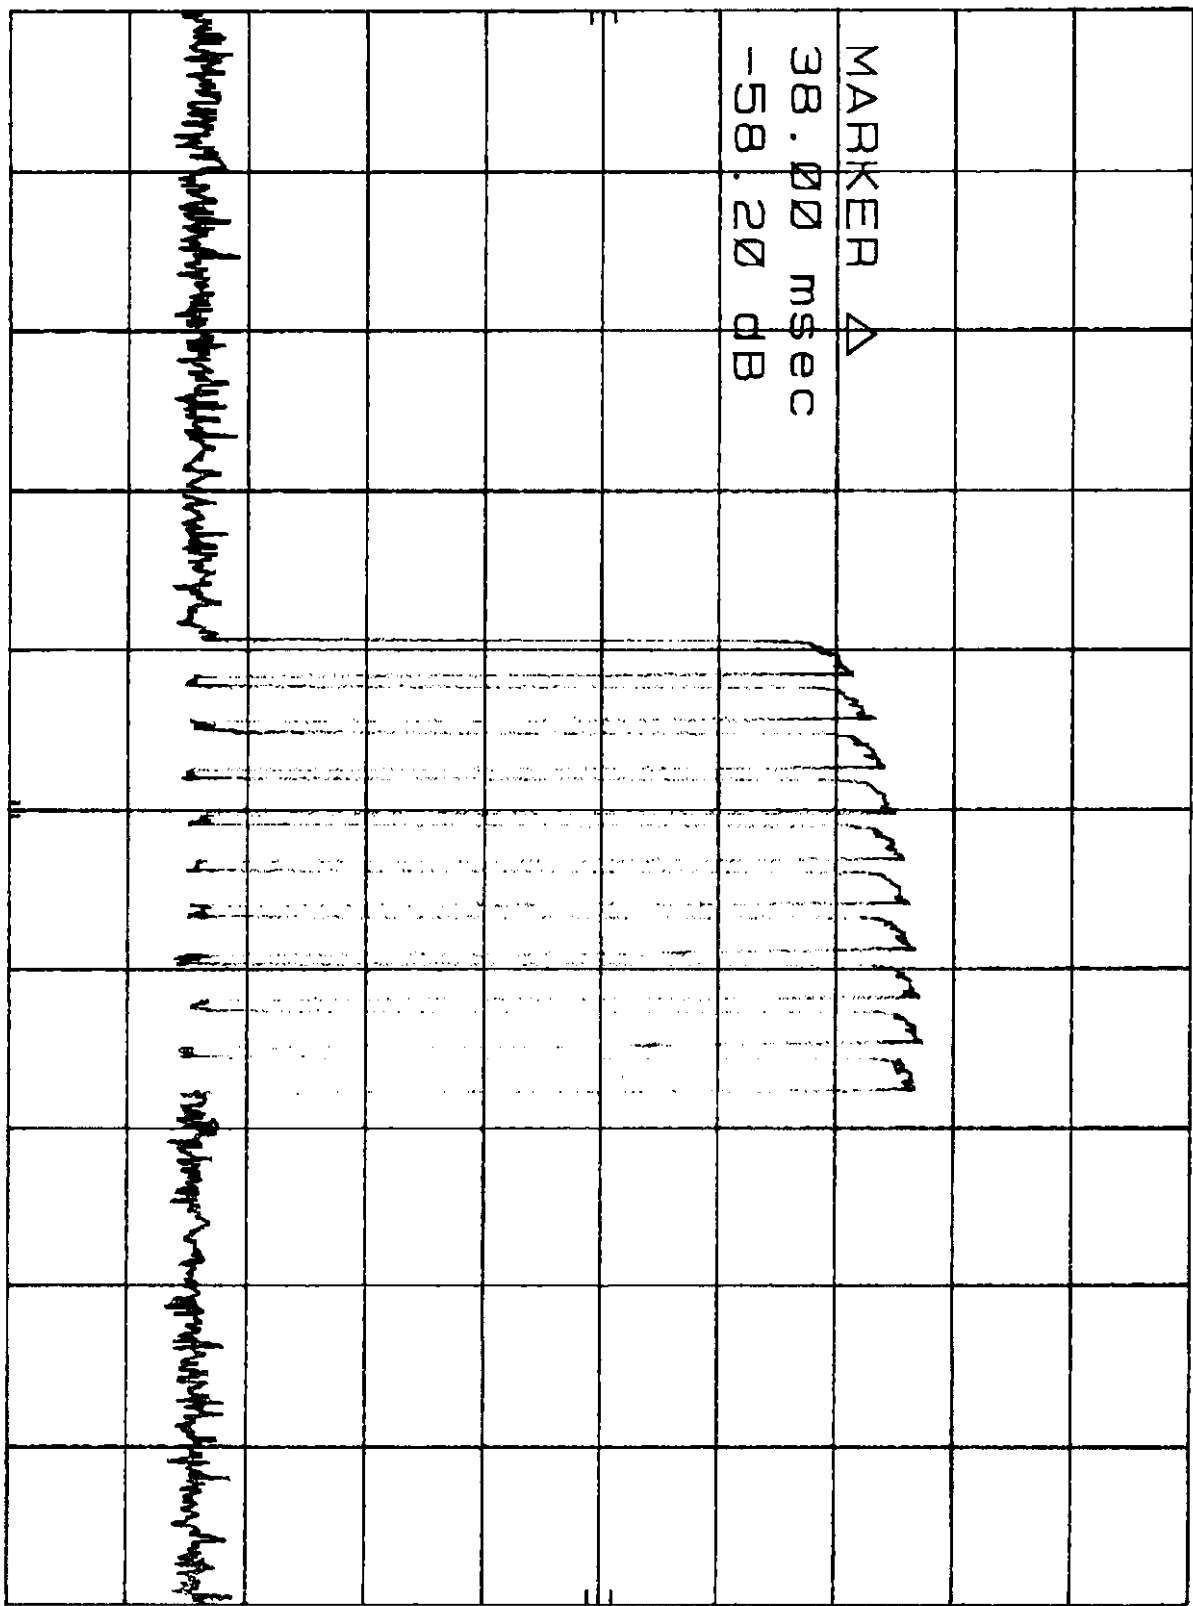

CENTER 314.713 000 MHz SPAN 0 Hz
RES BW 10 KHZ VBW 10 KHZ SWP 1.00 sec


WANG, S INTERNATIONAL TRANSMIT UNIT

h_p REF 97.0 dBμV ATTEN 0 dB

MRK Δ 25.00 msec

54.60 dB

10 dB/

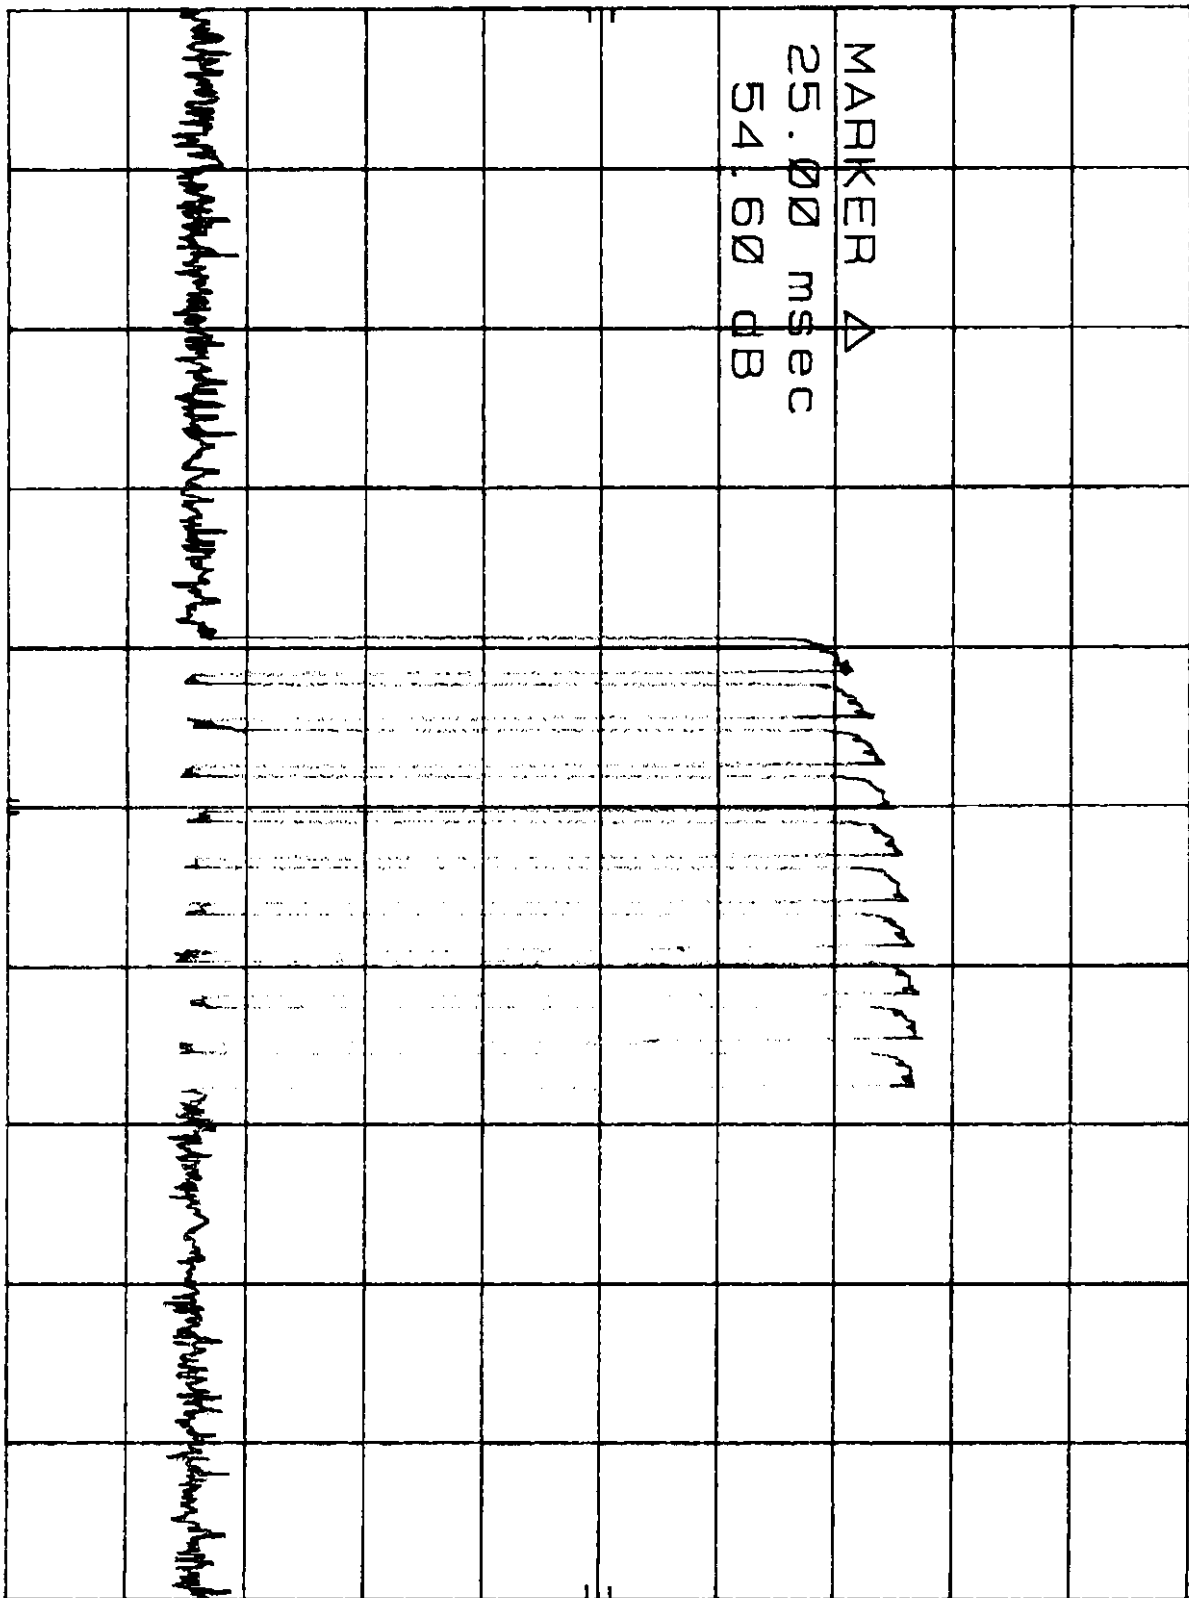

CENTER 314.713 000 MHz

RES BW 10 KHZ

VBW 10 KHZ


SPAN 0 HZ

SWP 1.00 sec

WANG, S INTERNATIONAL TRANSMIT UNIT MKR 252.0 msec
REF 77.0 dBμV ATTN 0 dB 25.00 dBμV

HP

10 dB/

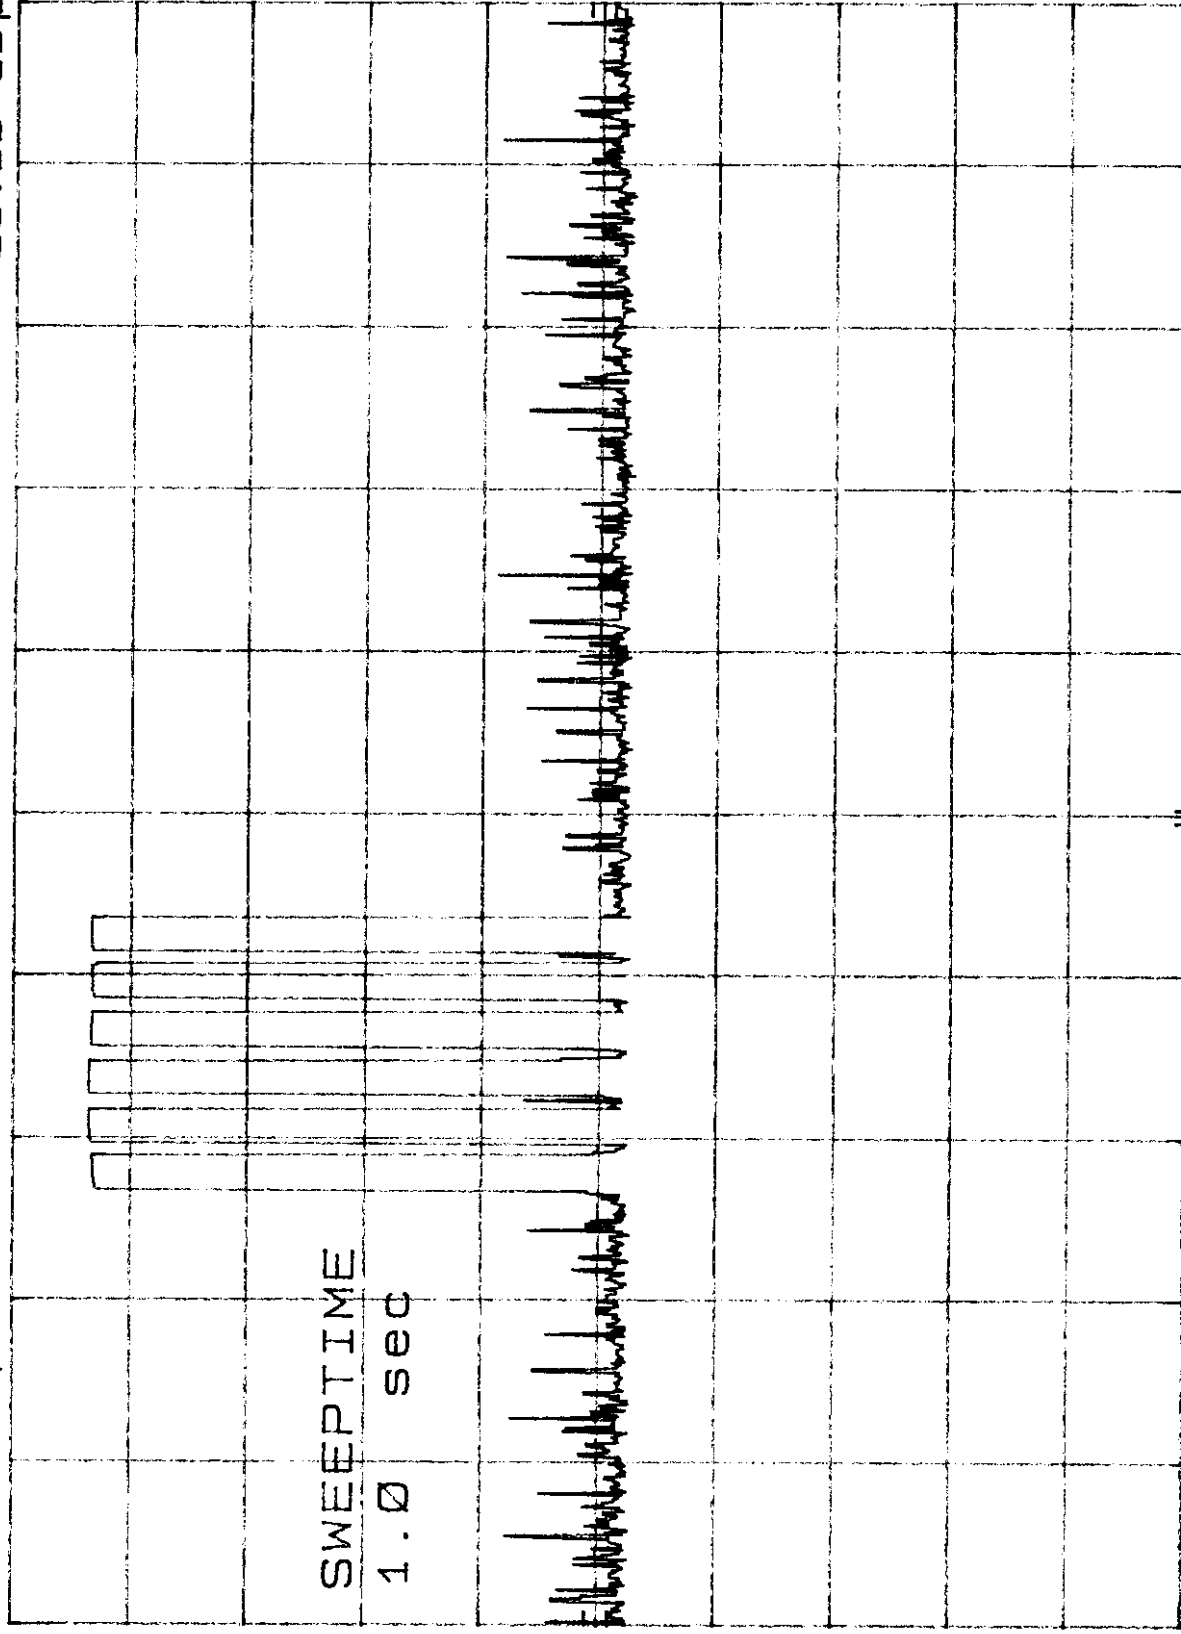

CORR'D

CENTER 314.700 MHz RES BW 100 KHZ VBW 100 KHZ SWP 1.0 sec SPAN 0 HZ

WANG, S INTERNATIONAL TRANSMIT UNIT


MKR 314.686 MHz

REF 77.0 dBμV ATTN 0 dB

63.90 dBμV

hp

10 dB/

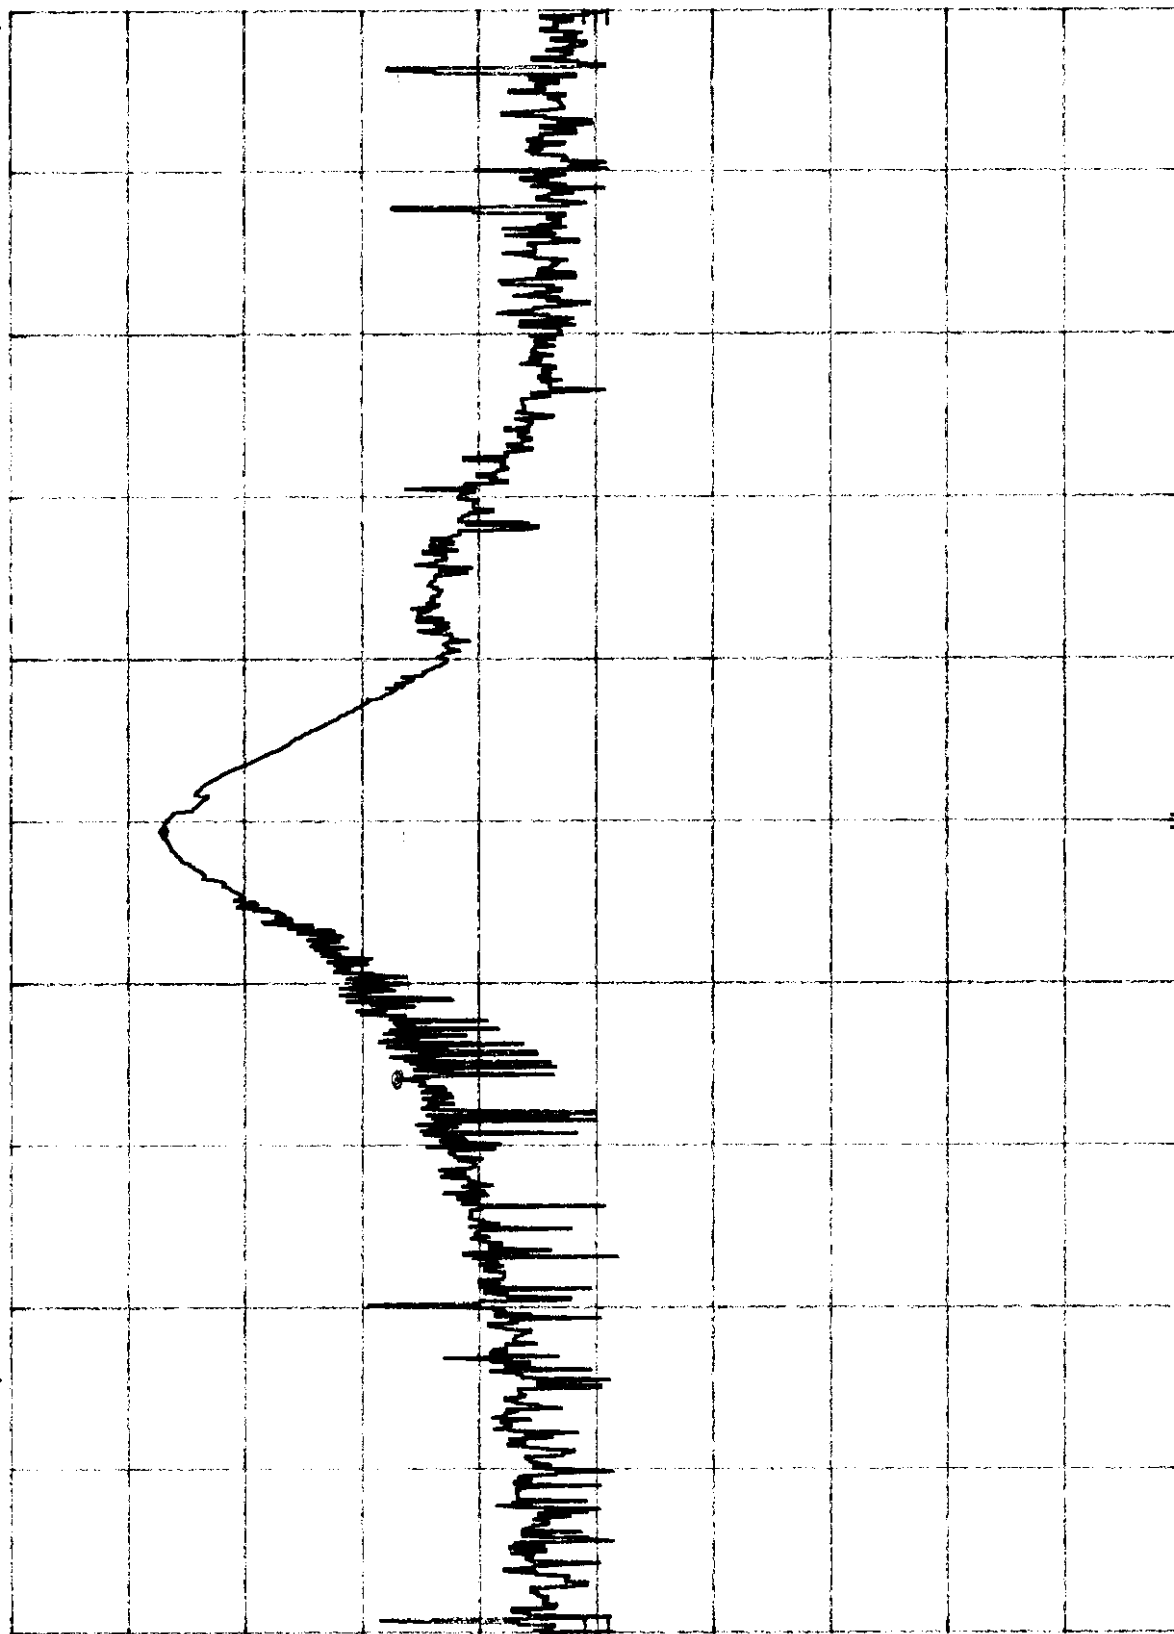

CORR'D

CENTER 314.700 MHz

RES BW 100 KHZ

VBW 100 KHZ


SPAN 2.000 MHz

SWP 20 msec

WANG. S INTERNATIONAL TRANSMIT UNIT
MKR 314.702 MHz
REF 77.0 dBμV ATTN 0 dB
63.40 dBμV

HP

10 dB/

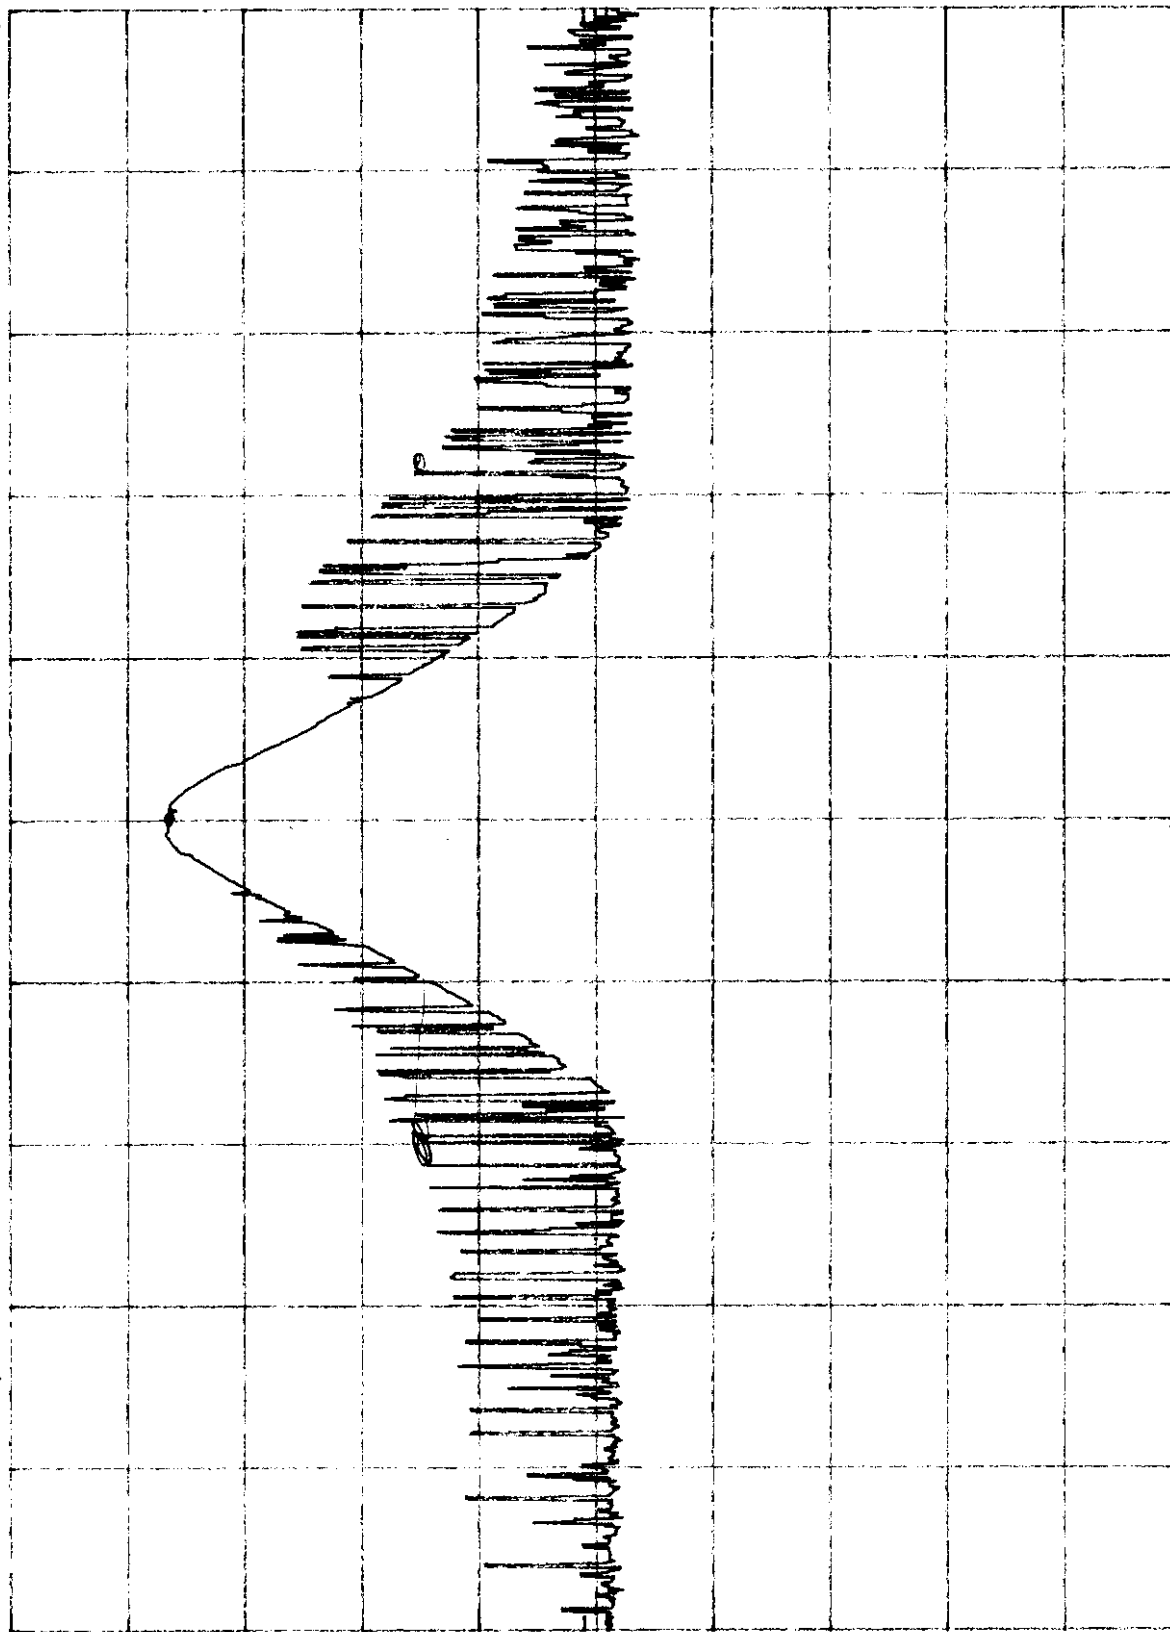

CORR'D

CENTER 314.700 MHz
RES BW 100 KHZ
SPAN 2.000 MHz
SWP 20 msec
VBW 100 KHZ