



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM120500258801
Page: 1 of 41

FCC REPORT

Application No: SZEM1205002588IT (GZEM1205001587IT)
Applicant: Montage
Manufacturer: Montage Asia
Product Name: Traxit Super 2G GPS Tracker
Model No.(EUT): TXSL1G2
FCC ID: N69-838500
Standards: FCC Title 47 Part 2:
FCC Title 47 Part 22H subpart H
FCC Title 47 Part 24E subpart E
Date of Receipt: 2012-05-16
Date of Test: 2012-06-01 to 2012-06-25
Date of Issue: 2012-07-18

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



2 Test Summary

Test Item	FCC Requirement	Test method	Result
850			
Conducted output power	Part 2.1046(a)/Part 22.913(a)	ITA-603-D-2010	PASS
Effective Radiated Power of Transmitter(ERP)	Part 2.1046(a)/Part 22.913(a)	ITA-603-D-2010	PASS
99% Occupied Bandwidth	Part 2.1049(h)	Part 22.917(b)	PASS
Band Edge at antenna terminals	Part 2.1051/Part 22.917(a)	Part 22.917(b)	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 2.1057/ Part 22.917(a)(b)	ITA-603-D-2010	PASS
Field strength of spurious radiation	Part 2.1051/ Part 2.1057/ Part 22.917(a)(b)	ITA-603-D-2010	PASS
Frequency stability	Part 2.1055/ Part 22.355	ITA-603-D-2010	PASS
1900			
Conducted output power	Part 2.1046(a) /Part 24.232(c)	ITA-603-D-2010	PASS
Effective Radiated Power of Transmitter(EIRP)	Part 2.1046(a) / Part 24.232(c)	ITA-603-D-2010	PASS
99% Occupied Bandwidth	Part 2.1049(h)	Part 24.238(b)	PASS
Band Edge at antenna terminals	Part 2.1051/ Part 24.238(a)	Part 24.238(b)	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 2.1057/ Part 24.238(a)(b)	ITA-603-D-2010	PASS
Field strength of spurious radiation	Part 2.1051 /Part 2.1057 / Part 24.238(a)(b)	ITA-603-D-2010	PASS
Frequency stability	Part 2.1055/Part 24.235	ITA-603-D-2010	PASS



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF EUT	4
4.3 TEST ENVIRONMENT AND MODE	5
4.4 DESCRIPTION OF SUPPORT UNITS	5
4.5 TEST LOCATION	5
4.6 TEST FACILITY	6
4.7 DEVIATION FROM STANDARDS	6
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	6
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
4.10 TEST INSTRUMENTS LIST	7
5 TEST RESULTS AND MEASUREMENT DATA	9
5.1 CONDUCTED OUTPUT POWER	9
5.2 EFFECTIVE RADIATED POWER OF TRANSMITTER (ERP/EIRP)	11
5.3 99% OCCUPIED BANDWIDTH	14
5.4 BAND EDGE AT ANTENNA TERMINALS	19
5.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	22
5.6 FIELD STRENGTH OF SPURIOUS RADIATION	29
5.7 FREQUENCY STABILITY	37-41



4 General Information

4.1 Client Information

Applicant:	Montage
Address of Applicant:	NEO Enterprise Avenue, 6009 Shennan Mid Road, Futian
Manufacturer:	Montage Asia
Address of Manufacturer:	Flat J, 13/F, Tower C, NEO Enterprise Avenue, 6009 Shennan Mid Road, Futian, Shenzhen, CHINA

4.2 General Description of EUT

Name:	Traxit Super 2G GPS Tracker
Model No.:	TXSL1G2
IMEI:	352165050019160
Frequency Band:	850: Tx:824.20 - 848.80MHz;Rx: 869.20 - 893.80MHz 1900: Tx:1850.20 - 1909.80MHz;Rx:1930.20 - 1989.80MHz
Type of Emission:	GPRS(GMSK): 300KGXW
Power Control Level:	850 PCL 5-19 maximum is PCL 5 1900 PCL 0-15 maximum is PCL 0
Modulation Type:	GPRS Mode with GMSK Modulation
GPRS Class:	12 (1 uplink slot mode is maximum power)
Sample Type:	Fixed production
Antenna Type and Gain:	Type: Integral Gain: 0dBi
Power Supply:	DC 12.0V
Test Voltage (Declared by client):	Normal: 12V lowest voltage: 6V highest voltage: 15V



4.3 Test Environment and Mode

Operating Environment:	
Temperature:	26.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1006 mbar

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
DC power	Zhao Xin	RXN-305D

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**
CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.
- **VCCI**
The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.
- **FCC – Registration No.: 556682**
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.
- **Industry Canada (IC)**
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.

4.10 Test Instruments List

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2012-10-26
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
13	Band filter	Amindeon	82346	SEL0094	2013-05-17
14	Barometer	ChangChun	DYM3	SEL0088	2013-05-17
15	Power Meter	Rohde & Schwarz	NRVD	SEL0069	2013-05-17
16	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23
17	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-17
18	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-05-17
19	Universal radio communication tester	Rohde & Schwarz	CMU200	SEL0091	2013-05-17
20	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29
21	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29
22	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29






Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2013-06-10
2	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2013-05-17
3	LISN	Rohde & Schwarz	ENV216	SEL0152	2012-10-23
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2013-05-17
5	Coaxial Cable	SGS	N/A	SEL0024	2013-05-29

RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23
2	Coaxial cable	SGS	N/A	SEL0028	2013-05-29

General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2012-10-27
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-10-27
3	Barometer	ChangChun	DYM3	SEL0088	2013-05-17

5 Test results and Measurement Data

5.1 Conducted Output Power

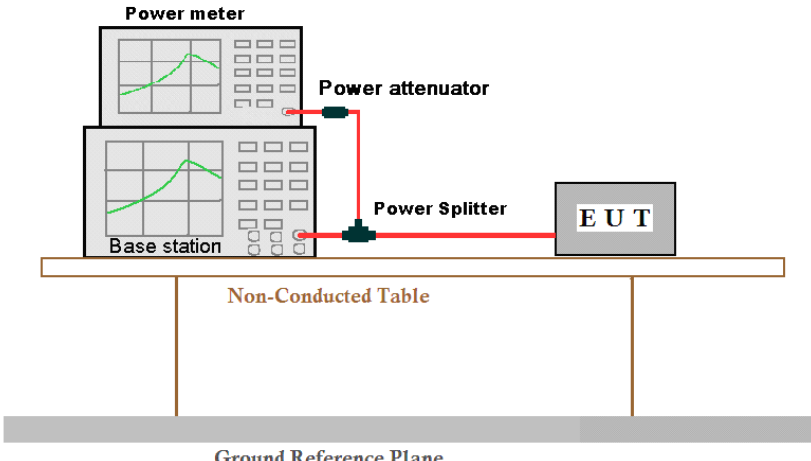Test Requirement:	Part 2.1046(a)		
Test Method:	ITA-603-D-2010		
Test Setup:			
Limit:	Mode	GSM 850/WCDMA/HSDPA /HSUPA 850 Band V	GSM 1900/WCDMA/HSDPA /HSUPA 1900 Band V
	Frequency	824 – 849MHz	1850 – 1910MHz
	Limit	38.45dBm(7W)	33.01dBm(2W)
Measurement Procedure:	The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		

**Measurement Results:**

850				
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)	Limit (dBm)	Result
128/824.2	33.06	32.98	38.45	Pass
189/836.6	33.04	32.96	38.45	Pass
251/848.8	32.95	32.90	38.45	Pass
1900				
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)	Limit (dBm)	Result
512/1850.2	29.47	29.33	33.01	Pass
661/1880.0	29.08	29.00	33.01	Pass
810/1909.8	29.33	29.21	33.01	Pass

5.2 Effective Radiated Power of Transmitter (ERP/EIRP)

Test Requirement:	Part 2.1046(a)				
Test Method:	ITA-603-D-2010				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Test Setup:					

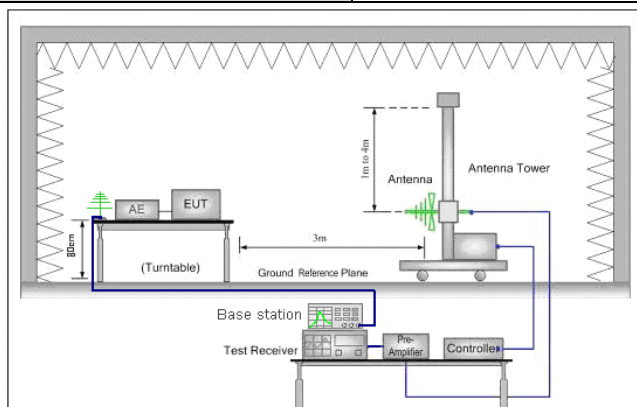


Figure 1. 30MHz to 1GHz

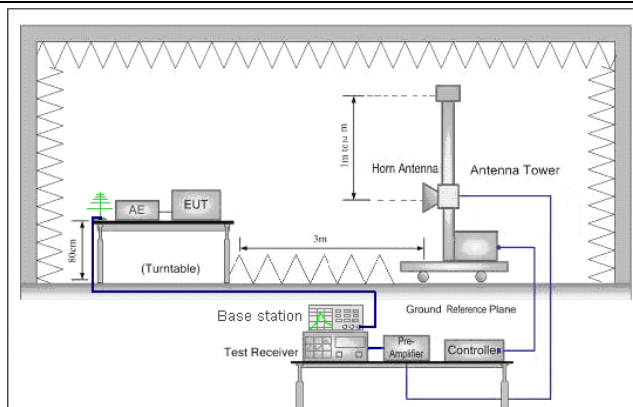


Figure 2. above 1GHz

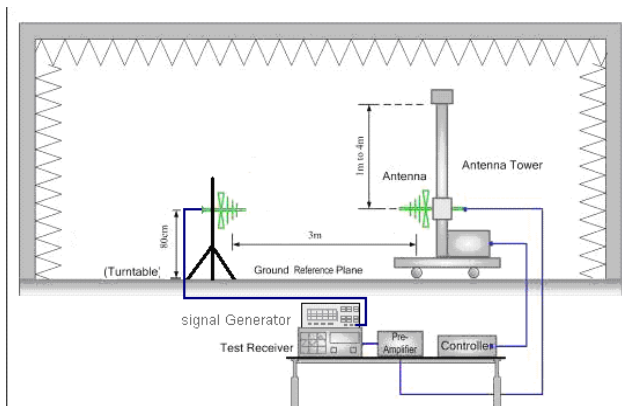


Figure 3. 30MHz to 1GHz

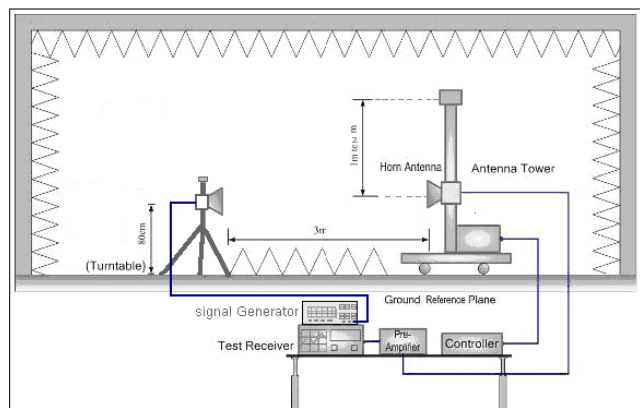


Figure 4. above 1GHz

Limit:	Mode	GSM 850/WCDMA/HSDPA /HSUPA 850 Band V	GSM 1900/WCDMA/HSDPA /HSUPA 1900 Band V
	Frequency	824 – 849MHz	1850 – 1910MHz
	Limit	38.45dBm(7W)	33.01dBm(2W)




Measurement Procedure:	Below 1GHz test procedure as below: 1). The EUT was powered ON and placed on a 0.8m table in the chamber. The antenna of the transmitter was extended to its maximum length. 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization. 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter. 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions. 6). The output power into the substitution antenna was then measured. 7). Steps 5) and 6) were repeated with both antennas polarized. 8). Calculate power in dBm by the following formula: $\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$where: Pg is the generator output power into the substitution antenna. Above 1GHz test procedure as below: 1). Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber 2). Calculate power in dBm by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$where: Pg is the generator output power into the substitution antenna. 3). Test the EUT in the lowest channel, the middle channel the Highest channel 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. 5). Repeat above procedures until all frequencies measured was complete.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**Measurement Data**

850									
CH	Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	EUT polarize	Antenna polarize	ERP (dBm)	Limit (dBm)	Margin (dB)
128	824.2	28.56	5.40	3.31	H	H	29.70	38.45	-8.75
		29.09	5.40	3.31		V	30.23	38.45	-8.22
189	836.4	29.17	4.60	3.35	H	H	29.47	38.45	-8.98
		29.89	4.60	3.35		V	30.19	38.45	-8.26
251	848.8	28.96	4.80	3.41	H	H	29.40	38.45	-9.05
		29.67	4.80	3.41		V	30.11	38.45	-8.34
1900									
CH	Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	EUT polarize	Antenna polarize	EIRP (dBm)	Limit (dBm)	Margin (dB)
512	1850.2	23.53	8.40	5.42	H	H	26.51	33.01	-6.50
		24.29	8.40	5.42		V	27.27	33.01	-5.74
661	1880	23.54	8.80	5.56	H	H	26.78	33.01	-6.23
		24.11	8.80	5.56		V	27.35	33.01	-5.66
810	1909.8	22.81	9.20	5.50	H	H	26.51	33.01	-6.50
		24.15	9.20	5.50		V	27.85	33.01	-5.16

5.3 99%Occupied Bandwidth

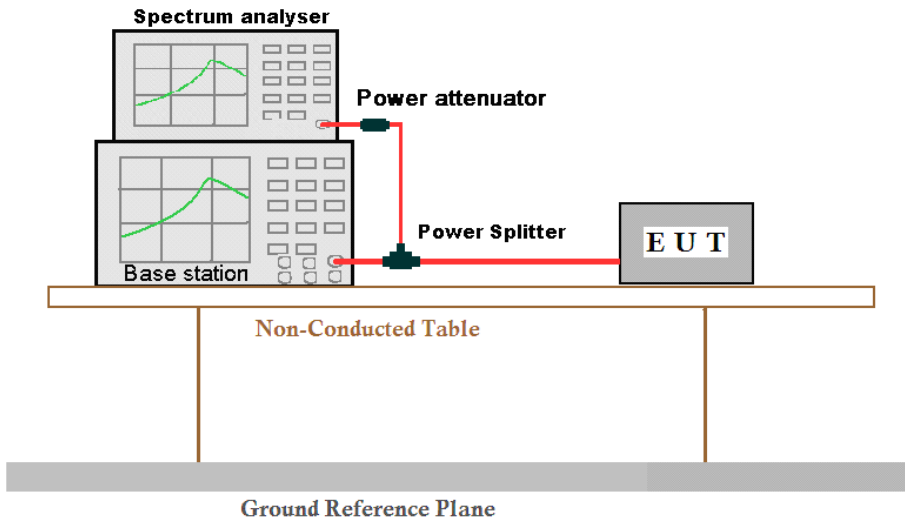Test Requirement:	Part 2.1049(h)
Test Method:	Part 22.917(b) and Part 24.238(b)
Test Setup:	
Limit:	N/A
Measurement Procedure:	The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel).the resolution bandwidth of the analyser is set to 100kHz or 1% of the emission bandwidth, the EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to mean or average power.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**Measurement Data**

850			
Test channel	Frequency (MHz)	99% Emission Bandwidth(kHz)	Result
Lowest/128	824.2	246	Pass
Middle/190	836.6	246	Pass
Highest/251	848.8	242	Pass
1900			
Test channel	Frequency (MHz)	99% occupied bandwidth(kHz)	Result
Lowest/512	1850.2	242	Pass
Middle/661	1880.0	246	Pass
Highest/810	1909.8	246	Pass




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120500258801


Page: 16 of 41

Test plot as follows:

Test mode:	850	Test channel:	Lowest/128	Operation Frequency	824.2MHz
------------	-----	---------------	------------	---------------------	----------

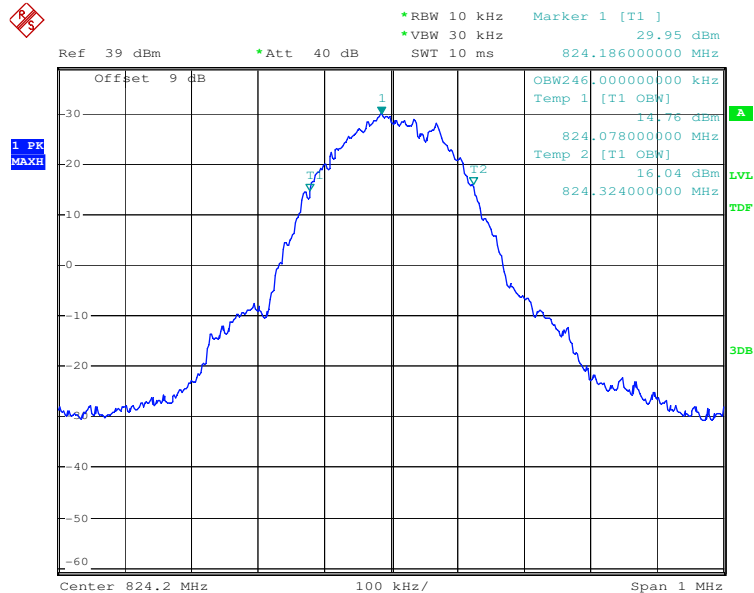


Test mode:	850	Test channel:	Middle/189	Operation Frequency	836.6MHz
------------	-----	---------------	------------	---------------------	----------

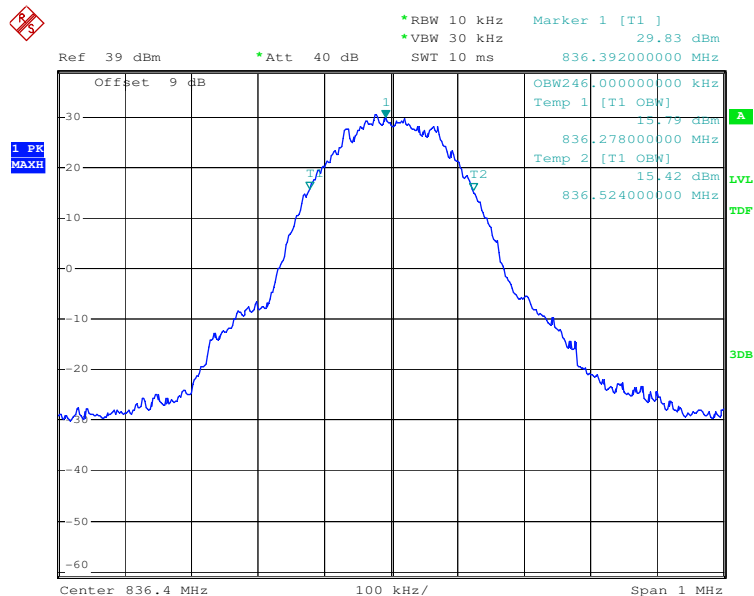


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Test mode:	850	Test channel:	High/251	Operation Frequency	848.8MHz
------------	-----	---------------	----------	---------------------	----------

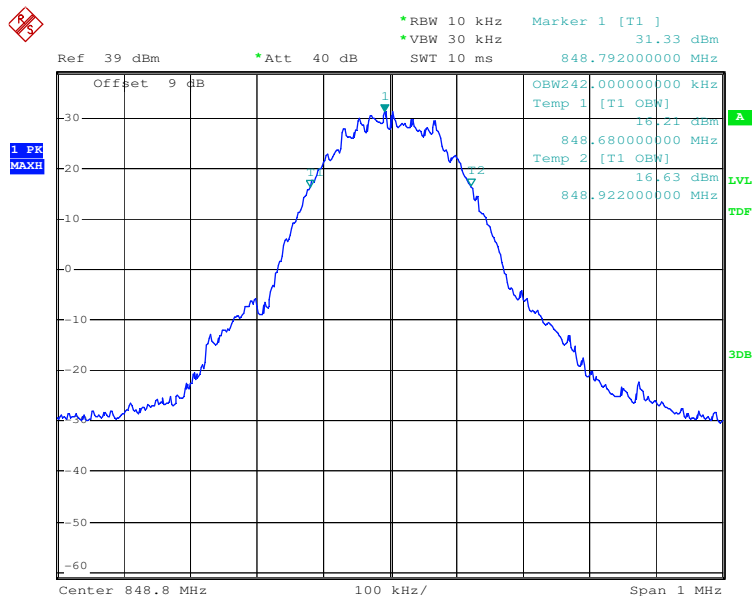

Test mode:	1900	Test channel:	Lowest/512	Operation Frequency	1850.2MHz
------------	------	---------------	------------	---------------------	-----------

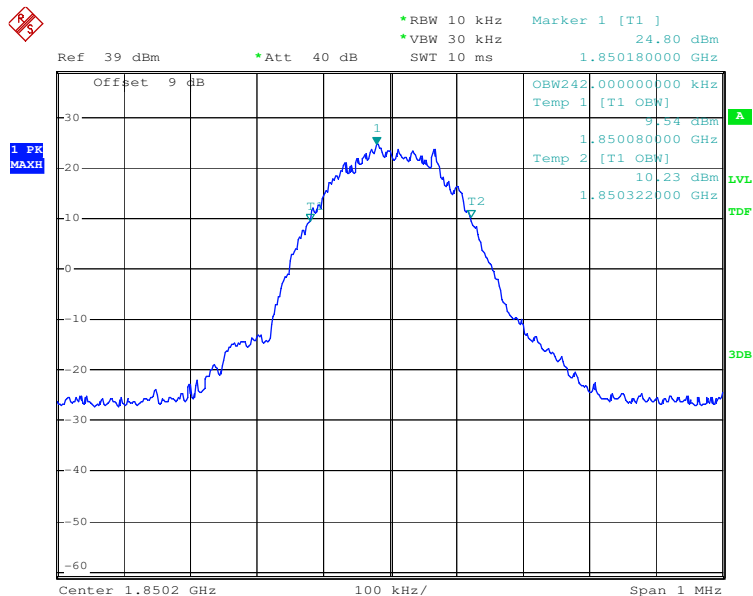




SGS-CSTC Standards Technical Services Ltd.


Report No.: SZEM120500258801

Page: 18 of 41

Test mode:	1900	Test channel:	Middle/661	Operation Frequency	1880.0MHz
------------	------	---------------	------------	---------------------	-----------

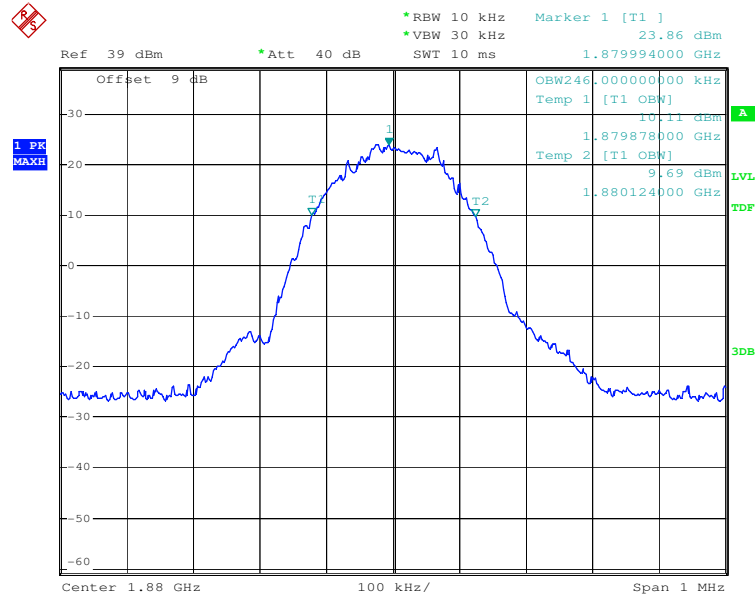


Test mode:	1900	Test channel:	High/810	Operation Frequency	1909.8MHz
------------	------	---------------	----------	---------------------	-----------

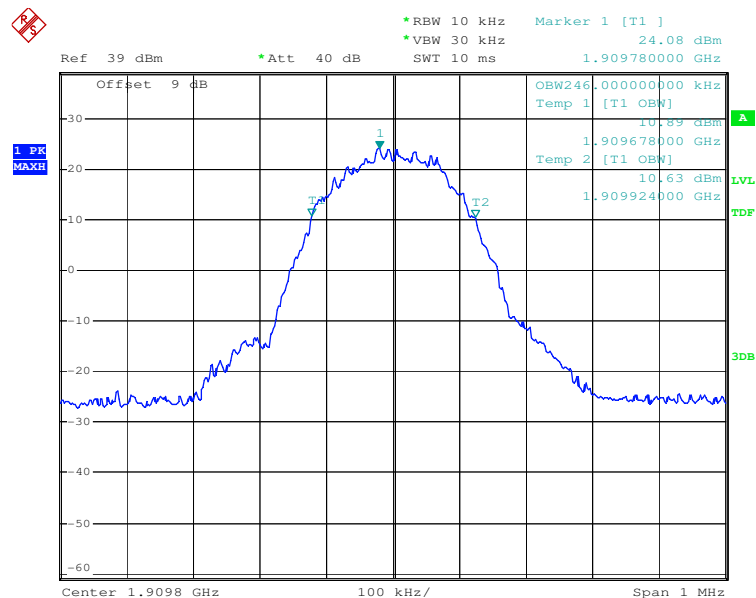

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


5.4 Band Edge at antenna terminals

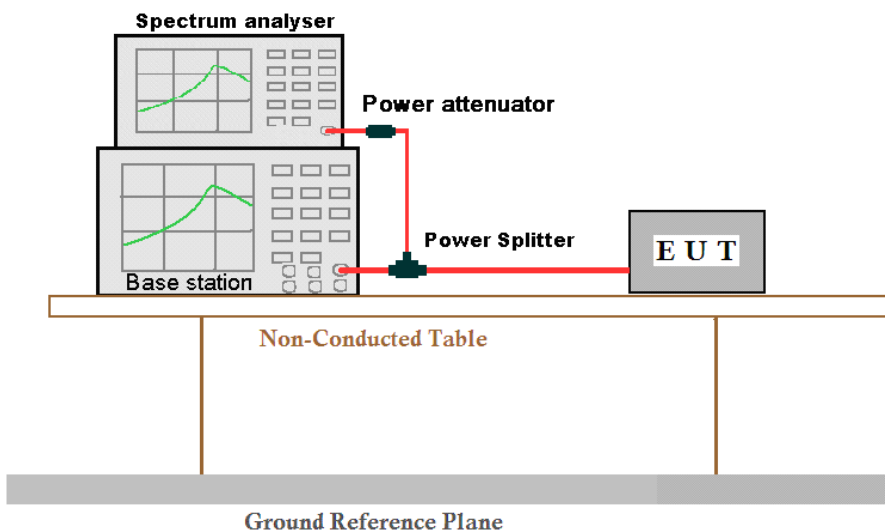Test Requirement:	Part 2.1051											
Test Method:	Part 22.917(b) and Part 24.238(b)											
Test Setup:												
Measurement Procedure:	The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to mean or average power.											
Limit:	<table><tr><th>Operation Band</th><th>Frequency Range (MHz)</th><th>Limit</th></tr><tr><td>GSM/GPRS/EDGE/WCDMA 850</td><td>Below 824 and above 849</td><td>Attenuated at least 43+10log(P)</td></tr><tr><td>GSM/GPRS/EDGE/WCDMA 1900</td><td>Below 1850 and above 1910</td><td>Attenuated at least 43+10log(P)</td></tr></table>	Operation Band	Frequency Range (MHz)	Limit	GSM/GPRS/EDGE/WCDMA 850	Below 824 and above 849	Attenuated at least 43+10log(P)	GSM/GPRS/EDGE/WCDMA 1900	Below 1850 and above 1910	Attenuated at least 43+10log(P)		
Operation Band	Frequency Range (MHz)	Limit										
GSM/GPRS/EDGE/WCDMA 850	Below 824 and above 849	Attenuated at least 43+10log(P)										
GSM/GPRS/EDGE/WCDMA 1900	Below 1850 and above 1910	Attenuated at least 43+10log(P)										
Instruments Used:	Refer to section 4.10 for details											
Test Results:	Pass											




Measurement Data

850		
Test channel	Frequency (MHz)	Result
Lowest/128	824.2	Pass

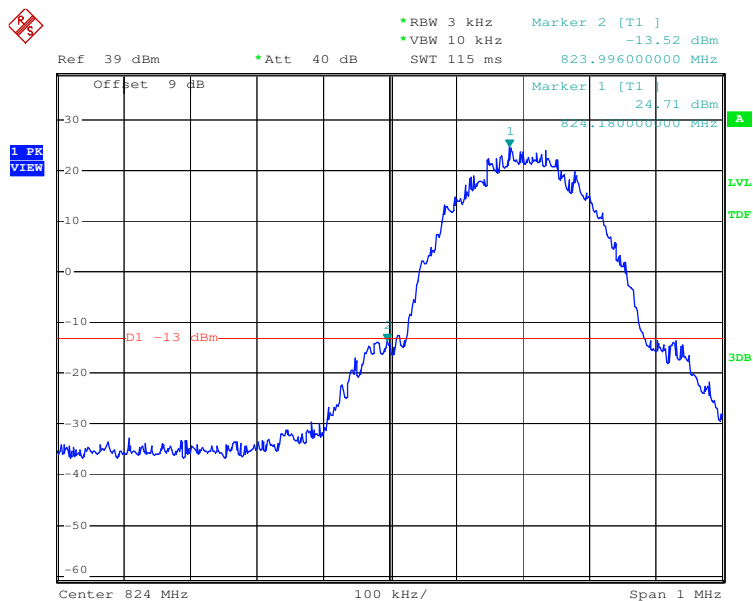


Test channel	Frequency (MHz)	Result
Highest/251	848.8	Pass

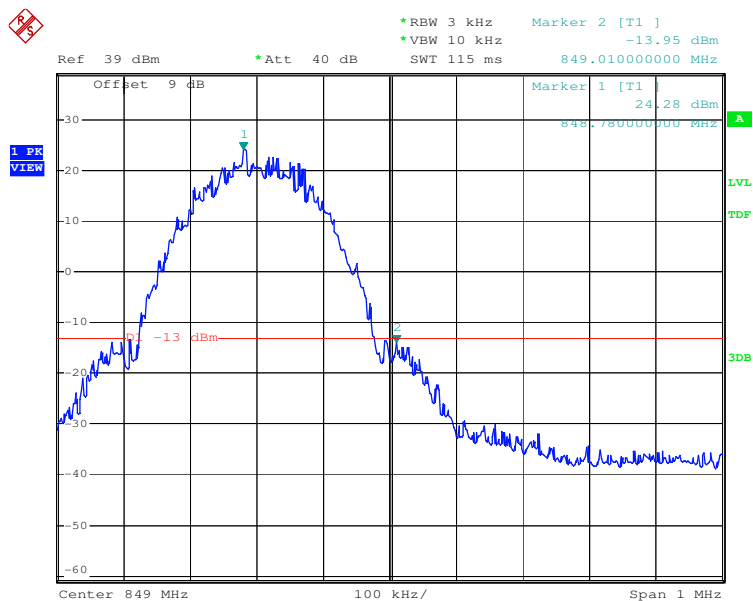





1900		
Test channel	Frequency (MHz)	Result
Lowest/512	1850.2	Pass

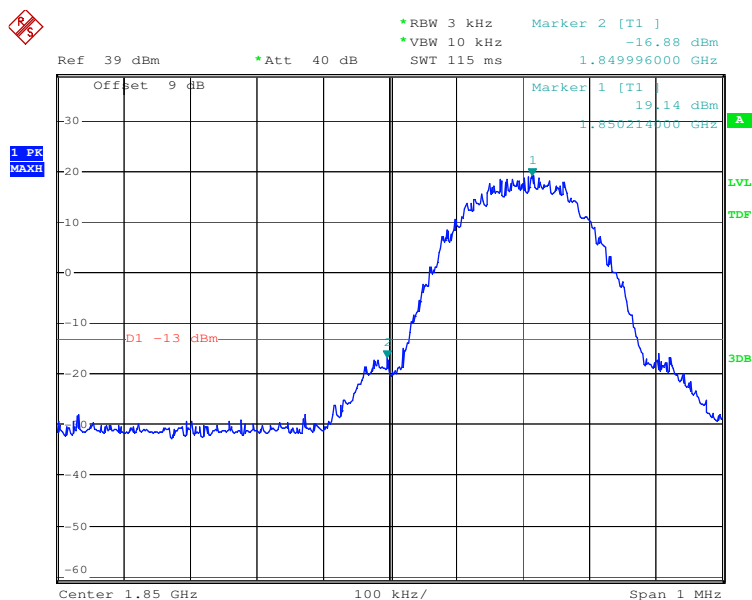

Test channel	Frequency (MHz)	Result
Highest/810	1909.8	Pass

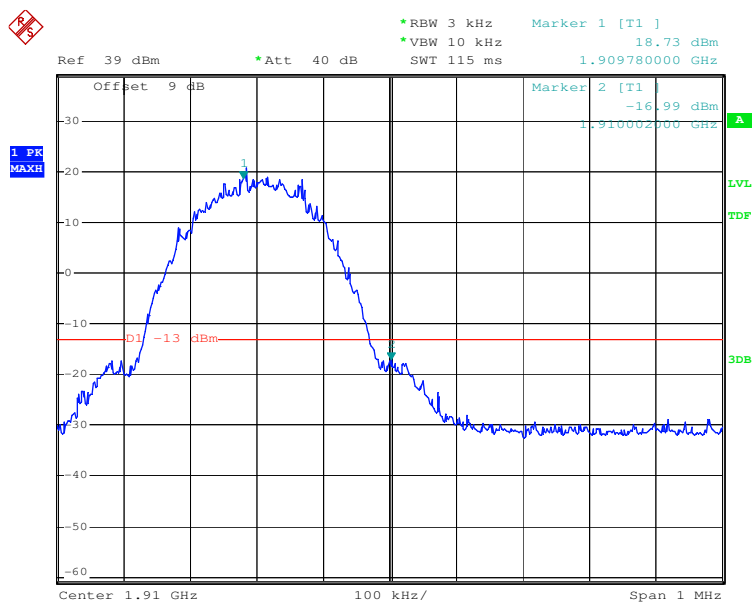



5.5 Spurious emissions at antenna terminals

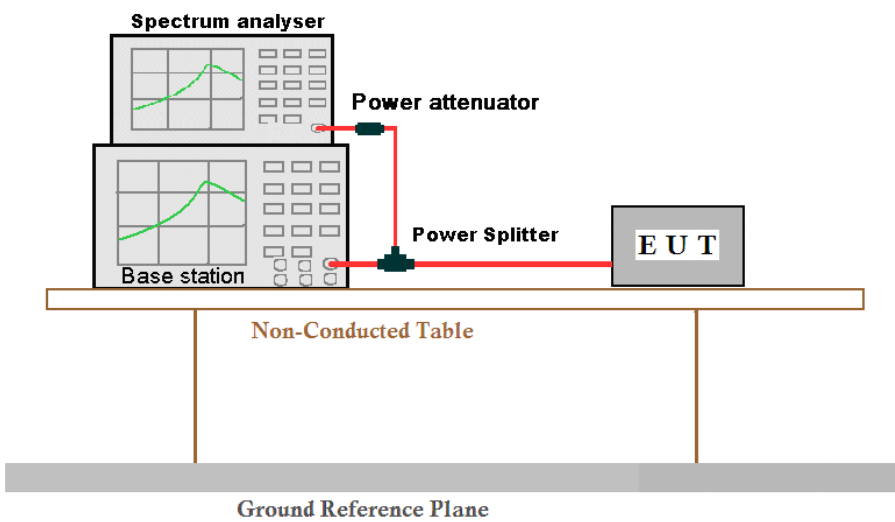Test Requirement:	Part 2.1051 and Part 2.1057
Test Method:	ITA-603-D-2010
Test Setup:	 The diagram illustrates the test setup for spurious emissions at antenna terminals. It shows a Spectrum analyser connected to a Base station via a Power attenuator and a Power Splitter. The Base station is connected to the EUT (Equipment Under Test) via a Power Splitter. The entire setup is placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Measurement Procedure:	The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel).the equipment operates below 10GHz: to the tenth harmonic of the highest fundamental frequency or to 40GHz.whichever is lower, the resolution bandwidth of the spectrum analyzer was set at 100kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1GHz.the video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to mean or average power.
Instruments Used:	Refer to section 4.10 for details
Limit:	Attenuated at least $43+10\log(P)$
Test Results:	Pass



Test plot as follows:

Test mode:	850	Test channel:	Lowest/128	Operation Frequency	824.2MHz
------------	-----	---------------	------------	---------------------	----------

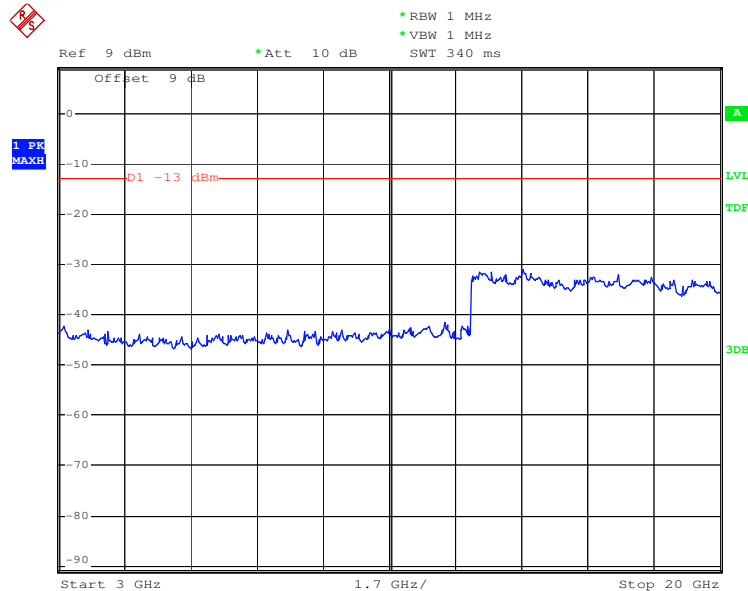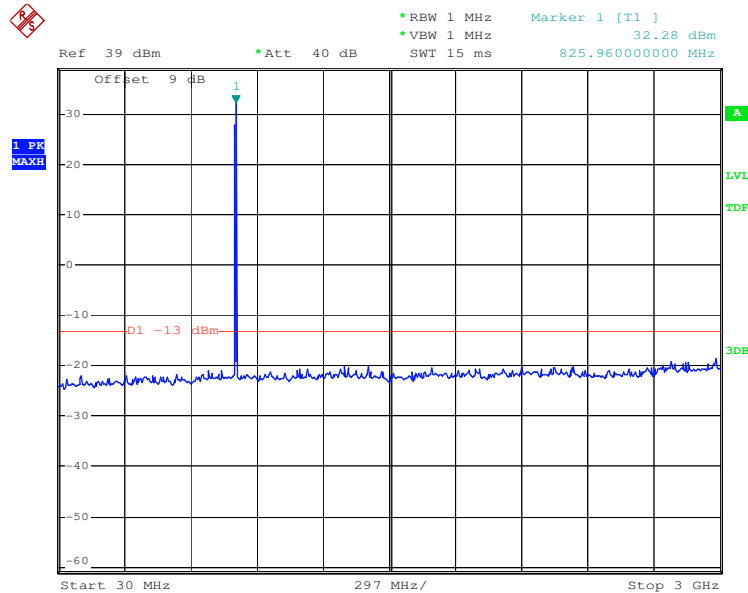

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120500258801

Page: 24 of 41



Test mode:	850	Test channel:	Middle/189	Operation Frequency	836.6MHz
------------	-----	---------------	------------	---------------------	----------

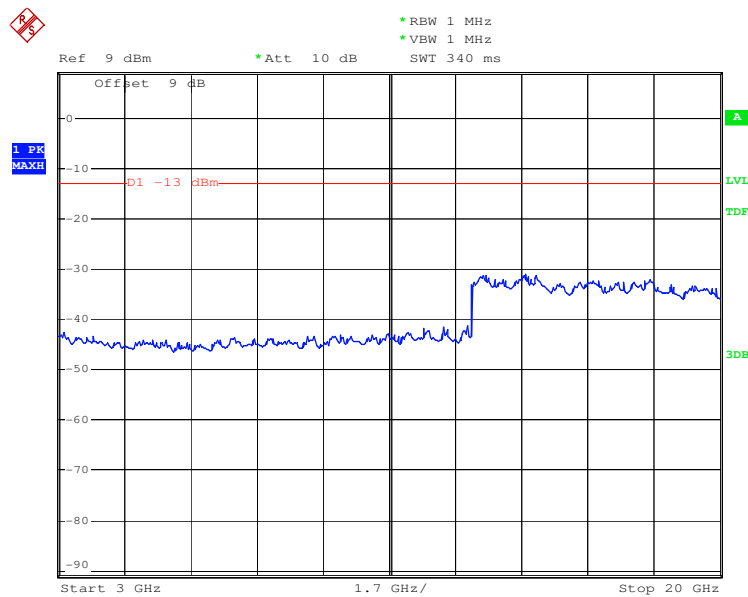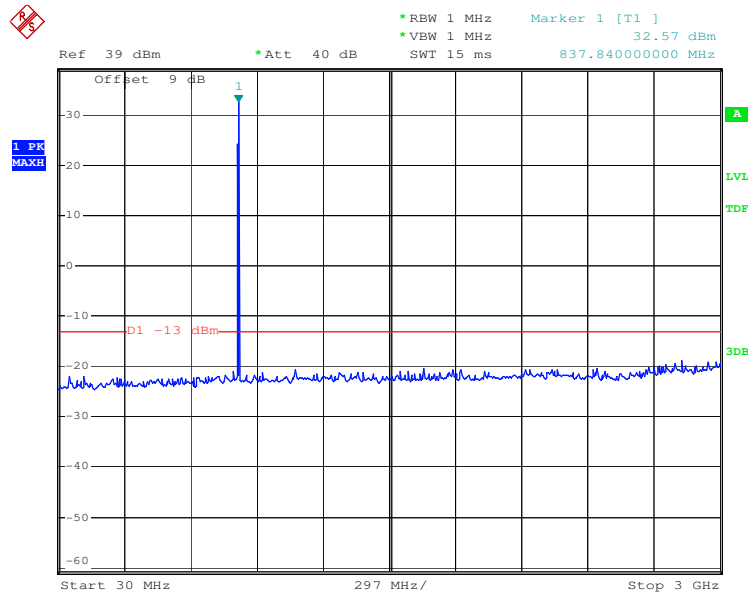

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Test mode:	850	Test channel:	High/251	Operation Frequency	848.8MHz
------------	-----	---------------	----------	---------------------	----------

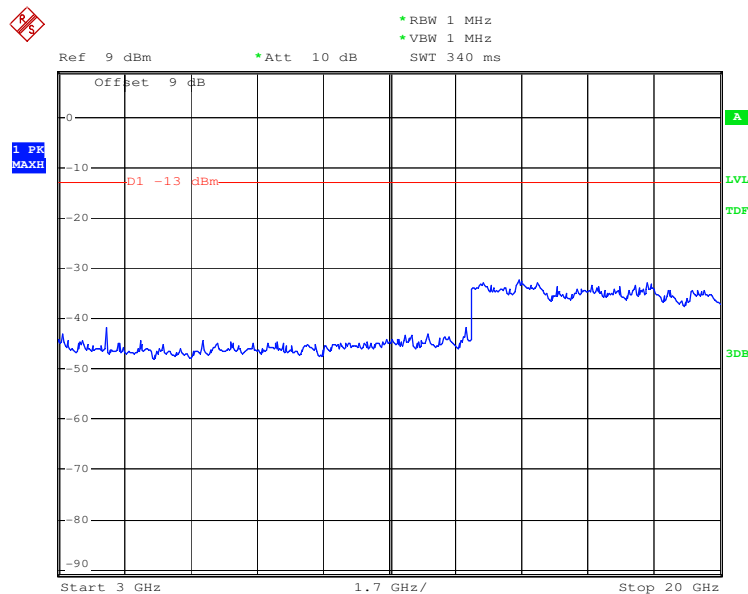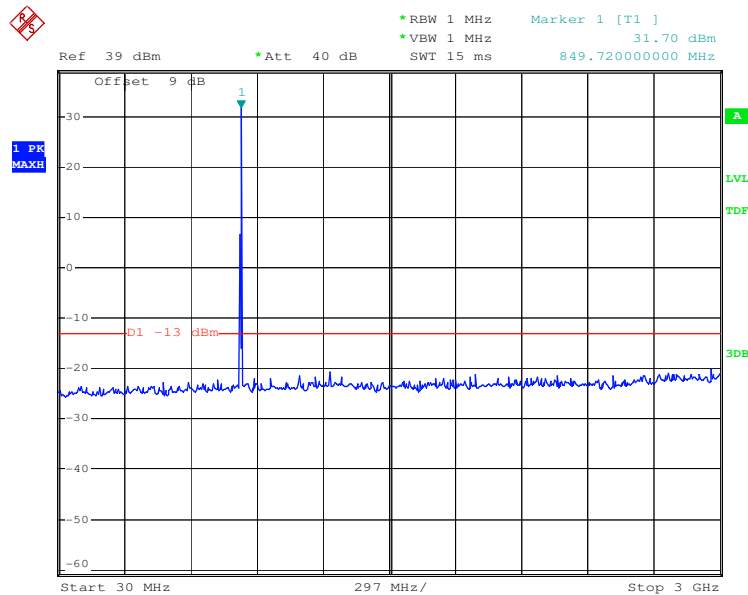





SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120500258801

Page: 26 of 41



Test mode:	1900	Test channel:	Lowest/512	Operation Frequency	1850.2MHz
------------	------	---------------	------------	---------------------	-----------

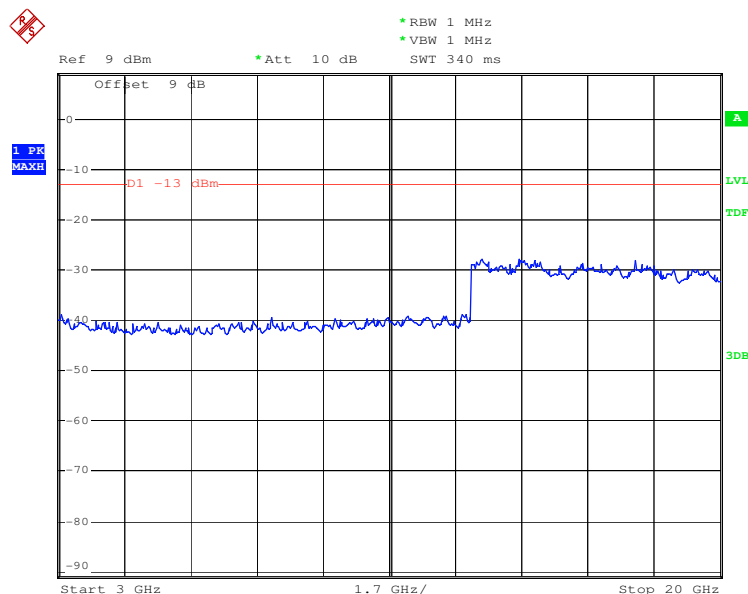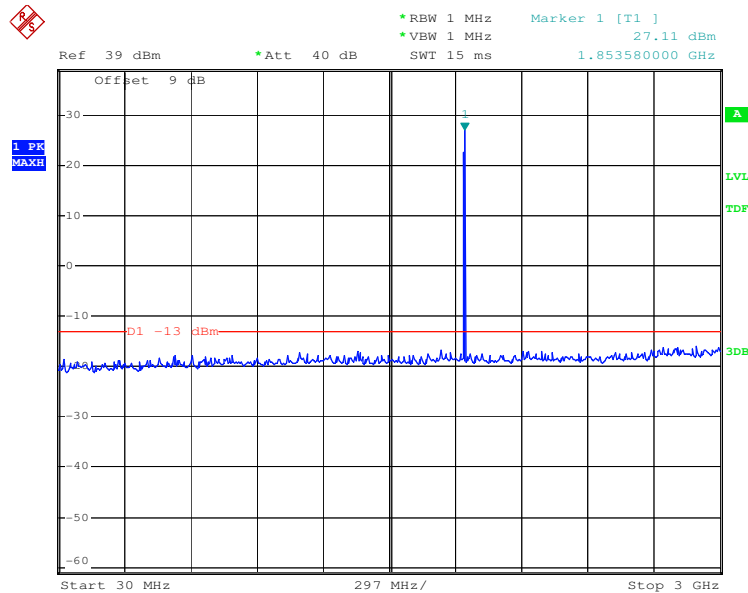

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Test mode:	1900	Test channel:	Middle/661	Operation Frequency	1880.0MHz
------------	------	---------------	------------	---------------------	-----------

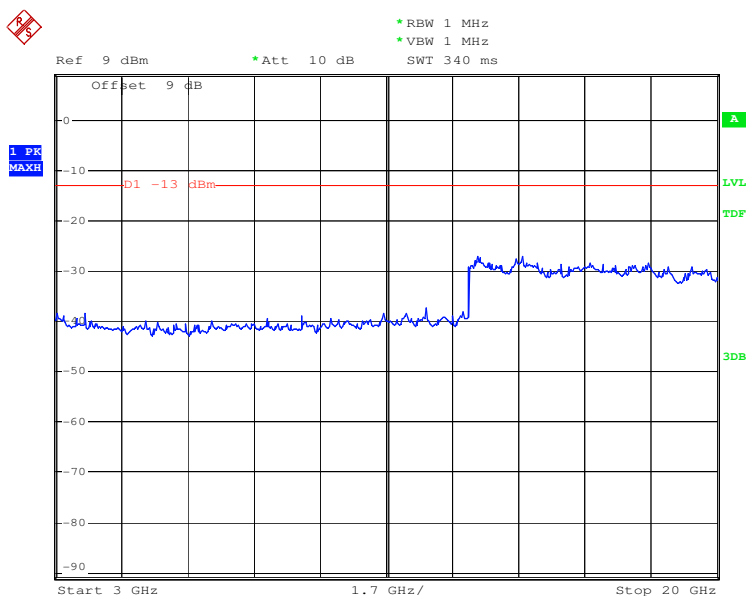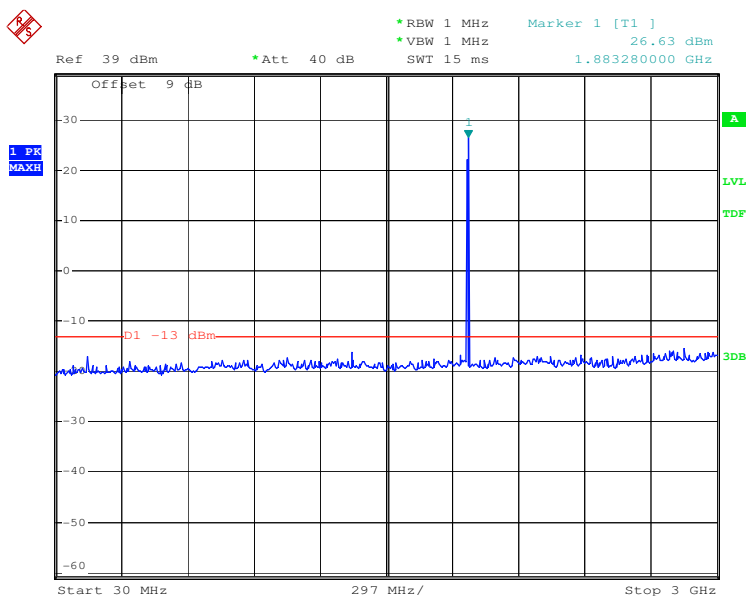

5.6 Field strength of spurious radiation

Test Requirement:	Part 2.1051 and Part 2.1057				
Test Method:	ITA-603-D-2010				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Peak	100kHz	300kHz	Peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Test Setup:					

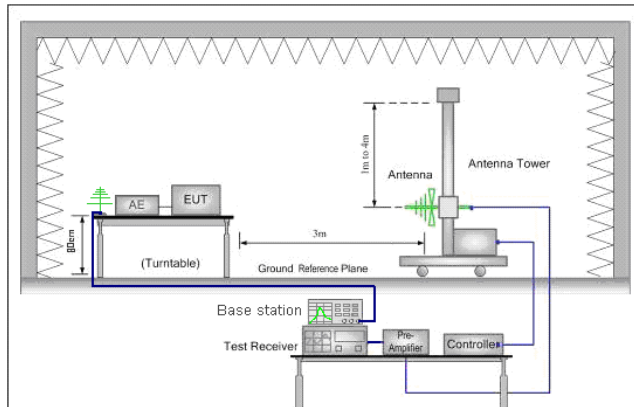


Figure 1. 30MHz to 1GHz

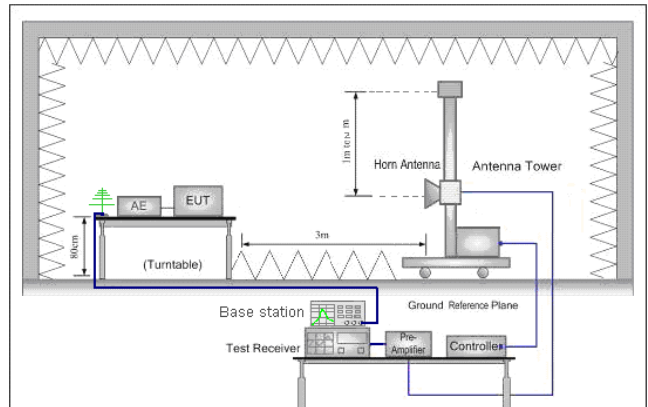


Figure 2. above 1GHz

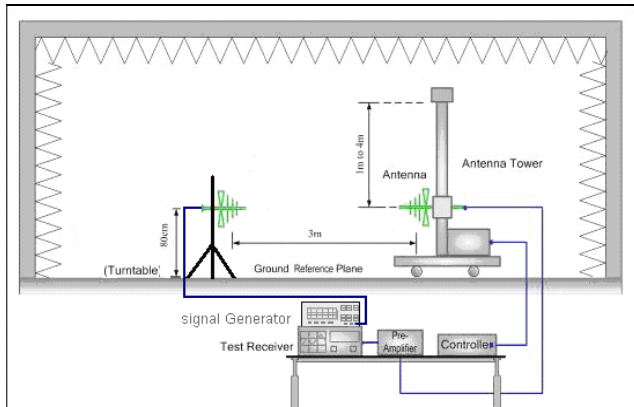


Figure 3. 30MHz to 1GHz

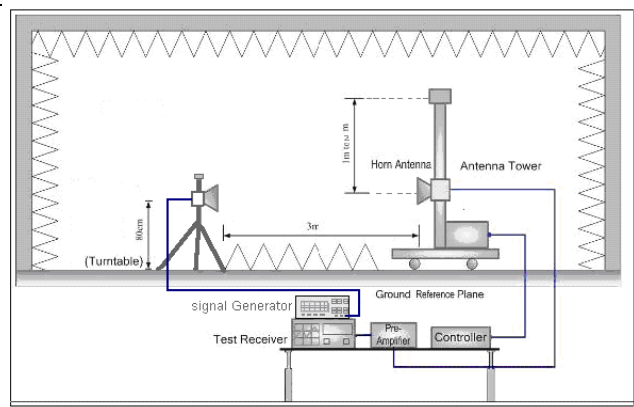


Figure 4. above 1GHz



Measurement Procedure:	Below 1GHz test procedure as below: 1). The EUT was powered ON and placed on a 0.8m high table in the chamber. The antenna of the transmitter was extended to its maximum length. 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization. 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter. 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions. 6). The output power into the substitution antenna was then measured. 7). Steps 5) and 6) were repeated with both antennas polarized. 8) Calculate power in dBm by the following formula: $\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$where: Pg is the generator output power into the substitution antenna. Above 1GHz test procedure as below: 1). Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber 2). Calculate power in dBm by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$where: Pg is the generator output power into the substitution antenna. 3). Test the EUT in the lowest channel, the middle channel the Highest channel 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. 5). Repeat above procedures until all frequencies measured was complete.
Instruments Used:	Refer to section 4.10 for details
Limit:	Attenuated at least $43 + 10\log(P)$
Test Results:	Pass

**Below 1GHz****850**

128							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	ERP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
47.460	-58.02	-4.60	0.74	-65.51	-13	H	-52.51
151.067	-58.29	5.40	1.32	-56.36	-13	H	-43.36
211.390	-62.10	8.60	1.46	-57.11	-13	H	-44.11
329.039	-60.01	9.00	1.99	-55.15	-13	H	-42.15
373.380	-54.86	7.70	2.13	-51.44	-13	H	-38.44
709.000	-55.23	4.20	2.93	-56.11	-13	H	-43.11
51.340	-61.16	-2.50	0.80	-66.61	-13	V	-53.61
103.442	-58.80	2.70	1.21	-59.46	-13	V	-46.46
175.500	-53.83	6.70	1.36	-50.64	-13	V	-37.64
246.310	-65.40	7.10	1.65	-62.10	-13	V	-49.10
354.950	-62.40	9.10	2.07	-57.52	-13	V	-44.52
450.980	-62.31	6.70	2.45	-60.21	-13	V	-47.21
189							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	ERP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
47.460	-58.50	-4.60	0.74	-65.99	-13	H	-52.99
122.150	-64.03	5.20	1.26	-62.24	-13	H	-49.24
152.130	-57.29	5.40	1.32	-55.36	-13	H	-42.36
219.845	-62.27	8.60	1.51	-57.33	-13	H	-44.33
286.982	-55.45	6.50	1.84	-52.94	-13	H	-39.94
568.350	-56.28	3.80	2.67	-57.30	-13	H	-44.30
47.994	-45.84	-4.60	0.76	-53.35	-13	V	-40.35
102.750	-58.76	2.30	1.21	-59.82	-13	V	-46.82
215.270	-64.51	8.50	1.48	-59.64	-13	V	-46.64
254.728	-51.83	7.20	1.69	-48.47	-13	V	-35.47
388.900	-54.87	6.00	2.17	-53.19	-13	V	-40.19
413.271	-58.41	5.10	2.26	-57.72	-13	V	-44.72



251							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	ERP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
47.460	-60.48	-4.60	0.74	-67.97	-13	H	-54.97
175.500	-55.76	6.70	1.36	-52.57	-13	H	-39.57
236.645	-59.55	7.20	1.60	-56.10	-13	H	-43.10
316.150	-59.83	6.20	1.95	-57.73	-13	H	-44.73
459.710	-57.14	7.40	2.49	-54.38	-13	H	-41.38
568.350	-55.10	3.80	2.67	-56.12	-13	H	-43.12
51.340	-59.96	-2.50	0.80	-65.41	-13	V	-52.41
140.580	-59.87	5.50	1.31	-57.83	-13	V	-44.83
184.230	-53.58	7.60	1.37	-49.50	-13	V	-36.50
234.168	-50.99	7.20	1.59	-47.53	-13	V	-34.53
388.900	-55.07	6.00	2.17	-53.39	-13	V	-40.39
602.300	-56.75	8.10	2.71	-53.51	-13	V	-40.51

1900

512							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	ERP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
46.490	-60.50	-5.60	0.73	-68.98	-13	H	-55.98
112.131	-59.01	3.50	1.23	-58.89	-13	H	-45.89
180.350	-60.86	7.40	1.37	-56.98	-13	H	-43.98
263.770	-62.13	6.90	1.74	-59.12	-13	H	-46.12
388.900	-52.61	6.00	2.17	-50.93	-13	H	-37.93
520.820	-57.58	7.60	2.63	-54.76	-13	H	-41.76
51.340	-59.79	-2.50	0.80	-65.24	-13	V	-52.24
129.015	-53.72	5.30	1.28	-51.85	-13	V	-38.85
187.140	-61.12	7.60	1.38	-57.05	-13	V	-44.05
375.320	-63.96	6.90	2.13	-61.34	-13	V	-48.34
602.300	-54.89	8.10	2.70	-51.64	-13	V	-38.64
948.590	-53.07	5.80	3.60	-53.02	-13	V	-40.02



661							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	ERP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
49.400	-63.45	-3.50	0.79	-69.89	-13	H	-56.89
102.750	-57.38	2.30	1.20	-58.43	-13	H	-45.43
122.150	-62.47	5.20	1.26	-60.68	-13	H	-47.68
275.157	-59.97	6.10	1.79	-57.81	-13	H	-44.81
373.380	-55.98	7.70	2.13	-52.56	-13	H	-39.56
524.554	-61.23	7.60	2.63	-58.41	-13	H	-45.41
48.430	-60.64	-4.60	0.77	-68.16	-13	V	-55.16
139.610	-62.87	5.50	1.29	-60.81	-13	V	-47.81
180.350	-55.38	7.40	1.37	-51.50	-13	V	-38.50
252.063	-52.01	7.10	1.68	-48.74	-13	V	-35.74
370.470	-59.43	7.70	2.13	-56.01	-13	V	-43.01
602.300	-55.40	8.10	2.70	-52.15	-13	V	-39.15
810							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	ERP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
40.670	-54.05	-9.30	0.74	-66.24	-13	H	-53.24
122.150	-67.10	5.20	1.26	-65.31	-13	H	-52.31
140.580	-59.86	5.50	1.31	-57.82	-13	H	-44.82
175.500	-56.29	6.70	1.36	-53.10	-13	H	-40.10
260.860	-61.95	7.00	1.76	-58.86	-13	H	-45.86
459.710	-56.44	7.40	2.45	-53.64	-13	H	-40.64
45.217	-47.97	-6.90	0.73	-57.75	-13	V	-44.75
102.750	-58.86	2.30	1.21	-59.92	-13	V	-46.92
170.195	-56.33	5.80	1.35	-54.03	-13	V	-41.03
215.270	-59.14	8.50	1.49	-54.28	-13	V	-41.28
354.950	-61.25	9.10	2.07	-56.37	-13	V	-43.37
638.369	-62.19	9.40	2.78	-57.72	-13	V	-44.72

Above 1GHz
850

128							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	EIRP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
1967.886	-51.51	9.20	5.34	-47.65	-13	H	-34.65
3971.916	-48.15	6.60	7.89	-49.44	-13	H	-36.44
4226.686	-40.62	6.60	8.59	-42.61	-13	H	-29.61
5199.960	-36.87	5.50	11.71	-43.08	-13	H	-30.08
6795.879	-37.43	9.20	13.47	-41.70	-13	H	-28.70
9204.496	-40.29	13.80	13.26	-39.75	-13	H	-26.75
1348.963	-54.93	8.40	4.54	-51.07	-13	V	-38.07
2930.633	-48.32	7.10	6.27	-47.49	-13	V	-34.49
3126.079	-52.15	7.10	7.36	-52.41	-13	V	-39.41
4521.185	-37.75	6.60	8.86	-40.01	-13	V	-27.01
7550.922	-47.21	10.80	12.81	-49.22	-13	V	-36.22
8663.404	-38.80	13.30	13.10	-38.60	-13	V	-25.60
189							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	EIRP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
1390.276	-48.45	8.40	4.54	-44.59	-13	H	-31.59
1990.673	-47.29	9.20	5.34	-43.43	-13	H	-30.43
3007.868	-44.36	7.10	6.68	-43.94	-13	H	-30.94
4187.936	-42.29	6.60	8.59	-44.28	-13	H	-31.28
6966.265	-42.09	9.70	13.74	-46.13	-13	H	-33.13
7430.191	-38.03	10.80	12.68	-39.91	-13	H	-26.91
1583.392	-43.96	8.40	5.13	-40.69	-13	V	-27.69
3515.604	-45.99	7.80	7.27	-45.46	-13	V	-32.46
4466.836	-47.23	6.60	8.86	-49.49	-13	V	-36.49
5847.901	-39.13	10.20	12.97	-41.90	-13	V	-28.90
7430.191	-44.91	10.80	12.68	-46.79	-13	V	-33.79
8638.399	-43.61	13.30	13.11	-43.42	-13	V	-30.42



251							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	EIRP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
1377.209	-53.68	8.40	4.45	-49.73	-13	H	-36.73
3013.006	-52.48	7.10	6.68	-52.06	-13	H	-39.06
4120.975	-42.08	6.60	8.09	-43.57	-13	H	-30.57
5382.698	-37.05	6.60	11.93	-42.38	-13	H	-29.38
6858.321	-39.50	9.20	13.17	-43.47	-13	H	-30.47
9418.896	-37.72	14.00	13.92	-37.64	-13	H	-24.64
1185.769	-57.63	5.50	4.33	-56.46	-13	V	-43.46
2345.878	-45.55	6.80	5.91	-44.66	-13	V	-31.66
3396.253	-45.25	7.80	7.22	-44.67	-13	V	-31.67
4634.469	-40.70	6.60	9.64	-43.74	-13	V	-30.74
5093.309	-43.23	5.50	10.83	-48.56	-13	V	-35.56
7603.263	-38.47	10.80	12.86	-40.53	-13	V	-27.53


1900

512							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	EIRP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
1390.276	-52.52	8.40	4.45	-48.57	-13	H	-35.57
2790.113	-48.29	6.80	6.42	-47.91	-13	H	-34.91
3725.195	-44.42	7.80	7.40	-44.02	-13	H	-31.02
4613.592	-40.32	6.60	9.64	-43.36	-13	H	-30.36
5031.499	-38.99	5.50	9.80	-43.29	-13	H	-30.29
9475.497	-40.09	14.00	13.66	-39.75	-13	H	-26.75
1327.446	-54.03	8.40	4.54	-50.17	-13	V	-37.17
3150.337	-43.58	7.10	7.55	-44.03	-13	V	-31.03
3714.443	-44.63	7.80	7.40	-44.23	-13	V	-31.23
5179.049	-36.54	5.50	11.71	-42.75	-13	V	-29.75
6698.373	-37.74	9.20	13.32	-41.86	-13	V	-28.86
8319.836	-45.03	13.30	12.70	-44.43	-13	V	-31.43



661							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	EIRP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
1342.882	-54.25	8.40	4.54	-50.39	-13	H	-37.39
2126.308	-50.07	9.20	5.39	-46.26	-13	H	-33.26
3992.781	-42.11	6.60	8.11	-43.62	-13	H	-30.62
4573.760	-39.93	6.60	9.64	-42.97	-13	H	-29.97
6698.373	-37.35	9.20	13.32	-41.47	-13	H	-28.47
9809.916	-46.46	14.00	14.09	-46.55	-13	H	-33.55
1285.904	-58.50	12.10	4.54	-50.94	-13	V	-37.94
3386.297	-44.89	7.80	7.22	-44.31	-13	V	-31.31
4547.396	-41.33	6.60	8.86	-43.59	-13	V	-30.59
5967.033	-37.16	10.20	13.15	-40.11	-13	V	-27.11
7015.420	-37.81	9.70	13.74	-41.85	-13	V	-28.85
9393.689	-38.29	14.00	13.92	-38.21	-13	V	-25.21
810							
Frequency (MHz)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable loss (dB)	EIRP (dBm)	Limit (dBm)	Antenna polarize	Margin (dB)
1112.872	-47.57	5.50	3.90	-45.97	-13	H	-32.97
2065.729	-48.85	5.79	5.79	-48.85	-13	H	-35.85
3159.355	-46.84	7.10	7.03	-46.77	-13	H	-33.77
4074.388	-42.59	6.60	8.09	-44.08	-13	H	-31.08
6340.436	-35.77	9.20	14.44	-41.01	-13	H	-28.01
7096.999	-35.89	9.70	13.56	-39.75	-13	H	-26.75
1819.036	-52.82	9.20	5.65	-49.27	-13	V	-36.27
2543.625	-49.95	6.80	5.76	-48.91	-13	V	-35.91
3123.039	-46.10	7.10	7.55	-46.55	-13	V	-33.55
4062.629	-42.56	6.60	8.09	-44.05	-13	V	-31.05
5377.354	-36.66	6.60	11.93	-41.99	-13	V	-28.99
9502.925	-38.79	14.00	13.66	-38.45	-13	V	-25.45

5.7 Frequency stability

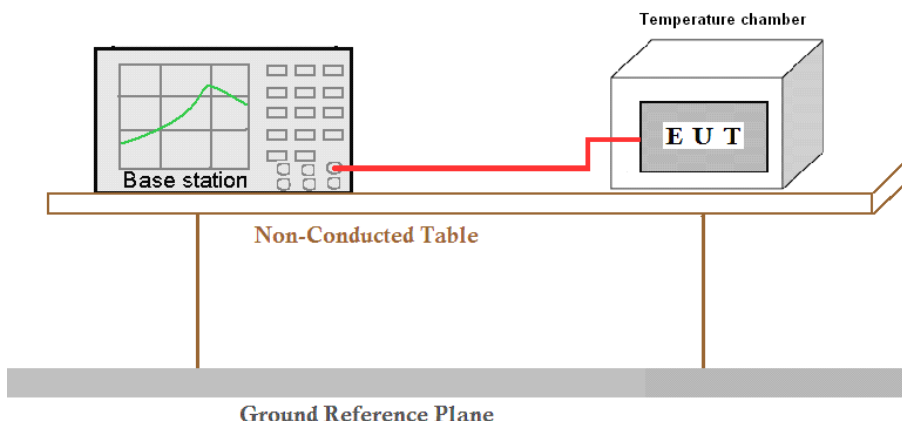Test Requirement:	Part 2.1055							
Test Method:	ITA-603-D-2010							
Test Setup:								
Measurement Procedure:	The transmitter output was connected to a calibrated coaxial cable and a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel).The EUT was place in the temperature chamber, the DC leads and RF output cable exited the chamber though an opening made for that purpose. After Operate the equipment in standby conditions for 15 minutes before proceeding. The temperature was varied from -30℃ to +50℃ at intervals of not more than 10℃ The frequency stability was read from the base station at 25℃ the input voltage was varied +/-15%, the frequency stability and input voltage was record.							
Instruments Used:	Refer to section 4.10 for details							
Limit:	<table><tr><th>Operation Band</th><th>Frequency stability Limit(ppm)</th></tr><tr><td>GSM/GPRS/EDGE/WCDMA 850</td><td>±2.5ppm</td></tr><tr><td>GSM/GPRS/EDGE/WCDMA 1900</td><td>---</td></tr></table>	Operation Band	Frequency stability Limit(ppm)	GSM/GPRS/EDGE/WCDMA 850	±2.5ppm	GSM/GPRS/EDGE/WCDMA 1900	---	
Operation Band	Frequency stability Limit(ppm)							
GSM/GPRS/EDGE/WCDMA 850	±2.5ppm							
GSM/GPRS/EDGE/WCDMA 1900	---							
Test Results:	Pass							



**Reference Frequency: Low channel 824.2MHz@ 25 degree****Limit: +/- 2.5ppm = +/-2060.5Hz**

Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
12.0	-30	824.199946	54	+/-2060.5
12.0	-20	824.199952	48	+/-2060.5
12.0	-10	824.199944	56	+/-2060.5
12.0	10	824.199963	37	+/-2060.5
12.0	20	824.199958	42	+/-2060.5
12.0	30	824.199946	54	+/-2060.5
12.0	40	824.199960	40	+/-2060.5
12.0	50	824.199953	47	+/-2060.5

Reference Frequency: Mid channel 836.4MHz@ 25 degree**Limit: +/- 2.5ppm = +/-2091Hz**

Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
12.0	-30	836.399955	45	+/-2091
12.0	-20	836.399962	38	+/-2091
12.0	-10	836.399973	27	+/-2091
12.0	10	836.399952	48	+/-2091
12.0	20	836.399936	64	+/-2091
12.0	30	836.399948	52	+/-2091
12.0	40	836.399929	71	+/-2091
12.0	50	836.399947	54	+/-2091

Reference Frequency: High channel 848.8MHz@ 25 degree**Limit: +/- 2.5ppm = +/-2122Hz**

Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
12.0	-30	848.799952	48	+/-2122
12.0	-20	848.799967	33	+/-2122
12.0	-10	848.799955	45	+/-2122
12.0	10	848.799971	29	+/-2122
12.0	20	848.799938	62	+/-2122
12.0	30	848.799965	35	+/-2122
12.0	40	848.799964	36	+/-2122
12.0	50	848.799952	48	+/-2122

**Reference Frequency: Low channel 1850.2MHz@ 25 degree****Limit: N/A**

Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
12.0	-30	1850.199950	50	N/A
12.0	-20	1850.199962	38	N/A
12.0	-10	1850.199938	62	N/A
12.0	10	1850.199949	51	N/A
12.0	20	1850.199942	58	N/A
12.0	30	1850.199982	18	N/A
12.0	40	1850.199943	57	N/A
12.0	50	1850.199959	41	N/A

Reference Frequency: Mid channel 1880MHz@ 25 degree**Limit: N/A**

Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
12.0	-30	1879.999947	53	N/A
12.0	-20	1879.999934	66	N/A
12.0	-10	1879.999929	71	N/A
12.0	10	1879.999958	42	N/A
12.0	20	1879.999976	24	N/A
12.0	30	1879.999980	20	N/A
12.0	40	1879.999962	38	N/A
12.0	50	1879.999939	61	N/A

Reference Frequency: High channel 1909.8MHz@ 25 degree**Limit: N/A**

Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
12.0	-30	1909.799944	56	N/A
12.0	-20	1909.799951	51	N/A
12.0	-10	1909.799933	33	N/A
12.0	10	1909.799966	66	N/A
12.0	20	1909.799928	28	N/A
12.0	30	1909.799951	51	N/A
12.0	40	1909.799968	68	N/A
12.0	50	1909.799943	43	N/A



Reference Frequency: Low channel 824.2MHz				
Limit: +/- 2.5ppm = +/-2060.5Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
15.0	25	824.200042	42	+/-2060.5
12.0	25	824.200026	26	+/-2060.5
6.0 (Endpoint)	25	824.200035	35	+/-2060.5
Reference Frequency: Mid channel 836.4MHz				
Limit: +/- 2.5ppm = +/-2091Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
15.0	25	836.400014	14	+/-2091
12.0	25	836.400026	26	+/-2091
6.0 (Endpoint)	25	836.400024	24	+/-2091
Reference Frequency: High channel 848.8MHz				
Limit: +/- 2.5ppm = +/-2122Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
15.0	25	848.800036	36	+/-2122
12.0	25	848.800024	24	+/-2122
6.0 (Endpoint)	25	848.800062	62	+/-2122
Reference Frequency: Low channel 1850.2MHz				
Limit: N/A				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
15.0	25	1850.200044	44	N/A
12.0	25	1850.200035	35	N/A
6.0 (Endpoint)	25	1850.200028	28	N/A



Reference Frequency: Mid channel 1880MHz				
Limit: N/A				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
15.0	25	1880.000015	15	N/A
12.0	25	1880.000035	35	N/A
6.0 (Endpoint)	25	1880.000062	62	N/A

Reference Frequency: High channel 1909.8MHz				
Limit: N/A				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature(degree)	(MHz)		
15.0	25	1909.800071	71	N/A
12.0	25	1909.800022	22	N/A
6.0 (Endpoint)	25	1909.800019	19	N/A