

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBHVI-WTW-P24080244A-1

FCC ID: N6C-PCEBE

Product: Wi-Fi 7/BT combo module

Brand: Silex Technology

Model No.: SX-PCEBE

Received Date: 2025/2/5

Test Date: 2025/4/2 ~ 2025/5/19

Issued Date: 2025/6/2

Applicant: Silex Technology, Inc.

Address: 2-3-1 Hikaridai, Seika-cho, Soraku-gun, Kyoto 619-0237, Japan


Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

FCC Registration / 723255 / TW2022

Designation Number:

Approved by:  , **Date:** 2025/6/2
May Chen / Manager

This test report consists of 35 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Phoenix Huang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	8
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	11
3.5 Duty Cycle of Test Signal.....	12
3.6 Test Program Used and Operation Descriptions	13
3.7 Connection Diagram of EUT and Peripheral Devices	13
3.8 Configuration of Peripheral Devices and Cable Connections	14
4 Test Instruments	15
4.1 RF Output Power.....	15
4.2 Power Spectral Density	15
4.3 AC Power Conducted Emissions	15
4.4 Unwanted Emissions below 1 GHz	16
5 Limits of Test Items.....	17
5.1 RF Output Power.....	17
5.2 Power Spectral Density	17
5.3 AC Power Conducted Emissions	17
5.4 Unwanted Emissions below 1 GHz	18
6 Test Arrangements.....	19
6.1 RF Output Power.....	19
6.1.1 Test Setup	19
6.1.2 Test Procedure	19
6.2 Power Spectral Density	20
6.2.1 Test Setup	20
6.2.2 Test Procedure	20
6.3 AC Power Conducted Emissions	21
6.3.1 Test Setup	21
6.3.2 Test Procedure	21
6.4 Unwanted Emissions below 1 GHz	22
6.4.1 Test Setup	22
6.4.2 Test Procedure	23
7 Test Results of Test Item	25
7.1 RF Output Power.....	25
7.2 Power Spectral Density	27
7.3 AC Power Conducted Emissions	29
7.4 Unwanted Emissions below 1 GHz	31
8 Pictures of Test Arrangements	34
9 Information of the Testing Laboratories	35

Release Control Record

Issue No.	Description	Date Issued
RFBHVI-WTW-P24080244A-1	Original release.	2025/6/2

1 Certificate

Product: Wi-Fi 7/BT combo module

Brand: Silex Technology

Test Model: SX-PCEBE

Sample Status: Engineering sample

Applicant: Silex Technology, Inc.

Test Date: 2025/4/2 ~ 2025/5/19

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: ANSI C63.10-2013
KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	N/A	Refer to Note 1 below
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	N/A	Refer to Note 1 below
---	Occupied Bandwidth	N/A	Refer to Note 1 below
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -15.46 dB at 0.42344 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -2.73 dB at 53.89 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	N/A	Refer to Note 1 below
15.203	Antenna Requirement	Pass	Antenna connector is MHF 4L not a standard connector.

Notes:

- Only RF Output Power, Power Spectral Density, AC Power Conducted Emissions and Unwanted Emissions below 1 GHz test items were performed for this addendum. The others testing data refer to original test report (Original FCC ID: J9C-QCNCM825).
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
Power Spectral Density	-	1.3 dB
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.5 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wi-Fi 7/BT combo module
Brand	Silex Technology
Test Model	SX-PCEBE
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDM in 11ac mode 4096QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 2166.7 Mbps 802.11ax: up to 2969.7 Mbps 802.11be: up to 2882.4 Mbps
Operating Frequency	5.18 GHz ~ 5.24 GHz 5.26 GHz ~ 5.32 GHz 5.5 GHz ~ 5.72 GHz 5.745 GHz ~ 5.825 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40): 12 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80): 6 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160): 2
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone, 996-tone, 2 * 996-tone Multi-RU (Small RU): 52-tone + 26-tone, 106-tone + 26-tone Multi-RU (Large RU): 484-tone + 242-tone, 996-tone + 484-tone
Channel Puncturing (Large RU)	80 MHz punctured by 20 MHz; 160 MHz punctured by 20 MHz 160 MHz punctured by 40 MHz
Output Power	5.18 GHz ~ 5.24 GHz: 156.917 mW (21.96 dBm) 5.26 GHz ~ 5.32 GHz: 143.246 mW (21.56 dBm) 5.5 GHz ~ 5.72 GHz: 109.703 mW (20.4 dBm) 5.745 GHz ~ 5.825 GHz: 121.012 mW (20.83 dBm)
EUT Category	Client device

Note:

- This report is prepared for FCC class II permissive change. The difference compared with the original design is as the following:
 - ◆ Decrease TX power of specific channels via SW, the conditions for reducing power are applicable solely to the retesting channel. (with original chip: WCN7851)
 - ◆ WLAN 2.4G BW20 ch12 and ch13; BW 40 ch10 and ch11 were disabled via software and is non-modifiable by any third-party.
- According to above conditions, there are RF Output Power, Power Spectral Density, AC Power Conducted Emissions and Unwanted Emissions below 1 GHz test items need to be performed. All data for meeting the requirement is verified.
- There are Bluetooth (EDR, BLE, QHS) and WLAN (2.4 GHz & 5 GHz & 6 GHz) technology used for the EUT.

4. Simultaneously transmission combination.

Combination	Technology	
1	WLAN(2.4 GHz)_Ant 0+1	WLAN(5 GHz)_Ant 0+1
2	WLAN(2.4 GHz)_Ant 0+1	WLAN(6 GHz)_Ant 0+1
3	WLAN(5 GHz)_Ant 0+1	Bluetooth_Ant 0
4	WLAN(5 GHz)_Ant 0+1	Bluetooth_Ant 1
5	WLAN(5 GHz)_Ant 0+1	Bluetooth_Ant 0+1
6	WLAN(6 GHz)_Ant 0+1	Bluetooth_Ant 0
7	WLAN(6 GHz)_Ant 0+1	Bluetooth_Ant 1
8	WLAN(6 GHz)_Ant 0+1	Bluetooth_Ant 0+1
9	WLAN(2.4 GHz)_Ant 0	Bluetooth_Ant 1
10	WLAN(2.4 GHz)_Ant 1	Bluetooth_Ant 0

5. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Set	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Cable Loss (dB)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain0/1	Hong-Bo	260-25094	3.53	2.4~2.4835	0.74	PIFA	MHF 4L	300
				3.06	5.15~5.25	1.16			
				3.07	5.25~5.35	1.18			
				4.81	5.47~5.725	1.26			
				4.2	5.725~5.850	1.28			
2	Chain0/1	Hong-Bo	260-25083	5.09	5.850~5.895	1.29	PIFA	MHF 4L	300
				5.14	5.925~6.425	1.35			
				5.09	6.425~6.525	1.38			
				5.16	6.525~6.875	1.45			
				5.12	6.875~7.125	1.50			
3	Chain0/1	Hong-Bo	260-25084	3.22	2.4~2.4835	0.49	Monopole	MHF 4L	200
				3.35	5.150~5.250	0.76			
				3.42	5.250~5.350	0.77			
				4.77	5.470~5.725	0.80			
				4.72	5.725~5.850	0.84			
				4.71	5.850~5.895	0.84			
				4.75	5.925~6.425	0.86			
				4.29	6.425~6.525	0.91			
				4.81	6.525~6.875	0.96			
				4.74	6.875~7.125	0.98			

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	Tx & Rx Configuration	
802.11a	2Tx	2Rx
802.11n (HT20)	2Tx	2Rx
802.11n (HT40)	2Tx	2Rx
802.11ac (VHT20)	2Tx	2Rx
802.11ac (VHT40)	2Tx	2Rx
802.11ac (VHT80)	2Tx	2Rx
802.11ac (VHT160)	2Tx	2Rx
802.11ax (HE20)	2Tx	2Rx
802.11ax (HE40)	2Tx	2Rx
802.11ax (HE80)	2Tx	2Rx
802.11ax (HE160)	2Tx	2Rx
802.11be (EHT20)	2Tx	2Rx
802.11be (EHT40)	2Tx	2Rx
802.11be (EHT80)	2Tx	2Rx
802.11be (EHT160)	2Tx	2Rx
802.11ax (RU26/52/106/242/484/996/2*996)	2Tx	2Rx
802.11be (RU26/52/106/242/484/996/2*996 MRU52+26/106+26/ 484+242/996+484)	2Tx	2Rx

Note: The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz, 160 MHz), 802.11ax mode for 20 MHz (40 MHz, 80 MHz, 160 MHz) and 802.11be mode for 20 MHz (40 MHz, 80 MHz, 160 MHz). Therefore the investigated worst case is the representative mode in test report.

3.3 Channel List

FOR 5180 ~ 5320 MHz

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	54	5270 MHz
46	5230 MHz	62	5310 MHz

2 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz

1 straddle channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
50	5250 MHz

FOR 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
114	5570 MHz

FOR 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
155	5775 MHz

3.4 Test Mode Applicability and Tested Channel Detail


Pre-Scan:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.
-----------	--

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power / Power Spectral Density	A	802.11be (EHT20)	CDD	36, 40, 48	BPSK	MCS0
				52, 60, 64		
				100, 116, 140, 144		
				149, 157, 165		
AC Power Conducted Emissions	C	802.11be (EHT20)	CDD	100	BPSK	MCS0
Unwanted Emissions below 1 GHz	A, B	802.11be (EHT20)	CDD	100	BPSK	MCS0
EUT Configure Mode:	A	EUT only (remove 50 ohm terminator and Connect to the appropriate equipment)_Nss 1				
	B	EUT with 50 ohm terminator_Nss 1				
	C	EUT with antenna set 1 (Model: 260-25094)				

3.5 Duty Cycle of Test Signal

802.11be (EHT20): Duty cycle = 5.395 ms / 5.425 ms x 100% = 99.4%

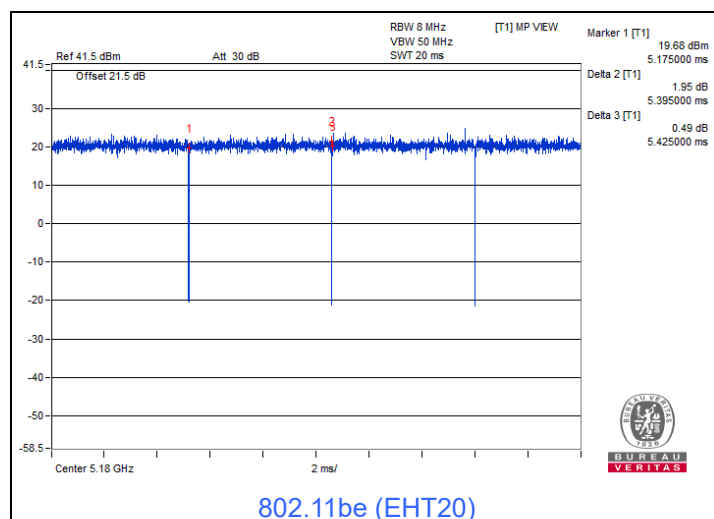


3.6 Test Program Used and Operation Descriptions


Controlling software (QRCT 1.0.00098) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

For Unwanted Emissions test:

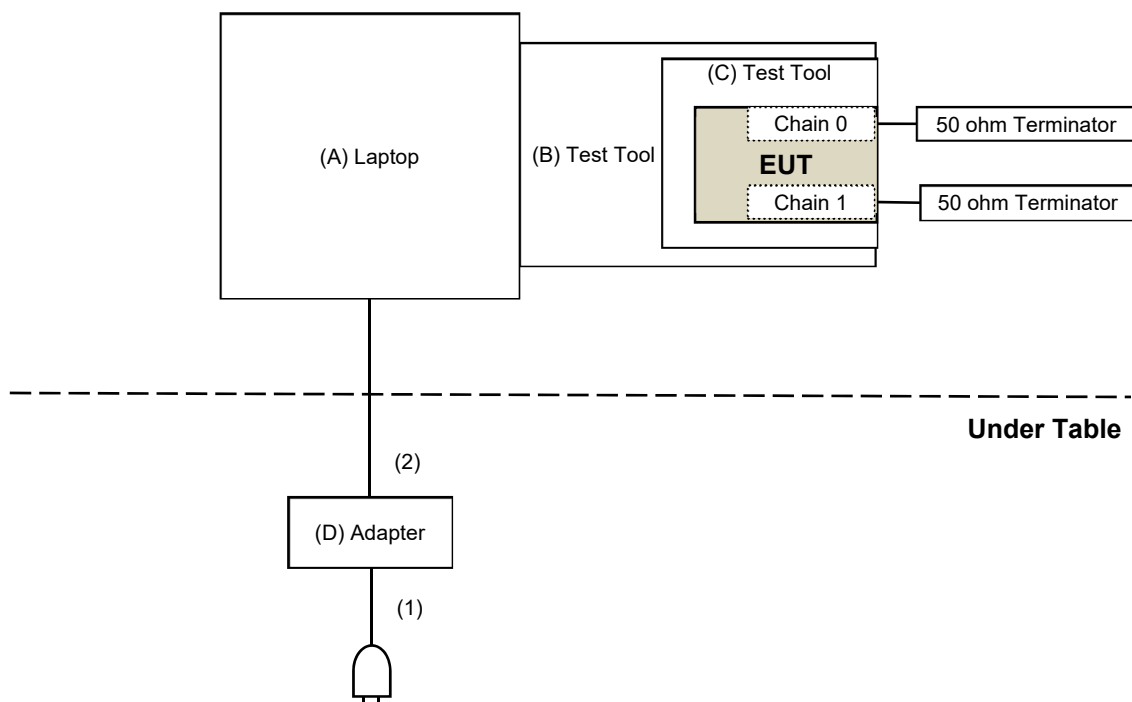

For AC Power Conducted Emission test:

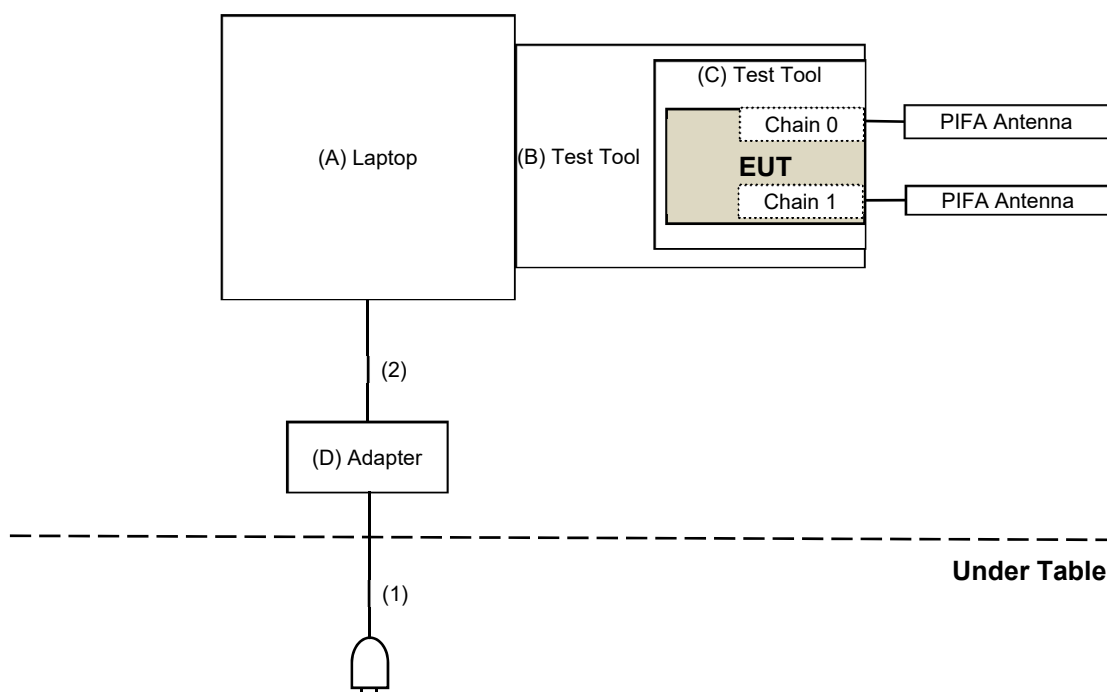

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	HP	HSN-Q32C-5	N/A	N/A	Supplied by applicant
B	Test Tool	Silex	NGFF(A+E) TO Mini PCI-E Adapter	N/A	N/A	Supplied by applicant
C	Test Tool	Silex	PW105500XX	N/A	N/A	Supplied by applicant
D	Adapter	HP	TPN-DA22	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	AC Cable	1	0.85	No	0	Supplied by applicant
2	DC Cable	1	1.6	No	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Pulse Power Sensor Anritsu	MA2411B	1726434	2024/6/7	2025/6/6
PXA Signal Analyzer Keysight	N9030A	MY55410176	2024/6/12	2025/6/11
RF Power Meter Anritsu	ML2495A	1529002	2024/6/7	2025/6/6
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2025/4/2

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY55410176	2024/6/12	2025/6/11
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2025/4/2

4.3 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance Telegartner	50 ohm	3	2024/11/1	2025/10/31
EMI Test Receiver R&S	ESCS 30	100375	2024/5/20	2025/5/19
Fixed Attenuator STI	STI02-2200-10	005	2025/2/17	2026/2/16
LISN R&S	ESH3-Z5	835239/001	2025/3/27	2026/3/26
		848773/004	2024/10/7	2025/10/6
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2025/2/17	2026/2/16
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2025/5/19

4.4 Unwanted Emissions below 1 GHz

Mode A

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY55410176	2024/6/12	2025/6/11
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2025/4/11

Mode B

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-406	2024/10/8	2025/10/7
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	2025/2/15	2026/2/14
Loop Antenna TESEQ	HLA 6121	63620	2024/10/17	2025/10/16
MXE EMI Receiver Agilent	N9038A	MY51210202	2024/7/29	2025/7/28
Preamplifier EMCI	EMC330N	980701	2025/2/15	2026/2/14
	EMC001340	980142	2025/2/17	2026/2/16
RF Coaxial Cable mTJ	100100-CFD400LW-200	CFD400-200	2025/2/15	2026/2/14
	100100-CFD400LW-400	CFD400-400	2025/2/15	2026/2/14
	100100-CFD400LW-800	CFD400-800	2025/2/15	2026/2/14
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2025/5/16

5 Limits of Test Items

5.1 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Points	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Client devices	250mW (24 dBm)

Operation Band	Limit
U-NII-2A	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Points	
	Indoor Access Point	
	Client devices	11 dBm/MHz

Operation Band	Limit
U-NII-2A	11 dBm/MHz
U-NII-2C	11 dBm/MHz
U-NII-3	30 dBm/500 kHz

5.3 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.4 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).


6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



For channel straddling:



6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For channel straddling:


Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

6.2 Power Spectral Density

6.2.1 Test Setup



6.2.2 Test Procedure

For specified measurement bandwidth 1 MHz:

Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value


For specified measurement bandwidth 500 kHz:

Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

6.3 AC Power Conducted Emissions

6.3.1 Test Setup

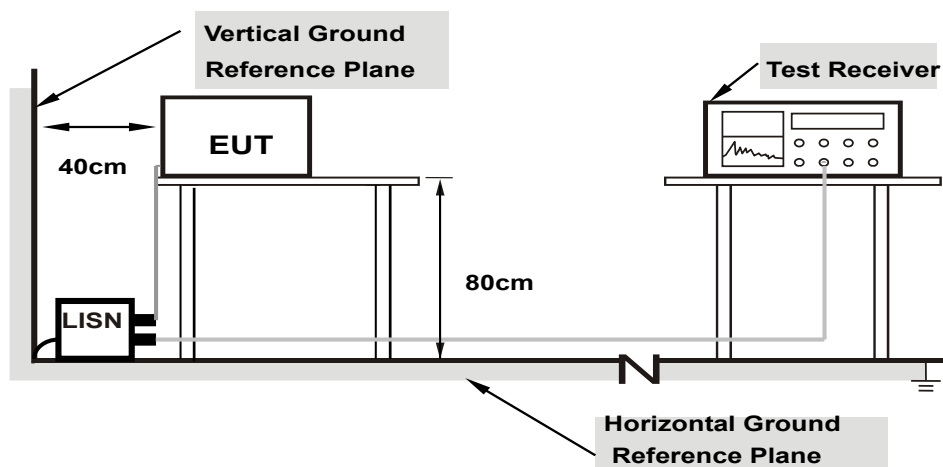

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.

6.4 Unwanted Emissions below 1 GHz


6.4.1 Test Setup

For Radiated Configuration:


For Radiated emission below 30 MHz

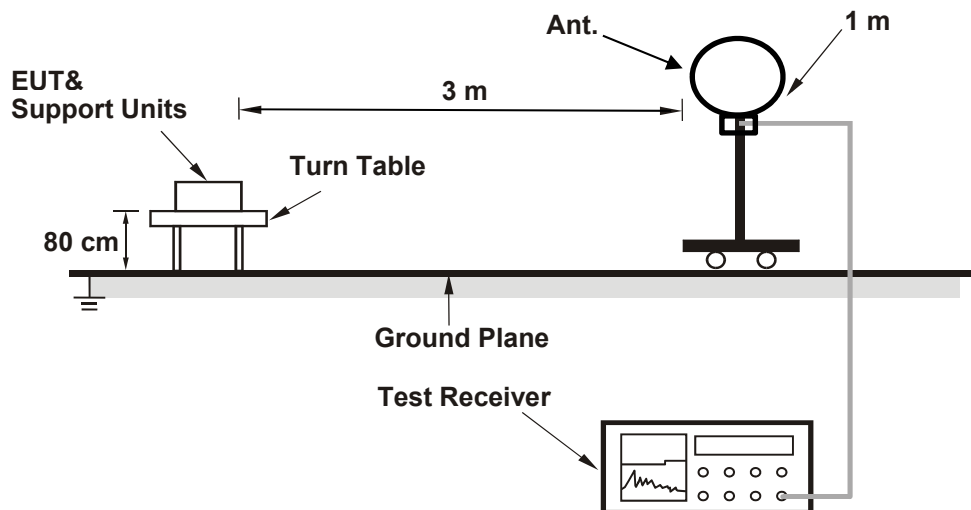

For Radiated emission above 30 MHz

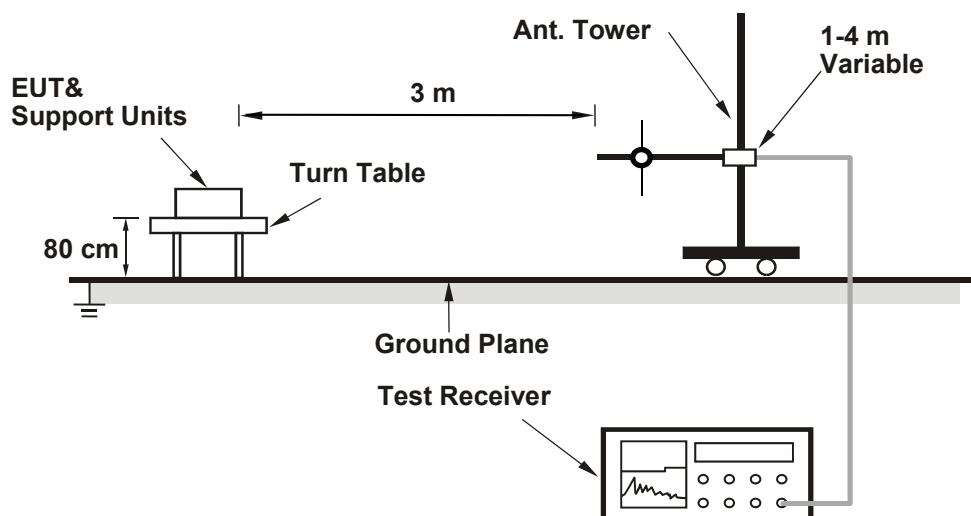

For Conducted Configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

Radiated versus Conducted Measurement.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test

For Radiated emission below 30 MHz

- e-1.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-1.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-1.3. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- e-1.4. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-1.5. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- e-2.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-2.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-2.3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-2.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-2.5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Unwanted Emission Convert Formula

- a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
- b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB)
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal.
For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.
For the band edge the gain for the specific band may have been used.

Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:
For frequencies between 30 MHz and 1000 MHz, add 4.7 dB.
2. The conducted emission test was considered some factor to compute test result.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	21°C, 61% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------


802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	17.35	15.27	87.976	19.44	24	Pass
40	5200	19.84	17.82	156.917	21.96	24	Pass
48	5240	19.38	17.37	141.272	21.50	24	Pass
52	5260	19.42	17.40	142.452	21.54	24	Pass
60	5300	19.55	17.25	143.246	21.56	24	Pass
64	5320	17.84	16.10	101.552	20.07	24	Pass
100	5500	17.72	15.62	95.632	19.81	24	Pass
116	5580	18.27	16.29	109.703	20.40	24	Pass
140	5700	15.78	13.66	61.072	17.86	24	Pass
*144 (U-NII-2C)	5720	16.45	16.01	84.06	19.25	23.1	Pass
*144 (U-NII-3)	5720	9.63	9.44	17.974	12.55	30	Pass
149	5745	18.55	16.56	116.904	20.68	30	Pass
157	5785	18.29	16.40	111.104	20.46	30	Pass
165	5825	18.70	16.71	121.012	20.83	30	Pass


Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-1, the maximum gain is 3.35 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the maximum gain is 3.42 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the maximum gain is 4.81 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 4.72 dBi < 6 dBi, so the output power limit shall not be reduced.


Spectrum Plot for channel straddling

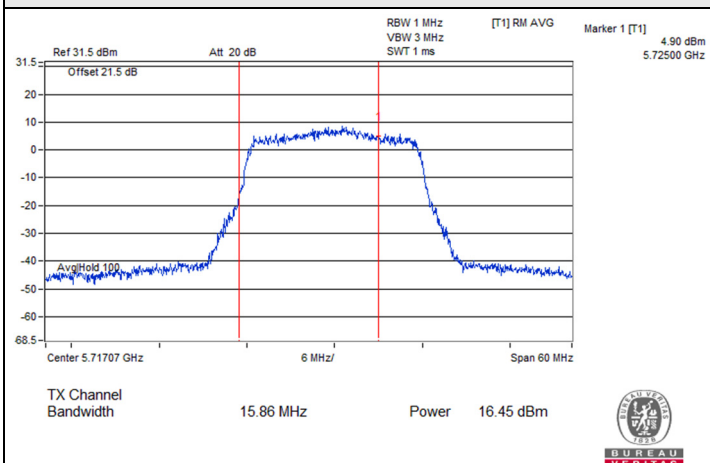


Chain 0 : CH 144 (U-NII-2C)

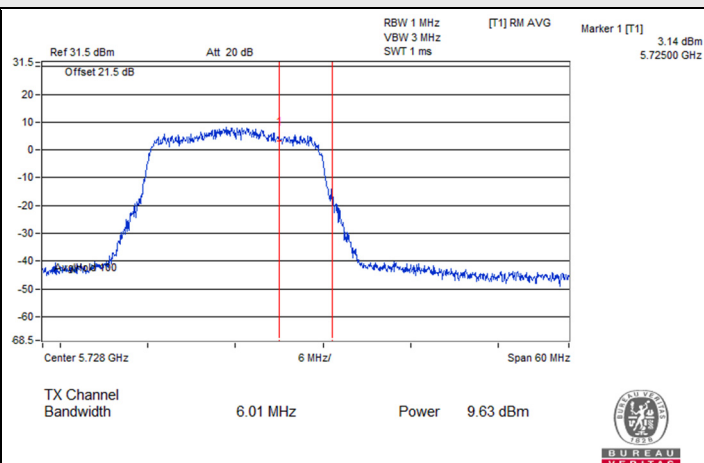

Chain 0 : CH 144 (U-NII-3)

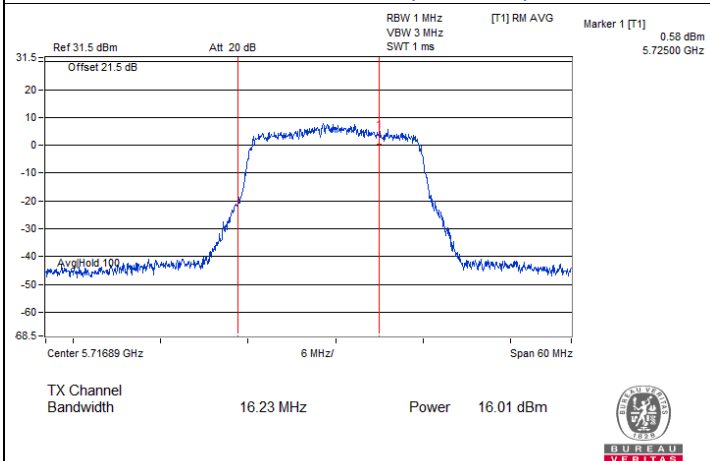

Chain 1 : CH 144 (U-NII-2C)

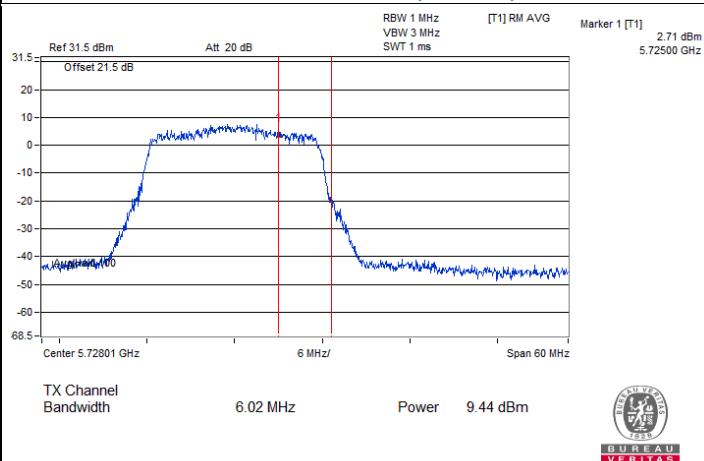

Chain 1 : CH 144 (U-NII-3)

7.2 Power Spectral Density

Input Power:	3.3 Vdc	Environmental Conditions:	21°C, 61% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	6.25	4.63	8.53	10.64	Pass
40	5200	8.28	6.74	10.59	10.64	Pass
48	5240	7.81	6.99	10.43	10.64	Pass
52	5260	7.92	6.62	10.33	10.57	Pass
60	5300	7.96	6.74	10.40	10.57	Pass
64	5320	6.68	5.37	9.08	10.57	Pass
100	5500	6.19	5.52	8.88	9.18	Pass
116	5580	6.40	5.75	9.10	9.18	Pass
140	5700	3.92	3.38	6.67	9.18	Pass
144 (U-NII-2C)	5720	5.72	5.26	8.51	9.18	Pass

Notes:



1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-2.54	-3.08	0.21	2.43	28.27	Pass
149	5745	0.96	0.41	3.7	5.92	28.27	Pass
157	5785	1.03	0.48	3.77	5.99	28.27	Pass
165	5825	1.60	1.10	4.37	6.59	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

Spectrum Plot of Maximum Value

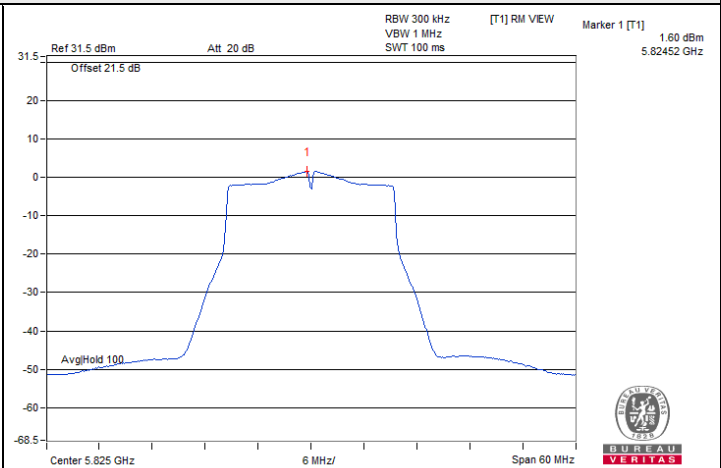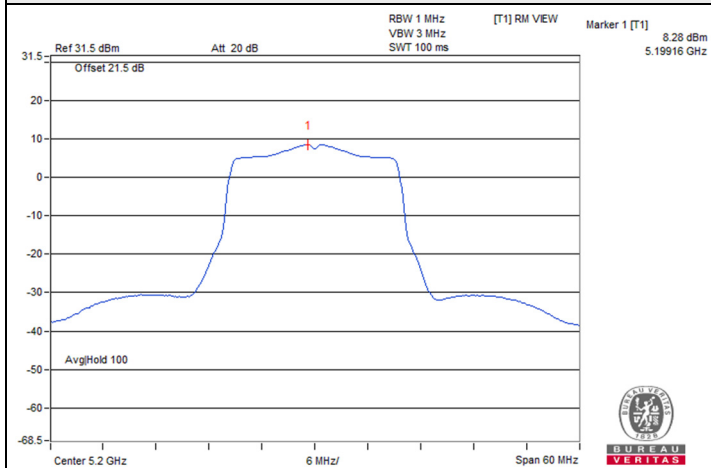


7.3 AC Power Conducted Emissions

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Tank Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.00	35.35	19.20	45.35	29.20	65.79	55.79	-20.44	-26.59
2	0.16953	10.01	33.05	17.12	43.06	27.13	64.98	54.98	-21.92	-27.85
3	0.42344	10.04	29.33	21.88	39.37	31.92	57.38	47.38	-18.01	-15.46
4	3.97266	10.30	16.43	5.76	26.73	16.06	56.00	46.00	-29.27	-29.94
5	7.60938	10.53	16.98	12.01	27.51	22.54	60.00	50.00	-32.49	-27.46
6	25.91016	11.21	26.06	22.94	37.27	34.15	60.00	50.00	-22.73	-15.85

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

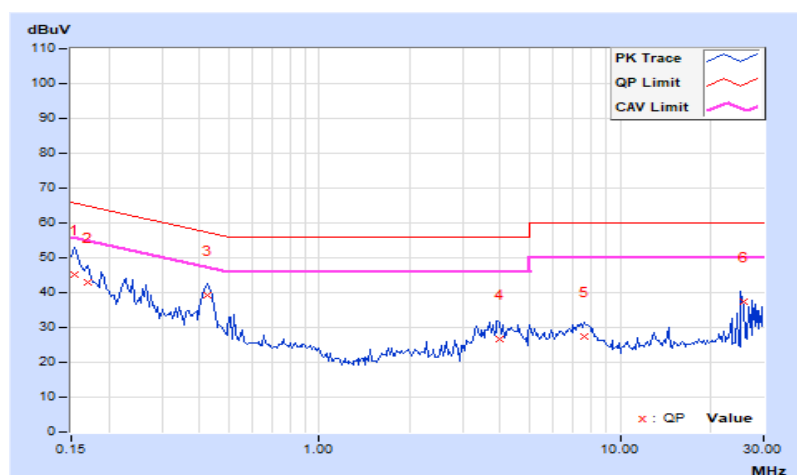


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Tank Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15029	10.02	36.78	20.63	46.80	30.65	65.98	55.98	-19.18	-25.33
2	0.17344	10.02	32.99	16.72	43.01	26.74	64.79	54.79	-21.78	-28.05
3	0.41953	10.02	28.30	20.86	38.32	30.88	57.46	47.46	-19.14	-16.58
4	3.80859	10.26	20.21	17.84	30.47	28.10	56.00	46.00	-25.53	-17.90
5	7.47266	10.47	15.71	11.77	26.18	22.24	60.00	50.00	-33.82	-27.76
6	25.91016	11.00	27.23	23.26	38.23	34.26	60.00	50.00	-21.77	-15.74

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

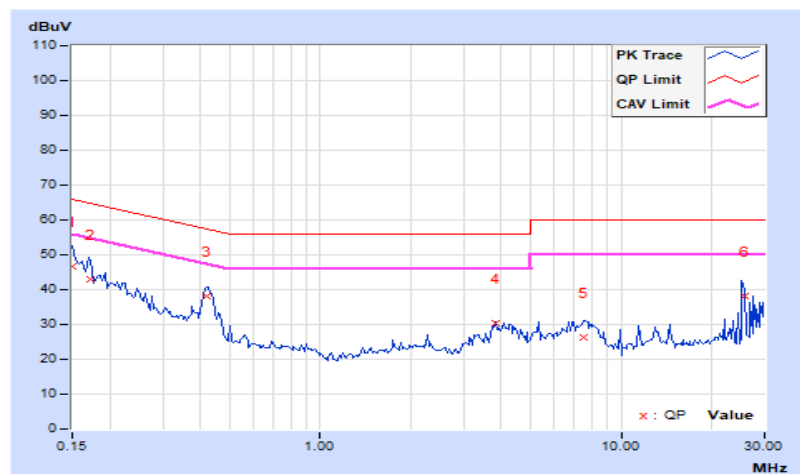

7.4 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	22°C, 60% RH
Tested By	Dolly Chung		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	53.89	37.27 PK	40	-2.73	-75.85	-72.52	12.87	-57.99
2	188.11	38.15 PK	43.5	-5.35	-73.64	-72.42	12.87	-57.11
3	387.2	37.59 PK	46	-8.41	-75.74	-72.11	12.87	-57.67
4	421.52	38.88 PK	46	-7.12	-71.24	-73.59	12.87	-56.38
5	737.62	39.44 PK	46	-6.56	-70.76	-72.91	12.87	-55.82
6	878.63	40.04 PK	46	-5.96	-69.88	-72.81	12.87	-55.22

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

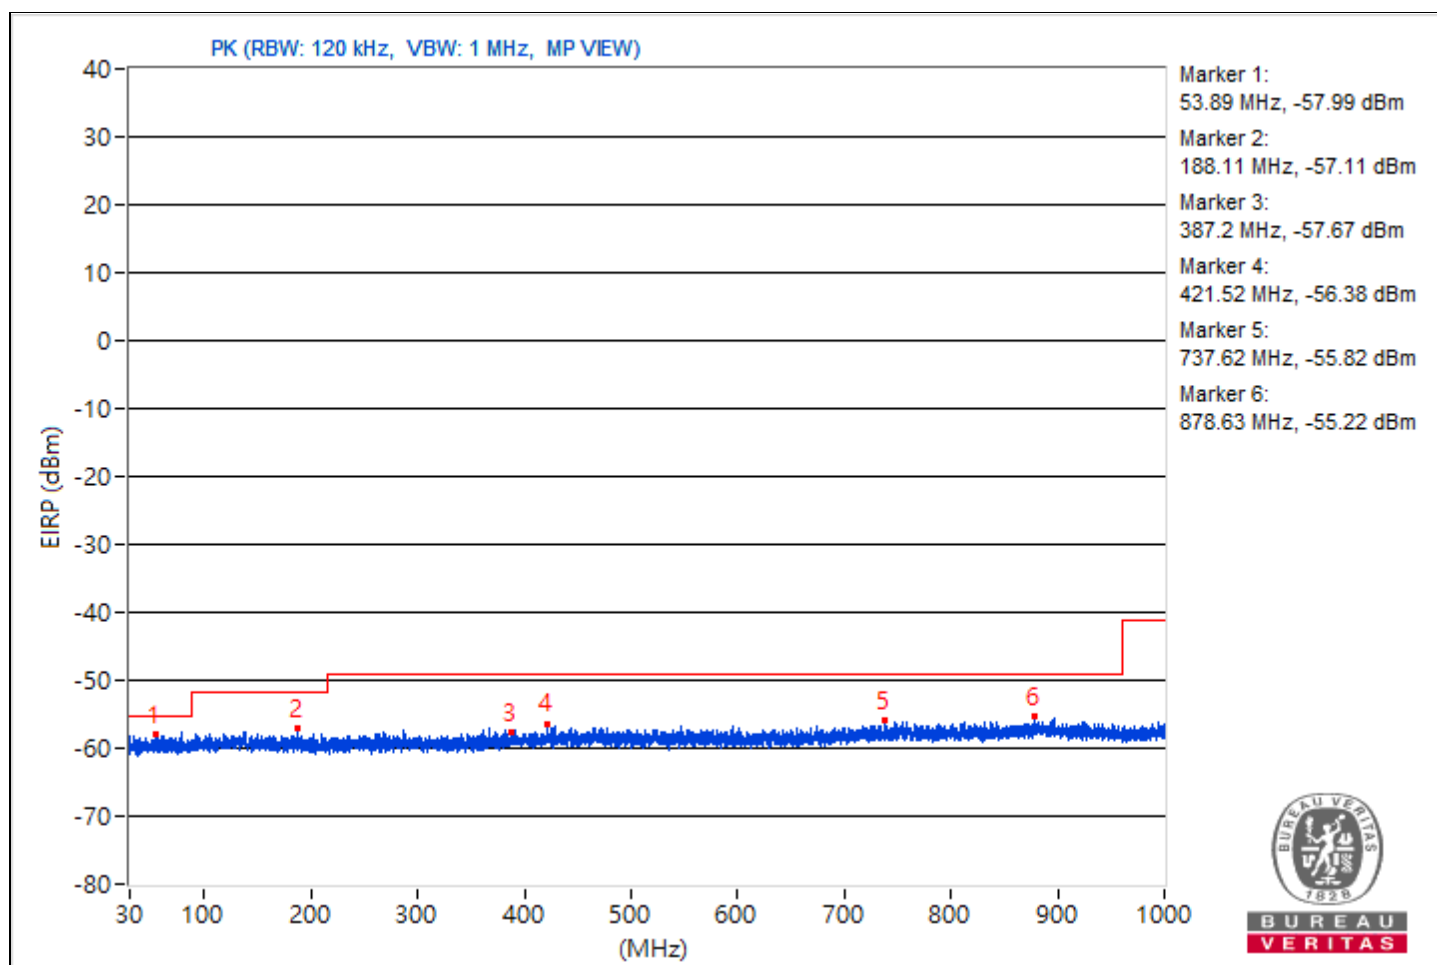


Mode B

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.35	27.0 QP	40.0	-13.0	4.00 H	49	40.8	-13.8
2	103.53	33.8 QP	43.5	-9.7	3.00 H	136	50.3	-16.5
3	318.48	39.0 QP	46.0	-7.0	1.00 H	178	50.7	-11.7
4	398.36	42.8 QP	46.0	-3.2	3.00 H	195	52.6	-9.8
5	796.83	40.1 QP	46.0	-5.9	1.00 H	280	41.6	-1.5
6	899.87	40.7 QP	46.0	-5.3	1.00 H	324	41.0	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

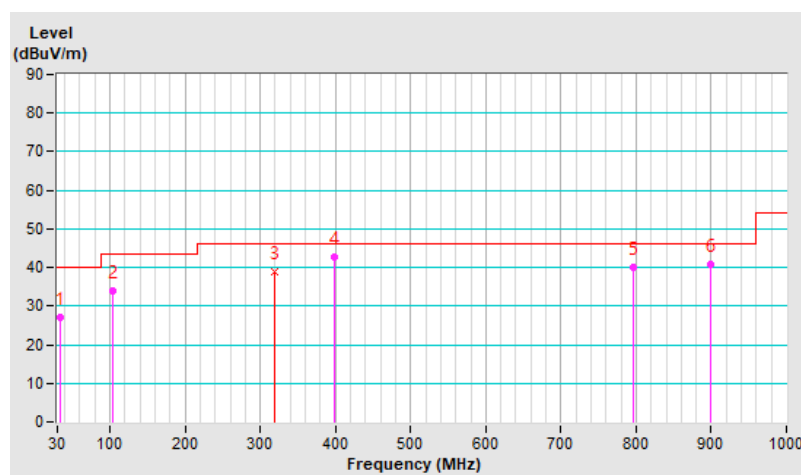


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65 % RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.08	29.5 QP	40.0	-10.5	2.00 V	345	42.8	-13.3
2	139.71	27.1 QP	43.5	-16.4	1.00 V	327	40.5	-13.4
3	305.07	40.9 QP	46.0	-5.1	2.00 V	313	53.1	-12.2
4	399.84	37.8 QP	46.0	-8.2	1.00 V	43	47.6	-9.8
5	736.26	37.2 QP	46.0	-8.8	1.00 V	66	39.4	-2.2
6	954.60	37.7 QP	46.0	-8.3	2.00 V	190	37.1	0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

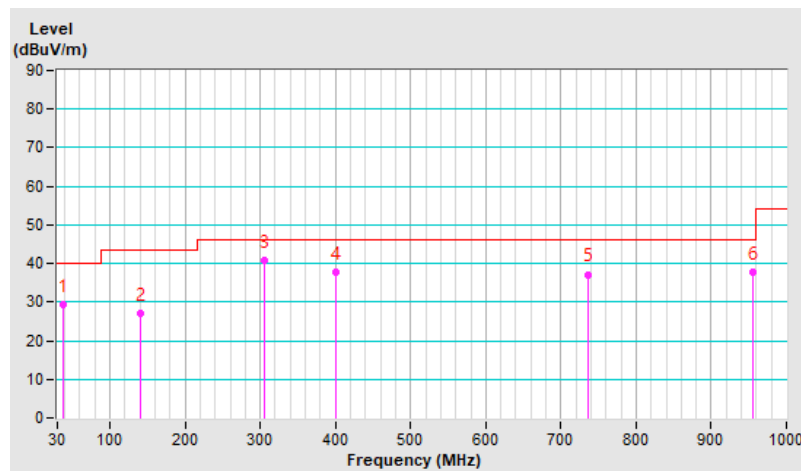

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---