



RADIO TEST REPORT

Test Report No. : 11925908H-B-R1

Applicant : silex technology, Inc.
Type of Equipment : SDIO Wireless Module
Model No. : SX-SDMAN
FCC ID : N6C-SDMAN
Test regulation : **FCC Part 15 Subpart E: 2017**
Class II Permissive Change
***WLAN(5 GHz) part**
(Radiated Spurious Emission test only)

Test Result : **Complied**


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11925908H-B.

Date of test: August 30 to September 13, 2017

Representative test engineer:


Takumi Shimada
Engineer
Consumer Technology Division

Approved by:


Tsubasa Takayama
Engineer
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

REVISION HISTORY

Original Test Report No.: 11925908H-B

[illegible]

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	6
SECTION 4: Operation of E.U.T. during testing.....	9
SECTION 5: Radiated Spurious Emission and Band Edge Compliance	12
APPENDIX 1: Test data	14
Radiated Spurious Emission	15
APPENDIX 2: Test instruments	50
APPENDIX 3: Photographs of test setup	52
Worst Case Position (Horizontal: X-axis/ Vertical:X-axis)	53

SECTION 1: Customer information

Company Name	:	silex technology, Inc.
Address	:	2-3-1 Hikaridai, Seika-cho, Kyoto 619-0237, Japan
Telephone Number	:	+81-774-98-3878
Facsimile Number	:	+81-774-98-3758
Contact Person	:	Toshiro Kometani

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	SDIO Wireless Module
Model No.	:	SX-SDMAN
Serial No.	:	Refer to Section 4, Clause 4.2
Rating	:	DC 3.3 V
Receipt Date of Sample	:	August 24, 2017
Country of Mass-production	:	Japan
Condition of EUT	:	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

2.2 Product Description

Model: SX-SDMAN (referred to as the EUT in this report) is a SDIO Wireless Module.

General Specification

Clock frequency(ies) in the system	:	26 MHz
------------------------------------	---	--------

Radio Specification

Radio Type : Transceiver
Method of Frequency Generation : Synthesizer
Power Supply (inner) : DC1.2V

Specification of Wireless LAN (IEEE802.11b/g/a/n-20/n-40)

Type of radio	IEEE802.11b	IEEE802.11g	IEEE802.11a	IEEE802.11n (20 M band)	IEEE802.11n (40 M band)
Frequency of operation	2412 MHz to 2462 MHz	2412 MHz to 2462 MHz	5180 MHz to 5320 MHz, 5500 MHz to 5580MHz, 5660 MHz to 5700MHz, 5745 MHz to 5825 MHz	2412 MHz to 2462 MHz, 5180 MHz to 5320 MHz, 5500 MHz to 5580 MHz, 5660 MHz to 5700 MHz, 5745 MHz to 5825 MHz	5190 MHz to 5310 MHz, 5510 MHz to 5550 MHz, 5670MHz, 5755 MHz to 5795MHz
Type of modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)	OFDM (64QAM, 16QAM, QPSK, BPSK)		
Channel spacing	5 MHz		20 MHz	<u>2.4 GHz band</u> 5 MHz <u>5 GHz band</u> 20 MHz	40 MHz
Antenna type	Embedded antenna				
Antenna Gain	2.4 GHz : 1.65 dBi (including cable loss), 5 GHz : 1.67 dBi (including cable loss)				
Antenna Connector type	MHF				

*This test report applies for Wireless LAN (5 GHz Band).

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart E
FCC Part 15 final revised on September 1, 2017 and effective October 2, 2017

Title : FCC 47CFR Part15 Radio Frequency Device Subpart E
Unlicensed National Information Infrastructure Devices
Section 15.407 General technical requirements

* The revision on September 20, 2017, does not affect the test specification applied to the EUT.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033 IC: -	FCC: 15.407 (b), 15.205 and 15.209	0.5 dB 11340.000 MHz, AV, Horizontal	Complied	Radiated (> 30 MHz) *1)
		IC: RSS-247 6.2.1.1			
		6.2.2.2			
		6.2.2.3			
		6.2.2.4			
Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.					
*1) Radiated test was selected over 30 MHz based on section FCC 15.407 (b) and KDB 789033 D02 G.3.b).					

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC 15.31 (e)

The RF Module has own regulator.

The RF Module is constantly provided voltage through own regulator regardless of input voltage (DC 3.3 V).

Therefore, this EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

The EUT has a unique antenna connector (MHF).

Therefore the equipment complies with the requirement of 15.203/212.

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Polarity	Radiated emission (Below 1 GHz)			
	(3 m*) (+/-)		(10 m*) (+/-)	
	30 MHz - 200 MHz	200 MHz - 1000 MHz	30 MHz - 200 MHz	200 MHz - 1000 MHz
Horizontal	5.0 dB	5.3 dB	5.0 dB	5.0 dB
Vertical	5.2 dB	6.3 dB	5.0 dB	5.0 dB

Radiated emission (Above 1 GHz)				
(3 m*) (+/-)		(1 m*) (+/-)		(10 m*) (+/-)
1 GHz - 6 GHz	6 GHz - 18 GHz	10 GHz - 26.5 GHz	26.5 GHz - 40 GHz	1 GHz - 18 GHz
5.2 dB	5.5 dB	5.5 dB	5.4 dB	5.5 dB

*Measurement distance

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.5 Test Location

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0
 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
 Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals -” of TCB Council Workshop October 2009.

Mode	Remarks*
IEEE 802.11a (11a)	24 Mbps, (Long GI), PN9
IEEE 802.11n 20MHz BW (11n-20)	MCS 1 (other than W58) / MCS 3 (W58) (Long GI), PN9
IEEE 802.11n 40MHz BW (11n-40)	MCS 3 (Long GI), PN9
*Transmitting duty was close to 100% on all tests. *The worst condition was determined based on the test result of Maximum Peak Output Power. *EUT has the power settings by the software as follows; Power settings: 11a W52, W53 (24 Mbps, Long GI): 14.0 dBm 11n-20 W52, W53, W56 (MCS 1, Long GI): 5180 MHz: 13.0 dBm, others: 14.0 dBm 11n-20 W58 (MCS 3, Long GI): 13 dBm 11n-40 W52, W53, W56 (MCS 3, Long GI): 5190MHz: 9.5dBm, 5310MHz: 11.5dBm, others: 14.0dBm 11n-40 W58 (MCS 3, Long GI): 13 dBm Software: Atheros Radio Test (ART) - Revision 0.2 BUILD #33 ART_11n - Customer Version (ANWI BUILD) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*The details of Operation mode(s)

Test Item	Operating Mode	Tested Antenna Port	Tested Frequency			
			Lower Band	Middle Band	Additional Band	Upper Band
Radiated Spurious Emission (Below 1 GHz)	11n-20 Tx *1)	1 *2)	-	5320 MHz	-	-
Radiated Spurious Emission (Above 1 GHz)	11a Tx	1 *2)	5180 MHz 5240 MHz	5320 MHz	-	-
	11n-20 Tx	1 (W52, W53) 2 (W56, W58) *2)	5180 MHz 5240 MHz	5320 MHz	5500 MHz 5580 MHz 5700 MHz	5745 MHz 5785 MHz 5825 MHz
	11n-40 Tx	1 (W52, W53) 2 (W56, W58) *2)	5190 MHz 5230 MHz	5310 MHz	5510 MHz 5550 MHz 5670 MHz	5755 MHz 5795 MHz
*1) Since 11a and 11n-20 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest conducted output power. *2) After the comparison between Antenna port 1 and Antenna port 2, test was performed with the antenna that had higher power as a representative.						

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

Radiated Spurious Emission (Below 1GHz)

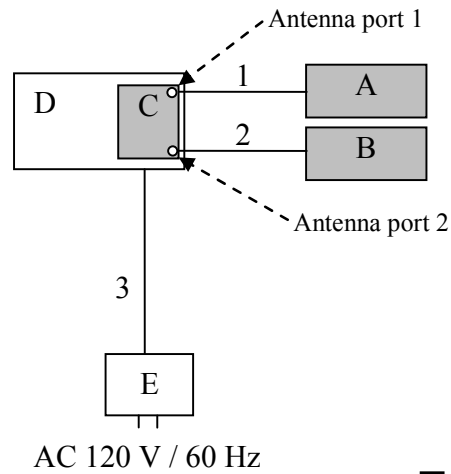

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

** The test was performed with the module that as normal assumed implementation conditions.

The use of a jig does not influence on the test result.


Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Antenna	PW2-ANT	001	SATO CORPORATION	EUT
B	Antenna	PW2-ANT	002	SATO CORPORATION	EUT
C	SDIO Wireless Module	SX-SDMAN	0080925099DC	silex technology, Inc.	EUT
D	Jig Board	PX02535XA	SX05315	silex technology, Inc.	-
E	AC Adaptor	US115-05	C08-0259307	UNIFIVE	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Antenna Cable	0.2	Shielded	Shielded	-
2	Antenna Cable	0.2	Shielded	Shielded	-
3	DC Cable	1.8	Unshielded	Unshielded	-

Radiated Spurious Emission (Above 1GHz)

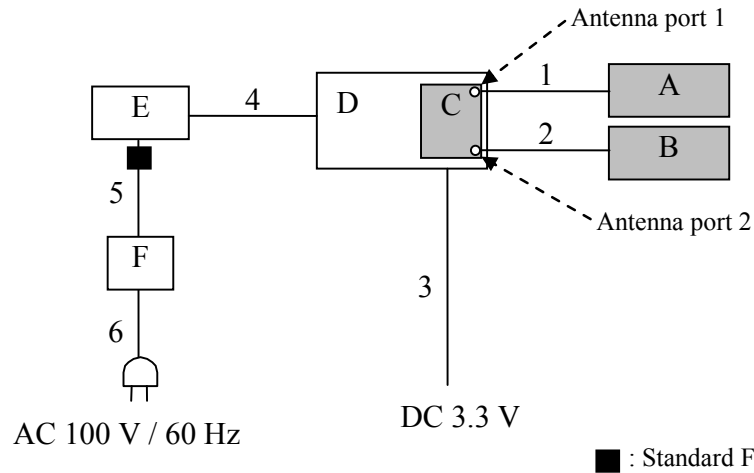

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

** The test was performed with the module that as normal assumed implementation conditions.

The use of a jig does not influence on the test result.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Antenna	PW2-ANT	001	SATO CORPORATION	EUT
B	Antenna	PW2-ANT	002	SATO CORPORATION	EUT
C	SDIO Wireless Module	SX-SDMAN	008092757904	silex technology, Inc.	EUT
D	Jig Board	PX04532XA	SX05315	silex technology, Inc.	-
E	Laptop PC	Latitude E6510	CFGY2A00	DELL	-
F	AC Adaptor	LA90PE0-01	CN-03T6XF-7161 5-1AK-0927-A01	DELL	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Antenna Cable	0.2	Shielded	Shielded	-
2	Antenna Cable	0.2	Shielded	Shielded	-
3	DC Cable	2.5	Unshielded	Unshielded	-
4	SD Card slot Cable	0.3	Unshielded	Unshielded	-
5	DC Cable	1.8	Unshielded	Unshielded	-
6	AC Cable	0.9	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission and Band Edge Compliance

Test Procedure

< Below 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p. *) in the Section 15.407 (b) (1) (2) (3).

For W58 Bandedge

-27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge in the section 15.407(b)(4)(i).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad : P \text{ is the e.i.r.p. (Watts)}$$

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method AD *1) RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: ≥ 100 traces If duty cycle was less than 98%, a duty factor was added to the results.
Test Distance	3 m	3 m (below 1 GHz), 3.75 m*2) / 4.45 m*3) (1 GHz – 10GHz), 1 m*3) (10 GHz – 40 GHz)	

*1) The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r04 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E".

*2) Distance Factor: $20 \times \log(3.75 \text{ m}/3.0 \text{ m}) = 1.94 \text{ dB}$ (No.2 Semi Anechoic Chamber)

*3) Distance Factor: $20 \times \log(4.45 \text{ m}/3.0 \text{ m}) = 3.43 \text{ dB}$ (No.3 Semi Anechoic Chamber)

*4) Distance Factor: $20 \times \log(1.0 \text{ m}/3.0 \text{ m}) = -9.5 \text{ dB}$

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT and antenna to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.


Measurement range : 30 MHz-40 GHz
Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data


Burst rate confirmation

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber	
Report No.	11925908H	
Date	September 5, 2017	September 13, 2017
Temperature / Humidity	24deg. C / 59 % RH	22deg. C / 59 % RH
Engineer	Takumi Shimada	Ryota Yamanaka
Mode	Tx	


11a 24Mbps

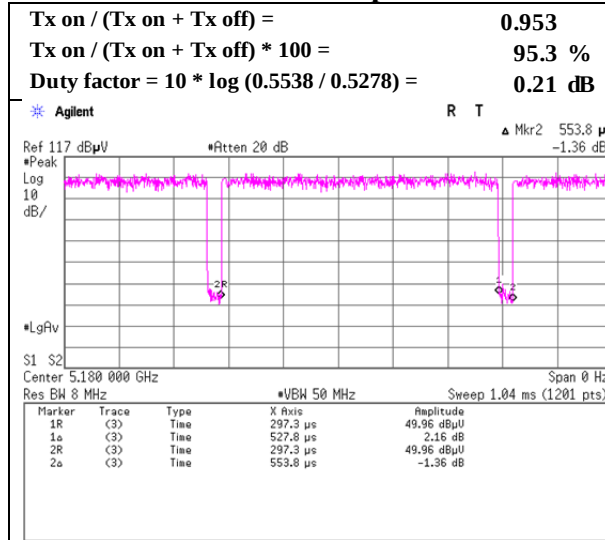


11n-20 MCS1

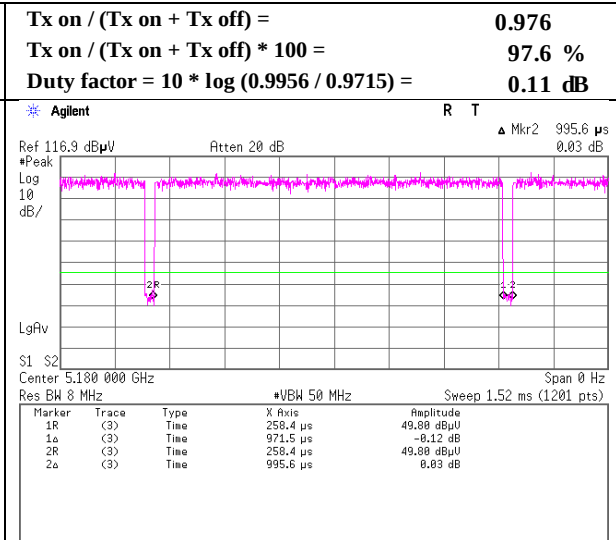

11n-20 MCS3

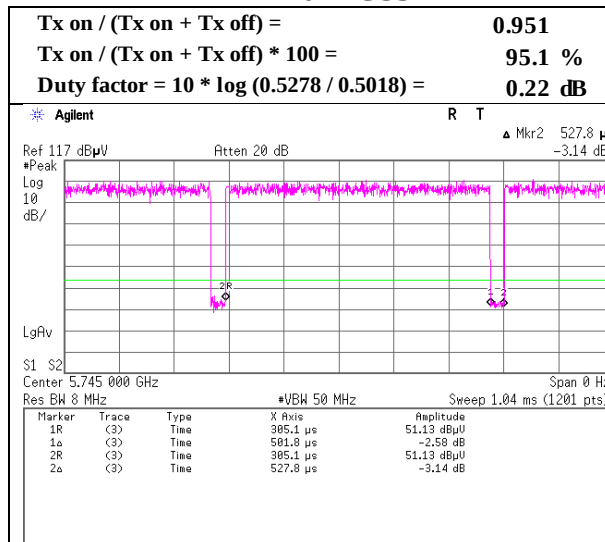

11n-40 MCS3

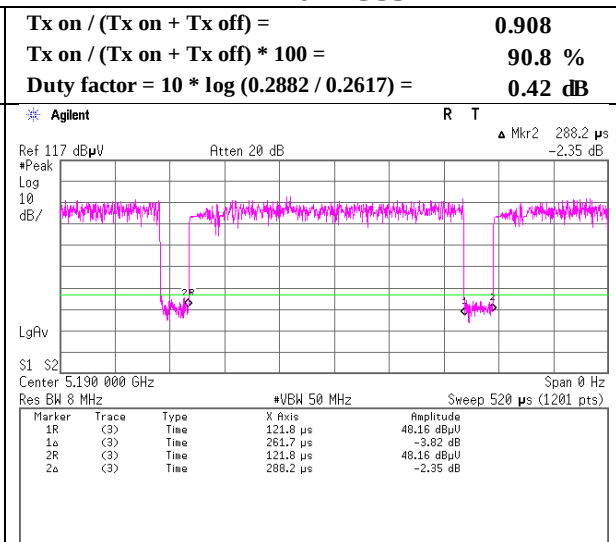

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 11925908H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date September 13, 2017
Temperature / Humidity 22deg. C / 59 % RH
Engineer Ryota Yamanaka
1 GHz - 40 GHz
Mode Tx 11a 5180 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5150.000	PK	51.2	31.7	5.8	33.7	-	55.0	68.2	13.2	
Hori	10360.000	PK	47.1	39.5	-2.3	34.3	-	50.0	73.9	23.9	
Hori	15540.000	PK	44.8	40.2	-0.7	33.0	-	51.3	73.9	22.6	Floor noise
Hori	20720.000	PK	44.2	39.6	-1.5	32.7	-	49.6	73.9	24.3	Floor noise
Hori	5150.000	AV	40.0	31.7	5.8	33.7	0.2	44.0	53.9	9.9	*1)
Hori	10360.000	AV	39.9	39.5	-2.3	34.3	0.2	43.0	53.9	10.9	
Hori	15540.000	AV	36.1	40.2	-0.7	33.0	-	42.6	53.9	11.3	Floor noise
Hori	20720.000	AV	35.9	39.6	-1.5	32.7	-	41.3	53.9	12.6	Floor noise
Vert	5150.000	PK	49.3	31.7	5.8	33.7	-	53.1	68.2	15.1	
Vert	10360.000	PK	49.0	39.5	-2.3	34.3	-	51.9	73.9	22.0	
Vert	15540.000	PK	44.9	40.2	-0.7	33.0	-	51.4	73.9	22.5	Floor noise
Vert	20720.000	PK	44.2	39.6	-1.5	32.7	-	49.6	73.9	24.3	Floor noise
Vert	5150.000	AV	38.2	31.7	5.8	33.7	0.2	42.2	53.9	11.7	*1)
Vert	10360.000	AV	41.9	39.5	-2.3	34.3	0.2	45.0	53.9	8.9	
Vert	15540.000	AV	36.1	40.2	-0.7	33.0	-	42.6	53.9	11.3	Floor noise
Vert	20720.000	AV	35.9	39.6	-1.5	32.7	-	41.3	53.9	12.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



Distance factor: 1 GHz - 10 GHz $20\log(3.75 \text{ m} / 3.0 \text{ m}) = 1.94 \text{ dB}$

10 GHz - 40 GHz $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	11925908H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	September 13, 2017
Temperature / Humidity	22deg. C / 59 % RH
Engineer	Ryota Yamanaka
	1 GHz - 40 GHz
Mode	Tx 11a 5180 MHz

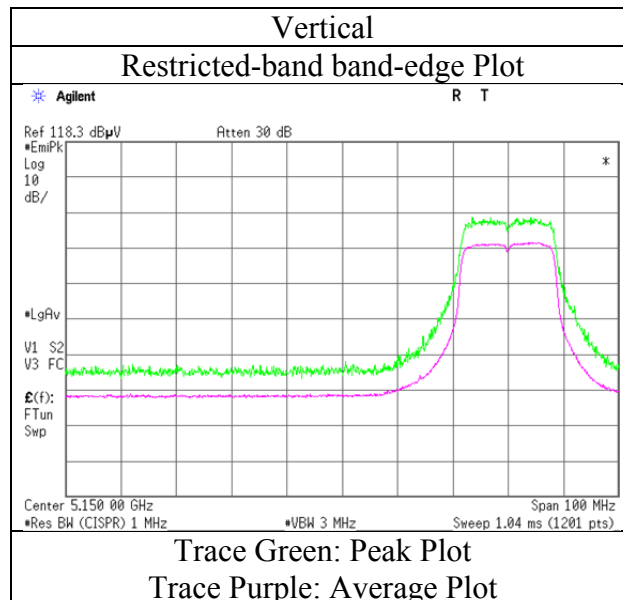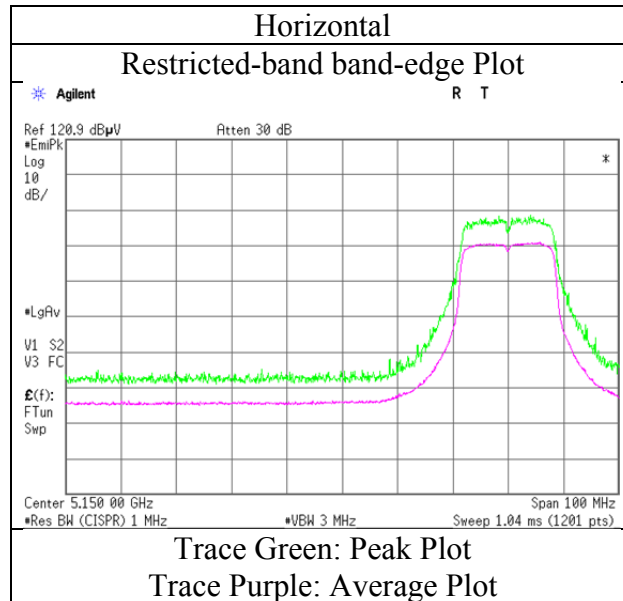

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 11925908H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date September 13, 2017
Temperature / Humidity 22deg. C / 59 % RH
Engineer Ryota Yamanaka
1 GHz - 40 GHz
Mode Tx 11a 5240 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	10480.000	PK	47.0	39.9	-2.2	34.2	-	50.5	73.9	23.4	
Hori	15720.000	PK	45.2	39.7	-0.6	33.1	-	51.2	73.9	22.7	Floor noise
Hori	20960.000	PK	43.5	39.6	-1.5	32.7	-	48.9	73.9	25.0	Floor noise
Hori	26200.000	PK	46.9	40.9	-0.4	33.2	-	54.2	73.9	19.7	Floor noise
Hori	10480.000	AV	39.5	39.9	-2.2	34.2	0.2	43.2	53.9	10.7	
Hori	15720.000	AV	36.1	39.7	-0.6	33.1	-	42.1	53.9	11.8	Floor noise
Hori	20960.000	AV	35.2	39.6	-1.5	32.7	-	40.6	53.9	13.3	Floor noise
Hori	26200.000	AV	39.0	40.9	-0.4	33.2	-	46.3	53.9	7.6	Floor noise
Vert	10480.000	PK	51.4	39.9	-2.2	34.2	-	54.9	73.9	19.0	
Vert	15720.000	PK	45.2	39.7	-0.6	33.1	-	51.2	73.9	22.7	Floor noise
Vert	20960.000	PK	43.6	39.6	-1.5	32.7	-	49.0	73.9	24.9	Floor noise
Vert	26200.000	PK	47.0	40.9	-0.4	33.2	-	54.3	73.9	19.6	Floor noise
Vert	10480.000	AV	45.2	39.9	-2.2	34.2	0.2	48.9	53.9	5.0	
Vert	15720.000	AV	36.2	39.7	-0.6	33.1	-	42.2	53.9	11.7	Floor noise
Vert	20960.000	AV	35.2	39.6	-1.5	32.7	-	40.6	53.9	13.3	Floor noise
Vert	26200.000	AV	39.0	40.9	-0.4	33.2	-	46.3	53.9	7.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.75 \text{ m} / 3.0 \text{ m}) = 1.94 \text{ dB}$
10 GHz - 40 GHz $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

Radiated Spurious Emission

Report No.	11925908H	
Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.2	No.2
Date	August 30, 2017	September 13, 2017
Temperature / Humidity	22deg. C / 59 % RH	22deg. C / 59 % RH
Engineer	Tomohisa Nakagawa	Ryota Yamanaka
	Below 1 GHz	1 GHz - 40 GHz
	26.5 GHz - 40 GHz	
Mode	Tx 11a 5320 MHz	

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	41.925	QP	26.5	13.4	6.9	28.2	-	18.6	40.0	21.4	
Hori	299.990	QP	38.7	13.4	8.8	27.2	-	33.7	46.0	12.3	
Hori	314.644	QP	38.2	13.8	9.0	27.3	-	33.7	46.0	12.3	
Hori	349.997	QP	43.7	14.7	9.3	27.5	-	40.2	46.0	5.8	
Hori	399.997	QP	39.2	15.7	9.3	27.8	-	36.4	46.0	9.6	
Hori	650.502	QP	38.8	19.4	10.3	27.8	-	40.7	46.0	5.3	
Hori	5350.000	PK	52.8	31.7	5.9	33.7	-	56.7	68.2	11.5	
Hori	10640.000	PK	47.4	40.2	-2.1	34.0	-	51.5	73.9	22.4	
Hori	15960.000	PK	44.7	39.0	-0.6	33.2	-	49.9	73.9	24.0	Floor noise
Hori	21280.000	PK	43.3	39.6	-1.4	32.6	-	48.9	73.9	25.0	Floor noise
Hori	5350.000	AV	42.1	31.7	5.9	33.7	0.2	46.2	53.9	7.7	*1)
Hori	10640.000	AV	37.6	40.2	-2.1	34.0	0.2	41.9	53.9	12.0	
Hori	15960.000	AV	36.6	39.0	-0.6	33.2	-	41.8	53.9	12.1	Floor noise
Hori	21280.000	AV	36.0	39.6	-1.4	32.6	-	41.6	53.9	12.3	Floor noise
Vert	42.922	QP	39.2	13.1	6.9	28.2	-	31.0	40.0	9.0	
Vert	55.347	QP	42.9	9.0	7.0	28.1	-	30.8	40.0	9.2	
Vert	283.367	QP	24.4	12.9	8.7	27.1	-	18.9	46.0	27.1	
Vert	299.997	QP	31.9	13.4	8.8	27.2	-	26.9	46.0	19.1	
Vert	315.006	QP	29.7	13.8	9.0	27.3	-	25.2	46.0	20.8	
Vert	645.693	QP	29.4	19.4	10.3	27.8	-	31.3	46.0	14.7	
Vert	5350.000	PK	52.6	31.7	5.9	33.7	-	56.5	68.2	11.7	
Vert	10640.000	PK	59.1	40.2	-2.1	34.0	-	63.2	73.9	10.7	
Vert	15960.000	PK	44.8	39.0	-0.6	33.2	-	50.0	73.9	23.9	Floor noise
Vert	21280.000	PK	43.3	39.6	-1.4	32.6	-	48.9	73.9	25.0	Floor noise
Vert	5350.000	AV	40.5	31.7	5.9	33.7	0.2	44.6	53.9	9.3	*1)
Vert	10640.000	AV	47.5	40.2	-2.1	34.0	0.2	51.8	53.9	2.1	
Vert	15960.000	AV	36.5	39.0	-0.6	33.2	-	41.7	53.9	12.2	Floor noise
Vert	21280.000	AV	36.0	39.6	-1.4	32.6	-	41.6	53.9	12.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.75\text{ m} / 3.0\text{ m}) = 1.94\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	11925908H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	September 13, 2017
Temperature / Humidity	22deg. C / 59 % RH
Engineer	Ryota Yamanaka
	1 GHz - 40 GHz
Mode	Tx 11a 5320 MHz

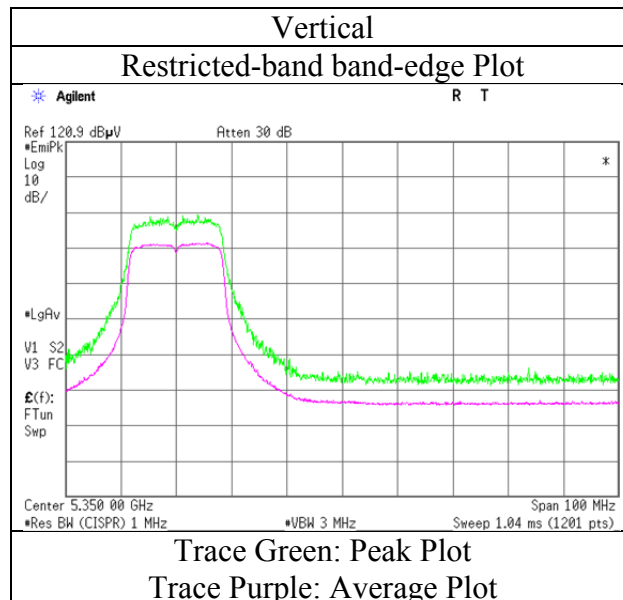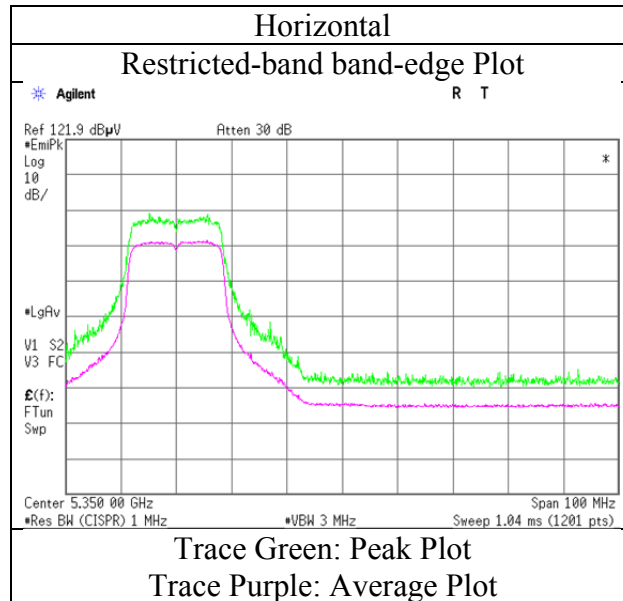

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-20 5180 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5150.000	PK	49.5	32.2	7.3	31.3	-	57.7	68.2	10.5	
Hori	10360.000	PK	47.8	39.5	-1.5	33.2	-	52.6	73.9	21.3	
Hori	15540.000	PK	42.3	39.0	0.1	32.6	-	48.8	73.9	25.1	Floor noise
Hori	20720.000	PK	42.3	36.4	-1.2	32.6	-	44.9	73.9	29.0	Floor noise
Hori	5150.000	AV	38.5	32.2	7.3	31.3	0.1	46.8	53.9	7.1	*1)
Hori	10360.000	AV	39.2	39.5	-1.5	33.2	0.1	44.1	53.9	9.8	
Hori	15540.000	AV	34.6	39.0	0.1	32.6	-	41.1	53.9	12.8	Floor noise
Hori	20720.000	AV	34.0	36.4	-1.2	32.6	-	36.6	53.9	17.3	Floor noise
Vert	5150.000	PK	44.6	32.2	7.3	31.3	-	52.8	68.2	15.4	
Vert	10360.000	PK	48.1	39.5	-1.5	33.2	-	52.9	73.9	21.0	
Vert	15540.000	PK	42.3	39.0	0.1	32.6	-	48.8	73.9	25.1	Floor noise
Vert	20720.000	PK	41.9	36.4	-1.2	32.6	-	44.5	73.9	29.4	Floor noise
Vert	5150.000	AV	33.8	32.2	7.3	31.3	0.1	42.1	53.9	11.8	*1)
Vert	10360.000	AV	39.3	39.5	-1.5	33.2	0.1	44.2	53.9	9.7	
Vert	15540.000	AV	34.4	39.0	0.1	32.6	-	40.9	53.9	13.0	Floor noise
Vert	20720.000	AV	34.4	36.4	-1.2	32.6	-	37.0	53.9	16.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.45\text{ m} / 3.0\text{ m}) = 3.43\text{ dB}$
10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No. 11925908H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date September 5, 2017
Temperature / Humidity 23deg. C / 59 % RH
Engineer Takumi Shimada
Mode Tx 11n-20 5180 MHz

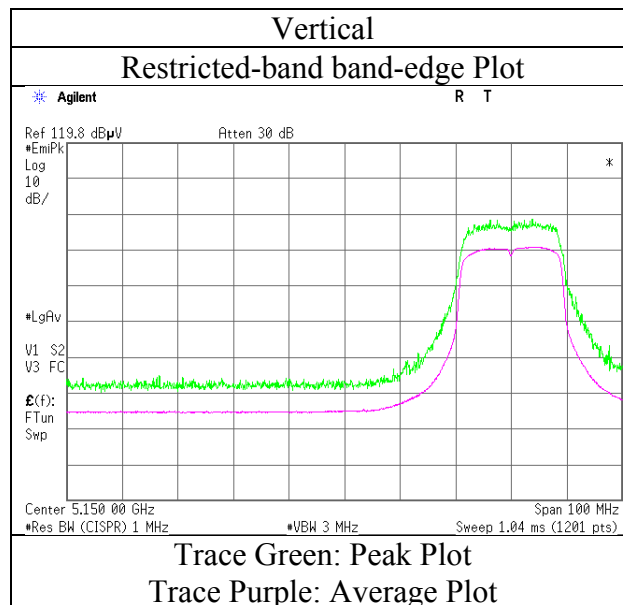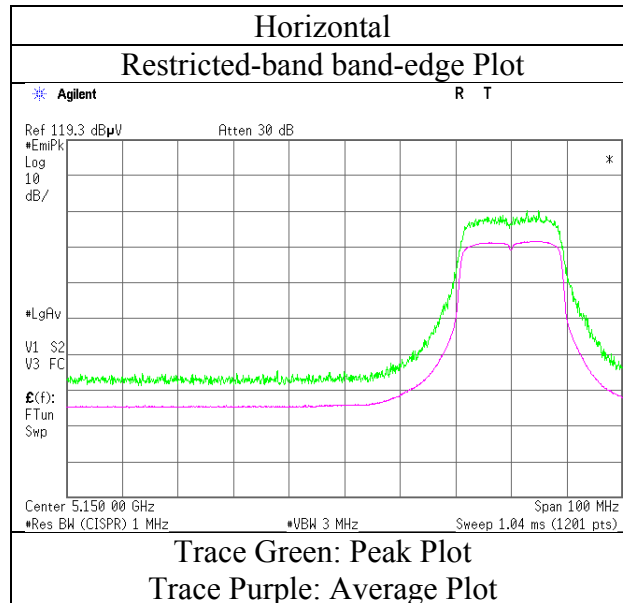

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-20 5240 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	10480.000	PK	55.2	39.7	-1.5	33.2	-	60.2	73.9	13.7	
Hori	15720.000	PK	42.3	38.5	0.3	32.6	-	48.5	73.9	25.4	Floor noise
Hori	20960.000	PK	43.0	36.6	-1.2	32.7	-	45.7	73.9	28.2	Floor noise
Hori	10480.000	AV	45.7	39.7	-1.5	33.2	0.1	50.8	53.9	3.1	
Hori	15720.000	AV	34.7	38.5	0.3	32.6	-	40.9	53.9	13.0	Floor noise
Hori	20960.000	AV	34.0	36.6	-1.2	32.7	-	36.7	53.9	17.2	Floor noise
Vert	10480.000	PK	53.7	39.7	-1.5	33.2	-	58.7	73.9	15.2	
Vert	15720.000	PK	42.5	38.5	0.3	32.6	-	48.7	73.9	25.2	Floor noise
Vert	20960.000	PK	43.2	36.6	-1.2	32.7	-	45.9	73.9	28.0	Floor noise
Vert	10480.000	AV	44.5	39.7	-1.5	33.2	0.1	49.6	53.9	4.3	
Vert	15720.000	AV	34.8	38.5	0.3	32.6	-	41.0	53.9	12.9	Floor noise
Vert	20960.000	AV	34.0	36.6	-1.2	32.7	-	36.7	53.9	17.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	11925908H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-20 5320 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5350.000	PK	50.7	32.1	7.4	31.3	-	58.9	68.2	9.3	
Hori	10640.000	PK	54.0	39.9	-1.5	33.2	-	59.2	73.9	14.7	
Hori	15960.000	PK	43.1	37.8	0.3	32.6	-	48.6	73.9	25.3	Floor noise
Hori	21280.000	PK	42.1	36.8	-1.1	32.6	-	45.2	73.9	28.7	Floor noise
Hori	5350.000	AV	38.2	32.1	7.4	31.3	0.1	46.5	53.9	7.4	*1)
Hori	10640.000	AV	44.7	39.9	-1.5	33.2	0.1	50.0	53.9	3.9	
Hori	15960.000	AV	35.9	37.8	0.3	32.6	-	41.4	53.9	12.5	Floor noise
Hori	21280.000	AV	34.2	36.8	-1.1	32.6	-	37.3	53.9	16.6	Floor noise
Vert	5350.000	PK	48.0	32.1	7.4	31.3	-	56.2	68.2	12.0	
Vert	10640.000	PK	55.2	39.9	-1.5	33.2	-	60.4	73.9	13.5	
Vert	15960.000	PK	42.5	37.8	0.3	32.6	-	48.0	73.9	25.9	Floor noise
Vert	21280.000	PK	42.9	36.8	-1.1	32.6	-	46.0	73.9	27.9	Floor noise
Vert	5350.000	AV	37.3	32.1	7.4	31.3	0.1	45.6	53.9	8.3	*1)
Vert	10640.000	AV	46.7	39.9	-1.5	33.2	0.1	52.0	53.9	1.9	
Vert	15960.000	AV	35.1	37.8	0.3	32.6	-	40.6	53.9	13.3	Floor noise
Vert	21280.000	AV	33.9	36.8	-1.1	32.6	-	37.0	53.9	16.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.45\text{ m} / 3.0\text{ m}) = 3.43\text{ dB}$
10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No. 11925908H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date September 5, 2017
Temperature / Humidity 23deg. C / 59 % RH
Engineer Takumi Shimada
Mode Tx 11n-20 5320 MHz

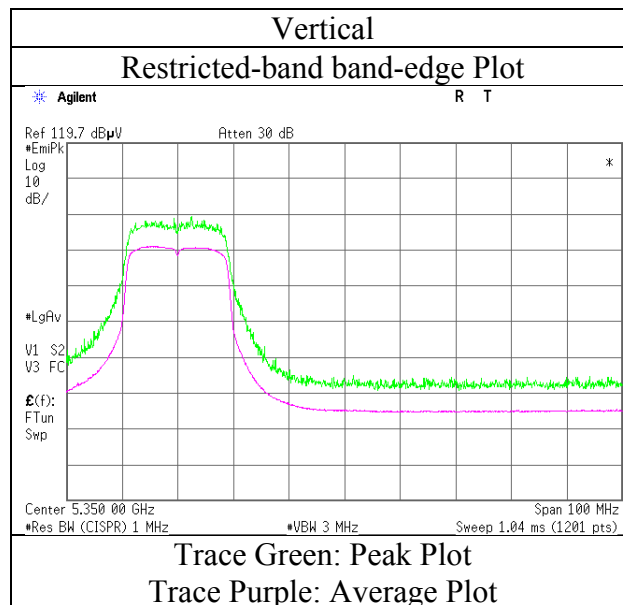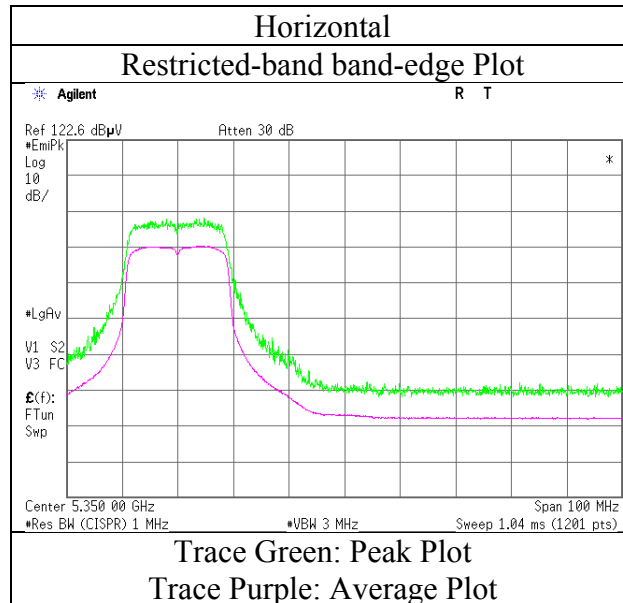

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No. 3	No. 3	No. 3
Date	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 40 GHz
Mode	Tx 11n-20 5500 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5460.000	PK	45.9	32.0	7.5	31.3	-	54.1	73.9	19.8	
Hori	5470.000	PK	53.6	32.0	7.5	31.3	-	61.8	73.9	12.1	
Hori	11000.000	PK	52.8	40.5	-1.4	33.3	-	58.6	73.9	15.3	
Hori	16500.000	PK	43.1	39.3	0.3	32.6	-	50.1	73.9	23.8	Floor noise
Hori	22000.000	PK	42.0	37.3	-0.9	32.5	-	45.9	73.9	28.0	Floor noise
Hori	5460.000	AV	35.2	32.0	7.5	31.3	0.1	43.5	53.9	10.4	*1)
Hori	5470.000	AV	39.4	32.0	7.5	31.3	0.1	47.7	53.9	6.2	*1)
Hori	11000.000	AV	45.0	40.5	-1.4	33.3	0.1	50.9	53.9	3.0	
Hori	16500.000	AV	34.9	39.3	0.3	32.6	-	41.9	53.9	12.0	Floor noise
Hori	22000.000	AV	33.8	37.3	-0.9	32.5	-	37.7	53.9	16.2	Floor noise
Vert	5460.000	PK	46.4	32.0	7.5	31.3	-	54.6	73.9	19.3	
Vert	5470.000	PK	51.6	32.0	7.5	31.3	-	59.8	73.9	14.1	
Vert	11000.000	PK	50.6	40.5	-1.4	33.3	-	56.4	73.9	17.5	
Vert	16500.000	PK	43.0	39.3	0.3	32.6	-	50.0	73.9	23.9	Floor noise
Vert	22000.000	PK	42.2	37.3	-0.9	32.5	-	46.1	73.9	27.8	Floor noise
Vert	5460.000	AV	37.2	32.0	7.5	31.3	0.1	45.5	53.9	8.4	*1)
Vert	5470.000	AV	41.4	32.0	7.5	31.3	0.1	49.7	53.9	4.2	*1)
Vert	11000.000	AV	42.7	40.5	-1.4	33.3	0.1	48.6	53.9	5.3	
Vert	16500.000	AV	34.8	39.3	0.3	32.6	-	41.8	53.9	12.1	Floor noise
Vert	22000.000	AV	33.9	37.3	-0.9	32.5	-	37.8	53.9	16.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.45\text{ m} / 3.0\text{ m}) = 3.43\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	11925908H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	September 5, 2017
Temperature / Humidity	23deg. C / 59 % RH
Engineer	Takumi Shimada
Mode	Tx 11n-20 5500 MHz

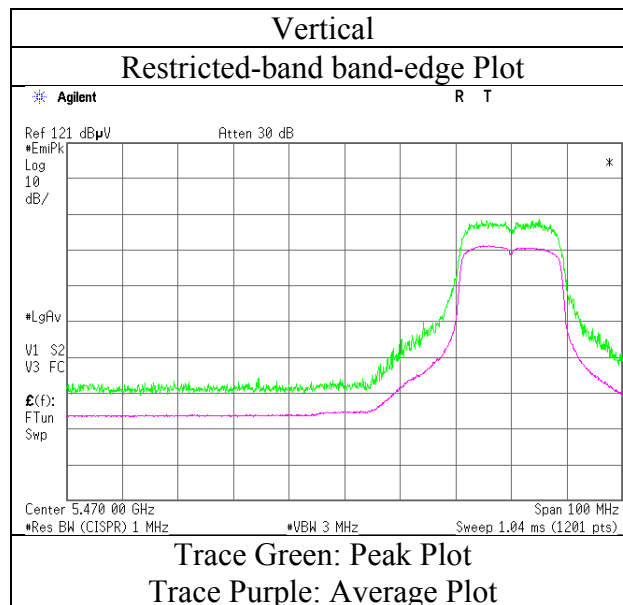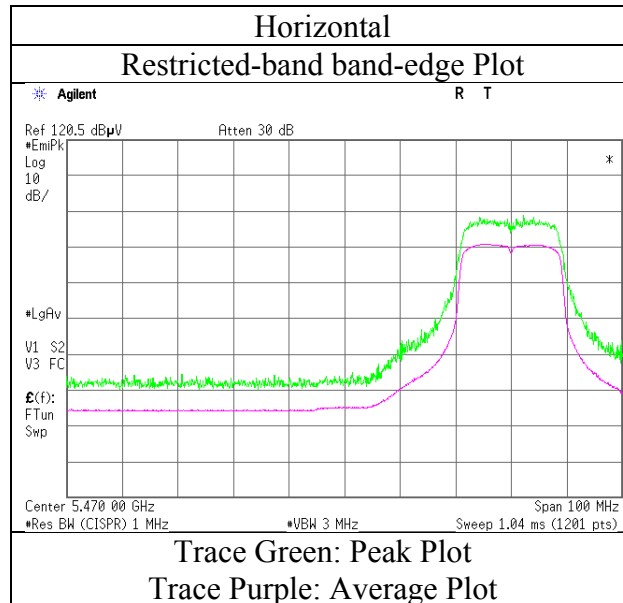

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 40 GHz
Mode	Tx 11n-20 5580 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	11160.000	PK	52.6	40.4	-1.4	33.3	-	58.3	73.9	15.6	
Hori	16740.000	PK	44.5	40.0	0.3	32.6	-	52.2	73.9	21.7	Floor noise
Hori	22320.000	PK	41.9	37.6	-0.8	32.3	-	46.4	73.9	27.5	Floor noise
Hori	11160.000	AV	43.7	40.4	-1.4	33.3	0.1	49.5	53.9	4.4	
Hori	16740.000	AV	35.3	40.0	0.3	32.6	-	43.0	53.9	10.9	Floor noise
Hori	22320.000	AV	33.5	37.6	-0.8	32.3	-	38.0	53.9	15.9	Floor noise
Vert	11160.000	PK	52.3	40.4	-1.4	33.3	-	58.0	73.9	15.9	
Vert	16740.000	PK	43.9	40.0	0.3	32.6	-	51.6	73.9	22.3	Floor noise
Vert	22320.000	PK	41.9	37.6	-0.8	32.3	-	46.4	73.9	27.5	Floor noise
Vert	11160.000	AV	43.9	40.4	-1.4	33.3	0.1	49.7	53.9	4.2	
Vert	16740.000	AV	34.8	40.0	0.3	32.6	-	42.5	53.9	11.4	Floor noise
Vert	22320.000	AV	33.7	37.6	-0.8	32.3	-	38.2	53.9	15.7	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	11925908H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 40 GHz
Mode	Tx 11n-20 5700 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5725.000	PK	53.8	32.3	7.6	31.4	-	62.3	73.9	11.6	
Hori	11400.000	PK	49.8	40.1	-1.3	33.3	-	55.3	73.9	18.6	
Hori	17100.000	PK	43.1	41.4	0.3	32.5	-	52.3	73.9	21.6	Floor noise
Hori	22800.000	PK	42.2	37.9	-0.7	32.1	-	47.3	73.9	26.6	Floor noise
Hori	5725.000	AV	41.9	32.3	7.6	31.4	0.1	50.5	53.9	3.4	*1)
Hori	11400.000	AV	42.2	40.1	-1.3	33.3	0.1	47.8	53.9	6.1	
Hori	17100.000	AV	34.8	41.4	0.3	32.5	-	44.0	53.9	9.9	Floor noise
Hori	22800.000	AV	34.1	37.9	-0.7	32.1	-	39.2	53.9	14.7	Floor noise
Vert	5725.000	PK	54.9	32.3	7.6	31.4	-	63.4	73.9	10.5	
Vert	11400.000	PK	51.8	40.1	-1.3	33.3	-	57.3	73.9	16.6	
Vert	17100.000	PK	44.7	41.4	0.3	32.5	-	53.9	73.9	20.0	Floor noise
Vert	22800.000	PK	43.1	37.9	-0.7	32.1	-	48.2	73.9	25.7	Floor noise
Vert	5725.000	AV	42.8	32.3	7.6	31.4	0.1	51.4	53.9	2.5	*1)
Vert	11400.000	AV	43.3	40.1	-1.3	33.3	0.1	48.9	53.9	5.0	
Vert	17100.000	AV	35.1	41.4	0.3	32.5	-	44.3	53.9	9.6	Floor noise
Vert	22800.000	AV	34.0	37.9	-0.7	32.1	-	39.1	53.9	14.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.45\text{ m} / 3.0\text{ m}) = 3.43\text{ dB}$
 10 GHz - 40 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	11925908H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	September 5, 2017
Temperature / Humidity	23deg. C / 59 % RH
Engineer	Takumi Shimada
Mode	Tx 11n-20 5700 MHz

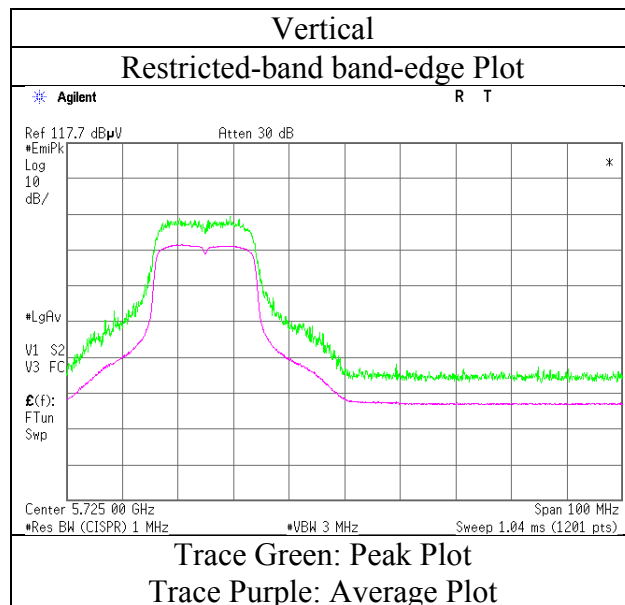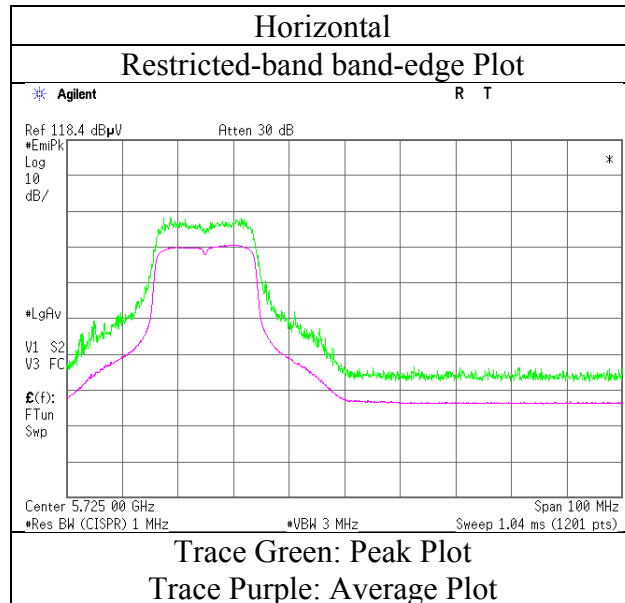

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-20 5745 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5650.000	PK	41.9	32.2	7.6	31.4	-	50.3	68.2	17.9	
Hori	5700.000	PK	43.2	32.3	7.6	31.4	-	51.7	105.2	53.5	
Hori	5715.000	PK	49.0	32.3	7.6	31.4	-	57.5	109.4	51.9	
Hori	5720.000	PK	52.5	32.3	7.6	31.4	-	61.0	110.8	49.8	
Hori	5725.000	PK	61.9	32.3	7.6	31.4	-	70.4	122.2	51.8	
Hori	11490.000	PK	49.2	40.1	-1.2	33.3	-	54.8	73.9	19.1	
Hori	17235.000	PK	43.2	42.2	0.2	32.5	-	53.1	73.9	20.8	Floor noise
Hori	22980.000	PK	43.8	38.1	-0.7	32.0	-	49.2	73.9	24.7	Floor noise
Hori	11490.000	AV	40.0	40.1	-1.2	33.3	0.2	45.8	53.9	8.1	
Hori	17235.000	AV	35.0	42.2	0.2	32.5	-	44.9	53.9	9.0	Floor noise
Hori	22980.000	AV	34.4	38.1	-0.7	32.0	-	39.8	53.9	14.1	Floor noise
Vert	5650.000	PK	40.4	32.2	7.6	31.4	-	48.8	68.2	19.4	
Vert	5700.000	PK	40.8	32.3	7.6	31.4	-	49.3	105.2	55.9	
Vert	5715.000	PK	47.5	32.3	7.6	31.4	-	56.0	109.4	53.4	
Vert	5720.000	PK	51.6	32.3	7.6	31.4	-	60.1	110.8	50.7	
Vert	5725.000	PK	63.5	32.3	7.6	31.4	-	72.0	122.2	50.2	
Vert	11490.000	PK	49.8	40.1	-1.2	33.3	-	55.4	73.9	18.5	
Vert	17235.000	PK	43.0	42.2	0.2	32.5	-	52.9	73.9	21.0	Floor noise
Vert	22980.000	PK	42.5	38.1	-0.7	32.0	-	47.9	73.9	26.0	Floor noise
Vert	11490.000	AV	40.2	40.1	-1.2	33.3	0.2	46.0	53.9	7.9	
Vert	17235.000	AV	34.6	42.2	0.2	32.5	-	44.5	53.9	9.4	Floor noise
Vert	22980.000	AV	34.4	38.1	-0.7	32.0	-	39.8	53.9	14.1	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	11925908H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	September 5, 2017
Temperature / Humidity	23deg. C / 59 % RH
Engineer	Takumi Shimada
Mode	Tx 11n-20 5745 MHz

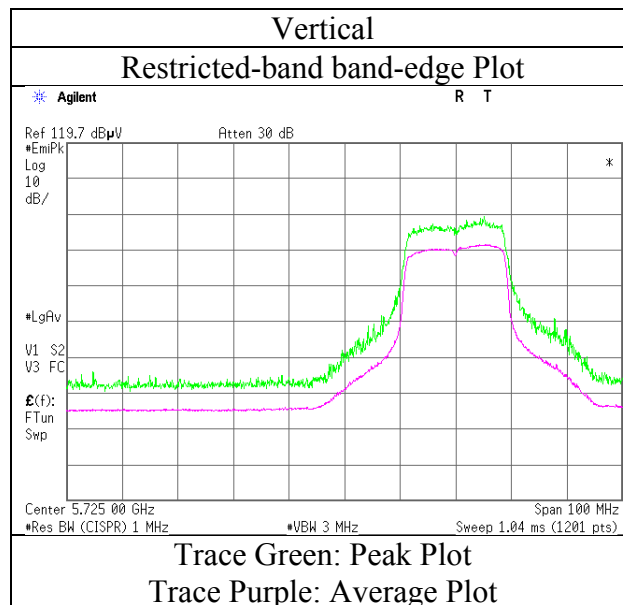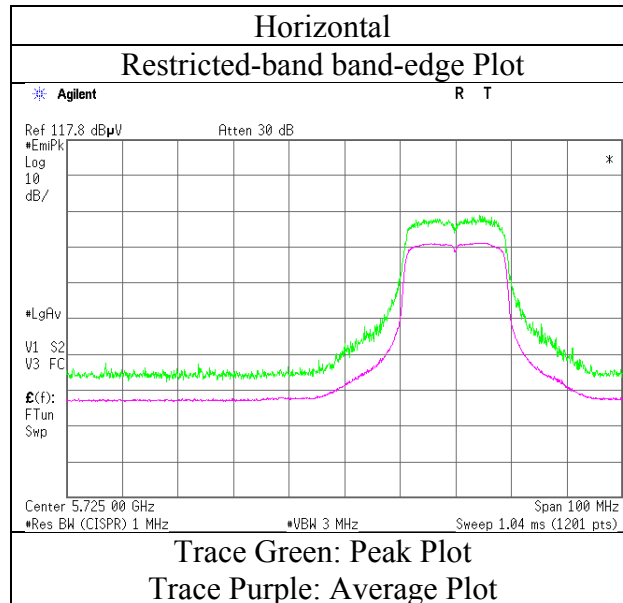

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-20 5785 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	11570.000	PK	51.1	40.0	-1.1	33.3	-	56.7	73.9	17.2	
Hori	17355.000	PK	43.1	42.9	0.3	32.5	-	53.8	73.9	20.1	Floor noise
Hori	23140.000	PK	42.6	38.1	-0.6	32.0	-	48.1	73.9	25.8	Floor noise
Hori	11570.000	AV	41.8	40.0	-1.1	33.3	0.2	47.6	53.9	6.3	
Hori	17355.000	AV	34.3	42.9	0.3	32.5	-	45.0	53.9	8.9	Floor noise
Hori	23140.000	AV	34.3	38.1	-0.6	32.0	-	39.8	53.9	14.1	Floor noise
Vert	11570.000	PK	49.1	40.0	-1.1	33.3	-	54.7	73.9	19.2	
Vert	17355.000	PK	43.4	42.9	0.3	32.5	-	54.1	73.9	19.8	Floor noise
Vert	23140.000	PK	42.8	38.1	-0.6	32.0	-	48.3	73.9	25.6	Floor noise
Vert	11570.000	AV	41.0	40.0	-1.1	33.3	0.2	46.8	53.9	7.1	
Vert	17355.000	AV	34.7	42.9	0.3	32.5	-	45.4	53.9	8.5	Floor noise
Vert	23140.000	AV	34.3	38.1	-0.6	32.0	-	39.8	53.9	14.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.45 \text{ m} / 3.0 \text{ m}) = 3.43 \text{ dB}$
 10 GHz - 40 GHz $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-20 5825 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5850.000	PK	55.3	32.5	7.6	31.4	-	64.0	122.2	58.2	
Hori	5855.000	PK	49.3	32.5	7.6	31.4	-	58.0	110.8	52.8	
Hori	5860.000	PK	45.5	32.5	7.6	31.4	-	54.2	109.4	55.2	
Hori	5875.000	PK	42.2	32.5	7.6	31.4	-	50.9	105.2	54.3	
Hori	5925.000	PK	41.6	32.6	7.7	31.4	-	50.5	68.2	17.7	
Hori	11650.000	PK	49.3	39.9	-1.1	33.3	-	54.8	73.9	19.1	
Hori	17475.000	PK	43.3	43.6	0.3	32.5	-	54.7	73.9	19.2	Floor noise
Hori	23300.000	PK	43.3	38.2	-0.6	31.9	-	49.0	73.9	24.9	Floor noise
Hori	11650.000	AV	40.8	39.9	-1.1	33.3	0.2	46.5	53.9	7.4	
Hori	17475.000	AV	34.7	43.6	0.3	32.5	-	46.1	53.9	7.8	Floor noise
Hori	23300.000	AV	34.6	38.2	-0.6	31.9	-	40.3	53.9	13.6	Floor noise
Vert	5850.000	PK	49.5	32.5	7.6	31.4	-	58.2	122.2	64.0	
Vert	5855.000	PK	44.5	32.5	7.6	31.4	-	53.2	110.8	57.6	
Vert	5860.000	PK	43.1	32.5	7.6	31.4	-	51.8	109.4	57.6	
Vert	5875.000	PK	40.3	32.5	7.6	31.4	-	49.0	105.2	56.2	
Vert	5925.000	PK	41.0	32.6	7.7	31.4	-	49.9	68.2	18.3	
Vert	11650.000	PK	49.7	39.9	-1.1	33.3	-	55.2	73.9	18.7	
Vert	17475.000	PK	43.4	43.6	0.3	32.5	-	54.8	73.9	19.1	Floor noise
Vert	23300.000	PK	43.2	38.2	-0.6	31.9	-	48.9	73.9	25.0	Floor noise
Vert	11650.000	AV	41.0	39.9	-1.1	33.3	0.2	46.7	53.9	7.2	
Vert	17475.000	AV	34.6	43.6	0.3	32.5	-	46.0	53.9	7.9	Floor noise
Vert	23300.000	AV	34.8	38.2	-0.6	31.9	-	40.5	53.9	13.4	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	11925908H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	September 5, 2017
Temperature / Humidity	23deg. C / 59 % RH
Engineer	Takumi Shimada
Mode	Tx 11n-20 5825 MHz

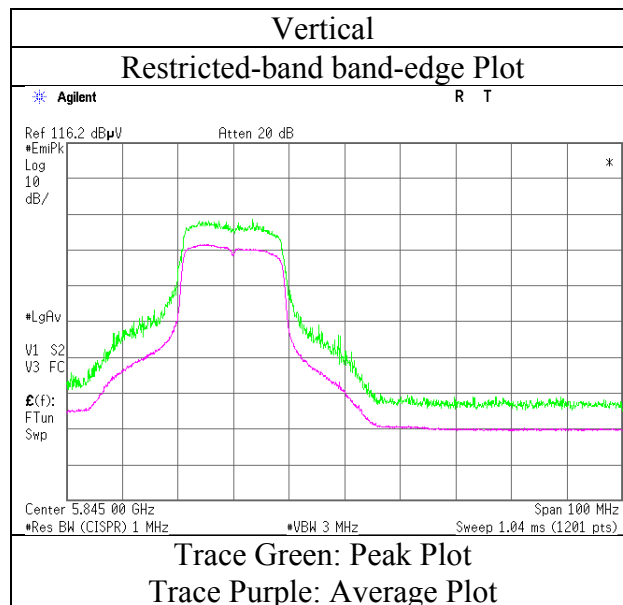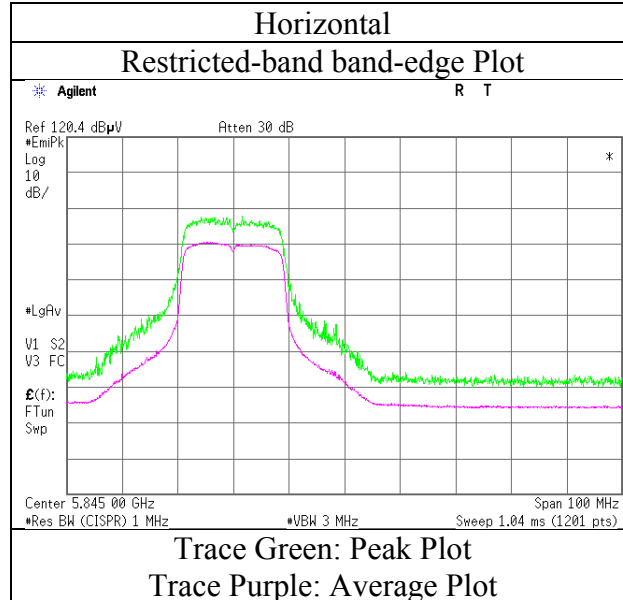

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	24deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-40 5190 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5150.000	PK	50.8	32.2	7.3	31.3	-	59.0	68.2	9.2	
Hori	10380.000	PK	43.8	39.5	-1.5	33.2	-	48.6	73.9	25.3	Floor noise
Hori	15570.000	PK	42.1	38.9	0.1	32.6	-	48.5	73.9	25.4	Floor noise
Hori	20760.000	PK	42.3	36.4	-1.2	32.6	-	44.9	73.9	29.0	Floor noise
Hori	5150.000	AV	36.1	32.2	7.3	31.3	0.4	44.7	53.9	9.2	*1)
Hori	10380.000	AV	35.1	39.5	-1.5	33.2	-	39.9	53.9	14.0	Floor noise
Hori	15570.000	AV	34.6	38.9	0.1	32.6	-	41.0	53.9	12.9	Floor noise
Hori	20760.000	AV	33.5	36.4	-1.2	32.6	-	36.1	53.9	17.8	Floor noise
Vert	5150.000	PK	45.2	32.2	7.3	31.3	-	53.4	68.2	14.8	
Vert	10380.000	PK	43.3	39.5	-1.5	33.2	-	48.1	73.9	25.8	Floor noise
Vert	15570.000	PK	42.2	38.9	0.1	32.6	-	48.6	73.9	25.3	Floor noise
Vert	20760.000	PK	41.4	36.4	-1.2	32.6	-	44.0	73.9	29.9	Floor noise
Vert	5150.000	AV	34.9	32.2	7.3	31.3	0.4	43.5	53.9	10.4	*1)
Vert	10380.000	AV	35.4	39.5	-1.5	33.2	-	40.2	53.9	13.7	Floor noise
Vert	15570.000	AV	34.6	38.9	0.1	32.6	-	41.0	53.9	12.9	Floor noise
Vert	20760.000	AV	33.4	36.4	-1.2	32.6	-	36.0	53.9	17.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No. 11925908H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date September 5, 2017
Temperature / Humidity 24deg. C / 59 % RH
Engineer Takumi Shimada
Mode Tx 11n-40 5190 MHz

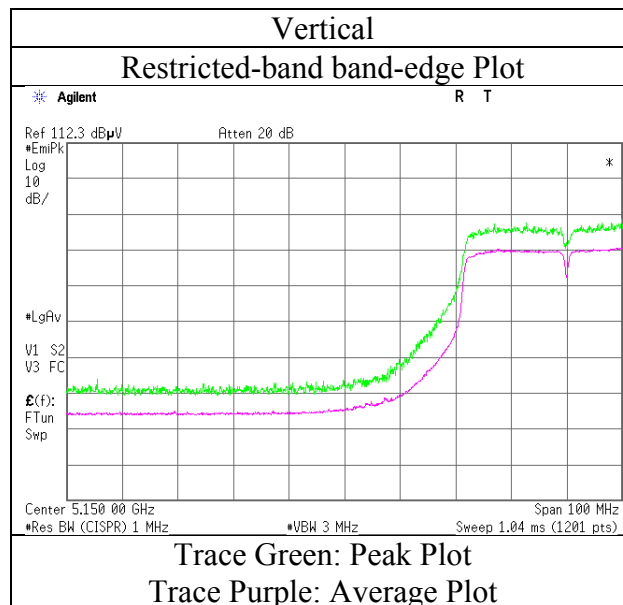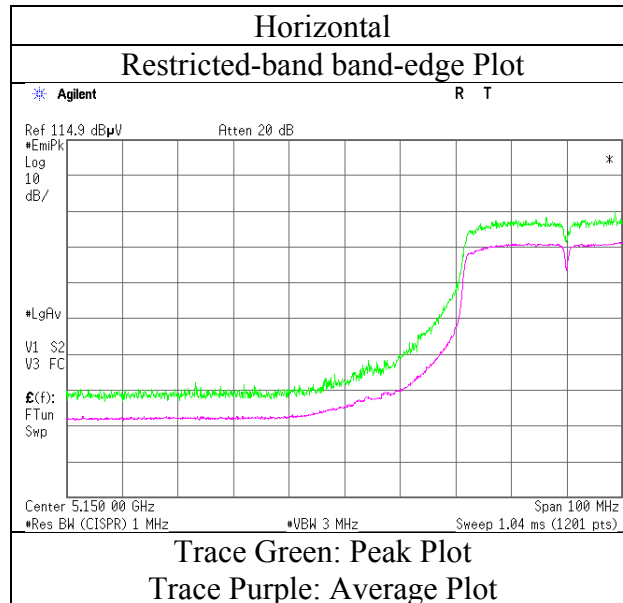

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	24deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-40 5230 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	10460.000	PK	54.1	39.6	-1.5	33.2	-	59.0	73.9	14.9	
Hori	15690.000	PK	43.2	38.6	0.1	32.6	-	49.3	73.9	24.6	Floor noise
Hori	20920.000	PK	41.4	36.6	-1.2	32.7	-	44.1	73.9	29.8	Floor noise
Hori	10460.000	AV	44.8	39.6	-1.5	33.2	0.4	50.1	53.9	3.8	
Hori	15690.000	AV	34.8	38.6	0.1	32.6	-	40.9	53.9	13.0	Floor noise
Hori	20920.000	AV	33.4	36.6	-1.2	32.7	-	36.1	53.9	17.8	Floor noise
Vert	10460.000	PK	54.2	39.6	-1.5	33.2	-	59.1	73.9	14.8	
Vert	15690.000	PK	43.0	38.6	0.1	32.6	-	49.1	73.9	24.8	Floor noise
Vert	20920.000	PK	41.5	36.6	-1.2	32.7	-	44.2	73.9	29.7	Floor noise
Vert	10460.000	AV	44.2	39.6	-1.5	33.2	0.4	49.5	53.9	4.4	
Vert	15690.000	AV	34.9	38.6	0.1	32.6	-	41.0	53.9	12.9	Floor noise
Vert	20920.000	AV	33.4	36.6	-1.2	32.7	-	36.1	53.9	17.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	24deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-40 5310 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5350.000	PK	50.2	32.1	7.4	31.3	-	58.4	68.2	9.8	
Hori	10620.000	PK	48.2	39.9	-1.5	33.2	-	53.4	73.9	20.5	
Hori	15930.000	PK	42.9	37.9	0.3	32.6	-	48.5	73.9	25.4	Floor noise
Hori	21240.000	PK	42.6	36.8	-1.1	32.6	-	45.7	73.9	28.2	Floor noise
Hori	5350.000	AV	37.4	32.1	7.4	31.3	0.4	46.0	53.9	7.9	*1)
Hori	10620.000	AV	40.5	39.9	-1.5	33.2	0.4	46.1	53.9	7.8	
Hori	15930.000	AV	34.6	37.9	0.3	32.6	-	40.2	53.9	13.7	Floor noise
Hori	21240.000	AV	34.2	36.8	-1.1	32.6	-	37.3	53.9	16.6	Floor noise
Vert	5350.000	PK	48.8	32.1	7.4	31.3	-	57.0	68.2	11.2	
Vert	10620.000	PK	49.8	39.9	-1.5	33.2	-	55.0	73.9	18.9	
Vert	15930.000	PK	43.6	37.9	0.3	32.6	-	49.2	73.9	24.7	Floor noise
Vert	21240.000	PK	42.8	36.8	-1.1	32.6	-	45.9	73.9	28.0	Floor noise
Vert	5350.000	AV	36.9	32.1	7.4	31.3	0.4	45.5	53.9	8.4	*1)
Vert	10620.000	AV	41.3	39.9	-1.5	33.2	0.4	46.9	53.9	7.0	
Vert	15930.000	AV	34.7	37.9	0.3	32.6	-	40.3	53.9	13.6	Floor noise
Vert	21240.000	AV	34.4	36.8	-1.1	32.6	-	37.5	53.9	16.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	11925908H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	September 5, 2017
Temperature / Humidity	24deg. C / 59 % RH
Engineer	Takumi Shimada
Mode	Tx 11n-40 5310 MHz

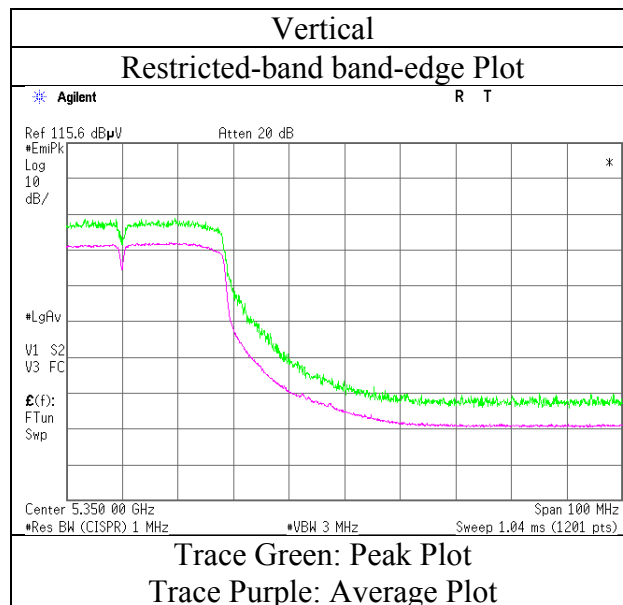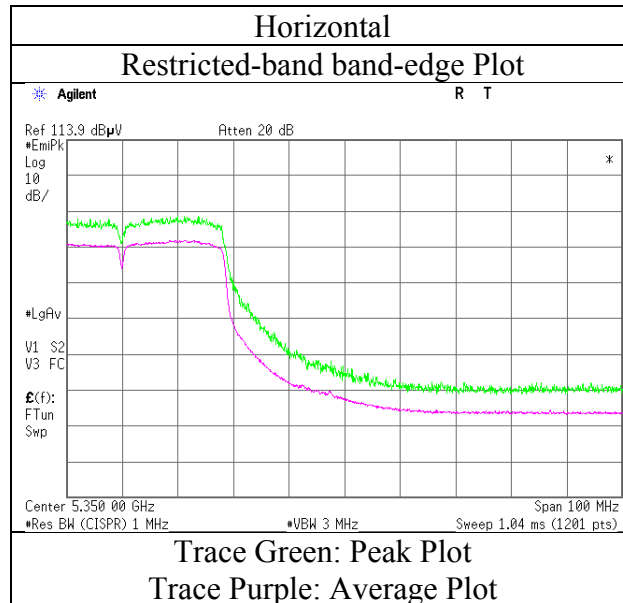

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	24deg. C / 63 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Shuichi Ohyama	Shuichi Ohyama	Takumi Shimada
	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 40 GHz
Mode	Tx 11n-40 5510 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5460.000	PK	44.8	32.0	7.5	31.3	-	53.0	73.9	20.9	
Hori	5470.000	PK	53.7	32.0	7.5	31.3	-	61.9	73.9	12.0	
Hori	11020.000	PK	55.4	40.5	-1.5	33.3	-	61.1	73.9	12.8	
Hori	16530.000	PK	42.8	39.4	0.3	32.6	-	49.9	73.9	24.0	Floor noise
Hori	22040.000	PK	42.5	37.3	-0.9	32.5	-	46.4	73.9	27.5	Floor noise
Hori	5460.000	AV	34.7	32.0	7.5	31.3	0.4	43.3	53.9	10.6	*1)
Hori	5470.000	AV	38.8	32.0	7.5	31.3	0.4	47.4	53.9	6.5	*1)
Hori	11020.000	AV	45.5	40.5	-1.5	33.3	0.4	51.6	53.9	2.3	
Hori	16530.000	AV	34.2	39.4	0.3	32.6	-	41.3	53.9	12.6	Floor noise
Hori	22040.000	AV	33.7	37.3	-0.9	32.5	-	37.6	53.9	16.3	Floor noise
Vert	5460.000	PK	44.7	32.0	7.5	31.3	-	52.9	73.9	21.0	
Vert	5470.000	PK	49.3	32.0	7.5	31.3	-	57.5	73.9	16.4	
Vert	11020.000	PK	54.0	40.5	-1.5	33.3	-	59.7	73.9	14.2	
Vert	16530.000	PK	43.0	39.4	0.3	32.6	-	50.1	73.9	23.8	Floor noise
Vert	22040.000	PK	42.3	37.3	-0.9	32.5	-	46.2	73.9	27.7	Floor noise
Vert	5460.000	AV	35.6	32.0	7.5	31.3	0.4	44.2	53.9	9.7	*1)
Vert	5470.000	AV	38.6	32.0	7.5	31.3	0.4	47.2	53.9	6.7	*1)
Vert	11020.000	AV	45.3	40.5	-1.5	33.3	0.4	51.4	53.9	2.5	
Vert	16530.000	AV	34.1	39.4	0.3	32.6	-	41.2	53.9	12.7	Floor noise
Vert	22040.000	AV	33.7	37.3	-0.9	32.5	-	37.6	53.9	16.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB

10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No. 11925908H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date September 5, 2017
Temperature / Humidity 24deg. C / 63 % RH
Engineer Shuichi Ohyama
Mode Tx 11n-40 5510 MHz

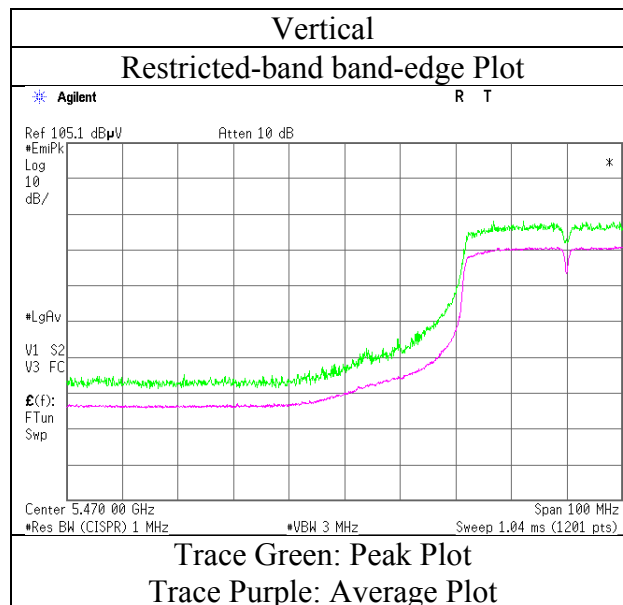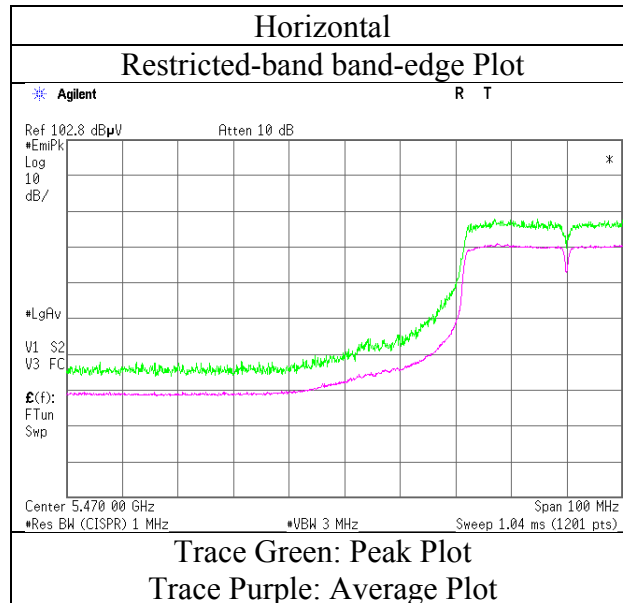

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No.	11925908H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	24deg. C / 63 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Shuichi Ohyama	Shuichi Ohyama	Takumi Shimada
	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 40 GHz
Mode	Tx 11n-40 5550 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	11100.000	PK	56.2	40.4	-1.4	33.3	-	61.9	73.9	12.0	
Hori	16650.000	PK	43.8	39.8	0.3	32.6	-	51.3	73.9	22.6	Floor noise
Hori	22200.000	PK	42.5	37.5	-0.8	32.4	-	46.8	73.9	27.1	Floor noise
Hori	11100.000	AV	46.2	40.4	-1.4	33.3	0.4	52.3	53.9	1.6	
Hori	16650.000	AV	35.2	39.8	0.3	32.6	-	42.7	53.9	11.2	Floor noise
Hori	22200.000	AV	33.9	37.5	-0.8	32.4	-	38.2	53.9	15.7	Floor noise
Vert	11100.000	PK	57.7	40.4	-1.4	33.3	-	63.4	73.9	10.5	
Vert	16650.000	PK	44.2	39.8	0.3	32.6	-	51.7	73.9	22.2	Floor noise
Vert	22200.000	PK	43.1	37.5	-0.8	32.4	-	47.4	73.9	26.5	Floor noise
Vert	11100.000	AV	45.9	40.4	-1.4	33.3	0.4	52.0	53.9	1.9	
Vert	16650.000	AV	35.4	39.8	0.3	32.6	-	42.9	53.9	11.0	Floor noise
Vert	22200.000	AV	34.1	37.5	-0.8	32.4	-	38.4	53.9	15.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	11925908H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	24deg. C / 63 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Shuichi Ohyama	Shuichi Ohyama	Takumi Shimada
	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 40 GHz
Mode	Tx 11n-40 5670 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5725.000	PK	48.1	32.3	7.6	31.4	-	56.6	73.9	17.3	
Hori	11340.000	PK	56.3	40.2	-1.3	33.3	-	61.9	73.9	12.0	
Hori	17010.000	PK	44.7	40.9	0.3	32.6	-	53.3	73.9	20.6	Floor noise
Hori	22680.000	PK	42.9	37.8	-0.7	32.2	-	47.8	73.9	26.1	Floor noise
Hori	5725.000	AV	38.7	32.3	7.6	31.4	0.4	47.6	53.9	6.3	*1)
Hori	11340.000	AV	47.4	40.2	-1.3	33.3	0.4	53.4	53.9	0.5	
Hori	17010.000	AV	35.6	40.9	0.3	32.6	-	44.2	53.9	9.7	Floor noise
Hori	22680.000	AV	34.0	37.8	-0.7	32.2	-	38.9	53.9	15.0	Floor noise
Vert	5725.000	PK	48.1	32.3	7.6	31.4	-	56.6	73.9	17.3	
Vert	11340.000	PK	56.7	40.2	-1.3	33.3	-	62.3	73.9	11.6	
Vert	17010.000	PK	44.9	40.9	0.3	32.6	-	53.5	73.9	20.4	Floor noise
Vert	22680.000	PK	42.6	37.8	-0.7	32.2	-	47.5	73.9	26.4	Floor noise
Vert	5725.000	AV	38.2	32.3	7.6	31.4	0.4	47.1	53.9	6.8	*1)
Vert	11340.000	AV	47.0	40.2	-1.3	33.3	0.4	53.0	53.9	0.9	
Vert	17010.000	AV	35.5	40.9	0.3	32.6	-	44.1	53.9	9.8	Floor noise
Vert	22680.000	AV	33.8	37.8	-0.7	32.2	-	38.7	53.9	15.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission

Report No.	11925908H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	September 5, 2017
Temperature / Humidity	24deg. C / 63 % RH
Engineer	Shuichi Ohyama
Mode	Tx 11n-40 5670 MHz

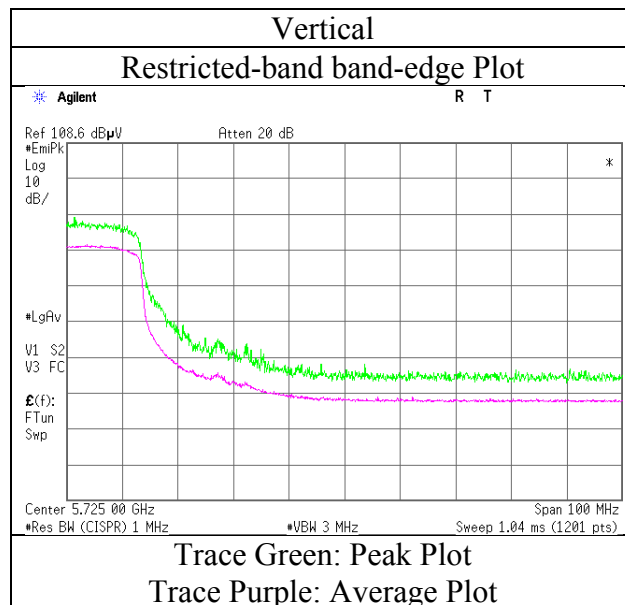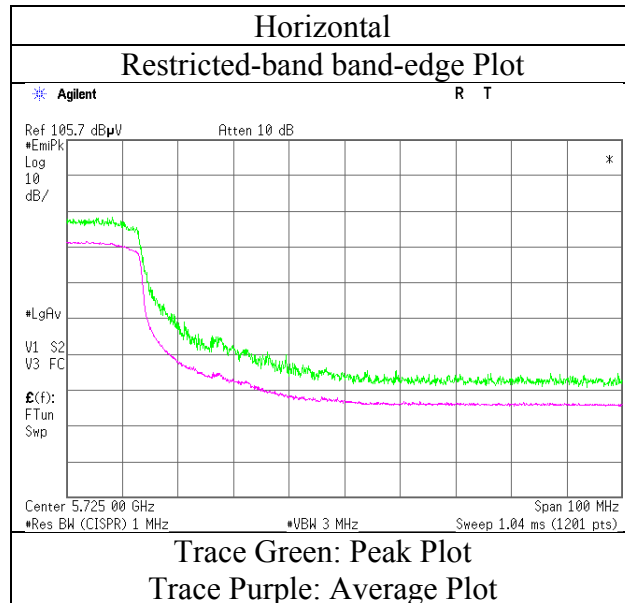

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	24deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-40 5755 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5650.000	PK	42.1	32.2	7.6	31.4	-	50.5	68.2	17.7	
Hori	5700.000	PK	45.2	32.3	7.6	31.4	-	53.7	105.2	51.5	
Hori	5715.000	PK	58.6	32.3	7.6	31.4	-	67.1	109.4	42.3	
Hori	5720.000	PK	59.8	32.3	7.6	31.4	-	68.3	110.8	42.5	
Hori	5725.000	PK	61.9	32.3	7.6	31.4	-	70.4	122.2	51.8	
Hori	11510.000	PK	55.3	40.0	-1.1	33.3	-	60.9	73.9	13.0	
Hori	17265.000	PK	42.5	42.4	0.2	32.5	-	52.6	73.9	21.3	Floor noise
Hori	23200.000	PK	44.0	38.1	-0.6	32.0	-	49.5	73.9	24.4	Floor noise
Hori	11510.000	AV	46.9	40.0	-1.1	33.3	0.4	52.9	53.9	1.0	
Hori	17265.000	AV	35.2	42.4	0.2	32.5	-	45.3	53.9	8.6	Floor noise
Hori	23200.000	AV	34.3	38.1	-0.6	32.0	-	39.8	53.9	14.1	Floor noise
Vert	5650.000	PK	41.2	32.2	7.6	31.4	-	49.6	68.2	18.6	
Vert	5700.000	PK	44.5	32.3	7.6	31.4	-	53.0	105.2	52.2	
Vert	5715.000	PK	58.9	32.3	7.6	31.4	-	67.4	109.4	42.0	
Vert	5720.000	PK	60.3	32.3	7.6	31.4	-	68.8	110.8	42.0	
Vert	5725.000	PK	62.4	32.3	7.6	31.4	-	70.9	122.2	51.3	
Vert	11510.000	PK	55.7	40.0	-1.1	33.3	-	61.3	73.9	12.6	
Vert	17265.000	PK	43.0	42.4	0.2	32.5	-	53.1	73.9	20.8	Floor noise
Vert	23200.000	PK	43.3	38.1	-0.6	32.0	-	48.8	73.9	25.1	Floor noise
Vert	11510.000	AV	47.0	40.0	-1.1	33.3	0.4	53.0	53.9	0.9	
Vert	17265.000	AV	35.3	42.4	0.2	32.5	-	45.4	53.9	8.5	Floor noise
Vert	23200.000	AV	34.3	38.1	-0.6	32.0	-	39.8	53.9	14.1	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No. 11925908H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date September 5, 2017
Temperature / Humidity 24deg. C / 59 % RH
Engineer Takumi Shimada
Mode Tx 11n-40 5755 MHz

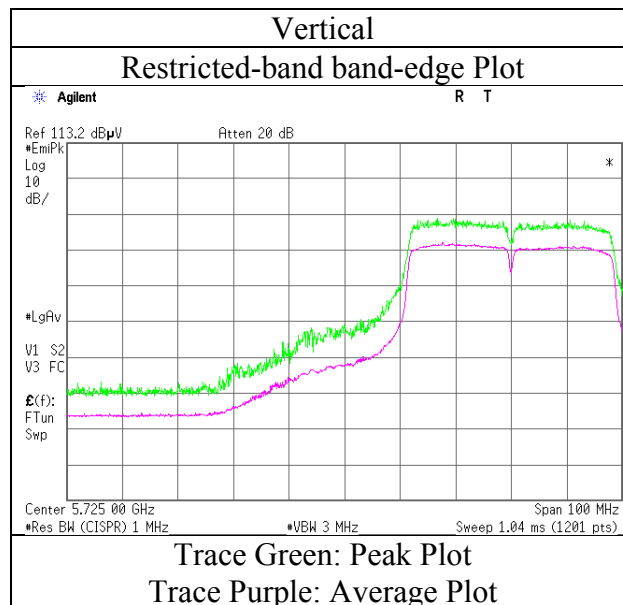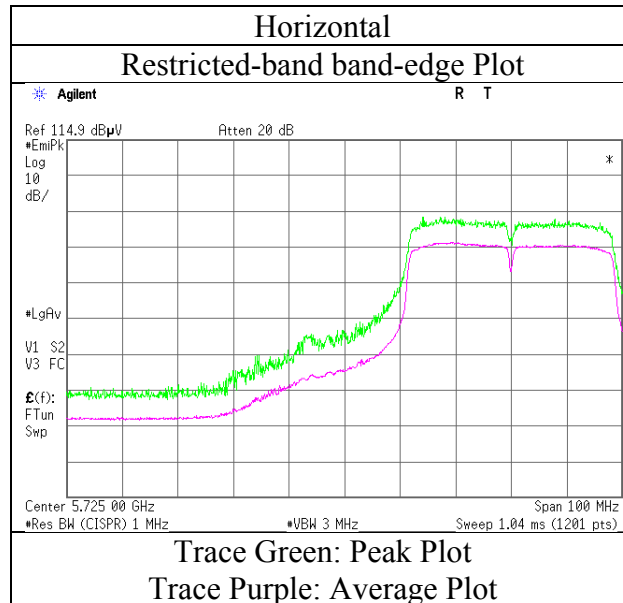

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	11925908H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	24deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	26.5 GHz - 40 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Mode	Tx 11n-40 5795 MHz			

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5850.000	PK	42.2	32.5	7.6	31.4	-	50.9	122.2	71.3	
Hori	5855.000	PK	40.8	32.5	7.6	31.4	-	49.5	110.8	61.3	
Hori	5860.000	PK	42.0	32.5	7.6	31.4	-	50.7	109.4	58.7	
Hori	5875.000	PK	41.5	32.5	7.6	31.4	-	50.2	105.2	55.0	
Hori	5925.000	PK	41.3	32.6	7.7	31.4	-	50.2	68.2	18.0	
Hori	11590.000	PK	54.6	40.0	-1.1	33.3	-	60.2	73.9	13.7	
Hori	17385.000	PK	43.1	43.1	0.2	32.5	-	53.9	73.9	20.0	Floor noise
Hori	23180.000	PK	42.5	38.1	-0.6	32.0	-	48.0	73.9	25.9	Floor noise
Hori	11590.000	AV	46.1	40.0	-1.1	33.3	0.4	52.1	53.9	1.8	
Hori	17385.000	AV	35.4	43.1	0.2	32.5	-	46.2	53.9	7.7	Floor noise
Hori	23180.000	AV	33.9	38.1	-0.6	32.0	-	39.4	53.9	14.5	Floor noise
Vert	5850.000	PK	41.6	32.5	7.6	31.4	-	50.3	122.2	71.9	
Vert	5855.000	PK	43.4	32.5	7.6	31.4	-	52.1	110.8	58.7	
Vert	5860.000	PK	41.1	32.5	7.6	31.4	-	49.8	109.4	59.6	
Vert	5875.000	PK	41.6	32.5	7.6	31.4	-	50.3	105.2	54.9	
Vert	5925.000	PK	40.1	32.6	7.7	31.4	-	49.0	68.2	19.2	
Vert	11590.000	PK	55.0	40.0	-1.1	33.3	-	60.6	73.9	13.3	
Vert	17385.000	PK	42.7	43.1	0.2	32.5	-	53.5	73.9	20.4	Floor noise
Vert	23180.000	PK	42.1	38.1	-0.6	32.0	-	47.6	73.9	26.3	Floor noise
Vert	11590.000	AV	46.0	40.0	-1.1	33.3	0.4	52.0	53.9	1.9	
Vert	17385.000	AV	35.4	43.1	0.2	32.5	-	46.2	53.9	7.7	Floor noise
Vert	23180.000	AV	34.1	38.1	-0.6	32.0	-	39.6	53.9	14.3	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.43 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	11925908H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	September 5, 2017
Temperature / Humidity	24deg. C / 59 % RH
Engineer	Takumi Shimada
Mode	Tx 11n-40 5795 MHz

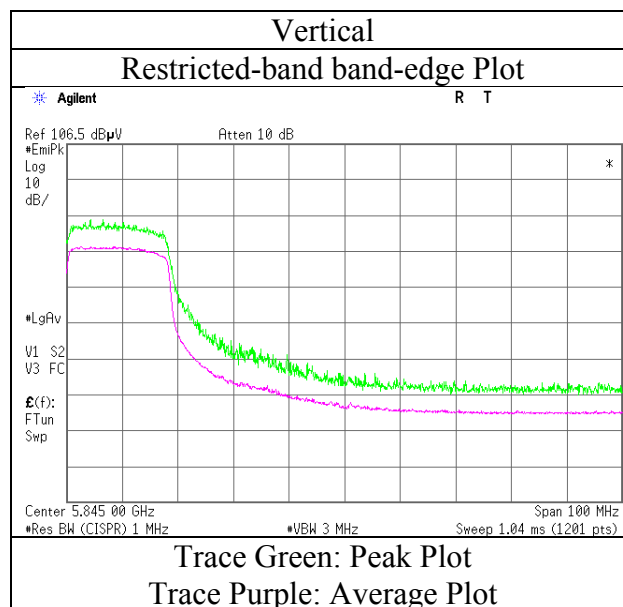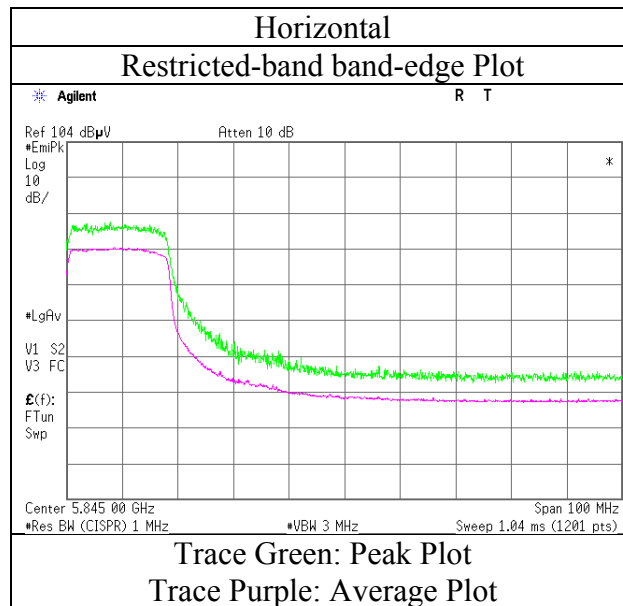

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Plot data, Worst case)

Report No.	11925908H	No.3	No.3	No.3
Test place	Ise EMC Lab.	No.3	No.3	No.3
Semi Anechoic Chamber	No.2	No.3	No.3	No.3
Date	August 30, 2017	September 5, 2017	September 5, 2017	September 6, 2017
Temperature / Humidity	22deg. C / 59 % RH	23deg. C / 59 % RH	24deg. C / 63 % RH	23deg. C / 64 % RH
Engineer	Tomohisa Nakagawa	Takumi Shimada	Shuichi Ohyama	Takumi Shimada
	Below 1 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
	26.5 GHz - 40 GHz			
Mode	Tx 11a 5320 MHz			

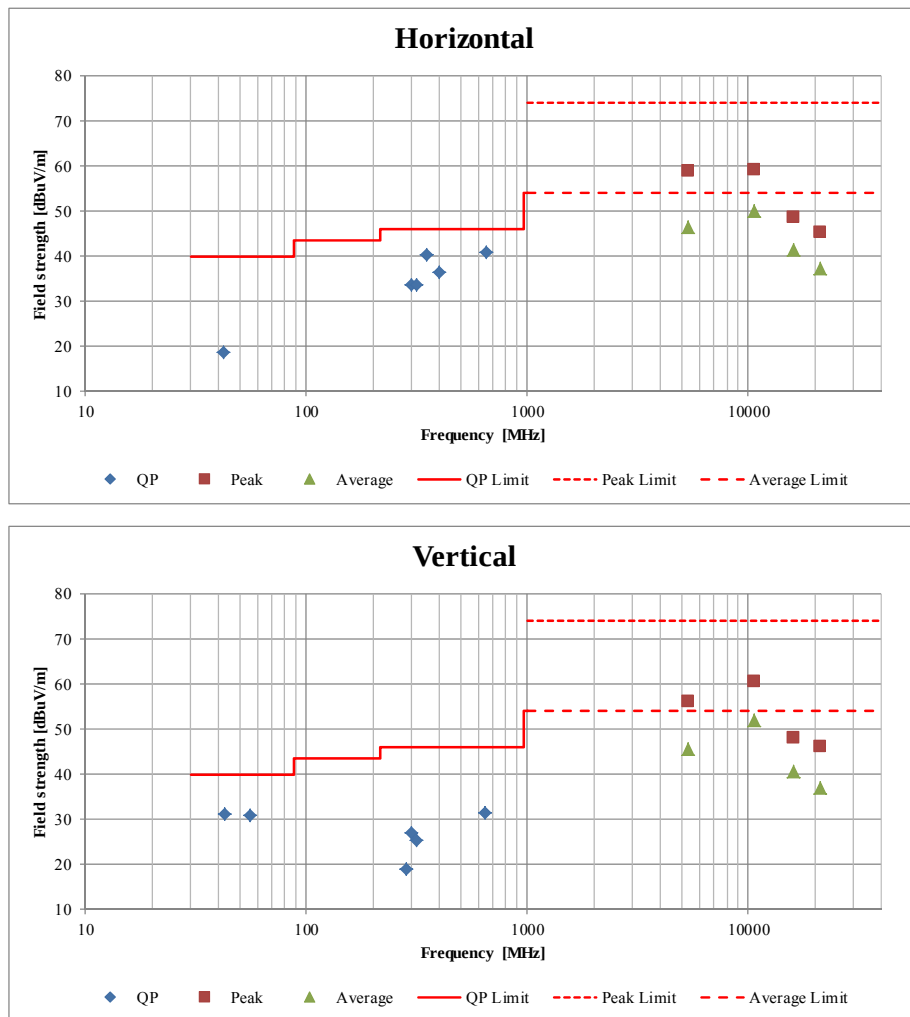

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

APPENDIX 2: Test instruments

Test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2017/08/31 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2016/12/13 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-04	Spectrum Analyzer	Agilent	E4448A	US44300523	RE/AT	2016/11/10 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2017/08/21 * 12
MBA-08	Biconical Antenna	Schwarzbeck	VHA9103B	08031	RE	2016/09/29 * 12
MLA-21	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-190	RE	2017/01/05 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2017/02/24 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2016/11/28 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2016/09/13 * 12
MMM-01	Digital Tester	Fluke	FLUKE 26-3	78030611	RE	2017/08/07 * 12
MHA-29	Horn Antenna 26.5-40GHz	ETS LINDGREN	3160-10	00152399	RE	2016/09/28 * 12
MCC-54	Microwave Cable	Suhner	SUCOFLEX101	2873(1m) / 2876(5m)	RE	2017/03/02 * 12
MPA-22	Pre Amplifier	MITEQ, Inc	AMF-6F-2600400-3 3-8P / AMF-4F-2600400-3 3-8P	1871355 /1871328	RE	2017/09/07 * 12
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2016/10/20 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	1301	RE	2017/01/20 * 12
MJM-16	Measure	KOMELON	KMC-36	-	RE	-
MSA-13	Spectrum Analyzer	Agilent	E4440A	MY46185823	RE	2017/06/21 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2017/05/22 * 12
MCC-167	Microwave Cable	Junkosha	MWX221	1404S374(1m) / 1405S074(5m)	RE	2017/05/29 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2017/03/21 * 12
MMM-08	DIGITAL HiTESTER	Hioki	3805	051201197	RE	2017/01/19 * 12
MHF-22	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCB	602	RE	2017/01/13 * 12
MCC-177	Microwave Cable	Junkosha	MMX221-00500D MSDMS	1502S304	RE	2017/03/13 * 12
MHA-16	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170306	RE	2017/05/14 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE	2017/05/29 * 12
MHA-29	Horn Antenna 26.5-40GHz	ETS LINDGREN	3160-10	00152399	RE	2016/09/28 * 12
MPA-22	Pre Amplifier	MITEQ, Inc	AMF-6F-2600400-3 3-8P / AMF-4F-2600400-3 3-8P	1871355 /1871328	RE	2017/09/07 * 12
MCC-54	Microwave Cable	Suhner	SUCOFLEX101	2873(1m) / 2876(5m)	RE	2017/03/02 * 12
MHF-16	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCA	7001	RE	2016/09/19 * 12
MCC-176	Microwave Cable	Junkosha	MMX221-00500D MSDMS	1502S303	RE	2017/03/13 * 12
MCC-216	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 1608S087(5 m)	RE	2017/08/04 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2017/02/24 * 12
MHA-02	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	RE	2017/02/24 * 12

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: RE: Radiated Emission