

OSCILLOSCOPE PRESENTATION


ADI, DMR-Zoneva

1999-OCT-14, 11:39, THR

POWER: HIGH

MODULATION: Ref Gen=12.5 kHz Deviation

REMARK: CARRIER ON TIME

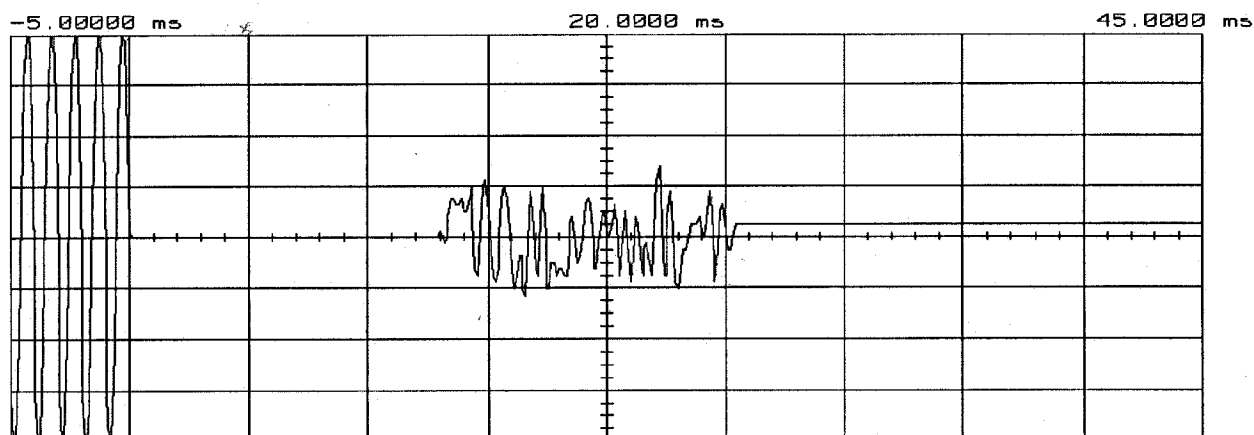

Main	Timebase 5.00 ms/div	Delay/Pos 20.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.00000 V	Probe 1.000 :1	Coupling dc (1M ohm)
Trigger mode : Edge				
On Negative Edge Of Chan2				
Trigger Level				
Chan2 = -6.250 mV (noise reject ON)				
Holdoff = 40.000 ns				

OSCILLOSCOPE PRESENTATION


ADI, DMR-Zoneva

1999-OCT-14, 11:40, THR

POWER: HIGH

MODULATION: Ref Gen=12.5 kHz Deviation

REMARK: CARRIER ON TIME

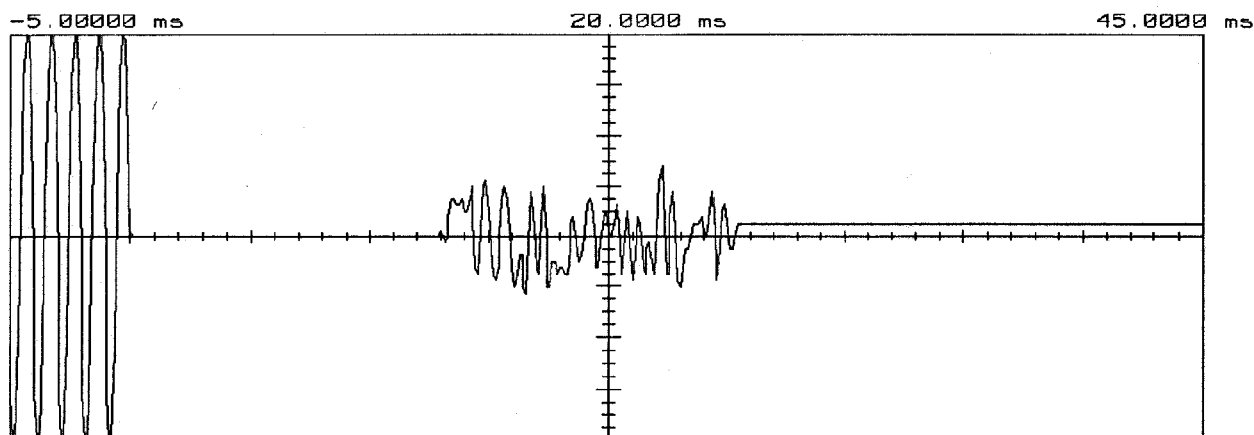

Main	Timebase 5.00 ms/div	Delay/Pos 20.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.00000 V	Probe 1.000 :1	Coupling dc (1M ohm)
Trigger mode : Edge				
On Negative Edge Of Chan2				
Trigger Level				
Chan2 = -6.250 mV (noise reject ON)				
Holdoff = 40.000 ns				

OSCILLOSCOPE PRESENTATION


ADI, DMR-Zoneva

1999-OCT-14, 11:39, THR

POWER: HIGH

MODULATION: Ref Gen=12.5 kHz Deviation

REMARK: CARRIER ON TIME

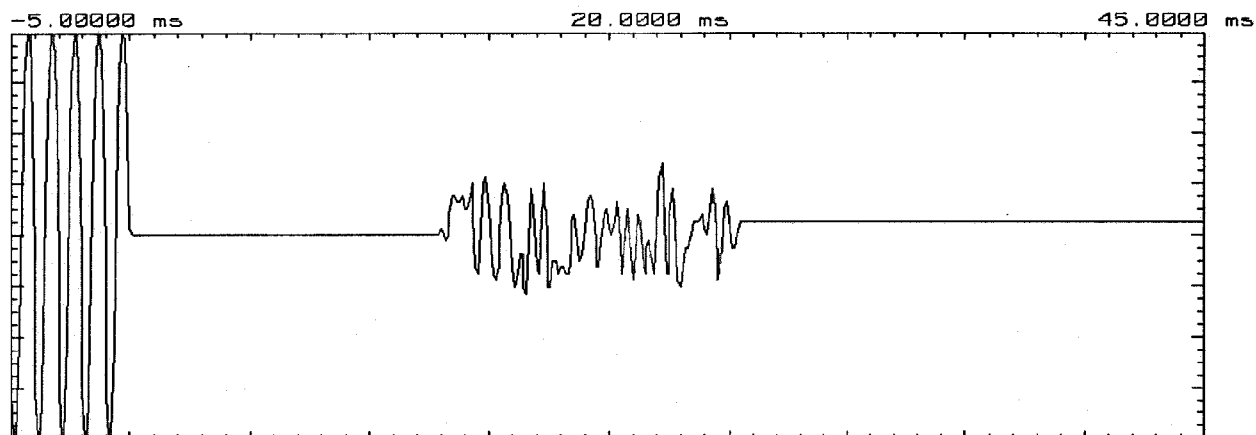

Main	Timebase	Delay/Pos	Reference	Mode
	5.00 ms/div	20.0000 ms	Center	Repetitive
Channel 1	Sensitivity	Offset	Probe	Coupling
	275 mV/div	0.00000 V	1.000 :1	dc (1M ohm)

Trigger mode : Edge
 On Negative Edge Of Chan2
 Trigger Level
 Chan2 = -6.250 mV (noise reject ON)
 Holdoff = 40.000 ns

OSCILLOSCOPE PRESENTATION


ADI, DMR-Zoneva

1999-OCT-14, 11:43, THR

POWER: HIGH

MODULATION: Ref Gen=12.5 kHz Deviation

REMARK: CARRIER OFF TIME

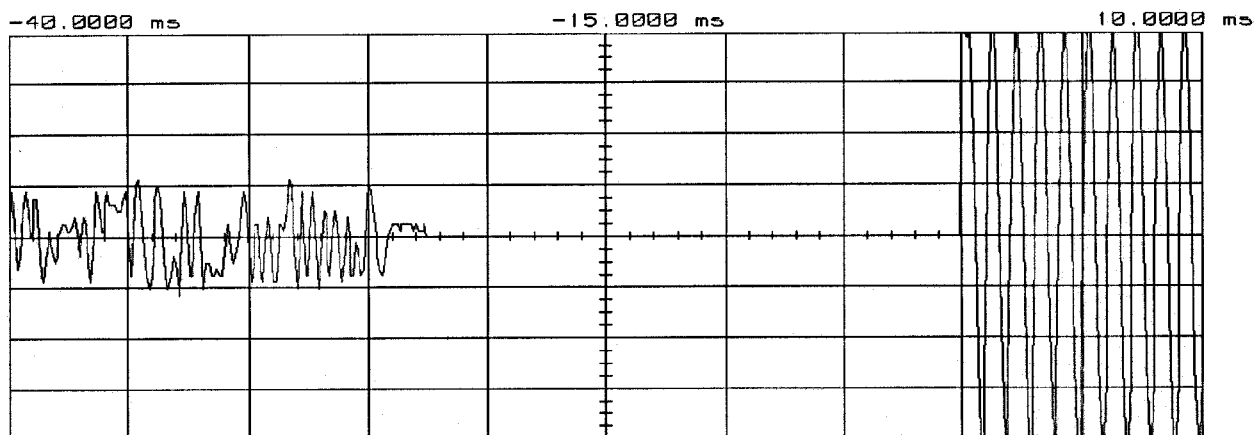

Main	Timebase	Delay/Pos	Reference	Mode
	5.00 ms/div	-15.0000 ms	Center	Repetitive
Channel 1	Sensitivity	Offset	Probe	Coupling
	275 mV/div	0.00000 V	1.000 :1	dc (1M ohm)
Trigger mode : Edge				
On Positive Edge Of Chan2				
Trigger Level				
Chan2 = -498.500 mV (noise reject ON)				
Holdoff = 40.000 ns				

OSCILLOSCOPE PRESENTATION


ADI, DMR-Zoneva

1999-OCT-14, 11:43, THR

POWER: HIGH

MODULATION: Ref Gen=12.5 kHz Deviation

REMARK: CARRIER OFF TIME

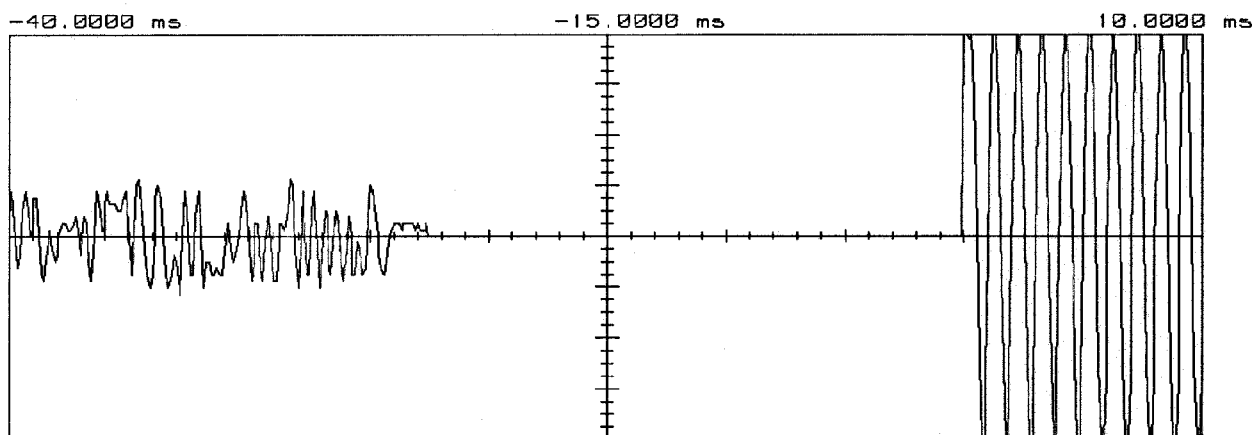


Main	Timebase	Delay/Pos	Reference	Mode
	5.00 ms/div	-15.0000 ms	Center	Repetitive
Channel 1	Sensitivity	Offset	Probe	Coupling
	275 mV/div	0.00000 V	1.000 :1	dc (1M ohm)
Trigger mode : Edge				
On Positive Edge Of Chan2				
Trigger Level				
Chan2 = -498.500 mV (noise reject ON)				
Holdoff = 40.000 ns				

OSCILLOSCOPE PRESENTATION

ADI, DMR-Zoneva

1999-OCT-14, 11:43, THR


POWER: HIGH
 MODULATION: Ref Gen=12.5 kHz Deviation
 REMARK: CARRIER OFF TIME

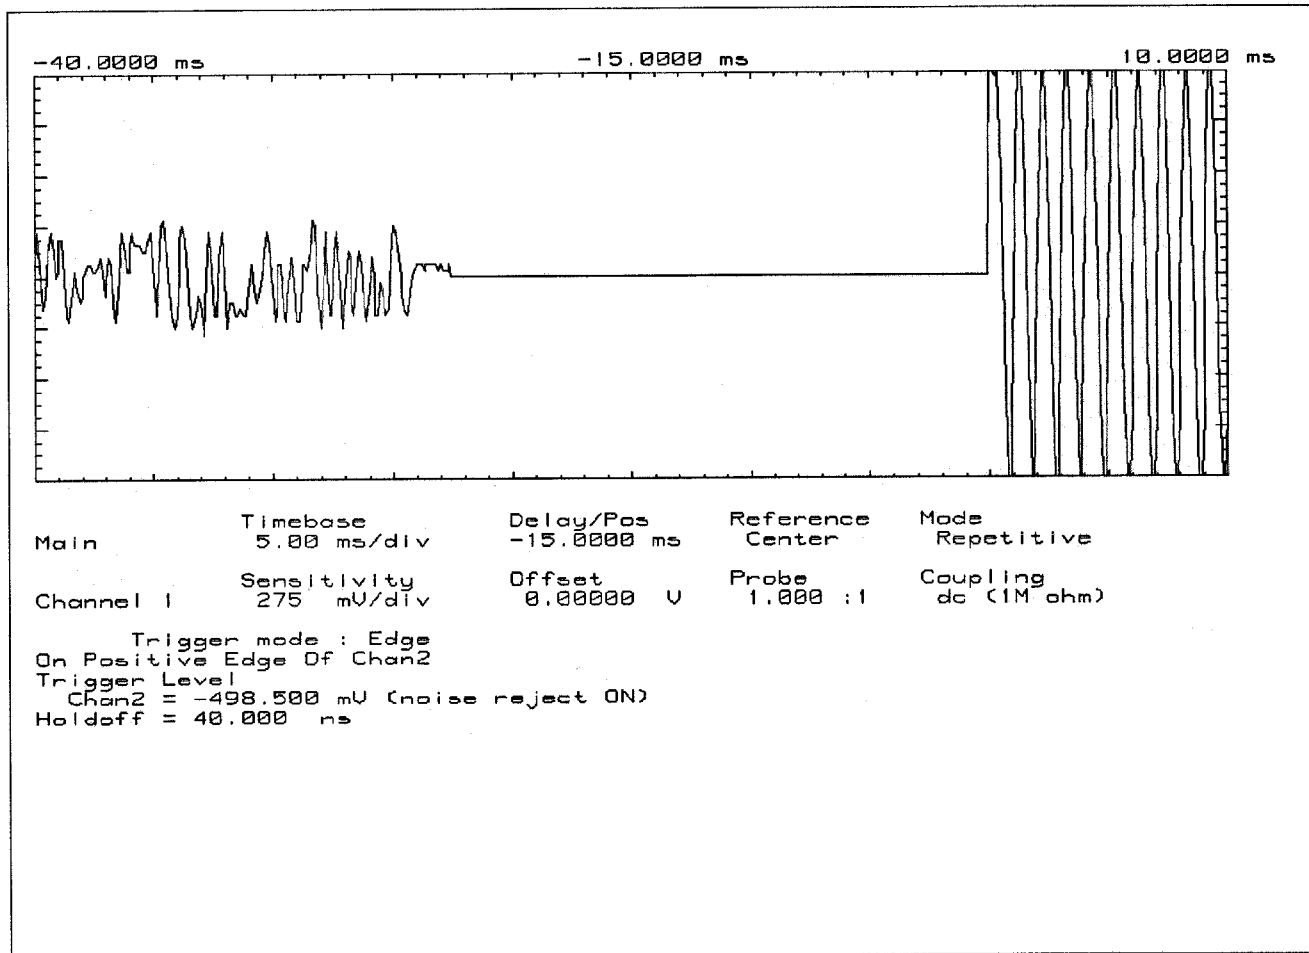

OSCILLOSCOPE PRESENTATION

ADI, DMR-Zoneva
1999-OCT-14, 11:43, THR

POWER: HIGH
MODULATION: Ref Gen=12.5 kHz Deviation
REMARK: CARRIER OFF TIME

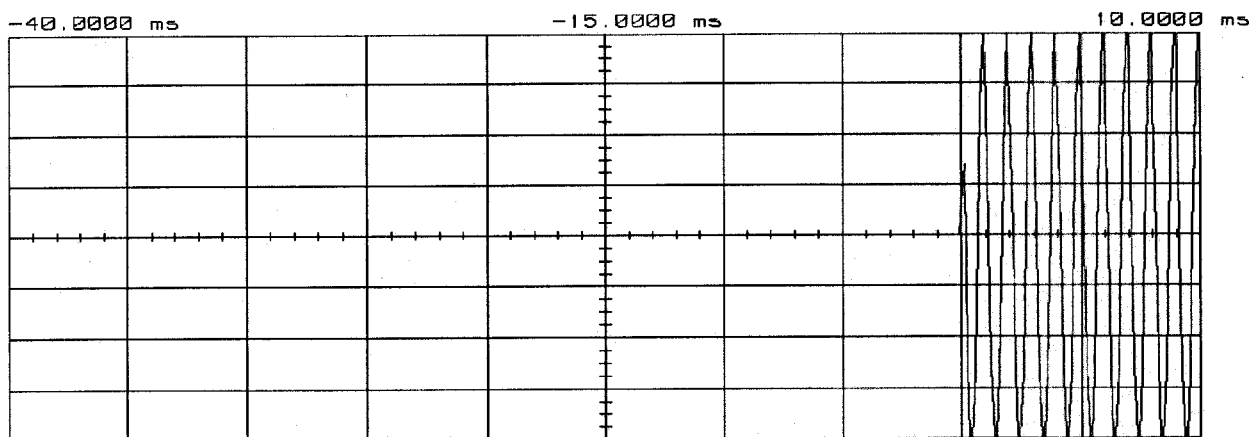

Main	Timebase 5.00 ms/div	Delay/Pos -15.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.00000 V	Probe 1.000 :1	Coupling dc (1M ohm)

Trigger mode : Edge
On Positive Edge Of Chan2
Trigger Level
Chan2 = -498.500 mV (noise reject ON)
Holdoff = 40.000 ns

OSCILLOSCOPE PRESENTATION


ADI, DMR-Zoneva

1999-OCT-14, 11:44, THR

POWER: HIGH

MODULATION: Ref Gen=12.5 kHz Deviation

REMARK: CARRIER OFF TIME

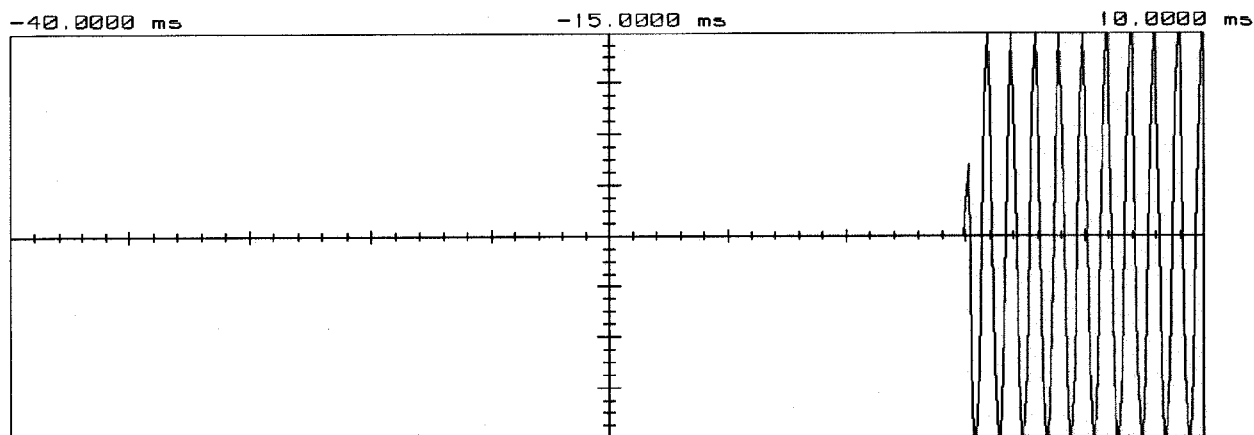

Main	Timebase 5.00 ms/div	Delay/Pos -15.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.00000 V	Probe 1.000 :1	Coupling dc (1M ohm)

Trigger mode : Edge
 On Positive Edge Of Chan2
 Trigger Level
 Chan2 = -498.500 mV (noise reject ON)
 Holdoff = 40.000 ns

OSCILLOSCOPE PRESENTATION


ADI, DMR-Zoneva

1999-OCT-14, 11:44, THR

POWER: HIGH

MODULATION: Ref Gen=12.5 kHz Deviation

REMARK: CARRIER OFF TIME

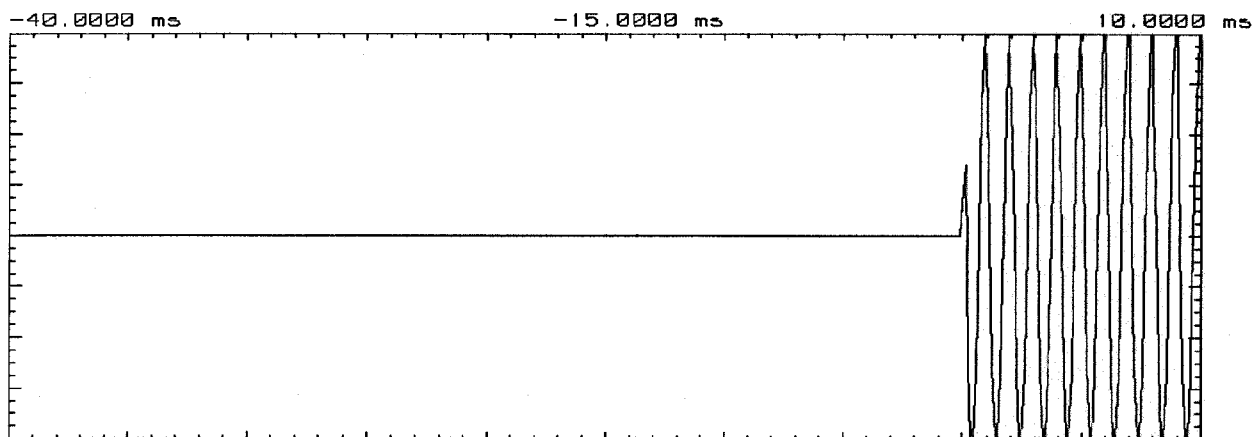

Main	Timebase 5.00 ms/div	Delay/Pos -15.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.00000 U	Probe 1.000 :1	Coupling dc (1M ohm)
Trigger mode : Edge				
On Positive Edge Of Chan2				
Trigger Level				
Chan2 = -498.500 mV (noise reject ON)				
Holdoff = 40.000 ns				