

FCC PART 15C
Measurement and Test Report
For
HANGZHOU CENTURY CO., LTD

FCC ID:N6K-CER320

FCC Rule(s)/Methods:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10:2013
Product Description:	RFID Desk Reader
Trademark	Century
Model/Type reference.:	CER320, CER310, CER330.
Report No.:	BSL2305318275051F
Date of receipt of test item:	Nov. 01, 2023
Date of sampling :	Nov. 01, 2023
Tested Date:	Nov. 01, 2023 to Nov. 28, 2023
Issued Date:	Nov. 28, 2023
Tested By:	Cindy Zheng/ Engineer
Reviewed By:	Haley Wen/ EMC Manager
Approved & Authorized By:	Mike Mo / PSQ Manager

Cindy zheng

Haley wen

Mike Mo

BSL Testing Co.,LTD.

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Shiyan
Street, Bao'an District, Shenzhen, Guangdong, 518052, People' s Republic of China
Tel: 400-882-9628 Fax: 86- 755-26508703

1. VERSION	4
2. TEST SUMMARY	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 Test Setup Configuration	8
3.3 Support Equipment	9
3.4 Test Mode	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 Conducted emissions	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 Test Result	15
4.2 Radiated emissions	17
4.2.1 Radiated Emission Limits	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 TEST RESULTS	20
5. RADIATED BAND EMISSION MEASUREMENT	25
5.1 Test Requirement:	25
5.2 TEST PROCEDURE	25
5.3 DEVIATION FROM TEST STANDARD	26
5.4 TEST SETUP	26
5.5 EUT OPERATING CONDITIONS	26
5.6 TEST RESULT	27
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	28
6.1 Limit	28
6.2 Test Setup	28
6.3 Test procedure	28
6.4 DEVIATION FROM STANDARD	28
6.5 Test Result	29
7. 20DB&99% BANDWIDTH	33
7.1 Test Setup	33
7.2 Limit	33
7.3 Test procedure	33
7.4 DEVIATION FROM STANDARD	33
7.5 Test Result	33
8. MAXIMUM PEAK OUTPUT POWER	36
8.1 Block Diagram Of Test Setup	36

8.2 Limit	36
8.3 Test procedure	36
8.4 DEVIATION FROM STANDARD	36
8.5 Test Result	36
9. HOPPING CHANNEL SEPARATION	39
9.1 Test Setup	39
9.2 Test procedure	39
9.3 DEVIATION FROM STANDARD	39
9.4 Test Result	40
10.NUMBER OF HOPPING FREQUENCY	42
10.1 Test Setup	42
10.2 Test procedure	42
10.3 DEVIATION FROM STANDARD	42
10.4 Test Result	43
11. DWELL TIME	44
11.1 Test Setup	44
11.2 Test procedure	44
11.3 DEVIATION FROM STANDARD	44
11.4 Test Result	45
12. ANTENNA REQUIREMENT	47
13. TEST SETUP PHOTO	48
14. EUT CONSTRUCTIONAL DETAILS	48

1. VERSION

Report No.	Version	Description	Approved
BSL2305318275051F	Rev.01	Initial issue of report	Nov. 28, 2023

2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C KDB 558074 D01			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth 99% OCB	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

BSL TESTING CO., LTD

Add. : 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Shiyan Street
Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

FCC Test Firm Registration Number: 562200

Designation Number: CN1338

IC Registered No.: 11093A

Designation Number: CN0019

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION**3.1 GENERAL DESCRIPTION OF EUT**

Applicant:	HANGZHOU CENTURY CO., LTD
Address of applicant:	1418-48# Moganshan Road, Hangzhou Zhejiang, P.R.China
Manufacturer:	HANGZHOU CENTURY CO., LTD
Address of manufacturer:	1418-48# Moganshan Road, Hangzhou Zhejiang, P.R.China
Product Name:	RFID Desk Reader
Model No.:	CER320, CER310, CER330.
Model Different.:	Only the model names are different.
Sample ID	N/A
Sample(s) Status:	Engineer sample
Channel numbers:	50
Channel separation:	0.5MHz
Operation Frequency:	902.75MHz~927.25MHz
Modulation technology:	GFSK
Antenna Type:	Internal Antenna
Antenna gain:	7.4 dBi
Power supply:	Input: DC 5V for USB Port


Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	902.75MHz	17	910.75MHz	33	918.75MHz	49	926.75MHz
2	903.25MHz	18	911.25MHz	34	919.25MHz	50	927.25MHz
3	903.75MHz	19	911.75MHz	35	919.75MHz	/	/
4	904.25MHz	20	912.25MHz	36	920.25MHz	/	/
5	904.75MHz	21	912.75MHz	37	920.75MHz	/	/
6	905.25MHz	22	913.25MHz	38	921.25MHz	/	/
7	905.75MHz	23	913.75MHz	39	921.75MHz	/	/
8	906.25MHz	24	914.25MHz	40	922.25MHz	/	/
9	906.75MHz	25	914.75MHz	41	922.75MHz	/	/
10	907.25MHz	26	915.25MHz	42	923.25MHz	/	/
11	907.75MHz	27	915.75MHz	43	923.75MHz	/	/
12	908.25MHz	28	916.25MHz	44	924.25MHz	/	/
13	908.75MHz	29	916.75MHz	45	924.75MHz	/	/
14	909.25MHz	30	917.25MHz	46	925.25MHz	/	/
15	909.75MHz	31	917.75MHz	47	925.75MHz	/	/
16	910.25MHz	32	918.25MHz	48	926.25MHz	/	/

Note:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:


Test channel	Frequency
The lowest channel	902.75MHz
The middle channel	914.75MHz
The Highest channel	927.25MHz

3.2 Test Setup Configuration


Conducted Emission



Radiated Emission



Conducted Spurious



3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	ADAPTER	LENOVO	K150B1950779E1	/	/
/	NOTEBOOK	LENOVO	T450S	/	/

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	
Test Software	HIDUHFReaderDemo Test Tool
Power level setup	<7dBm

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Communication Tester	Rohde & Schwarz	CMW500	100358 Fireware: 4.43 SP4	Oct. 22, 2023	Oct. 21, 2024
2	Spectrum Analyzer	KEYSIGHT	9020A	MY55370835	Oct. 22, 2023	Oct. 21, 2024
3	Test Receiver	R&S	ESCI7	US47140102 Fireware: 4.42 SP3	Oct. 22, 2023	Oct. 21, 2024
4	Signal Generator	HP	83630B	3844A01028	Oct. 22, 2023	Oct. 21, 2024
5	Signal Generator	IFR	2023A	202307/242	Oct. 22, 2023	Oct. 21, 2024
6	Amplifier	Agilent	8449B	4035A00116	Oct. 22, 2023	Oct. 21, 2024
7	Amplifier	HP	8447E	2945A02770	Oct. 22, 2023	Oct. 21, 2024
8	Broadband Antenna	SCHAFFNER	2774	2774	Feb.28,2022	Feb.27,2025
9	Biconical and log periodic antennas	ELECTRO-METRICS	EM-6917B-1	171	Feb.28,2022	Feb.27,2025
10	Horn Antenna	R&S	HF906	100253	Feb.28,2022	Feb.27,2025
11	Horn Antenna	Schwarzbeck	BBHA9170	00814	Feb.28,2022	Feb.27,2025
12	Horn Antenna	EM	EM-6961	6462	Feb.28,2022	Feb.27,2025
13	3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	Feb.28,2022	Feb.27,2025
14	Loop Antenna	ZHINAN	ZN30900C	20073	Feb.28,2022	Feb.27,2025
15	power meter	DARE	RPR3006W	15I00041SNO0	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024
16	RF Control Unit	MWRFTest	Mw100	-	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024
17	Test software	MWRFTest	V8310	-	-	-
18	Turntable	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024
3	Test Cable	N/A	C01	N/A	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024
4	Test Cable	N/A	C02	N/A	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024
5	EMI Test Receiver	R&S	ESCI3	101393	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024
6	Absorbing Clamp	DZ	ZN23201	15034	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024

7	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
---	--------------	------	--------	----------------------	---	---

RF Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024
2	MWRF Power Meter Test system	MW	MW100-RPCB	N/A	Oct.28,2022	Oct.27,2023
					Oct.27,2023	Oct.26,2024
3	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
4	RF Software	MW	MTS8310	V2.0.0.0	\	\

4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

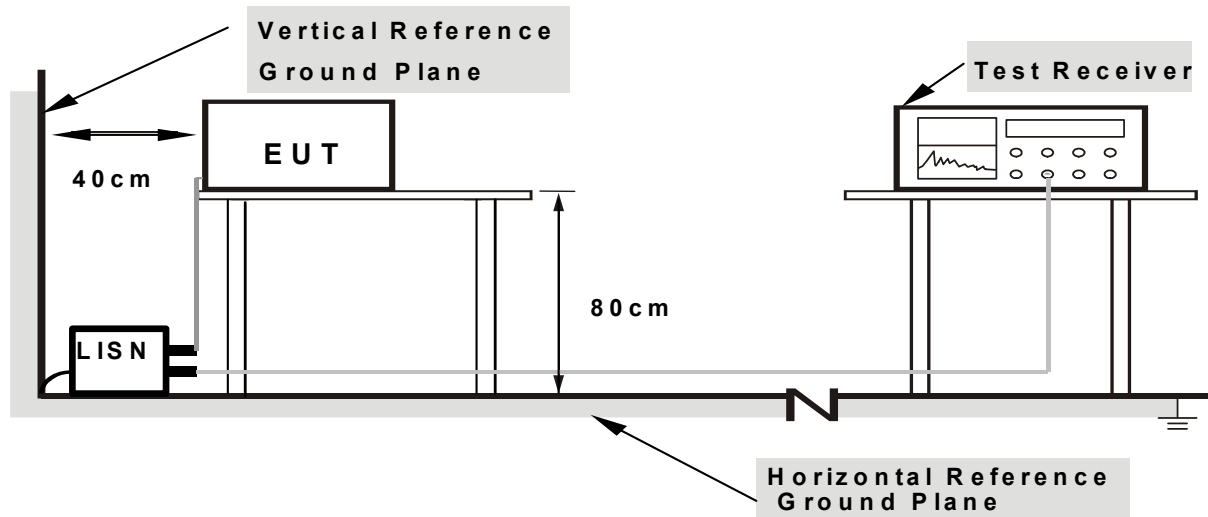

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 Test Result (Worst case GFSK 902.75MHz)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

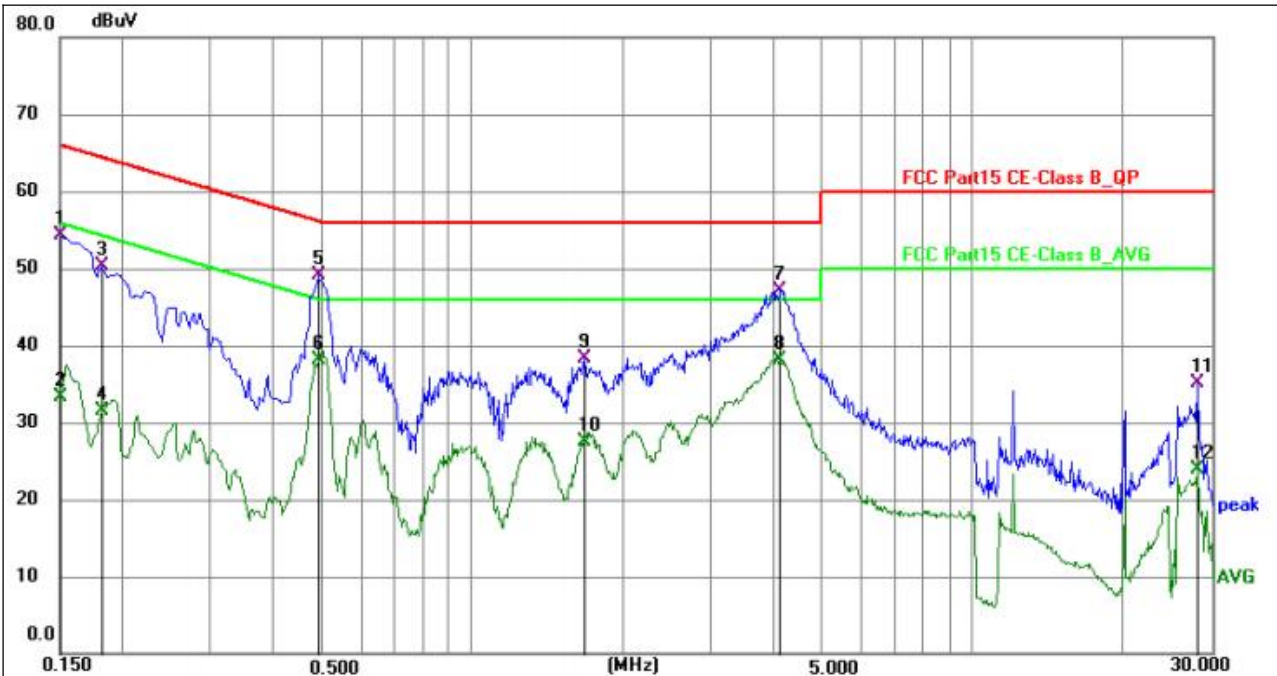


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	44.72	9.51	54.23	66.00	-11.77	QP	P	
2	0.1500	23.79	9.51	33.30	56.00	-22.70	AVG	P	
3	0.1815	40.64	9.64	50.28	64.42	-14.14	QP	P	
4	0.1815	21.82	9.64	31.46	54.42	-22.96	AVG	P	
5 *	0.4920	39.52	9.61	49.13	56.13	-7.00	QP	P	
6	0.4920	28.53	9.61	38.14	46.13	-7.99	AVG	P	
7	4.1235	37.67	9.53	47.20	56.00	-8.80	QP	P	
8	4.1235	28.66	9.53	38.19	46.00	-7.81	AVG	P	
9	1.6800	28.70	9.66	38.36	56.00	-17.64	QP	P	
10	1.6800	17.87	9.66	27.53	46.00	-18.47	AVG	P	
11	28.1130	25.32	9.69	35.01	60.00	-24.99	QP	P	
12	28.1130	14.12	9.69	23.81	50.00	-26.19	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

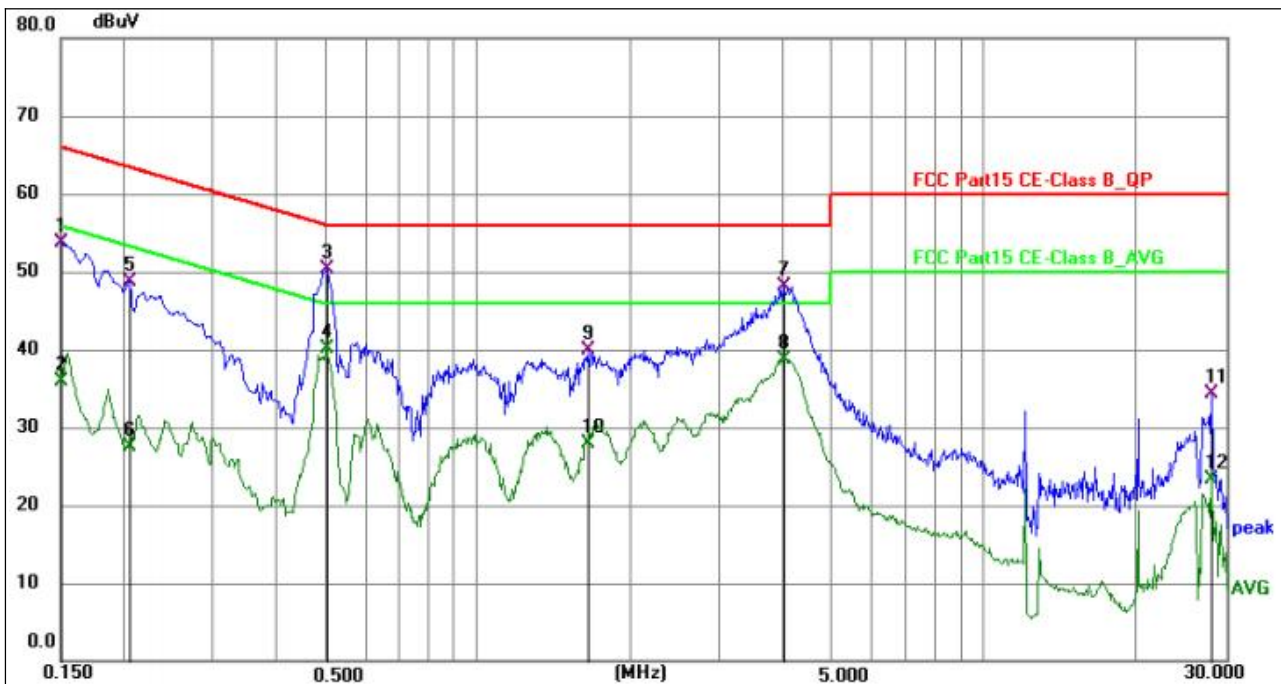

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	44.19	9.51	53.70	66.00	-12.30	QP	P	
2	0.1500	26.35	9.51	35.86	56.00	-20.14	AVG	P	
3 *	0.5010	40.66	9.62	50.28	56.00	-5.72	QP	P	
4	0.5010	30.57	9.62	40.19	46.00	-5.81	AVG	P	
5	0.2040	38.94	9.71	48.65	63.45	-14.80	QP	P	
6	0.2040	17.70	9.71	27.41	53.45	-26.04	AVG	P	
7	4.0200	38.57	9.53	48.10	56.00	-7.90	QP	P	
8	4.0200	29.21	9.53	38.74	46.00	-7.26	AVG	P	
9	1.6485	30.22	9.65	39.87	56.00	-16.13	QP	P	
10	1.6485	18.35	9.65	28.00	46.00	-18.00	AVG	P	
11	28.0995	24.63	9.69	34.32	60.00	-25.68	QP	P	
12	28.0995	13.54	9.69	23.23	50.00	-26.77	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor

4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

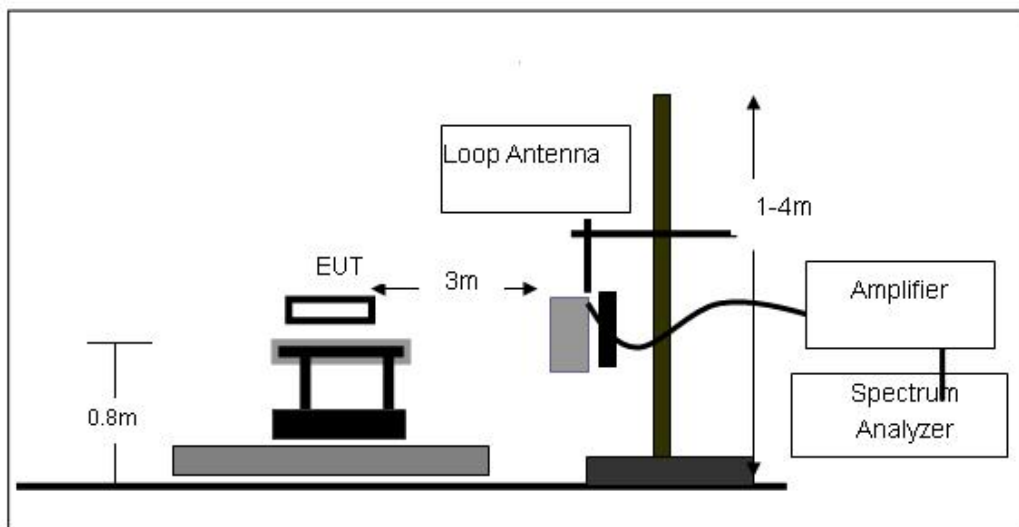

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

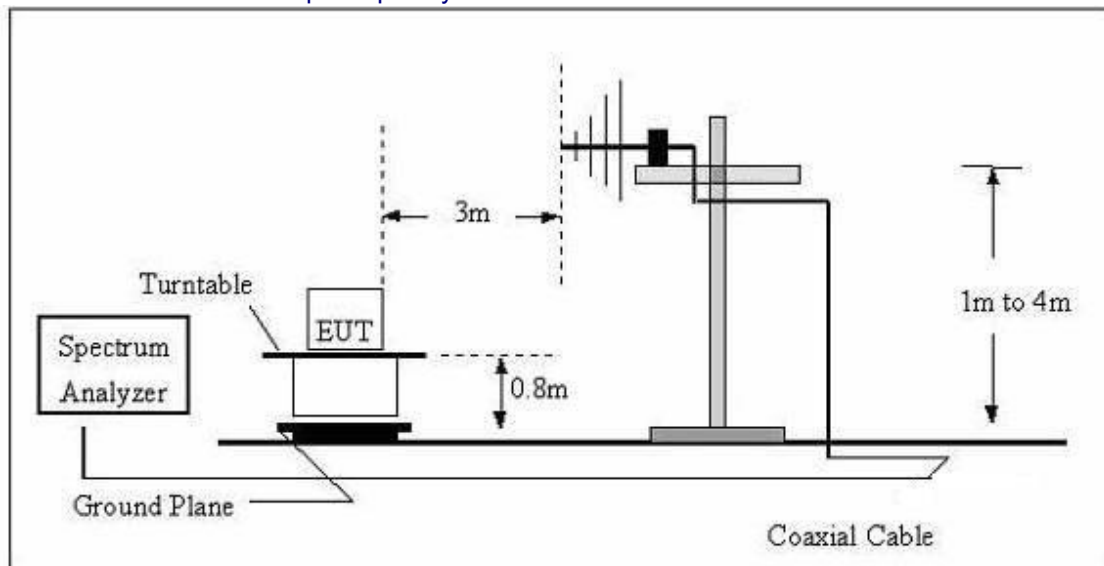

(C) Radiated Emission Test-Up Frequency Above 1GHz

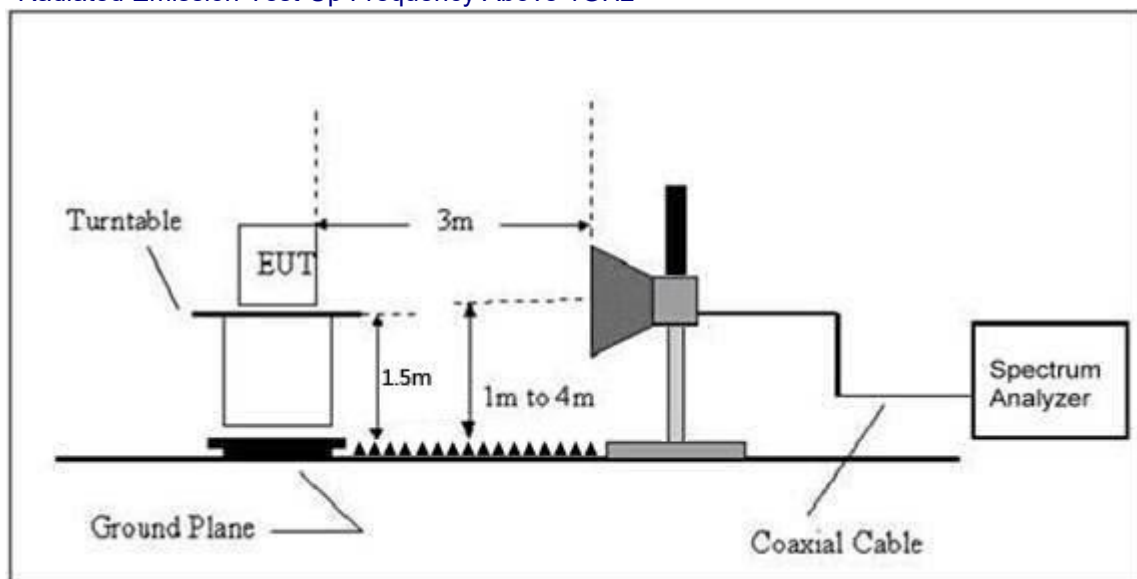

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


Between 30MHz – 1GHz (Worst case GFSK 902.75MHz)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

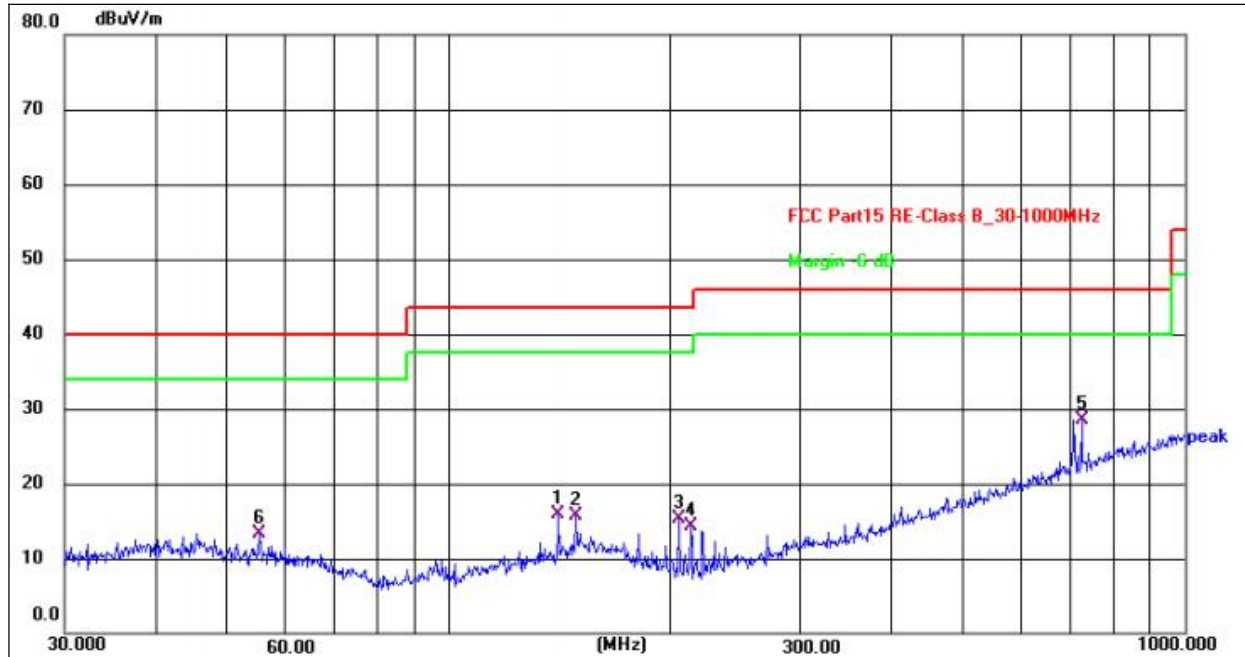

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	140.8351	32.53	-16.72	15.81	43.50	-27.69	QP
2	148.4410	31.65	-15.94	15.71	43.50	-27.79	QP
3	204.9551	34.37	-19.11	15.26	43.50	-28.24	QP
4	213.0151	33.56	-19.18	14.38	43.50	-29.12	QP
5 *	724.2611	34.83	-6.29	28.54	46.00	-17.46	QP
6	55.2207	30.37	-17.01	13.36	40.00	-26.64	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

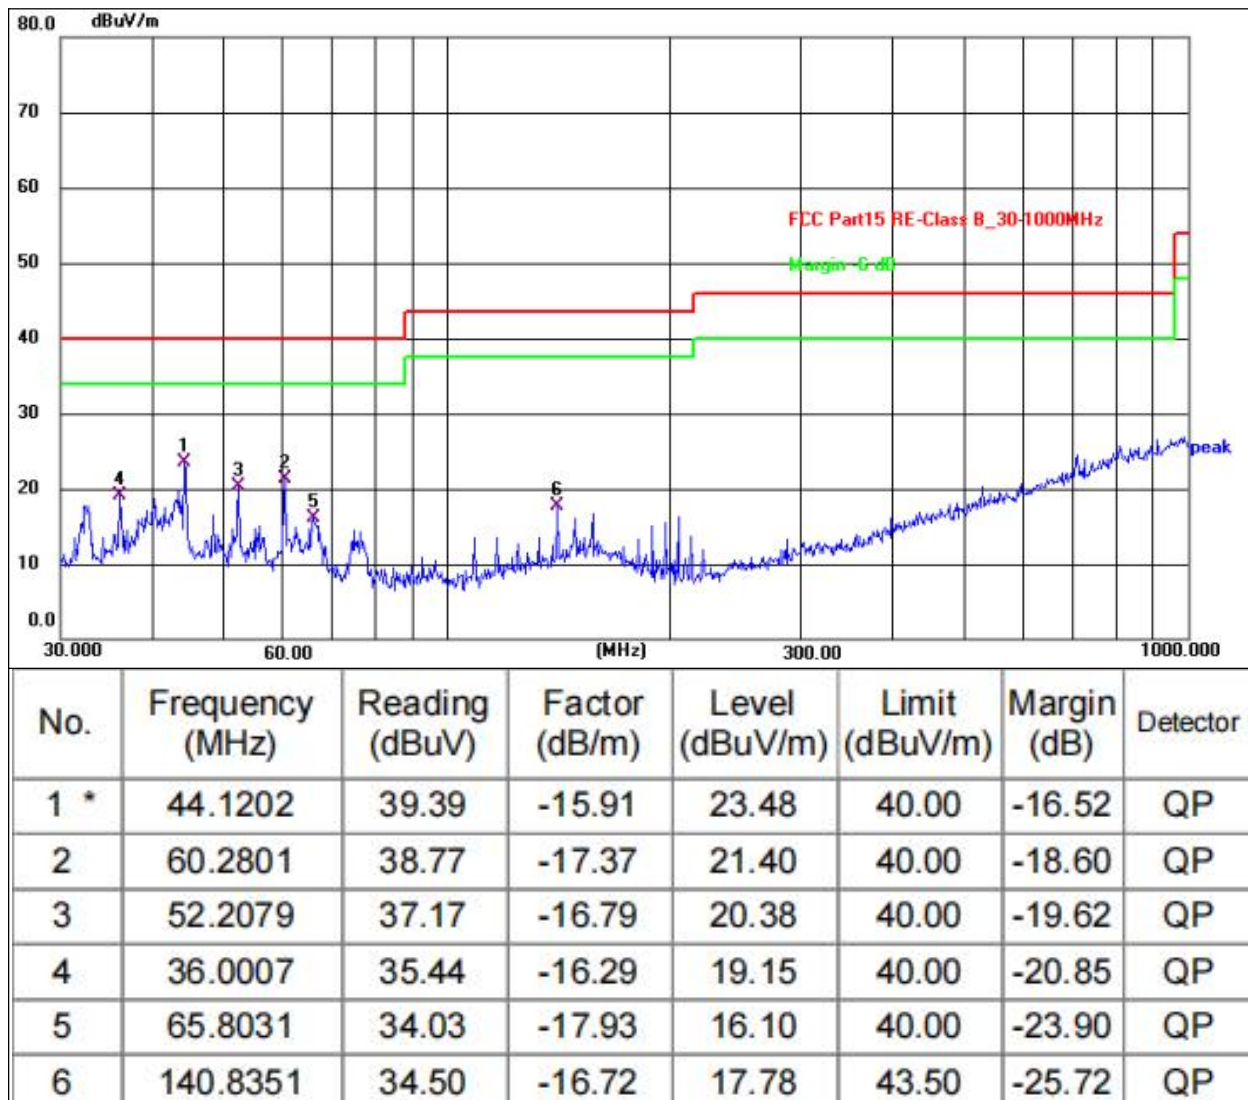

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case GFSK mode

1GHz~10GHz

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:902.75MHz									
V	1805.50	54.33	30.55	5.77	24.66	54.21	74.00	-19.79	Pk
V	1805.50	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
V	2708.25	53.35	30.33	6.32	24.55	53.89	74.00	-20.11	Pk
V	2708.25	43.25	30.33	6.32	24.55	43.79	54.00	-10.21	AV
V	3611.00	54.00	30.85	7.45	24.69	55.29	74.00	-18.71	Pk
V	3611.00	43.47	30.85	7.45	24.69	44.76	54.00	-9.24	AV
V	4513.75	51.98	31.02	8.99	25.57	55.52	74.00	-18.48	Pk
V	4513.75	43.36	31.02	8.99	25.57	46.90	54.00	-7.10	AV
H	1805.50	50.52	30.55	5.77	24.66	50.40	74.00	-23.60	Pk
H	1805.50	43.60	30.55	5.77	24.66	43.48	54.00	-10.52	AV
H	2708.25	53.36	30.33	6.32	24.55	53.90	74.00	-20.10	Pk
H	2708.25	43.45	30.33	6.32	24.55	43.99	54.00	-10.01	AV
H	3611.00	50.44	30.85	7.45	24.69	51.73	74.00	-22.27	Pk
H	3611.00	43.56	30.85	7.45	24.69	44.85	54.00	-9.15	AV
H	4513.75	52.08	31.02	8.99	25.57	55.62	74.00	-18.38	Pk
H	4513.75	43.58	31.02	8.99	25.57	47.12	54.00	-6.88	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:914.75MHz									
V	1829.50	53.78	30.55	5.77	24.66	53.66	74.00	-20.34	Pk
V	1829.50	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
V	2744.25	54.49	30.33	6.32	24.55	55.03	74.00	-18.97	Pk
V	2744.25	43.47	30.33	6.32	24.55	44.01	54.00	-9.99	AV
V	3659.00	53.97	30.85	7.45	24.69	55.26	74.00	-18.74	Pk
V	3659.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
V	4573.75	53.54	31.02	8.99	25.57	57.08	74.00	-16.92	Pk
V	4573.75	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV
H	1829.50	52.99	30.55	5.77	24.66	52.87	74.00	-21.13	Pk
H	1829.50	43.89	30.55	5.77	24.66	43.77	54.00	-10.23	AV
H	2744.25	53.83	30.33	6.32	24.55	54.37	74.00	-19.63	Pk
H	2744.25	43.72	30.33	6.32	24.55	44.26	54.00	-9.74	AV
H	3659.00	52.34	30.85	7.45	24.69	53.63	74.00	-20.37	Pk
H	3659.00	43.78	30.85	7.45	24.69	45.07	54.00	-8.93	AV
H	4573.75	53.80	31.02	8.99	25.57	57.34	74.00	-16.66	Pk
H	4573.75	43.09	31.02	8.99	25.57	46.63	54.00	-7.37	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:927.25MHz									
V	1854.50	51.18	30.55	5.77	24.66	51.06	74.00	-22.94	Pk
V	1854.50	43.17	30.55	5.77	24.66	43.05	54.00	-10.95	AV
V	2781.75	50.66	30.33	6.32	24.55	51.20	74.00	-22.80	Pk
V	2781.75	43.40	30.33	6.32	24.55	43.94	54.00	-10.06	AV
V	3709.00	52.86	30.85	7.45	24.69	54.15	74.00	-19.85	Pk
V	3709.00	43.81	30.85	7.45	24.69	45.10	54.00	-8.90	AV
V	4636.25	52.85	31.02	8.99	25.57	56.39	74.00	-17.61	Pk
V	4636.25	43.92	31.02	8.99	25.57	47.46	54.00	-6.54	AV
H	1854.50	50.98	30.55	5.77	24.66	50.86	74.00	-23.14	Pk
H	1854.50	43.79	30.55	5.77	24.66	43.67	54.00	-10.33	AV
H	2781.75	50.20	30.33	6.32	24.55	50.74	74.00	-23.26	Pk
H	2781.75	43.08	30.33	6.32	24.55	43.62	54.00	-10.38	AV
H	3709.00	50.88	30.85	7.45	24.69	52.17	74.00	-21.83	Pk
H	3709.00	43.86	30.85	7.45	24.69	45.15	54.00	-8.85	AV
H	4636.25	52.84	31.02	8.99	25.57	56.38	74.00	-17.62	Pk
H	4636.25	43.26	31.02	8.99	25.57	46.80	54.00	-7.20	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

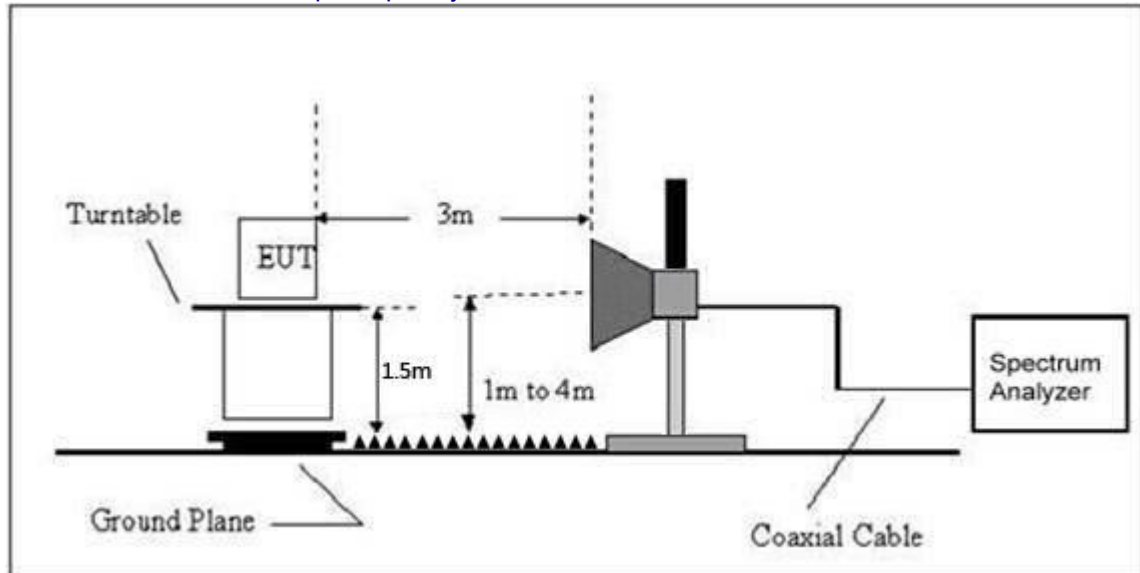

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 902.75MHz									
	H	900	53.11	30.22	4.85	23.98	51.72	74.00	Pk	PASS
	H	900	44.91	30.22	4.85	23.98	43.52	54.00	AV	PASS
	H	902	54.67	30.22	4.85	23.98	53.28	74.00	Pk	PASS
	H	902	44.30	30.22	4.85	23.98	42.91	54.00	AV	PASS
	V	900	54.50	30.22	4.85	23.98	53.11	74.00	Pk	PASS
	V	900	44.13	30.22	4.85	23.98	42.74	54.00	AV	PASS
	V	902	54.58	30.22	4.85	23.98	53.19	74.00	Pk	PASS
	V	902	44.11	30.22	4.85	23.98	42.72	54.00	AV	PASS
	High Channel: 927.25MHz									
	H	928	53.03	30.22	4.85	23.98	51.64	74.00	Pk	PASS
	H	928	44.27	30.22	4.85	23.98	42.88	54.00	AV	PASS
	H	930	54.93	30.22	4.85	23.98	53.54	74.00	Pk	PASS
	H	930	44.64	30.22	4.85	23.98	43.25	54.00	AV	PASS
	V	928	54.00	30.22	4.85	23.98	52.61	74.00	Pk	PASS
	V	928	44.26	30.22	4.85	23.98	42.87	54.00	AV	PASS
	V	930	53.23	30.22	4.85	23.98	51.84	74.00	Pk	PASS
	V	930	44.67	30.22	4.85	23.98	43.28	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit


6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup

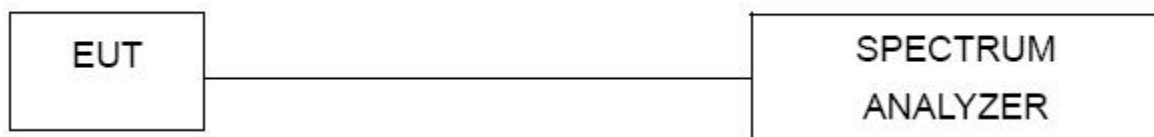

6.3 Test procedure


Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.


6.4 DEVIATION FROM STANDARD

No deviation.


6.5 Test Result

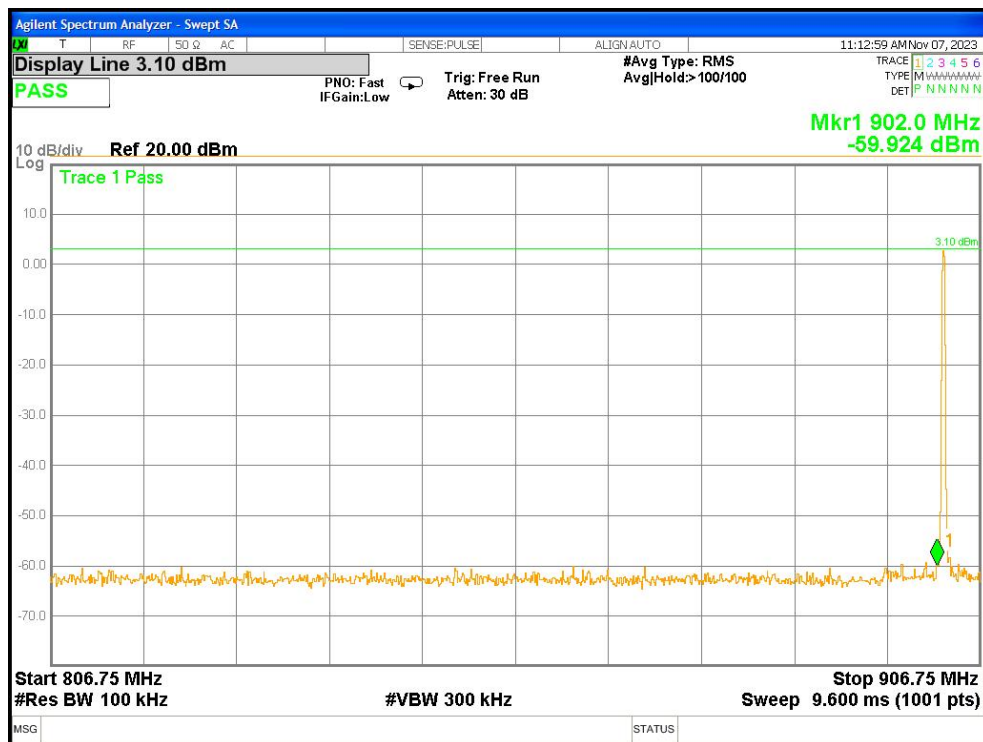


Band Edge NVNT Left No-Hopping Ref

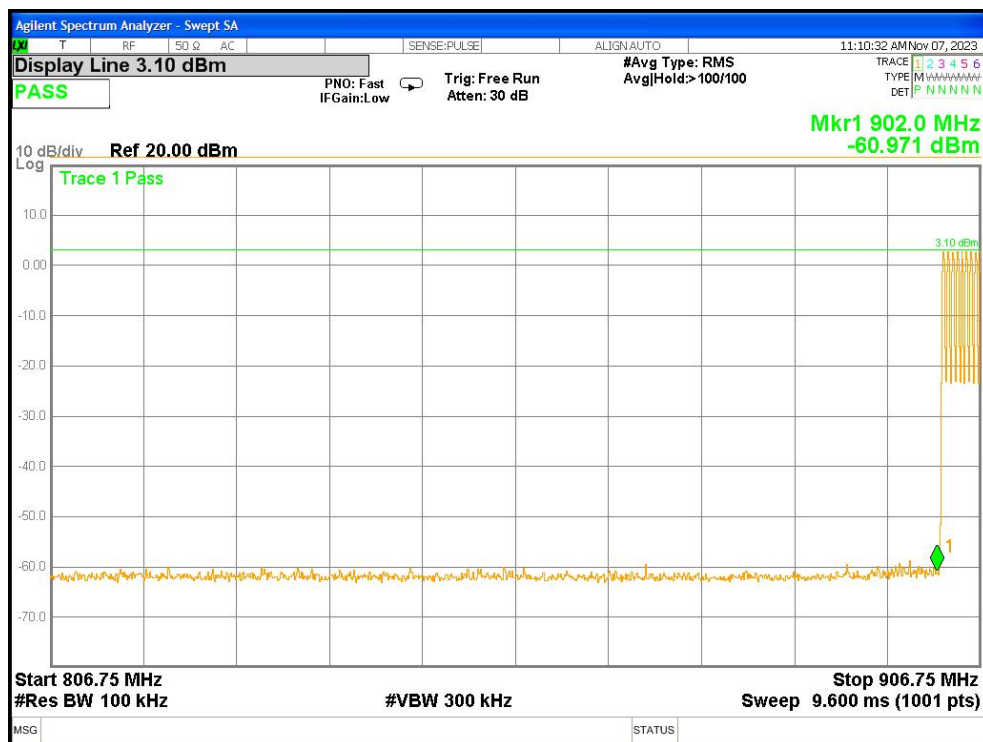


Band Edge NVNT Left Ant1 Hopping Emission

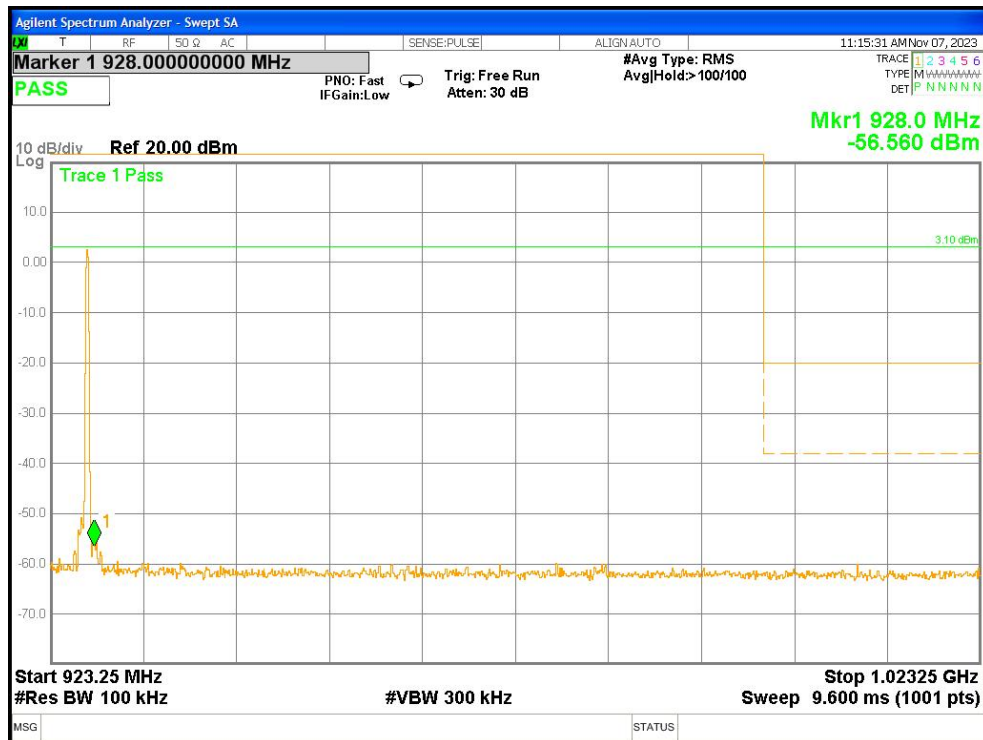


Band Edge NVNT Right No-Hopping Emission

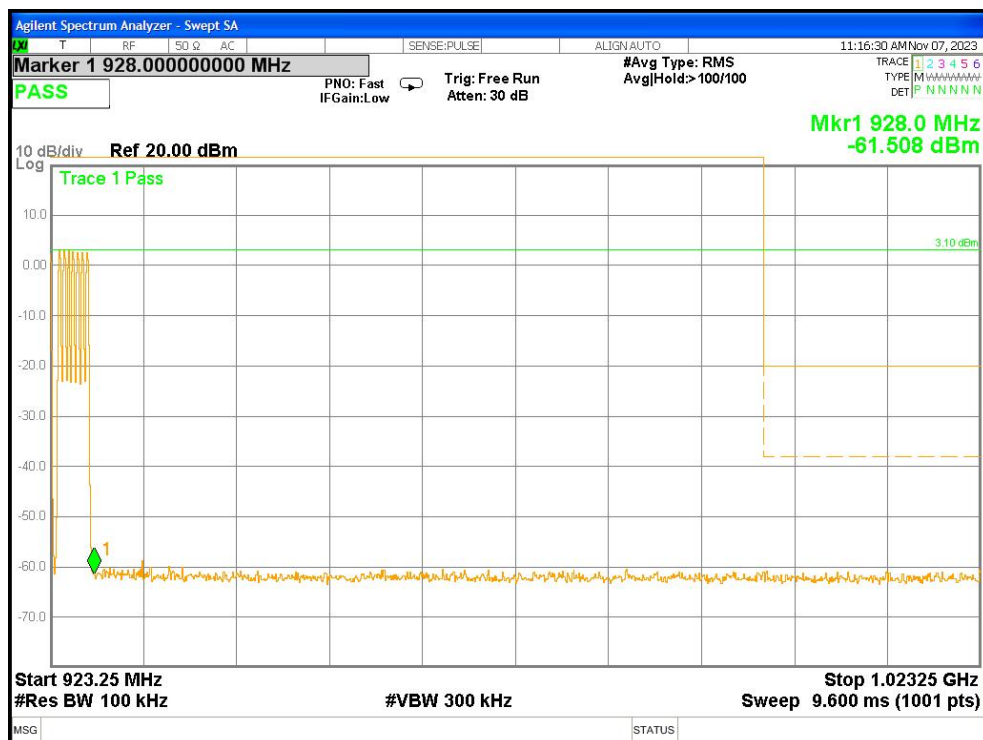


Band Edge NVNT Right Ant1 Hopping Ref

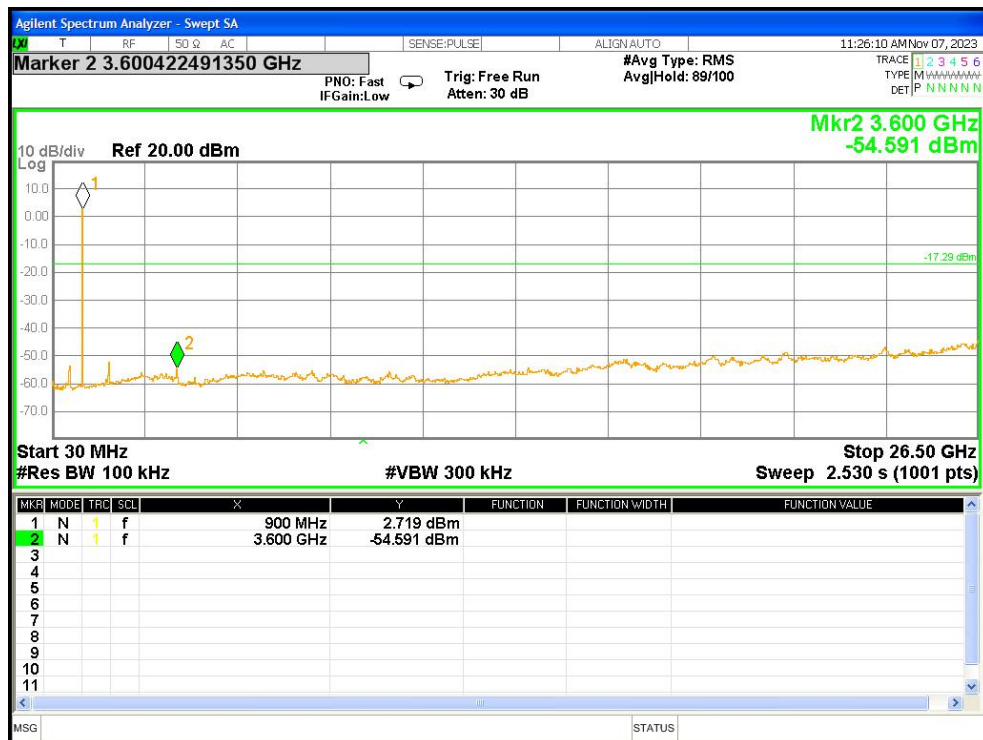

Tx. Spurious NVNT 902.75MHz Ant1 Ref

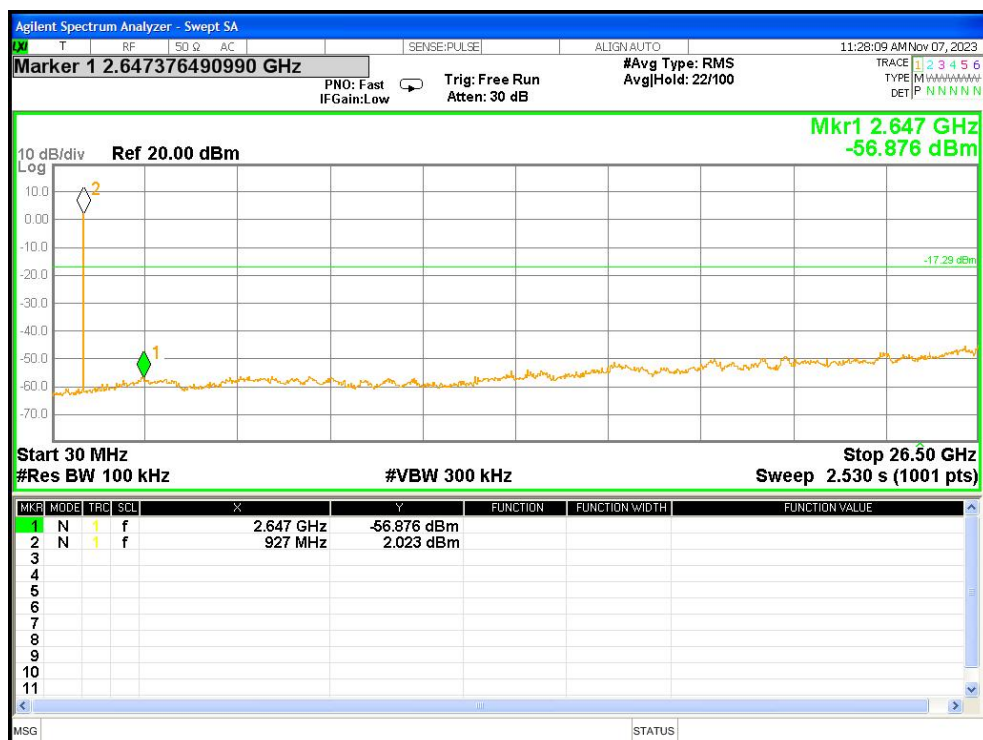

Tx. Spurious NVNT 914.75MHz Ant1 Ref

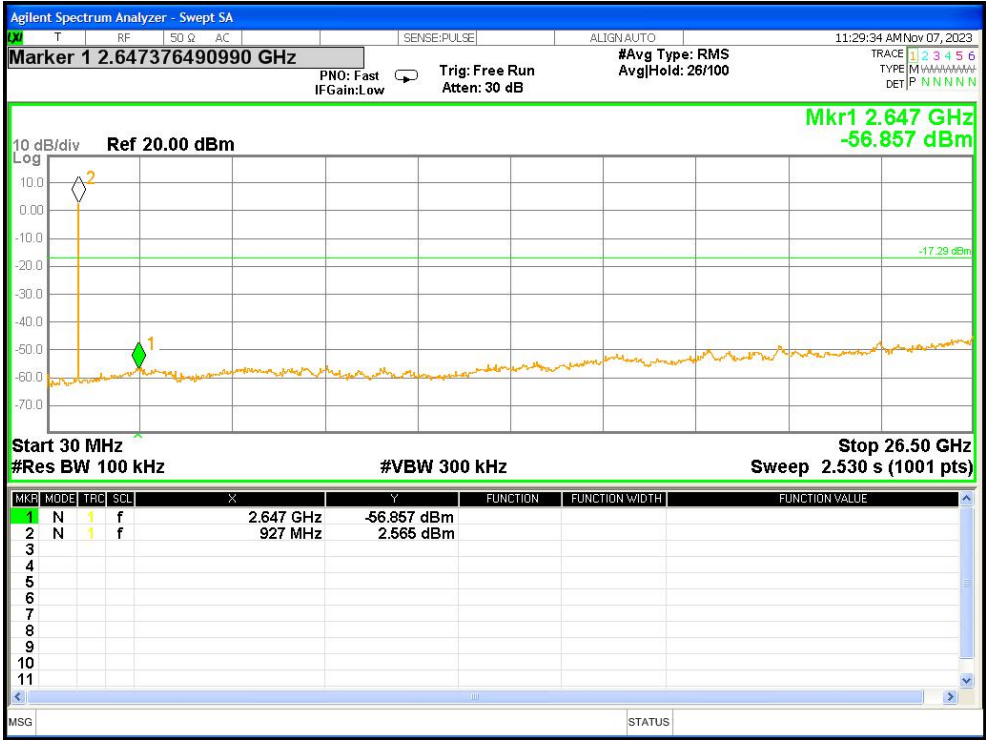

Tx. Spurious NVNT 927.25MHz Ant1 Ref

7. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 Test Setup**7.2 Limit**

The limit of 20dB Bandwidth is less than 250 kHz

7.3 Test procedure

1. Set RBW = 47 Hz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


7.4 DEVIATION FROM STANDARD

No deviation.

7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (KHz)	99%Bandwidth (KHz)	Result
GFSK	Lowest	0.791	4.977	Pass
	Middle	0.775	4.866	
	Highest	0.912	5.477	


Test plots

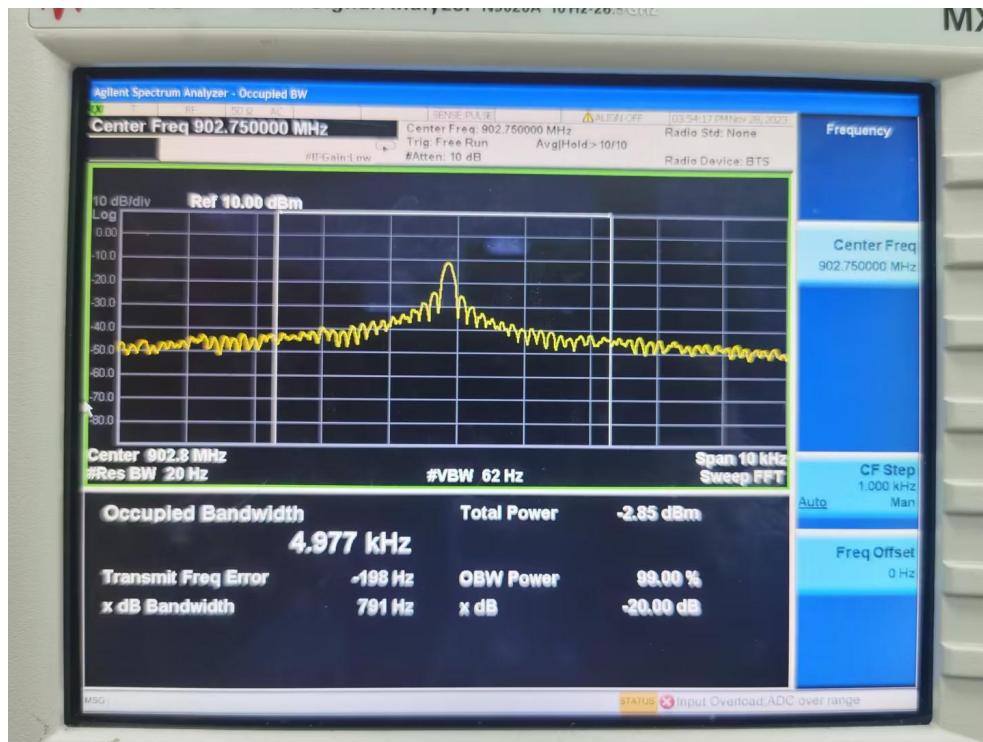

-20dB Bandwidth NVNT 902.75MHz Ant1



-20dB Bandwidth NVNT 914.75MHz Ant1

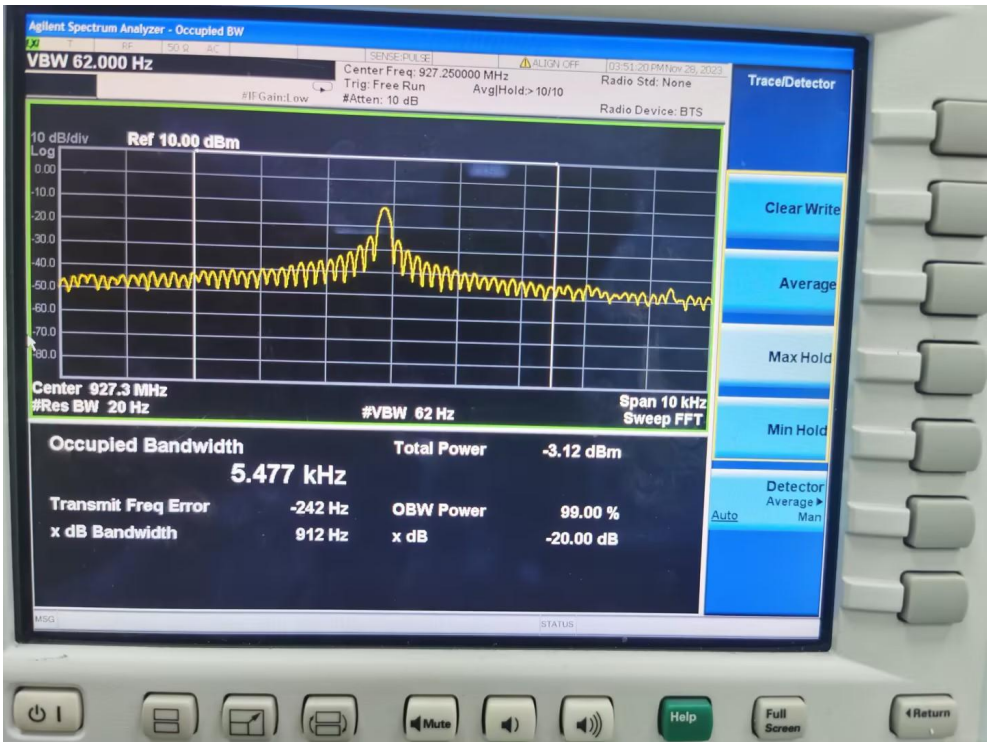

-20dB Bandwidth NVNT 927.25MHz Ant1

8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	30 dBm

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

b(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD


No deviation.

8.5 Test Result


Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	3.38	28.6	Pass
	Middle	3.1		
	Highest	3.74		

Note: The Limit=30dBm-(7.4-6)dBi=28.6dBm


Test plots

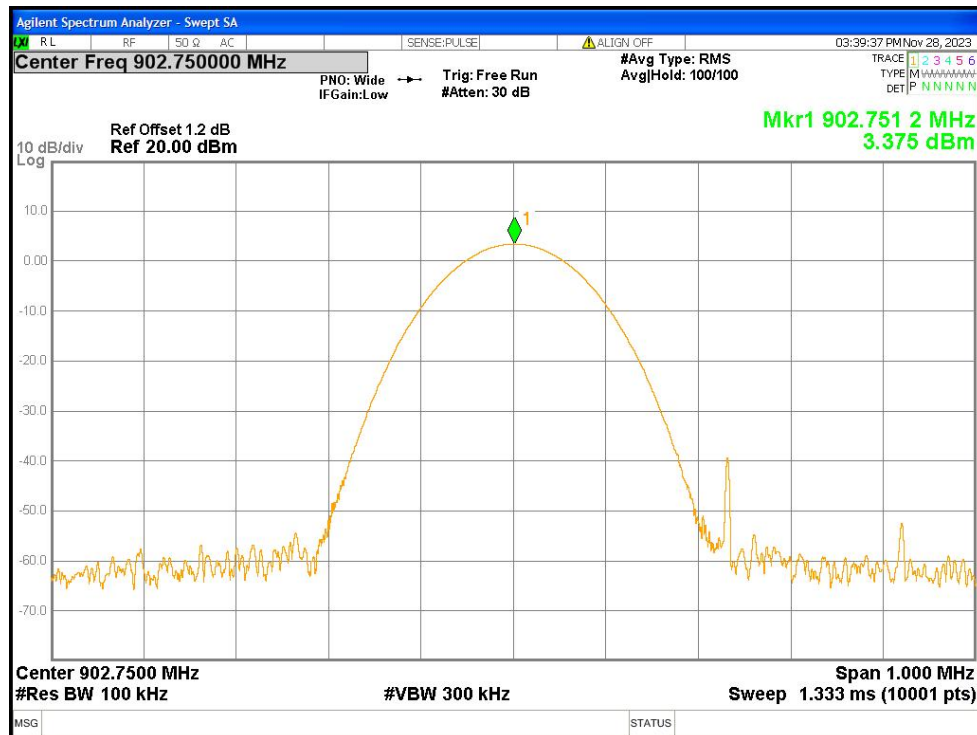

Peak Power NVNT 902.75MHz Ant1

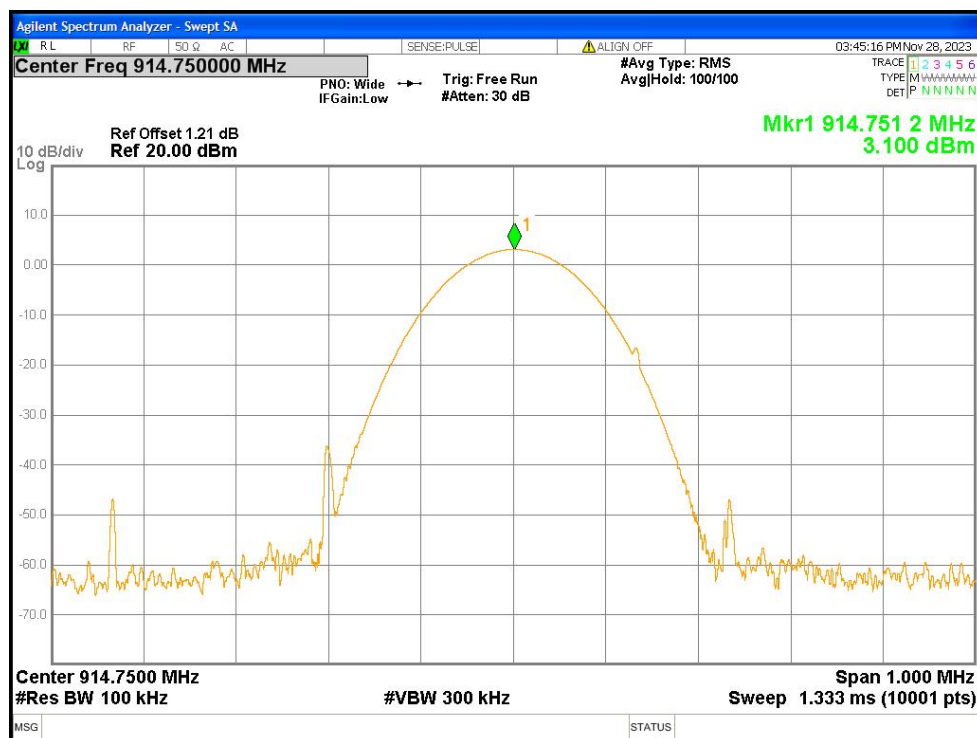

Peak Power NVNT 914.75MHz Ant1

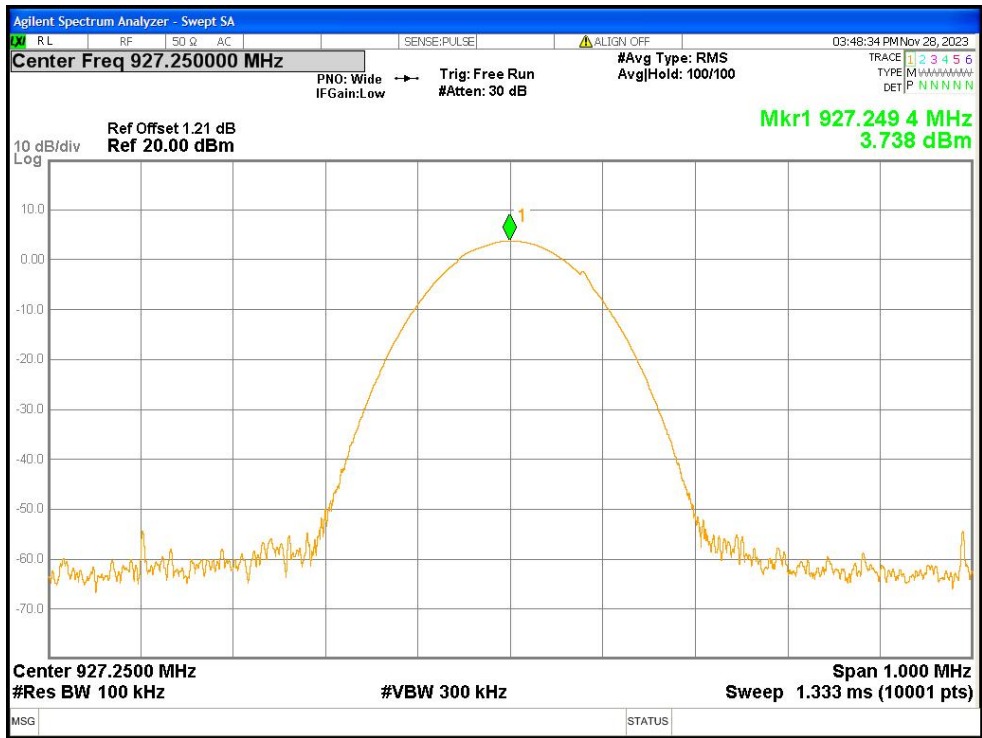

Peak Power NVNT 927.25MHz Ant1

9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	25KHz or 20dB bandwidth (whichever is greater)

9.1 Test Setup



9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


9.3 DEVIATION FROM STANDARD

No deviation.

9.4 Test Result

Modulation	Test Channel	Separation (KHz)	Limit(KHz)	Result
GFSK	Low	499.5	25	PASS
GFSK	Middle	499.5	25	PASS
GFSK	High	499.5	25	PASS


Test plots

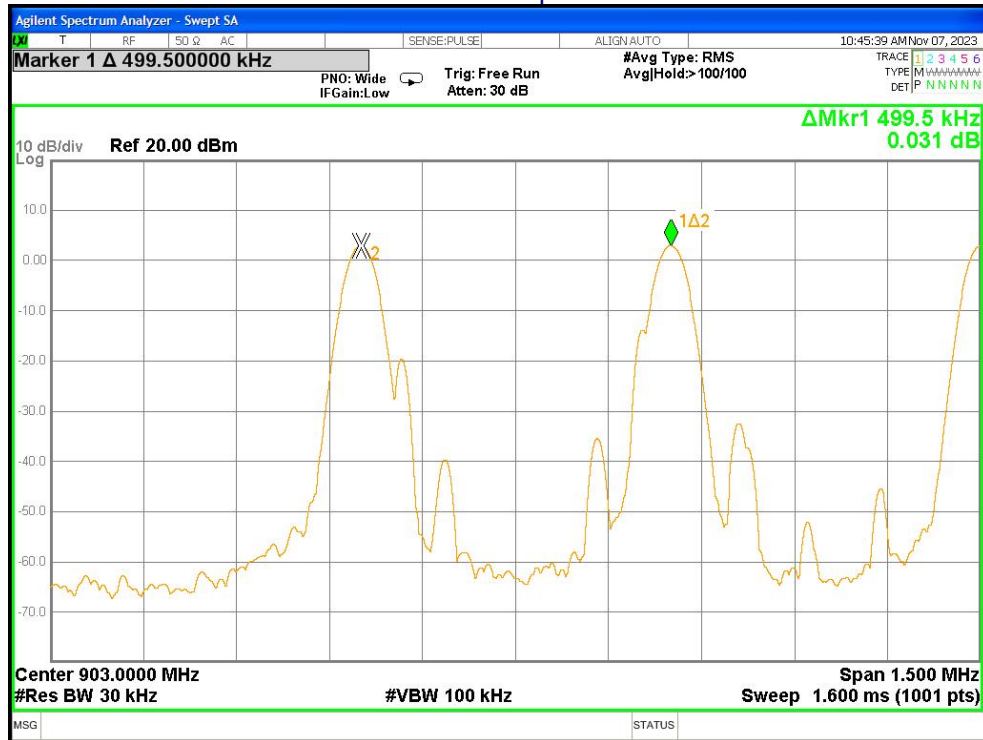

CFSK NVNT 902.75MHz Ant1




CFSK NVNT 914.75MHz Ant1

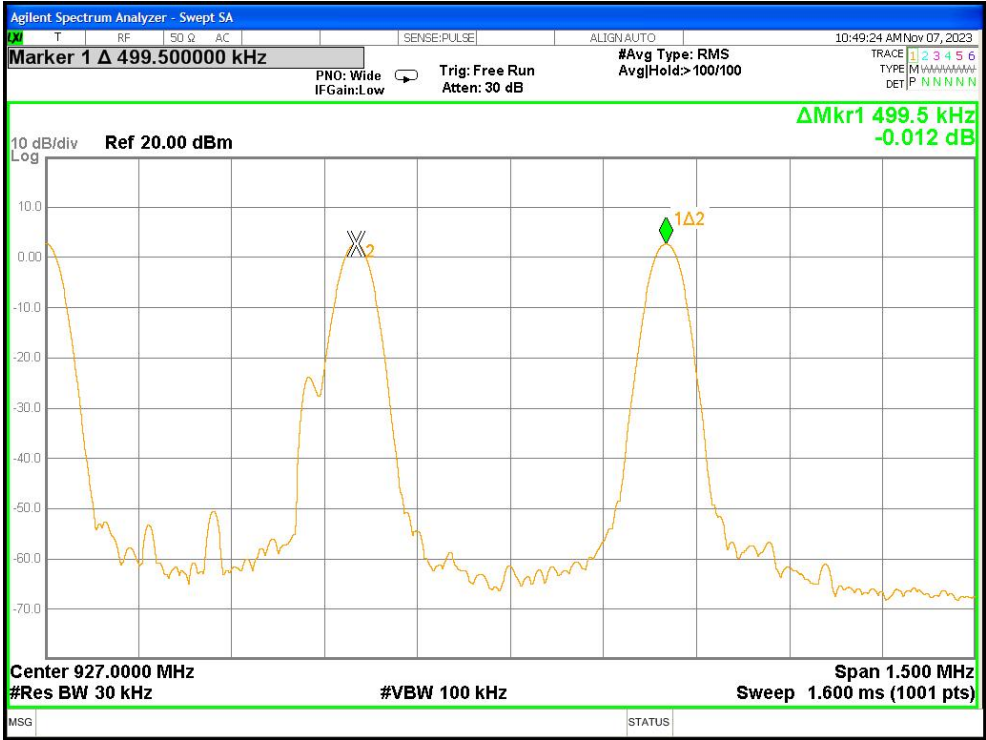

CFSK NVNT 927.25MHz Ant1

10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(i)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=902–928MHz, Detector=Peak
Limit:	≥50 channels

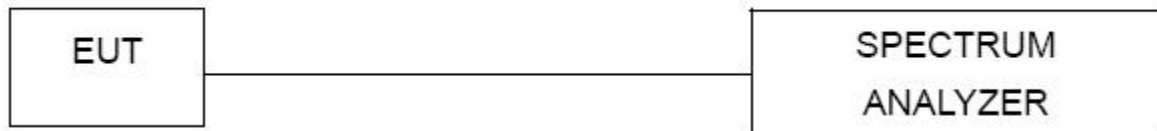10.1 Test Setup**10.2 Test procedure**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


10.3 DEVIATION FROM STANDARD

No deviation.

10.4 Test Result

Modulation	Test Channel	Test channels	Limit	Result
GFSK	Hopping	50	≥50	PASS


Test Plots:

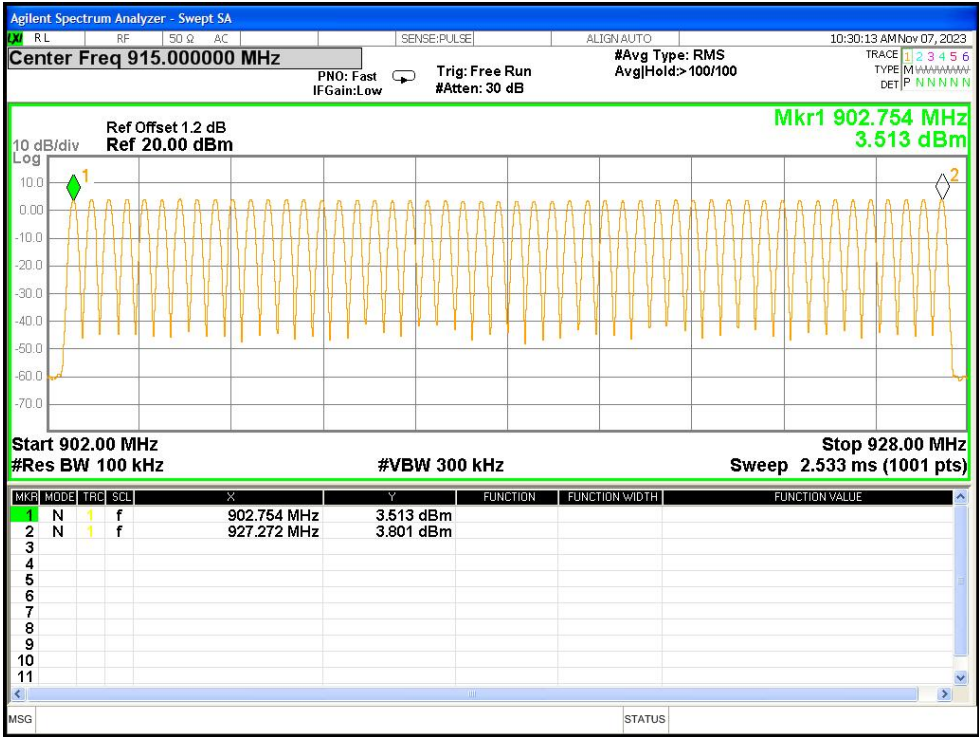

Hopping No. NVNT Ant1

11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	≤0.4 Second

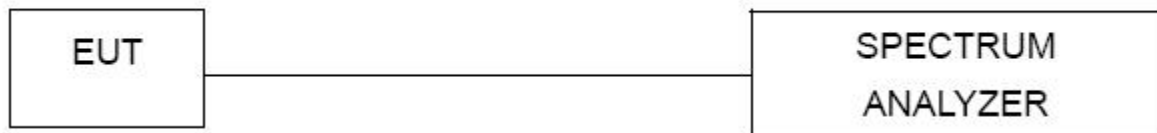11.1 Test Setup**11.2 Test procedure**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.

11.4 Test Result


Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
Hopping	/	Ant1	7.496	89.952	12	20000	400	Pass

Note1: Total Dwell Time (ms)=Pulse Time (ms)*Burst Count

Test Plots



Dwell NVNT 902.75MHz Ant1 One Burst

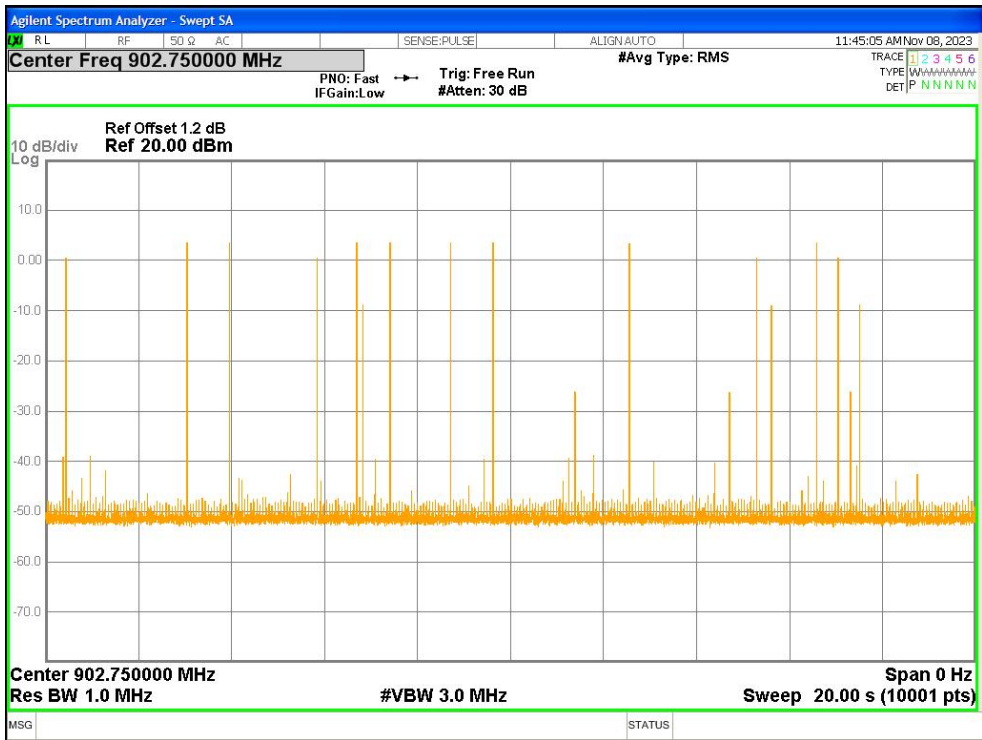

Dwell NVNT 902.75MHz Ant1 Accumulated

12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Internal Antenna, the best case gain of the antennas is 7.4 dBi, reference to the appendix II for details	

13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

******* END OF REPORT *******