

FCC ID: N74-CP8563

IC: 10336A-CP8563



Report No.:

31550218.003 CP8563.doc

Page 1 of 31

Electromagnetic Compatibility Test Report

Prepared in accordance with

FCC Part 15C, RSS-210 Issue 8 and ANSI C63.10

C63.10:2009 and C63.10:2013 Versions were both used

On

Active RFID Tag

CP8563

OMNI-ID
1200 Ridgeway Avenue
Rochester, NY 14615

Prepared by:

TUV Rheinland of North America, Inc.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Manufacturer's statement - attestation

The manufacturer; OMNI-ID, as the responsible party for the equipment tested, hereby affirms:

- a) That they have reviewed and concurs that the test shown in this report are reflective of the operational characteristics of the device for which certification is sought;
- b) That the device in this test report will be representative of production units;
- c) That all changes (in hardware and software/firmware) to the subject device will be reviewed.
- d) That any changes impacting the attributes, functionality or operational characteristics documented in this report will be communicated to the body responsible for approving (certifying) the subject equipment.

Ed Nabrotzky

Printed name of official



Signature of official

**1200 Ridgeway Avenue
Rochester, NY 14615**

Address

3/27/2015

Date

585-713-1000

Telephone number

ed.nabrotzky@omni-id.com

Email address of official

FCC ID: N74-CP8563

IC: 10336A-CP8563



Report No.:

31550218.003 CP8563.doc

Page 3 of 31

Client:	OMNI-ID 1200 Ridgeway Avenue Rochester, NY 14615	Contact: Len Desmond Tel: 585-713-1021 Fax: e-mail len.desmond@omni-id.com		
Identification:	Active RFID Tag	Serial No.: TS-1		
Test item:	Model CP8563	Date Test Completed: 3/23/2015		
Testing location:	TUV Rheinland of North America 710 Resende Road Webster, NY 14580 U.S.A.	Tel: (585) 645-0125		
Test specification:	Emissions: FCC Part 15.231 Radiated Emissions Std FCC Part 15.209 and RSS - 210 Issue 8, FCC Part 15.231 and RSS - 210 Issue 8, FCC Part 15.231 and RSS - 210 Issue 8			
Test Result:	The above product was found to be Compliant to the above test standard(s)			
tested by: Randall Masline	reviewed by: Cecil Gittens			
20 May 2015 <u>Date</u>	20 May 2015 <u>Date</u>			
Other Aspects:	None			
Abbreviations: OK, Pass, Compliant, Complies = passed Fail, Not Compliant, Does Not Comply = failed N/A = not applicable				
US5253	   Testing Cert.# 3331.08	Industry Canada 482B-1	VCCI A-0203	BSMI SL2-IN-E-050R

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

TABLE OF CONTENTS

1 GENERAL INFORMATION	5
1.1 SCOPE	5
1.2 PURPOSE	5
1.3 SUMMARY OF TEST RESULTS	6
2 LABORATORY INFORMATION	7
2.1 ACCREDITATIONS & ENDORSEMENTS	7
2.2 MEASUREMENT UNCERTAINTY EMISSIONS	8
2.3 CALIBRATION TRACEABILITY	8
2.4 MEASUREMENT EQUIPMENT USED	9
3 PRODUCT INFORMATION	10
3.1 EQUIPMENT MODIFICATIONS	10
3.2 TEST PLAN	10
4 EMISSIONS.....	12
4.1 RADIATED EMISSIONS	12
4.2 FUNDAMENTAL FIELD STRENGTH AND HARMONIC EMISSIONS	15
4.3 BANDWIDTH	23
4.4 DEACTIVATION OF TRANSMITTER	26
5 MPE EVALUATION.....	28
APPENDIX A	29
6 TEST PLAN.....	29
6.1 GENERAL INFORMATION	29
6.2 MODEL(S) NAME	29
6.3 TYPE OF PRODUCT	29
6.4 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	30
6.5 MODIFICATIONS	30
6.6 PRODUCT ENVIRONMENT	30
6.7 COUNTRIES	30
6.8 GENERAL PRODUCT INFORMATION.....	31
6.9 EUT ELECTRICAL POWERED INFORMATION	31

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

1 General Information

1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Part 15C, RSS-210 Issue 8 and ANSI C63.10 based on the results of testing performed on 3/23/2015 on the Active RFID Tag, Model Number. CP8563, manufactured by OMNI-ID. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

1.3 Summary of Test Results

Applicant	OMNI-ID 1200 Ridgeway Avenue Rochester, NY 14615	Tel	585-713-1021	Contact	Len Desmond
		Fax		e-mail	len.desmond@omni-id.com
Description	Active RFID Tag	Model Number	CP8563		
Serial Number	TS-1	Test Voltage/Freq.	3 VDC		
Test Date Completed:	3/23/2015	Test Engineer	Randall Masline		
Standards	Description	Severity Level or Limit		Measured	Test Result
FCC Part 15 subpart C Standard	Radio Frequency Devices - Subpart C: Intentional Radiators	See called out parts below		See Below	Complies
RSS-210 Issue 8 Standard	Licence-exempt Radio Apparatus (All Frequency Bands): Category 1 Equipment	See called out parts below		See Below	Complies
FCC Part 15.231	Operation in the band 433.5 434.5 MHz	See Basic Standards Below		See Below	Complies
FCC Part 15.209 and RSS - 210 Issue 8	Radiated Emissions	Class B, 30 - 1000 MHz Spurious up to 2500 MHz		Limit	Complies
FCC Part 15.231 and RSS - 210 Issue 8	Field Strength of Fundamental and Spurious Emissions	15.231 Limit is 100.8 dBuV at 433.27 MHz with Duty Cycle		Field Strength of Fundamental	Complies
FCC Part 15.231 and RSS - 210 Issue 8	Bandwidth	Part 15.231 1082.5 kHz RSS - 210 99% BW		523.04 kHz 486.97 kHz	Complies
FCC Part 15.231(a)	Deactivation of Transmitter	5 Seconds, 433.27 MHz		Within 5 seconds	Complies

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at, 710 Resende Road, Webster, NY 14580 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90575). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.2 A2LA

This is a program which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Standard 17025:2005 (Lab code: 3331.08). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 VCCI

VCCI Accredited test lab. Registration numbers A-0203

2.1.4 Industry Canada

(Registration No.: 482B-1) The 10m Semi-Anechoic Chamber has been accepted by Industry Canada to perform testing to 3 and to 10m, based on the test procedures described in ANSI C63.4-2013.

2.1.5 BSMI

Registration No.: SL2-IN-E-050R. The BSMI accreditation was obtained by NIST MRA with the BSMI.

2.1.6 Korea

Recognized by Radio Research Agency as an accredited Conformity Assessment Body (CAB) under the terms of Phase I of the APEC TEL.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

2.1.7 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.2 Measurement Uncertainty Emissions

	U_{lab}	U_{cispr}
Radiated Disturbance @ 10m		
30 MHz – 1,000 MHz	4.57 dB	5.2 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	2.62 dB	3.6 dB
Disturbance Power		
30 MHz – 300 MHz	3.88 dB	4.5 dB

2.3 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

FCC ID: N74-CP8563**IC: 10336A-CP8563****Report No.:****31550218.003 CP8563.doc****Page 9 of 31**

2.4 Measurement Equipment Used

Equipment	Manufacturer	Model #	Ref.	Serial #	Last Cal dd/mm/yy	Next Cal dd/mm/yy	Test
Radiated Emissions							
Analyzer w RF Filter Section 85460A	HP	8546A		3325A00134	12-Aug-14	12-Aug-15	RE
Multimeter	Fluke	83	C437	48162892	12-Aug-14	12-Aug-15	RE
BiLog	Chase	CBL6111	C017	1169	22 Aug 13	22 Aug 15	RE
Receiver (20Hz-40GHz)	Rohde & Schwarz	ESI(B) 40		100274	15-Aug-14	15-Aug-15	RE
Horn (1-18 GHz)	ETS	3117			16-Jan-14	16-Jan-16	RE
Loop Antenna	EMCO	6502		8901-2302	10-Mar-15	10-Mar-17	RE
General Laboratory Equipment							
Multimeter	Fluke	87	C405	49050672	12-Aug-14	12-Aug-15	
Multimeter	Fluke	8062A	C452	4715199	12-Aug-14	12-Aug-15	
Pressure/Temperature/RH	Extech	SD700	C480	Q668876	12-Aug-14	12-Aug-15	

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

3 Product Information

3.1 Equipment Modifications

No modifications were needed to bring product into compliance.

3.2 Test Plan

The EUT product information, test configuration, mode of operation, test types, test procedures, test levels, pass/failure criteria, in this report were carried out per the product test plan located in appendix A of this report.

Duty Cycle

Ton = 10mS

Toff = 15 Seconds

So Duty Cycle = $100 * (10mS) / (10mS + 15 \text{ Seconds}) = .067\%$

Antenna Information:

Center Freq.:	433MHz Recom.
Freq. Range:	429–437MHz
Wavelength:	1/4-wave
VSWR:	≤ 1.9 typ. at center
Peak Gain:	–6.4dBi Impedance:
	50-ohms
Oper. Temp. Range:	–40°C to +130°C
Connection:	Surface-mount

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

FCC ID: N74-CP8563

IC: 10336A-CP8563



Report No.:

31550218.003 CP8563.doc

Page 11 of 31



Figure 1 – External Photo of EUT (front)



Figure 2 – External Photo of EUT (back)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4 Emissions

4.1 Radiated Emissions

This test measures the electromagnetic levels of spurious signals generated by the EUT that radiated from the EUT and may affect the performance of other nearby electronic equipment.

4.1.1 Over View of Test

Results	Complies (as tested per this report)				Date	3/23/2015		
Standard	FCC Part 15.209 and RSS - 210 Issue 8							
Product Model	CP8563			Serial#	TS-1			
Configuration	Tested in 10m Semi-Anechoic Chamber							
Test Set-up	Tested in 10m Semi-Anechoic Chamber, placed on turn-table at 3 meters, see test plans for details							
EUT Powered By	3 VDC	Temp	24°C	Humidity	52%	Pressure	1013mbar	
Frequency Range	30 - 1000 MHz @ 3m Spurious emissions to 2500 Mhz							
Perf. Criteria	Class B. (Below Limit)		Perf. Verification	Readings Under Limit				
Mod. to EUT	None		Test Performed By	Randall Masline				

4.1.2 Test Procedure

Radiated FCC emissions tests were performed using the procedures of ANSI C63.10:2013 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration. Further radiated emission tests were performed per the procedures stated in the other emissions standards listed in this report.

The frequency range from 30 - 1000 MHz was investigated for radiated emissions.

Radiated emission testing was first performed at a distance of 3 meters in the semi-anechoic chamber in order to identify the specific frequencies for which these measurements will be made on the 10 m OATS, at a distance of 3 meters.

4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.1.1 Final Graphs

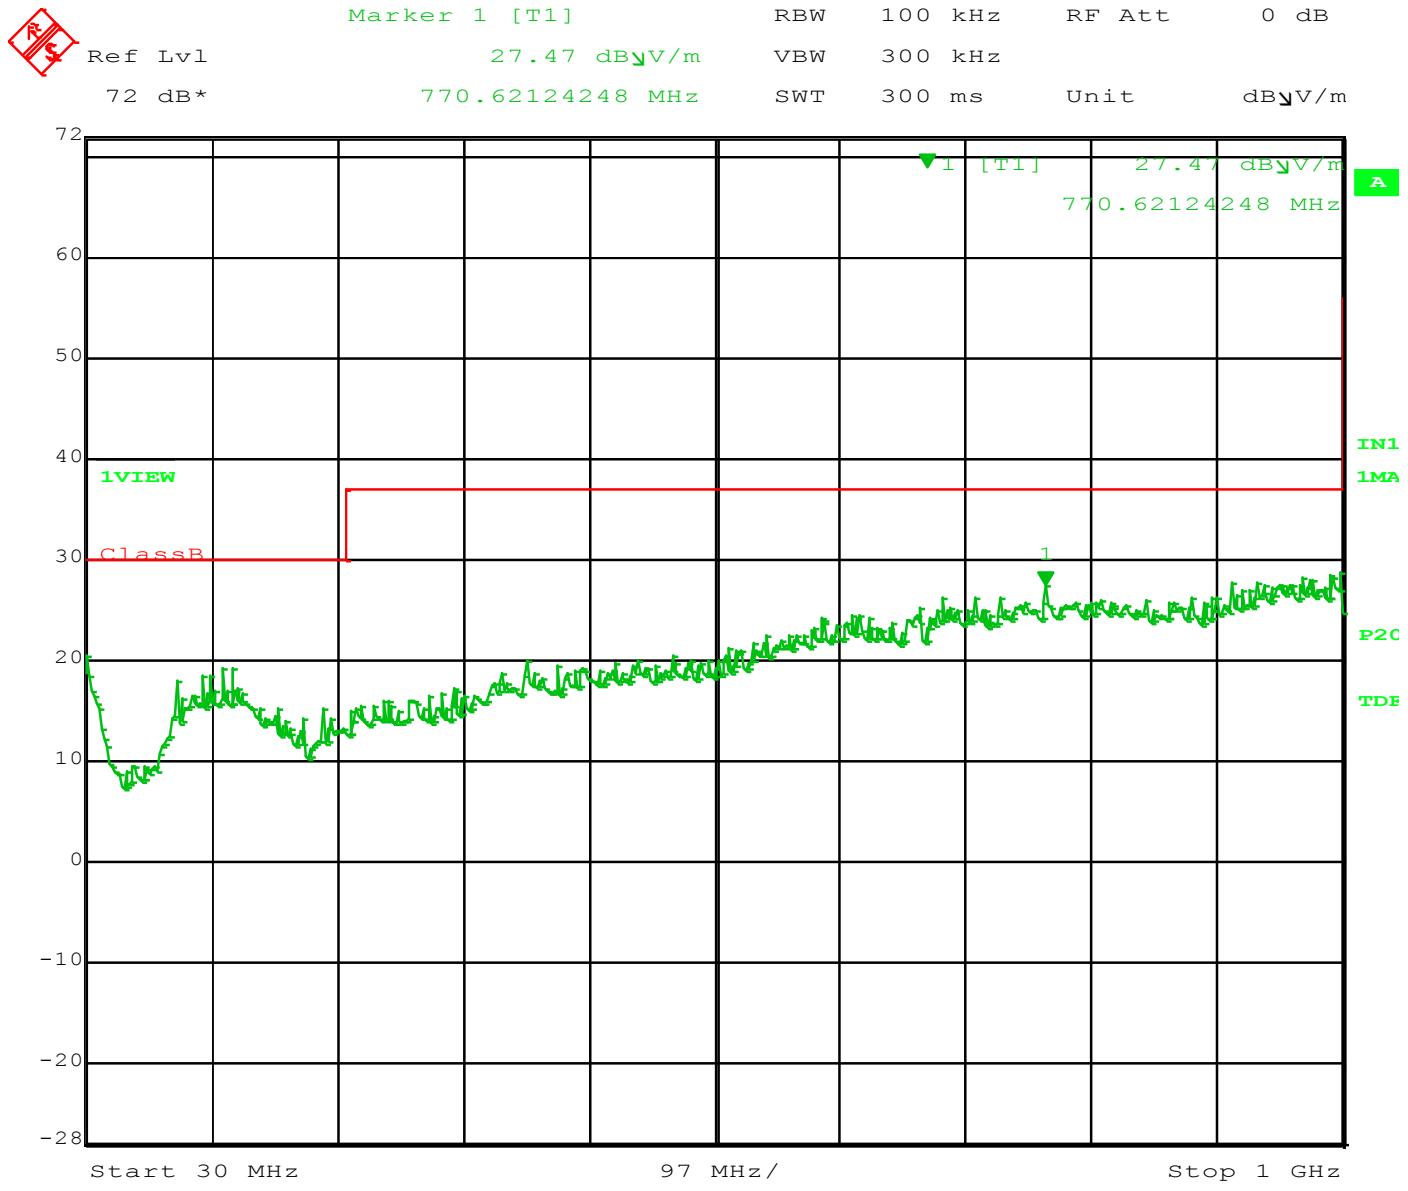


Figure 3 – Horizontal 30 – 1000 MHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

FCC ID: N74-CP8563**IC: 10336A-CP8563****Report No.:****31550218.003 CP8563.doc****Page 14 of 31**Ref Lvl
72 dB*

Marker 3 [T1]

21.12 dB_V/m

RBW 100 kHz

RF Att


0 dB

119.41883768 MHz

VBW 300 kHz

SWT 300 ms

Unit

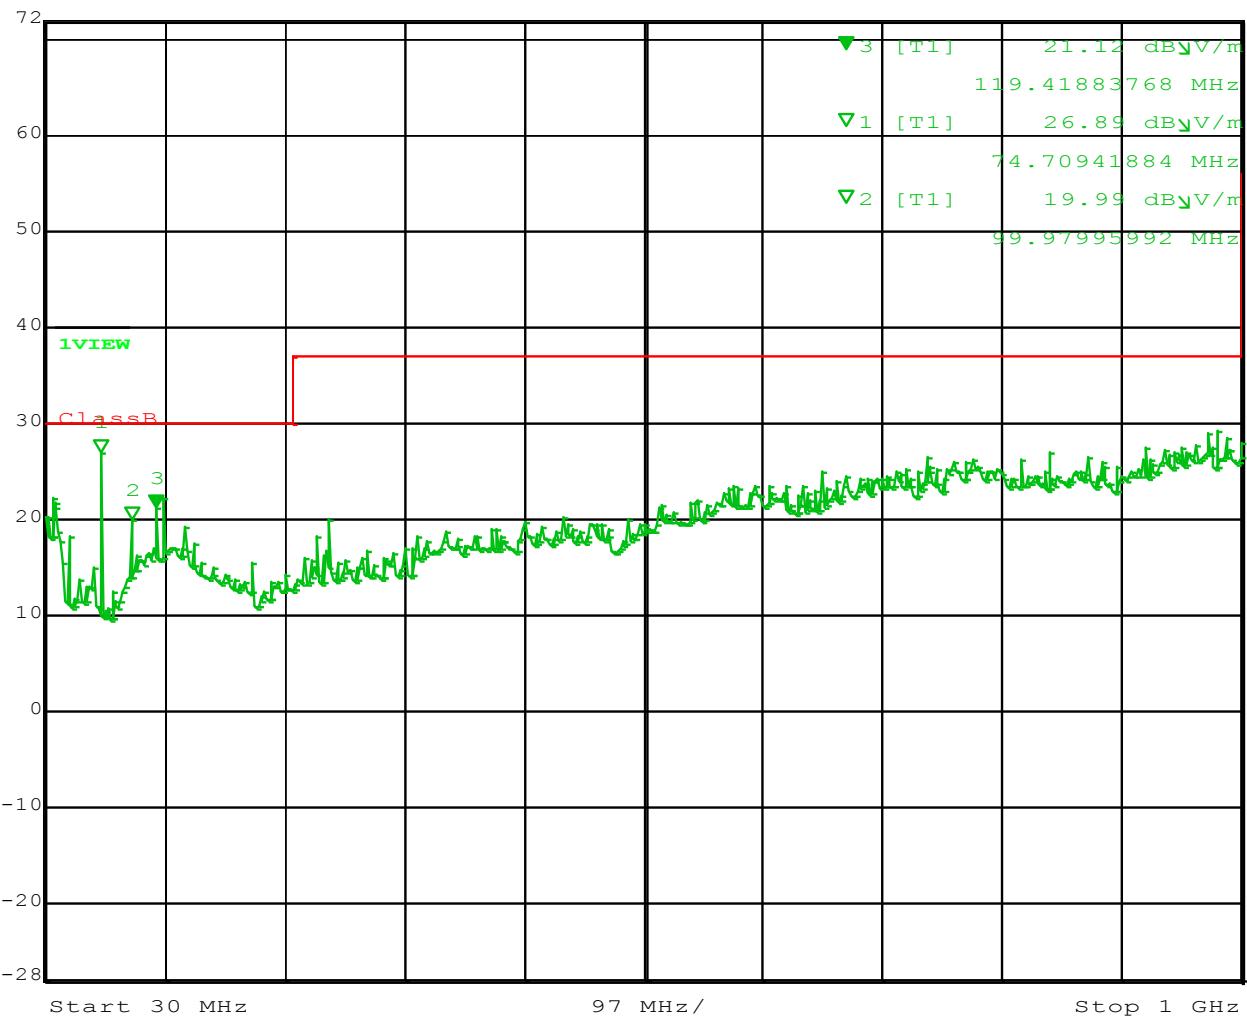dB_V/m

Date: 23.FEB.2015 22:46:40

Figure 4 – Vertical 30 – 1000 MHz

Frequency (MHz)	Peak	QP	Result
119.418	21.12	20.7	Complies
74.704	26.89	22.58	Complies
99.979	19.99	17.71	Complies

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.2 Fundamental Field Strength and Harmonic Emissions

This test evaluates the field strength of the fundamental and field strength of the spurious emissions.

4.2.1 Test Over View

Results	Complies (as tested per this report)				Date	3/12/2015		
Standard	FCC Part 15.231 and RSS - 210 Issue 8							
Product Model	CP8563			Serial#	TS-1			
Configuration	Tested in 10m Semi-Anechoic Chamber							
Test Set-up	EUT placed on table Tested in 10m Semi-Anechoic Chamber							
EUT Powered By	3 VDC	Temp	21° C	Humidity	48%	Pressure	1021mbar	
Perf. Criteria	15.231 (Below Limit)		Perf. Verification	Readings under Limit				
Mod to EUT	None		Test Performed By	Randall Masline				

4.2.2 Test Procedure

The EUT was placed on a table 3 meters from the antenna and all 3 orthogonal positions were investigated for highest field strength and highest spurious emissions. The fundamental frequency of the EUT is 433 MHz, therefore in addition to the requirements of 15.205 the EUT was tested to meet the following requirements in 15.231(b)

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70.....	2,250.....	225
70-130.....	1,250.....	125
130-174.....	\1\ 1,250 to 3,750	\1\ 125 to 375
174-260.....	3,750.....	375
260-470.....	\1\ 3,750 to 12,500.	\1\ 375 to 1,250
Above 470.....	12,500.....	1,250

4.2.3 Deviations

There were no deviations from the test methodology listed in the test plan for the harmonic current emissions test.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.2.4 Final Test

All final measurements were below (in compliance) the limits.

4.2.5 Final Data

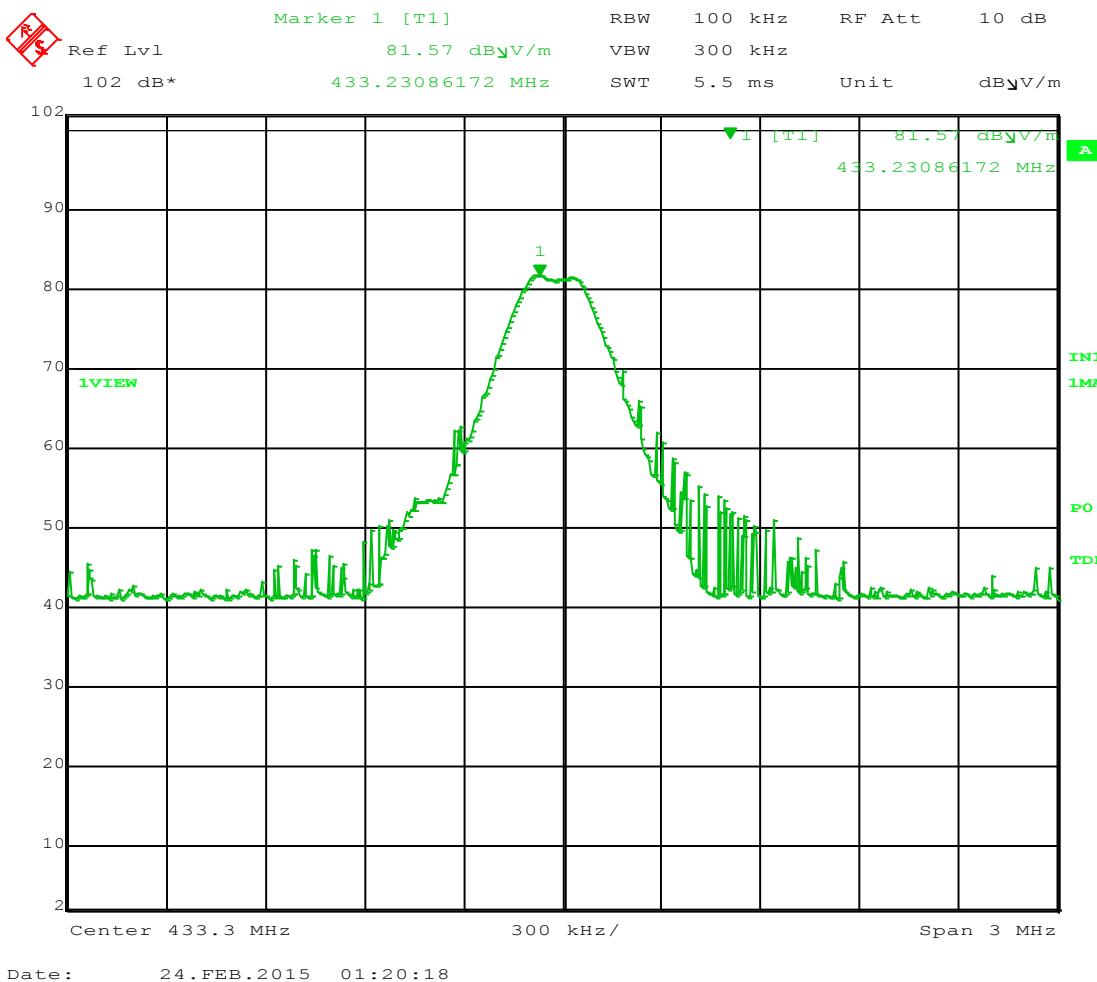


Figure 5 – Peak Field Strength Horizontal Polarity is 81.57 dBuV


Ton = 10mS

Toff = 15 Seconds

Duty Cycle = $100 * (10mS) / (10mS + 15 \text{ Seconds}) = .067\%$ Limit is then raised by 20db to 100.82 dBuV/m

Per FCC Section 15.35 for a peak emission

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

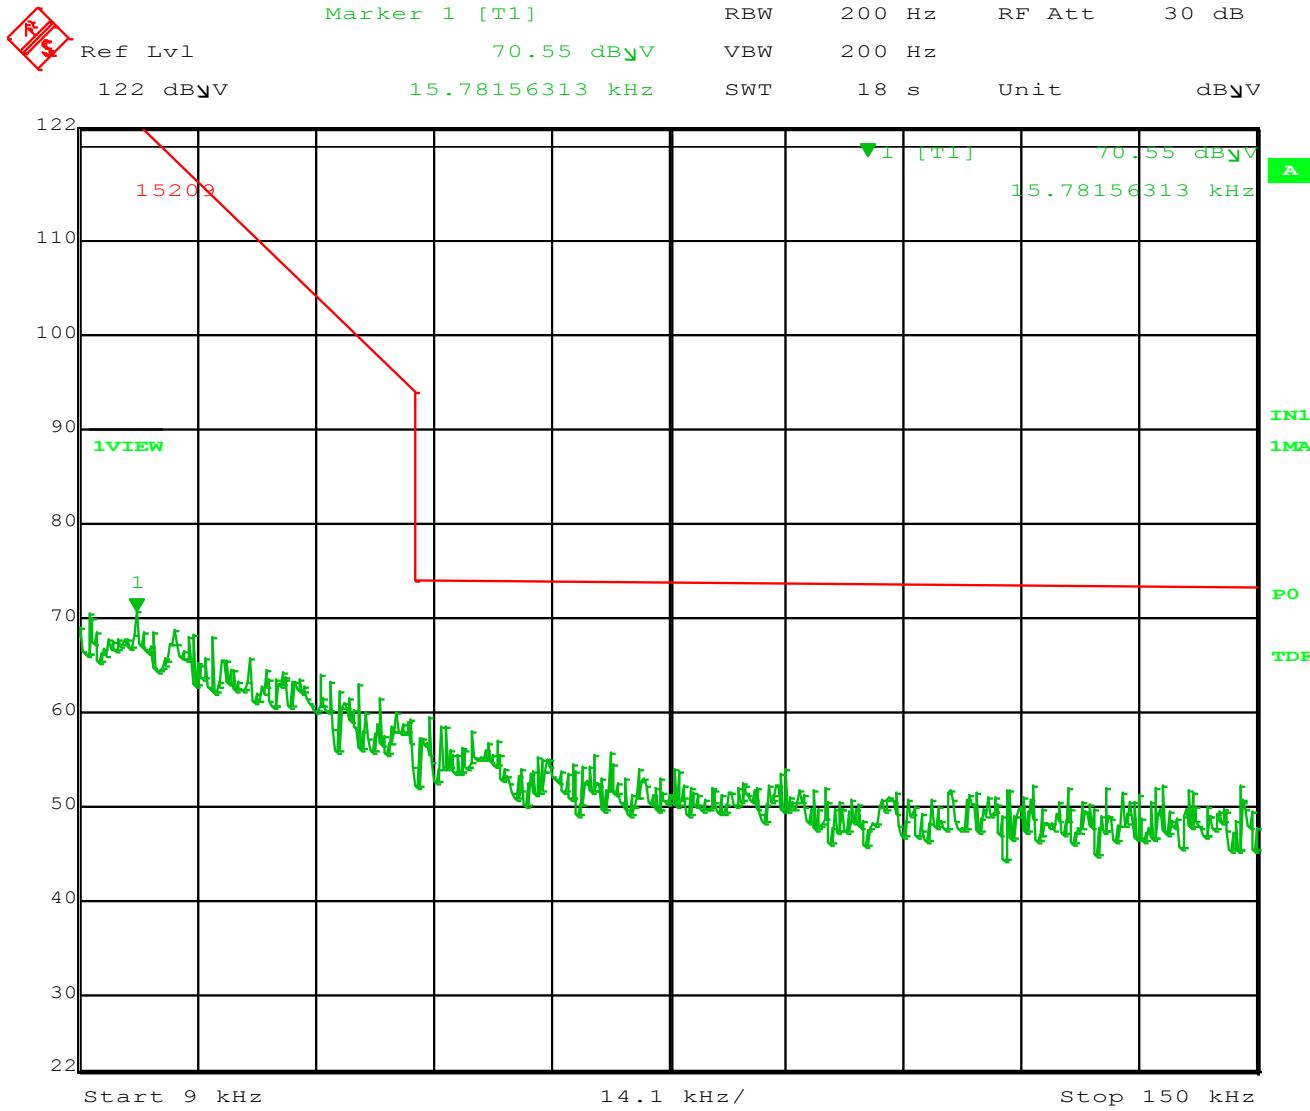

Date: 23.MAR.2015 10:12:38

Figure 6 – Spurious Emissions (Parallel) 9 kHz to 150 kHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

FCC ID: N74-CP8563




IC: 10336A-CP8563

Report No.:

31550218.003 CP8563.doc

Page 18 of 31

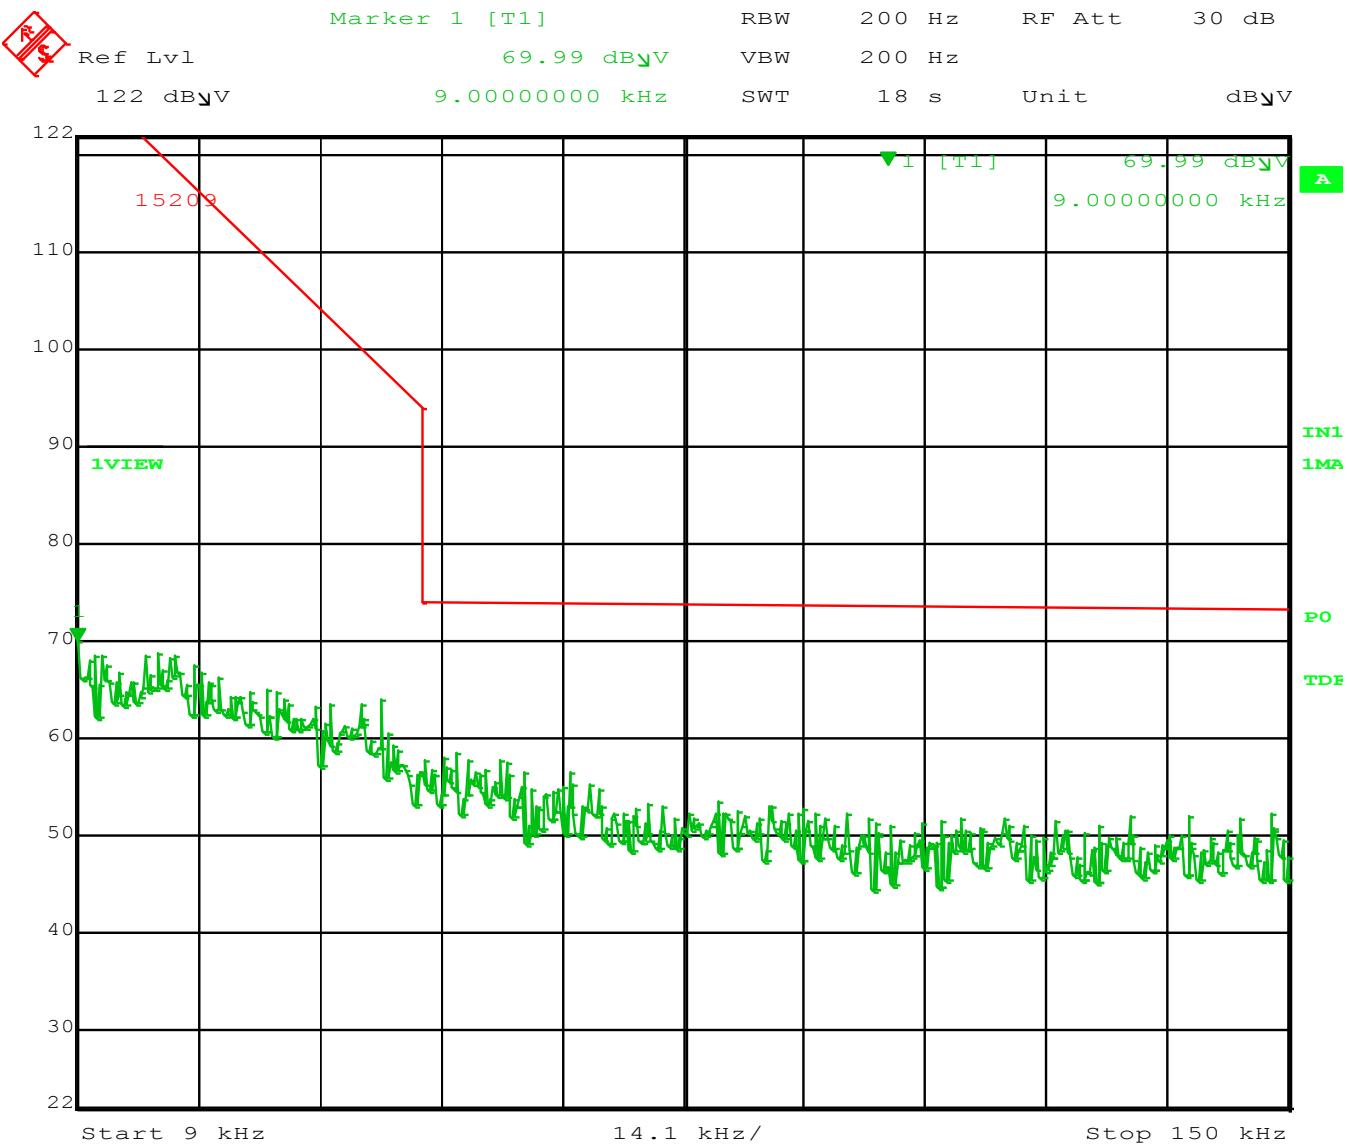

Date: 23.MAR.2015 10:13:40

Figure 7 – Spurious Emissions (Perpendicular) 9 kHz to 150 kHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

FCC ID: N74-CP8563



IC: 10336A-CP8563

Report No.:

31550218.003 CP8563.doc

Page 19 of 31


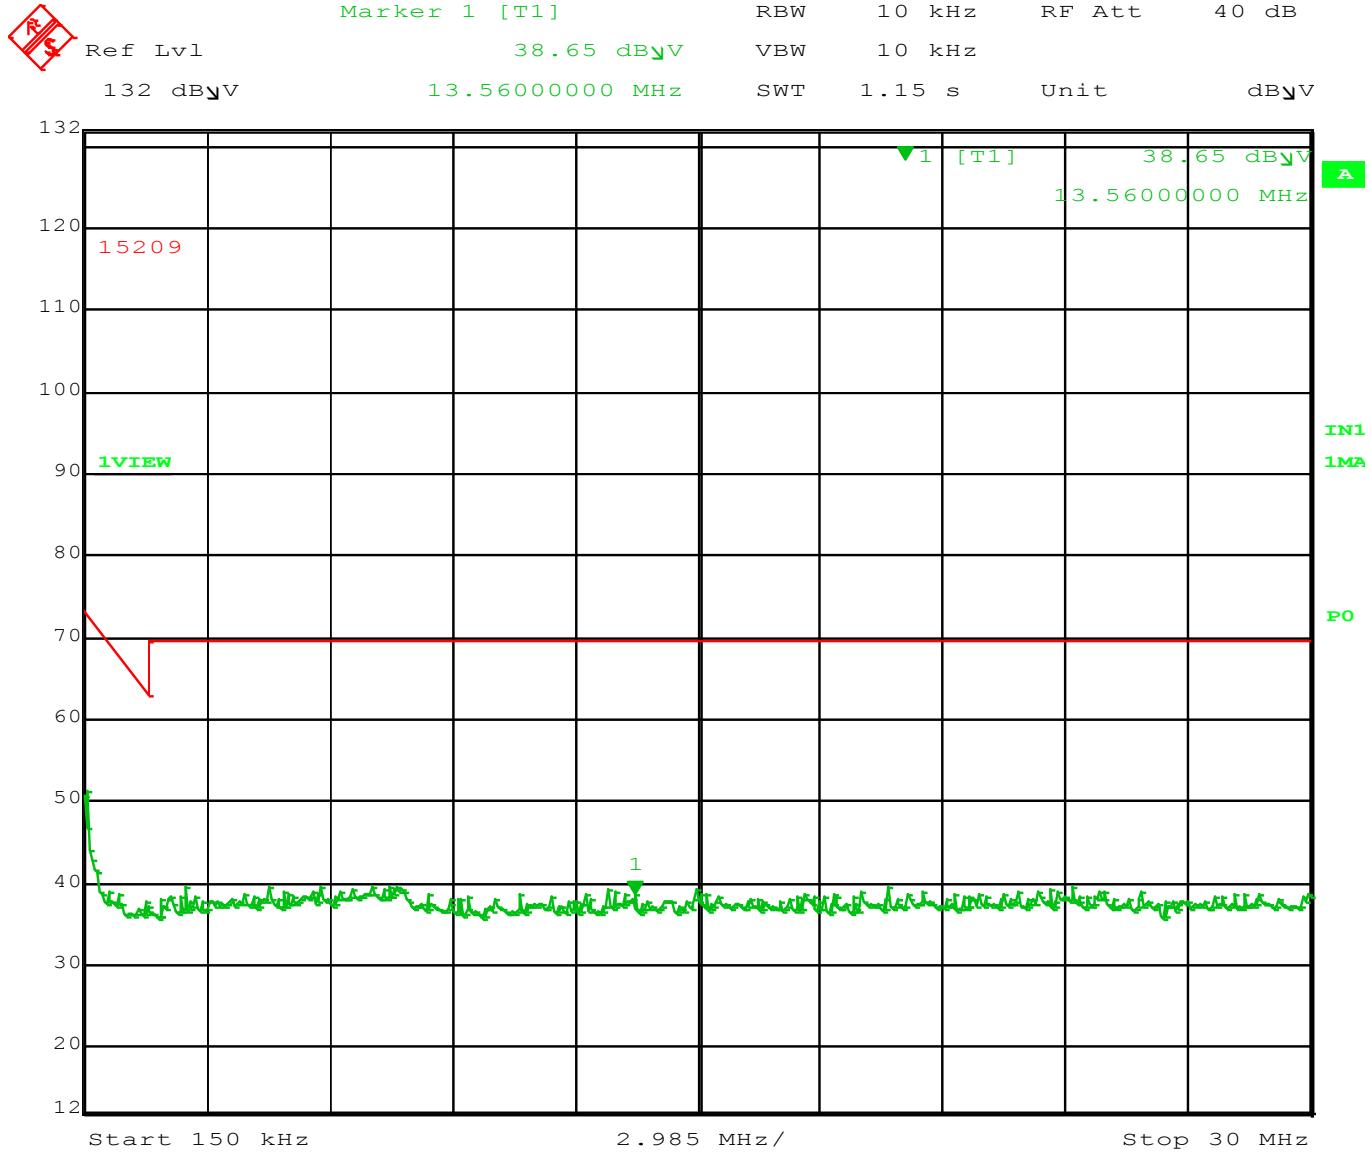


Figure 8 – Spurious Emissions (Parallel) 150 kHz to 30 MHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

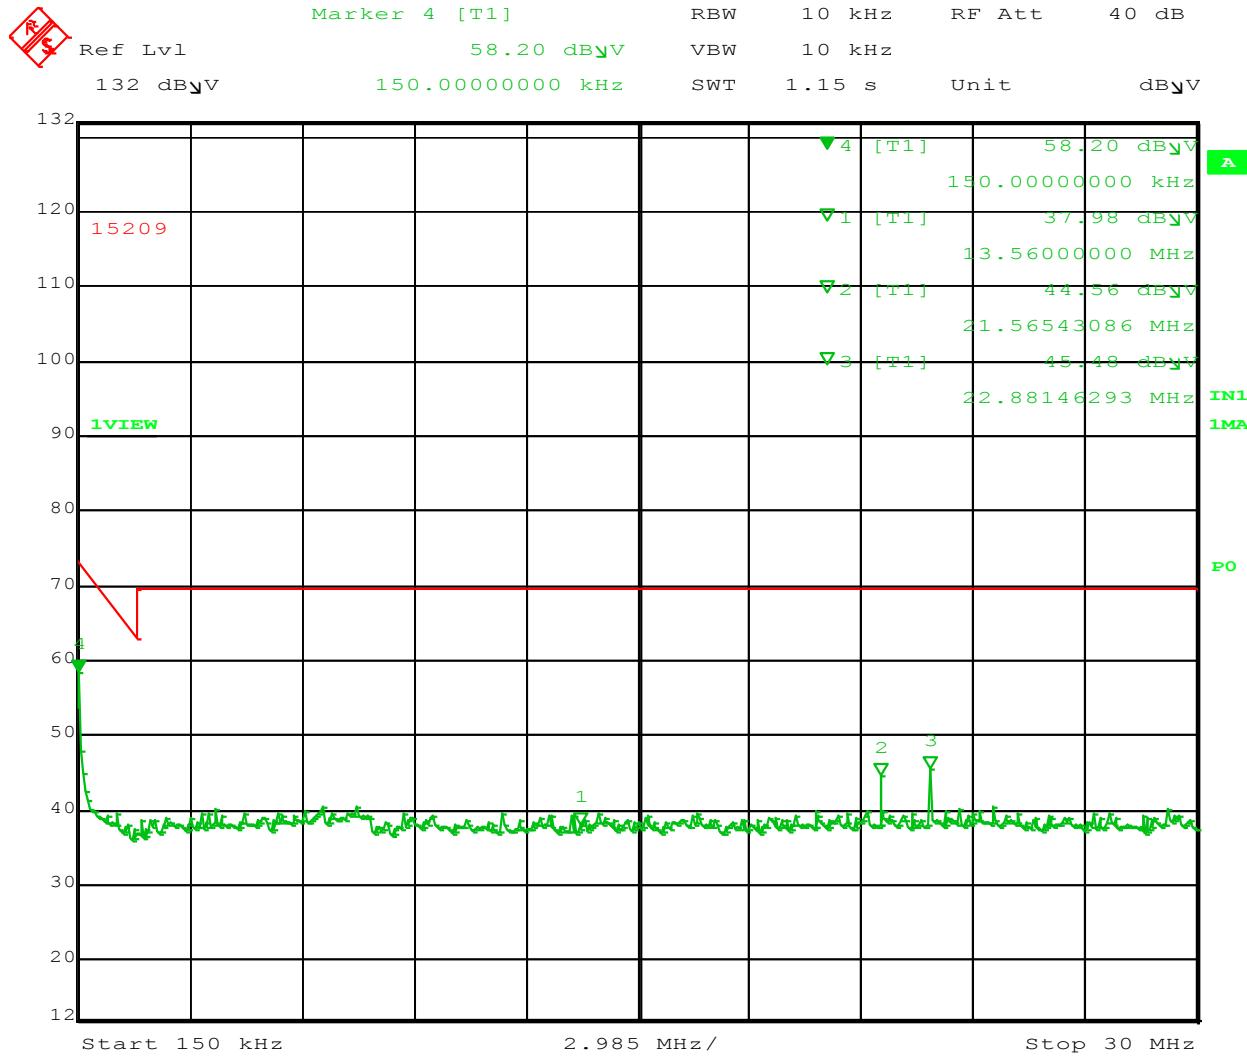

Date: 20.MAR.2015 14:07:04

Figure 9 – Spurious Emissions (Perpendicular) 150 kHz to 30 MHz

Frequency (MHz)	Peak	QP	Result
21.565	44.56	42.21	Complies
22.881	45.48	43.15	Complies

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

FCC ID: N74-CP8563




IC: 10336A-CP8563

Report No.:

31550218.003 CP8563.doc

Page 21 of 31

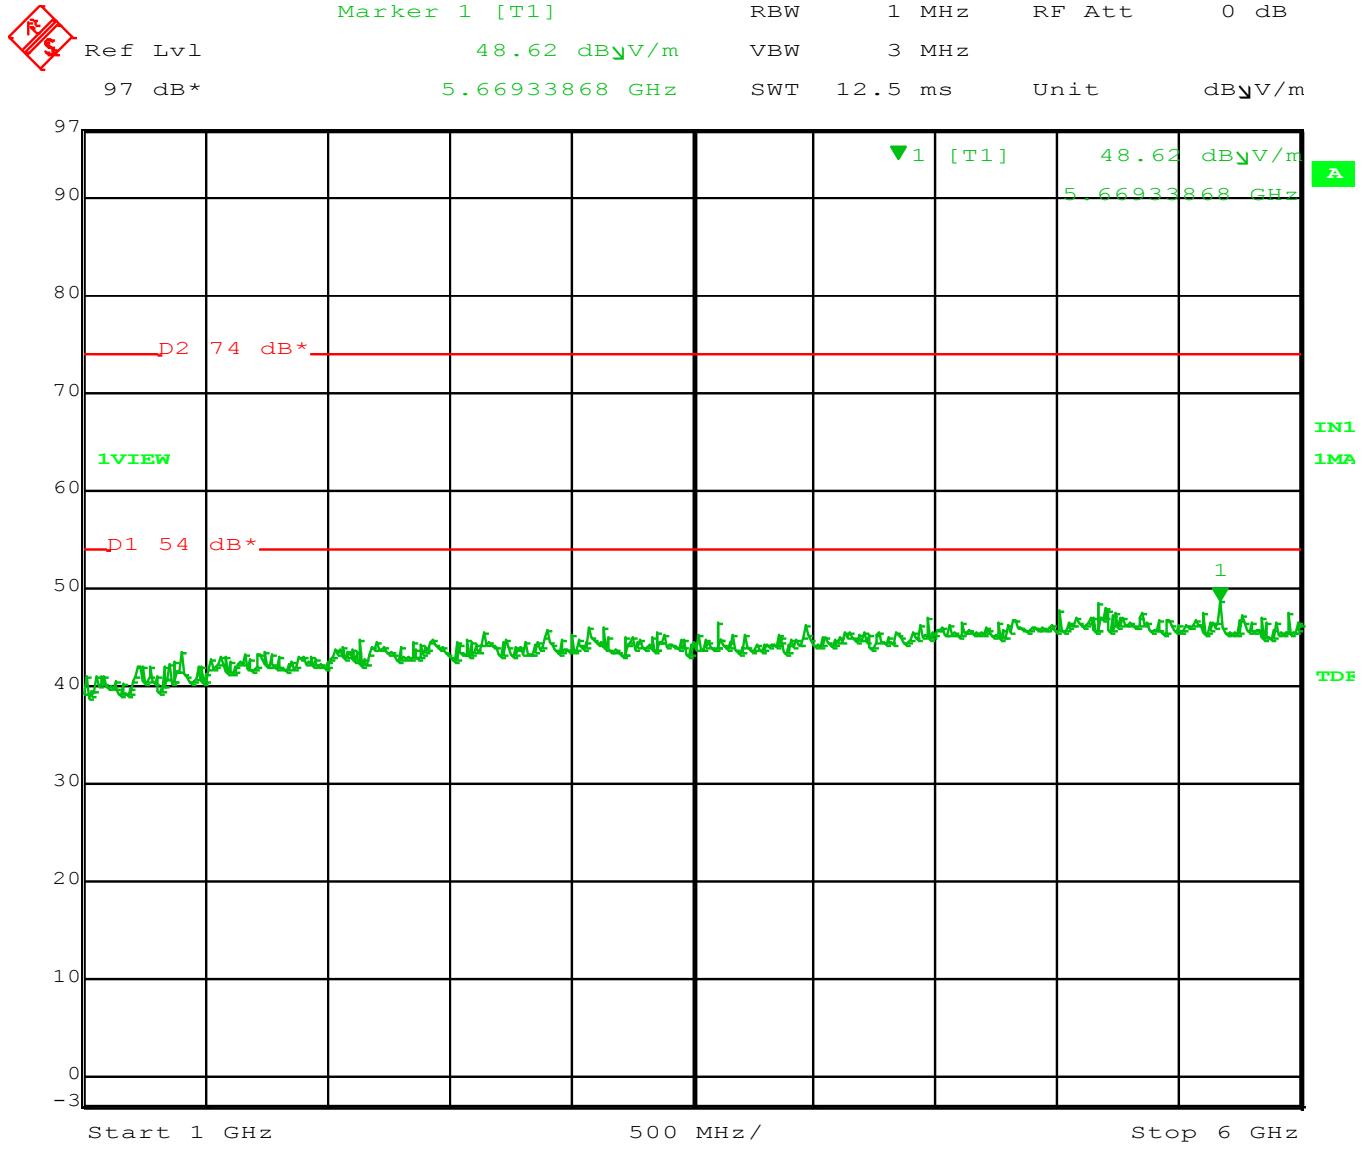

Date: 12.MAR.2015 10:13:36

Figure 10 – Spurious Emissions (Horizontal) 1 to 6 GHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

FCC ID: N74-CP8563




IC: 10336A-CP8563

Report No.:

31550218.003 CP8563.doc

Page 22 of 31

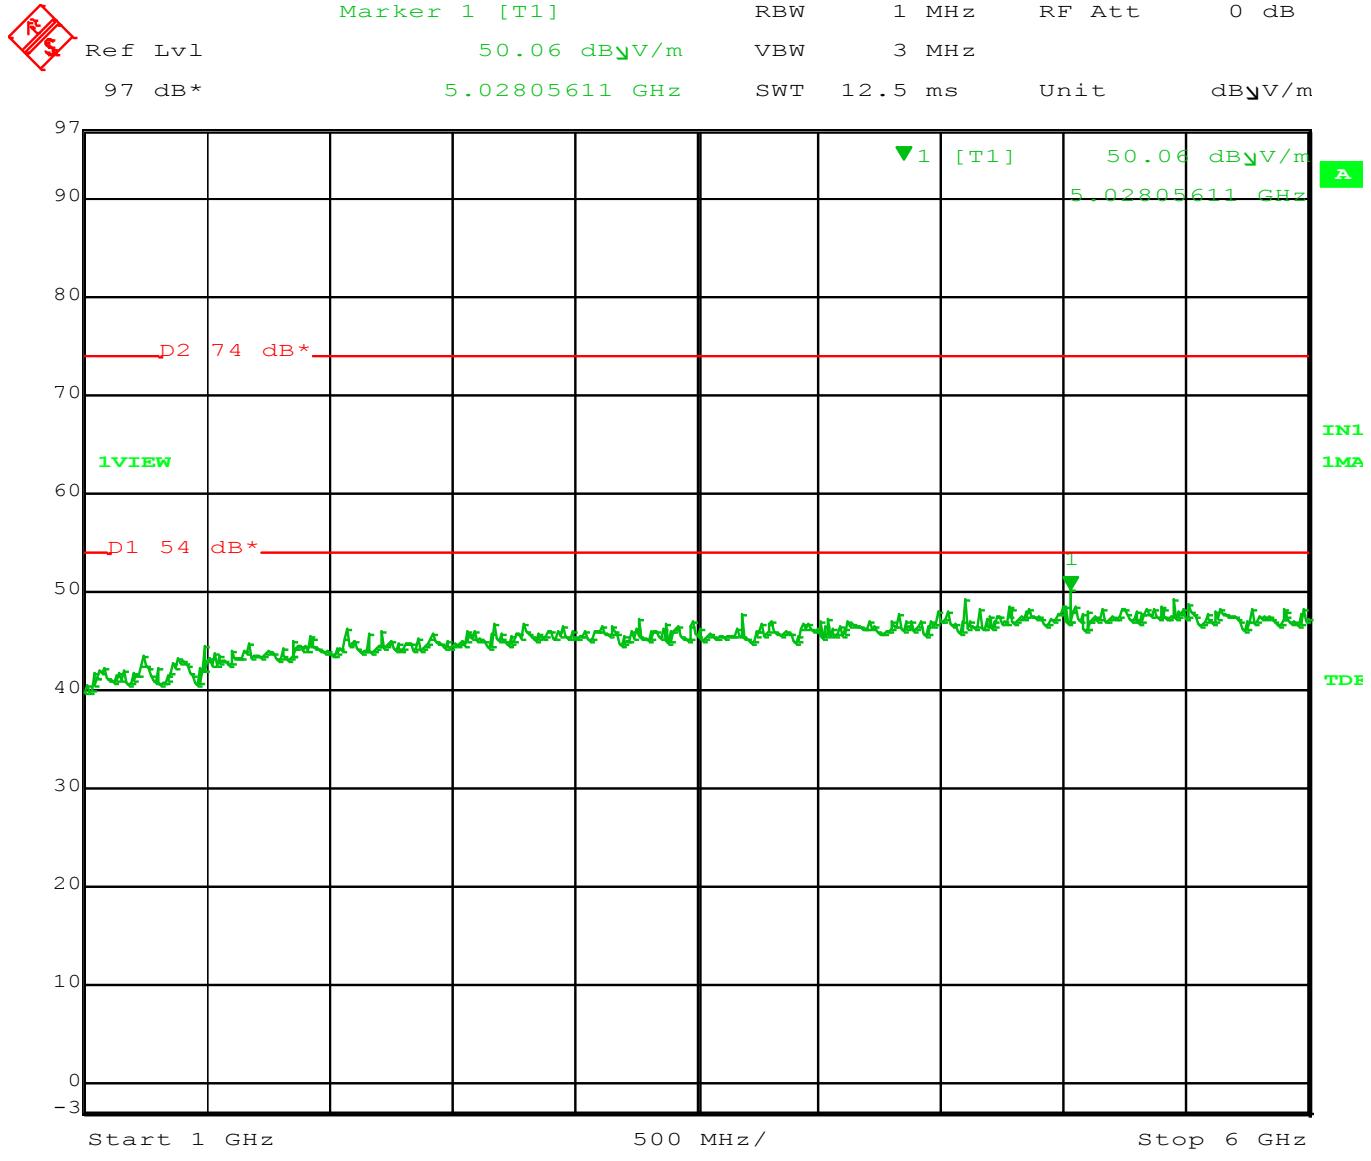

Date: 12.MAR.2015 10:13:10

Figure 11 – Spurious Emissions (Vertical) 1 to 6 GHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.3 Bandwidth

This test measures the Bandwidth of the fundamental emission.

4.3.1 Test Over View

Results	Complies (as tested per this report)				Date	3/23/2015						
Standard	FCC Part 15.231 and RSS - 210 Issue 8											
Product Model	CP8563			Serial#	TS-1							
Configuration	Tested in 10m Semi-Anechoic Chamber											
Test Set-up	EUT placed on table											
EUT Powered By	3 VDC	Temp	21° C	Humidity	48%	Pressure	1021mbar					
Perf. Criteria	Part 15.231 (Below Limit)		Perf. Verification	Readings under Limit								
Mod to EUT	None		Test Performed By	Randall Masline								

4.3.2 Test Procedure

Bandwidth measurements were made according to FCC part 15.31 and FCC part 15.231(c). For Industry Canada the bandwidth measurements were made in accordance with RSS – 210 Issue 8

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

The Fundamental Frequency is 433 MHz therefore 0.25% of 433 MHz is 1082.5 Mhz


4.3.3 Deviations

There were no deviations from the test methodology.

4.3.4 Final Test

All final measurements were within (in compliance) the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

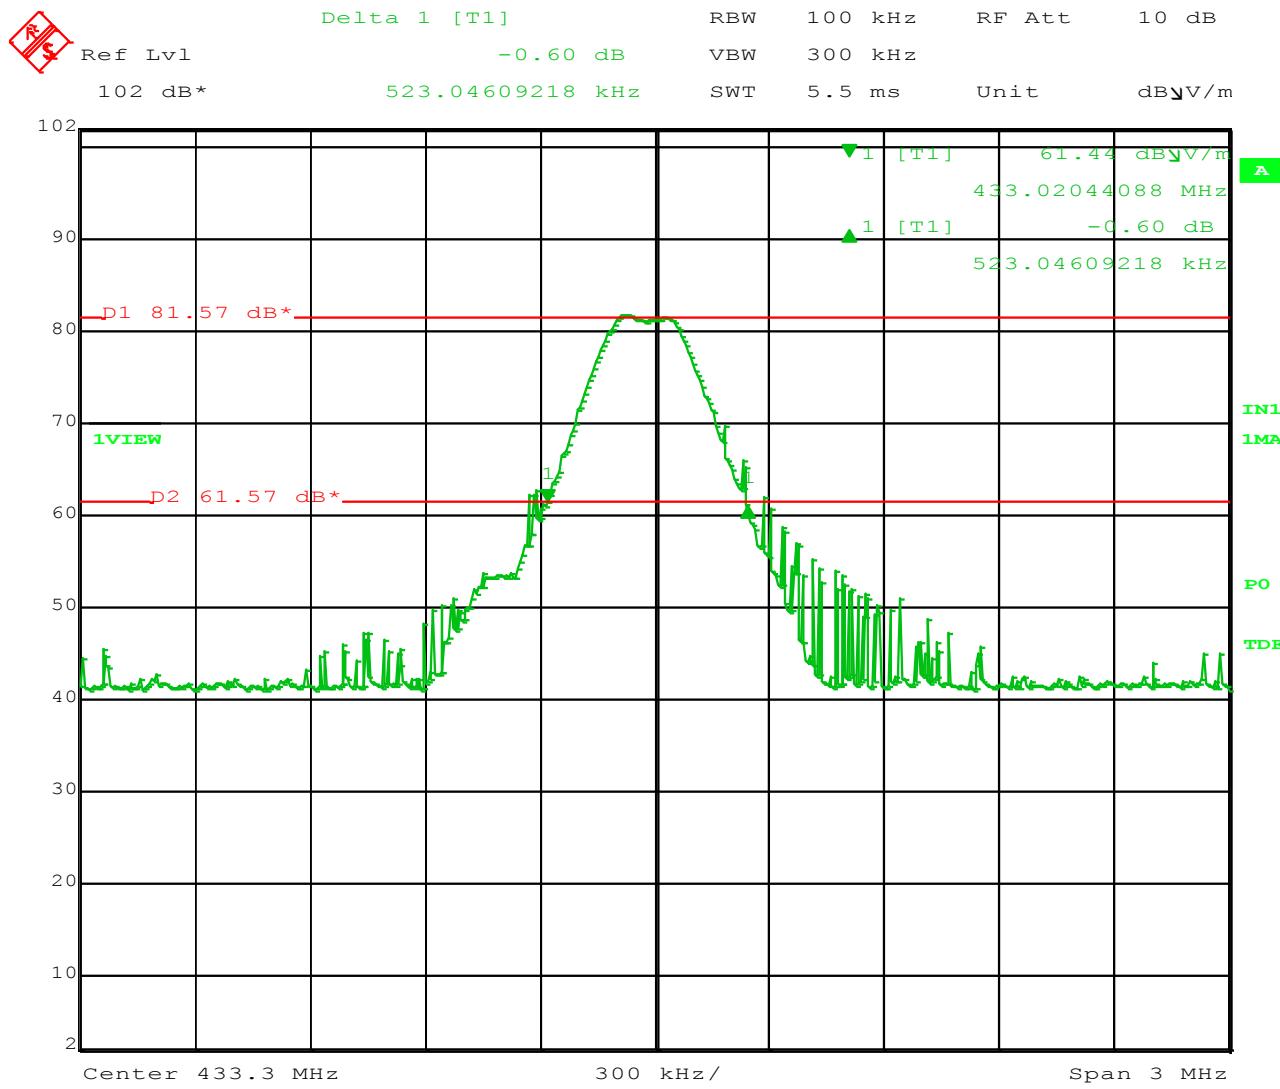

Date: 24.FEB.2015 01:22:02

Figure 12 – 20 dB Bandwidth is 523.04 kHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

FCC ID: N74-CP8563




IC: 10336A-CP8563

Report No.:

31550218.003 CP8563.doc

Page 25 of 31

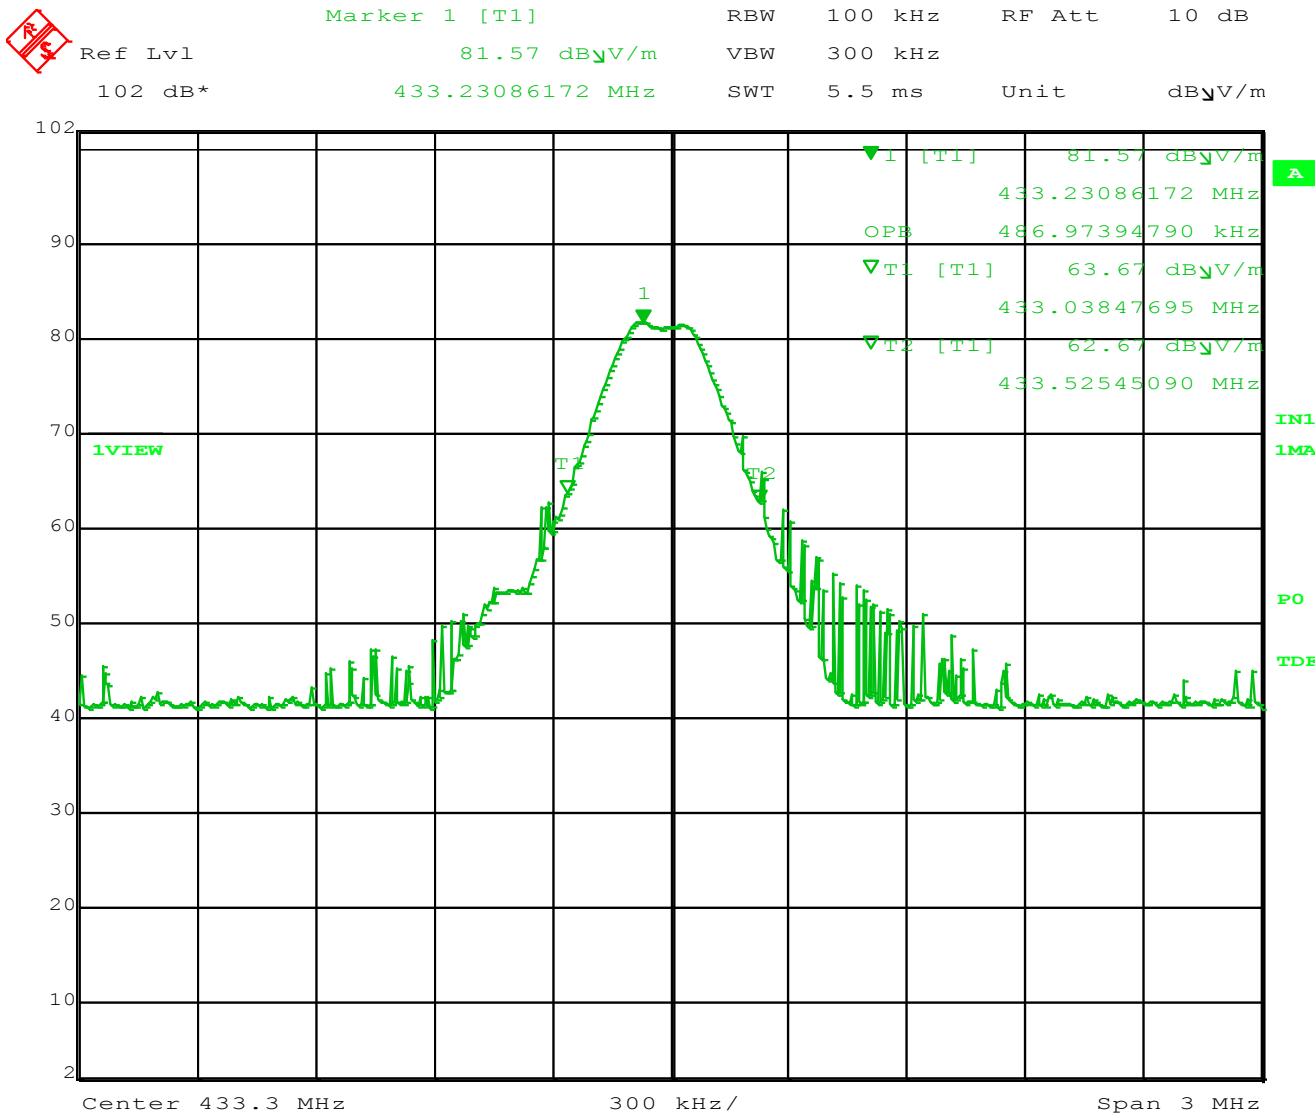

Date: 24.FEB.2015 01:20:48

Figure 13 – 99% BW is 486.97 kHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.4 Deactivation of Transmitter

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

4.4.1 Over View of Test

Results	Complies (as tested per this report)			Date	5/19/2015	
Standard	FCC Part 15.231(a)					
Product Model	CP8563		Serial#	TS-1		
Configuration	See test plan for details					
Test Set-up	EUT placed on table see test plans for details					
EUT Powered By	3.0 VDC Battery	Temp	22° C	Humidity	37%	Pressure
Frequency Range	433.27 MHz					
Perf. Criteria	5 Seconds (Below Limit)	Perf. Verification				
Mod. to EUT	None	Test Performed By		Randall Masline		

4.4.2 Test Procedure

Testing was performed by sweeping the fundamental frequency for 30 seconds and manually operating the transmitter. The EUT does employ a manual switch – in normal operation of the device the active tag transmits once every 6 hours for a duration of 1.7ms for each transmission.

4.4.3 Deviations

There were no deviations from the test methodology listed in the test plan for the conducted emission test.

4.4.4 Final Test

All final measurements were below (in compliance) the limits.

NOTE: In normal operation of the device the active tag transmits once every 6 hours for a duration of 1.7ms for each transmission.

FCC ID: N74-CP8563



IC: 10336A-CP8563

Report No.:

31550218.003 CP8563.doc

Page 27 of 31

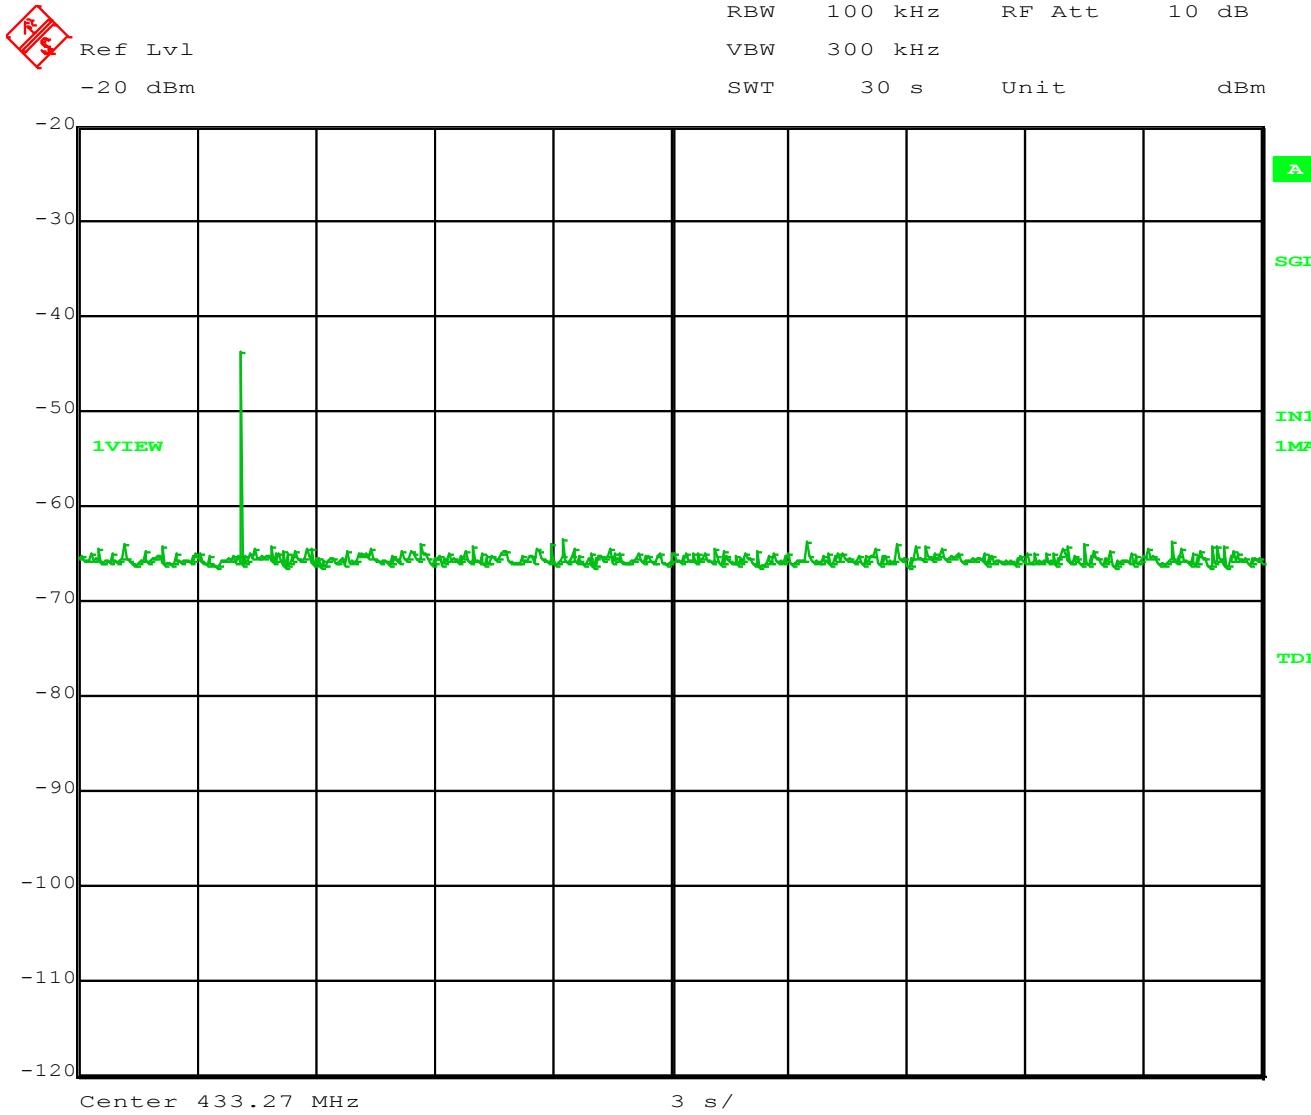


Figure 14 – 30 second sweep of before and after manually operating transmitter

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

5 MPE Evaluation

Model CP8563

FCC:

Controlled Exposures - Limit =	1.443333333	mW/cm ²
Uncontrolled Exposures - Limit =	0.288666667	mW/cm ²
Pd =	0.0000001	mW/cm ²
Controlled Margin to Limit =	1.4433	mW/cm ²
Uncontrolled Margin to Limit =	0.2887	mW/cm ²

Limit for 300-1500 MHz: $f / 300$ mW/cm²

Limit for 300-1500 MHz: $f / 1500$ mW/cm²

$$Pd = (Pout*G) / (4*\pi*R^2)$$

IC:

Controlled Exposures to Limit =	13.4319849	W/m ²
Uncontrolled Exposures Limit =	1.659248092	W/m ²
Pd =	0.000020	W/m ²
Controlled Margin to Limit =	13.4320	W/m ²
Uncontrolled Margin to Limit =	1.6592	W/m ²

Limit for 100-6000 MHz: $0.6455 * f^{0.5}$ W/m²

Limit for 300-6000 MHz: $0.02619 * f^{0.6834}$ W/m²

$$Pd = (Pout*G) / (4*\pi*R^2)$$

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Appendix A

6 Test Plan

This test report is intended to follow this test plan outlined here in unless other wise stated in this here report. The following test plan will give details on product information, standards to be used, test set ups and refer to TUV test procedures. The test procedures will give the steps to be taken when performing the stated test. The product information below came via client, product manual, product itself and or the internet.

6.1 General Information

Client	OMNI-ID
Address 1	21200 Ridgeway Avenue
Address 2	Rochester, NY 14615
Contact Person	Len Desmond
Telephone	585-713-1021
Fax	
e-mail	len.desmond@omni-id.com

6.2 Model(s) Name

CP8563

6.3 Type of Product

Active RFID Tag

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

6.4 Equipment Under Test (EUT) Description

The 8564 is an active RFID tag that operates at 433 MHz

6.5 Modifications

No modifications were necessary to meet the requirements.

6.6 Product Environment

<input checked="" type="checkbox"/>	Residential	<input type="checkbox"/>	Hospital
<input checked="" type="checkbox"/>	Light Industrial	<input type="checkbox"/>	Small Clinic
<input type="checkbox"/>	Industrial	<input type="checkbox"/>	Doctor's office
<input type="checkbox"/>	Other		

*Check all that apply

6.7 Countries

<input checked="" type="checkbox"/>	USA
<input checked="" type="checkbox"/>	Canada

*Check all that apply

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

FCC ID: N74-CP8563

IC: 10336A-CP8563



Report No.:

31550218.003 CP8563.doc

Page 31 of 31

6.8 General Product Information

Size	H	1.5cm	W	5cm	L	14cm
Weight	<1kg		Fork-Lift Needed		No	
Notes						

6.9 EUT Electrical Powered Information

6.9.1 Electrical Power Type

<input type="checkbox"/>	AC	<input type="checkbox"/>	DC	<input checked="" type="checkbox"/>	Batteries	<input type="checkbox"/>	Host -
--------------------------	----	--------------------------	----	-------------------------------------	-----------	--------------------------	--------

6.9.2 Electrical Power Information

Name	Type	Voltage		Frequency	Current	Notes
		min	max			
3.0 VDC Battery		1.5	3.5	DC		
Notes						

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.