



**FCC CFR47 PART 22 SUBPART H
AND PART 24 SUBPART E
CLASS II PERMISSIVE CHANGE
CERTIFICATION TEST REPORT
FOR**

EXPRESS MINI-PCI USB WIRELESS CDMA MODEM MODULE

MODEL NUMBER: MC5720

FCC ID: N7N-MC5720

REPORT NUMBER: 06U10160-1

ISSUE DATE: MARCH 30, 2006

Prepared for
**SIERRA WIRELESS
2290 COSMOS CT.
CARLSBAD, CA 92009, USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Date	Revisions	Revised By
--	3/30/06	Initial Issue	Thu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT	6
5.2. CLASS II PERMISSIVE CHANGE DESCRIPTION	6
5.3. MAXIMUM OUTPUT POWER	6
5.4. DESCRIPTION OF AVAILABLE ANTENNAS.....	7
5.5. SOFTWARE AND FIRMWARE	7
5.6. WORST-CASE CONFIGURATION AND MODE.....	7
5.7. DESCRIPTION OF TEST SETUP	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. LIMITS AND RESULTS	10
7.1. RADIATED RF POWER OUTPUT.....	10
7.2. FIELD STRENGTH OF SPURIOUS EMISSION	13
8. SETUP PHOTOS	16

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SIERRA WIRELESS
2290 COSMOS CT.
CARLSBAD CALIFORNIA 92009
U.S.A

EUT DESCRIPTION: EXPRESS MINI-PCI USB WIRELESS CDMA MODEM MODULE

MODEL: MC5720

SERIAL NUMBER: LV-A0096

DATE TESTED: MARCH 21-22, 2006


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22 SUBPART H	NO NON-COMPLIANCE NOTED
FCC PART 24 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

HSIN FU SHIH
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA/EIA 603C (2004), ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15 and FCC CFR 47 Part 22H and 24E.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a dual band 800 / 1900MHz Express Mini-PCI USB Wireless CDMA Modem Module, and manufactured by Sierra Wireless, Inc.

5.2. CLASS II PERMISSIVE CHANGE DESCRIPTION

Add one 15" Laptop of ThinkPad R60 series.

5.3. MAXIMUM OUTPUT POWER

The transmitter has maximum ERP and EIRP output powers as follows:

Part 22 (824 - 849MHz) & Part 24 (1850 - 1910MHz) Authorized Band:

Frequency Range (MHz)	Modulation	ERP Peak Power (dBm)	ERP Peak Power (mW)
824.7 - 848.31	CDMA	25.90	389.05

Frequency Range (MHz)	Modulation	ERP Peak Power (dBm)	ERP Peak Power (mW)
1851.25 - 1908.75	CDMA	25.90	389.05

NOTE: RBW=VBW=3MHz

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an inverted F antenna, with a maximum gain of -0.8 dBi for Cellular band and -0.52 dBi for PCS band.

5.5. SOFTWARE AND FIRMWARE

The test utility software used during testing was Hyperterminal.

5.6. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. Please refer to the previous project 05U3389.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT


PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	IBM	92P1154	11S92P1154Z1ZACU5CM32V	NA
Laptop	IBM	Thinkpad R60	LV-A0096	DoC

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	NA
2	DC	1	DC	Un-shielded	0.5m	NA

TEST SETUP

The EUT is installed inside the ThinkPad R60 during the tests. The HyperTerminal exercised the EUT.

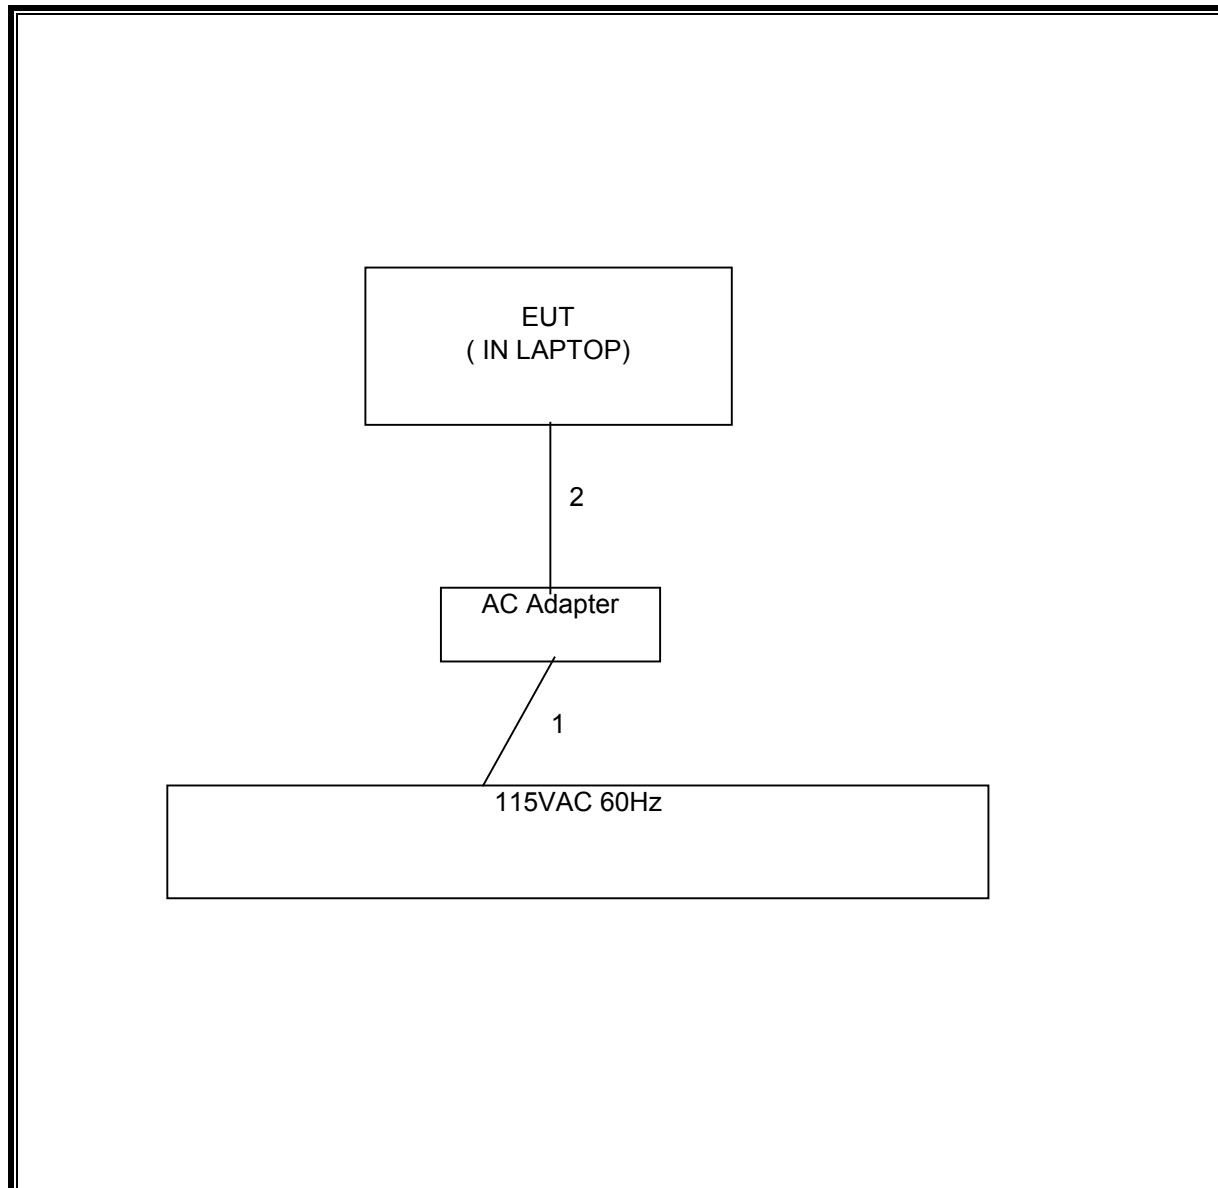RADIATED TEST SETUP DIAGRAM

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	9/3/06
Preamplifier, 1300 MHz	HP	8447D	1937A02062	1/7/07
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	7/26/06
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/06
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/06
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	8/17/06
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	7/6/06
Signal Generator, 1024 MHz	R & S	SMY01	DE 12311	04/11/06
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	US42510266	10/19/06
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	04/22/06
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	04/22/06

7. LIMITS AND RESULTS

7.1. RADIATED RF POWER OUTPUT

LIMIT

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

The transmitter output is connected to the spectrum analyzer.

RESULTS

No non-compliance noted.

800 MHz CELL CDMA Modulation

Channel	Frequency (MHz)	ERP Peak Power (dBm)	ERP Peak Power (mW)
Low	824.7	23.60	229.09
Middle	836.5	24.20	263.03
High	848.3	25.90	389.05

1900 MHz PCS CDMA Modulation

Channel	Frequency (MHz)	EIRP Peak Power (dBm)	EIRP Peak Power (mW)
Low	1851.25	24.50	281.84
Middle	1880.00	25.90	389.05
High	1908.75	24.30	269.15

NOTE: RBW=VBW=3MHz.

CDMA Cellular Band Output Power (ERP)

03/22/06 **High Frequency Substitution Measurement**
Compliance Certification Services, Morgan Hill 5m Chamber Site

Test Engr: Sunny Shih
Project #: 06U10160-1
Company: Sierra Wireless
EUT Descrip.: Express Mini-PCI USB CDMA Modem Module
EUT M/N: MCS720
Test Target: FCC 22
Mode Oper: TX, Fundamental

Test Equipment:

Receiving: Sumol T122, and 5m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, and 4ft SMA Cable Warehouse S/N: 177081002

f MHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
824.70	101.0	V	24.1	0.5	0.0	23.6	38.5	-14.9	
824.70	99.8	H	21.5	0.5	0.0	21.0	38.5	-17.5	
836.52	100.8	V	24.8	0.6	0.0	24.2	38.5	-14.2	
836.52	100.1	H	21.9	0.6	0.0	21.3	38.5	-17.1	
848.31	102.0	V	26.6	0.7	0.0	25.9	38.5	-12.5	
848.31	99.6	H	21.5	0.7	0.0	20.8	38.5	-17.6	

NOTE: RBW=VBW=3MHz

PCS Output Power (EIRP)

03/22/06 High Frequency Fundamental Measurement
Compliance Certification Services, Morgan Hill 5m Chamber Site

Test Engr: Sunny Shih
Project #: 06U10160-1
Company: Sierra Wireless
EUT Descrip.: Express Mini-PCI USB CDMA Modem Module
EUT M/N: MC5720
Test Target: FCC 24
Mode Oper: TX, Fundamental

Test Equipment:

Receiving: Horn T73, and 12ft S/N: 197209005 (Setup this one for testing EUT)
Substitution: Horn T60 Substitution, 4ft SMA Cable Warehouse S/N: 177081002

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
1.851	94.3	H	17.1	0.9	8.3	24.5	33.0	-8.5	
1.851	94.5	V	17.1	0.9	8.3	24.5	33.0	-8.5	
1.880	93.6	H	16.7	0.9	8.3	24.2	33.0	-8.9	
1.880	96.1	V	18.4	0.9	8.3	25.9	33.0	-7.2	
1.909	91.2	H	14.6	0.9	8.4	22.1	33.0	-10.9	
1.909	93.8	V	16.8	0.9	8.4	24.3	33.0	-8.7	

NOTE: RBW=VBW=3MHz

7.2. FIELD STRENGTH OF SPURIOUS EMISSION

LIMIT

§22.917 (e) and §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.12, FCC 22.917 (h), & FCC 24.238 (b)

RESULTS

No non-compliance noted.

Note: No emissions were found within 30-1000MHz of 20dB below the system noise.

800MHz Band CDMA Spurious & Harmonic (ERP)

03/22/06 High Frequency Substitution Measurement
Compliance Certification Services, Morgan Hill

Test Engr: Sunny Shih
Project #: 06U1060-1
Company: Sierra Wireless Inc., GS
EUT Descrip.: Express Mini-PCI USB Wireless CDMA Modem Module
EUT M/N: MC5720
Test Target: FCC 22
Mode Oper: TX, 800 MHz Band

Test Equipment:

EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Horn > 18GHz	Limit FCC 22	☒ High Pass Filter
Hi Frequency Cables ☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)			
Pre-amplifier 1-26GHz T34 HP 8449B		Pre-amplifier 26-40GHz	

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
L-Ch										
1.649	51.2	V	-60.1	1.6	7.5	5.4	-56.3	-13.0	-43.3	
2.474	46.7	V	-62.8	1.9	9.5	7.4	-57.3	-13.0	-44.3	
3.298	44.8	V	-61.1	2.3	9.6	7.5	-55.9	-13.0	-42.9	
1.649	49.0	H	-61.6	1.6	7.5	5.4	-57.8	-13.0	-44.8	
2.474	46.2	H	-63.1	1.9	9.5	7.4	-57.6	-13.0	-44.6	
3.298	45.1	H	-60.7	2.3	9.6	7.5	-55.5	-13.0	-42.5	
M-Ch										
1.673	54.3	V	-56.9	1.6	7.6	5.4	-53.1	-13.0	-40.1	
2.509	47.5	V	-61.8	1.9	9.5	7.4	-56.4	-13.0	-43.4	
3.346	46.2	V	-59.5	2.3	9.6	7.5	-54.3	-13.0	-41.3	
1.673	51.4	H	-59.1	1.6	7.6	5.4	-55.3	-13.0	-42.3	
2.509	46.5	H	-62.6	1.9	9.5	7.4	-57.2	-13.0	-44.2	
3.346	45.4	H	-60.2	2.3	9.6	7.5	-55.0	-13.0	-42.0	
H-Ch										
1.696	59.5	V	-51.6	1.6	7.6	5.5	-47.8	-13.0	-34.8	
2.544	50.6	V	-58.6	2.0	9.5	7.4	-53.1	-13.0	-40.1	
3.393	45.3	V	-60.2	2.3	9.6	7.5	-55.0	-13.0	-42.0	
1.696	53.9	H	-56.5	1.6	7.6	5.5	-52.6	-13.0	-39.6	
2.544	47.5	H	-61.5	2.0	9.5	7.4	-56.0	-13.0	-43.0	
3.393	45.2	H	-60.2	2.3	9.6	7.5	-55.0	-13.0	-42.0	

PCS Spurious & Harmonic (EIRP):

03/22/06 High Frequency Substitution Measurement
Compliance Certification Services, Morgan Hill

Test Engr: Sunny Shih
Project #: 06U1060-1
Company: Sierra Wireless Inc., GS
EUT Descrip.: Express Mini-PCI USB Wireless CDMA Modem Module
EUT M/N: MC5720
Test Target: FCC 24
Mode Oper: TX, 1900 MHz Bnad

Test Equipment:


EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Horn > 18GHz	Limit FCC 24	☒ High Pass Filter
Hi Frequency Cables ☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)		Pre-amplifier 1-26GHz T34 HP 8449B	Pre-amplifier 26-40GHz

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
L-Ch (1851.25 MHz)										
3.702	54.4	V	-49.8	2.4	9.6	7.4	-42.6	-13.0	-29.6	
5.553	65.0	V	-34.7	3.2	10.8	8.6	-27.1	-13.0	-14.1	
7.405	50.0	V	-46.4	3.7	11.3	9.2	-38.8	-13.0	-25.8	
3.702	55.9	H	-48.2	2.4	9.6	7.4	-41.0	-13.0	-28.0	
5.553	58.9	H	-39.8	3.2	10.8	8.6	-32.2	-13.0	-19.2	
7.405	53.0	H	-42.6	3.7	11.3	9.2	-35.0	-13.0	-22.0	
M-Ch (1880 MHz)										
3.760	53.4	V	-50.5	2.5	9.6	7.4	-43.4	-13.0	-30.4	
5.640	64.8	V	-34.9	3.3	10.9	8.7	-27.3	-13.0	-14.3	
7.520	47.0	V	-49.2	3.7	11.4	9.2	-41.6	-13.0	-28.6	
3.760	50.0	H	-53.8	2.5	9.6	7.4	-46.7	-13.0	-33.7	
5.640	57.0	H	-41.7	3.3	10.9	8.7	-34.1	-13.0	-21.1	
7.520	53.4	H	-42.0	3.7	11.4	9.2	-34.4	-13.0	-21.4	
H-Ch (1908.75 MHz)										
3.817	62.5	V	-41.1	2.5	9.6	7.4	-34.1	-13.0	-21.1	
5.726	60.5	V	-39.3	3.3	11.0	8.8	-31.6	-13.0	-18.6	
7.635	52.0	V	-44.0	3.8	11.4	9.2	-36.4	-13.0	-23.4	
3.817	58.2	H	-45.4	2.5	9.6	7.4	-38.3	-13.0	-25.3	
5.726	55.3	H	-43.5	3.3	11.0	8.8	-35.8	-13.0	-22.8	
7.635	56.0	H	-39.2	3.8	11.4	9.2	-31.6	-13.0	-18.6	

8. SETUP PHOTOS



RADIATED BACK PHOTO

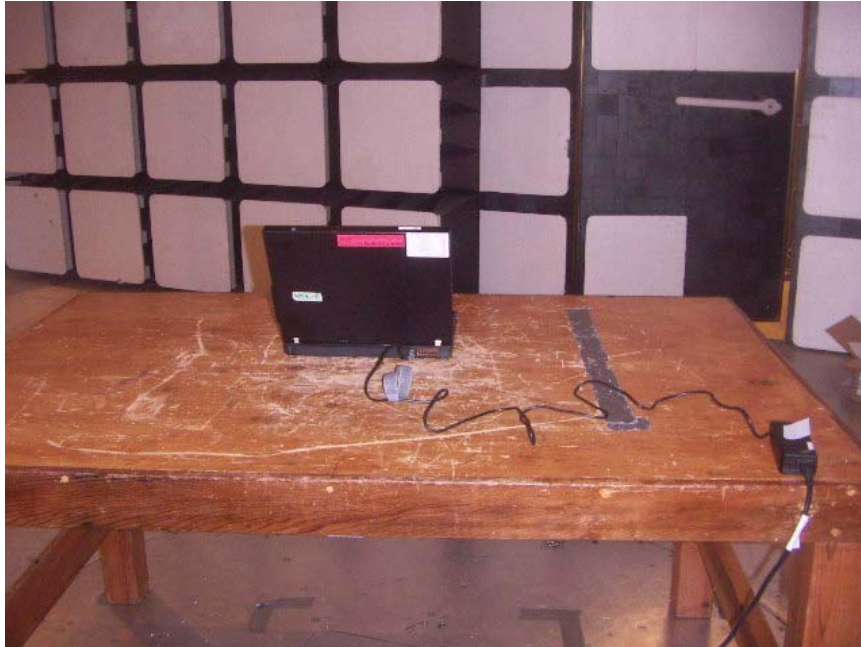

END OF REPORT