



# SAR Evaluation Report

IN ACCORDANCE WITH THE REQUIREMENTS OF  
FCC OET BULLETIN 65 SUPPLEMENT C  
IC RSS 102 ISSUE 1 : 1999

FOR

PCA, EVDO MINI-PCI EXPRESS CARD CDMA MODEM

MODEL: MC5725

FCC ID: N7N-MC5725-L

REPORT NUMBER: 07U10918-4

ISSUE DATE: MARCH 21, 2007

*Prepared for*

SIERRA WIRELESS  
2290 COSMOS CT.  
CARLSBAD, CA 92010

*Prepared by*

COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, USA

NVLAP®

NVLAP LAB CODE 200065-0

**Revision History**

Rev.	Issued date	Revisions	Revised By
--	March 21, 2007	Initial issue	Sunny Shih

**CERTIFICATE OF COMPLIANCE (SAR EVALUATION)****DATES OF TEST:** March 21, 2007

APPLICANT:	Sierra Wireless
ADDRESS:	2290 Cosmos Ct. Carlsbad, CA 92010
FCC ID:	N7N-MC5725-L
MODEL:	MC5725
DEVICE CATEGORY:	Portable Device
EXPOSURE CATEGORY:	General Population/Uncontrolled Exposure


PCA, EVDO Mini-PCI Express Card CDMA Modem is installed in ThinkPad T61/R61 14.1-inch widescreen along with Bluetooth module FCC ID: MCLJ07H081.			
Test Sample is a:	Production unit		
Host Laptop:	ThinkPad T61/R61 14.1-inch widescreen		
Rule Parts	Frequency Range [MHz]	The Highest SAR Values [1g_mW/g]	Collocation SAR Values [1g_mW/g]
FCC 22H	824.7 - 848.31	0.146	0.149
FCC 24E	1851.25 - 1908.75	0.081	0.086
This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC OET 65 Supplement C (Edition 01-01) and RSS 102.			
Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.			
Approved & Released For CCS By:	Tested By:		
			
Hsin Fu Shih Engineering Supervisor Compliance Certification Services	Ninous Davoudi EMC Engineer Compliance Certification Services		

TABLE OF CONTENTS

1	DEVICE UNDER TEST (DUT) DESCRIPTION .....	5
2	FACILITIES AND ACCREDITATION .....	6
3	SYSTEM DESCRIPTION .....	7
3.1	COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS .....	8
4	SIMULATING LIQUID PARAMETERS CHECK .....	9
4.1	SIMULATING LIQUID PARAMETER CHECK RESULT .....	10
5	SYSTEM PERFORMANCE CHECK .....	12
5.1	SYSTEM PERFORMANCE CHECK RESULTS .....	13
6	SAR MEASURMENT PROCEDURE .....	14
6.1	DASY4 SAR MEASURMENT PROCEDURE .....	15
7	PROCEDURE USED TO ESTABLISH TEST SIGNAL .....	16
8	SAR MEASURMENT RESULTS .....	21
8.1	CELL BAND .....	21
8.2	PCS BAND .....	22
9	MEASURMENT UNCERTAINTY .....	23
9.1	MEASURMENT UNCERTAINTY FOR 300 MHZ – 3000 MHZ .....	23
10	EQUIPMENT LIST AND CALIBRATION .....	24
11	PHOTOS .....	25
12	ATTACHMENTS .....	27

**1 DEVICE UNDER TEST (DUT) DESCRIPTION**

PCA, EVDO Mini-PCI Express Card CDMA Modem is installed in ThinkPad T61/R61 14.1-inch widescreen along with Bluetooth module FCC ID: MCLJ07H081.	
Normal operation:	Lap-held position
Accessory:	N/A
Earphone/Headset Jack:	N/A
Duty cycle:	100%
Host Device(s):	ThinkPad T61/R61 14.1-inch widescreen
Antenna(s)	NISSEI Electric Co., Ltd, Dual Band Planner Inverted F, PN: 3059821
Power supply:	Power supplied through the laptop computer (host device).

## 2 FACILITIES AND ACCREDITATION


The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, CA 94538 USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

### 3 SYSTEM DESCRIPTION

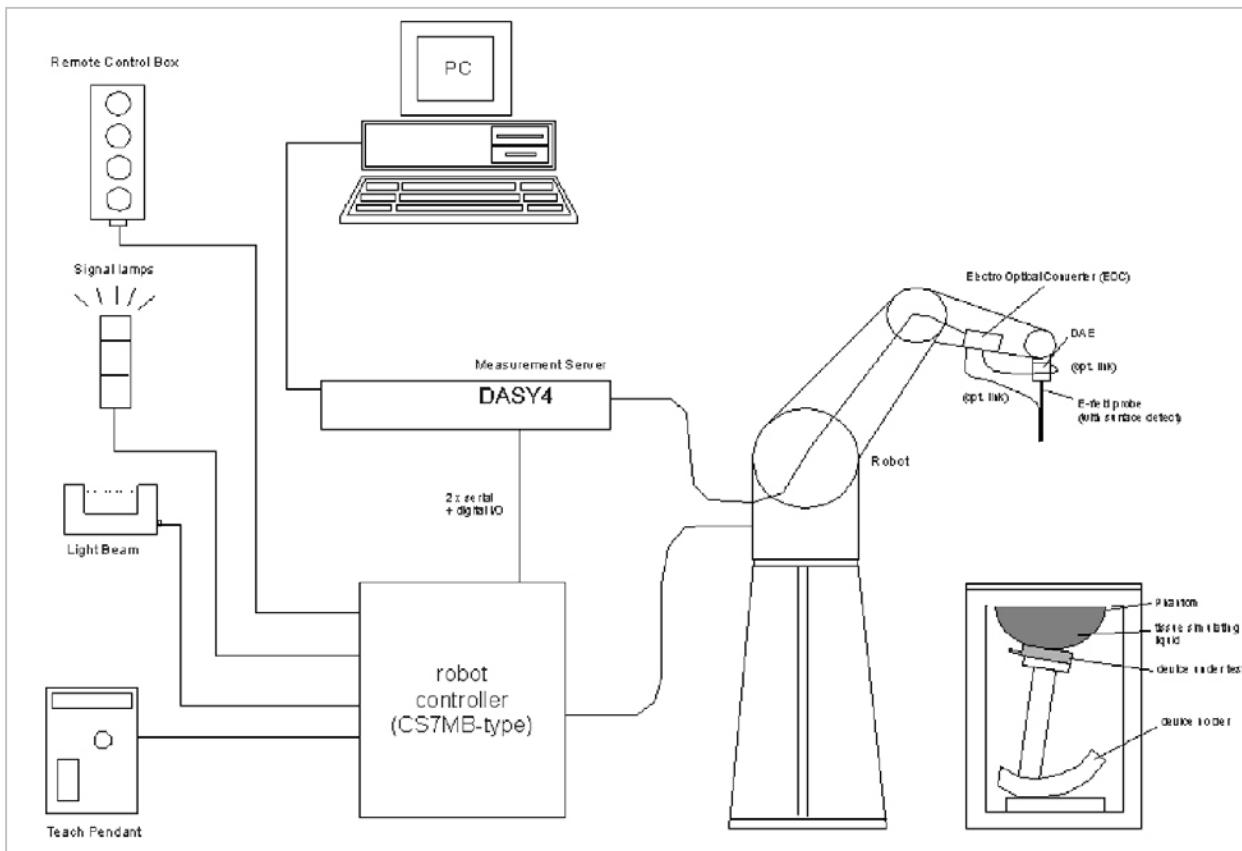

**The DASY4 system for performing compliance tests consists of the following items:**

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit, which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

### 3.1 COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity


HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

#### 4 SIMULATING LIQUID PARAMETERS CHECK

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The relative permittivity and conductivity of the tissue material should be within  $\pm 5\%$  of the values given in the table below.

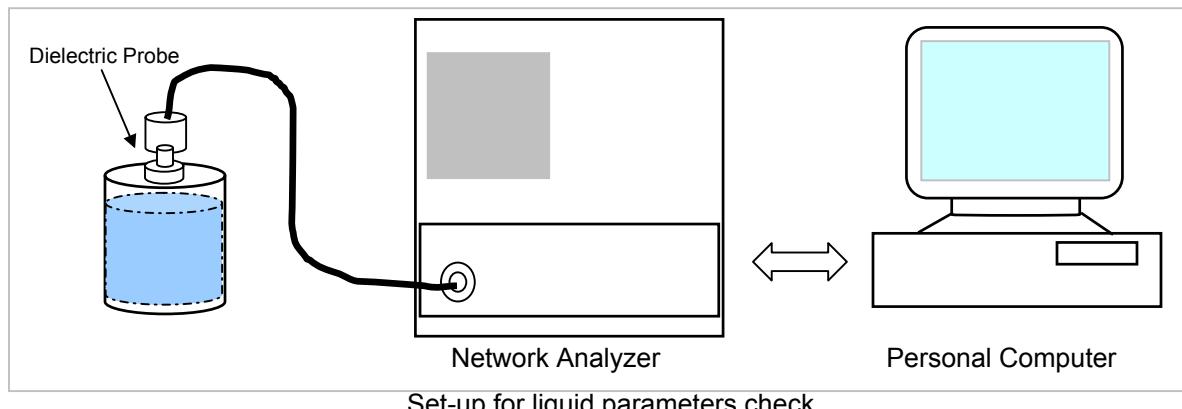

Set-up for liquid parameters check

#### Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 150 – 3000 MHz and 5800 MHz)

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE Standard 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

#### 4.1 SIMULATING LIQUID PARAMETER CHECK RESULT

Simulating Liquid Dielectric Parameters Check Result @ Muscle 835 MHz

Room Ambient Temperature = 22°C; Relative humidity = 40%      Measured by: Ninous Davoudi

Simulating Liquid			Parameters		Measured	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	e" (ε <sub>r</sub> )	Relative Permittivity (ε <sub>r</sub> ):	55.2	-3.32	± 5
835	21	15	e'	53.3682	Relative Permittivity (ε <sub>r</sub> ):	53.3682	55.2	-3.32
			e"	20.9804	Conductivity (σ):	0.97458	0.97	0.47

##### Liquid Check

Ambient temperature: 22.0 deg. C; Liquid temperature: 21.0 deg C

March 21, 2007 09:30 AM

Frequency	e'	e"
800000000.	53.5357	20.8271
805000000.	53.5072	20.8274
810000000.	53.4781	20.8390
815000000.	53.4453	20.8685
820000000.	53.4237	20.9104
825000000.	53.4045	20.9399
830000000.	53.3676	20.9478
<b>835000000.</b>	<b>53.3682</b>	<b>20.9804</b>
840000000.	53.3353	20.9481
845000000.	53.2936	20.9192
850000000.	53.2588	20.8772
855000000.	53.2117	20.8292
860000000.	53.2116	20.7320
865000000.	53.1472	20.6916
870000000.	53.0954	20.6256
875000000.	53.0572	20.5658
880000000.	53.0048	20.5224
885000000.	52.9200	20.5024
890000000.	52.8835	20.4958
895000000.	52.8590	20.4638
900000000.	52.7730	20.5128

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where  $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

## Simulating Liquid Dielectric Parameters Check Result @ Muscle 1900 MHz

Room Ambient Temperature = 22°C; Relative humidity = 50%      Measured by: Ninous Davoudi

Simulating Liquid			Parameters		Measured	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	Relative Permittivity ( $\epsilon_r$ ):				
1900	21	15	e'	55.5686	55.5686	53.3	4.26	± 5
			e''	14.0643	Conductivity ( $\sigma$ ):	1.48659	-2.20	± 5

## Liquid Check

Ambient temperature: 22.0 deg. C; Liquid temperature: 21.0 deg C

March 21, 2007 07:17 AM

Frequency	e'	e''
1710000000.	56.3253	13.2634
1720000000.	56.1744	13.2630
1730000000.	56.0268	13.3103
1740000000.	55.9199	13.3493
1750000000.	55.8598	13.4039
1760000000.	55.8661	13.4370
1770000000.	55.9367	13.5173
1780000000.	56.0123	13.5959
1790000000.	56.0786	13.6365
1800000000.	56.1324	13.6650
1810000000.	56.1408	13.6631
1820000000.	56.0570	13.7143
1830000000.	55.9267	13.7380
1840000000.	55.7531	13.7137
1850000000.	55.6350	13.7137
1860000000.	55.6012	13.7208
1870000000.	55.5634	13.8154
1880000000.	55.5615	13.9207
1890000000.	55.5348	13.9900
1900000000.	<b>55.5686</b>	<b>14.0643</b>
1910000000.	55.6230	14.0572

The conductivity ( $\sigma$ ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where  $f = \text{target } f * 10^6$ 

$$\epsilon_0 = 8.854 * 10^{-12}$$

## 5 SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of  $\pm 10\%$ .

### System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe EX3DV3-SN: 3531 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 5 x 5 x 7 fine cube was chosen for cube integration( $dx=dy=7.5\text{mm}$ ;  $dz=5\text{mm}$ ).  
For 5 GHz band - Special 8x8x8 fine cube was chosen for cube integration( $dx=dy=4.3\text{mm}$ ;  $dz=3\text{mm}$ )
- Distance between probe sensors and phantom surface was set to 4 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.0mm
- The dipole input power (forward power) was  $250\text{ mW}\pm 3\%$ .
- The results are normalized to 1 W input power.

### Reference SAR Values for body-tissue

In the table below, the numerical reference SAR values of a SPEAG validation dipoles placed below the flat phantom filled with body-tissue simulating liquid are given. The reference SAR values were calculated using the finite-difference time-domain method and the geometry parameters.

Dipole Type	Distance (mm)	Frequency (MHz)	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	<b>9.71</b>	<b>6.38</b>	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	<b>39.8</b>	<b>20.8</b>	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6

Note: All SAR values normalized to 1 W forward power.

## 5.1 SYSTEM PERFORMANCE CHECK RESULTS

### System Validation Dipole: D835V2 SN:4d002

Date: March 21, 2007

Room Ambient Temperature = 22°C; Relative humidity = 40%      Measured by: Ninous Davoudi

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	1g	2.38	9.52	9.71	-1.96	± 10
835	21	15	1g	2.38	9.52	9.71	-1.96	± 10
			10g	1.57	6.28	6.38	-1.57	± 10

### System Validation Dipole: D1900V2 SN:5d043

Date: March 20, 2007

Room Ambient Temperature = 22°C; Relative humidity = 50%      Measured by: Ninous Davoudi

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	1g	10.30	41.2	39.8	3.52	± 10
1900	21	15	1g	10.30	41.2	39.8	3.52	± 10
			10g	5.46	21.84	20.8	5.00	± 10

## 6 SAR MEASURMENT PROCEDURE

A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the DUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 4 mm from the inner surface of the shell. The area covers the entire dimension of the DUT and the horizontal grid spacing is 15 mm x 15 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the DUT to ensure that the hotspot was correctly identified.

For 5 GHz band - The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the DUT and the horizontal grid spacing is 10 mm x 10 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the DUT to ensure that the hotspot was correctly identified.

- c) Around this point, a volume of X=Y= 30 and Z=21 mm is assessed by measuring 5 x 5 x 7 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:

For 5 GHz band - Around this point, a volume of X=Y=24 and Z=20 mm is assessed by measuring 7 x 7 x 9 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:

- (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
- (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
- (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
- (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.

## 7 DASY4 SAR MEASURMENT PROCEDURE

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 1.2 mm for an EX3DV3 probe type).

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

### Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures 5 x 5 x 7 points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

For 5 GHz band – Same as above except the Zoom Scan measures 7 x 7 x 9 points.

### Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

### Step 5: Z-Scan

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

## 8 PROCEDURE USED TO ESTABLISH TEST SIGNAL

### 3G-CDMA2000 1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobil Test	B.10.11, L

#### 1xRTT

- Call Setup > Shift & Preset
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > RC3 (Fwd3, Rvs3)
- FCH Service Option (SO) Setup > 32 (+ F-SCH)
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps  
    > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Cell Info > Cell Parameters > System ID (SID) > 8  
    > Network ID (NID) > 65535

Once "Active Cell" show "Connected" then change "Rvs Power Ctrl" from "Active bits" to "**All Up bits**" to get the maximum power.

#### Worst-case Measurement Result @ Low, Middle and High Channel

##### Cellular Band

Radio Configuration (RC)	Service Option (SO)	Channel	Frequency	Output Power (dBm)	
				Average	
RC3 (Fwd3, Rvs3)	SO32 (+F-SCH)	1013	824.70	24.80	
		384	836.52	24.90	
		777	848.31	24.95	

##### PCS Band

Radio Configuration (RC)	Service Option (SO)	Channel	Frequency	Output Power (dBm)	
				Average	
RC3 (Fwd3, Rvs3)	SO32 (+F-SCH)	25	1851.25	24.90	
		600	1880.00	24.80	
		1175	1908.75	24.80	

**3G-CDMA2000 1xEV-DO Release 0 (Rel 0)**

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application Rev, License  
1xEV-DO Terminal Test A.06.06, L

**FTAP**

- Call Setup > Shift & Preset
- Protocol Rev > 0 (1xEV-DO)
- Application Config > Enhanced Test Application Protocol > FTAP
- FTAP Rate > 307.2 kbps (2 Slot, QPSK)
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

**RTAP**

- Call Setup > Shift & Preset
- Protocol Rev > 0 (1xEV-DO)
- Application Config > Enhanced Test Application Protocol > RTAP
- RTAP Rate > 153.6 kbps
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

## Worst-case Measurement Result @ Low, Middle and High Channel

Cellular Band - RTAP				Cellular Band - FTAP			
Channel	f (MHz)	RTAP Rate	Conducted power (dBm)	Channel	f (MHz)	FTAP Rate	Conducted power (dBm)
			Average				Average
1013	824.70	153.6	24.80	1013	824.70	307.2 kbps (2 slot, QPSK)	24.45
384	836.52		24.92	384	836.52		24.50
777	848.31		24.86	777	848.31		24.43

PCS Band - RTAP				PCS Band - FTAP			
Channel	f (MHz)	RTAP Rate	Conducted power (dBm)	Channel	f (MHz)	FTAP Rate	Conducted power (dBm)
			Average				Average
25	1851.25	153.6	24.80	25	1851.25	307.2 kbps (2 slot, QPSK)	24.65
600	1880.00		24.84	600	1880.00		24.56
1175	1908.75		24.80	1175	1908.75		24.50

**3G-CDMA2000 1xEV-DO Release 0 (Rel 0)**

## Preliminary Measurement Results @ Middle channel

Cellular Band - RTAP				Cellular Band - FTAP					
Channel	f (MHz)	RTAP Rate	Conducted power (dBm)		Channel	f (MHz)	FTAP Rate	Conducted power (dBm)	
			Average	Peak				Average	Peak
384	836.52	9.6	24.66	29.85	384	836.52	307.2 kbps (2 slot, QPSK)	24.60	29.53
		19.2	24.72	29.87					
		38.4	24.75	29.90					
		76.8	24.78	30.00					
		153.6	24.92	30.01					

PCS Band - RTAP				PCS Band - FTAP					
Channel	f (MHz)	RTAP Rate	Conducted power (dBm)		Channel	f (MHz)	FTAP Rate	Conducted power (dBm)	
			Average	Peak				Average	Peak
600	1880.00	9.6	24.63	29.01	600	1880.00	307.2 kbps (2 slot, QPSK)	24.63	29.09
		19.2	24.64	29.03					
		38.4	24.70	29.11					
		76.8	24.75	29.28					
		153.6	24.84	29.30					

**3G-CDMA2000 1xEV-DO Revision A (Rev A) new**

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	A.06.06, L

FETAP

- Call Setup > Shift & Preset
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- FTAP Rate > 307.2 kbps (2 Slot, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 0
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

RETAP

- Call Setup > Shift & Preset
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- R-Data Pkt Size > 4096 (for PCS band), 4096 (for Cellular band)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
  - > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
  - > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

## Worst-case Measurement Result @ Low, Middle and High Channel

Cellular Band - RETAP				Cellular Band - FETAP			
Channel	f (MHz)	R-Data Pkt Size	Conducted power (dBm)	Channel	f (MHz)	FTAP Rate	Conducted power (dBm)
			Average				Average
1013	824.70	4096	24.85	1013	824.70	307.2 (2 slot)	24.45
384	836.52		24.95	384	836.52		24.46
777	848.31		24.79	777	848.31		24.40

PCS Band - RETAP				PCS Band - FETAP			
Channel	f (MHz)	R-Data Pkt Size	Conducted power (dBm)	Channel	f (MHz)	FTAP Rate	Conducted power (dBm)
			Average				Average
25	1851.25	4096	24.95	25	1851.25	307.2 (2 slot)	24.45
600	1880.00		24.92	600	1880.00		24.44
1175	1908.75		24.90	1175	1908.75		24.42

## 3G-CDMA2000 1xEV-DO Revision A (Rev A)

## Preliminary Measurement Results @ Middle channel

Cellular Band - RETAP				Cellular Band - FETAP				Conducted power (dBm)	
Channel	f (MHz)	R-Data Pkt Size	Conducted power (dBm)		Channel	f (MHz)	FTAP Rate	Conducted power (dBm)	
			Average	Peak				Average	Peak
384	836.52	128	23.90	30.14	384	836.52	307.2 (2 slot)	24.40	
		256	24	30.21			307.2 (4 slot)	24.37	
		512	24.10	30.28					
		768	24.27	30.33					
		1024	24.28	30.14					
		1536	24.32	30.35					
		2048	24.40	30.14					
		3072	24.70	30.56					
		<b>4096</b>	<b>24.95</b>	<b>30.66</b>					
		6144	23.60	30.37					
		8192	23.60	30.40					
		12288	23.70	30.38					

PCS Band – RETAP				PCS Band - FETAP				Conducted power (dBm)	
Channel	f (MHz)	R-Data Pkt Size	Conducted power (dBm)		Channel	f (MHz)	FTAP Rate	Conducted power (dBm)	
			Average	Peak				Average	Peak
600	1880.00	128	24.10	28.91	600	1880	307.2 (2 slot)	24.40	
		256	24.16	29.20			307.2 (4 slot)	24.38	
		512	24.32	28.90					
		768	24.35	28.77					
		1024	24.50	28.76					
		1536	24.58	28.83					
		2048	24.60	28.86					
		3072	24.75	29.13					
		<b>4096</b>	<b>24.92</b>	<b>29.29</b>					
		6144	24.64	29.26					
		8192	24.68	29.24					
		12288	24.70	29.27					

## 9 SAR MEASURMENT RESULTS

### 9.1 CELL BAND

<b>1xRTT</b>				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
1013	824.70			
384	836.52	0.134	-0.149	0.139
777	848.31			
<b>1xEVDO Rel 0</b>				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
1013	824.70			
384	836.52	0.133	0.000	0.133
777	848.31			
<b>1xEVDO Rev A</b>				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
1013	824.70	0.107	-0.086	0.109
384	836.52	0.136	-0.105	0.139
777	<b>848.31</b>	<b>0.146</b>	<b>0.000</b>	<b>0.146</b>
777 <sup>4)</sup>	<b>848.31</b>	<b>0.147</b>	<b>-0.049</b>	<b>0.149</b>
Notes:				
1) The exact method of extrapolation is Measured SAR $\times 10^{(-\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.				
2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.				
3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.				
4) Collocation with Bluetooth module.				

## 9.2 PCS BAND

<b>1xRTT</b>				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
25	1851.25			
600	1880.00	0.065	0.000	0.065
1175	1908.75			
<b>1xEVDO Rel 0</b>				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
25	1851.25			
600	1880.00	0.067	0.000	0.067
1175	1908.75			
<b>1xEVDO Rev A</b>				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
25	1851.25	0.070	0.000	0.070
600	1880.00	0.068	-0.015	0.068
1175	1908.75	0.081	0.000	0.081
1175 <sup>4)</sup>	1908.75	0.084	-0.103	0.086
Notes:				
1) The exact method of extrapolation is Measured SAR $\times 10^{(-\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.				
2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.				
3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.				
4) Collocation with Bluetooth module.				

## 10 MEASURMENT UNCERTAINTY

### 10.1 MEASURMENT UNCERTAINTY FOR 300 MHz – 3000 MHz

Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)	
						Ui (1g)	Ui(10g)
<b>Measurement System</b>							
Probe Calibration	4.80	N	1	1	1	4.80	4.80
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58
Linearity	4.70	R	1.732	1	1	2.71	2.71
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58
Readout Electronics	1.00	N	1	1	1	1.00	1.00
Response Time	0.80	R	1.732	1	1	0.46	0.46
Integration Time	2.60	R	1.732	1	1	1.50	1.50
RF Ambient Conditions - Noise	1.59	R	1.732	1	1	0.92	0.92
RF Ambient Conditions - Reflections	0.00	R	1.732	1	1	0.00	0.00
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25
<b>Test sample Related</b>							
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89
<b>Phantom and Tissue Parameters</b>							
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62
<b>Combined Standard Uncertainty</b>							
<b>Expanded Uncertainty (95% Confidence Interval)</b>							
RSS						11.44	10.49
K=2						22.87	20.98
Notes for table							
1. Tol. - tolerance in influence quality							
2. N - Nominal							
3. R - Rectangular							
4. Div. - Divisor used to obtain standard uncertainty							
5. Ci - is the sensitivity coefficient							

**11 TEST EQUIPMENT LIST**

Name of Equipment	Manufacturer	Type/Model	Serial Number	Cal. Due date		
				MM	DD	Year
Robot - Six Axes	Stäubli	RX90BL	N/A			N/A
Robot Remote Control	Stäubli	CS7MB	3403-91535			N/A
DASY4 Measurement Server	SPEAG	SEUMS001BA	1041			N/A
Probe Alignment Unit	SPEAG	LB (V2)	261			N/A
SAM Phantom (SAM1)	SPEAG	TP-1185	QD000P40CA			N/A
SAM Phantom (SAM2)	SPEAG	TP-1015	N/A			N/A
Electronic Probe kit	HP	85070C	N/A			N/A
S-Parameter Network Analyzer	Agilent	8753ES-6	US39173569	2	14	2008
E-Field Probe	SPEAG	EX3DV4	3552	5	30	2007
Thermometer	ERTCO	639-1S	1718	11	7	2007
Data Acquisition Electronics	SPEAG	DAE3 V1	427	11	16	2007
System Validation Dipole	SPEAG	D835V2	4d002	1	23	2008
System Validation Dipole	SPEAG	D1900V2	5d043	1	29	2008
Power Meter	HP	438A	3513U04320	9	4	2007
Amplifier	Mini-Circuits	ZHL-42W	D072701-5			N/A
Radio Communication Tester	R & S	CMU 200	838114/032	3	21	2007
Radio Communication Tester	Agilent	E5515C	GB46160222	6	29	2007
Simulating Liquid	CCS	M835	N/A	Within 24 hrs of first test		
Simulating Liquid	CCS	M1900	N/A	Within 24 hrs of first test		

**12 PHOTOS**

**EUT - MC5725**

**Host Device – ThinkPad T60**

**13 ATTACHMENTS**

No.	Contents	No. Of Pages
1	System Performance Check Plots	4
2	SAR Test Plots	14
3	Certificate of E-Field Probe - EXDV4SN3552	9
4	Certificate of System Validation Dipole - D835V2 SN:4d002	9
5	Certificate of System Validation Dipole - D1900V2 SN:5d043	9

**END OF REPORT**