


# FCC SAR Test Report

**Report No.** : SA161006C08  
**Applicant** : Sierra Wireless Inc.  
**Address** : 13811 Wireless Way Richmond, BC Canada  
**Product** : PCIe wireless WAN data card  
**FCC ID** : N7NEM7455-D7  
**Brand** : AirPrime  
**Model No.** : EM7455  
**Standards** : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1992 / IEEE Std 1528:2013  
KDB 865664 D01 v01r04 / KDB 865664 D02 v01r02  
KDB 248227 D01 v02r02 / KDB 447498 D01 v06 / KDB 616217 D04 v01r02  
KDB 941225 D01 v03r01 / KDB 941225 D05 v02r05  
**Sample Received Date** : Oct. 06, 2016  
**Date of Testing** : Oct. 21, 2016 ~ Mar. 28, 2017  
**Lab Address** : No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.  
**Test Location** : No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

**CERTIFICATION:** The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch – Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

**Prepared By :**

  
Vera Huang / Specialist

**Approved By :**

  
Eli Hsu / Project Engineer



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## **Table of Contents**

|                                                                 |            |
|-----------------------------------------------------------------|------------|
| <b>Release Control Record .....</b>                             | <b>3</b>   |
| <b>1. Summary of Maximum SAR Value .....</b>                    | <b>4</b>   |
| <b>2. Description of Equipment Under Test .....</b>             | <b>5</b>   |
| <b>3. SAR Measurement System .....</b>                          | <b>7</b>   |
| 3.1 Definition of Specific Absorption Rate (SAR) .....          | 7          |
| 3.2 SPEAG DASY52 System .....                                   | 7          |
| 3.2.1 Robot.....                                                | 8          |
| 3.2.2 Probes.....                                               | 9          |
| 3.2.3 Data Acquisition Electronics (DAE) .....                  | 9          |
| 3.2.4 Phantoms .....                                            | 10         |
| 3.2.5 Device Holder.....                                        | 11         |
| 3.2.6 System Validation Dipoles.....                            | 11         |
| 3.2.7 Tissue Simulating Liquids.....                            | 12         |
| 3.3 SAR System Verification .....                               | 15         |
| 3.4 SAR Measurement Procedure .....                             | 16         |
| 3.4.1 Area & Zoom Scan Procedure .....                          | 16         |
| 3.4.2 Volume Scan Procedure.....                                | 16         |
| 3.4.3 Power Drift Monitoring.....                               | 17         |
| 3.4.4 Spatial Peak SAR Evaluation .....                         | 17         |
| 3.4.5 SAR Averaged Methods .....                                | 17         |
| <b>4. SAR Measurement Evaluation .....</b>                      | <b>18</b>  |
| 4.1 EUT Configuration and Setting.....                          | 18         |
| 4.2 EUT Testing Position .....                                  | 26         |
| 4.2.1 SAR Test Exclusion Evaluations .....                      | 27         |
| 4.2.2 Simultaneous Transmission Possibilities.....              | 28         |
| 4.3 Tissue Verification .....                                   | 29         |
| 4.4 System Validation.....                                      | 30         |
| 4.5 System Verification.....                                    | 31         |
| 4.6 Maximum Output Power.....                                   | 32         |
| 4.6.1 Maximum Conducted Power .....                             | 32         |
| 4.6.2 Measured Conducted Power Result.....                      | 33         |
| 4.7 SAR Testing Results .....                                   | 55         |
| 4.7.1 SAR Test Reduction Considerations .....                   | 55         |
| 4.7.2 SAR Results for Body Exposure Condition .....             | 57         |
| 4.7.3 SAR Measurement Variability.....                          | 63         |
| 4.7.4 Simultaneous Multi-band Transmission Evaluation .....     | 64         |
| <b>5. Calibration of Test Equipment.....</b>                    | <b>185</b> |
| <b>6. Measurement Uncertainty.....</b>                          | <b>186</b> |
| <b>7. Information on the Testing Laboratories.....</b>          | <b>188</b> |
| <br>                                                            |            |
| <b>Appendix A. SAR Plots of System Verification</b>             |            |
| <b>Appendix B. SAR Plots of SAR Measurement</b>                 |            |
| <b>Appendix C. Calibration Certificate for Probe and Dipole</b> |            |
| <b>Appendix D. Photographs of EUT and Setup</b>                 |            |

## Release Control Record

| Report No.  | Reason for Change | Date Issued   |
|-------------|-------------------|---------------|
| SA161006C08 | Initial release   | Mar. 28, 2017 |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |
|             |                   |               |

# FCC SAR Test Report

## 1. Summary of Maximum SAR Value

| Equipment Class                       | Mode      | Highest Reported Body SAR <sub>1g</sub> (W/kg) |               |
|---------------------------------------|-----------|------------------------------------------------|---------------|
| PCB                                   | WCDMA II  | 1.30                                           |               |
|                                       | WCDMA IV  | 0.80                                           |               |
|                                       | WCDMA V   | 0.79                                           |               |
|                                       | LTE 2     | 1.15                                           |               |
|                                       | LTE 4     | 0.66                                           |               |
|                                       | LTE 5     | 0.84                                           |               |
|                                       | LTE 7     | 1.01                                           |               |
|                                       | LTE 12    | 1.08                                           |               |
|                                       | LTE 13    | 0.86                                           |               |
|                                       | LTE 25    | 1.11                                           |               |
|                                       | LTE 26    | 1.09                                           |               |
|                                       | LTE 41    | 0.45                                           |               |
| Equipment Class                       | Mode      | Highest Reported Body SAR <sub>1g</sub> (W/kg) |               |
|                                       |           | WLAN Module 1                                  | WLAN Module 2 |
| DTS                                   | 2.4G WLAN | 0.79                                           | 0.70          |
| NII                                   | 5.2G WLAN | N/A                                            | 1.28          |
|                                       | 5.3G WLAN | 0.57                                           | 1.45          |
|                                       | 5.6G WLAN | 0.46                                           | 1.23          |
|                                       | 5.8G WLAN | 0.50                                           | 0.96          |
| DSS                                   | Bluetooth | 0.03                                           | 0.18          |
| DXX                                   | NFC       | N/A                                            | N/A           |
| Highest Simultaneous Transmission SAR |           | Body (W/kg)                                    |               |
|                                       |           | WLAN Module 1                                  | WLAN Module 2 |
| PCB + DTS + DSS                       |           | 1.57                                           |               |
| PCB + NII + DSS                       |           | 1.41                                           |               |
| PCB + DTS Ant0 + DTS Ant1             |           |                                                | 1.59          |
| PCB + NII Ant0 + NII Ant1             |           |                                                | 1.41          |
| PCB + DSS Ant0 + DTS Ant1             |           |                                                | 1.54          |
| PCB + DSS Ant0 + NII Ant1             |           |                                                | 1.55          |

### Note:

- The SAR limit (Head & Body: SAR<sub>1g</sub> 1.6 W/kg, Extremity: SAR<sub>10g</sub> 4.0 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.
- SAR testing for WLAN Module 2 is referring to Intel Mobile Communications France S.A.S - WRF Lab. SAR report (Report No.: 161019-01.TR01).

## 2. Description of Equipment Under Test

|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT Type</b>                                        | PCIe wireless WAN data card                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>FCC ID</b>                                          | N7NEM7455-D7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Brand Name</b>                                      | AirPrime                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Model Name</b>                                      | EM7455                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Tx Frequency Bands<br/>(Unit: MHz)</b>              | WCDMA Band II : 1852.4 ~ 1907.6<br>WCDMA Band IV : 1712.4 ~ 1752.6<br>WCDMA Band V : 826.4 ~ 846.6<br>LTE Band 2 : 1850.7 ~ 1909.3 (1.4M), 1851.5 ~ 1908.5 (3M), 1852.5 ~ 1907.5 (5M),<br>1855 ~ 1905 (10M), 1857.5 ~ 1902.5 (15M), 1860 ~ 1900 (20M)<br>LTE Band 4 : 1710.7 ~ 1754.3 (1.4M), 1711.5 ~ 1753.5 (3M), 1712.5 ~ 1752.5 (5M),<br>1715 ~ 1750 (10M), 1717.5 ~ 1747.5 (15M), 1720 ~ 1745 (20M)<br>LTE Band 5 : 824.7 ~ 848.3 (1.4M), 825.5 ~ 847.5 (3M), 826.5 ~ 846.5 (5M), 829 ~<br>844 (10M)<br>LTE Band 7 : 2502.5 ~ 2567.5 (5M), 2505 ~ 2565 (10M), 2507.5 ~ 2562.5 (15M),<br>2510 ~ 2560 (20M)<br>LTE Band 12 : 699.7 ~ 715.3 (1.4M), 700.5 ~ 714.5 (3M), 701.5 ~ 713.5 (5M), 704 ~<br>711 (10M)<br>LTE Band 13 : 779.5 ~ 784.5 (5M), 782 (10M)<br>LTE Band 25 : 1850.7 ~ 1914.3 (1.4M), 1851.5 ~ 1913.5 (3M), 1852.5 ~ 1912.5 (5M),<br>1855 ~ 1910 (10M), 1857.5 ~ 1907.5 (15M), 1860 ~ 1905 (20M)<br>LTE Band 26 : 814.7 ~ 848.3 (1.4M), 815.5 ~ 847.5 (3M), 816.5 ~ 846.5 (5M), 819 ~<br>844 (10M), 821.5 ~ 841.5 (15M)<br>LTE Band 30 : Disabled<br>LTE Band 41 : 2498.5 ~ 2687.5 (5M), 2501 ~ 2685 (10M), 2503.5 ~ 2682.5 (15M),<br>2506 ~ 2680 (20M)<br>WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5825<br>Bluetooth : 2402 ~ 2480<br>NFC : 13.56 |
| <b>Uplink Modulations</b>                              | WCDMA : QPSK<br>LTE : QPSK, 16QAM<br>802.11b : DSSS<br>802.11a/g/n/ac : OFDM<br>Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK<br>NFC : ASK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Maximum Tune-up Conducted Power<br/>(Unit: dBm)</b> | Please refer to section 4.6.1 of this report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Antenna Type</b>                                    | PIFA Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>EUT Stage</b>                                       | Production Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## FCC SAR Test Report

### Note:

1. The EUT was installed in Portable Computer-Tablet (Brand: DELL, Model: T17G).
2. The antenna information is listed as below.

| Ant. Type | Manu-<br>facturer | Parts Number                                            | Antenna Gain     |                  |                 |       |        |        |        |        |        |
|-----------|-------------------|---------------------------------------------------------|------------------|------------------|-----------------|-------|--------|--------|--------|--------|--------|
|           |                   |                                                         | WCDMA II & LTE 2 | WCDMA IV & LTE 4 | WCDMA V & LTE 5 | LTE 7 | LTE 12 | LTE 13 | LTE 25 | LTE 26 | LTE 41 |
| PIFA      | Ethertronics      | WWAN Main Antenna: 5002390<br>WWAN Aux Antenna: 5002393 | 2.93             | 2.93             | -0.41           | 2.28  | -0.07  | 0.63   | 2.93   | -0.41  | 2.28   |

| Antenna Type | Manufacturer | Parts Number                                            | Antenna Gain               |                          |                          |                           |
|--------------|--------------|---------------------------------------------------------|----------------------------|--------------------------|--------------------------|---------------------------|
|              |              |                                                         | WLAN<br>2.4 GHz            | WLAN<br>5.15~5.35 GHz    | WLAN<br>5.47~5.725 GHz   | WLAN<br>5.725~5.85 GHz    |
| PIFA         | Ethertronics | WLAN Main Antenna: 5002680<br>WLAN Aux Antenna: 5002680 | Main: -3.75<br>Aux.: -2.30 | Main: 1.96<br>Aux.: 1.73 | Main: 1.15<br>Aux.: 1.54 | Main: -0.11<br>Aux.: 1.24 |

3. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

### List of Accessory:

|               |              |                  |
|---------------|--------------|------------------|
| Battery 1     | Brand Name   | DELL             |
|               | Model Name   | J0PGR            |
|               | Power Rating | 7.6Vdc, 42Wh     |
|               | Type         | Li-ion           |
| Battery 2     | Brand Name   | DELL             |
|               | Model Name   | 1WND8            |
|               | Power Rating | 11.4Vdc, 31.5Wh  |
|               | Type         | Li-ion           |
| WLAN Module 1 | Brand Name   | Qualcomm Atheros |
|               | Model Name   | QCNFA344A        |
| WLAN Module 2 | Brand Name   | Intel            |
|               | Model Name   | 8265 NGW         |

### **3. SAR Measurement System**

#### **3.1 Definition of Specific Absorption Rate (SAR)**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### **3.2 SPEAG DASY52 System**

DASY52 system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY52 software defined. The DASY52 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

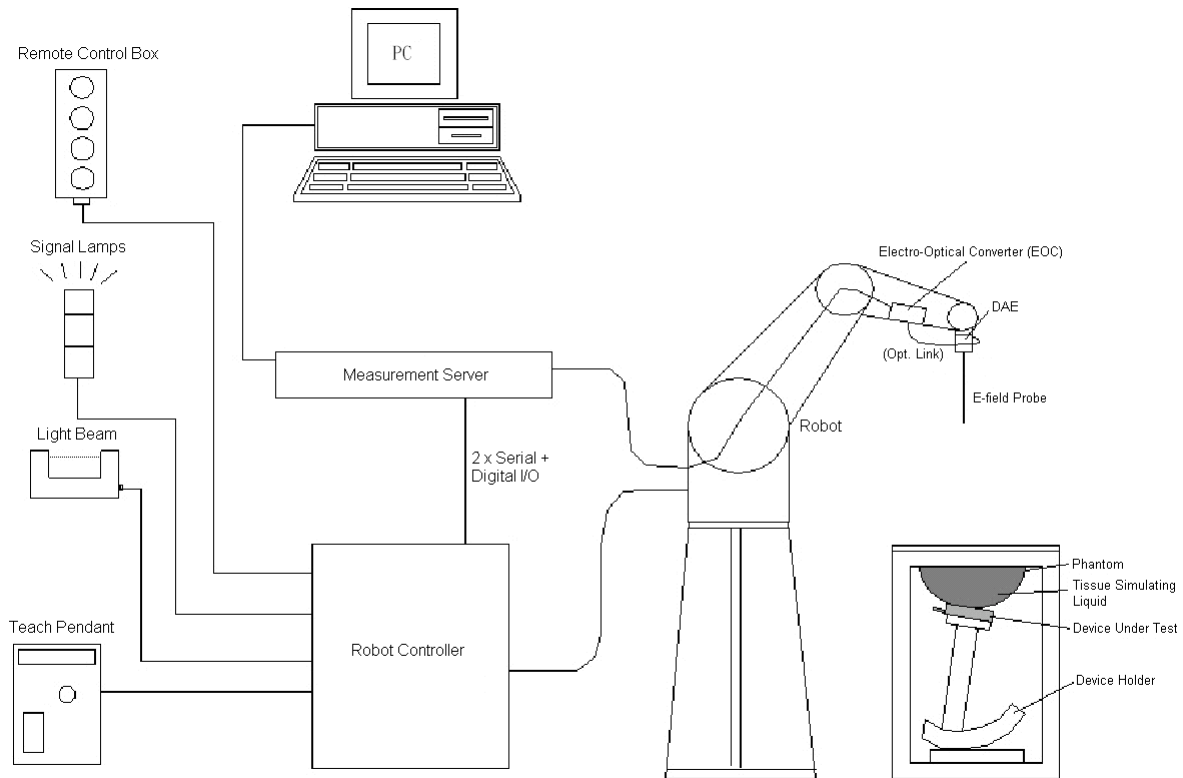

**Fig-3.1 SPEAG DASY52 System Setup**

## 3.2.1 Robot

The DASY52 systems use the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version of CS8c from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



**Fig-3.2 SPEAG DASY52 System**



## FCC SAR Test Report

### 3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

|                      |                                                                                                                                                          |                                                                                     |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>         | EX3DV4                                                                                                                                                   |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                     |
| <b>Frequency</b>     | 10 MHz to 6 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                               |                                                                                     |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                      |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)                                                                   |                                                                                     |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                     |                                                                                     |

|                      |                                                                                                                                                                               |                                                                                      |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>         | ES3DV3                                                                                                                                                                        |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                      |
| <b>Frequency</b>     | 10 MHz to 4 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                                                    |                                                                                      |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.3$ dB in tissue material (rotation normal to probe axis)                                                           |                                                                                      |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB                                                                                                                            |                                                                                      |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 3.9 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.0 mm                                                |                                                                                      |

|                      |                                                                                                                                                                                                             |                                                                                       |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>         | ET3DV6                                                                                                                                                                                                      |  |
| <b>Construction</b>  | Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |                                                                                       |
| <b>Frequency</b>     | 10 MHz to 2.3 GHz; Linearity: $\pm 0.2$ dB                                                                                                                                                                  |                                                                                       |
| <b>Directivity</b>   | $\pm 0.2$ dB in TSL (rotation around probe axis)<br>$\pm 0.4$ dB in TSL (rotation normal to probe axis)                                                                                                     |                                                                                       |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                                                                            |                                                                                       |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 16 mm)<br>Tip diameter: 6.8 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.7 mm                                                                              |                                                                                       |

### 3.2.3 Data Acquisition Electronics (DAE)

|                             |                                                                                                                                                                                                                                                     |                                                                                       |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>                | DAE3, DAE4                                                                                                                                                                                                                                          |  |
| <b>Construction</b>         | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. |                                                                                       |
| <b>Measurement Range</b>    | -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)                                                                                                                                                                              |                                                                                       |
| <b>Input Offset Voltage</b> | $< 5\mu$ V (with auto zero)                                                                                                                                                                                                                         |                                                                                       |
| <b>Input Bias Current</b>   | $< 50$ fA                                                                                                                                                                                                                                           |                                                                                       |
| <b>Dimensions</b>           | 60 x 60 x 68 mm                                                                                                                                                                                                                                     |                                                                                       |

## FCC SAR Test Report

### 3.2.4 Phantoms

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                     |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>           | Twin SAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |
| <b>Construction</b>    | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. |                                                                                     |
| <b>Material</b>        | Vinylester, glass fiber reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                     |
| <b>Shell Thickness</b> | $2 \pm 0.2$ mm ( $6 \pm 0.2$ mm at ear point)                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                     |
| <b>Dimensions</b>      | Length: 1000 mm<br>Width: 500 mm<br>Height: adjustable feet                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |
| <b>Filling Volume</b>  | approx. 25 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                     |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                      |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>           | ELI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |
| <b>Construction</b>    | Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. |                                                                                      |
| <b>Material</b>        | Vinylester, glass fiber reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                      |
| <b>Shell Thickness</b> | $2.0 \pm 0.2$ mm (bottom plate)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                      |
| <b>Dimensions</b>      | Major axis: 600 mm<br>Minor axis: 400 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                      |
| <b>Filling Volume</b>  | approx. 30 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                      |

## FCC SAR Test Report

### 3.2.5 Device Holder

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | Mounting Device                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| <b>Construction</b> | In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). |                                                                                     |
| <b>Material</b>     | POM                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |


|                     |                                                                                                                                                                                                                                                                                         |                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | Laptop Extensions Kit                                                                                                                                                                                                                                                                   |  |
| <b>Construction</b> | Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. |                                                                                     |
| <b>Material</b>     | POM, Acrylic glass, Foam                                                                                                                                                                                                                                                                |                                                                                     |

### 3.2.6 System Validation Dipoles

|                         |                                                                                                                                                                      |                                                                                       |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>            | D-Serial                                                                                                                                                             |  |
| <b>Construction</b>     | Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions. |                                                                                       |
| <b>Frequency</b>        | 750 MHz to 5800 MHz                                                                                                                                                  |                                                                                       |
| <b>Return Loss</b>      | > 20 dB                                                                                                                                                              |                                                                                       |
| <b>Power Capability</b> | > 100 W (f < 1GHz), > 40 W (f > 1GHz)                                                                                                                                |                                                                                       |

### 3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

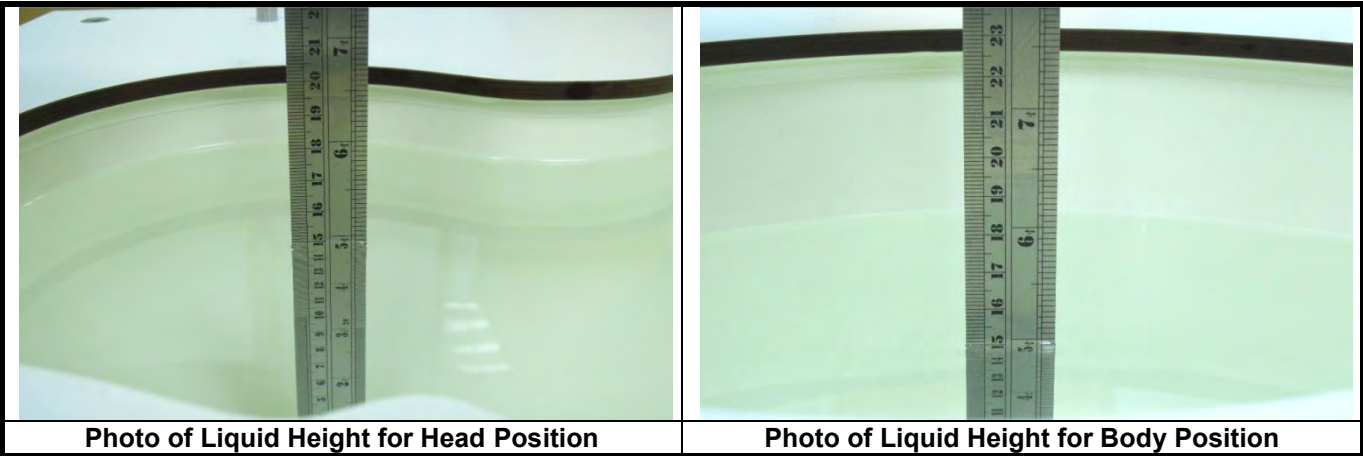

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. For the body tissue simulating liquids, the dielectric properties are defined in KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

# FCC SAR Test Report

**Table-3.1 Targets of Tissue Simulating Liquid**

| Frequency (MHz) | Target Permittivity | Range of $\pm 5\%$ | Target Conductivity | Range of $\pm 5\%$ |
|-----------------|---------------------|--------------------|---------------------|--------------------|
| <b>For Head</b> |                     |                    |                     |                    |
| 750             | 41.9                | 39.8 ~ 44.0        | 0.89                | 0.85 ~ 0.93        |
| 835             | 41.5                | 39.4 ~ 43.6        | 0.90                | 0.86 ~ 0.95        |
| 900             | 41.5                | 39.4 ~ 43.6        | 0.97                | 0.92 ~ 1.02        |
| 1450            | 40.5                | 38.5 ~ 42.5        | 1.20                | 1.14 ~ 1.26        |
| 1640            | 40.3                | 38.3 ~ 42.3        | 1.29                | 1.23 ~ 1.35        |
| 1750            | 40.1                | 38.1 ~ 42.1        | 1.37                | 1.30 ~ 1.44        |
| 1800            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 1900            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 2000            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 2300            | 39.5                | 37.5 ~ 41.5        | 1.67                | 1.59 ~ 1.75        |
| 2450            | 39.2                | 37.2 ~ 41.2        | 1.80                | 1.71 ~ 1.89        |
| 2600            | 39.0                | 37.1 ~ 41.0        | 1.96                | 1.86 ~ 2.06        |
| 3500            | 37.9                | 36.0 ~ 39.8        | 2.91                | 2.76 ~ 3.06        |
| 5200            | 36.0                | 34.2 ~ 37.8        | 4.66                | 4.43 ~ 4.89        |
| 5300            | 35.9                | 34.1 ~ 37.7        | 4.76                | 4.52 ~ 5.00        |
| 5500            | 35.6                | 33.8 ~ 37.4        | 4.96                | 4.71 ~ 5.21        |
| 5600            | 35.5                | 33.7 ~ 37.3        | 5.07                | 4.82 ~ 5.32        |
| 5800            | 35.3                | 33.5 ~ 37.1        | 5.27                | 5.01 ~ 5.53        |
| <b>For Body</b> |                     |                    |                     |                    |
| 750             | 55.5                | 52.7 ~ 58.3        | 0.96                | 0.91 ~ 1.01        |
| 835             | 55.2                | 52.4 ~ 58.0        | 0.97                | 0.92 ~ 1.02        |
| 900             | 55.0                | 52.3 ~ 57.8        | 1.05                | 1.00 ~ 1.10        |
| 1450            | 54.0                | 51.3 ~ 56.7        | 1.30                | 1.24 ~ 1.37        |
| 1640            | 53.8                | 51.1 ~ 56.5        | 1.40                | 1.33 ~ 1.47        |
| 1750            | 53.4                | 50.7 ~ 56.1        | 1.49                | 1.42 ~ 1.56        |
| 1800            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 1900            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 2000            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 2300            | 52.9                | 50.3 ~ 55.5        | 1.81                | 1.72 ~ 1.90        |
| 2450            | 52.7                | 50.1 ~ 55.3        | 1.95                | 1.85 ~ 2.05        |
| 2600            | 52.5                | 49.9 ~ 55.1        | 2.16                | 2.05 ~ 2.27        |
| 3500            | 51.3                | 48.7 ~ 53.9        | 3.31                | 3.14 ~ 3.48        |
| 5200            | 49.0                | 46.6 ~ 51.5        | 5.30                | 5.04 ~ 5.57        |
| 5300            | 48.9                | 46.5 ~ 51.3        | 5.42                | 5.15 ~ 5.69        |
| 5500            | 48.6                | 46.2 ~ 51.0        | 5.65                | 5.37 ~ 5.93        |
| 5600            | 48.5                | 46.1 ~ 50.9        | 5.77                | 5.48 ~ 6.06        |
| 5800            | 48.2                | 45.8 ~ 50.6        | 6.00                | 5.70 ~ 6.30        |

## FCC SAR Test Report


The following table gives the recipes for tissue simulating liquids.

**Table-3.2 Recipes of Tissue Simulating Liquid**

| Tissue Type | Bactericide | DGBE | HEC | NaCl | Sucrose | Triton X-100 | Water | Diethylene Glycol Mono-hexylether |
|-------------|-------------|------|-----|------|---------|--------------|-------|-----------------------------------|
| H750        | 0.2         | -    | 0.2 | 1.5  | 56.0    | -            | 42.1  | -                                 |
| H835        | 0.2         | -    | 0.2 | 1.5  | 57.0    | -            | 41.1  | -                                 |
| H900        | 0.2         | -    | 0.2 | 1.4  | 58.0    | -            | 40.2  | -                                 |
| H1450       | -           | 43.3 | -   | 0.6  | -       | -            | 56.1  | -                                 |
| H1640       | -           | 45.8 | -   | 0.5  | -       | -            | 53.7  | -                                 |
| H1750       | -           | 47.0 | -   | 0.4  | -       | -            | 52.6  | -                                 |
| H1800       | -           | 44.5 | -   | 0.3  | -       | -            | 55.2  | -                                 |
| H1900       | -           | 44.5 | -   | 0.2  | -       | -            | 55.3  | -                                 |
| H2000       | -           | 44.5 | -   | 0.1  | -       | -            | 55.4  | -                                 |
| H2300       | -           | 44.9 | -   | 0.1  | -       | -            | 55.0  | -                                 |
| H2450       | -           | 45.0 | -   | 0.1  | -       | -            | 54.9  | -                                 |
| H2600       | -           | 45.1 | -   | 0.1  | -       | -            | 54.8  | -                                 |
| H3500       | -           | 8.0  | -   | 0.2  | -       | 20.0         | 71.8  | -                                 |
| H5G         | -           | -    | -   | -    | -       | 17.2         | 65.5  | 17.3                              |
| B750        | 0.2         | -    | 0.2 | 0.8  | 48.8    | -            | 50.0  | -                                 |
| B835        | 0.2         | -    | 0.2 | 0.9  | 48.5    | -            | 50.2  | -                                 |
| B900        | 0.2         | -    | 0.2 | 0.9  | 48.2    | -            | 50.5  | -                                 |
| B1450       | -           | 34.0 | -   | 0.3  | -       | -            | 65.7  | -                                 |
| B1640       | -           | 32.5 | -   | 0.3  | -       | -            | 67.2  | -                                 |
| B1750       | -           | 31.0 | -   | 0.2  | -       | -            | 68.8  | -                                 |
| B1800       | -           | 29.5 | -   | 0.4  | -       | -            | 70.1  | -                                 |
| B1900       | -           | 29.5 | -   | 0.3  | -       | -            | 70.2  | -                                 |
| B2000       | -           | 30.0 | -   | 0.2  | -       | -            | 69.8  | -                                 |
| B2300       | -           | 31.0 | -   | 0.1  | -       | -            | 68.9  | -                                 |
| B2450       | -           | 31.4 | -   | 0.1  | -       | -            | 68.5  | -                                 |
| B2600       | -           | 31.8 | -   | 0.1  | -       | -            | 68.1  | -                                 |
| B3500       | -           | 28.8 | -   | 0.1  | -       | -            | 71.1  | -                                 |
| B5G         | -           | -    | -   | -    | -       | 10.7         | 78.6  | 10.7                              |

## 3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

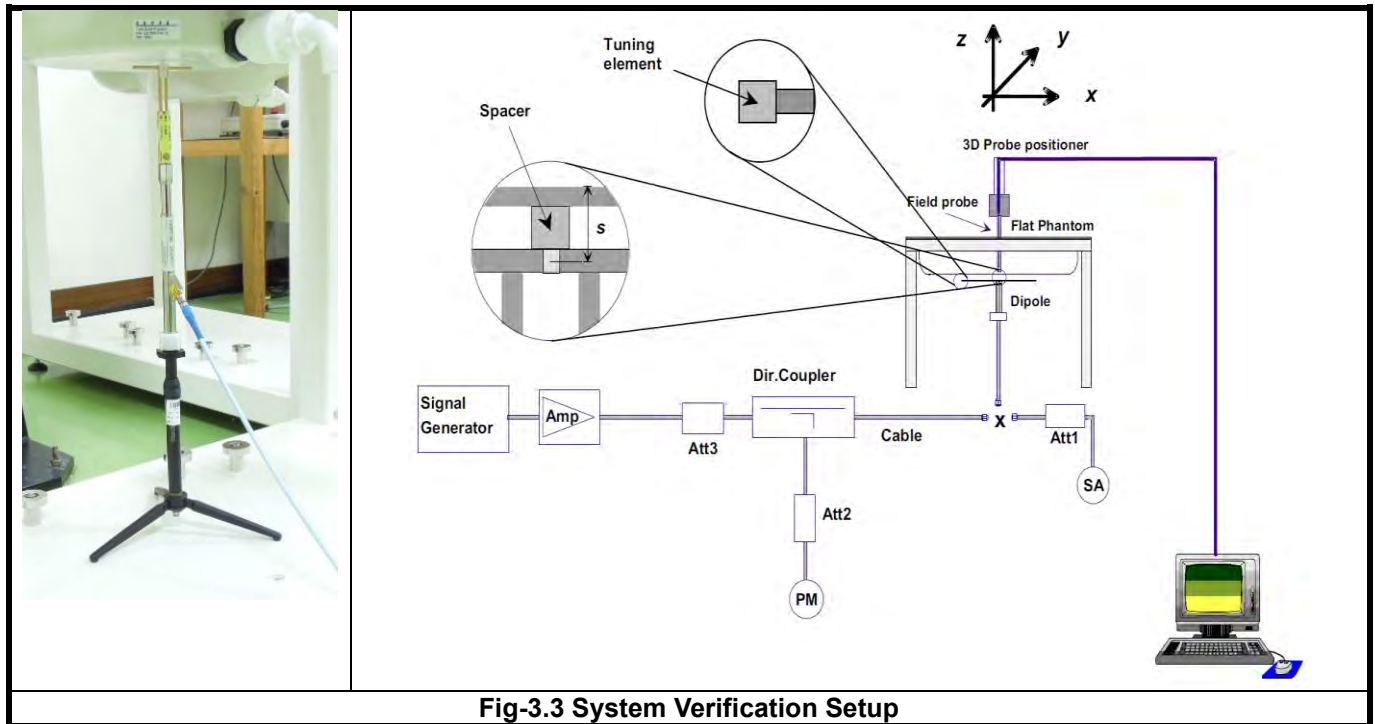

**Fig-3.3 System Verification Setup**

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The spectrum analyzer measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.



## 3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- Make EUT to transmit maximum output power
- Measure conducted output power through RF cable
- Place the EUT in the specific position of phantom
- Perform SAR testing steps on the DASY system
- Record the SAR value

### 3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

| Items                              | <= 2 GHz | 2-3 GHz  | 3-4 GHz  | 4-5 GHz  | 5-6 GHz  |
|------------------------------------|----------|----------|----------|----------|----------|
| Area Scan ( $\Delta x, \Delta y$ ) | <= 15 mm | <= 12 mm | <= 12 mm | <= 10 mm | <= 10 mm |
| Zoom Scan ( $\Delta x, \Delta y$ ) | <= 8 mm  | <= 5 mm  | <= 5 mm  | <= 4 mm  | <= 4 mm  |
| Zoom Scan ( $\Delta z$ )           | <= 5 mm  | <= 5 mm  | <= 4 mm  | <= 3 mm  | <= 2 mm  |
| Zoom Scan Volume                   | >= 30 mm | >= 30 mm | >= 28 mm | >= 25 mm | >= 22 mm |

#### Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of  $\Delta x / \Delta y$  (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

### 3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.



### 3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

### 3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## 4. SAR Measurement Evaluation

### 4.1 EUT Configuration and Setting

#### <Considerations Related to Proximity Sensor>

The device supports WWAN, WLAN, and Bluetooth capabilities. It is designed with a proximity sensor which can trigger/not trigger power reduction for WCDMA and LTE on Rear Face and Top Side of EUT for SAR compliance. Others RF capability (WLAN and Bluetooth) have no power reduction. The power levels for all wireless technologies and the power reduction please refer to section 4.6 of this report.

#### Proximity Sensor Triggering Distances (KDB 616217 D04 §6.2)

The proximity sensor triggering distance was determined per KDB 616217 for rear face and applicable edge. Summary for power verification per distance was tabulated in the below table.

| Output Power Verification in dBm for EUT Rear Face |      |      |      |      |      |      |      |      |      |      |      |
|----------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|
| Distance (mm)                                      | 14   | 15   | 16   | 17   | 18   | 19   | 20   | 21   | 22   | 23   | 24   |
| WCDMA II                                           | 15.5 | 15.4 | 15.4 | 15.0 | 15.0 | 15.2 | 22.8 | 23.3 | 23.3 | 23.0 | 23.2 |
| WCDMA IV                                           | 17.1 | 17.3 | 17.2 | 17.0 | 17.0 | 17.5 | 22.8 | 22.7 | 22.6 | 23.0 | 22.7 |
| WCDMA V                                            | 17.4 | 17.6 | 17.5 | 17.7 | 17.7 | 17.6 | 22.4 | 22.6 | 22.3 | 22.7 | 22.3 |
| LTE 2                                              | 16.5 | 16.6 | 16.5 | 16.6 | 16.3 | 16.3 | 23.0 | 23.1 | 22.9 | 22.8 | 22.7 |
| LTE 4                                              | 16.8 | 17.0 | 17.1 | 17.0 | 17.0 | 17.3 | 22.7 | 22.6 | 22.7 | 22.5 | 22.5 |
| LTE 5                                              | 17.8 | 17.9 | 17.7 | 18.1 | 17.7 | 17.6 | 22.1 | 22.5 | 22.1 | 22.4 | 22.4 |
| LTE 7                                              | 16.3 | 16.3 | 16.7 | 16.4 | 16.5 | 16.3 | 21.6 | 21.6 | 21.6 | 21.7 | 21.8 |
| LTE 12                                             | 20.0 | 20.0 | 20.3 | 19.8 | 19.8 | 20.2 | 22.6 | 22.8 | 22.8 | 22.6 | 22.6 |
| LTE 13                                             | 18.1 | 18.3 | 18.0 | 18.2 | 18.1 | 18.0 | 22.7 | 22.6 | 22.9 | 22.9 | 22.9 |
| LTE 25                                             | 16.4 | 16.5 | 16.5 | 16.2 | 16.7 | 16.5 | 22.5 | 22.8 | 22.5 | 22.9 | 22.8 |
| LTE 26                                             | 18.9 | 18.5 | 18.6 | 18.9 | 18.4 | 18.7 | 22.9 | 22.8 | 23.0 | 22.9 | 23.0 |
| LTE 41                                             | 16.5 | 16.4 | 16.6 | 16.6 | 16.5 | 16.4 | 21.9 | 21.9 | 22.0 | 22.0 | 21.5 |

| Output Power Verification in dBm for EUT Top Edge |      |      |      |      |      |      |      |      |      |      |      |
|---------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|
| Distance (mm)                                     | 13   | 14   | 15   | 16   | 17   | 18   | 19   | 20   | 21   | 22   | 23   |
| WCDMA II                                          | 15.3 | 15.0 | 15.3 | 15.5 | 15.2 | 15.5 | 22.8 | 23.1 | 22.9 | 22.8 | 23.1 |
| WCDMA IV                                          | 17.5 | 17.4 | 17.5 | 17.5 | 17.5 | 17.0 | 23.0 | 23.0 | 23.0 | 22.5 | 22.8 |
| WCDMA V                                           | 17.2 | 17.2 | 17.6 | 17.7 | 17.6 | 17.6 | 22.3 | 22.4 | 22.5 | 22.3 | 22.4 |
| LTE 2                                             | 16.5 | 16.3 | 16.5 | 16.2 | 16.4 | 16.2 | 22.8 | 22.7 | 22.7 | 23.1 | 23.1 |
| LTE 4                                             | 17.2 | 17.2 | 17.0 | 16.9 | 16.8 | 16.9 | 22.6 | 22.5 | 22.7 | 22.7 | 22.5 |
| LTE 5                                             | 17.6 | 18.1 | 17.7 | 18.0 | 17.6 | 18.1 | 22.3 | 22.4 | 22.2 | 22.5 | 22.6 |
| LTE 7                                             | 16.7 | 16.5 | 16.2 | 16.5 | 16.2 | 16.2 | 21.7 | 21.7 | 21.8 | 22.1 | 21.9 |
| LTE 12                                            | 20.3 | 20.2 | 20.1 | 19.8 | 20.3 | 20.2 | 22.7 | 23.0 | 22.7 | 22.7 | 22.7 |
| LTE 13                                            | 18.2 | 17.8 | 18.3 | 17.9 | 18.1 | 17.9 | 22.5 | 22.5 | 22.6 | 22.9 | 22.9 |
| LTE 25                                            | 16.7 | 16.4 | 16.6 | 16.2 | 16.7 | 16.2 | 22.7 | 22.7 | 22.5 | 22.8 | 22.7 |
| LTE 26                                            | 18.9 | 18.5 | 18.4 | 18.9 | 18.9 | 18.7 | 23.3 | 22.9 | 23.1 | 23.2 | 23.0 |
| LTE 41                                            | 16.5 | 16.8 | 16.6 | 16.6 | 16.8 | 16.8 | 21.5 | 21.9 | 21.7 | 22.0 | 21.6 |


#### Proximity Sensor Coverage (KDB 616217 D04 §6.3)

Since the proximity sensor is collocated with antenna in one component, the procedure for proximity sensor coverage is not required.

## FCC SAR Test Report

### Proximity Sensor Tilt Angle Influences (KDB 616217 D04 §6.4)

The proximity sensor tilt angle influence was determined per KDB 616217 for applicable edge. Summary for proximity sensor tilt angle influence is shown in below.

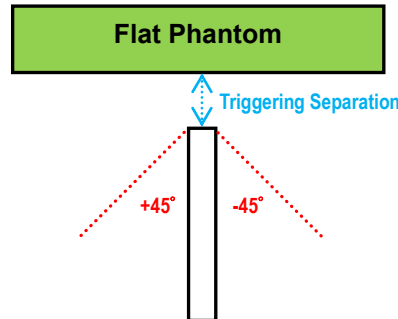

| Orientation | Separation Distance (mm) | Tilt Angle |      |      |      |      |    |     |     |     |     |     |
|-------------|--------------------------|------------|------|------|------|------|----|-----|-----|-----|-----|-----|
|             |                          | -45°       | -40° | -30° | -20° | -10° | 0° | 10° | 20° | 30° | 40° | 45° |
| Top Edge    | 18                       | On         | On   | On   | On   | On   | On | On  | On  | On  | On  | On  |

### Summary for Proximity Sensor Triggering Test

According to the procedures noticed in KDB 616217 D04, the proximity sensor triggering distance is 19 mm for EUT Rear Face, and 18 mm for Top Side. The separation distance of 18 mm determined by the smallest triggering distance on Top Side is used to access the tilt angle influence and the sensor does not release during  $\pm 45$  degree. Therefore, the smallest separation distance for tilt angle influence is 18 mm for the Top Side. The conservation triggering distances based on the separation distance for the sensor trigger / not triggered as EUT with power reduction at 0 mm, and EUT without power reduction at 18 mm for EUT Rear Face, and 17 mm for Top Side were used to test SAR.

The power reduction is depends on the proximity sensor input. For a steady SAR test, the power reduction was enabled or disabled manually by engineering software during SAR testing.

### <Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator (Agilent E5515C is used for GSM/WCDMA/CDMA, and Anritsu MT8820C is used for LTE). Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

### <Considerations Related to WCDMA for Setup and Testing>

#### Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices", for the highest reported SAR body-worn exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

## FCC SAR Test Report

### Handsets with Release 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices", for the highest reported body-worn exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn measurements is tested for next to the ear head exposure.

### Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH / HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors ( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

| Sub-test | $\beta_c$              | $\beta_d$              | $\beta_d$<br>(SF) | $\beta_c / \beta_d$    | $\beta_{hs}^{(1)}$ | CM (dB) <sup>(2)</sup> | MPR |
|----------|------------------------|------------------------|-------------------|------------------------|--------------------|------------------------|-----|
| 1        | 2 / 15                 | 15 / 15                | 64                | 2 / 15                 | 4 / 15             | 0.0                    | 0   |
| 2        | 12 / 15 <sup>(3)</sup> | 15 / 15 <sup>(3)</sup> | 64                | 12 / 15 <sup>(3)</sup> | 24 / 15            | 1.0                    | 0   |
| 3        | 15 / 15                | 8 / 15                 | 64                | 15 / 8                 | 30 / 15            | 1.5                    | 0.5 |
| 4        | 15 / 15                | 4 / 15                 | 64                | 15 / 4                 | 30 / 15            | 1.5                    | 0.5 |

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c / \beta_d = 12 / 15$ ,  $\beta_{hs} / \beta_c = 24 / 15$ .

Note 3: For subtest 2 the  $\beta_c / \beta_d$  ratio of 12 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11 / 15$  and  $\beta_d = 15 / 15$ .

### Release 6 HSUPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the  $\beta$  values indicated in below.

## FCC SAR Test Report

| Sub-test | $\beta_c$              | $\beta_d$              | $\beta_d$ (SF) | $\beta_c / \beta_d$    | $\beta_{hs}^{(1)}$ | $\beta_{ec}$ | $\beta_{ed}$                                 | $\beta_{ed}$ (SF) | $\beta_{ed}$ (codes) | CM <sup>(2)</sup> (dB) | MPR (dB) | AG <sup>(4)</sup> Index | E-TFCI |
|----------|------------------------|------------------------|----------------|------------------------|--------------------|--------------|----------------------------------------------|-------------------|----------------------|------------------------|----------|-------------------------|--------|
| 1        | 11 / 15 <sup>(3)</sup> | 15 / 15 <sup>(3)</sup> | 64             | 11 / 15 <sup>(3)</sup> | 22 / 15            | 209 / 225    | 1039 / 225                                   | 4                 | 1                    | 1.0                    | 0.0      | 20                      | 75     |
| 2        | 6 / 15                 | 15 / 15                | 64             | 6 / 15                 | 12 / 15            | 12 / 15      | 94 / 75                                      | 4                 | 1                    | 3.0                    | 2.0      | 12                      | 67     |
| 3        | 15 / 15                | 9 / 15                 | 64             | 15 / 9                 | 30 / 15            | 30 / 15      | $\beta_{ed1}: 47/15$<br>$\beta_{ed2}: 47/15$ | 4                 | 2                    | 2.0                    | 1.0      | 15                      | 92     |
| 4        | 2 / 15                 | 15 / 15                | 64             | 2 / 15                 | 4 / 15             | 2 / 15       | 56 / 75                                      | 4                 | 1                    | 3.0                    | 2.0      | 17                      | 71     |
| 5        | 15 / 15 <sup>(4)</sup> | 15 / 15 <sup>(4)</sup> | 64             | 15 / 15 <sup>(4)</sup> | 30 / 15            | 24 / 15      | 134 / 15                                     | 4                 | 1                    | 1.0                    | 0.0      | 21                      | 81     |

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c / \beta_d = 12 / 15$ ,  $\beta_{hs} / \beta_c = 24 / 15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c / \beta_d$  ratio of 11 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10 / 15$  and  $\beta_d = 15 / 15$ .

Note 4: For subtest 5 the  $\beta_c / \beta_d$  ratio of 15 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14 / 15$  and  $\beta_d = 15 / 15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  cannot be set directly; it is set by Absolute Grant Value.

### HSPA+ SAR Guidance

The 3G SAR test reduction procedure is applied to HSPA+ (uplink) with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 6 HSPA, SAR is required for Rel. 7 HSPA+. Power is measured for HSPA+ that supports uplink 16QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

### DC-HSDPA SAR Guidance

The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 5 HSDPA, SAR is required for Rel. 8 DC-HSDPA. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

### <Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, is category 3, supports both QPSK and 16QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK and 16QAM modulation. The results please refer to section 4.6 of this report.

| EUT Supported LTE Band and Channel Bandwidth |            |          |          |           |           |           |
|----------------------------------------------|------------|----------|----------|-----------|-----------|-----------|
| LTE Band                                     | BW 1.4 MHz | BW 3 MHz | BW 5 MHz | BW 10 MHz | BW 15 MHz | BW 20 MHz |
| 2                                            | V          | V        | V        | V         | V         | V         |
| 4                                            | V          | V        | V        | V         | V         | V         |
| 5                                            | V          | V        | V        | V         |           |           |
| 7                                            |            |          | V        | V         | V         | V         |
| 12                                           | V          | V        | V        | V         |           |           |
| 13                                           |            |          | V        | V         |           |           |
| 25                                           | V          | V        | V        | V         | V         | V         |
| 26                                           | V          | V        | V        | V         | V         |           |
| 41                                           |            |          | V        | V         | V         | V         |

## FCC SAR Test Report

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

| Modulation | Channel Bandwidth / RB Configurations |          |          |           |           |           | LTE MPR Setting (dB) |
|------------|---------------------------------------|----------|----------|-----------|-----------|-----------|----------------------|
|            | BW 1.4 MHz                            | BW 3 MHz | BW 5 MHz | BW 10 MHz | BW 15 MHz | BW 20 MHz |                      |
| QPSK       | > 5                                   | > 4      | > 8      | > 12      | > 16      | > 18      | 1                    |
| 16QAM      | <= 5                                  | <= 4     | <= 8     | <= 12     | <= 16     | <= 18     | 1                    |
| 16QAM      | > 5                                   | > 4      | > 8      | > 12      | > 16      | > 18      | 2                    |


**Note:** MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

### TDD-LTE Setup Configurations

According to KDB 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

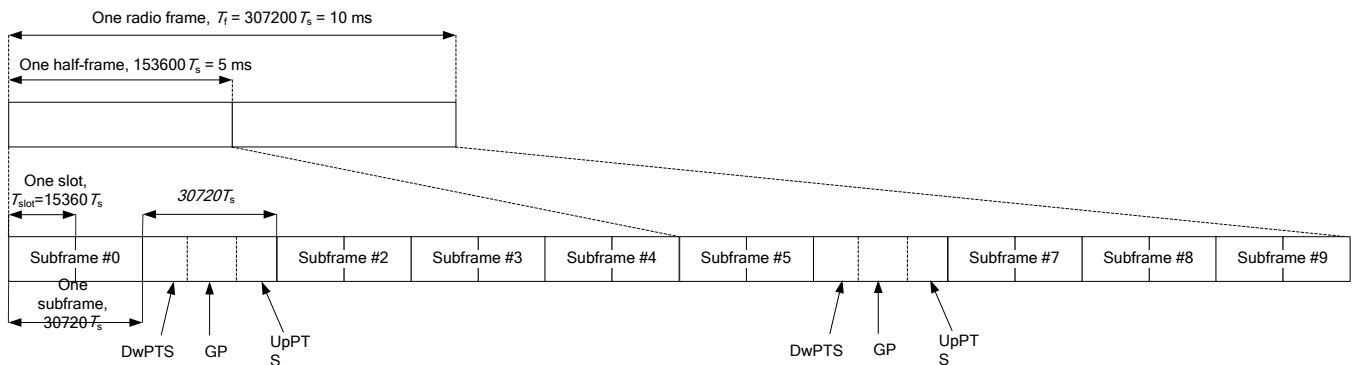

**3GPP TS 36.211 Figure 4.2-1: Frame Structure Type 2**

## FCC SAR Test Report

| Special Subframe Configuration | Normal Cyclic Prefix in Downlink |                                |                                  | Extended Cyclic Prefix in Downlink |                                |                                  |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |
|                                |                                  | Normal Cyclic Prefix in Uplink | Extended Cyclic Prefix in Uplink |                                    | Normal Cyclic Prefix in Uplink | Extended Cyclic Prefix in Uplink |
| 0                              | 6592 • Ts                        | 2192 • Ts                      | 2560 • Ts                        | 7680 • Ts                          | 2192 • Ts                      | 2560 • Ts                        |
| 1                              | 19760 • Ts                       |                                |                                  | 20480 • Ts                         |                                |                                  |
| 2                              | 21952 • Ts                       |                                |                                  | 23040 • Ts                         |                                |                                  |
| 3                              | 24144 • Ts                       |                                |                                  | 25600 • Ts                         |                                |                                  |
| 4                              | 26336 • Ts                       | 4384 • Ts                      | 5120 • Ts                        | 7680 • Ts                          | 4384 • Ts                      | 5120 • Ts                        |
| 5                              | 6592 • Ts                        |                                |                                  | 20480 • Ts                         |                                |                                  |
| 6                              | 19760 • Ts                       |                                |                                  | 23040 • Ts                         |                                |                                  |
| 7                              | 21952 • Ts                       |                                |                                  | 12800 • Ts                         |                                |                                  |
| 8                              | 24144 • Ts                       |                                |                                  | -                                  | -                              | -                                |
| 9                              | 13168 • Ts                       |                                |                                  | -                                  | -                              | -                                |

3GPP TS 36.211 Table 4.2-1: Configuration of Special Subframe

| Uplink-Downlink Configuration | Downlink-to-Uplink Switch-Point Periodicity | Subframe Number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D |

3GPP TS 36.211 Table 4.2-2: Uplink-Downlink Configurations

The variety of different TD-LTE uplink-downlink configurations allows a network operator to allocate the network's capacity between uplink and downlink traffic to meet the needs of the network. The uplink duty cycle of these seven configurations can readily be computed and shown in below.

| UL-DL Configuration | 0      | 1      | 2      | 3      | 4      | 5      | 6      |
|---------------------|--------|--------|--------|--------|--------|--------|--------|
| Highest Duty-Cycle  | 63.33% | 43.33% | 23.33% | 31.67% | 21.67% | 11.67% | 53.33% |

Considering the highest transmission duty cycle, TDD-LTE was tested using Uplink-Downlink Configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 7 using extended cyclic prefix uplink. Therefore, SAR testing for TDD-LTE was performed at the maximum output power with highest transmission duty cycle of 63.33%.

### <Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

### Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

### Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.



## FCC SAR Test Report

---

### SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

### Test Reduction for U-NII-1 (5.2 GHz) and U-NII-2A (5.3 GHz) Bands

For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following.


- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition).
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

### <Considerations Related to Bluetooth for Setup and Testing>

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

## 4.2 EUT Testing Position

For full-size tablet, according to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

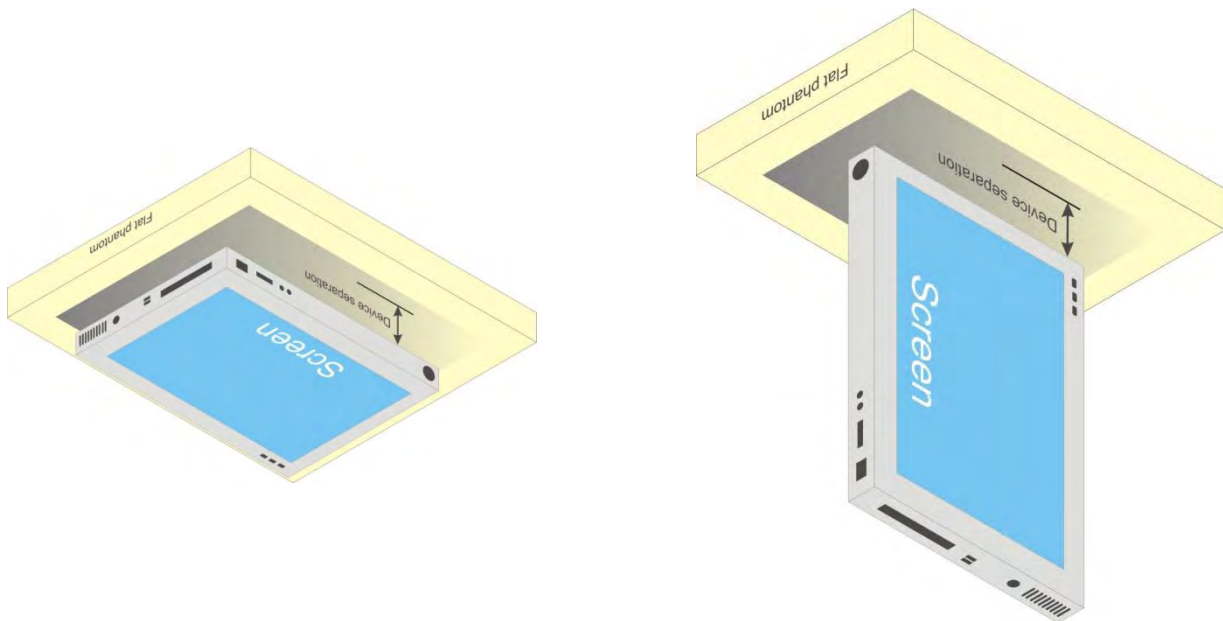

**Fig-4.1 Illustration for Tablet Setup**

## FCC SAR Test Report

### 4.2.1 SAR Test Exclusion Evaluations

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

- For the test separation distance  $\leq 50$  mm

$$\frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \sqrt{f_{(\text{GHz})}}$$

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

- For the test separation distance  $> 50$  mm, and the frequency at 100 MHz to 1500 MHz

$$\left[ (\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times \left( \frac{f_{(\text{MHz})}}{150} \right) \right]_{(\text{mW})}$$

- For the test separation distance  $> 50$  mm, and the frequency at  $> 1500$  MHz to 6 GHz

$$[(\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times 10]_{(\text{mW})}$$

| Mode     | Max. Tune-up Power (dBm) | Max. Tune-up Power (mW) | Rear Face            |                   |                      | Left Side            |                   |                      | Right Side           |                   |                      | Top Side             |                   |                      | Bottom Side          |                   |                      |
|----------|--------------------------|-------------------------|----------------------|-------------------|----------------------|----------------------|-------------------|----------------------|----------------------|-------------------|----------------------|----------------------|-------------------|----------------------|----------------------|-------------------|----------------------|
|          |                          |                         | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? |
| WCDMA II | 24.0                     | 223.87                  | 5                    | 69.4              | YES                  | 28.24                | 12.3              | YES                  | 182.6<br>2           | 1435<br>mW        | No                   | 3                    | 69.4              | YES                  | 193.8                | 1547<br>mW        | No                   |
| WCDMA IV | 24.0                     | 223.87                  | 5                    | 66.5              | YES                  | 28.24                | 11.8              | YES                  | 182.6<br>2           | 1439<br>mW        | No                   | 3                    | 66.5              | YES                  | 193.8                | 1551<br>mW        | No                   |
| WCDMA V  | 24.0                     | 199.53                  | 5                    | 46.2              | YES                  | 28.24                | 8.2               | YES                  | 182.6<br>2           | 912<br>mW         | No                   | 3                    | 46.2              | YES                  | 193.8                | 975<br>mW         | No                   |
| LTE 2    | 24.0                     | 223.87                  | 5                    | 69.4              | YES                  | 28.24                | 12.3              | YES                  | 182.6<br>2           | 1435<br>mW        | No                   | 3                    | 69.4              | YES                  | 193.8                | 1547<br>mW        | No                   |
| LTE 4    | 24.0                     | 199.53                  | 5                    | 66.5              | YES                  | 28.24                | 11.8              | YES                  | 182.6<br>2           | 1439<br>mW        | No                   | 3                    | 66.5              | YES                  | 193.8                | 1551<br>mW        | No                   |
| LTE 5    | 24.0                     | 199.53                  | 5                    | 46.2              | YES                  | 28.24                | 8.2               | YES                  | 182.6<br>2           | 912<br>mW         | No                   | 3                    | 46.2              | YES                  | 193.8                | 975<br>mW         | No                   |
| LTE 7    | 23.0                     | 177.83                  | 5                    | 63.8              | YES                  | 28.24                | 11.3              | YES                  | 182.6<br>2           | 1420<br>mW        | No                   | 3                    | 63.8              | YES                  | 193.8                | 1532<br>mW        | No                   |
| LTE 12   | 24.0                     | 223.87                  | 5                    | 42.5              | YES                  | 28.24                | 7.5               | YES                  | 182.6<br>2           | 809<br>mW         | No                   | 3                    | 42.5              | YES                  | 193.8                | 862<br>mW         | No                   |
| LTE 13   | 24.0                     | 199.53                  | 5                    | 44.5              | YES                  | 28.24                | 7.9               | YES                  | 182.6<br>2           | 863<br>mW         | No                   | 3                    | 44.5              | YES                  | 193.8                | 922<br>mW         | No                   |
| LTE 25   | 24.0                     | 223.87                  | 5                    | 69.5              | YES                  | 28.24                | 12.3              | YES                  | 182.6<br>2           | 1435<br>mW        | No                   | 3                    | 69.5              | YES                  | 193.8                | 1546<br>mW        | No                   |
| LTE 26   | 24.0                     | 223.87                  | 5                    | 46.3              | YES                  | 28.24                | 8.2               | YES                  | 182.6<br>2           | 913<br>mW         | No                   | 3                    | 46.3              | YES                  | 193.8                | 977<br>mW         | No                   |
| LTE 41   | 23.0                     | 177.83                  | 5                    | 65.5              | YES                  | 28.24                | 11.6              | YES                  | 182.6<br>2           | 1418<br>mW        | No                   | 3                    | 65.5              | YES                  | 193.8                | 1529<br>mW        | No                   |

#### Note:

- When separation distance  $\leq 50$  mm and the calculated result shown in above table is  $\leq 3.0$  for SAR-1g exposure condition, or  $\leq 7.5$  for SAR-10g exposure condition, the SAR testing exclusion is applied.
- When separation distance  $> 50$  mm and the device output power is less than the calculated result (power threshold, mW) shown in above table, the SAR testing exclusion is applied.

## FCC SAR Test Report

### 4.2.2 Simultaneous Transmission Possibilities

The simultaneous transmission possibilities for this device are listed as below.

#### WWAN + WLAN 1 :

| Simultaneous TX Combination | Capable Transmit Configurations           | Body Exposure Condition |
|-----------------------------|-------------------------------------------|-------------------------|
| 1                           | WCDMA II (Data) + WLAN (Data) + BT (Data) | Yes                     |
| 2                           | WCDMA IV (Data) + WLAN (Data) + BT (Data) | Yes                     |
| 3                           | WCDMA V (Data) + WLAN (Data) + BT (Data)  | Yes                     |
| 4                           | LTE 2 (Data) + WLAN (Data) + BT (Data)    | Yes                     |
| 5                           | LTE 4 (Data) + WLAN (Data) + BT (Data)    | Yes                     |
| 6                           | LTE 5 (Data) + WLAN (Data) + BT (Data)    | Yes                     |
| 7                           | LTE 7 (Data) + WLAN (Data) + BT (Data)    | Yes                     |
| 8                           | LTE 12 (Data) + WLAN (Data) + BT (Data)   | Yes                     |
| 9                           | LTE 13 (Data) + WLAN (Data) + BT (Data)   | Yes                     |
| 10                          | LTE 25 (Data) + WLAN (Data) + BT (Data)   | Yes                     |
| 11                          | LTE 26 (Data) + WLAN (Data) + BT (Data)   | Yes                     |
| 12                          | LTE 41 (Data) + WLAN (Data) + BT (Data)   | Yes                     |

#### WWAN + WLAN 2 :

| Simultaneous TX Combination | Capable Transmit Configurations                       | Body Exposure Condition |
|-----------------------------|-------------------------------------------------------|-------------------------|
| 1                           | WCDMA II (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data) | Yes                     |
| 2                           | WCDMA IV (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data) | Yes                     |
| 3                           | WCDMA V (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)  | Yes                     |
| 4                           | LTE 2 (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)    | Yes                     |
| 5                           | LTE 4 (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)    | Yes                     |
| 6                           | LTE 5 (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)    | Yes                     |
| 7                           | LTE 7 (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)    | Yes                     |
| 8                           | LTE 12 (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)   | Yes                     |
| 9                           | LTE 13 (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)   | Yes                     |
| 10                          | LTE 25 (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)   | Yes                     |
| 11                          | LTE 26 (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)   | Yes                     |
| 12                          | LTE 41 (Data) + WLAN Ant0 (Data) + WLAN Ant1 (Data)   | Yes                     |
| 13                          | WCDMA II (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)   | Yes                     |
| 14                          | WCDMA IV (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)   | Yes                     |
| 15                          | WCDMA V (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)    | Yes                     |
| 16                          | LTE 2 (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)      | Yes                     |
| 17                          | LTE 4 (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)      | Yes                     |
| 18                          | LTE 5 (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)      | Yes                     |
| 19                          | LTE 7 (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)      | Yes                     |
| 20                          | LTE 12 (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)     | Yes                     |
| 21                          | LTE 13 (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)     | Yes                     |
| 22                          | LTE 25 (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)     | Yes                     |
| 23                          | LTE 26 (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)     | Yes                     |
| 24                          | LTE 41 (Data) + WLAN Ant0 (Data) + BT Ant1 (Data)     | Yes                     |

**Note:** The 2.4G WLAN and 5G WLAN cannot transmit simultaneously.

## FCC SAR Test Report

### 4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

| Test Date     | Tissue Type | Frequency (MHz) | Liquid Temp. (°C) | Measured Conductivity ( $\sigma$ ) | Measured Permittivity ( $\epsilon_r$ ) | Target Conductivity ( $\sigma$ ) | Target Permittivity ( $\epsilon_r$ ) | Conductivity Deviation (%) | Permittivity Deviation (%) |
|---------------|-------------|-----------------|-------------------|------------------------------------|----------------------------------------|----------------------------------|--------------------------------------|----------------------------|----------------------------|
| Dec. 29, 2016 | Body        | 750             | 23.2              | 0.959                              | 54.477                                 | 0.96                             | 55.5                                 | -0.10                      | -1.84                      |
| Jan. 01, 2017 | Body        | 750             | 23.6              | 0.959                              | 54.477                                 | 0.96                             | 55.5                                 | -0.10                      | -1.84                      |
| Jan. 02, 2017 | Body        | 750             | 23.5              | 0.958                              | 55.016                                 | 0.96                             | 55.5                                 | -0.21                      | -0.87                      |
| Jan. 05, 2017 | Body        | 750             | 23.5              | 0.957                              | 55.471                                 | 0.96                             | 55.5                                 | -0.31                      | -0.05                      |
| Jan. 10, 2017 | Body        | 750             | 23.2              | 0.957                              | 55.472                                 | 0.96                             | 55.5                                 | -0.31                      | -0.05                      |
| Dec. 29, 2016 | Body        | 835             | 23.2              | 0.975                              | 55.019                                 | 0.97                             | 55.2                                 | 0.52                       | -0.33                      |
| Dec. 30, 2016 | Body        | 835             | 23.3              | 0.973                              | 54.919                                 | 0.97                             | 55.2                                 | 0.31                       | -0.51                      |
| Jan. 05, 2017 | Body        | 835             | 23.6              | 0.984                              | 55.349                                 | 0.97                             | 55.2                                 | 1.44                       | 0.27                       |
| Jan. 10, 2017 | Body        | 835             | 23.2              | 0.969                              | 55.378                                 | 0.97                             | 55.2                                 | -0.10                      | 0.32                       |
| Dec. 30, 2016 | Body        | 1750            | 23.3              | 1.456                              | 52.165                                 | 1.49                             | 53.4                                 | -2.28                      | -2.31                      |
| Jan. 09, 2017 | Body        | 1750            | 23.1              | 1.454                              | 51.947                                 | 1.49                             | 53.4                                 | -2.42                      | -2.72                      |
| Mar. 28, 2017 | Body        | 1750            | 23.6              | 1.432                              | 52.801                                 | 1.49                             | 53.4                                 | -3.89                      | -1.12                      |
| Dec. 29, 2016 | Body        | 1900            | 23.2              | 1.573                              | 50.891                                 | 1.52                             | 53.3                                 | 3.49                       | -4.52                      |
| Dec. 29, 2016 | Body        | 1900            | 23.3              | 1.565                              | 50.783                                 | 1.52                             | 53.3                                 | 2.96                       | -4.72                      |
| Jan. 09, 2017 | Body        | 1900            | 23.1              | 1.570                              | 51.661                                 | 1.52                             | 53.3                                 | 3.29                       | -3.08                      |
| Mar. 28, 2017 | Body        | 1900            | 23.6              | 1.562                              | 52.562                                 | 1.52                             | 53.3                                 | 2.76                       | -1.38                      |
| Jan. 11, 2017 | Body        | 2450            | 23.6              | 1.997                              | 52.558                                 | 1.95                             | 52.7                                 | 2.41                       | -0.27                      |
| Mar. 06, 2017 | Body        | 2450            | 23.3              | 1.997                              | 51.524                                 | 1.95                             | 52.7                                 | 2.41                       | -2.23                      |
| Jan. 02, 2017 | Body        | 2600            | 23.4              | 2.167                              | 50.128                                 | 2.16                             | 52.5                                 | 0.32                       | -4.52                      |
| Jan. 03, 2017 | Body        | 2600            | 23.3              | 2.199                              | 50.234                                 | 2.16                             | 52.5                                 | 1.81                       | -4.32                      |
| Jan. 10, 2017 | Body        | 2600            | 23.3              | 2.193                              | 50.164                                 | 2.16                             | 52.5                                 | 1.53                       | -4.45                      |
| Mar. 06, 2017 | Body        | 5250            | 23.3              | 5.423                              | 47.728                                 | 5.36                             | 48.9                                 | 1.18                       | -2.40                      |
| Mar. 06, 2017 | Body        | 5600            | 23.3              | 5.915                              | 46.988                                 | 5.77                             | 48.5                                 | 2.51                       | -3.12                      |
| Mar. 06, 2017 | Body        | 5800            | 23.3              | 6.193                              | 46.657                                 | 6.00                             | 48.2                                 | 3.22                       | -3.20                      |

#### Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within  $\pm 5\%$  of the target values. Liquid temperature during the SAR testing must be within  $\pm 2^\circ\text{C}$ .

## FCC SAR Test Report

### 4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.

| Test Date     | Probe S/N | Calibration Point |      | Measured Conductivity ( $\sigma$ ) | Measured Permittivity ( $\epsilon_r$ ) | Validation for CW |                 |                | Validation for Modulation |             |      |
|---------------|-----------|-------------------|------|------------------------------------|----------------------------------------|-------------------|-----------------|----------------|---------------------------|-------------|------|
|               |           |                   |      |                                    |                                        | Sensitivity Range | Probe Linearity | Probe Isotropy | Modulation Type           | Duty Factor | PAR  |
| Dec. 29, 2016 | 1790      | Body              | 750  | 0.959                              | 54.477                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 01, 2017 | 3650      | Body              | 750  | 0.959                              | 54.477                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 02, 2017 | 3661      | Body              | 750  | 0.958                              | 55.016                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 05, 2017 | 3971      | Body              | 750  | 0.957                              | 55.471                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 10, 2017 | 3971      | Body              | 750  | 0.957                              | 55.472                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Dec. 29, 2016 | 1790      | Body              | 835  | 0.975                              | 55.019                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Dec. 30, 2016 | 1790      | Body              | 835  | 0.973                              | 54.919                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 05, 2017 | 3971      | Body              | 835  | 0.984                              | 55.349                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 10, 2017 | 3971      | Body              | 835  | 0.969                              | 55.378                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Dec. 30, 2016 | 1790      | Body              | 1750 | 1.456                              | 52.165                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 09, 2017 | 3971      | Body              | 1750 | 1.454                              | 51.947                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Mar. 28, 2017 | 3864      | Body              | 1750 | 1.432                              | 52.801                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Dec. 29, 2016 | 3661      | Body              | 1900 | 1.573                              | 50.891                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Dec. 29, 2016 | 1790      | Body              | 1900 | 1.565                              | 50.783                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 09, 2017 | 3971      | Body              | 1900 | 1.570                              | 51.661                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Mar. 28, 2017 | 3864      | Body              | 1900 | 1.562                              | 52.562                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 11, 2017 | 3864      | Body              | 2450 | 1.997                              | 52.558                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Mar. 06, 2017 | 3971      | Body              | 2450 | 1.997                              | 51.524                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jan. 02, 2017 | 3661      | Body              | 2600 | 2.167                              | 50.128                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 03, 2017 | 3661      | Body              | 2600 | 2.199                              | 50.234                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Jan. 10, 2017 | 3971      | Body              | 2600 | 2.193                              | 50.164                                 | Pass              | Pass            | Pass           | N/A                       | N/A         | N/A  |
| Mar. 06, 2017 | 3971      | Body              | 5250 | 5.423                              | 47.728                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Mar. 06, 2017 | 3971      | Body              | 5600 | 5.915                              | 46.988                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Mar. 06, 2017 | 3971      | Body              | 5800 | 6.193                              | 46.657                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |

## FCC SAR Test Report

### 4.5 System Verification

The measuring result for system verification is tabulated as below.

| Test Date     | Mode | Frequency (MHz) | 1W Target SAR-1g (W/kg) | Measured SAR-1g (W/kg) | Normalized to 1W SAR-1g (W/kg) | Deviation (%) | Dipole S/N | Probe S/N | DAE S/N |
|---------------|------|-----------------|-------------------------|------------------------|--------------------------------|---------------|------------|-----------|---------|
| Dec. 29, 2016 | Body | 750             | 8.77                    | 2.15                   | 8.60                           | -1.94         | 1013       | 1790      | 579     |
| Jan. 01, 2017 | Body | 750             | 8.77                    | 2.17                   | 8.68                           | -1.03         | 1013       | 3650      | 861     |
| Jan. 02, 2017 | Body | 750             | 8.77                    | 2.08                   | 8.32                           | -5.13         | 1013       | 3661      | 913     |
| Jan. 05, 2017 | Body | 750             | 8.77                    | 2.12                   | 8.48                           | -3.31         | 1013       | 3971      | 1277    |
| Jan. 10, 2017 | Body | 750             | 8.77                    | 2.13                   | 8.52                           | -2.85         | 1013       | 3971      | 1277    |
| Dec. 29, 2016 | Body | 835             | 9.57                    | 2.40                   | 9.60                           | 0.31          | 4d121      | 1790      | 579     |
| Dec. 30, 2016 | Body | 835             | 9.57                    | 2.23                   | 8.92                           | -6.79         | 4d121      | 1790      | 579     |
| Jan. 05, 2017 | Body | 835             | 9.57                    | 2.42                   | 9.68                           | 1.15          | 4d121      | 3971      | 1277    |
| Jan. 10, 2017 | Body | 835             | 9.57                    | 2.38                   | 9.52                           | -0.52         | 4d121      | 3971      | 1277    |
| Dec. 30, 2016 | Body | 1750            | 37.50                   | 9.14                   | 36.56                          | -2.51         | 1055       | 1790      | 579     |
| Jan. 09, 2017 | Body | 1750            | 37.50                   | 9.16                   | 36.64                          | -2.29         | 1055       | 3971      | 1277    |
| Mar. 28, 2017 | Body | 1750            | 37.50                   | 9.22                   | 36.88                          | -1.65         | 1055       | 3864      | 1305    |
| Dec. 29, 2016 | Body | 1900            | 40.70                   | 10.50                  | 42.00                          | 3.19          | 5d036      | 3661      | 913     |
| Dec. 29, 2016 | Body | 1900            | 40.70                   | 10.40                  | 41.60                          | 2.21          | 5d036      | 1790      | 579     |
| Jan. 09, 2017 | Body | 1900            | 40.70                   | 10.30                  | 41.20                          | 1.23          | 5d036      | 3971      | 1277    |
| Mar. 28, 2017 | Body | 1900            | 40.10                   | 10.20                  | 40.80                          | 1.75          | 5d036      | 3864      | 1305    |
| Jan. 11, 2017 | Body | 2450            | 51.10                   | 12.00                  | 48.00                          | -6.07         | 737        | 3864      | 1431    |
| Mar. 06, 2017 | Body | 2450            | 51.10                   | 12.50                  | 50.00                          | -2.15         | 737        | 3971      | 1277    |
| Jan. 02, 2017 | Body | 2600            | 55.70                   | 14.10                  | 56.40                          | 1.26          | 1020       | 3661      | 913     |
| Jan. 03, 2017 | Body | 2600            | 55.70                   | 13.40                  | 53.60                          | -3.77         | 1020       | 3661      | 913     |
| Jan. 10, 2017 | Body | 2600            | 55.70                   | 14.20                  | 56.80                          | 1.97          | 1020       | 3971      | 1277    |
| Mar. 06, 2017 | Body | 5250            | 77.60                   | 8.23                   | 82.30                          | 6.06          | 1019       | 3971      | 1277    |
| Mar. 06, 2017 | Body | 5600            | 79.60                   | 8.24                   | 82.40                          | 3.52          | 1019       | 3971      | 1277    |
| Mar. 06, 2017 | Body | 5800            | 77.30                   | 8.01                   | 80.10                          | 3.62          | 1019       | 3971      | 1277    |

#### Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

## FCC SAR Test Report

### 4.6 Maximum Output Power

#### 4.6.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

| Mode      | WCDMA Band II<br>(without Power Reduction) | WCDMA Band II<br>(with Power Reduction) | Power Reduction<br>(dB) |
|-----------|--------------------------------------------|-----------------------------------------|-------------------------|
| RMC 12.2K | 24.0                                       | 16.0                                    | 8.0                     |
| HSDPA     | 22.5                                       | 15.0                                    | 7.5                     |
| HSUPA     | 22.5                                       | 15.0                                    | 7.5                     |

| Mode      | WCDMA Band IV<br>(without Power Reduction) | WCDMA Band IV<br>(with Power Reduction) | Power Reduction<br>(dB) |
|-----------|--------------------------------------------|-----------------------------------------|-------------------------|
| RMC 12.2K | 24.0                                       | 18.0                                    | 6.0                     |
| HSDPA     | 22.0                                       | 17.0                                    | 5.0                     |
| HSUPA     | 22.0                                       | 17.0                                    | 5.0                     |

| Mode      | WCDMA Band V<br>(without Power Reduction) | WCDMA Band V<br>(with Power Reduction) | Power Reduction<br>(dB) |
|-----------|-------------------------------------------|----------------------------------------|-------------------------|
| RMC 12.2K | 24.0                                      | 18.0                                   | 6.0                     |
| HSDPA     | 22.0                                      | 17.0                                   | 5.0                     |
| HSUPA     | 22.0                                      | 17.0                                   | 5.0                     |

| Mode         | LTE 2<br>(without Power Reduction) | LTE 2<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|------------------------------------|---------------------------------|-------------------------|
| QPSK / 16QAM | 24.0                               | 17.0                            | 7.0                     |

| Mode         | LTE 4<br>(without Power Reduction) | LTE 4<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|------------------------------------|---------------------------------|-------------------------|
| QPSK / 16QAM | 24.0                               | 17.5                            | 6.5                     |

| Mode         | LTE 5<br>(without Power Reduction) | LTE 5<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|------------------------------------|---------------------------------|-------------------------|
| QPSK / 16QAM | 24.0                               | 18.5                            | 5.5                     |

| Mode         | LTE 7<br>(without Power Reduction) | LTE 7<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|------------------------------------|---------------------------------|-------------------------|
| QPSK / 16QAM | 23.0                               | 17.0                            | 6.0                     |

| Mode         | LTE 12<br>(without Power Reduction) | LTE 12<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|-------------------------------------|----------------------------------|-------------------------|
| QPSK / 16QAM | 24.0                                | 20.5                             | 3.5                     |

| Mode         | LTE 13<br>(without Power Reduction) | LTE 13<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|-------------------------------------|----------------------------------|-------------------------|
| QPSK / 16QAM | 24.0                                | 18.5                             | 5.5                     |



## FCC SAR Test Report

| Mode         | LTE 25<br>(without Power Reduction) | LTE 25<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|-------------------------------------|----------------------------------|-------------------------|
| QPSK / 16QAM | 24.0                                | 17.0                             | 7.0                     |

| Mode         | LTE 26<br>(without Power Reduction) | LTE 26<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|-------------------------------------|----------------------------------|-------------------------|
| QPSK / 16QAM | 24.0                                | 19.0                             | 5.0                     |

| Mode         | LTE 41<br>(without Power Reduction) | LTE 41<br>(with Power Reduction) | Power Reduction<br>(dB) |
|--------------|-------------------------------------|----------------------------------|-------------------------|
| QPSK / 16QAM | 23.0                                | 17.0                             | 6.0                     |

### 4.6.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

| Band                                                 | WCDMA Band II |        |        | WCDMA Band IV |        |        | WCDMA Band V |       |       | 3GPP<br>MPR<br>(dB) |
|------------------------------------------------------|---------------|--------|--------|---------------|--------|--------|--------------|-------|-------|---------------------|
| Channel                                              | 9262          | 9400   | 9538   | 1312          | 1413   | 1513   | 4132         | 4182  | 4233  |                     |
| Frequency (MHz)                                      | 1852.4        | 1880.0 | 1907.6 | 1712.4        | 1732.6 | 1752.6 | 826.4        | 836.4 | 846.6 |                     |
| EUT without Power Reduction (P-Sensor NOT Triggered) |               |        |        |               |        |        |              |       |       |                     |
| RMC 12.2K                                            | 23.36         | 23.38  | 23.18  | 23.01         | 23.08  | 23.02  | 22.77        | 22.66 | 22.78 | -                   |
| HSDPA Subtest-1                                      | 21.92         | 22.03  | 22.00  | 21.87         | 21.88  | 21.91  | 21.69        | 21.45 | 21.63 | 0                   |
| HSDPA Subtest-2                                      | 21.96         | 22.05  | 22.02  | 21.90         | 21.63  | 21.97  | 21.71        | 21.51 | 21.68 | 0                   |
| HSDPA Subtest-3                                      | 21.45         | 21.54  | 21.52  | 21.39         | 21.41  | 21.46  | 21.19        | 20.99 | 21.15 | 0.5                 |
| HSDPA Subtest-4                                      | 21.06         | 21.60  | 21.52  | 21.38         | 21.41  | 21.46  | 21.18        | 20.99 | 21.15 | 0.5                 |
| HSUPA Subtest-1                                      | 21.61         | 21.76  | 21.50  | 21.62         | 21.64  | 21.69  | 21.40        | 21.22 | 21.28 | 0                   |
| HSUPA Subtest-2                                      | 20.60         | 20.70  | 20.45  | 20.55         | 20.56  | 20.54  | 20.39        | 20.20 | 20.25 | 2                   |
| HSUPA Subtest-3                                      | 20.61         | 20.68  | 20.47  | 20.58         | 20.55  | 20.60  | 20.31        | 20.12 | 20.12 | 1                   |
| HSUPA Subtest-4                                      | 20.60         | 20.70  | 20.45  | 20.61         | 20.63  | 20.60  | 20.39        | 20.21 | 20.24 | 2                   |
| HSUPA Subtest-5                                      | 22.00         | 22.10  | 21.90  | 22.00         | 22.00  | 22.00  | 21.70        | 21.50 | 21.70 | 0                   |
| EUT with Power Reduction (P-Sensor Triggered)        |               |        |        |               |        |        |              |       |       |                     |
| RMC 12.2K                                            | 15.47         | 15.53  | 15.40  | 17.50         | 17.52  | 17.51  | 17.64        | 17.53 | 17.74 | -                   |
| HSDPA Subtest-1                                      | 14.53         | 14.62  | 14.64  | 16.60         | 16.59  | 16.52  | 16.73        | 16.56 | 16.61 | 0                   |
| HSDPA Subtest-2                                      | 14.52         | 14.61  | 14.61  | 16.31         | 16.53  | 16.22  | 16.69        | 16.55 | 16.60 | 0                   |
| HSDPA Subtest-3                                      | 14.00         | 14.09  | 14.09  | 16.06         | 16.01  | 15.97  | 16.17        | 16.03 | 16.08 | 0.5                 |
| HSDPA Subtest-4                                      | 13.98         | 13.33  | 14.09  | 16.05         | 16.00  | 15.96  | 16.16        | 16.00 | 16.07 | 0.5                 |
| HSUPA Subtest-1                                      | 14.24         | 14.39  | 14.13  | 16.27         | 16.29  | 16.34  | 16.50        | 16.32 | 16.38 | 0                   |
| HSUPA Subtest-2                                      | 13.23         | 13.33  | 13.08  | 15.24         | 15.25  | 15.23  | 15.49        | 15.30 | 15.35 | 2                   |
| HSUPA Subtest-3                                      | 13.24         | 13.31  | 13.10  | 15.26         | 15.10  | 15.17  | 15.31        | 15.12 | 15.14 | 1                   |
| HSUPA Subtest-4                                      | 13.23         | 13.33  | 13.08  | 15.25         | 15.28  | 15.27  | 15.49        | 15.31 | 15.34 | 2                   |
| HSUPA Subtest-5                                      | 14.50         | 14.60  | 14.60  | 16.60         | 16.60  | 16.60  | 16.70        | 16.50 | 16.50 | 0                   |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 18607 | Mid CH 18900 | High CH 19193 |               | Low CH 18607 | Mid CH 18900 | High CH 19193 |               |
|                                                      |         |           | 1850.7 MHz   | 1880.0 MHz   | 1909.3 MHz    |               | 1850.7 MHz   | 1880.0 MHz   | 1909.3 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 2 / 1.4M                                             | 1       | 0         | 22.41        | 22.23        | 22.65         | 0             | 21.47        | 21.31        | 21.67         | 1             |
|                                                      | 1       | 2         | 22.93        | 22.74        | 23.02         | 0             | 21.84        | 21.73        | 22.09         | 1             |
|                                                      | 1       | 5         | 22.34        | 22.06        | 22.47         | 0             | 21.19        | 21.10        | 21.44         | 1             |
|                                                      | 3       | 0         | 22.10        | 22.02        | 22.15         | 0             | 21.10        | 21.03        | 21.19         | 1             |
|                                                      | 3       | 1         | 22.08        | 22.04        | 22.20         | 0             | 21.08        | 21.05        | 21.26         | 1             |
|                                                      | 3       | 3         | 22.01        | 22.03        | 22.05         | 0             | 21.02        | 21.01        | 21.04         | 1             |
|                                                      | 6       | 0         | 21.34        | 21.15        | 21.51         | 1             | 20.30        | 20.16        | 20.62         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 2 / 1.4M                                             | 1       | 0         | 15.90        | 15.58        | 15.74         | 0             | 14.89        | 14.53        | 14.71         | 0             |
|                                                      | 1       | 2         | 16.33        | 16.16        | 16.42         | 0             | 15.38        | 15.20        | 15.47         | 0             |
|                                                      | 1       | 5         | 16.21        | 15.93        | 16.07         | 0             | 15.25        | 14.93        | 15.10         | 0             |
|                                                      | 3       | 0         | 15.88        | 15.54        | 15.68         | 0             | 14.86        | 14.49        | 14.64         | 0             |
|                                                      | 3       | 1         | 16.04        | 15.77        | 15.88         | 0             | 15.05        | 14.74        | 14.86         | 0             |
|                                                      | 3       | 3         | 16.40        | 16.04        | 16.24         | 0             | 15.45        | 15.05        | 15.29         | 0             |
|                                                      | 6       | 0         | 16.29        | 15.97        | 16.11         | 0             | 15.34        | 14.97        | 15.14         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 18615 | Mid CH 18900 | High CH 19185 |               | Low CH 18615 | Mid CH 18900 | High CH 19185 |               |
|                                                      |         |           | 1851.5 MHz   | 1880.0 MHz   | 1908.5 MHz    |               | 1851.5 MHz   | 1880.0 MHz   | 1908.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 2 / 3M                                               | 1       | 0         | 22.53        | 22.38        | 22.71         | 0             | 21.51        | 21.35        | 21.73         | 1             |
|                                                      | 1       | 7         | 22.98        | 22.78        | 23.05         | 0             | 21.94        | 21.79        | 22.08         | 1             |
|                                                      | 1       | 14        | 22.32        | 22.20        | 22.56         | 0             | 21.41        | 21.20        | 21.62         | 1             |
|                                                      | 8       | 0         | 21.58        | 21.40        | 21.79         | 1             | 20.50        | 20.37        | 20.77         | 2             |
|                                                      | 8       | 3         | 21.67        | 21.45        | 21.87         | 1             | 20.65        | 20.41        | 20.86         | 2             |
|                                                      | 8       | 7         | 21.40        | 21.20        | 21.48         | 1             | 20.22        | 20.14        | 20.53         | 2             |
|                                                      | 15      | 0         | 21.50        | 21.32        | 21.74         | 1             | 20.47        | 20.30        | 20.71         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 2 / 3M                                               | 1       | 0         | 16.02        | 15.73        | 15.88         | 0             | 15.01        | 14.68        | 14.84         | 0             |
|                                                      | 1       | 7         | 16.38        | 16.23        | 16.47         | 0             | 15.41        | 15.25        | 15.52         | 0             |
|                                                      | 1       | 14        | 16.28        | 16.05        | 16.15         | 0             | 15.30        | 15.06        | 15.17         | 0             |
|                                                      | 8       | 0         | 16.00        | 15.69        | 15.82         | 0             | 14.99        | 14.64        | 14.78         | 0             |
|                                                      | 8       | 3         | 16.13        | 15.91        | 16.00         | 0             | 15.15        | 14.88        | 14.99         | 0             |
|                                                      | 8       | 7         | 16.45        | 16.13        | 16.31         | 0             | 15.49        | 15.15        | 15.33         | 0             |
|                                                      | 15      | 0         | 16.35        | 16.08        | 16.19         | 0             | 15.38        | 15.09        | 15.21         | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 18625 | Mid CH 18900 | High CH 19175 |               | Low CH 18625 | Mid CH 18900 | High CH 19175 |               |
|                                                      |         |           | 1852.5 MHz   | 1880.0 MHz   | 1907.5 MHz    |               | 1852.5 MHz   | 1880.0 MHz   | 1907.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 2 / 5M                                               | 1       | 0         | 22.63        | 22.47        | 22.80         | 0             | 21.61        | 21.45        | 21.81         | 1             |
|                                                      | 1       | 12        | 22.97        | 22.85        | 23.10         | 0             | 22.03        | 21.86        | 22.11         | 1             |
|                                                      | 1       | 24        | 22.50        | 22.32        | 22.70         | 0             | 21.50        | 21.28        | 21.74         | 1             |
|                                                      | 12      | 0         | 21.69        | 21.53        | 21.90         | 1             | 20.67        | 20.47        | 20.90         | 2             |
|                                                      | 12      | 6         | 21.77        | 21.60        | 22.00         | 1             | 20.75        | 20.56        | 20.97         | 2             |
|                                                      | 12      | 13        | 21.46        | 21.35        | 21.82         | 1             | 20.50        | 20.30        | 20.69         | 2             |
| 25                                                   | 0       | 21.61     | 21.48        | 21.86        | 1             | 20.62         | 20.41        | 20.83        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 2 / 5M                                               | 1       | 0         | 16.13        | 15.88        | 16.01         | 0             | 15.11        | 14.83        | 14.97         | 0             |
|                                                      | 1       | 12        | 16.44        | 16.31        | 16.52         | 0             | 15.49        | 15.34        | 15.57         | 0             |
|                                                      | 1       | 24        | 16.36        | 16.16        | 16.24         | 0             | 15.39        | 15.15        | 15.26         | 0             |
|                                                      | 12      | 0         | 16.11        | 15.84        | 15.96         | 0             | 15.09        | 14.79        | 14.92         | 0             |
|                                                      | 12      | 6         | 16.22        | 16.04        | 16.11         | 0             | 15.22        | 15.01        | 15.09         | 0             |
|                                                      | 12      | 13        | 16.50        | 16.22        | 16.38         | 0             | 15.55        | 15.22        | 15.42         | 0             |
| 25                                                   | 0       | 16.42     | 16.19        | 16.27        | 0             | 15.46         | 15.18        | 15.30        | 0             |               |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 18650 | Mid CH 18900 | High CH 19150 |               | Low CH 18650 | Mid CH 18900 | High CH 19150 |               |
|                                                      |         |           | 1855.0 MHz   | 1880.0 MHz   | 1905.0 MHz    |               | 1855.0 MHz   | 1880.0 MHz   | 1905.0 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 2 / 10M                                              | 1       | 0         | 22.66        | 22.53        | 22.85         | 0             | 21.70        | 21.57        | 21.90         | 1             |
|                                                      | 1       | 24        | 23.06        | 22.89        | 23.13         | 0             | 22.03        | 21.93        | 22.17         | 1             |
|                                                      | 1       | 49        | 22.58        | 22.38        | 22.78         | 0             | 21.54        | 21.41        | 21.75         | 1             |
|                                                      | 25      | 0         | 21.80        | 21.66        | 21.98         | 1             | 20.74        | 20.62        | 21.01         | 2             |
|                                                      | 25      | 12        | 21.92        | 21.71        | 22.05         | 1             | 20.91        | 20.70        | 21.07         | 2             |
|                                                      | 25      | 25        | 21.70        | 21.50        | 21.89         | 1             | 20.62        | 20.44        | 20.80         | 2             |
| 50                                                   | 0       | 21.75     | 21.61        | 21.94        | 1             | 20.71         | 20.55        | 20.96        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 2 / 10M                                              | 1       | 0         | 16.24        | 16.01        | 16.13         | 0             | 15.22        | 14.96        | 15.09         | 0             |
|                                                      | 1       | 24        | 16.49        | 16.39        | 16.57         | 0             | 15.51        | 15.40        | 15.61         | 0             |
|                                                      | 1       | 49        | 16.42        | 16.26        | 16.33         | 0             | 15.43        | 15.24        | 15.34         | 0             |
|                                                      | 25      | 0         | 16.22        | 15.99        | 16.09         | 0             | 15.19        | 14.94        | 15.05         | 0             |
|                                                      | 25      | 12        | 16.31        | 16.16        | 16.22         | 0             | 15.32        | 15.12        | 15.19         | 0             |
|                                                      | 25      | 25        | 16.55        | 16.31        | 16.44         | 0             | 15.59        | 15.32        | 15.46         | 0             |
| 50                                                   | 0       | 16.48     | 16.29        | 16.36        | 0             | 15.50         | 15.27        | 15.37        | 0             |               |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 18675 | Mid CH 18900 | High CH 19125 |               | Low CH 18675 | Mid CH 18900 | High CH 19125 |               |
|                                                      |         |           | 1857.5 MHz   | 1880.0 MHz   | 1902.5 MHz    |               | 1857.5 MHz   | 1880.0 MHz   | 1902.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 2 / 15M                                              | 1       | 0         | 22.74        | 22.62        | 22.92         | 0             | 21.77        | 21.64        | 21.96         | 1             |
|                                                      | 1       | 37        | 23.03        | 22.95        | 23.19         | 0             | 22.16        | 22.01        | 22.27         | 1             |
|                                                      | 1       | 74        | 22.58        | 22.48        | 22.86         | 0             | 21.56        | 21.49        | 21.79         | 1             |
|                                                      | 36      | 0         | 21.94        | 21.79        | 22.11         | 1             | 20.92        | 20.77        | 21.10         | 2             |
|                                                      | 36      | 19        | 22.04        | 21.84        | 22.16         | 1             | 21.05        | 20.82        | 21.16         | 2             |
|                                                      | 36      | 39        | 21.75        | 21.64        | 21.96         | 1             | 20.76        | 20.60        | 20.88         | 2             |
| 75                                                   | 0       | 21.85     | 21.75        | 22.02        | 1             | 20.86         | 20.72        | 21.05        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 2 / 15M                                              | 1       | 0         | 16.34        | 16.16        | 16.24         | 0             | 15.32        | 15.11        | 15.19         | 0             |
|                                                      | 1       | 37        | 16.55        | 16.46        | 16.62         | 0             | 15.57        | 15.47        | 15.66         | 0             |
|                                                      | 1       | 74        | 16.49        | 16.35        | 16.42         | 0             | 15.51        | 15.35        | 15.42         | 0             |
|                                                      | 36      | 0         | 16.32        | 16.14        | 16.21         | 0             | 15.30        | 15.09        | 15.16         | 0             |
|                                                      | 36      | 19        | 16.40        | 16.26        | 16.32         | 0             | 15.40        | 15.22        | 15.30         | 0             |
|                                                      | 36      | 39        | 16.60        | 16.40        | 16.50         | 0             | 15.63        | 15.40        | 15.52         | 0             |
| 75                                                   | 0       | 16.54     | 16.38        | 16.44        | 0             | 15.56         | 15.38        | 15.45        | 0             |               |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 18700 | Mid CH 18900 | High CH 19100 |               | Low CH 18700 | Mid CH 18900 | High CH 19100 |               |
|                                                      |         |           | 1860.0 MHz   | 1880.0 MHz   | 1900.0 MHz    |               | 1860.0 MHz   | 1880.0 MHz   | 1900.0 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 2 / 20M                                              | 1       | 0         | 22.82        | 22.70        | 22.98         | 0             | 21.85        | 21.68        | 22.01         | 1             |
|                                                      | 1       | 50        | 23.11        | 23.01        | 23.23         | 0             | 22.13        | 22.05        | 22.28         | 1             |
|                                                      | 1       | 99        | 22.63        | 22.56        | 22.78         | 0             | 21.73        | 21.54        | 21.80         | 1             |
|                                                      | 50      | 0         | 22.04        | 21.93        | 22.20         | 1             | 20.96        | 20.89        | 21.16         | 2             |
|                                                      | 50      | 25        | 22.14        | 21.97        | 22.25         | 1             | 21.10        | 20.93        | 21.22         | 2             |
|                                                      | 50      | 50        | 21.89        | 21.79        | 22.08         | 1             | 20.86        | 20.74        | 20.96         | 2             |
| 100                                                  | 0       | 22.00     | 21.89        | 22.14        | 1             | 20.95         | 20.85        | 21.15        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 2 / 20M                                              | 1       | 0         | 16.50        | 16.51        | 16.58         | 0             | 15.43        | 15.26        | 15.35         | 0             |
|                                                      | 1       | 50        | 16.65        | 16.66        | 16.76         | 0             | 15.61        | 15.57        | 15.71         | 0             |
|                                                      | 1       | 99        | 16.23        | 16.34        | 16.26         | 0             | 15.58        | 15.44        | 15.52         | 0             |
|                                                      | 50      | 0         | 16.48        | 16.49        | 16.51         | 0             | 15.41        | 15.24        | 15.32         | 0             |
|                                                      | 50      | 25        | 16.58        | 16.59        | 16.71         | 0             | 15.60        | 15.51        | 15.69         | 0             |
|                                                      | 50      | 50        | 16.51        | 16.54        | 16.51         | 0             | 15.50        | 15.36        | 15.51         | 0             |
| 100                                                  | 0       | 16.46     | 16.71        | 16.52        | 0             | 15.63         | 15.47        | 15.54        | 0             |               |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 19957 | Mid CH 20175 | High CH 20393 |               | Low CH 19957 | Mid CH 20175 | High CH 20393 |               |
|                                                      |         |           | 1710.7 MHz   | 1732.5 MHz   | 1754.3 MHz    |               | 1710.7 MHz   | 1732.5 MHz   | 1754.3 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 4 / 1.4M                                             | 1       | 0         | 22.61        | 22.72        | 22.69         | 0             | 21.70        | 21.77        | 21.76         | 1             |
|                                                      | 1       | 2         | 22.08        | 22.18        | 22.13         | 0             | 21.09        | 21.26        | 21.22         | 1             |
|                                                      | 1       | 5         | 22.16        | 22.28        | 22.21         | 0             | 21.16        | 21.37        | 21.29         | 1             |
|                                                      | 3       | 0         | 22.37        | 22.45        | 22.42         | 0             | 21.27        | 21.45        | 21.42         | 1             |
|                                                      | 3       | 1         | 22.02        | 22.06        | 22.03         | 0             | 21.01        | 21.05        | 21.04         | 1             |
|                                                      | 3       | 3         | 22.12        | 22.29        | 22.26         | 0             | 21.09        | 21.24        | 21.22         | 1             |
|                                                      | 6       | 0         | 21.01        | 21.11        | 21.07         | 1             | 20.03        | 20.09        | 20.06         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 4 / 1.4M                                             | 1       | 0         | 16.86        | 17.13        | 17.04         | 0             | 15.89        | 16.18        | 16.08         | 0             |
|                                                      | 1       | 2         | 16.61        | 16.93        | 16.82         | 0             | 15.59        | 15.96        | 15.83         | 0             |
|                                                      | 1       | 5         | 16.12        | 16.27        | 16.16         | 0             | 15.07        | 15.22        | 15.11         | 0             |
|                                                      | 3       | 0         | 16.70        | 17.01        | 16.86         | 0             | 15.70        | 16.05        | 15.89         | 0             |
|                                                      | 3       | 1         | 16.78        | 17.06        | 16.96         | 0             | 15.78        | 16.11        | 16.00         | 0             |
|                                                      | 3       | 3         | 16.48        | 16.69        | 16.53         | 0             | 15.45        | 15.68        | 15.50         | 0             |
|                                                      | 6       | 0         | 16.60        | 16.90        | 16.69         | 0             | 15.58        | 15.93        | 15.68         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 19965 | Mid CH 20175 | High CH 20385 |               | Low CH 19965 | Mid CH 20175 | High CH 20385 |               |
|                                                      |         |           | 1711.5 MHz   | 1732.5 MHz   | 1753.5 MHz    |               | 1711.5 MHz   | 1732.5 MHz   | 1753.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 4 / 3M                                               | 1       | 0         | 22.66        | 22.77        | 22.73         | 0             | 21.72        | 21.81        | 21.80         | 1             |
|                                                      | 1       | 7         | 22.13        | 22.23        | 22.21         | 0             | 21.16        | 21.27        | 21.23         | 1             |
|                                                      | 1       | 14        | 22.17        | 22.33        | 22.28         | 0             | 21.23        | 21.38        | 21.33         | 1             |
|                                                      | 8       | 0         | 21.38        | 21.52        | 21.50         | 1             | 20.36        | 20.56        | 20.50         | 2             |
|                                                      | 8       | 3         | 21.07        | 21.17        | 21.13         | 1             | 20.05        | 20.16        | 20.12         | 2             |
|                                                      | 8       | 7         | 21.24        | 21.34        | 21.30         | 1             | 20.23        | 20.41        | 20.31         | 2             |
|                                                      | 15      | 0         | 21.06        | 21.10        | 21.08         | 1             | 20.01        | 20.10        | 20.08         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 4 / 3M                                               | 1       | 0         | 16.95        | 17.18        | 17.11         | 0             | 15.98        | 16.23        | 16.15         | 0             |
|                                                      | 1       | 7         | 16.73        | 17.02        | 16.91         | 0             | 15.72        | 16.05        | 15.93         | 0             |
|                                                      | 1       | 14        | 16.27        | 16.40        | 16.30         | 0             | 15.22        | 15.36        | 15.26         | 0             |
|                                                      | 8       | 0         | 16.80        | 17.09        | 16.95         | 0             | 15.82        | 16.13        | 15.98         | 0             |
|                                                      | 8       | 3         | 16.87        | 17.13        | 17.05         | 0             | 15.89        | 16.17        | 16.08         | 0             |
|                                                      | 8       | 7         | 16.61        | 16.79        | 16.66         | 0             | 15.58        | 15.81        | 15.63         | 0             |
|                                                      | 15      | 0         | 16.72        | 16.99        | 16.79         | 0             | 15.70        | 16.02        | 15.81         | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 19975 | Mid CH 20175 | High CH 20375 |               | Low CH 19975 | Mid CH 20175 | High CH 20375 |               |
|                                                      |         |           | 1712.5 MHz   | 1732.5 MHz   | 1752.5 MHz    |               | 1712.5 MHz   | 1732.5 MHz   | 1752.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 4 / 5M                                               | 1       | 0         | 22.70        | 22.82        | 22.78         | 0             | 21.79        | 21.87        | 21.86         | 1             |
|                                                      | 1       | 12        | 22.23        | 22.32        | 22.29         | 0             | 21.27        | 21.35        | 21.32         | 1             |
|                                                      | 1       | 24        | 22.33        | 22.39        | 22.36         | 0             | 21.38        | 21.47        | 21.44         | 1             |
|                                                      | 12      | 0         | 21.58        | 21.64        | 21.61         | 1             | 20.47        | 20.67        | 20.61         | 2             |
|                                                      | 12      | 6         | 21.26        | 21.34        | 21.29         | 1             | 20.20        | 20.30        | 20.24         | 2             |
|                                                      | 12      | 13        | 21.35        | 21.49        | 21.45         | 1             | 20.37        | 20.50        | 20.45         | 2             |
|                                                      | 25      | 0         | 21.09        | 21.19        | 21.14         | 1             | 20.05        | 20.13        | 20.10         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 4 / 5M                                               | 1       | 0         | 17.04        | 17.23        | 17.17         | 0             | 16.07        | 16.28        | 16.22         | 0             |
|                                                      | 1       | 12        | 16.86        | 17.10        | 17.01         | 0             | 15.83        | 16.13        | 16.03         | 0             |
|                                                      | 1       | 24        | 16.42        | 16.54        | 16.45         | 0             | 15.37        | 15.49        | 15.40         | 0             |
|                                                      | 12      | 0         | 16.92        | 17.16        | 17.04         | 0             | 15.92        | 16.21        | 16.07         | 0             |
|                                                      | 12      | 6         | 16.98        | 17.19        | 17.12         | 0             | 15.99        | 16.24        | 16.15         | 0             |
|                                                      | 12      | 13        | 16.75        | 16.91        | 16.79         | 0             | 15.71        | 15.90        | 15.75         | 0             |
|                                                      | 25      | 0         | 16.85        | 17.07        | 16.91         | 0             | 15.82        | 16.10        | 15.90         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20000 | Mid CH 20175 | High CH 20350 |               | Low CH 20000 | Mid CH 20175 | High CH 20350 |               |
|                                                      |         |           | 1715.0 MHz   | 1732.5 MHz   | 1750.0 MHz    |               | 1715.0 MHz   | 1732.5 MHz   | 1750.0 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 4 / 10M                                              | 1       | 0         | 22.79        | 22.87        | 22.84         | 0             | 21.85        | 21.92        | 21.91         | 1             |
|                                                      | 1       | 24        | 22.33        | 22.40        | 22.39         | 0             | 21.37        | 21.47        | 21.45         | 1             |
|                                                      | 1       | 49        | 22.39        | 22.49        | 22.45         | 0             | 21.43        | 21.54        | 21.51         | 1             |
|                                                      | 25      | 0         | 21.62        | 21.75        | 21.73         | 1             | 20.56        | 20.80        | 20.77         | 2             |
|                                                      | 25      | 12        | 21.39        | 21.46        | 21.43         | 1             | 20.35        | 20.44        | 20.41         | 2             |
|                                                      | 25      | 25        | 21.53        | 21.62        | 21.60         | 1             | 20.48        | 20.62        | 20.59         | 2             |
|                                                      | 50      | 0         | 21.26        | 21.33        | 21.28         | 1             | 20.20        | 20.29        | 20.25         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 4 / 10M                                              | 1       | 0         | 17.13        | 17.28        | 17.24         | 0             | 16.15        | 16.33        | 16.29         | 0             |
|                                                      | 1       | 24        | 16.97        | 17.18        | 17.10         | 0             | 15.95        | 16.21        | 16.10         | 0             |
|                                                      | 1       | 49        | 16.57        | 16.67        | 16.58         | 0             | 15.52        | 15.63        | 15.54         | 0             |
|                                                      | 25      | 0         | 17.03        | 17.23        | 17.13         | 0             | 16.02        | 16.27        | 16.15         | 0             |
|                                                      | 25      | 12        | 17.08        | 17.25        | 17.20         | 0             | 16.07        | 16.30        | 16.23         | 0             |
|                                                      | 25      | 25        | 16.88        | 17.02        | 16.92         | 0             | 15.84        | 16.01        | 15.89         | 0             |
|                                                      | 50      | 0         | 16.96        | 17.15        | 17.02         | 0             | 15.93        | 16.18        | 16.01         | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20025 | Mid CH 20175 | High CH 20325 |               | Low CH 20025 | Mid CH 20175 | High CH 20325 |               |
|                                                      |         |           | 1717.5 MHz   | 1732.5 MHz   | 1747.5 MHz    |               | 1717.5 MHz   | 1732.5 MHz   | 1747.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 4 / 15M                                              | 1       | 0         | 22.85        | 22.92        | 22.91         | 0             | 21.88        | 21.97        | 21.95         | 1             |
|                                                      | 1       | 37        | 22.43        | 22.48        | 22.46         | 0             | 21.39        | 21.49        | 21.42         | 1             |
|                                                      | 1       | 74        | 22.47        | 22.54        | 22.51         | 0             | 21.45        | 21.57        | 21.55         | 1             |
|                                                      | 36      | 0         | 21.80        | 21.85        | 21.84         | 1             | 20.70        | 20.82        | 20.80         | 2             |
|                                                      | 36      | 19        | 21.51        | 21.58        | 21.55         | 1             | 20.46        | 20.53        | 20.49         | 2             |
|                                                      | 36      | 39        | 21.60        | 21.73        | 21.70         | 1             | 20.55        | 20.67        | 20.64         | 2             |
| 75                                                   | 0       | 21.39     | 21.46        | 21.42        | 1             | 20.35         | 20.41        | 20.38        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 4 / 15M                                              | 1       | 0         | 17.22        | 17.34        | 17.31         | 0             | 16.22        | 16.39        | 16.36         | 0             |
|                                                      | 1       | 37        | 17.09        | 17.26        | 17.19         | 0             | 16.06        | 16.29        | 16.19         | 0             |
|                                                      | 1       | 74        | 16.72        | 16.81        | 16.73         | 0             | 15.67        | 15.77        | 15.68         | 0             |
|                                                      | 36      | 0         | 17.14        | 17.30        | 17.22         | 0             | 16.13        | 16.34        | 16.22         | 0             |
|                                                      | 36      | 19        | 17.18        | 17.32        | 17.28         | 0             | 16.17        | 16.37        | 16.31         | 0             |
|                                                      | 36      | 39        | 17.01        | 17.13        | 17.05         | 0             | 15.97        | 16.12        | 16.01         | 0             |
| 75                                                   | 0       | 17.08     | 17.23        | 17.13        | 0             | 16.05         | 16.24        | 16.12        | 0             |               |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20050 | Mid CH 20175 | High CH 20300 |               | Low CH 20050 | Mid CH 20175 | High CH 20300 |               |
|                                                      |         |           | 1720.0 MHz   | 1732.5 MHz   | 1745.0 MHz    |               | 1720.0 MHz   | 1732.5 MHz   | 1745.0 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 4 / 20M                                              | 1       | 0         | 22.91        | 22.97        | 22.96         | 0             | 21.96        | 21.99        | 21.98         | 1             |
|                                                      | 1       | 50        | 22.50        | 22.56        | 22.53         | 0             | 21.55        | 21.60        | 21.58         | 1             |
|                                                      | 1       | 99        | 22.57        | 22.61        | 22.60         | 0             | 21.57        | 21.65        | 21.62         | 1             |
|                                                      | 50      | 0         | 21.88        | 21.94        | 21.93         | 1             | 20.86        | 20.96        | 20.93         | 2             |
|                                                      | 50      | 25        | 21.64        | 21.70        | 21.67         | 1             | 20.60        | 20.69        | 20.67         | 2             |
|                                                      | 50      | 50        | 21.78        | 21.83        | 21.82         | 1             | 20.78        | 20.84        | 20.82         | 2             |
| 100                                                  | 0       | 21.56     | 21.60        | 21.57        | 1             | 20.51         | 20.56        | 20.52        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 4 / 20M                                              | 1       | 0         | 17.25        | 17.39        | 17.29         | 0             | 16.32        | 16.44        | 16.40         | 0             |
|                                                      | 1       | 50        | 17.22        | 17.33        | 17.24         | 0             | 16.22        | 16.37        | 16.31         | 0             |
|                                                      | 1       | 99        | 17.09        | 16.95        | 17.19         | 0             | 15.82        | 15.93        | 15.85         | 0             |
|                                                      | 50      | 0         | 17.29        | 17.39        | 17.32         | 0             | 16.25        | 16.41        | 16.32         | 0             |
|                                                      | 50      | 25        | 17.35        | 17.37        | 17.34         | 0             | 16.30        | 16.39        | 16.37         | 0             |
|                                                      | 50      | 50        | 17.35        | 17.24        | 17.33         | 0             | 16.13        | 16.24        | 16.17         | 0             |
| 100                                                  | 0       | 17.29     | 17.31        | 17.37        | 0             | 16.20         | 16.34        | 16.24        | 0             |               |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20407 | Mid CH 20525 | High CH 20643 |               | Low CH 20407 | Mid CH 20525 | High CH 20643 |               |
|                                                      |         |           | 824.7 MHz    | 836.5 MHz    | 848.3 MHz     |               | 824.7 MHz    | 836.5 MHz    | 848.3 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 5 / 1.4M                                             | 1       | 0         | 22.21        | 22.04        | 22.04         | 0             | 21.23        | 21.06        | 21.01         | 1             |
|                                                      | 1       | 2         | 22.52        | 22.39        | 22.35         | 0             | 21.50        | 21.41        | 21.28         | 1             |
|                                                      | 1       | 5         | 22.15        | 22.04        | 22.02         | 0             | 21.16        | 21.07        | 21.01         | 1             |
|                                                      | 3       | 0         | 22.15        | 22.05        | 22.03         | 0             | 21.13        | 21.05        | 21.03         | 1             |
|                                                      | 3       | 1         | 22.22        | 22.04        | 22.06         | 0             | 21.25        | 21.04        | 21.04         | 1             |
|                                                      | 3       | 3         | 22.04        | 22.02        | 22.01         | 0             | 21.03        | 21.02        | 21.01         | 1             |
|                                                      | 6       | 0         | 21.18        | 21.04        | 21.02         | 1             | 20.19        | 20.05        | 20.01         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 5 / 1.4M                                             | 1       | 0         | 17.74        | 17.82        | 17.31         | 0             | 16.77        | 16.86        | 16.28         | 0             |
|                                                      | 1       | 2         | 17.99        | 17.95        | 17.50         | 0             | 17.04        | 17.00        | 16.48         | 0             |
|                                                      | 1       | 5         | 17.66        | 17.77        | 17.29         | 0             | 16.69        | 16.81        | 16.26         | 0             |
|                                                      | 3       | 0         | 17.53        | 17.60        | 17.15         | 0             | 16.51        | 16.60        | 16.10         | 0             |
|                                                      | 3       | 1         | 17.40        | 17.56        | 17.14         | 0             | 16.37        | 16.55        | 16.09         | 0             |
|                                                      | 3       | 3         | 17.56        | 17.65        | 17.17         | 0             | 16.55        | 16.65        | 16.12         | 0             |
|                                                      | 6       | 0         | 17.64        | 17.70        | 17.24         | 0             | 16.64        | 16.73        | 16.21         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20415 | Mid CH 20525 | High CH 20635 |               | Low CH 20415 | Mid CH 20525 | High CH 20635 |               |
|                                                      |         |           | 825.5 MHz    | 836.5 MHz    | 847.5 MHz     |               | 825.5 MHz    | 836.5 MHz    | 847.5 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 5 / 3M                                               | 1       | 0         | 22.27        | 22.12        | 22.05         | 0             | 21.31        | 21.15        | 21.08         | 1             |
|                                                      | 1       | 7         | 22.55        | 22.45        | 22.36         | 0             | 21.57        | 21.49        | 21.39         | 1             |
|                                                      | 1       | 14        | 22.28        | 22.15        | 22.05         | 0             | 21.34        | 21.18        | 21.02         | 1             |
|                                                      | 8       | 0         | 21.30        | 21.22        | 21.15         | 1             | 20.36        | 20.20        | 20.12         | 2             |
|                                                      | 8       | 3         | 21.42        | 21.28        | 21.22         | 1             | 20.40        | 20.26        | 20.14         | 2             |
|                                                      | 8       | 7         | 21.17        | 21.07        | 21.01         | 1             | 20.11        | 20.06        | 20.02         | 2             |
| 15                                                   | 0       | 21.31     | 21.15        | 21.05        | 1             | 20.27         | 20.08        | 20.01        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 5 / 3M                                               | 1       | 0         | 17.81        | 17.89        | 17.44         | 0             | 16.83        | 16.92        | 16.41         | 0             |
|                                                      | 1       | 7         | 18.05        | 18.02        | 17.62         | 0             | 17.09        | 17.05        | 16.61         | 0             |
|                                                      | 1       | 14        | 17.74        | 17.84        | 17.42         | 0             | 16.75        | 16.87        | 16.39         | 0             |
|                                                      | 8       | 0         | 17.64        | 17.69        | 17.29         | 0             | 16.63        | 16.70        | 16.25         | 0             |
|                                                      | 8       | 3         | 17.52        | 17.67        | 17.28         | 0             | 16.50        | 16.67        | 16.23         | 0             |
|                                                      | 8       | 7         | 17.67        | 17.73        | 17.31         | 0             | 16.67        | 16.74        | 16.27         | 0             |
| 15                                                   | 0       | 17.73     | 17.78        | 17.38        | 0             | 16.74         | 16.80        | 16.34        | 0             |               |



# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20425 | Mid CH 20525 | High CH 20625 |               | Low CH 20425 | Mid CH 20525 | High CH 20625 |               |
|                                                      |         |           | 826.5 MHz    | 836.5 MHz    | 846.5 MHz     |               | 826.5 MHz    | 836.5 MHz    | 846.5 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 5 / 5M                                               | 1       | 0         | 22.34        | 22.21        | 22.15         | 0             | 21.37        | 21.22        | 21.14         | 1             |
|                                                      | 1       | 12        | 22.58        | 22.50        | 22.44         | 0             | 21.67        | 21.54        | 21.45         | 1             |
|                                                      | 1       | 24        | 22.32        | 22.15        | 22.03         | 0             | 21.24        | 21.14        | 21.01         | 1             |
|                                                      | 12      | 0         | 21.33        | 21.25        | 21.19         | 1             | 20.39        | 20.22        | 20.16         | 2             |
|                                                      | 12      | 6         | 21.41        | 21.30        | 21.22         | 1             | 20.41        | 20.27        | 20.19         | 2             |
|                                                      | 12      | 13        | 21.28        | 21.13        | 21.09         | 1             | 20.25        | 20.08        | 20.01         | 2             |
|                                                      | 25      | 0         | 21.33        | 21.19        | 21.10         | 1             | 20.31        | 20.14        | 20.08         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 5 / 5M                                               | 1       | 0         | 17.89        | 17.94        | 17.56         | 0             | 16.93        | 16.99        | 16.51         | 0             |
|                                                      | 1       | 12        | 18.10        | 18.07        | 17.73         | 0             | 17.15        | 17.12        | 16.71         | 0             |
|                                                      | 1       | 24        | 17.83        | 17.91        | 17.55         | 0             | 16.85        | 16.96        | 16.50         | 0             |
|                                                      | 12      | 0         | 17.75        | 17.79        | 17.43         | 0             | 16.73        | 16.79        | 16.38         | 0             |
|                                                      | 12      | 6         | 17.64        | 17.78        | 17.42         | 0             | 16.61        | 16.77        | 16.37         | 0             |
|                                                      | 12      | 13        | 17.78        | 17.82        | 17.45         | 0             | 16.77        | 16.83        | 16.40         | 0             |
|                                                      | 25      | 0         | 17.82        | 17.87        | 17.51         | 0             | 16.82        | 16.90        | 16.46         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20450 | Mid CH 20525 | High CH 20600 |               | Low CH 20450 | Mid CH 20525 | High CH 20600 |               |
|                                                      |         |           | 829.0 MHz    | 836.5 MHz    | 844.0 MHz     |               | 829.0 MHz    | 836.5 MHz    | 844.0 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 5 / 10M                                              | 1       | 0         | 22.39        | 22.26        | 22.21         | 0             | 21.43        | 21.30        | 21.25         | 1             |
|                                                      | 1       | 24        | <b>22.67</b> | 22.55        | 22.48         | 0             | 21.73        | 21.60        | 21.57         | 1             |
|                                                      | 1       | 49        | 22.31        | 22.21        | 22.12         | 0             | 21.47        | 21.25        | 21.21         | 1             |
|                                                      | 25      | 0         | 21.48        | 21.35        | 21.32         | 1             | 20.48        | 20.32        | 20.28         | 2             |
|                                                      | 25      | 12        | 21.52        | 21.40        | 21.33         | 1             | 20.53        | 20.39        | 20.33         | 2             |
|                                                      | 25      | 25        | 21.39        | 21.25        | 21.20         | 1             | 20.35        | 20.20        | 20.16         | 2             |
|                                                      | 50      | 0         | 21.41        | 21.30        | 21.27         | 1             | 20.43        | 20.25        | 20.22         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 5 / 10M                                              | 1       | 0         | 17.99        | 18.01        | 18.03         | 0             | 16.99        | 17.05        | 16.66         | 0             |
|                                                      | 1       | 24        | <b>18.16</b> | 18.13        | 17.85         | 0             | 17.21        | 17.18        | 16.82         | 0             |
|                                                      | 1       | 49        | 17.90        | 17.98        | 18.13         | 0             | 16.93        | 17.00        | 16.64         | 0             |
|                                                      | 25      | 0         | 17.96        | 17.89        | 17.90         | 0             | 16.83        | 16.88        | 16.54         | 0             |
|                                                      | 25      | 12        | 18.08        | 17.95        | 17.99         | 0             | 16.91        | 16.87        | 16.52         | 0             |
|                                                      | 25      | 25        | 17.90        | 17.90        | 17.94         | 0             | 16.87        | 16.73        | 16.56         | 0             |
|                                                      | 50      | 0         | 17.98        | 17.88        | 17.92         | 0             | 16.97        | 16.91        | 16.61         | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20775 | Mid CH 21100 | High CH 21425 |               | Low CH 20775 | Mid CH 21100 | High CH 21425 |               |
|                                                      |         |           | 2502.5 MHz   | 2535.0 MHz   | 2567.5 MHz    |               | 2502.5 MHz   | 2535.0 MHz   | 2567.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 7 / 5M                                               | 1       | 0         | 21.32        | 21.89        | 21.55         | 0             | 20.34        | 20.93        | 20.59         | 1             |
|                                                      | 1       | 12        | 21.50        | 22.00        | 21.63         | 0             | 20.49        | 21.05        | 20.66         | 1             |
|                                                      | 1       | 24        | 21.27        | 21.82        | 21.42         | 0             | 20.20        | 20.89        | 20.48         | 1             |
|                                                      | 12      | 0         | 20.19        | 20.74        | 20.40         | 1             | 19.09        | 19.70        | 19.26         | 2             |
|                                                      | 12      | 6         | 20.30        | 20.89        | 20.57         | 1             | 19.29        | 19.90        | 19.55         | 2             |
|                                                      | 12      | 13        | 20.21        | 20.77        | 20.44         | 1             | 19.15        | 19.78        | 19.40         | 2             |
|                                                      | 25      | 0         | 20.22        | 20.83        | 20.47         | 1             | 19.20        | 19.83        | 19.48         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 7 / 5M                                               | 1       | 0         | 15.42        | 15.85        | 16.11         | 0             | 14.38        | 14.82        | 15.10         | 0             |
|                                                      | 1       | 12        | 15.93        | 16.59        | 16.29         | 0             | 14.91        | 15.65        | 15.29         | 0             |
|                                                      | 1       | 24        | 15.61        | 16.03        | 16.30         | 0             | 14.57        | 15.01        | 15.32         | 0             |
|                                                      | 12      | 0         | 15.67        | 16.07        | 16.36         | 0             | 14.63        | 15.05        | 15.38         | 0             |
|                                                      | 12      | 6         | 15.80        | 16.55        | 16.26         | 0             | 14.77        | 15.59        | 15.25         | 0             |
|                                                      | 12      | 13        | 15.75        | 16.19        | 16.50         | 0             | 14.71        | 15.18        | 15.53         | 0             |
|                                                      | 25      | 0         | 15.72        | 16.15        | 16.38         | 0             | 14.68        | 15.14        | 15.40         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20800 | Mid CH 21100 | High CH 21400 |               | Low CH 20800 | Mid CH 21100 | High CH 21400 |               |
|                                                      |         |           | 2505.0 MHz   | 2535.0 MHz   | 2565.0 MHz    |               | 2505.0 MHz   | 2535.0 MHz   | 2565.0 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 7 / 10M                                              | 1       | 0         | 21.40        | 21.95        | 21.61         | 0             | 20.38        | 20.97        | 20.64         | 1             |
|                                                      | 1       | 24        | 21.50        | 22.05        | 21.71         | 0             | 20.59        | 21.09        | 20.84         | 1             |
|                                                      | 1       | 49        | 21.33        | 21.90        | 21.59         | 0             | 20.30        | 20.93        | 20.50         | 1             |
|                                                      | 25      | 0         | 20.29        | 20.83        | 20.50         | 1             | 19.23        | 19.81        | 19.47         | 2             |
|                                                      | 25      | 12        | 20.44        | 20.98        | 20.73         | 1             | 19.39        | 19.96        | 19.69         | 2             |
|                                                      | 25      | 25        | 20.33        | 20.87        | 20.51         | 1             | 19.28        | 19.85        | 19.52         | 2             |
| 50                                                   | 0       | 20.40     | 20.92        | 20.65        | 1             | 19.30         | 19.90        | 19.63        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 7 / 10M                                              | 1       | 0         | 15.57        | 15.97        | 16.22         | 0             | 14.52        | 14.96        | 15.23         | 0             |
|                                                      | 1       | 24        | 16.05        | 16.64        | 16.36         | 0             | 15.05        | 15.69        | 15.36         | 0             |
|                                                      | 1       | 49        | 15.75        | 16.15        | 16.39         | 0             | 14.71        | 15.16        | 15.43         | 0             |
|                                                      | 25      | 0         | 15.81        | 16.18        | 16.45         | 0             | 14.77        | 15.19        | 15.49         | 0             |
|                                                      | 25      | 12        | 15.92        | 16.60        | 16.32         | 0             | 14.90        | 15.65        | 15.35         | 0             |
|                                                      | 25      | 25        | 15.88        | 16.29        | 16.56         | 0             | 14.85        | 15.32        | 15.61         | 0             |
| 50                                                   | 0       | 15.86     | 16.26        | 16.47        | 0             | 14.83         | 15.28        | 15.51        | 0             |               |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20825 | Mid CH 21100 | High CH 21375 |               | Low CH 20825 | Mid CH 21100 | High CH 21375 |               |
|                                                      |         |           | 2507.5 MHz   | 2535.0 MHz   | 2562.5 MHz    |               | 2507.5 MHz   | 2535.0 MHz   | 2562.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 7 / 15M                                              | 1       | 0         | 21.48        | 22.00        | 21.69         | 0             | 20.49        | 21.04        | 20.71         | 1             |
|                                                      | 1       | 37        | 21.56        | 22.10        | 21.89         | 0             | 20.70        | 21.15        | 20.90         | 1             |
|                                                      | 1       | 74        | 21.43        | 21.96        | 21.60         | 0             | 20.40        | 20.98        | 20.63         | 1             |
|                                                      | 36      | 0         | 20.44        | 20.95        | 20.57         | 1             | 19.41        | 19.93        | 19.54         | 2             |
|                                                      | 36      | 19        | 20.64        | 21.06        | 20.85         | 1             | 19.59        | 20.07        | 19.82         | 2             |
|                                                      | 36      | 39        | 20.46        | 20.98        | 20.66         | 1             | 19.43        | 19.97        | 19.59         | 2             |
| 75                                                   | 0       | 20.51     | 21.02        | 20.72        | 1             | 19.51         | 20.02        | 19.71        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 7 / 15M                                              | 1       | 0         | 15.72        | 16.08        | 16.32         | 0             | 14.67        | 15.06        | 15.31         | 0             |
|                                                      | 1       | 37        | 16.16        | 16.69        | 16.45         | 0             | 15.14        | 15.73        | 15.45         | 0             |
|                                                      | 1       | 74        | 15.90        | 16.26        | 16.48         | 0             | 14.86        | 15.25        | 15.49         | 0             |
|                                                      | 36      | 0         | 15.96        | 16.29        | 16.53         | 0             | 14.92        | 15.28        | 15.54         | 0             |
|                                                      | 36      | 19        | 16.04        | 16.65        | 16.41         | 0             | 15.01        | 15.69        | 15.41         | 0             |
|                                                      | 36      | 39        | 16.01        | 16.39        | 16.63         | 0             | 14.98        | 15.39        | 15.66         | 0             |
| 75                                                   | 0       | 15.99     | 16.36        | 16.55        | 0             | 14.95         | 15.36        | 15.58        | 0             |               |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 20850 | Mid CH 21100 | High CH 21350 |               | Low CH 20850 | Mid CH 21100 | High CH 21350 |               |
|                                                      |         |           | 2510.0 MHz   | 2535.0 MHz   | 2560.0 MHz    |               | 2510.0 MHz   | 2535.0 MHz   | 2560.0 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 7 / 20M                                              | 1       | 0         | 21.57        | 22.05        | 21.76         | 0             | 20.58        | 21.09        | 20.79         | 1             |
|                                                      | 1       | 50        | 21.65        | 22.15        | 21.91         | 0             | 20.73        | 21.19        | 20.85         | 1             |
|                                                      | 1       | 99        | 21.50        | 22.01        | 21.69         | 0             | 20.54        | 21.05        | 20.64         | 1             |
|                                                      | 50      | 0         | 20.58        | 21.05        | 20.69         | 1             | 19.54        | 20.04        | 19.67         | 2             |
|                                                      | 50      | 25        | 20.69        | 21.16        | 20.96         | 1             | 19.63        | 20.17        | 19.93         | 2             |
|                                                      | 50      | 50        | 20.61        | 21.08        | 20.79         | 1             | 19.55        | 20.08        | 19.77         | 2             |
| 100                                                  | 0       | 20.63     | 21.12        | 20.89        | 1             | 19.61         | 20.12        | 19.86        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 7 / 20M                                              | 1       | 0         | 16.07        | 16.40        | 16.62         | 0             | 14.83        | 15.18        | 15.42         | 0             |
|                                                      | 1       | 50        | 16.45        | 16.73        | 16.72         | 0             | 15.21        | 15.78        | 15.65         | 0             |
|                                                      | 1       | 99        | 16.58        | 16.57        | 16.70         | 0             | 15.01        | 15.36        | 15.52         | 0             |
|                                                      | 50      | 0         | 16.46        | 16.59        | 16.32         | 0             | 15.04        | 15.38        | 15.65         | 0             |
|                                                      | 50      | 25        | 16.40        | 16.70        | 16.40         | 0             | 15.19        | 15.77        | 15.52         | 0             |
|                                                      | 50      | 50        | 16.56        | 16.68        | 16.47         | 0             | 15.13        | 15.48        | 15.74         | 0             |
| 100                                                  | 0       | 16.40     | 16.66        | 16.42        | 0             | 15.10         | 15.46        | 15.67        | 0             |               |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 23017 | Mid CH 23095 | High CH 23173 |               | Low CH 23017 | Mid CH 23095 | High CH 23173 |               |
|                                                      |         |           | 699.7 MHz    | 707.5 MHz    | 715.3 MHz     |               | 699.7 MHz    | 707.5 MHz    | 715.3 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 12 / 1.4M                                            | 1       | 0         | 22.97        | 22.72        | 22.64         | 0             | 22.05        | 21.71        | 21.64         | 1             |
|                                                      | 1       | 2         | 23.03        | 22.77        | 22.68         | 0             | 22.08        | 21.81        | 21.73         | 1             |
|                                                      | 1       | 5         | 22.83        | 22.61        | 22.47         | 0             | 22.00        | 21.62        | 21.56         | 1             |
|                                                      | 3       | 0         | 22.53        | 22.28        | 22.21         | 0             | 21.53        | 21.24        | 21.21         | 1             |
|                                                      | 3       | 1         | 22.62        | 22.32        | 22.22         | 0             | 21.64        | 21.31        | 21.22         | 1             |
|                                                      | 3       | 3         | 22.65        | 22.35        | 22.26         | 0             | 21.67        | 21.37        | 21.28         | 1             |
| 6                                                    | 0       | 21.78     | 21.47        | 21.40        | 1             | 20.73         | 20.44        | 20.35        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 12 / 1.4M                                            | 1       | 0         | 19.68        | 19.91        | 19.47         | 0             | 18.65        | 18.92        | 18.42         | 0             |
|                                                      | 1       | 2         | 20.16        | 19.98        | 19.91         | 0             | 19.20        | 19.03        | 18.77         | 0             |
|                                                      | 1       | 5         | 19.26        | 19.51        | 19.17         | 0             | 18.20        | 18.49        | 18.13         | 0             |
|                                                      | 3       | 0         | 19.58        | 19.80        | 19.36         | 0             | 18.54        | 18.80        | 18.33         | 0             |
|                                                      | 3       | 1         | 19.71        | 19.43        | 19.29         | 0             | 18.69        | 18.44        | 18.23         | 0             |
|                                                      | 3       | 3         | 19.53        | 19.77        | 19.33         | 0             | 18.50        | 18.74        | 18.30         | 0             |
| 6                                                    | 0       | 19.62     | 19.83        | 19.41        | 0             | 18.61         | 18.85        | 18.36        | 0             |               |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 23025 | Mid CH 23095 | High CH 23165 |               | Low CH 23025 | Mid CH 23095 | High CH 23165 |               |
|                                                      |         |           | 700.5 MHz    | 707.5 MHz    | 714.5 MHz     |               | 700.5 MHz    | 707.5 MHz    | 714.5 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 12 / 3M                                              | 1       | 0         | 23.04        | 22.78        | 22.72         | 0             | 22.09        | 21.84        | 21.76         | 1             |
|                                                      | 1       | 7         | 23.08        | 22.82        | 22.75         | 0             | 22.13        | 21.88        | 21.80         | 1             |
|                                                      | 1       | 14        | 22.89        | 22.70        | 22.63         | 0             | 21.95        | 21.73        | 21.62         | 1             |
|                                                      | 8       | 0         | 21.93        | 21.68        | 21.61         | 1             | 20.94        | 20.65        | 20.57         | 2             |
|                                                      | 8       | 3         | 22.02        | 21.73        | 21.64         | 1             | 20.98        | 20.69        | 20.60         | 2             |
|                                                      | 8       | 7         | 22.05        | 21.78        | 21.65         | 1             | 21.02        | 20.74        | 20.64         | 2             |
|                                                      | 15      | 0         | 21.86        | 21.60        | 21.56         | 1             | 20.85        | 20.57        | 20.53         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 12 / 3M                                              | 1       | 0         | 19.73        | 19.93        | 19.57         | 0             | 18.74        | 18.98        | 18.58         | 0             |
|                                                      | 1       | 7         | 20.21        | 20.10        | 19.89         | 0             | 19.26        | 19.16        | 18.90         | 0             |
|                                                      | 1       | 14        | 19.44        | 19.60        | 19.30         | 0             | 18.44        | 18.61        | 18.27         | 0             |
|                                                      | 8       | 0         | 19.68        | 19.84        | 19.49         | 0             | 18.69        | 18.87        | 18.47         | 0             |
|                                                      | 8       | 3         | 19.75        | 19.70        | 19.39         | 0             | 18.78        | 18.55        | 18.36         | 0             |
|                                                      | 8       | 7         | 19.63        | 19.81        | 19.45         | 0             | 18.64        | 18.83        | 18.42         | 0             |
|                                                      | 15      | 0         | 19.71        | 19.85        | 19.54         | 0             | 18.71        | 18.92        | 18.52         | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 23035 | Mid CH 23095 | High CH 23155 |               | Low CH 23035 | Mid CH 23095 | High CH 23155 |               |
|                                                      |         |           | 701.5 MHz    | 707.5 MHz    | 713.5 MHz     |               | 701.5 MHz    | 707.5 MHz    | 713.5 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 12 / 5M                                              | 1       | 0         | 23.10        | 22.86        | 22.80         | 0             | 22.13        | 21.87        | 21.81         | 1             |
|                                                      | 1       | 12        | 23.13        | 22.90        | 22.83         | 0             | 22.17        | 21.92        | 21.87         | 1             |
|                                                      | 1       | 24        | 22.98        | 22.78        | 22.70         | 0             | 21.98        | 21.80        | 21.68         | 1             |
|                                                      | 12      | 0         | 21.98        | 21.82        | 21.77         | 1             | 21.00        | 20.77        | 20.72         | 2             |
|                                                      | 12      | 6         | 22.12        | 21.86        | 21.79         | 1             | 21.11        | 20.82        | 20.74         | 2             |
|                                                      | 12      | 13        | 22.13        | 21.89        | 21.82         | 1             | 21.14        | 20.86        | 20.82         | 2             |
|                                                      | 25      | 0         | 21.97        | 21.76        | 21.71         | 1             | 20.95        | 20.71        | 20.66         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 12 / 5M                                              | 1       | 0         | 19.83        | 20.00        | 19.69         | 0             | 18.86        | 19.04        | 18.69         | 0             |
|                                                      | 1       | 12        | 20.26        | 20.06        | 19.90         | 0             | 19.31        | 19.15        | 19.05         | 0             |
|                                                      | 1       | 24        | 19.52        | 19.72        | 19.44         | 0             | 18.48        | 18.74        | 18.45         | 0             |
|                                                      | 12      | 0         | 19.75        | 19.93        | 19.60         | 0             | 18.81        | 18.97        | 18.59         | 0             |
|                                                      | 12      | 6         | 19.86        | 19.62        | 19.54         | 0             | 18.89        | 18.63        | 18.52         | 0             |
|                                                      | 12      | 13        | 19.73        | 19.91        | 19.59         | 0             | 18.71        | 18.93        | 18.54         | 0             |
|                                                      | 25      | 0         | 19.80        | 19.95        | 19.64         | 0             | 18.84        | 18.99        | 18.66         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 23060 | Mid CH 23095 | High CH 23130 |               | Low CH 23060 | Mid CH 23095 | High CH 23130 |               |
|                                                      |         |           | 704.0 MHz    | 707.5 MHz    | 711.0 MHz     |               | 704.0 MHz    | 707.5 MHz    | 711.0 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 12 / 10M                                             | 1       | 0         | 23.15        | 22.92        | 22.87         | 0             | 22.20        | 21.95        | 21.89         | 1             |
|                                                      | 1       | 24        | 23.18        | 22.96        | 22.91         | 0             | 22.23        | 22.00        | 21.95         | 1             |
|                                                      | 1       | 49        | 23.04        | 22.86        | 22.77         | 0             | 22.06        | 21.88        | 21.80         | 1             |
|                                                      | 25      | 0         | 22.08        | 21.94        | 21.90         | 1             | 21.15        | 20.91        | 20.85         | 2             |
|                                                      | 25      | 12        | 22.22        | 21.97        | 21.93         | 1             | 21.19        | 20.95        | 20.88         | 2             |
|                                                      | 25      | 25        | 22.20        | 22.00        | 21.96         | 1             | 21.23        | 20.99        | 20.93         | 2             |
|                                                      | 50      | 0         | 22.05        | 21.90        | 21.85         | 1             | 21.03        | 20.87        | 20.83         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 12 / 10M                                             | 1       | 0         | 19.92        | 20.06        | 19.81         | 0             | 18.92        | 19.09        | 18.78         | 0             |
|                                                      | 1       | 24        | 20.36        | 20.31        | 20.07         | 0             | 19.36        | 19.21        | 19.09         | 0             |
|                                                      | 1       | 49        | 19.99        | 19.84        | 20.19         | 0             | 18.65        | 18.82        | 18.54         | 0             |
|                                                      | 25      | 0         | 20.03        | 20.00        | 19.92         | 0             | 18.79        | 19.02        | 18.71         | 0             |
|                                                      | 25      | 12        | 20.10        | 19.94        | 19.87         | 0             | 18.86        | 18.95        | 18.65         | 0             |
|                                                      | 25      | 25        | 19.96        | 19.98        | 19.94         | 0             | 18.81        | 19.00        | 18.69         | 0             |
|                                                      | 50      | 0         | 20.10        | 20.01        | 19.88         | 0             | 18.91        | 19.04        | 18.75         | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 23205 | Mid CH 23230 | High CH 23255 |               | Low CH 23205 | Mid CH 23230 | High CH 23255 |               |
|                                                      |         |           | 779.5 MHz    | 782.0 MHz    | 784.5 MHz     |               | 779.5 MHz    | 782.0 MHz    | 784.5 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 13 / 5M                                              | 1       | 0         | 22.07        | 22.82        | 22.70         | 0             | 21.09        | 21.87        | 21.74         | 1             |
|                                                      | 1       | 12        | 22.38        | 22.80        | 22.68         | 0             | 21.43        | 21.85        | 21.63         | 1             |
|                                                      | 1       | 24        | 22.07        | 22.44        | 22.28         | 0             | 21.15        | 21.46        | 21.39         | 1             |
|                                                      | 12      | 0         | 21.37        | 21.79        | 21.57         | 1             | 20.34        | 20.80        | 20.52         | 2             |
|                                                      | 12      | 6         | 21.44        | 21.69        | 21.71         | 1             | 20.48        | 20.70        | 20.68         | 2             |
|                                                      | 12      | 13        | 21.19        | 21.54        | 21.37         | 1             | 20.16        | 20.53        | 20.33         | 2             |
| 25                                                   | 0       | 21.23     | 21.62        | 21.46        | 1             | 20.24         | 20.62        | 20.52        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 13 / 5M                                              | 1       | 0         | 17.96        | 18.21        | 18.08         | 0             | 16.97        | 17.20        | 17.12         | 0             |
|                                                      | 1       | 12        | 17.97        | 18.06        | 18.06         | 0             | 16.82        | 17.09        | 16.97         | 0             |
|                                                      | 1       | 24        | 18.13        | 18.00        | 17.99         | 0             | 16.78        | 17.02        | 16.85         | 0             |
|                                                      | 12      | 0         | 18.17        | 18.13        | 18.14         | 0             | 16.86        | 17.17        | 17.00         | 0             |
|                                                      | 12      | 6         | 18.07        | 18.07        | 18.11         | 0             | 16.94        | 17.11        | 17.11         | 0             |
|                                                      | 12      | 13        | 18.04        | 18.15        | 18.10         | 0             | 16.90        | 17.14        | 17.06         | 0             |
| 25                                                   | 0       | 18.00     | 18.12        | 18.10        | 0             | 16.88         | 17.13        | 17.04        | 0             |               |

| Band / BW                                            | RB Size | RB Offset | QPSK         | 3GPP MPR (dB) | 16QAM        | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|---------------|--------------|---------------|
|                                                      |         |           | Mid CH 23230 |               | Mid CH 23230 |               |
|                                                      |         |           | 782.0 MHz    |               | 782.0 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |               |              |               |
| 13 / 10M                                             | 1       | 0         | 22.91        | 0             | 21.94        | 1             |
|                                                      | 1       | 24        | 22.83        | 0             | 21.85        | 1             |
|                                                      | 1       | 49        | 22.49        | 0             | 21.51        | 1             |
|                                                      | 25      | 0         | 21.74        | 1             | 20.70        | 2             |
|                                                      | 25      | 12        | 21.68        | 1             | 20.64        | 2             |
|                                                      | 25      | 25        | 21.63        | 1             | 20.58        | 2             |
|                                                      | 50      | 0         | 21.68        | 1             | 20.64        | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |               |              |               |
| 13 / 10M                                             | 1       | 0         | 18.37        | 0             | 17.34        | 0             |
|                                                      | 1       | 24        | 18.18        | 0             | 17.14        | 0             |
|                                                      | 1       | 49        | 17.96        | 0             | 16.91        | 0             |
|                                                      | 25      | 0         | 18.28        | 1             | 17.25        | 0             |
|                                                      | 25      | 12        | 18.08        | 1             | 17.03        | 0             |
|                                                      | 25      | 25        | 18.23        | 1             | 17.19        | 0             |
|                                                      | 50      | 0         | 18.25        | 1             | 17.22        | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26047 | Mid CH 26365 | High CH 26683 |               | Low CH 26047 | Mid CH 26365 | High CH 26683 |               |
|                                                      |         |           | 1850.7 MHz   | 1882.5 MHz   | 1914.3 MHz    |               | 1850.7 MHz   | 1882.5 MHz   | 1914.3 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 25 / 1.4M                                            | 1       | 0         | 22.45        | 22.51        | 22.69         | 0             | 21.48        | 21.52        | 21.72         | 1             |
|                                                      | 1       | 2         | 22.60        | 22.74        | 22.83         | 0             | 21.67        | 21.78        | 21.88         | 1             |
|                                                      | 1       | 5         | 22.07        | 22.13        | 22.25         | 0             | 21.03        | 21.14        | 21.30         | 1             |
|                                                      | 3       | 0         | 22.10        | 22.13        | 22.32         | 0             | 21.09        | 21.15        | 21.26         | 1             |
|                                                      | 3       | 1         | 22.09        | 22.08        | 22.13         | 0             | 21.35        | 21.41        | 21.08         | 1             |
|                                                      | 3       | 3         | 22.06        | 22.07        | 22.13         | 0             | 21.06        | 21.07        | 21.06         | 1             |
| 6                                                    | 0       | 21.03     | 21.07        | 21.30        | 1             | 20.04         | 20.08        | 20.35        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 25 / 1.4M                                            | 1       | 0         | 15.86        | 15.95        | 16.06         | 0             | 14.84        | 14.94        | 15.05         | 0             |
|                                                      | 1       | 2         | 16.31        | 16.43        | 16.48         | 0             | 15.32        | 15.45        | 15.52         | 0             |
|                                                      | 1       | 5         | 15.41        | 15.50        | 15.62         | 0             | 14.36        | 14.47        | 14.59         | 0             |
|                                                      | 3       | 0         | 15.55        | 15.70        | 15.78         | 0             | 14.52        | 14.68        | 14.76         | 0             |
|                                                      | 3       | 1         | 16.15        | 16.22        | 16.27         | 0             | 15.14        | 15.22        | 15.27         | 0             |
|                                                      | 3       | 3         | 16.04        | 16.11        | 16.22         | 0             | 15.03        | 15.10        | 15.22         | 0             |
| 6                                                    | 0       | 15.82     | 15.91        | 16.00        | 0             | 14.80         | 14.89        | 14.99        | 0             |               |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26055 | Mid CH 26365 | High CH 26675 |               | Low CH 26055 | Mid CH 26365 | High CH 26675 |               |
|                                                      |         |           | 1851.5 MHz   | 1882.5 MHz   | 1913.5 MHz    |               | 1851.5 MHz   | 1882.5 MHz   | 1913.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 25 / 3M                                              | 1       | 0         | 22.57        | 22.60        | 22.75         | 0             | 21.58        | 21.60        | 21.79         | 1             |
|                                                      | 1       | 7         | 22.68        | 22.77        | 22.87         | 0             | 21.71        | 21.82        | 21.93         | 1             |
|                                                      | 1       | 14        | 22.12        | 22.22        | 22.46         | 0             | 21.19        | 21.27        | 21.46         | 1             |
|                                                      | 8       | 0         | 21.22        | 21.26        | 21.44         | 1             | 20.26        | 20.29        | 20.47         | 2             |
|                                                      | 8       | 3         | 21.47        | 21.51        | 21.68         | 1             | 20.43        | 20.55        | 20.71         | 2             |
|                                                      | 8       | 7         | 21.06        | 21.09        | 21.31         | 1             | 20.03        | 20.08        | 20.23         | 2             |
| 15                                                   | 0       | 21.13     | 21.17        | 21.36        | 1             | 20.15         | 20.18        | 20.39        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 25 / 3M                                              | 1       | 0         | 15.97        | 16.04        | 16.14         | 0             | 14.96        | 15.04        | 15.14         | 0             |
|                                                      | 1       | 7         | 16.37        | 16.48        | 16.53         | 0             | 15.41        | 15.52        | 15.57         | 0             |
|                                                      | 1       | 14        | 15.56        | 15.65        | 15.76         | 0             | 14.52        | 14.62        | 14.74         | 0             |
|                                                      | 8       | 0         | 15.70        | 15.83        | 15.91         | 0             | 14.68        | 14.81        | 14.89         | 0             |
|                                                      | 8       | 3         | 16.22        | 16.29        | 16.33         | 0             | 15.23        | 15.32        | 15.36         | 0             |
|                                                      | 8       | 7         | 16.12        | 16.18        | 16.29         | 0             | 15.12        | 15.19        | 15.32         | 0             |
| 15                                                   | 0       | 15.94     | 16.01        | 16.09        | 0             | 14.93         | 15.00        | 15.09        | 0             |               |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26065 | Mid CH 26365 | High CH 26665 |               | Low CH 26065 | Mid CH 26365 | High CH 26665 |               |
|                                                      |         |           | 1852.5 MHz   | 1882.5 MHz   | 1912.5 MHz    |               | 1852.5 MHz   | 1882.5 MHz   | 1912.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 25 / 5M                                              | 1       | 0         | 22.58        | 22.62        | 22.78         | 0             | 21.65        | 21.70        | 21.85         | 1             |
|                                                      | 1       | 12        | 22.75        | 22.81        | 22.94         | 0             | 21.81        | 21.87        | 21.98         | 1             |
|                                                      | 1       | 24        | 22.23        | 22.27        | 22.43         | 0             | 21.21        | 21.32        | 21.54         | 1             |
|                                                      | 12      | 0         | 21.35        | 21.36        | 21.63         | 1             | 20.35        | 20.39        | 20.57         | 2             |
|                                                      | 12      | 6         | 21.50        | 21.58        | 21.70         | 1             | 20.52        | 20.64        | 20.77         | 2             |
|                                                      | 12      | 13        | 21.21        | 21.22        | 21.39         | 1             | 20.16        | 20.21        | 20.35         | 2             |
|                                                      | 25      | 0         | 21.26        | 21.29        | 21.46         | 1             | 20.27        | 20.30        | 20.46         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 25 / 5M                                              | 1       | 0         | 16.08        | 16.15        | 16.24         | 0             | 15.06        | 15.15        | 15.27         | 0             |
|                                                      | 1       | 12        | 16.45        | 16.54        | 16.58         | 0             | 15.50        | 15.59        | 15.63         | 0             |
|                                                      | 1       | 24        | 15.71        | 15.78        | 15.88         | 0             | 14.66        | 14.74        | 14.85         | 0             |
|                                                      | 12      | 0         | 15.83        | 15.95        | 16.03         | 0             | 14.79        | 14.92        | 15.00         | 0             |
|                                                      | 12      | 6         | 16.31        | 16.37        | 16.41         | 0             | 15.34        | 15.41        | 15.46         | 0             |
|                                                      | 12      | 13        | 16.22        | 16.28        | 16.37         | 0             | 15.24        | 15.31        | 15.41         | 0             |
|                                                      | 25      | 0         | 16.05        | 16.12        | 16.20         | 0             | 15.03        | 15.11        | 15.22         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26090 | Mid CH 26365 | High CH 26640 |               | Low CH 26090 | Mid CH 26365 | High CH 26640 |               |
|                                                      |         |           | 1855.0 MHz   | 1882.5 MHz   | 1910.0 MHz    |               | 1855.0 MHz   | 1882.5 MHz   | 1910.0 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 25 / 10M                                             | 1       | 0         | 22.71        | 22.73        | 22.87         | 0             | 21.67        | 21.70        | 21.90         | 1             |
|                                                      | 1       | 24        | 22.86        | 22.89        | 22.99         | 0             | 21.87        | 21.92        | 22.04         | 1             |
|                                                      | 1       | 49        | 22.31        | 22.39        | 22.57         | 0             | 21.30        | 21.35        | 21.49         | 1             |
|                                                      | 25      | 0         | 21.53        | 21.55        | 21.76         | 1             | 20.46        | 20.48        | 20.74         | 2             |
|                                                      | 25      | 12        | 21.66        | 21.75        | 21.82         | 1             | 20.64        | 20.69        | 20.83         | 2             |
|                                                      | 25      | 25        | 21.36        | 21.38        | 21.49         | 1             | 20.32        | 20.34        | 20.53         | 2             |
| 50                                                   | 0       | 21.42     | 21.46        | 21.62        | 1             | 20.36         | 20.41        | 20.56        | 2             |               |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 25 / 10M                                             | 1       | 0         | 16.18        | 16.24        | 16.32         | 0             | 15.17        | 15.24        | 15.34         | 0             |
|                                                      | 1       | 24        | 16.51        | 16.60        | 16.64         | 0             | 15.55        | 15.65        | 15.69         | 0             |
|                                                      | 1       | 49        | 15.86        | 15.90        | 15.99         | 0             | 14.81        | 14.86        | 14.96         | 0             |
|                                                      | 25      | 0         | 15.95        | 16.06        | 16.14         | 0             | 14.91        | 15.04        | 15.12         | 0             |
|                                                      | 25      | 12        | 16.38        | 16.44        | 16.48         | 0             | 15.41        | 15.48        | 15.52         | 0             |
|                                                      | 25      | 25        | 16.30        | 16.35        | 16.44         | 0             | 15.31        | 15.38        | 15.48         | 0             |
| 50                                                   | 0       | 16.16     | 16.22        | 16.28        | 0             | 15.15         | 15.21        | 15.29        | 0             |               |



# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26115 | Mid CH 26365 | High CH 26615 |               | Low CH 26115 | Mid CH 26365 | High CH 26615 |               |
|                                                      |         |           | 1857.5 MHz   | 1882.5 MHz   | 1907.5 MHz    |               | 1857.5 MHz   | 1882.5 MHz   | 1907.5 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 25 / 15M                                             | 1       | 0         | 22.77        | 22.78        | 22.92         | 0             | 21.79        | 21.81        | 21.97         | 1             |
|                                                      | 1       | 37        | 22.88        | 22.94        | 23.02         | 0             | 21.89        | 21.99        | 22.12         | 1             |
|                                                      | 1       | 74        | 22.38        | 22.47        | 22.69         | 0             | 21.39        | 21.47        | 21.60         | 1             |
|                                                      | 36      | 0         | 21.62        | 21.64        | 21.74         | 1             | 20.60        | 20.63        | 20.80         | 2             |
|                                                      | 36      | 19        | 21.78        | 21.84        | 21.94         | 1             | 20.76        | 20.84        | 20.93         | 2             |
|                                                      | 36      | 39        | 21.52        | 21.53        | 21.66         | 1             | 20.46        | 20.47        | 20.67         | 2             |
|                                                      | 75      | 0         | 21.55        | 21.58        | 21.72         | 1             | 20.52        | 20.53        | 20.73         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 25 / 15M                                             | 1       | 0         | 16.29        | 16.34        | 16.41         | 0             | 15.28        | 15.33        | 15.41         | 0             |
|                                                      | 1       | 37        | 16.58        | 16.65        | 16.69         | 0             | 15.62        | 15.70        | 15.74         | 0             |
|                                                      | 1       | 74        | 16.01        | 16.05        | 16.12         | 0             | 14.97        | 15.01        | 15.08         | 0             |
|                                                      | 36      | 0         | 16.09        | 16.18        | 16.26         | 0             | 15.05        | 15.16        | 15.24         | 0             |
|                                                      | 36      | 19        | 16.46        | 16.51        | 16.55         | 0             | 15.49        | 15.55        | 15.59         | 0             |
|                                                      | 36      | 39        | 16.39        | 16.44        | 16.51         | 0             | 15.39        | 15.45        | 15.55         | 0             |
|                                                      | 75      | 0         | 16.27        | 16.32        | 16.38         | 0             | 15.26        | 15.31        | 15.38         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26140 | Mid CH 26365 | High CH 26590 |               | Low CH 26140 | Mid CH 26365 | High CH 26590 |               |
|                                                      |         |           | 1860.0 MHz   | 1882.5 MHz   | 1905.0 MHz    |               | 1860.0 MHz   | 1882.5 MHz   | 1905.0 MHz    |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 25 / 20M                                             | 1       | 0         | 22.84        | 22.85        | 22.98         | 0             | 21.87        | 21.88        | 22.02         | 1             |
|                                                      | 1       | 50        | 22.95        | 22.99        | 23.08         | 0             | 22.02        | 22.03        | 22.16         | 1             |
|                                                      | 1       | 99        | 22.54        | 22.56        | 22.68         | 0             | 21.49        | 21.58        | 21.69         | 1             |
|                                                      | 50      | 0         | 21.76        | 21.77        | 21.97         | 1             | 20.72        | 20.74        | 20.86         | 2             |
|                                                      | 50      | 25        | 21.91        | 21.94        | 22.07         | 1             | 20.88        | 20.93        | 21.02         | 2             |
|                                                      | 50      | 50        | 21.66        | 21.67        | 21.74         | 1             | 20.61        | 20.62        | 20.78         | 2             |
|                                                      | 100     | 0         | 21.69        | 21.72        | 21.85         | 1             | 20.64        | 20.67        | 20.82         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 25 / 20M                                             | 1       | 0         | 16.41        | 16.45        | 16.50         | 0             | 15.40        | 15.46        | 15.52         | 0             |
|                                                      | 1       | 50        | 16.64        | 16.32        | 16.71         | 0             | 15.69        | 15.75        | 15.80         | 0             |
|                                                      | 1       | 99        | 16.13        | 16.20        | 16.04         | 0             | 15.11        | 15.16        | 15.22         | 0             |
|                                                      | 50      | 0         | 16.27        | 16.31        | 16.35         | 0             | 15.19        | 15.28        | 15.35         | 0             |
|                                                      | 50      | 25        | 16.40        | 16.34        | 16.59         | 0             | 15.56        | 15.62        | 15.66         | 0             |
|                                                      | 50      | 50        | 16.27        | 16.52        | 16.40         | 0             | 15.49        | 15.54        | 15.62         | 0             |
|                                                      | 100     | 0         | 16.37        | 16.43        | 16.39         | 0             | 15.37        | 15.42        | 15.48         | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26697 | Mid CH 26865 | High CH 27033 |               | Low CH 26697 | Mid CH 26865 | High CH 27033 |               |
|                                                      |         |           | 814.7 MHz    | 831.5 MHz    | 848.3 MHz     |               | 814.7 MHz    | 831.5 MHz    | 848.3 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 26 / 1.4M                                            | 1       | 0         | 22.61        | 22.31        | 22.26         | 0             | 21.70        | 21.37        | 21.32         | 1             |
|                                                      | 1       | 2         | 23.08        | 22.85        | 22.78         | 0             | 22.12        | 21.90        | 21.84         | 1             |
|                                                      | 1       | 5         | 22.54        | 22.13        | 22.01         | 0             | 21.45        | 21.20        | 21.09         | 1             |
|                                                      | 3       | 0         | 22.59        | 22.25        | 22.19         | 0             | 21.43        | 21.17        | 21.12         | 1             |
|                                                      | 3       | 1         | 22.63        | 22.29        | 22.21         | 0             | 21.48        | 21.21        | 21.16         | 1             |
|                                                      | 3       | 3         | 22.52        | 22.10        | 22.07         | 0             | 21.22        | 21.05        | 21.01         | 1             |
|                                                      | 6       | 0         | 21.48        | 21.11        | 21.05         | 1             | 20.46        | 20.11        | 20.01         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 26 / 1.4M                                            | 1       | 0         | 18.60        | 17.83        | 18.22         | 0             | 17.63        | 16.89        | 17.23         | 0             |
|                                                      | 1       | 2         | 18.72        | 18.03        | 17.39         | 0             | 17.77        | 17.01        | 16.34         | 0             |
|                                                      | 1       | 5         | 17.74        | 17.88        | 17.27         | 0             | 16.71        | 16.85        | 16.22         | 0             |
|                                                      | 3       | 0         | 18.13        | 18.41        | 17.69         | 0             | 17.11        | 17.43        | 16.65         | 0             |
|                                                      | 3       | 1         | 18.27        | 18.29        | 17.62         | 0             | 17.28        | 17.31        | 16.58         | 0             |
|                                                      | 3       | 3         | 18.03        | 18.22        | 17.52         | 0             | 17.01        | 17.23        | 16.48         | 0             |
|                                                      | 6       | 0         | 17.93        | 18.13        | 17.47         | 0             | 16.90        | 17.11        | 16.42         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26705 | Mid CH 26865 | High CH 27025 |               | Low CH 26705 | Mid CH 26865 | High CH 27025 |               |
|                                                      |         |           | 815.5 MHz    | 831.5 MHz    | 847.5 MHz     |               | 815.5 MHz    | 831.5 MHz    | 847.5 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 26 / 3M                                              | 1       | 0         | 22.70        | 22.39        | 22.35         | 0             | 21.75        | 21.43        | 21.39         | 1             |
|                                                      | 1       | 7         | 23.15        | 22.90        | 22.82         | 0             | 22.21        | 21.96        | 21.92         | 1             |
|                                                      | 1       | 14        | 22.59        | 22.20        | 22.16         | 0             | 21.61        | 21.22        | 21.11         | 1             |
|                                                      | 8       | 0         | 21.56        | 21.26        | 21.17         | 1             | 20.54        | 20.22        | 20.13         | 2             |
|                                                      | 8       | 3         | 21.57        | 21.27        | 21.22         | 1             | 20.61        | 20.24        | 20.18         | 2             |
|                                                      | 8       | 7         | 21.46        | 21.08        | 21.05         | 1             | 20.42        | 20.12        | 20.06         | 2             |
|                                                      | 15      | 0         | 21.51        | 21.17        | 21.11         | 1             | 20.51        | 20.13        | 20.05         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 26 / 3M                                              | 1       | 0         | 18.65        | 17.92        | 18.28         | 0             | 17.69        | 16.90        | 17.30         | 0             |
|                                                      | 1       | 7         | 18.77        | 18.11        | 17.54         | 0             | 17.82        | 17.11        | 16.49         | 0             |
|                                                      | 1       | 14        | 17.85        | 17.99        | 17.42         | 0             | 16.83        | 16.97        | 16.37         | 0             |
|                                                      | 8       | 0         | 18.20        | 18.47        | 17.81         | 0             | 17.21        | 17.51        | 16.78         | 0             |
|                                                      | 8       | 3         | 18.33        | 18.35        | 17.74         | 0             | 17.35        | 17.39        | 16.71         | 0             |
|                                                      | 8       | 7         | 18.11        | 18.28        | 17.65         | 0             | 17.11        | 17.30        | 16.62         | 0             |
|                                                      | 15      | 0         | 18.03        | 18.20        | 17.60         | 0             | 17.02        | 17.21        | 16.56         | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26715 | Mid CH 26865 | High CH 27015 |               | Low CH 26715 | Mid CH 26865 | High CH 27015 |               |
|                                                      |         |           | 816.5 MHz    | 831.5 MHz    | 846.5 MHz     |               | 816.5 MHz    | 831.5 MHz    | 846.5 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 26 / 5M                                              | 1       | 0         | 22.76        | 22.47        | 22.45         | 0             | 21.81        | 21.50        | 21.45         | 1             |
|                                                      | 1       | 12        | 23.22        | 22.97        | 22.95         | 0             | 22.23        | 22.00        | 21.97         | 1             |
|                                                      | 1       | 24        | 22.66        | 22.29        | 22.22         | 0             | 21.65        | 21.28        | 21.23         | 1             |
|                                                      | 12      | 0         | 21.65        | 21.30        | 21.27         | 1             | 20.62        | 20.28        | 20.23         | 2             |
|                                                      | 12      | 6         | 21.67        | 21.33        | 21.28         | 1             | 20.66        | 20.32        | 20.25         | 2             |
|                                                      | 12      | 13        | 21.50        | 21.21        | 21.19         | 1             | 20.48        | 20.17        | 20.15         | 2             |
|                                                      | 25      | 0         | 21.62        | 21.27        | 21.24         | 1             | 20.56        | 20.23        | 20.19         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 26 / 5M                                              | 1       | 0         | 18.70        | 18.70        | 18.36         | 0             | 17.75        | 17.02        | 17.38         | 0             |
|                                                      | 1       | 12        | 18.82        | 18.21        | 17.69         | 0             | 17.87        | 17.21        | 16.64         | 0             |
|                                                      | 1       | 24        | 17.97        | 18.10        | 17.57         | 0             | 16.94        | 17.09        | 16.52         | 0             |
|                                                      | 12      | 0         | 18.29        | 18.52        | 17.93         | 0             | 17.30        | 17.57        | 16.90         | 0             |
|                                                      | 12      | 6         | 18.40        | 18.42        | 17.87         | 0             | 17.42        | 17.45        | 16.83         | 0             |
|                                                      | 12      | 13        | 18.21        | 18.36        | 17.80         | 0             | 17.21        | 17.38        | 16.76         | 0             |
|                                                      | 25      | 0         | 18.14        | 18.29        | 17.75         | 0             | 17.13        | 17.30        | 16.70         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26740 | Mid CH 26865 | High CH 26990 |               | Low CH 26740 | Mid CH 26865 | High CH 26990 |               |
|                                                      |         |           | 819.0 MHz    | 831.5 MHz    | 844.0 MHz     |               | 819.0 MHz    | 831.5 MHz    | 844.0 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 26 / 10M                                             | 1       | 0         | 22.83        | 22.54        | 22.52         | 0             | 21.86        | 21.56        | 21.53         | 1             |
|                                                      | 1       | 24        | 23.25        | 23.02        | 22.94         | 0             | 22.29        | 22.05        | 21.98         | 1             |
|                                                      | 1       | 49        | 22.71        | 22.36        | 22.25         | 0             | 21.76        | 21.37        | 21.35         | 1             |
|                                                      | 25      | 0         | 21.73        | 21.44        | 21.41         | 1             | 20.74        | 20.46        | 20.41         | 2             |
|                                                      | 25      | 12        | 21.76        | 21.45        | 21.43         | 1             | 20.77        | 20.47        | 20.45         | 2             |
|                                                      | 25      | 25        | 21.58        | 21.36        | 21.34         | 1             | 20.67        | 20.31        | 20.29         | 2             |
|                                                      | 50      | 0         | 21.71        | 21.41        | 21.38         | 1             | 20.72        | 20.41        | 20.33         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 26 / 10M                                             | 1       | 0         | 18.75        | 18.13        | 18.42         | 0             | 17.78        | 17.11        | 17.42         | 0             |
|                                                      | 1       | 24        | 18.87        | 18.29        | 17.83         | 0             | 17.91        | 17.28        | 16.78         | 0             |
|                                                      | 1       | 49        | 18.08        | 18.20        | 17.72         | 0             | 17.06        | 17.18        | 16.67         | 0             |
|                                                      | 25      | 0         | 18.36        | 18.57        | 18.05         | 0             | 17.35        | 17.60        | 17.02         | 0             |
|                                                      | 25      | 12        | 18.45        | 18.47        | 17.99         | 0             | 17.46        | 17.49        | 16.96         | 0             |
|                                                      | 25      | 25        | 18.29        | 18.42        | 17.92         | 0             | 17.28        | 17.42        | 16.89         | 0             |
|                                                      | 50      | 0         | 18.22        | 18.36        | 17.88         | 0             | 17.20        | 17.35        | 16.84         | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK         |              |               | 3GPP MPR (dB) | 16QAM        |              |               | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
|                                                      |         |           | Low CH 26765 | Mid CH 26865 | High CH 26965 |               | Low CH 26765 | Mid CH 26865 | High CH 26965 |               |
|                                                      |         |           | 821.5 MHz    | 831.5 MHz    | 841.5 MHz     |               | 821.5 MHz    | 831.5 MHz    | 841.5 MHz     |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |              |              |               |               |              |              |               |               |
| 26 / 15M                                             | 1       | 0         | 22.89        | 22.62        | 22.60         | 0             | 21.92        | 21.63        | 21.61         | 1             |
|                                                      | 1       | 37        | 23.33        | 23.07        | 22.99         | 0             | 22.33        | 22.10        | 21.99         | 1             |
|                                                      | 1       | 74        | 22.80        | 22.45        | 22.34         | 0             | 21.65        | 21.45        | 21.35         | 1             |
|                                                      | 36      | 0         | 21.82        | 21.57        | 21.55         | 1             | 20.82        | 20.53        | 20.51         | 2             |
|                                                      | 36      | 19        | 21.85        | 21.58        | 21.56         | 1             | 20.83        | 20.54        | 20.52         | 2             |
|                                                      | 36      | 39        | 21.71        | 21.51        | 21.49         | 1             | 20.73        | 20.46        | 20.44         | 2             |
|                                                      | 75      | 0         | 21.81        | 21.55        | 21.52         | 1             | 20.77        | 20.51        | 20.48         | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |              |              |               |               |              |              |               |               |
| 26 / 15M                                             | 1       | 0         | 18.80        | 18.26        | 18.49         | 0             | 17.85        | 17.20        | 17.51         | 0             |
|                                                      | 1       | 37        | 18.92        | 18.38        | 18.51         | 0             | 17.97        | 17.37        | 16.92         | 0             |
|                                                      | 1       | 74        | 18.55        | 18.29        | 18.41         | 0             | 17.16        | 17.26        | 16.82         | 0             |
|                                                      | 36      | 0         | 18.69        | 18.63        | 18.51         | 0             | 17.43        | 17.67        | 17.14         | 0             |
|                                                      | 36      | 19        | 18.79        | 18.53        | 18.59         | 0             | 17.55        | 17.56        | 17.08         | 0             |
|                                                      | 36      | 39        | 18.68        | 18.49        | 18.52         | 0             | 17.37        | 17.51        | 17.02         | 0             |
|                                                      | 75      | 0         | 18.68        | 18.43        | 18.52         | 0             | 17.30        | 17.43        | 16.98         | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK       |            |            |            |            | 3GPP MPR (dB) | 16QAM      |            |            |            |            | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|------------|------------|------------|------------|------------|---------------|------------|------------|------------|------------|------------|---------------|
|                                                      |         |           | L-CH 39675 | M-CH 40148 | M-CH 40620 | M-CH 41093 | H-CH 41565 |               | L-CH 39675 | M-CH 40148 | M-CH 40620 | M-CH 41093 | H-CH 41565 |               |
|                                                      |         |           | 2498.5 MHz | 2545.8 MHz | 2593.0 MHz | 2640.3 MHz | 2687.5 MHz |               | 2498.5 MHz | 2545.8 MHz | 2593.0 MHz | 2640.3 MHz | 2687.5 MHz |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |            |            |            |            |            |               |            |            |            |            |            |               |
| 41 / 5M                                              | 1       | 0         | 21.37      | 21.63      | 21.47      | 21.12      | 21.09      | 0             | 20.39      | 20.65      | 20.50      | 20.11      | 20.08      | 1             |
|                                                      | 1       | 12        | 21.69      | 21.87      | 21.74      | 21.43      | 21.25      | 0             | 20.70      | 20.91      | 20.77      | 20.42      | 20.27      | 1             |
|                                                      | 1       | 24        | 21.22      | 21.54      | 21.36      | 21.10      | 21.03      | 0             | 20.22      | 20.58      | 20.35      | 20.02      | 20.04      | 1             |
|                                                      | 12      | 0         | 20.23      | 20.54      | 20.34      | 20.02      | 20.01      | 1             | 19.15      | 19.46      | 19.33      | 19.01      | 19.03      | 2             |
|                                                      | 12      | 6         | 20.52      | 20.82      | 20.67      | 20.31      | 20.25      | 1             | 19.53      | 19.78      | 19.63      | 19.34      | 19.19      | 2             |
|                                                      | 12      | 13        | 20.33      | 20.63      | 20.41      | 20.04      | 20.05      | 1             | 19.18      | 19.60      | 19.38      | 19.05      | 19.02      | 2             |
|                                                      | 25      | 0         | 20.43      | 20.76      | 20.61      | 20.28      | 20.19      | 1             | 19.39      | 19.75      | 19.55      | 19.27      | 19.14      | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |            |            |            |            |            |               |            |            |            |            |            |               |
| 41 / 5M                                              | 1       | 0         | 16.33      | 16.57      | 16.47      | 15.86      | 16.24      | 0             | 15.32      | 15.59      | 15.46      | 14.85      | 15.23      | 0             |
|                                                      | 1       | 12        | 16.69      | 16.70      | 16.49      | 16.35      | 16.50      | 0             | 15.68      | 15.69      | 15.48      | 15.34      | 15.49      | 0             |
|                                                      | 1       | 24        | 16.42      | 16.68      | 16.38      | 16.15      | 16.21      | 0             | 15.41      | 15.67      | 15.37      | 15.14      | 15.20      | 0             |
|                                                      | 12      | 0         | 16.33      | 16.69      | 16.41      | 16.18      | 16.31      | 0             | 15.32      | 15.68      | 15.40      | 15.17      | 15.30      | 0             |
|                                                      | 12      | 6         | 16.59      | 16.67      | 16.45      | 16.26      | 16.47      | 0             | 15.58      | 15.66      | 15.44      | 15.25      | 15.46      | 0             |
|                                                      | 12      | 13        | 16.46      | 16.63      | 16.42      | 16.27      | 16.45      | 0             | 15.45      | 15.62      | 15.41      | 15.26      | 15.44      | 0             |
|                                                      | 25      | 0         | 16.39      | 16.64      | 16.43      | 16.22      | 16.37      | 0             | 15.38      | 15.63      | 15.42      | 15.21      | 15.36      | 0             |

# FCC SAR Test Report

| Band / BW                                            | RB Size | RB Offset | QPSK       |            |            |            |            | 3GPP MPR (dB) | 16QAM      |            |            |            |            | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|------------|------------|------------|------------|------------|---------------|------------|------------|------------|------------|------------|---------------|
|                                                      |         |           | L-CH 39700 | M-CH 40160 | M-CH 40620 | M-CH 41080 | H-CH 41540 |               | L-CH 39700 | M-CH 40160 | M-CH 40620 | M-CH 41080 | H-CH 41540 |               |
|                                                      |         |           | 2501.0 MHz | 2547.0 MHz | 2593.0 MHz | 2639.0 MHz | 2685.0 MHz |               | 2501.0 MHz | 2547.0 MHz | 2593.0 MHz | 2639.0 MHz | 2685.0 MHz |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |            |            |            |            |            |               |            |            |            |            |            |               |
| 41 / 10M                                             | 1       | 0         | 21.43      | 21.68      | 21.53      | 21.18      | 21.15      | 0             | 20.45      | 20.73      | 20.56      | 20.20      | 20.17      | 1             |
|                                                      | 1       | 24        | 21.64      | 21.91      | 21.79      | 21.46      | 21.35      | 0             | 20.64      | 20.96      | 20.84      | 20.51      | 20.41      | 1             |
|                                                      | 1       | 49        | 21.33      | 21.62      | 21.40      | 21.14      | 21.02      | 0             | 20.27      | 20.63      | 20.44      | 20.10      | 20.03      | 1             |
|                                                      | 25      | 0         | 20.29      | 20.72      | 20.47      | 20.12      | 20.10      | 1             | 19.25      | 19.71      | 19.45      | 19.15      | 19.04      | 2             |
|                                                      | 25      | 12        | 20.64      | 20.90      | 20.75      | 20.47      | 20.25      | 1             | 19.67      | 19.91      | 19.75      | 19.37      | 19.31      | 2             |
|                                                      | 25      | 25        | 20.32      | 20.73      | 20.51      | 20.15      | 20.13      | 1             | 19.44      | 19.77      | 19.51      | 19.21      | 19.10      | 2             |
|                                                      | 50      | 0         | 20.62      | 20.85      | 20.70      | 20.41      | 20.22      | 1             | 19.50      | 19.84      | 19.69      | 19.35      | 19.23      | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |            |            |            |            |            |               |            |            |            |            |            |               |
| 41 / 10M                                             | 1       | 0         | 16.41      | 16.65      | 16.55      | 15.94      | 16.32      | 0             | 15.40      | 15.64      | 15.54      | 14.93      | 15.31      | 0             |
|                                                      | 1       | 24        | 16.77      | 16.78      | 16.57      | 16.43      | 16.58      | 0             | 15.76      | 15.77      | 15.56      | 15.42      | 15.57      | 0             |
|                                                      | 1       | 49        | 16.50      | 16.76      | 16.46      | 16.23      | 16.29      | 0             | 15.49      | 15.75      | 15.45      | 15.22      | 15.28      | 0             |
|                                                      | 25      | 0         | 16.41      | 16.77      | 16.49      | 16.26      | 16.39      | 0             | 15.40      | 15.76      | 15.48      | 15.25      | 15.38      | 0             |
|                                                      | 25      | 12        | 16.67      | 16.75      | 16.53      | 16.34      | 16.55      | 0             | 15.66      | 15.74      | 15.52      | 15.33      | 15.54      | 0             |
|                                                      | 25      | 25        | 16.54      | 16.71      | 16.50      | 16.35      | 16.53      | 0             | 15.53      | 15.70      | 15.49      | 15.34      | 15.52      | 0             |
|                                                      | 50      | 0         | 16.47      | 16.72      | 16.51      | 16.30      | 16.45      | 0             | 15.46      | 15.71      | 15.50      | 15.29      | 15.44      | 0             |

| Band / BW                                            | RB Size | RB Offset | QPSK       |            |            |            |            | 3GPP MPR (dB) | 16QAM      |            |            |            |            | 3GPP MPR (dB) |
|------------------------------------------------------|---------|-----------|------------|------------|------------|------------|------------|---------------|------------|------------|------------|------------|------------|---------------|
|                                                      |         |           | L-CH 39725 | M-CH 40173 | M-CH 40620 | M-CH 41068 | H-CH 41515 |               | L-CH 39725 | M-CH 40173 | M-CH 40620 | M-CH 41068 | H-CH 41515 |               |
|                                                      |         |           | 2503.5 MHz | 2548.3 MHz | 2593.0 MHz | 2637.8 MHz | 2682.5 MHz |               | 2503.5 MHz | 2548.3 MHz | 2593.0 MHz | 2637.8 MHz | 2682.5 MHz |               |
| EUT without Power Reduction (P-Sensor NOT Triggered) |         |           |            |            |            |            |            |               |            |            |            |            |            |               |
| 41 / 15M                                             | 1       | 0         | 21.50      | 21.73      | 21.60      | 21.28      | 21.23      | 0             | 20.54      | 20.78      | 20.64      | 20.31      | 20.27      | 1             |
|                                                      | 1       | 37        | 21.70      | 21.96      | 21.83      | 21.61      | 21.48      | 0             | 20.70      | 21.02      | 20.88      | 20.56      | 20.47      | 1             |
|                                                      | 1       | 74        | 21.39      | 21.64      | 21.49      | 21.22      | 21.14      | 0             | 20.35      | 20.75      | 20.53      | 20.20      | 20.09      | 1             |
|                                                      | 36      | 0         | 20.46      | 20.74      | 20.59      | 20.33      | 20.24      | 1             | 19.38      | 19.84      | 19.58      | 19.27      | 19.19      | 2             |
|                                                      | 36      | 19        | 20.79      | 20.99      | 20.86      | 20.61      | 20.49      | 1             | 19.77      | 20.00      | 19.87      | 19.57      | 19.42      | 2             |
|                                                      | 36      | 39        | 20.53      | 20.79      | 20.64      | 20.35      | 20.29      | 1             | 19.51      | 19.80      | 19.62      | 19.34      | 19.23      | 2             |
|                                                      | 75      | 0         | 20.66      | 20.95      | 20.82      | 20.48      | 20.45      | 1             | 19.68      | 19.96      | 19.82      | 19.49      | 19.44      | 2             |
| EUT with Power Reduction (P-Sensor Triggered)        |         |           |            |            |            |            |            |               |            |            |            |            |            |               |
| 41 / 15M                                             | 1       | 0         | 16.51      | 16.75      | 16.65      | 16.04      | 16.42      | 0             | 15.50      | 15.74      | 15.64      | 15.03      | 15.41      | 0             |
|                                                      | 1       | 37        | 16.87      | 16.88      | 16.67      | 16.53      | 16.68      | 0             | 15.86      | 15.87      | 15.66      | 15.52      | 15.67      | 0             |
|                                                      | 1       | 74        | 16.60      | 16.86      | 16.56      | 16.33      | 16.39      | 0             | 15.59      | 15.85      | 15.55      | 15.32      | 15.38      | 0             |
|                                                      | 36      | 0         | 16.51      | 16.87      | 16.59      | 16.36      | 16.49      | 0             | 15.50      | 15.86      | 15.58      | 15.35      | 15.48      | 0             |
|                                                      | 36      | 19        | 16.77      | 16.85      | 16.63      | 16.44      | 16.65      | 0             | 15.76      | 15.84      | 15.62      | 15.43      | 15.64      | 0             |
|                                                      | 36      | 39        | 16.64      | 16.81      | 16.60      | 16.45      | 16.63      | 0             | 15.63      | 15.80      | 15.59      | 15.44      | 15.62      | 0             |
|                                                      | 75      | 0         | 16.57      | 16.82      | 16.61      | 16.40      | 16.55      | 0             | 15.56      | 15.81      | 15.60      | 15.39      | 15.54      | 0             |

# FCC SAR Test Report

| Band /<br>BW                                         | RB<br>Size | RB<br>Offset | QPSK          |               |               |               |               | 3GPP<br>MPR<br><br>(dB) | 16QAM         |               |               |               |               | 3GPP<br>MPR<br><br>(dB) |
|------------------------------------------------------|------------|--------------|---------------|---------------|---------------|---------------|---------------|-------------------------|---------------|---------------|---------------|---------------|---------------|-------------------------|
|                                                      |            |              | L-CH<br>39750 | M-CH<br>40185 | M-CH<br>40620 | M-CH<br>41055 | H-CH<br>41490 |                         | L-CH<br>39750 | M-CH<br>40185 | M-CH<br>40620 | M-CH<br>41055 | H-CH<br>41490 |                         |
|                                                      |            |              | 2506.0        | 2549.5        | 2593.0        | 2636.5        | 2680.0        |                         | 2506.0        | 2549.5        | 2593.0        | 2636.5        | 2680.0        |                         |
|                                                      |            |              | MHz           | MHz           | MHz           | MHz           | MHz           |                         | MHz           | MHz           | MHz           | MHz           | MHz           |                         |
| EUT without Power Reduction (P-Sensor NOT Triggered) |            |              |               |               |               |               |               |                         |               |               |               |               |               |                         |
| 41 /<br>20M                                          | 1          | 0            | 21.57         | 21.79         | 21.66         | 21.36         | 21.33         | 0                       | 20.61         | 20.84         | 20.71         | 20.38         | 20.35         | 1                       |
|                                                      | 1          | 50           | 21.74         | 22.01         | 21.89         | 21.59         | 21.55         | 0                       | 20.84         | 21.07         | 20.94         | 20.73         | 20.59         | 1                       |
|                                                      | 1          | 99           | 21.41         | 21.71         | 21.56         | 21.35         | 21.21         | 0                       | 20.42         | 20.81         | 20.59         | 20.32         | 20.20         | 1                       |
|                                                      | 50         | 0            | 20.63         | 20.91         | 20.72         | 20.46         | 20.39         | 1                       | 19.63         | 19.94         | 19.69         | 19.36         | 19.35         | 2                       |
|                                                      | 50         | 25           | 20.91         | 21.08         | 20.96         | 20.72         | 20.62         | 1                       | 19.88         | 20.10         | 19.97         | 19.66         | 19.56         | 2                       |
|                                                      | 50         | 50           | 20.64         | 20.96         | 20.76         | 20.49         | 20.43         | 1                       | 19.64         | 19.95         | 19.74         | 19.47         | 19.39         | 2                       |
|                                                      | 100        | 0            | 20.87         | 21.05         | 20.92         | 20.66         | 20.51         | 1                       | 19.80         | 20.05         | 19.91         | 19.63         | 19.47         | 2                       |
| EUT with Power Reduction (P-Sensor Triggered)        |            |              |               |               |               |               |               |                         |               |               |               |               |               |                         |
| 41 /<br>20M                                          | 1          | 0            | 16.60         | 16.84         | 16.74         | 16.13         | 16.51         | 0                       | 15.59         | 15.83         | 15.73         | 15.12         | 15.50         | 0                       |
|                                                      | 1          | 50           | 16.96         | 16.97         | 16.76         | 16.62         | 16.77         | 0                       | 15.95         | 15.96         | 15.75         | 15.61         | 15.76         | 0                       |
|                                                      | 1          | 99           | 16.69         | 16.95         | 16.65         | 16.42         | 16.48         | 0                       | 15.68         | 15.94         | 15.64         | 15.41         | 15.47         | 0                       |
|                                                      | 50         | 0            | 16.60         | 16.94         | 16.68         | 16.45         | 16.58         | 0                       | 15.59         | 15.95         | 15.67         | 15.44         | 15.57         | 0                       |
|                                                      | 50         | 25           | 16.86         | 16.96         | 16.72         | 16.53         | 16.74         | 0                       | 15.85         | 15.93         | 15.71         | 15.52         | 15.73         | 0                       |
|                                                      | 50         | 50           | 16.73         | 16.90         | 16.69         | 16.54         | 16.72         | 0                       | 15.72         | 15.89         | 15.68         | 15.53         | 15.71         | 0                       |
|                                                      | 100        | 0            | 16.66         | 16.91         | 16.70         | 16.49         | 16.64         | 0                       | 15.65         | 15.90         | 15.69         | 15.48         | 15.63         | 0                       |

## 4.7 SAR Testing Results

### 4.7.1 SAR Test Reduction Considerations

#### <KDB 447498 D01, General RF Exposure Guidance>

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1)  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- (2)  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3)  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

#### <KDB 941225 D01, 3G SAR Measurement Procedures>

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

#### <KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>

##### (1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

##### (2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

##### (3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 1/2$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

##### (4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is  $> 1/2$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

### <KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is  $\leq 0.4$  W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is  $\leq 0.8$  W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2$  W/kg.
- (3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is  $> 0.8$  W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is  $\leq 1.2$  W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is  $\leq 1.2$  W/kg.
- (4) For WLAN MIMO mode, the power-based standalone SAR test exclusion or the sum of SAR provision in KDB 447498 to determine simultaneous transmission SAR test exclusion should be applied. Otherwise, SAR for MIMO mode will be measured with all applicable antennas transmitting simultaneously at the specified maximum output power of MIMO operation.



# FCC SAR Test Report

## 4.7.2 SAR Results for Body Exposure Condition

| Plot No. | Band     | Mode            | Test Position | Separation Distance (cm) | Ch.  | Battery | P-sensor | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|----------|-----------------|---------------|--------------------------|------|---------|----------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | WCDMA II | RMC12.2K        | Rear Face     | 0                        | 9400 | 1       | w/       | 16.0                     | 15.53                          | 1.11           | -0.01            | 0.588                  | 0.66                 |
|          | WCDMA II | RMC12.2K        | Rear Face     | 1.8                      | 9400 | 1       | w/o      | 24.0                     | 23.38                          | 1.15           | -0.02            | 0.547                  | 0.63                 |
|          | WCDMA II | RMC12.2K        | Left Side     | 0                        | 9400 | 1       | w/o      | 24.0                     | 23.38                          | 1.15           | 0.09             | 0.823                  | 0.95                 |
|          | WCDMA II | RMC12.2K        | Left Side     | 0                        | 9262 | 1       | w/o      | 24.0                     | 23.36                          | 1.16           | 0.02             | 0.696                  | 0.81                 |
|          | WCDMA II | RMC12.2K        | Left Side     | 0                        | 9538 | 1       | w/o      | 24.0                     | 23.18                          | 1.21           | 0.02             | 0.831                  | 1.00                 |
|          | WCDMA II | RMC12.2K        | Right Side    | 0                        | 9400 | 1       | w/o      | 24.0                     | 23.38                          | 1.15           | -0.13            | 0.098                  | 0.11                 |
|          | WCDMA II | RMC12.2K        | Top Side      | 0                        | 9400 | 1       | w/       | 16.0                     | 15.53                          | 1.11           | -0.1             | 0.425                  | 0.47                 |
|          | WCDMA II | RMC12.2K        | Top Side      | 1.7                      | 9400 | 1       | w/o      | 24.0                     | 23.38                          | 1.15           | -0.06            | 0.956                  | 1.10                 |
| 01       | WCDMA II | RMC12.2K        | Top Side      | 1.7                      | 9262 | 1       | w/o      | 24.0                     | 23.36                          | 1.16           | -0.05            | 1.12                   | 1.30                 |
|          | WCDMA II | RMC12.2K        | Top Side      | 1.7                      | 9262 | 1       | w/o      | 24.0                     | 23.36                          | 1.16           | -0.11            | 1.08                   | 1.25                 |
|          | WCDMA II | RMC12.2K        | Top Side      | 1.7                      | 9538 | 1       | w/o      | 24.0                     | 23.18                          | 1.21           | 0.07             | 0.873                  | 1.05                 |
|          | WCDMA II | HSDPA Subtest-2 | Top Side      | 1.7                      | 9400 | 1       | w/o      | 22.5                     | 22.05                          | 1.11           | 0.15             | 0.767                  | 0.85                 |
|          | WCDMA II | HSDPA Subtest-2 | Top Side      | 1.7                      | 9262 | 1       | w/o      | 22.5                     | 21.96                          | 1.13           | -0.06            | 0.794                  | 0.90                 |
|          | WCDMA II | HSDPA Subtest-2 | Top Side      | 1.7                      | 9538 | 1       | w/o      | 22.5                     | 22.02                          | 1.12           | -0.17            | 0.725                  | 0.81                 |
|          | WCDMA II | HSUPA Subtest-5 | Top Side      | 1.7                      | 9400 | 1       | w/o      | 22.5                     | 22.10                          | 1.10           | 0.04             | 0.749                  | 0.82                 |
|          | WCDMA II | HSUPA Subtest-5 | Top Side      | 1.7                      | 9262 | 1       | w/o      | 22.5                     | 22.00                          | 1.12           | 0.08             | 0.771                  | 0.87                 |
|          | WCDMA II | HSUPA Subtest-5 | Top Side      | 1.7                      | 9538 | 1       | w/o      | 22.5                     | 21.90                          | 1.15           | 0.02             | 0.703                  | 0.81                 |
|          | WCDMA II | RMC12.2K        | Bottom Side   | 0                        | 9400 | 1       | w/o      | 24.0                     | 23.38                          | 1.15           | 0                | 0                      | 0.00                 |
|          | WCDMA II | RMC12.2K        | Top Side      | 1.7                      | 9262 | 2       | w/o      | 24.0                     | 23.36                          | 1.16           | -0.03            | 1.1                    | 1.27                 |
|          | WCDMA II | RMC12.2K        | Top Side      | 1.7                      | 9400 | 2       | w/o      | 24.0                     | 23.38                          | 1.15           | 0.03             | 0.812                  | 0.94                 |
|          | WCDMA II | RMC12.2K        | Top Side      | 1.7                      | 9538 | 2       | w/o      | 24.0                     | 23.18                          | 1.21           | 0.05             | 0.824                  | 1.00                 |
|          | WCDMA IV | RMC12.2K        | Rear Face     | 0                        | 1413 | 1       | w/       | 18.0                     | 17.52                          | 1.12           | -0.13            | 0.537                  | 0.60                 |
|          | WCDMA IV | RMC12.2K        | Rear Face     | 1.8                      | 1413 | 1       | w/o      | 24.0                     | 23.08                          | 1.24           | 0.03             | 0.302                  | 0.37                 |
| 02       | WCDMA IV | RMC12.2K        | Left Side     | 0                        | 1413 | 1       | w/o      | 24.0                     | 23.08                          | 1.24           | 0.14             | 0.645                  | 0.80                 |
|          | WCDMA IV | RMC12.2K        | Left Side     | 0                        | 1312 | 1       | w/o      | 24.0                     | 23.01                          | 1.26           | -0.09            | 0.591                  | 0.74                 |
|          | WCDMA IV | RMC12.2K        | Left Side     | 0                        | 1513 | 1       | w/o      | 24.0                     | 23.02                          | 1.25           | 0.06             | 0.596                  | 0.75                 |
|          | WCDMA IV | RMC12.2K        | Right Side    | 0                        | 1413 | 1       | w/o      | 24.0                     | 23.08                          | 1.24           | 0.07             | 0.198                  | 0.24                 |
|          | WCDMA IV | RMC12.2K        | Top Side      | 0                        | 1413 | 1       | w/       | 18.0                     | 17.52                          | 1.12           | -0.11            | 0.504                  | 0.56                 |
|          | WCDMA IV | RMC12.2K        | Top Side      | 1.7                      | 1413 | 1       | w/o      | 24.0                     | 23.08                          | 1.24           | -0.06            | 0.318                  | 0.39                 |
|          | WCDMA IV | RMC12.2K        | Bottom Side   | 0                        | 1413 | 1       | w/o      | 24.0                     | 23.08                          | 1.24           | 0                | 0                      | 0.00                 |
|          | WCDMA IV | RMC12.2K        | Left Side     | 0                        | 1413 | 2       | w/o      | 24.0                     | 23.08                          | 1.24           | -0.19            | 0.629                  | 0.78                 |
| 03       | WCDMA V  | RMC12.2K        | Rear Face     | 0                        | 4233 | 1       | w/       | 18.0                     | 17.74                          | 1.06           | 0.03             | 0.748                  | 0.79                 |
|          | WCDMA V  | RMC12.2K        | Rear Face     | 1.8                      | 4233 | 1       | w/o      | 24.0                     | 22.78                          | 1.32           | 0.02             | 0.325                  | 0.43                 |
|          | WCDMA V  | RMC12.2K        | Left Side     | 0                        | 4233 | 1       | w/o      | 24.0                     | 22.78                          | 1.32           | 0.07             | 0.294                  | 0.39                 |
|          | WCDMA V  | RMC12.2K        | Right Side    | 0                        | 4233 | 1       | w/o      | 24.0                     | 22.78                          | 1.32           | 0.08             | 0.005                  | 0.01                 |
|          | WCDMA V  | RMC12.2K        | Top Side      | 0                        | 4233 | 1       | w/       | 18.0                     | 17.74                          | 1.06           | -0.114           | 0.585                  | 0.62                 |
|          | WCDMA V  | RMC12.2K        | Top Side      | 1.7                      | 4233 | 1       | w/o      | 24.0                     | 22.78                          | 1.32           | -0.07            | 0.311                  | 0.41                 |
|          | WCDMA V  | RMC12.2K        | Bottom Side   | 0                        | 4233 | 1       | w/o      | 24.0                     | 22.78                          | 1.32           | 0                | 0                      | 0.00                 |
|          | WCDMA V  | RMC12.2K        | Rear Face     | 0                        | 4233 | 2       | w/       | 18.0                     | 17.74                          | 1.06           | -0.01            | 0.688                  | 0.73                 |

# FCC SAR Test Report

| Plot No. | Band  | Mode    | Test Position | Separation Distance (cm) | Ch.   | Battery | P-sensor | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|-------|---------|---------------|--------------------------|-------|---------|----------|-----|-----------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | LTE 2 | QPSK20M | Rear Face     | 0                        | 19100 | 1       | w/       | 1   | 50        | 17.0                     | 16.76                          | 1.06           | -0.15            | 0.614                  | 0.65                 |
|          | LTE 2 | QPSK20M | Rear Face     | 0                        | 19100 | 1       | w/       | 50  | 25        | 17.0                     | 16.71                          | 1.07           | -0.08            | 0.610                  | 0.65                 |
|          | LTE 2 | QPSK20M | Rear Face     | 1.8                      | 19100 | 1       | w/o      | 1   | 50        | 24.0                     | 23.23                          | 1.19           | -0.05            | 0.491                  | 0.59                 |
|          | LTE 2 | QPSK20M | Rear Face     | 1.8                      | 19100 | 1       | w/o      | 50  | 25        | 23.0                     | 22.25                          | 1.19           | 0                | 0.393                  | 0.47                 |
|          | LTE 2 | QPSK20M | Left Side     | 0                        | 19100 | 1       | w/o      | 1   | 50        | 24.0                     | 23.23                          | 1.19           | 0.10             | 0.680                  | 0.81                 |
|          | LTE 2 | QPSK20M | Left Side     | 0                        | 18700 | 1       | w/o      | 1   | 50        | 24.0                     | 23.11                          | 1.23           | -0.04            | 0.637                  | 0.78                 |
|          | LTE 2 | QPSK20M | Left Side     | 0                        | 18900 | 1       | w/o      | 1   | 50        | 24.0                     | 23.01                          | 1.26           | -0.09            | 0.603                  | 0.76                 |
|          | LTE 2 | QPSK20M | Left Side     | 0                        | 19100 | 1       | w/o      | 50  | 25        | 23.0                     | 22.25                          | 1.19           | 0.18             | 0.546                  | 0.65                 |
|          | LTE 2 | QPSK20M | Left Side     | 0                        | 19100 | 1       | w/o      | 100 | 0         | 23.0                     | 22.14                          | 1.22           | 0.06             | 0.519                  | 0.63                 |
|          | LTE 2 | QPSK20M | Right Side    | 0                        | 19100 | 1       | w/o      | 1   | 50        | 24.0                     | 23.23                          | 1.19           | 0.11             | 0.083                  | 0.10                 |
|          | LTE 2 | QPSK20M | Right Side    | 0                        | 19100 | 1       | w/o      | 50  | 25        | 23.0                     | 22.25                          | 1.19           | -0.09            | 0.063                  | 0.07                 |
|          | LTE 2 | QPSK20M | Top Side      | 0                        | 19100 | 1       | w/       | 1   | 50        | 17.0                     | 16.76                          | 1.06           | -0.08            | 0.429                  | 0.45                 |
|          | LTE 2 | QPSK20M | Top Side      | 0                        | 19100 | 1       | w/       | 50  | 25        | 17.0                     | 16.71                          | 1.07           | -0.03            | 0.427                  | 0.46                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 19100 | 1       | w/o      | 1   | 50        | 24.0                     | 23.23                          | 1.19           | 0.03             | 0.85                   | 1.01                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 18700 | 1       | w/o      | 1   | 50        | 24.0                     | 23.11                          | 1.23           | -0.03            | 0.818                  | 1.00                 |
| 04       | LTE 2 | QPSK20M | Top Side      | 1.7                      | 18900 | 1       | w/o      | 1   | 50        | 24.0                     | 23.01                          | 1.26           | 0.01             | 0.915                  | 1.15                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 18900 | 1       | w/o      | 1   | 50        | 24.0                     | 23.01                          | 1.26           | 0.01             | 0.908                  | 1.14                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 19100 | 1       | w/o      | 50  | 25        | 23.0                     | 22.25                          | 1.19           | 0.05             | 0.668                  | 0.79                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 19100 | 1       | w/o      | 100 | 0         | 23.0                     | 22.14                          | 1.22           | 0.05             | 0.695                  | 0.85                 |
|          | LTE 2 | QPSK20M | Bottom Side   | 0                        | 19100 | 1       | w/o      | 1   | 50        | 24.0                     | 23.23                          | 1.19           | 0                | 0                      | 0.00                 |
|          | LTE 2 | QPSK20M | Bottom Side   | 0                        | 19100 | 1       | w/o      | 50  | 25        | 23.0                     | 22.25                          | 1.19           | 0                | 0                      | 0.00                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 18900 | 2       | w/o      | 1   | 50        | 24.0                     | 23.01                          | 1.26           | -0.07            | 0.799                  | 1.00                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 18700 | 2       | w/o      | 1   | 50        | 24.0                     | 23.11                          | 1.23           | -0.06            | 0.912                  | 1.12                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 19100 | 2       | w/o      | 1   | 50        | 24.0                     | 23.23                          | 1.19           | -0.04            | 0.757                  | 0.90                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 19100 | 2       | w/o      | 50  | 25        | 23.0                     | 22.25                          | 1.19           | 0.02             | 0.678                  | 0.81                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 18700 | 2       | w/o      | 50  | 25        | 23.0                     | 22.14                          | 1.22           | -0.01            | 0.644                  | 0.79                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 18900 | 2       | w/o      | 50  | 25        | 23.0                     | 21.97                          | 1.27           | 0.04             | 0.585                  | 0.74                 |
|          | LTE 2 | QPSK20M | Top Side      | 1.7                      | 19100 | 2       | w/o      | 100 | 0         | 23.0                     | 22.14                          | 1.22           | 0.05             | 0.683                  | 0.83                 |
|          | LTE 4 | QPSK20M | Rear Face     | 0                        | 20175 | 1       | w/       | 1   | 0         | 17.5                     | 17.39                          | 1.03           | -0.01            | 0.521                  | 0.53                 |
|          | LTE 4 | QPSK20M | Rear Face     | 0                        | 20175 | 1       | w/       | 50  | 0         | 17.5                     | 17.39                          | 1.03           | 0.03             | 0.515                  | 0.53                 |
|          | LTE 4 | QPSK20M | Rear Face     | 1.8                      | 20175 | 1       | w/o      | 1   | 0         | 24.0                     | 22.97                          | 1.27           | 0.03             | 0.279                  | 0.35                 |
|          | LTE 4 | QPSK20M | Rear Face     | 1.8                      | 20175 | 1       | w/o      | 50  | 0         | 23.0                     | 21.94                          | 1.28           | 0.01             | 0.23                   | 0.29                 |
| 05       | LTE 4 | QPSK20M | Left Side     | 0                        | 20175 | 1       | w/o      | 1   | 0         | 24.0                     | 22.97                          | 1.27           | -0.03            | 0.524                  | 0.66                 |
|          | LTE 4 | QPSK20M | Left Side     | 0                        | 20175 | 1       | w/o      | 50  | 0         | 23.0                     | 21.94                          | 1.28           | 0.13             | 0.425                  | 0.54                 |
|          | LTE 4 | QPSK20M | Right Side    | 0                        | 20175 | 1       | w/o      | 1   | 0         | 24.0                     | 22.97                          | 1.27           | -0.04            | 0.147                  | 0.19                 |
|          | LTE 4 | QPSK20M | Right Side    | 0                        | 20175 | 1       | w/o      | 50  | 0         | 23.0                     | 21.94                          | 1.28           | 0.01             | 0.116                  | 0.15                 |
|          | LTE 4 | QPSK20M | Top Side      | 0                        | 20175 | 1       | w/       | 1   | 0         | 17.5                     | 17.39                          | 1.03           | -0.07            | 0.475                  | 0.49                 |
|          | LTE 4 | QPSK20M | Top Side      | 0                        | 20175 | 1       | w/       | 50  | 0         | 17.5                     | 17.39                          | 1.03           | -0.15            | 0.466                  | 0.48                 |
|          | LTE 4 | QPSK20M | Top Side      | 1.7                      | 20175 | 1       | w/o      | 1   | 0         | 24.0                     | 22.97                          | 1.27           | -0.09            | 0.265                  | 0.34                 |
|          | LTE 4 | QPSK20M | Top Side      | 1.7                      | 20175 | 1       | w/o      | 50  | 0         | 23.0                     | 21.94                          | 1.28           | -0.06            | 0.216                  | 0.28                 |
|          | LTE 4 | QPSK20M | Bottom Side   | 0                        | 20175 | 1       | w/o      | 1   | 0         | 24.0                     | 22.97                          | 1.27           | 0                | 0                      | 0.00                 |
|          | LTE 4 | QPSK20M | Bottom Side   | 0                        | 20175 | 1       | w/o      | 50  | 0         | 23.0                     | 21.94                          | 1.28           | 0                | 0                      | 0.00                 |
|          | LTE 4 | QPSK20M | Left Side     | 0                        | 20175 | 2       | w/o      | 1   | 0         | 24.0                     | 22.97                          | 1.27           | -0.17            | 0.482                  | 0.61                 |

# FCC SAR Test Report

| Plot No. | Band  | Mode    | Test Position | Separation Distance (cm) | Ch.   | Battery | P-sensor | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|-------|---------|---------------|--------------------------|-------|---------|----------|-----|-----------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | LTE 5 | QPSK10M | Rear Face     | 0                        | 20450 | 1       | w/       | 1   | 24        | 18.5                     | 18.16                          | 1.08           | 0.11             | 0.752                  | 0.81                 |
|          | LTE 5 | QPSK10M | Rear Face     | 0                        | 20525 | 1       | w/       | 1   | 24        | 18.5                     | 18.13                          | 1.09           | -0.03            | 0.712                  | 0.78                 |
|          | LTE 5 | QPSK10M | Rear Face     | 0                        | 20600 | 1       | w/       | 1   | 49        | 18.5                     | 18.13                          | 1.09           | -0.02            | 0.738                  | 0.80                 |
|          | LTE 5 | QPSK10M | Rear Face     | 0                        | 20450 | 1       | w/       | 25  | 12        | 18.5                     | 18.08                          | 1.10           | -0.02            | 0.751                  | 0.83                 |
|          | LTE 5 | QPSK10M | Rear Face     | 0                        | 20525 | 1       | w/       | 25  | 12        | 18.5                     | 17.95                          | 1.14           | -0.01            | 0.713                  | 0.81                 |
|          | LTE 5 | QPSK10M | Rear Face     | 0                        | 20600 | 1       | w/       | 25  | 12        | 18.5                     | 17.99                          | 1.12           | -0.02            | 0.727                  | 0.82                 |
| 06       | LTE 5 | QPSK10M | Rear Face     | 0                        | 20450 | 1       | w/       | 50  | 0         | 18.5                     | 17.98                          | 1.13           | 0.01             | 0.742                  | 0.84                 |
|          | LTE 5 | QPSK10M | Rear Face     | 0                        | 20450 | 1       | w/       | 50  | 0         | 18.5                     | 17.98                          | 1.13           | 0.02             | 0.738                  | 0.83                 |
|          | LTE 5 | QPSK10M | Rear Face     | 1.8                      | 20450 | 1       | w/o      | 1   | 24        | 24.0                     | 22.67                          | 1.36           | 0.03             | 0.25                   | 0.34                 |
|          | LTE 5 | QPSK10M | Rear Face     | 1.8                      | 20450 | 1       | w/o      | 25  | 12        | 23.0                     | 21.52                          | 1.41           | 0.02             | 0.199                  | 0.28                 |
|          | LTE 5 | QPSK10M | Left Side     | 0                        | 20450 | 1       | w/o      | 1   | 24        | 24.0                     | 22.67                          | 1.36           | -0.18            | 0.247                  | 0.34                 |
|          | LTE 5 | QPSK10M | Left Side     | 0                        | 20450 | 1       | w/o      | 25  | 12        | 23.0                     | 21.52                          | 1.41           | -0.11            | 0.190                  | 0.27                 |
|          | LTE 5 | QPSK10M | Right Side    | 0                        | 20450 | 1       | w/o      | 1   | 24        | 24.0                     | 22.67                          | 1.36           | 0.06             | 0.003                  | 0.00                 |
|          | LTE 5 | QPSK10M | Right Side    | 0                        | 20450 | 1       | w/o      | 25  | 12        | 23.0                     | 21.52                          | 1.41           | 0                | 0                      | 0.00                 |
|          | LTE 5 | QPSK10M | Top Side      | 0                        | 20450 | 1       | w/       | 1   | 24        | 18.5                     | 18.16                          | 1.08           | -0.13            | 0.576                  | 0.62                 |
|          | LTE 5 | QPSK10M | Top Side      | 0                        | 20450 | 1       | w/       | 25  | 12        | 18.5                     | 18.08                          | 1.10           | -0.08            | 0.574                  | 0.63                 |
|          | LTE 5 | QPSK10M | Top Side      | 1.7                      | 20450 | 1       | w/o      | 1   | 24        | 24.0                     | 22.67                          | 1.36           | 0.02             | 0.241                  | 0.33                 |
|          | LTE 5 | QPSK10M | Top Side      | 1.7                      | 20450 | 1       | w/o      | 25  | 12        | 23.0                     | 21.52                          | 1.41           | 0.10             | 0.185                  | 0.26                 |
|          | LTE 5 | QPSK10M | Bottom Side   | 0                        | 20450 | 1       | w/o      | 1   | 24        | 24.0                     | 22.67                          | 1.36           | -0.04            | 0.016                  | 0.02                 |
|          | LTE 5 | QPSK10M | Bottom Side   | 0                        | 20450 | 1       | w/o      | 25  | 12        | 23.0                     | 21.52                          | 1.41           | 0.02             | 0.011                  | 0.02                 |
|          | LTE 5 | QPSK10M | Rear Face     | 0                        | 20450 | 2       | w/       | 50  | 0         | 18.5                     | 17.98                          | 1.13           | 0.01             | 0.702                  | 0.79                 |
|          | LTE 7 | QPSK20M | Rear Face     | 0                        | 21100 | 1       | w/       | 1   | 50        | 17.0                     | 16.73                          | 1.06           | -0.01            | 0.276                  | 0.29                 |
|          | LTE 7 | QPSK20M | Rear Face     | 0                        | 21100 | 1       | w/       | 50  | 25        | 17.0                     | 16.70                          | 1.07           | 0.03             | 0.244                  | 0.26                 |
|          | LTE 7 | QPSK20M | Rear Face     | 1.8                      | 21100 | 1       | w/o      | 1   | 50        | 23.0                     | 22.15                          | 1.22           | 0.01             | 0.311                  | 0.38                 |
|          | LTE 7 | QPSK20M | Rear Face     | 1.8                      | 21100 | 1       | w/o      | 50  | 25        | 22.0                     | 21.16                          | 1.21           | -0.01            | 0.251                  | 0.30                 |
|          | LTE 7 | QPSK20M | Left Side     | 0                        | 21100 | 1       | w/o      | 1   | 50        | 23.0                     | 22.15                          | 1.22           | 0.1              | 0.784                  | 0.95                 |
|          | LTE 7 | QPSK20M | Left Side     | 0                        | 20850 | 1       | w/o      | 1   | 50        | 23.0                     | 21.65                          | 1.36           | 0.06             | 0.693                  | 0.95                 |
| 07       | LTE 7 | QPSK20M | Left Side     | 0                        | 21350 | 1       | w/o      | 1   | 50        | 23.0                     | 21.91                          | 1.29           | 0.05             | 0.788                  | 1.01                 |
|          | LTE 7 | QPSK20M | Left Side     | 0                        | 21100 | 1       | w/o      | 50  | 25        | 22.0                     | 21.16                          | 1.21           | 0.06             | 0.614                  | 0.75                 |
|          | LTE 7 | QPSK20M | Left Side     | 0                        | 21100 | 1       | w/o      | 100 | 0         | 22.0                     | 21.12                          | 1.22           | 0.07             | 0.629                  | 0.77                 |
|          | LTE 7 | QPSK20M | Right Side    | 0                        | 21100 | 1       | w/o      | 1   | 50        | 23.0                     | 22.15                          | 1.22           | 0.03             | 0.106                  | 0.13                 |
|          | LTE 7 | QPSK20M | Right Side    | 0                        | 21100 | 1       | w/o      | 50  | 25        | 22.0                     | 21.16                          | 1.21           | -0.08            | 0.077                  | 0.09                 |
|          | LTE 7 | QPSK20M | Top Side      | 0                        | 21100 | 1       | w/       | 1   | 50        | 17.0                     | 16.73                          | 1.06           | 0.02             | 0.412                  | 0.44                 |
|          | LTE 7 | QPSK20M | Top Side      | 0                        | 21100 | 1       | w/       | 50  | 25        | 17.0                     | 16.70                          | 1.07           | 0.09             | 0.408                  | 0.44                 |
|          | LTE 7 | QPSK20M | Top Side      | 1.7                      | 21100 | 1       | w/o      | 1   | 50        | 23.0                     | 22.15                          | 1.22           | 0                | 0.387                  | 0.47                 |
|          | LTE 7 | QPSK20M | Top Side      | 1.7                      | 21100 | 1       | w/o      | 50  | 25        | 22.0                     | 21.16                          | 1.21           | -0.04            | 0.304                  | 0.37                 |
|          | LTE 7 | QPSK20M | Bottom Side   | 0                        | 21100 | 1       | w/o      | 1   | 50        | 23.0                     | 22.15                          | 1.22           | 0                | 0                      | 0.00                 |
|          | LTE 7 | QPSK20M | Bottom Side   | 0                        | 21100 | 1       | w/o      | 50  | 25        | 22.0                     | 21.16                          | 1.21           | 0                | 0                      | 0.00                 |
|          | LTE 7 | QPSK20M | Left Side     | 0                        | 21350 | 2       | w/o      | 1   | 50        | 23.0                     | 21.91                          | 1.29           | -0.12            | 0.723                  | 0.93                 |
|          | LTE 7 | QPSK20M | Left Side     | 0                        | 20850 | 2       | w/o      | 1   | 50        | 23.0                     | 21.65                          | 1.36           | -0.11            | 0.635                  | 0.87                 |
|          | LTE 7 | QPSK20M | Left Side     | 0                        | 21100 | 2       | w/o      | 1   | 50        | 23.0                     | 22.15                          | 1.22           | -0.15            | 0.729                  | 0.89                 |
|          | LTE 7 | QPSK20M | Left Side     | 0                        | 21100 | 1       | w/o      | 50  | 25        | 22.0                     | 21.16                          | 1.21           | 0.06             | 0.488                  | 0.59                 |
|          | LTE 7 | QPSK20M | Left Side     | 0                        | 21100 | 1       | w/o      | 100 | 0         | 22.0                     | 21.12                          | 1.22           | 0.08             | 0.470                  | 0.58                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Separation Distance (cm) | Ch.   | Battery | P-sensor | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|--------------------------|-------|---------|----------|-----|-----------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23060 | 1       | w/       | 1   | 24        | 20.5                     | 20.36                          | 1.03           | 0                | 0.966                  | 1.00                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23095 | 1       | w/       | 1   | 24        | 20.5                     | 20.31                          | 1.04           | 0.02             | 0.985                  | 1.03                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23095 | 1       | w/       | 1   | 24        | 20.5                     | 20.31                          | 1.04           | -0.03            | 0.918                  | 0.96                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23130 | 1       | w/       | 1   | 49        | 20.5                     | 20.19                          | 1.07           | -0.02            | 0.948                  | 1.02                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23060 | 1       | w/       | 25  | 12        | 20.5                     | 20.10                          | 1.10           | 0.01             | 0.964                  | 1.06                 |
| 08       | LTE 12 | QPSK10M | Rear Face     | 0                        | 23095 | 1       | w/       | 25  | 0         | 20.5                     | 20.00                          | 1.12           | 0.01             | 0.959                  | 1.08                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23130 | 1       | w/       | 25  | 25        | 20.5                     | 19.94                          | 1.14           | -0.01            | 0.917                  | 1.04                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23060 | 1       | w/       | 50  | 0         | 20.5                     | 20.10                          | 1.10           | 0.01             | 0.953                  | 1.04                 |
|          | LTE 12 | QPSK10M | Rear Face     | 1.8                      | 23060 | 1       | w/o      | 1   | 24        | 24.0                     | 23.18                          | 1.21           | 0.08             | 0.123                  | 0.15                 |
|          | LTE 12 | QPSK10M | Rear Face     | 1.8                      | 23060 | 1       | w/o      | 25  | 12        | 23.0                     | 22.22                          | 1.20           | -0.08            | 0.098                  | 0.12                 |
|          | LTE 12 | QPSK10M | Left Side     | 0                        | 23060 | 1       | w/o      | 1   | 24        | 24.0                     | 23.18                          | 1.21           | -0.04            | 0.063                  | 0.08                 |
|          | LTE 12 | QPSK10M | Left Side     | 0                        | 23060 | 1       | w/o      | 25  | 12        | 23.0                     | 22.22                          | 1.20           | -0.01            | 0.064                  | 0.08                 |
|          | LTE 12 | QPSK10M | Right Side    | 0                        | 23060 | 1       | w/o      | 1   | 24        | 24.0                     | 23.18                          | 1.21           | 0                | 0                      | 0.00                 |
|          | LTE 12 | QPSK10M | Right Side    | 0                        | 23060 | 1       | w/o      | 25  | 12        | 23.0                     | 22.22                          | 1.20           | 0                | 0                      | 0.00                 |
|          | LTE 12 | QPSK10M | Top Side      | 0                        | 23060 | 1       | w/       | 1   | 24        | 20.5                     | 20.36                          | 1.03           | -0.13            | 0.851                  | 0.88                 |
|          | LTE 12 | QPSK10M | Top Side      | 0                        | 23095 | 1       | w/       | 1   | 24        | 20.5                     | 20.31                          | 1.04           | -0.12            | 0.901                  | 0.94                 |
|          | LTE 12 | QPSK10M | Top Side      | 0                        | 23130 | 1       | w/       | 1   | 49        | 20.5                     | 20.19                          | 1.07           | -0.12            | 0.893                  | 0.96                 |
|          | LTE 12 | QPSK10M | Top Side      | 0                        | 23060 | 1       | w/       | 25  | 12        | 20.5                     | 20.10                          | 1.10           | -0.03            | 0.862                  | 0.95                 |
|          | LTE 12 | QPSK10M | Top Side      | 0                        | 23095 | 1       | w/       | 25  | 0         | 20.5                     | 20.00                          | 1.12           | -0.15            | 0.923                  | 1.04                 |
|          | LTE 12 | QPSK10M | Top Side      | 0                        | 23130 | 1       | w/       | 25  | 25        | 20.5                     | 19.94                          | 1.14           | -0.06            | 0.912                  | 1.04                 |
|          | LTE 12 | QPSK10M | Top Side      | 0                        | 23060 | 1       | w/       | 50  | 0         | 20.5                     | 20.10                          | 1.10           | -0.08            | 0.907                  | 0.99                 |
|          | LTE 12 | QPSK10M | Top Side      | 1.7                      | 23060 | 1       | w/o      | 1   | 24        | 24.0                     | 23.18                          | 1.21           | -0.14            | 0.087                  | 0.11                 |
|          | LTE 12 | QPSK10M | Top Side      | 1.7                      | 23060 | 1       | w/o      | 25  | 12        | 23.0                     | 22.22                          | 1.20           | -0.09            | 0.066                  | 0.08                 |
|          | LTE 12 | QPSK10M | Bottom Side   | 0                        | 23060 | 1       | w/o      | 1   | 24        | 24.0                     | 23.18                          | 1.21           | 0                | 0                      | 0.00                 |
|          | LTE 12 | QPSK10M | Bottom Side   | 0                        | 23060 | 1       | w/o      | 25  | 12        | 23.0                     | 22.22                          | 1.20           | 0                | 0                      | 0.00                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23095 | 2       | w/       | 25  | 0         | 20.5                     | 20.00                          | 1.12           | -0.14            | 0.851                  | 0.95                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23060 | 2       | w/       | 25  | 12        | 20.5                     | 20.10                          | 1.10           | 0.01             | 0.945                  | 1.04                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23130 | 2       | w/       | 25  | 25        | 20.5                     | 19.94                          | 1.14           | -0.08            | 0.871                  | 0.99                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23060 | 2       | w/       | 1   | 24        | 20.5                     | 20.36                          | 1.03           | -0.11            | 0.831                  | 0.86                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23095 | 2       | w/       | 1   | 24        | 20.5                     | 20.31                          | 1.04           | 0.04             | 0.856                  | 0.89                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23130 | 2       | w/       | 1   | 49        | 20.5                     | 20.19                          | 1.07           | 0.09             | 0.830                  | 0.89                 |
|          | LTE 12 | QPSK10M | Rear Face     | 0                        | 23060 | 2       | w/       | 50  | 0         | 20.5                     | 20.10                          | 1.10           | -0.08            | 0.792                  | 0.87                 |
|          | LTE 13 | QPSK10M | Rear Face     | 0                        | 23230 | 1       | w/       | 1   | 0         | 18.5                     | 18.37                          | 1.03           | 0.02             | 0.782                  | 0.81                 |
| 09       | LTE 13 | QPSK10M | Rear Face     | 0                        | 23230 | 1       | w/       | 25  | 0         | 18.5                     | 18.28                          | 1.05           | -0.01            | 0.820                  | 0.86                 |
|          | LTE 13 | QPSK10M | Rear Face     | 0                        | 23230 | 1       | w/       | 25  | 0         | 18.5                     | 18.28                          | 1.05           | 0.07             | 0.770                  | 0.81                 |
|          | LTE 13 | QPSK10M | Rear Face     | 0                        | 23230 | 1       | w/       | 50  | 0         | 18.5                     | 18.25                          | 1.06           | 0.02             | 0.704                  | 0.75                 |
|          | LTE 13 | QPSK10M | Rear Face     | 1.8                      | 23230 | 1       | w/o      | 1   | 0         | 24.0                     | 22.91                          | 1.29           | -0.02            | 0.157                  | 0.20                 |
|          | LTE 13 | QPSK10M | Rear Face     | 1.8                      | 23230 | 1       | w/o      | 25  | 0         | 23.0                     | 21.74                          | 1.34           | -0.06            | 0.151                  | 0.20                 |
|          | LTE 13 | QPSK10M | Left Side     | 0                        | 23230 | 1       | w/o      | 1   | 0         | 24.0                     | 22.91                          | 1.29           | -0.01            | 0.142                  | 0.18                 |
|          | LTE 13 | QPSK10M | Left Side     | 0                        | 23230 | 1       | w/o      | 25  | 0         | 23.0                     | 21.74                          | 1.34           | -0.02            | 0.13                   | 0.17                 |
|          | LTE 13 | QPSK10M | Right Side    | 0                        | 23230 | 1       | w/o      | 1   | 0         | 24.0                     | 22.91                          | 1.29           | 0                | 0                      | 0.00                 |
|          | LTE 13 | QPSK10M | Right Side    | 0                        | 23230 | 1       | w/o      | 25  | 0         | 23.0                     | 21.74                          | 1.34           | 0                | 0                      | 0.00                 |
|          | LTE 13 | QPSK10M | Top Side      | 0                        | 23230 | 1       | w/       | 1   | 0         | 18.5                     | 18.37                          | 1.03           | -0.14            | 0.702                  | 0.72                 |
|          | LTE 13 | QPSK10M | Top Side      | 0                        | 23230 | 1       | w/       | 25  | 0         | 18.5                     | 18.28                          | 1.05           | -0.02            | 0.696                  | 0.73                 |
|          | LTE 13 | QPSK10M | Top Side      | 1.7                      | 23230 | 1       | w/o      | 1   | 0         | 24.0                     | 22.91                          | 1.29           | 0.19             | 0.184                  | 0.24                 |
|          | LTE 13 | QPSK10M | Top Side      | 1.7                      | 23230 | 1       | w/o      | 25  | 0         | 23.0                     | 21.74                          | 1.34           | 0.01             | 0.144                  | 0.19                 |
|          | LTE 13 | QPSK10M | Bottom Side   | 0                        | 23230 | 1       | w/o      | 1   | 0         | 24.0                     | 22.91                          | 1.29           | 0                | 0                      | 0.00                 |
|          | LTE 13 | QPSK10M | Bottom Side   | 0                        | 23230 | 1       | w/o      | 25  | 0         | 23.0                     | 21.74                          | 1.34           | 0                | 0                      | 0.00                 |
|          | LTE 13 | QPSK10M | Rear Face     | 0                        | 23230 | 2       | w/       | 25  | 0         | 18.5                     | 18.28                          | 1.05           | -0.01            | 0.726                  | 0.76                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Separation Distance (cm) | Ch.   | Battery | P-sensor | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|--------------------------|-------|---------|----------|-----|-----------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | LTE 25 | QPSK20M | Rear Face     | 0                        | 26590 | 1       | w/       | 1   | 50        | 17.0                     | 16.71                          | 1.07           | -0.07            | 0.589                  | 0.63                 |
|          | LTE 25 | QPSK20M | Rear Face     | 0                        | 26590 | 1       | w/       | 50  | 25        | 17.0                     | 16.59                          | 1.10           | 0.02             | 0.578                  | 0.64                 |
|          | LTE 25 | QPSK20M | Rear Face     | 1.8                      | 26590 | 1       | w/o      | 1   | 50        | 24.0                     | 23.08                          | 1.24           | -0.04            | 0.418                  | 0.52                 |
|          | LTE 25 | QPSK20M | Rear Face     | 1.8                      | 26590 | 1       | w/o      | 50  | 25        | 23.0                     | 22.07                          | 1.24           | 0                | 0.329                  | 0.41                 |
|          | LTE 25 | QPSK20M | Left Side     | 0                        | 26590 | 1       | w/o      | 1   | 50        | 24.0                     | 23.08                          | 1.24           | 0.04             | 0.690                  | 0.85                 |
|          | LTE 25 | QPSK20M | Left Side     | 0                        | 26140 | 1       | w/o      | 1   | 50        | 24.0                     | 22.95                          | 1.27           | -0.11            | 0.585                  | 0.74                 |
|          | LTE 25 | QPSK20M | Left Side     | 0                        | 26365 | 1       | w/o      | 1   | 50        | 24.0                     | 22.99                          | 1.26           | 0.14             | 0.617                  | 0.78                 |
|          | LTE 25 | QPSK20M | Left Side     | 0                        | 26590 | 1       | w/o      | 50  | 25        | 23.0                     | 22.07                          | 1.24           | 0.03             | 0.542                  | 0.67                 |
|          | LTE 25 | QPSK20M | Left Side     | 0                        | 26590 | 1       | w/o      | 100 | 0         | 23.0                     | 21.85                          | 1.30           | 0.08             | 0.503                  | 0.66                 |
|          | LTE 25 | QPSK20M | Right Side    | 0                        | 26590 | 1       | w/o      | 1   | 50        | 24.0                     | 23.08                          | 1.24           | 0.01             | 0.069                  | 0.09                 |
|          | LTE 25 | QPSK20M | Right Side    | 0                        | 26590 | 1       | w/o      | 50  | 25        | 23.0                     | 22.07                          | 1.24           | -0.06            | 0.062                  | 0.08                 |
|          | LTE 25 | QPSK20M | Top Side      | 0                        | 26590 | 1       | w/       | 1   | 50        | 17.0                     | 16.71                          | 1.07           | -0.05            | 0.434                  | 0.46                 |
|          | LTE 25 | QPSK20M | Top Side      | 0                        | 26590 | 1       | w/       | 50  | 25        | 17.0                     | 16.59                          | 1.10           | 0.06             | 0.437                  | 0.48                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26590 | 1       | w/o      | 1   | 50        | 24.0                     | 23.08                          | 1.24           | 0.05             | 0.777                  | 0.96                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26140 | 1       | w/o      | 1   | 50        | 24.0                     | 22.95                          | 1.27           | 0.07             | 0.692                  | 0.88                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26365 | 1       | w/o      | 1   | 50        | 24.0                     | 22.99                          | 1.26           | 0.03             | 0.796                  | 1.00                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26590 | 1       | w/o      | 50  | 25        | 23.0                     | 22.07                          | 1.24           | -0.06            | 0.611                  | 0.76                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26590 | 1       | w/o      | 100 | 0         | 23.0                     | 21.85                          | 1.30           | -0.04            | 0.631                  | 0.82                 |
|          | LTE 25 | QPSK20M | Bottom Side   | 0                        | 26590 | 1       | w/o      | 1   | 50        | 24.0                     | 23.08                          | 1.24           | 0                | 0                      | 0.00                 |
|          | LTE 25 | QPSK20M | Bottom Side   | 0                        | 26590 | 1       | w/o      | 50  | 25        | 23.0                     | 22.07                          | 1.24           | 0                | 0                      | 0.00                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26365 | 2       | w/o      | 1   | 50        | 24.0                     | 22.99                          | 1.26           | -0.06            | 0.774                  | 0.98                 |
| 10       | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26140 | 2       | w/o      | 1   | 50        | 24.0                     | 22.95                          | 1.27           | -0.01            | 0.873                  | 1.11                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26140 | 2       | w/o      | 1   | 50        | 24.0                     | 22.95                          | 1.27           | 0.06             | 0.833                  | 1.06                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26590 | 2       | w/o      | 1   | 50        | 24.0                     | 23.08                          | 1.24           | -0.08            | 0.754                  | 0.93                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26590 | 2       | w/o      | 50  | 25        | 23.0                     | 22.07                          | 1.24           | -0.03            | 0.633                  | 0.78                 |
|          | LTE 25 | QPSK20M | Top Side      | 1.7                      | 26590 | 2       | w/o      | 100 | 0         | 23.0                     | 21.85                          | 1.30           | -0.11            | 0.637                  | 0.83                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26765 | 1       | w/       | 1   | 37        | 19.0                     | 18.92                          | 1.02           | -0.03            | 0.978                  | 1.00                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26865 | 1       | w/       | 1   | 37        | 19.0                     | 18.38                          | 1.15           | -0.07            | 0.942                  | 1.09                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26965 | 1       | w/       | 1   | 37        | 19.0                     | 18.51                          | 1.12           | 0.15             | 0.928                  | 1.04                 |
| 11       | LTE 26 | QPSK15M | Rear Face     | 0                        | 26765 | 1       | w/       | 36  | 19        | 19.0                     | 18.79                          | 1.05           | -0.04            | 1.04                   | 1.09                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26765 | 1       | w/       | 36  | 19        | 19.0                     | 18.79                          | 1.05           | 0.06             | 0.963                  | 1.01                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26865 | 1       | w/       | 36  | 0         | 19.0                     | 18.63                          | 1.09           | 0.01             | 0.967                  | 1.05                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26965 | 1       | w/       | 36  | 19        | 19.0                     | 18.59                          | 1.10           | -0.01            | 0.982                  | 1.08                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26765 | 1       | w/       | 75  | 0         | 19.0                     | 18.68                          | 1.08           | 0.01             | 0.996                  | 1.07                 |
|          | LTE 26 | QPSK15M | Rear Face     | 1.8                      | 26765 | 1       | w/o      | 1   | 37        | 24.0                     | 23.33                          | 1.17           | 0.05             | 0.244                  | 0.28                 |
|          | LTE 26 | QPSK15M | Rear Face     | 1.8                      | 26765 | 1       | w/o      | 36  | 19        | 23.0                     | 21.85                          | 1.30           | 0.03             | 0.198                  | 0.26                 |
|          | LTE 26 | QPSK15M | Left Side     | 0                        | 26765 | 1       | w/o      | 1   | 37        | 24.0                     | 23.33                          | 1.17           | -0.01            | 0.233                  | 0.27                 |
|          | LTE 26 | QPSK15M | Left Side     | 0                        | 26765 | 1       | w/o      | 36  | 19        | 23.0                     | 21.85                          | 1.30           | -0.10            | 0.198                  | 0.26                 |
|          | LTE 26 | QPSK15M | Right Side    | 0                        | 26765 | 1       | w/o      | 1   | 37        | 24.0                     | 23.33                          | 1.17           | -0.05            | 0.003                  | 0.00                 |
|          | LTE 26 | QPSK15M | Right Side    | 0                        | 26765 | 1       | w/o      | 36  | 19        | 23.0                     | 21.85                          | 1.30           | 0                | 0                      | 0.00                 |
|          | LTE 26 | QPSK15M | Top Side      | 0                        | 26765 | 1       | w/       | 1   | 37        | 19.0                     | 18.92                          | 1.02           | 0                | 0.729                  | 0.74                 |
|          | LTE 26 | QPSK15M | Top Side      | 0                        | 26765 | 1       | w/       | 36  | 19        | 19.0                     | 18.79                          | 1.05           | 0.07             | 0.737                  | 0.77                 |
|          | LTE 26 | QPSK15M | Top Side      | 1.7                      | 26765 | 1       | w/o      | 1   | 37        | 24.0                     | 23.33                          | 1.17           | 0                | 0.19                   | 0.22                 |
|          | LTE 26 | QPSK15M | Top Side      | 1.7                      | 26765 | 1       | w/o      | 36  | 19        | 23.0                     | 21.85                          | 1.30           | -0.04            | 0.168                  | 0.22                 |
|          | LTE 26 | QPSK15M | Bottom Side   | 0                        | 26765 | 1       | w/o      | 1   | 37        | 24.0                     | 23.33                          | 1.17           | 0                | 0                      | 0.00                 |
|          | LTE 26 | QPSK15M | Bottom Side   | 0                        | 26765 | 1       | w/o      | 36  | 19        | 23.0                     | 21.85                          | 1.30           | 0                | 0                      | 0.00                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26765 | 2       | w/       | 36  | 19        | 19.0                     | 18.79                          | 1.05           | -0.12            | 0.944                  | 0.99                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26865 | 2       | w/       | 36  | 0         | 19.0                     | 18.63                          | 1.09           | 0.07             | 0.913                  | 0.99                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26965 | 2       | w/       | 36  | 19        | 19.0                     | 18.59                          | 1.10           | -0.05            | 0.93                   | 1.02                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26765 | 2       | w/       | 1   | 37        | 19.0                     | 18.92                          | 1.02           | 0.07             | 0.773                  | 0.79                 |
|          | LTE 26 | QPSK15M | Rear Face     | 0                        | 26765 | 2       | w/       | 75  | 0         | 19.0                     | 18.68                          | 1.08           | 0.03             | 0.713                  | 0.77                 |

# FCC SAR Test Report

| Plot No. | Band   | Mode    | Test Position | Separation Distance (cm) | Ch.   | Battery | P-sensor | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|--------------------------|-------|---------|----------|-----|-----------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | LTE 41 | QPSK20M | Rear Face     | 0                        | 40185 | 1       | w/       | 1   | 50        | 17.0                     | 16.97                          | 1.01           | -0.03            | 0.177                  | 0.18                 |
|          | LTE 41 | QPSK20M | Rear Face     | 0                        | 40185 | 1       | w/       | 50  | 25        | 17.0                     | 16.96                          | 1.01           | -0.09            | 0.179                  | 0.18                 |
|          | LTE 41 | QPSK20M | Rear Face     | 1.8                      | 40185 | 1       | w/o      | 1   | 50        | 23.0                     | 22.01                          | 1.26           | -0.09            | 0.130                  | 0.16                 |
|          | LTE 41 | QPSK20M | Rear Face     | 1.8                      | 40185 | 1       | w/o      | 50  | 25        | 22.0                     | 21.08                          | 1.24           | 0.02             | 0.102                  | 0.13                 |
|          | LTE 41 | QPSK20M | Left Side     | 0                        | 40185 | 1       | w/o      | 1   | 50        | 23.0                     | 22.01                          | 1.26           | 0.05             | 0.287                  | 0.36                 |
|          | LTE 41 | QPSK20M | Left Side     | 0                        | 40185 | 1       | w/o      | 50  | 25        | 22.0                     | 21.08                          | 1.24           | 0.01             | 0.213                  | 0.26                 |
|          | LTE 41 | QPSK20M | Right Side    | 0                        | 40185 | 1       | w/o      | 1   | 50        | 23.0                     | 22.01                          | 1.26           | 0                | 0                      | 0.00                 |
|          | LTE 41 | QPSK20M | Right Side    | 0                        | 40185 | 1       | w/o      | 50  | 25        | 22.0                     | 21.08                          | 1.24           | 0                | 0                      | 0.00                 |
|          | LTE 41 | QPSK20M | Top Side      | 0                        | 40185 | 1       | w/       | 1   | 50        | 17.0                     | 16.97                          | 1.01           | -0.18            | 0.209                  | 0.21                 |
|          | LTE 41 | QPSK20M | Top Side      | 0                        | 40185 | 1       | w/       | 50  | 25        | 17.0                     | 16.96                          | 1.01           | -0.12            | 0.209                  | 0.21                 |
|          | LTE 41 | QPSK20M | Top Side      | 1.7                      | 40185 | 1       | w/o      | 1   | 50        | 23.0                     | 22.01                          | 1.26           | -0.05            | 0.129                  | 0.16                 |
|          | LTE 41 | QPSK20M | Top Side      | 1.7                      | 40185 | 1       | w/o      | 50  | 25        | 22.0                     | 21.08                          | 1.24           | -0.06            | 0.102                  | 0.13                 |
|          | LTE 41 | QPSK20M | Bottom Side   | 0                        | 40185 | 1       | w/o      | 1   | 50        | 23.0                     | 22.01                          | 1.26           | 0                | 0                      | 0.00                 |
|          | LTE 41 | QPSK20M | Bottom Side   | 0                        | 40185 | 1       | w/o      | 50  | 25        | 22.0                     | 21.08                          | 1.24           | 0                | 0                      | 0.00                 |
| 12       | LTE 41 | QPSK20M | Left Side     | 0                        | 40185 | 2       | w/o      | 1   | 50        | 23.0                     | 22.01                          | 1.26           | -0.14            | 0.361                  | 0.45                 |

<For SPLSR>

## WLAN Module 1

| Plot No. | Band      | Test Position | Separation Distance (cm) | Ch. | Battery | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|-----------|---------------|--------------------------|-----|---------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | Bluetooth | Left Side     | 0                        | 78  | 1       | 7.0                      | 5.08                           | 1.56           | 0                | 0                      | 0.00                 |
|          | Bluetooth | Left Side     | 0                        | 78  | 2       | 7.0                      | 5.08                           | 1.56           | 0                | 0                      | 0.00                 |

## WLAN Module 2

| Plot No. | Band     | Mode    | Test Position | Separation Distance (cm) | Ch. | Battery | Tx Antenna | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|----------|---------|---------------|--------------------------|-----|---------|------------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | WLAN2450 | 802.11b | Left Side     | 0                        | 6   | 1       | 0          | 13.0                     | 13.00                          | 1.00           | 0                | 0                      | 0.00                 |
|          | WLAN2450 | 802.11b | Left Side     | 0                        | 6   | 2       | 0          | 13.0                     | 13.00                          | 1.00           | 0                | 0                      | 0.00                 |
|          | WLAN5.3G | 802.11a | Left Side     | 0                        | 64  | 1       | 0          | 12.0                     | 12.00                          | 1.00           | 0                | 0                      | 0.00                 |
|          | WLAN5.3G | 802.11a | Left Side     | 0                        | 64  | 2       | 0          | 12.0                     | 12.00                          | 1.00           | 0                | 0                      | 0.00                 |
|          | WLAN5.6G | 802.11a | Left Side     | 0                        | 100 | 1       | 0          | 11.5                     | 11.50                          | 1.00           | 0                | 0                      | 0.00                 |
|          | WLAN5.6G | 802.11a | Left Side     | 0                        | 100 | 2       | 0          | 11.5                     | 11.50                          | 1.00           | 0                | 0                      | 0.00                 |
|          | WLAN5.8G | 802.11a | Left Side     | 0                        | 149 | 1       | 0          | 11.5                     | 11.50                          | 1.00           | 0                | 0                      | 0.00                 |
|          | WLAN5.8G | 802.11a | Left Side     | 0                        | 149 | 2       | 0          | 11.5                     | 11.50                          | 1.00           | 0                | 0                      | 0.00                 |

| Plot No. | Band      | Test Position | Separation Distance (cm) | Ch. | Battery | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|-----------|---------------|--------------------------|-----|---------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | Bluetooth | Left Side     | 0                        | 39  | 1       | 11.5                     | 11.5                           | 1.00           | 0                | 0                      | 0.00                 |
|          | Bluetooth | Left Side     | 0                        | 39  | 2       | 11.5                     | 11.5                           | 1.00           | 0                | 0                      | 0.00                 |



## FCC SAR Test Report

### 4.7.3 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

| Band     | Mode     | Test Position | Ch.   | Original Measured SAR-1g (W/kg) | 1st Repeated SAR-1g (W/kg) | L/S Ratio | 2nd Repeated SAR-1g (W/kg) | L/S Ratio | 3rd Repeated SAR-1g (W/kg) | L/S Ratio |
|----------|----------|---------------|-------|---------------------------------|----------------------------|-----------|----------------------------|-----------|----------------------------|-----------|
| WCDMA II | RMC12.2K | Top Side      | 9262  | 1.12                            | 1.08                       | 1.04      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 2    | QPSK20M  | Top Side      | 18900 | 0.915                           | 0.908                      | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| LTE12    | QPSK10M  | Rear Face     | 23095 | 0.985                           | 0.918                      | 1.07      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 13   | QPSK10M  | Rear Face     | 23230 | 0.820                           | 0.770                      | 1.06      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 25   | QPSK20M  | Top Side      | 26140 | 0.873                           | 0.833                      | 1.05      | N/A                        | N/A       | N/A                        | N/A       |
| LTE 26   | QPSK15M  | Rear Face     | 26765 | 1.04                            | 0.963                      | 1.08      | N/A                        | N/A       | N/A                        | N/A       |

## FCC SAR Test Report

### 4.7.4 Simultaneous Multi-band Transmission Evaluation

#### <Estimated SAR Calculation>

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of  $\leq 0.4$  W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \frac{\sqrt{f_{(\text{GHz})}}}{7.5}$$

If the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is  $> 50$  mm, the 0.4 W/kg is used for SAR-1g.

| Mode / Band | Frequency (GHz) | Max. Tune-up Power (dBm) | Test Position | Separation Distance (mm) | Estimated SAR (W/kg) |
|-------------|-----------------|--------------------------|---------------|--------------------------|----------------------|
| WCDMA II    | 1.9076          | 24.0                     | Body          | 5                        | 0.40                 |
| WCDMA IV    | 1.7526          | 24.0                     | Body          | 5                        | 0.40                 |
| WCDMA V     | 0.8466          | 24.0                     | Body          | 5                        | 0.40                 |
| LTE 2       | 1.9093          | 24.0                     | Body          | 5                        | 0.40                 |
| LTE 4       | 1.7543          | 24.0                     | Body          | 5                        | 0.40                 |
| LTE 5       | 0.8483          | 24.0                     | Body          | 5                        | 0.40                 |
| LTE 7       | 2.5675          | 23.0                     | Body          | 5                        | 0.40                 |
| LTE 12      | 0.7153          | 24.0                     | Body          | 5                        | 0.40                 |
| LTE 13      | 0.7845          | 24.0                     | Body          | 5                        | 0.40                 |
| LTE 25      | 1.9143          | 24.0                     | Body          | 5                        | 0.40                 |
| LTE 26      | 0.8483          | 24.0                     | Body          | 5                        | 0.40                 |
| LTE 41      | 2.6875          | 23.0                     | Body          | 5                        | 0.40                 |



## FCC SAR Test Report

### WLAN 1 :

| Mode / Band | Frequency (GHz) | Max. Tune-up Power (dBm) | Test Position | Separation Distance (mm) | Estimated SAR (W/kg) |
|-------------|-----------------|--------------------------|---------------|--------------------------|----------------------|
| WLAN (DTS)  | 2.462           | 15.0                     | Body          | 5                        | 0.40                 |
| WLAN (NII)  | 5.24            | 13.5                     | Body          | 5                        | 0.40                 |
| WLAN (NII)  | 5.32            | 13.5                     | Body          | 5                        | 0.40                 |
| WLAN (NII)  | 5.7             | 13.5                     | Body          | 5                        | 0.40                 |
| WLAN (NII)  | 5.825           | 13.5                     | Body          | 5                        | 0.40                 |
| BT (DSS)    | 2.48            | 7.0                      | Body          | 5                        | 0.21                 |

### WLAN 2 :

| Mode / Band | Frequency (GHz) | Max. Tune-up Power (dBm) | Test Position | Separation Distance (mm) | Estimated SAR (W/kg) |
|-------------|-----------------|--------------------------|---------------|--------------------------|----------------------|
| WLAN (DTS)  | 2.462           | 15.0                     | Body          | 5                        | 0.40                 |
| WLAN (NII)  | 5.24            | 13.5                     | Body          | 5                        | 0.40                 |
| WLAN (NII)  | 5.32            | 13.5                     | Body          | 5                        | 0.40                 |
| WLAN (NII)  | 5.7             | 13.5                     | Body          | 5                        | 0.40                 |
| WLAN (NII)  | 5.825           | 13.5                     | Body          | 5                        | 0.40                 |
| BT (DSS)    | 2.48            | 11.5                     | Body          | 5                        | 0.40                 |

### Note:

1. The separation distance is determined from the outer housing of the EUT to the user.
2. When standalone SAR testing is not required, an estimated SAR can be applied to determine simultaneous transmission SAR test exclusion.

## FCC SAR Test Report

### <SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR<sub>1g</sub> of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR<sub>1g</sub> 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR<sub>1g</sub> is greater than the SAR limit (SAR<sub>1g</sub> 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

### WWAN + WLAN 1 :

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)       | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis            |
|-----|----------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|------------------------------|
| 1   | WCDMA II<br>+<br>WLAN (DTS)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.66         | 0.79         | 0.03         | 1.48             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Left Side        | 1.00         | 0.40         | 0.00         | 1.40             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Right Side       | 0.11         | 0.40         | 0.21         | 0.72             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Top Side         | 1.30         | 0.26         | 0.01         | 1.57             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | Σ SAR < 1.6,<br>Not required |
| 2   | WCDMA II<br>+<br>WLAN (NII)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.66         | 0.50         | 0.03         | 1.19             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Left Side        | 1.00         | 0.40         | 0.00         | 1.40             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Right Side       | 0.11         | 0.40         | 0.21         | 0.72             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Top Side         | 1.30         | 0.57         | 0.01         | 1.88             | <b>Analyzed<br/>as below</b> |
|     |                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | Σ SAR < 1.6,<br>Not required |
| 3   | WCDMA IV<br>+<br>WLAN (DTS)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.60         | 0.79         | 0.03         | 1.42             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Left Side        | 0.80         | 0.40         | 0.00         | 1.20             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Right Side       | 0.24         | 0.40         | 0.21         | 0.85             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Top Side         | 0.56         | 0.26         | 0.01         | 0.83             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | Σ SAR < 1.6,<br>Not required |
| 4   | WCDMA IV<br>+<br>WLAN (NII)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.60         | 0.50         | 0.03         | 1.13             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Left Side        | 0.80         | 0.40         | 0.00         | 1.20             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Right Side       | 0.24         | 0.40         | 0.21         | 0.85             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Top Side         | 0.56         | 0.57         | 0.01         | 1.14             | Σ SAR < 1.6,<br>Not required |
|     |                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | Σ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)      | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|---------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 5   | WCDMA V<br>+<br>WLAN (DTS)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.79         | 0.79         | 0.03         | 1.61             | <b>Analyzed<br/>as below</b>        |
|     |                                             |                       | Left Side        | 0.39         | 0.40         | 0.00         | 0.79             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Right Side       | 0.01         | 0.40         | 0.21         | 0.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Top Side         | 0.62         | 0.26         | 0.01         | 0.89             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 6   | WCDMA V<br>+<br>WLAN (NII)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.79         | 0.50         | 0.03         | 1.32             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Left Side        | 0.39         | 0.40         | 0.00         | 0.79             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Right Side       | 0.01         | 0.40         | 0.21         | 0.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Top Side         | 0.62         | 0.57         | 0.01         | 1.20             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 7   | LTE 2<br>+<br>WLAN (DTS)<br>+<br>BT (DSS)   | Body                  | Rear Face        | 0.65         | 0.79         | 0.03         | 1.47             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Left Side        | 0.81         | 0.40         | 0.00         | 1.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Right Side       | 0.10         | 0.40         | 0.21         | 0.71             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Top Side         | 1.15         | 0.26         | 0.01         | 1.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 8   | LTE 2<br>+<br>WLAN (NII)<br>+<br>BT (DSS)   | Body                  | Rear Face        | 0.65         | 0.50         | 0.03         | 1.18             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Left Side        | 0.81         | 0.40         | 0.00         | 1.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Right Side       | 0.10         | 0.40         | 0.21         | 0.71             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Top Side         | 1.15         | 0.57         | 0.01         | 1.73             | <b>Analyzed<br/>as below</b>        |
|     |                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 9   | LTE 4<br>+<br>WLAN (DTS)<br>+<br>BT (DSS)   | Body                  | Rear Face        | 0.53         | 0.79         | 0.03         | 1.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Left Side        | 0.66         | 0.40         | 0.00         | 1.06             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Right Side       | 0.19         | 0.40         | 0.21         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Top Side         | 0.49         | 0.26         | 0.01         | 0.76             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 10  | LTE 4<br>+<br>WLAN (NII)<br>+<br>BT (DSS)   | Body                  | Rear Face        | 0.53         | 0.50         | 0.03         | 1.06             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Left Side        | 0.66         | 0.40         | 0.00         | 1.06             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Right Side       | 0.19         | 0.40         | 0.21         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Top Side         | 0.49         | 0.57         | 0.01         | 1.07             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)     | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|--------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 11  | LTE 5<br>+<br>WLAN (DTS)<br>+<br>BT (DSS)  | Body                  | Rear Face        | 0.84         | 0.79         | 0.03         | 1.66             | <b>Analyzed<br/>as below</b>        |
|     |                                            |                       | Left Side        | 0.34         | 0.40         | 0.00         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.63         | 0.26         | 0.01         | 0.90             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.02         | 0.40         | 0.21         | 0.63             | $\Sigma$ SAR < 1.6,<br>Not required |
| 12  | LTE 5<br>+<br>WLAN (NII)<br>+<br>BT (DSS)  | Body                  | Rear Face        | 0.84         | 0.50         | 0.03         | 1.37             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Left Side        | 0.34         | 0.40         | 0.00         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.63         | 0.57         | 0.01         | 1.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.02         | 0.40         | 0.21         | 0.63             | $\Sigma$ SAR < 1.6,<br>Not required |
| 13  | LTE 7<br>+<br>WLAN (DTS)<br>+<br>BT (DSS)  | Body                  | Rear Face        | 0.38         | 0.79         | 0.03         | 1.20             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Left Side        | 1.01         | 0.40         | 0.00         | 1.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.13         | 0.40         | 0.21         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.47         | 0.26         | 0.01         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 14  | LTE 7<br>+<br>WLAN (NII)<br>+<br>BT (DSS)  | Body                  | Rear Face        | 0.38         | 0.50         | 0.03         | 0.91             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Left Side        | 1.01         | 0.40         | 0.00         | 1.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.13         | 0.40         | 0.21         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.47         | 0.57         | 0.01         | 1.05             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 15  | LTE 12<br>+<br>WLAN (DTS)<br>+<br>BT (DSS) | Body                  | Rear Face        | 1.08         | 0.79         | 0.03         | 1.90             | <b>Analyzed<br/>as below</b>        |
|     |                                            |                       | Left Side        | 0.08         | 0.40         | 0.00         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 1.04         | 0.26         | 0.01         | 1.31             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 16  | LTE 12<br>+<br>WLAN (NII)<br>+<br>BT (DSS) | Body                  | Rear Face        | 1.08         | 0.50         | 0.03         | 1.61             | <b>Analyzed<br/>as below</b>        |
|     |                                            |                       | Left Side        | 0.08         | 0.40         | 0.00         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 1.04         | 0.57         | 0.01         | 1.62             | <b>Analyzed<br/>as below</b>        |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)     | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|--------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 17  | LTE 13<br>+<br>WLAN (DTS)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.86         | 0.79         | 0.03         | 1.68             | <b>Analyzed<br/>as below</b>        |
|     |                                            |                       | Left Side        | 0.18         | 0.40         | 0.00         | 0.58             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.73         | 0.26         | 0.01         | 1.00             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 18  | LTE 13<br>+<br>WLAN (NII)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.86         | 0.50         | 0.03         | 1.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Left Side        | 0.18         | 0.40         | 0.00         | 0.58             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.73         | 0.57         | 0.01         | 1.31             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 19  | LTE 25<br>+<br>WLAN (DTS)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.64         | 0.79         | 0.03         | 1.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Left Side        | 0.85         | 0.40         | 0.00         | 1.25             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.09         | 0.40         | 0.21         | 0.70             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 1.11         | 0.26         | 0.01         | 1.38             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 20  | LTE 25<br>+<br>WLAN (NII)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.64         | 0.50         | 0.03         | 1.17             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Left Side        | 0.85         | 0.40         | 0.00         | 1.25             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.09         | 0.40         | 0.21         | 0.70             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 1.11         | 0.57         | 0.01         | 1.69             | <b>Analyzed<br/>as below</b>        |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 21  | LTE 26<br>+<br>WLAN (DTS)<br>+<br>BT (DSS) | Body                  | Rear Face        | 1.09         | 0.79         | 0.03         | 1.91             | <b>Analyzed<br/>as below</b>        |
|     |                                            |                       | Left Side        | 0.27         | 0.40         | 0.00         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.77         | 0.26         | 0.01         | 1.04             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 22  | LTE 26<br>+<br>WLAN (NII)<br>+<br>BT (DSS) | Body                  | Rear Face        | 1.09         | 0.50         | 0.03         | 1.62             | <b>Analyzed<br/>as below</b>        |
|     |                                            |                       | Left Side        | 0.27         | 0.40         | 0.00         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.77         | 0.57         | 0.01         | 1.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |

## FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)     | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|--------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 23  | LTE 41<br>+<br>WLAN (DTS)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.18         | 0.79         | 0.03         | 1.00             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Left Side        | 0.45         | 0.40         | 0.00         | 0.85             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.21         | 0.26         | 0.01         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
| 24  | LTE 41<br>+<br>WLAN (NII)<br>+<br>BT (DSS) | Body                  | Rear Face        | 0.18         | 0.50         | 0.03         | 0.71             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Left Side        | 0.45         | 0.40         | 0.00         | 0.85             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Right Side       | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Top Side         | 0.21         | 0.57         | 0.01         | 0.79             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                            |                       | Bottom Side      | 0.00         | 0.40         | 0.21         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |

### <SAR to Peak Location Separation Ratio Analysis>

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

The SPLSR is determined by the following formula.


$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$

Where  $\text{SAR}_1$  and  $\text{SAR}_2$  are the highest reported or estimated SAR for each antenna in the pair, and  $R_i$  is the separation distance between the peak SAR locations for the antenna pair in mm.


When the SPLSR is  $\leq 0.04$ , the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

# FCC SAR Test Report

| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA II Ch9262    | Body               | Top Side      | 1.30             | 5           | -79.1 | -0.04 | 103.8                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| 802.11ac VH80 Ch58 |                    |               | 0.57             | -0.5        | 24.5  | -2.89 |                                                         |       |                                    |

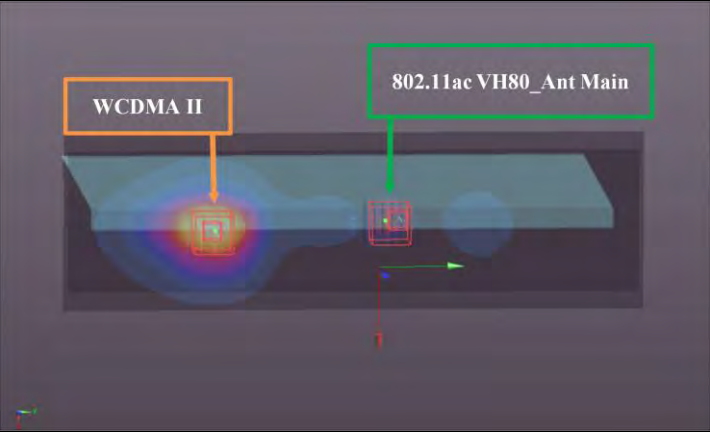


| Conditions      | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                 |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA II Ch9262 | Body               | Top Side      | 1.30             | 5           | -79.1 | -0.04 | 174.0                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT Ch78         |                    |               | 0.01             | 1.6         | 94.8  | -3.24 |                                                         |       |                                    |

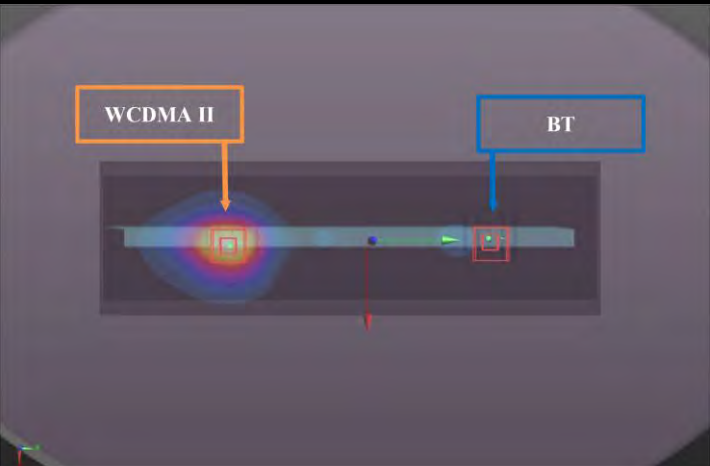


# FCC SAR Test Report

| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11ac VH80 Ch58 | Body               | Top Side      | 0.57             | -0.5        | 24.5 | -2.89 | 70.3                                                    | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT Ch78            |                    |               | 0.01             | 1.6         | 94.8 | -3.24 |                                                         |       |                                    |

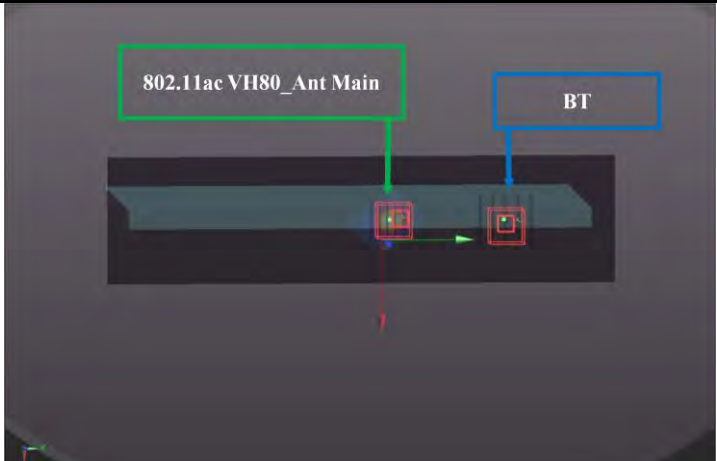


| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA V Ch4233 | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81  | 111.5                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| 802.11b Ch6    |                    |               | 0.79             | 91.4        | 25.9  | -1.61 |                                                         |       |                                    |

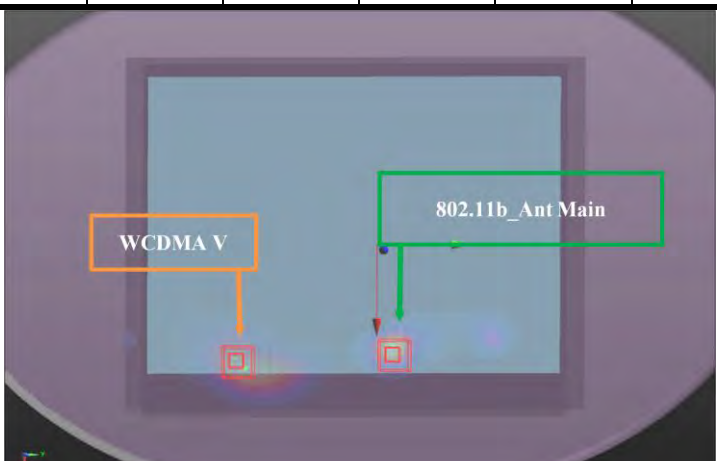




# FCC SAR Test Report

| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA V Ch4233 | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81  | 185.5                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT Ch78        |                    |               | 0.03             | 93          | 100   | -1.05 |                                                         |       |                                    |

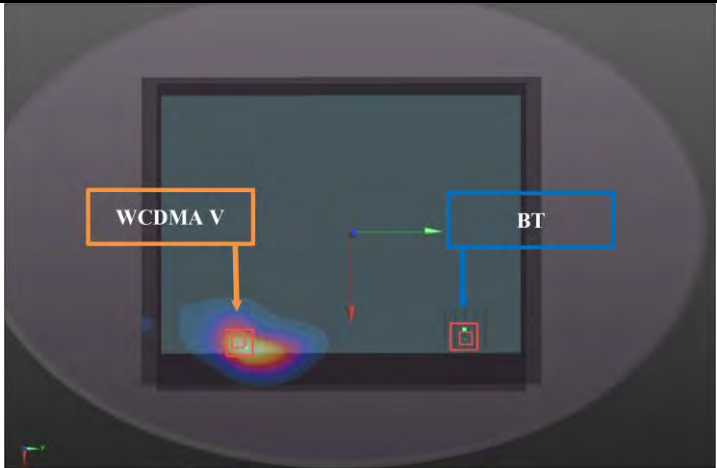


| Conditions  | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|             |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11b Ch6 | Body               | Rear Face     | 0.79             | 91.4        | 25.9 | -1.61 | 74.1                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78     |                    |               | 0.03             | 93          | 100  | -1.05 |                                                         |       |                                    |

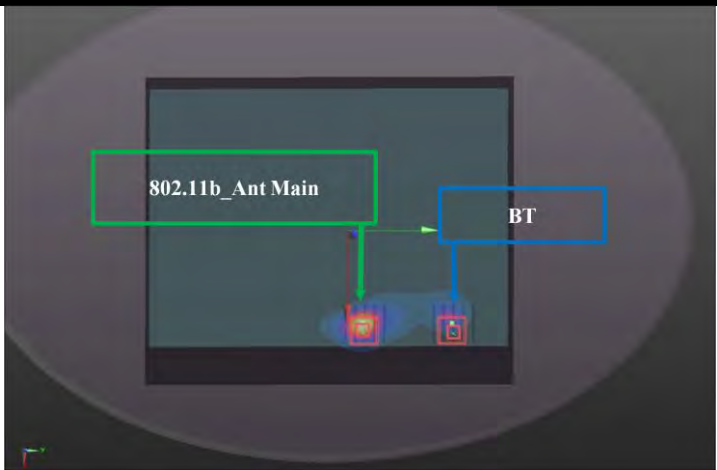

# FCC SAR Test Report


| Conditions            | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                       |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 2 QPSK20M Ch18900 | Body               | Top Side      | 1.15             | -2.5        | -79.1 | 0.75  | 103.6                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| 802.11ac VH80 Ch58    |                    |               | 0.57             | -0.5        | 24.5  | -2.89 |                                                         |       |                                    |

| Conditions            | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                       |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 2 QPSK20M Ch18900 | Body               | Top Side      | 1.15             | -2.5        | -79.1 | 0.75  | 174.0                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT Ch78               |                    |               | 0.01             | 1.6         | 94.8  | -3.24 |                                                         |       |                                    |

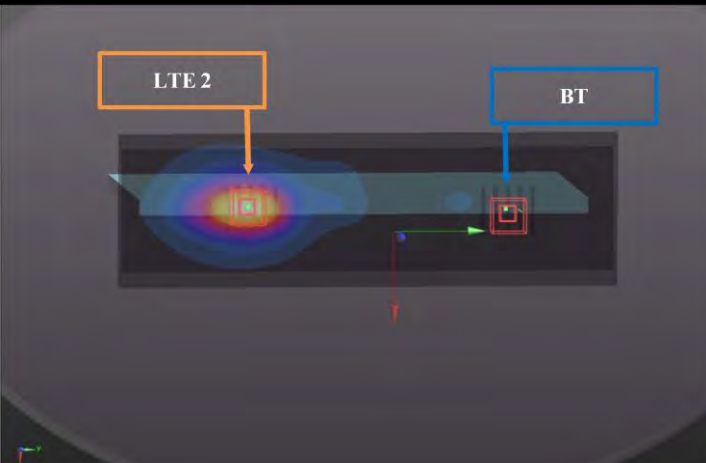


# FCC SAR Test Report

| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11ac VH80 Ch58 | Body               | Top Side      | 0.57             | -0.5        | 24.5 | -2.89 | 70.3                                                    | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT Ch78            |                    |               | 0.01             | 1.6         | 94.8 | -3.24 |                                                         |       |                                    |

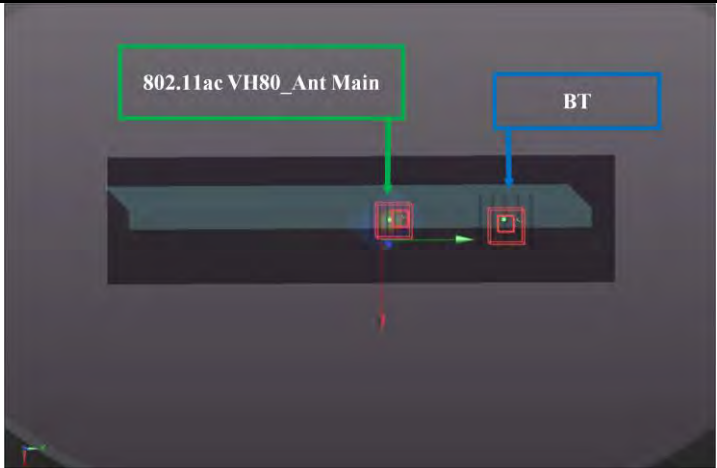


| Conditions            | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                       |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 5 QPSK10M Ch20450 | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39  | 110.6                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| 802.11b Ch6           |                    |               | 0.79             | 91.4        | 25.9  | -1.61 |                                                         |       |                                    |

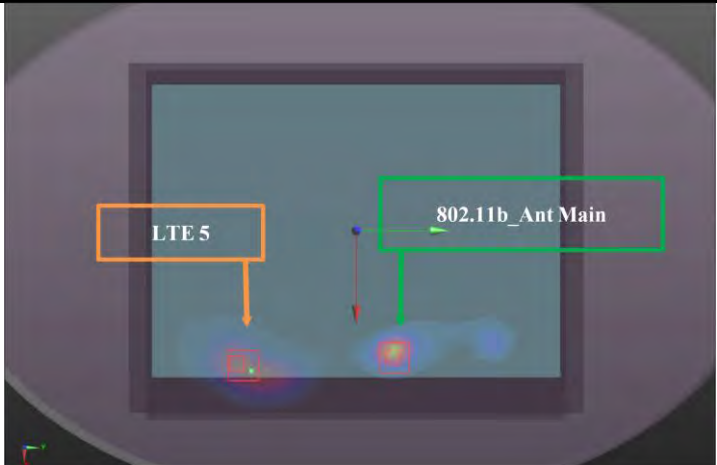


# FCC SAR Test Report

| Conditions            | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                       |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 5 QPSK10M Ch20450 | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39  | 184.6                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT Ch78               |                    |               | 0.03             | 93          | 100   | -1.05 |                                                         |       |                                    |

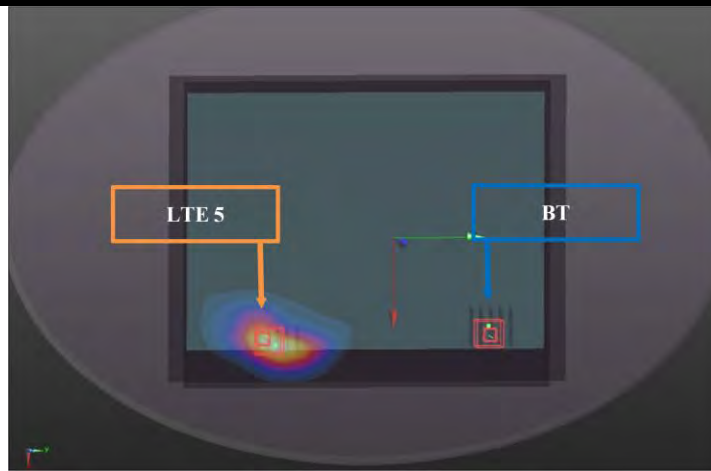


| Conditions  | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|             |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11b Ch6 | Body               | Rear Face     | 0.79             | 91.4        | 25.9 | -1.61 | 74.1                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78     |                    |               | 0.03             | 93          | 100  | -1.05 |                                                         |       |                                    |

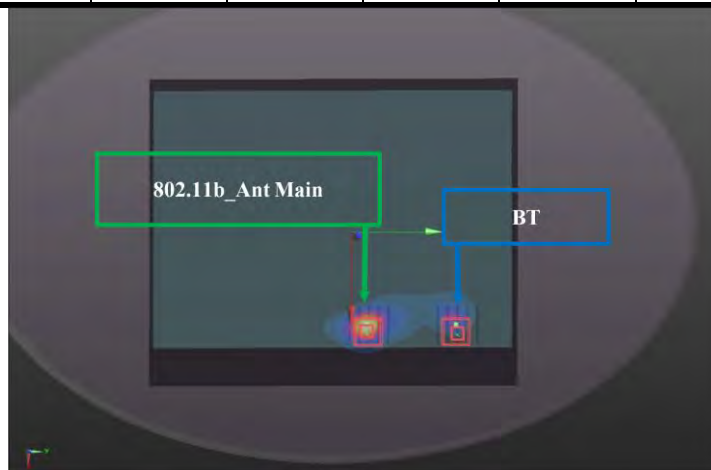


# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 QPSK10M Ch23095 | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 99.8                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| 802.11b Ch6            |                    |               | 0.79             | 91.4        | 25.9  | -1.61 |                                                         |       |                                    |

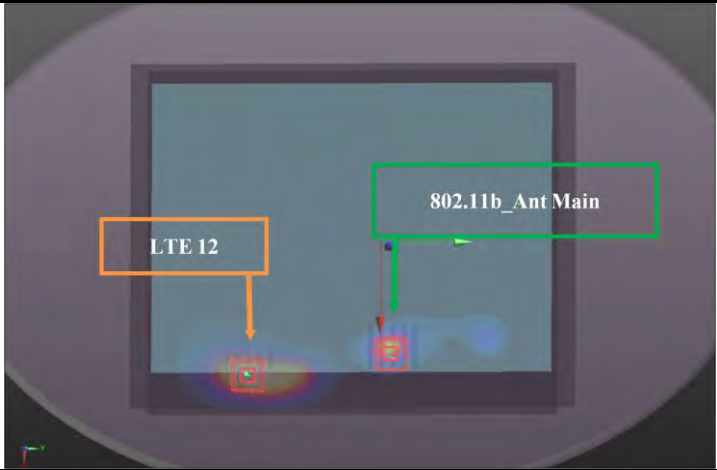


| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 QPSK10M Ch23095 | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 173.2                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78                |                    |               | 0.03             | 93          | 100   | -1.05 |                                                         |       |                                    |

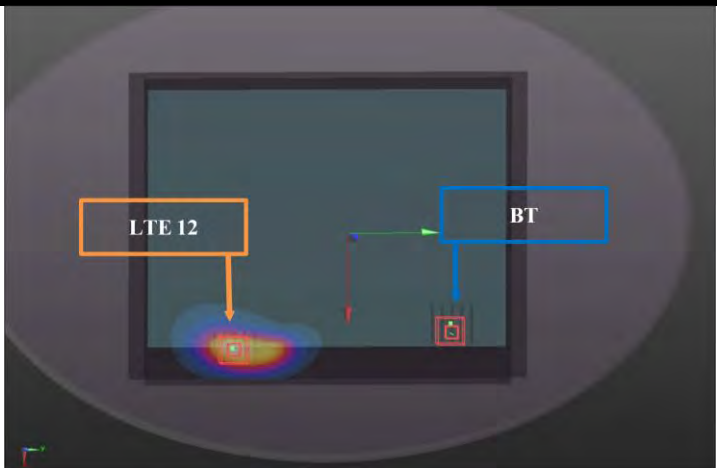


# FCC SAR Test Report

| Conditions  | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|             |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11b Ch6 | Body               | Rear Face     | 0.79             | 91.4        | 25.9 | -1.61 | 74.1                                                    | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT Ch78     |                    |               | 0.03             | 93          | 100  | -1.05 |                                                         |       |                                    |

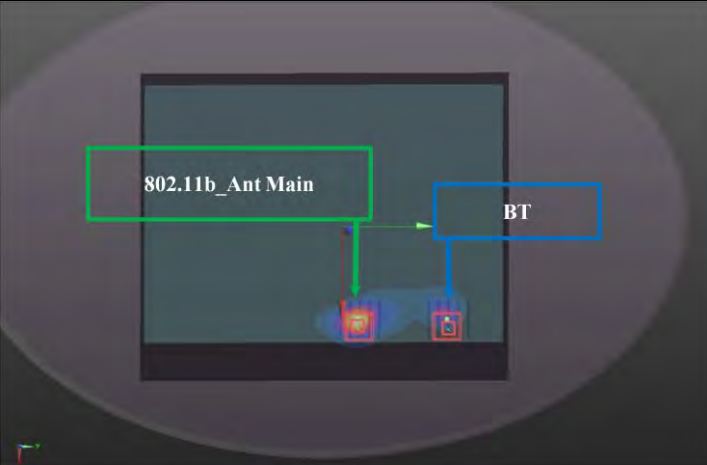


| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 QPSK10M Ch23095 | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 91.3                                                    | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| 802.11ac VH80 Ch158    |                    |               | 0.5              | 93          | 17.5  | 2.81  |                                                         |       |                                    |

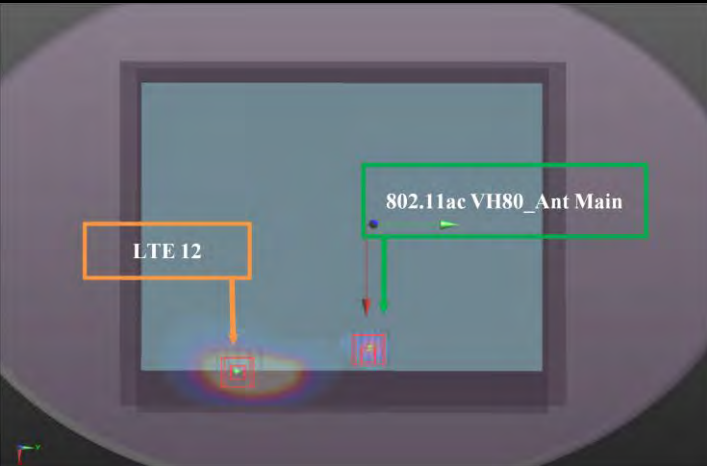


# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 QPSK10M Ch23095 | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 173.2                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78                |                    |               | 0.03             | 93          | 100   | -1.05 |                                                         |       |                                    |

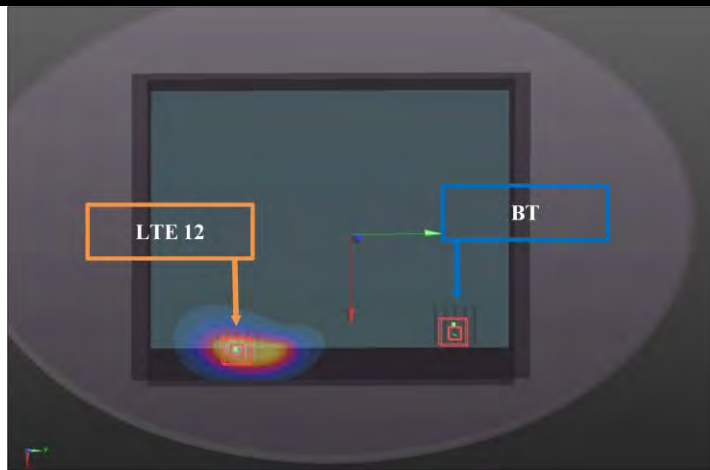


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11ac VH80 Ch158 | Body               | Rear Face     | 0.5              | 93          | 17.5 | 2.81  | 82.6                                                    | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT Ch78             |                    |               | 0.03             | 93          | 100  | -1.05 |                                                         |       |                                    |

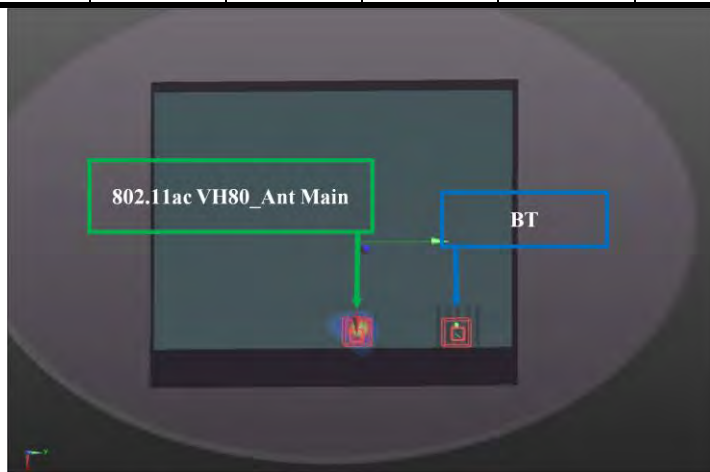




# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 12 QPSK10M Ch23095 | Body               | Top Side      | 1.04             | 4.1         | -70  | -4.22 | 94.6                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| 802.11ac VH80 Ch58     |                    |               | 0.57             | -0.5        | 24.5 | -2.89 |                                                         |       |                                    |

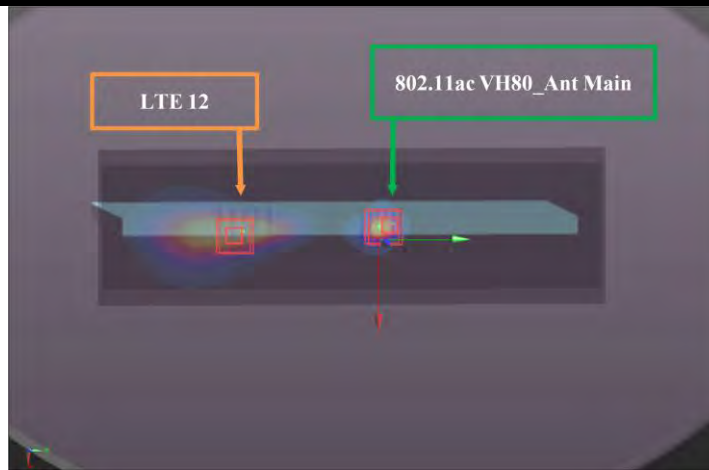


| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 12 QPSK10M Ch23095 | Body               | Top Side      | 1.04             | 4.1         | -70  | -4.22 | 164.8                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78                |                    |               | 0.01             | 1.6         | 94.8 | -3.24 |                                                         |       |                                    |

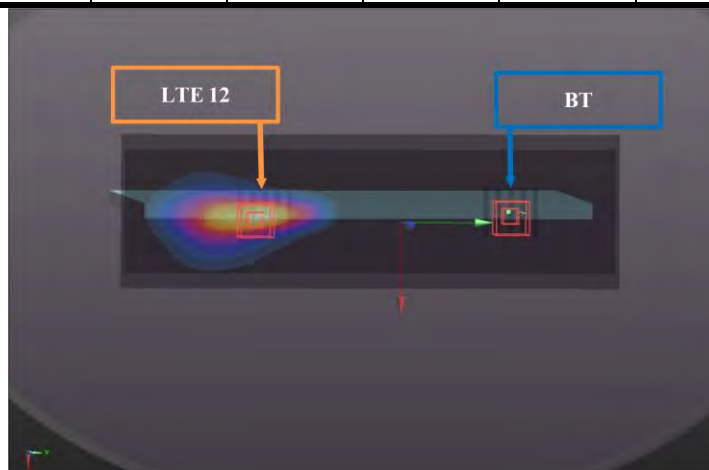




# FCC SAR Test Report

| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11ac VH80 Ch58 | Body               | Top Side      | 0.57             | -0.5        | 24.5 | -2.89 | 70.3                                                    | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT Ch78            |                    |               | 0.01             | 1.6         | 94.8 | -3.24 |                                                         |       |                                    |

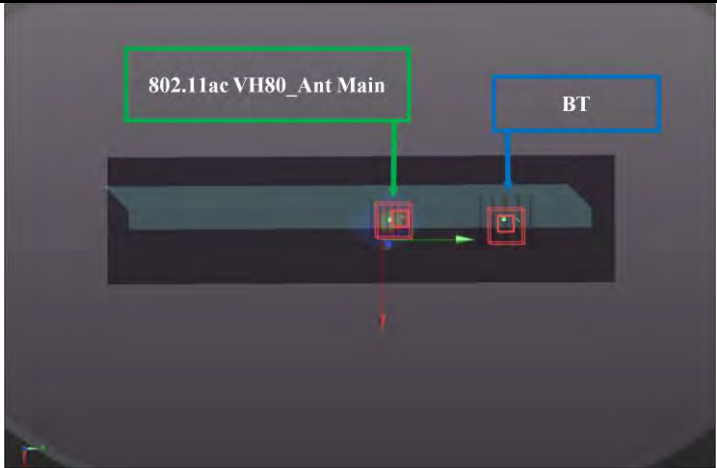


| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 13 QPSK20M Ch23230 | Body               | Rear Face     | 0.86             | 108.2       | -59  | -1.4  | 86.5                                                    | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| 802.11b Ch6            |                    |               | 0.79             | 91.4        | 25.9 | -1.61 |                                                         |       |                                    |

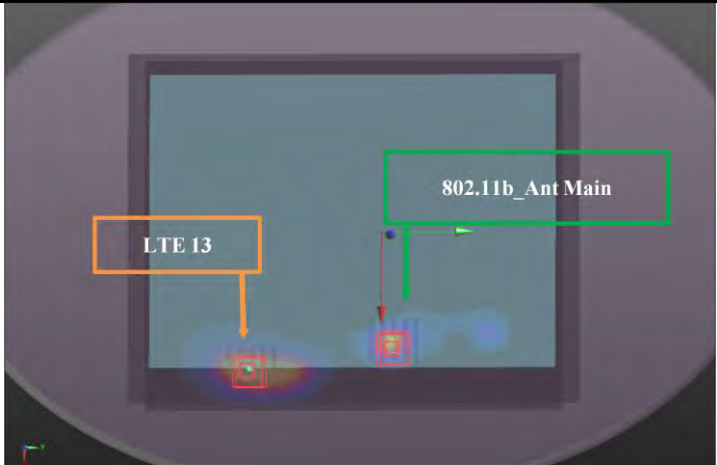


# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-----|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y   | z     |                                                         |       |                                    |
| LTE 13 QPSK20M Ch23230 | Body               | Rear Face     | 0.86             | 108.2       | -59 | -1.4  | 159.7                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78                |                    |               | 0.03             | 93          | 100 | -1.05 |                                                         |       |                                    |

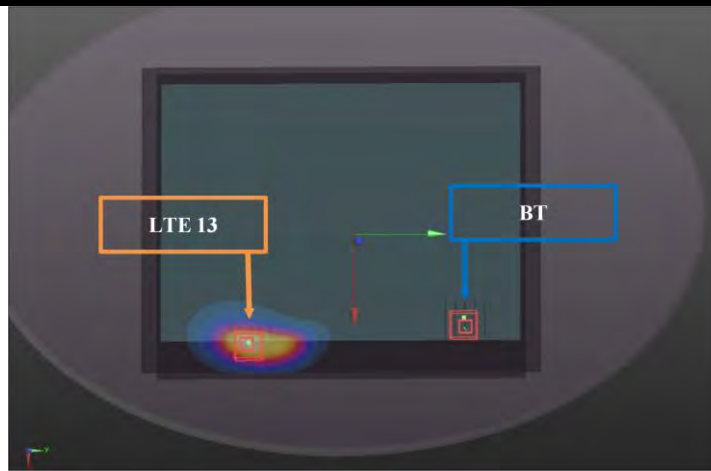


| Conditions  | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|             |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11b Ch6 | Body               | Rear Face     | 0.79             | 91.4        | 25.9 | -1.61 | 74.1                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78     |                    |               | 0.03             | 93          | 100  | -1.05 |                                                         |       |                                    |

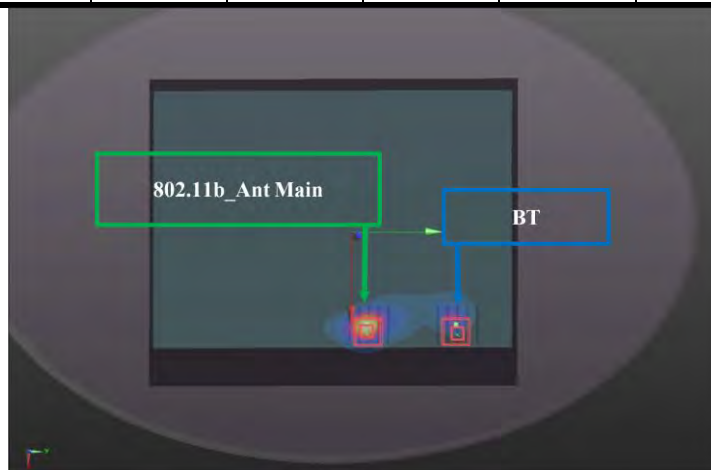


# FCC SAR Test Report

| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 25 ch26140     | Body               | Top Side      | 1.11             | -8          | -74  | -0.98 | 98.8                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| 802.11ac ch58 Ant0 |                    |               | 0.57             | -0.5        | 24.5 | -2.89 |                                                         |       |                                    |

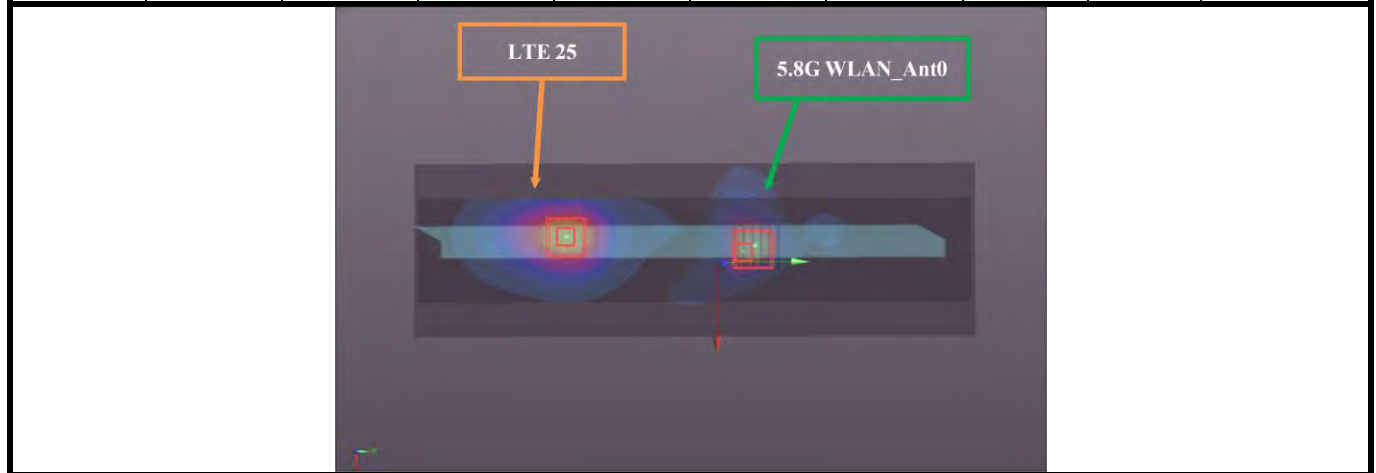


| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 25 ch26140 | Body               | Top Side      | 1.11             | -8          | -74  | -0.98 | 169.1                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78        |                    |               | 0.01             | 1.6         | 94.8 | -3.24 |                                                         |       |                                    |

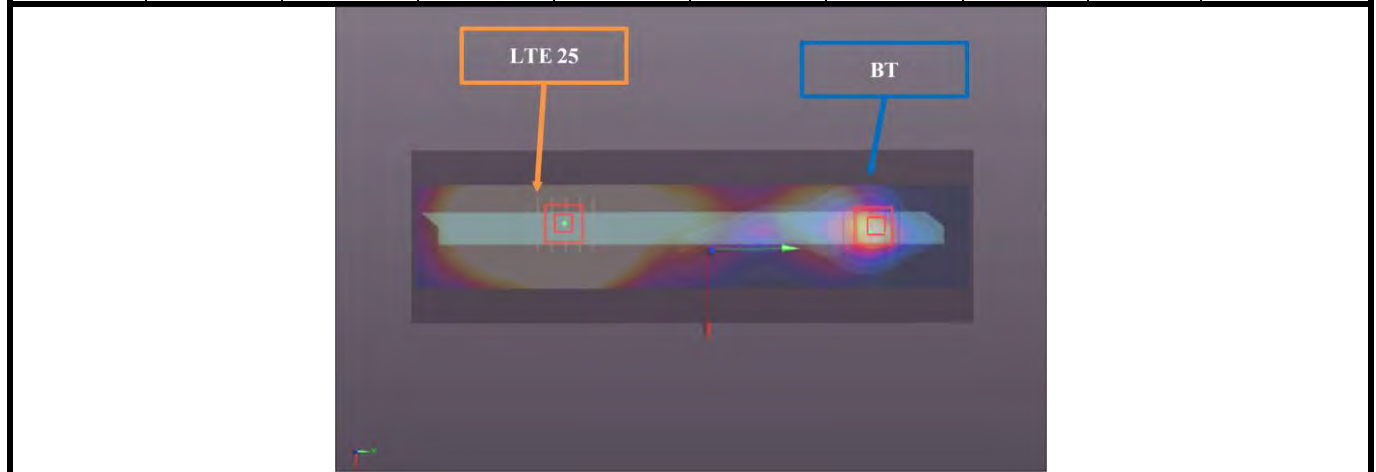


# FCC SAR Test Report

| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11ac ch58 Ant0 | Body               | Top Side      | 0.57             | -0.5        | 24.5 | -2.89 | 70.3                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78            |                    |               | 0.01             | 1.6         | 94.8 | -3.24 |                                                         |       |                                    |

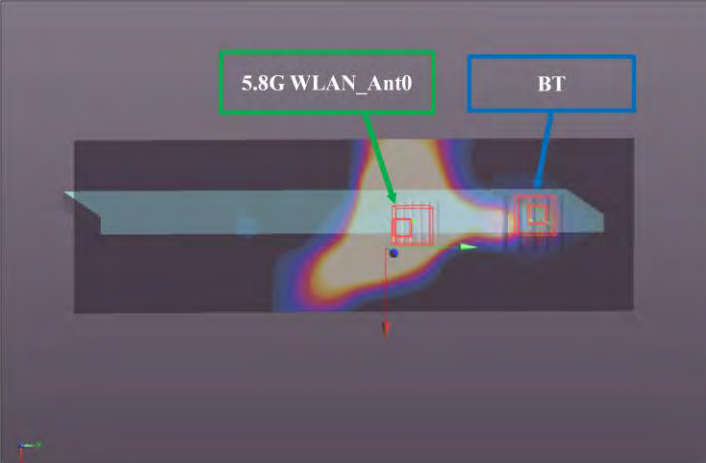


| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 26 QPSK15M Ch26765 | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23  | 112.4                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| 802.11b Ch6            |                    |               | 0.79             | 91.4        | 25.9  | -1.61 |                                                         |       |                                    |

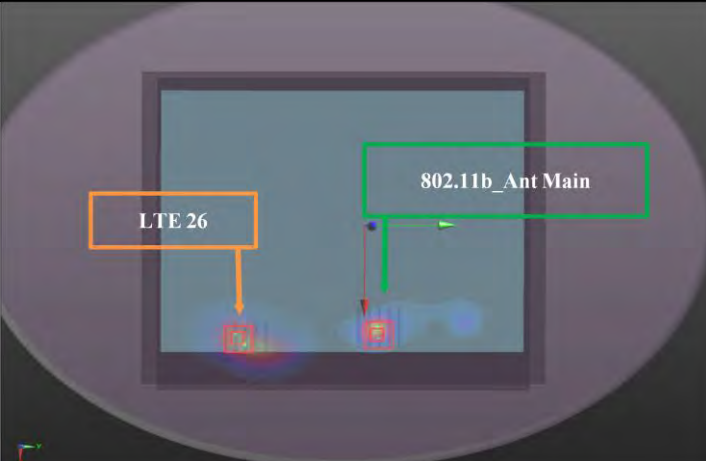


# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 26 QPSK15M Ch26765 | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23  | 186.4                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78                |                    |               | 0.03             | 93          | 100   | -1.05 |                                                         |       |                                    |

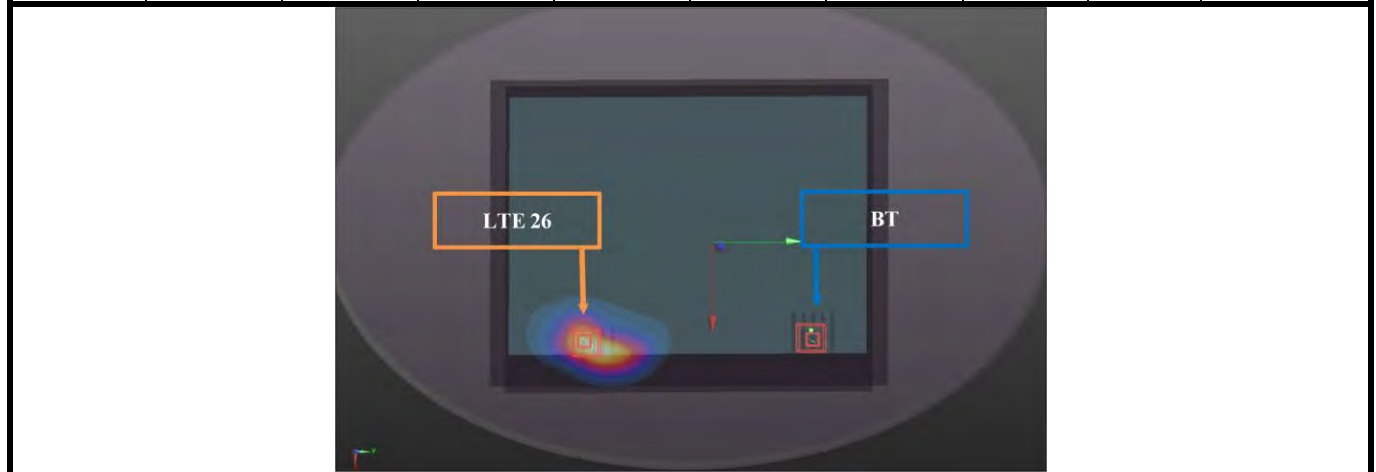

| Conditions  | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|             |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11b Ch6 | Body               | Rear Face     | 0.79             | 91.4        | 25.9 | -1.61 | 74.1                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78     |                    |               | 0.03             | 93          | 100  | -1.05 |                                                         |       |                                    |

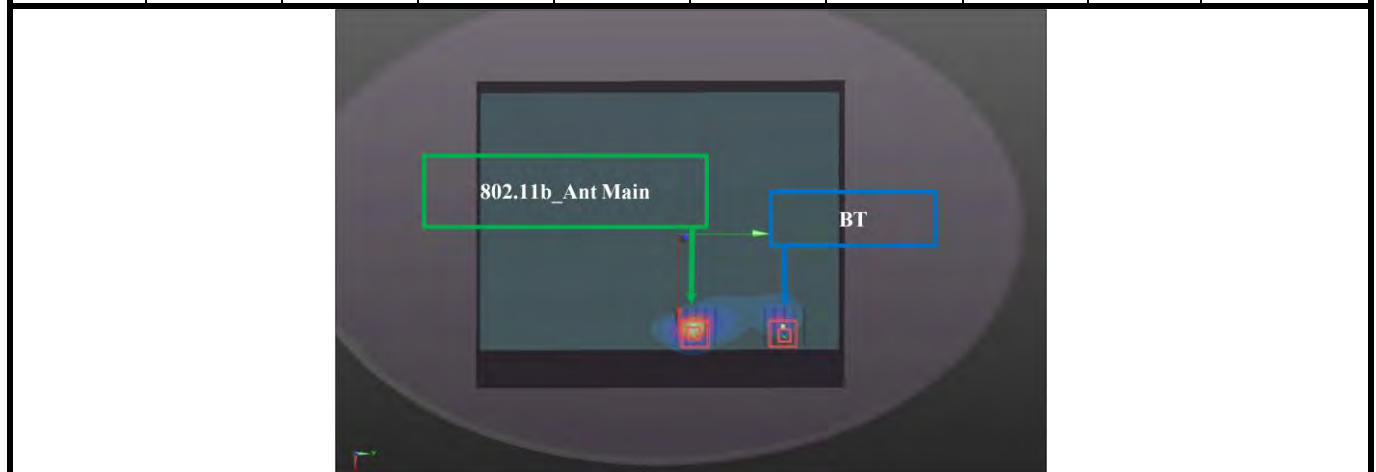


# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 26 QPSK15M Ch26765 | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23 | 103.9                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| 802.11ac VH80 Ch158    |                    |               | 0.5              | 93          | 17.5  | 2.81 |                                                         |       |                                    |




| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 26 QPSK15M Ch26765 | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23  | 186.4                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch78                |                    |               | 0.03             | 93          | 100   | -1.05 |                                                         |       |                                    |

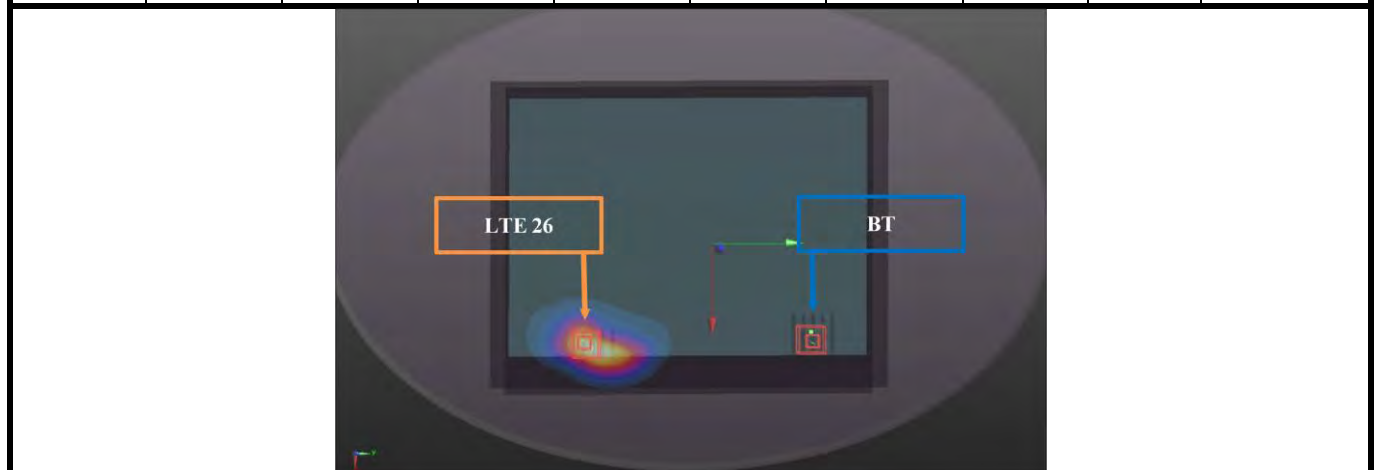

# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| 802.11ac<br>VH80 Ch158 | Body               | Rear Face     | 0.5              | 93          | 17.5 | 2.81  | 82.6                                                    | 0.00  | SPLSR ≤ 0.04,<br>Not required      |
| BT Ch78                |                    |               | 0.03             | 93          | 100  | -1.05 |                                                         |       |                                    |

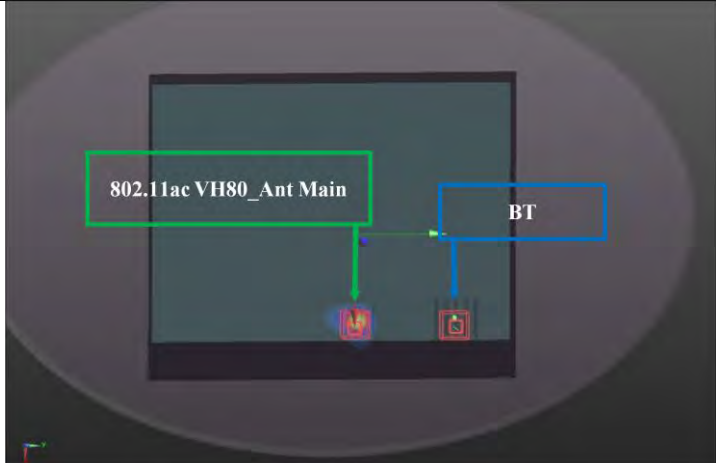

The diagram illustrates the SAR test setup for a smartphone. A green box labeled "802.11ac VH80\_Ant Main" is connected to a red antenna icon on the phone. A blue box labeled "BT" is connected to a blue antenna icon on the phone. The phone is shown in a dark environment with a circular light field around it.

# FCC SAR Test Report

## WWAN + WLAN 2 :

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                         | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|----------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 1   | WCDMA II<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.66         | 0.70         | 0.51         | 1.87             | <b>Analyzed<br/>as below</b>        |
|     |                                                                |                       | Left Side        | 1.00         | 0.00         | 0.40         | 1.40             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Right Side       | 0.11         | 0.40         | 0.11         | 0.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Top Side         | 1.30         | 0.17         | 0.08         | 1.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 2   | WCDMA II<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.66         | 1.06         | 0.99         | 2.71             | <b>Analyzed<br/>as below</b>        |
|     |                                                                |                       | Left Side        | 1.00         | 0.00         | 0.40         | 1.40             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Right Side       | 0.11         | 0.40         | 0.24         | 0.75             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Top Side         | 1.30         | 0.85         | 1.45         | 3.60             | <b>Analyzed<br/>as below</b>        |
|     |                                                                |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 3   | WCDMA II<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.66         | 0.70         | 0.18         | 1.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Left Side        | 1.00         | 0.00         | 0.00         | 1.00             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Right Side       | 0.11         | 0.40         | 0.03         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Top Side         | 1.30         | 0.17         | 0.07         | 1.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 4   | WCDMA II<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.66         | 1.06         | 0.18         | 1.90             | <b>Analyzed<br/>as below</b>        |
|     |                                                                |                       | Left Side        | 1.00         | 0.00         | 0.00         | 1.00             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Right Side       | 0.11         | 0.40         | 0.03         | 0.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Top Side         | 1.30         | 0.85         | 0.07         | 2.22             | <b>Analyzed<br/>as below</b>        |
|     |                                                                |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |



# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                         | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|----------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 5   | WCDMA IV<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.60         | 0.70         | 0.51         | 1.81             | <b>Analyzed<br/>as below</b>        |
|     |                                                                |                       | Left Side        | 0.80         | 0.00         | 0.40         | 1.20             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Right Side       | 0.24         | 0.40         | 0.11         | 0.75             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Top Side         | 0.56         | 0.17         | 0.08         | 0.81             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 6   | WCDMA IV<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.60         | 1.06         | 0.99         | 2.65             | <b>Analyzed<br/>as below</b>        |
|     |                                                                |                       | Left Side        | 0.80         | 0.00         | 0.40         | 1.20             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Right Side       | 0.24         | 0.40         | 0.24         | 0.88             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Top Side         | 0.56         | 0.85         | 1.45         | 2.86             | <b>Analyzed<br/>as below</b>        |
|     |                                                                |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 7   | WCDMA IV<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.60         | 0.70         | 0.18         | 1.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Left Side        | 0.80         | 0.00         | 0.00         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Right Side       | 0.24         | 0.40         | 0.03         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Top Side         | 0.56         | 0.17         | 0.07         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 8   | WCDMA IV<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.60         | 1.06         | 0.18         | 1.84             | <b>Analyzed<br/>as below</b>        |
|     |                                                                |                       | Left Side        | 0.80         | 0.00         | 0.00         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Right Side       | 0.24         | 0.40         | 0.03         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Top Side         | 0.56         | 0.85         | 0.07         | 1.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                                |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                        | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|---------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 9   | WCDMA V<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.79         | 0.70         | 0.51         | 2.00             | <b>Analyzed<br/>as below</b>        |
|     |                                                               |                       | Left Side        | 0.39         | 0.00         | 0.40         | 0.79             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Right Side       | 0.01         | 0.40         | 0.11         | 0.52             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Top Side         | 0.62         | 0.17         | 0.08         | 0.87             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 10  | WCDMA V<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.79         | 1.06         | 0.99         | 2.84             | <b>Analyzed<br/>as below</b>        |
|     |                                                               |                       | Left Side        | 0.39         | 0.00         | 0.40         | 0.79             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Right Side       | 0.01         | 0.40         | 0.24         | 0.65             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Top Side         | 0.62         | 0.85         | 1.45         | 2.92             | <b>Analyzed<br/>as below</b>        |
|     |                                                               |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 11  | WCDMA V<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.79         | 0.70         | 0.18         | 1.67             | <b>Analyzed<br/>as below</b>        |
|     |                                                               |                       | Left Side        | 0.39         | 0.00         | 0.00         | 0.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Right Side       | 0.01         | 0.40         | 0.03         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Top Side         | 0.62         | 0.17         | 0.07         | 0.86             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 12  | WCDMA V<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.79         | 1.06         | 0.18         | 2.03             | <b>Analyzed<br/>as below</b>        |
|     |                                                               |                       | Left Side        | 0.39         | 0.00         | 0.00         | 0.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Right Side       | 0.01         | 0.40         | 0.03         | 0.44             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Top Side         | 0.62         | 0.85         | 0.07         | 1.54             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                               |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                      | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 13  | LTE 2<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.65         | 0.70         | 0.51         | 1.86             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.81         | 0.00         | 0.40         | 1.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.10         | 0.40         | 0.11         | 0.61             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 1.15         | 0.17         | 0.08         | 1.40             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 14  | LTE 2<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.65         | 1.06         | 0.99         | 2.70             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.81         | 0.00         | 0.40         | 1.21             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.10         | 0.40         | 0.24         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 1.15         | 0.85         | 1.45         | 3.45             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 15  | LTE 2<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.65         | 0.70         | 0.18         | 1.53             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Left Side        | 0.81         | 0.00         | 0.00         | 0.81             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.10         | 0.40         | 0.03         | 0.53             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 1.15         | 0.17         | 0.07         | 1.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 16  | LTE 2<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.65         | 1.06         | 0.18         | 1.89             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.81         | 0.00         | 0.00         | 0.81             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.10         | 0.40         | 0.03         | 0.53             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 1.15         | 0.85         | 0.07         | 2.07             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                      | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 17  | LTE 4<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.53         | 0.70         | 0.51         | 1.74             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.66         | 0.00         | 0.40         | 1.06             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.19         | 0.40         | 0.11         | 0.70             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.49         | 0.17         | 0.08         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 18  | LTE 4<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.53         | 1.06         | 0.99         | 2.58             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.66         | 0.00         | 0.40         | 1.06             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.19         | 0.40         | 0.24         | 0.83             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.49         | 0.85         | 1.45         | 2.79             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 19  | LTE 4<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.53         | 0.70         | 0.18         | 1.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Left Side        | 0.66         | 0.00         | 0.00         | 0.66             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.19         | 0.40         | 0.03         | 0.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.49         | 0.17         | 0.07         | 0.73             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 20  | LTE 4<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.53         | 1.06         | 0.18         | 1.77             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.66         | 0.00         | 0.00         | 0.66             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.19         | 0.40         | 0.03         | 0.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.49         | 0.85         | 0.07         | 1.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                      | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 21  | LTE 5<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.84         | 0.70         | 0.51         | 2.05             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.34         | 0.00         | 0.40         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.00         | 0.40         | 0.11         | 0.51             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.63         | 0.17         | 0.08         | 0.88             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.02         | 0.40         | 0.40         | 0.82             | $\Sigma$ SAR < 1.6,<br>Not required |
| 22  | LTE 5<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.84         | 1.06         | 0.99         | 2.89             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.34         | 0.00         | 0.40         | 0.74             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.00         | 0.40         | 0.24         | 0.64             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.63         | 0.85         | 1.45         | 2.93             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Bottom Side      | 0.02         | 0.40         | 0.40         | 0.82             | $\Sigma$ SAR < 1.6,<br>Not required |
| 23  | LTE 5<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.84         | 0.70         | 0.18         | 1.72             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.34         | 0.00         | 0.00         | 0.34             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.63         | 0.17         | 0.07         | 0.87             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.02         | 0.40         | 0.40         | 0.82             | $\Sigma$ SAR < 1.6,<br>Not required |
| 24  | LTE 5<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.84         | 1.06         | 0.18         | 2.08             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 0.34         | 0.00         | 0.00         | 0.34             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.63         | 0.85         | 0.07         | 1.55             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.02         | 0.40         | 0.40         | 0.82             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                      | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|-------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 25  | LTE 7<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.38         | 0.70         | 0.51         | 1.59             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Left Side        | 1.01         | 0.00         | 0.40         | 1.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.13         | 0.40         | 0.11         | 0.64             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.47         | 0.17         | 0.08         | 0.72             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 26  | LTE 7<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.38         | 1.06         | 0.99         | 2.43             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Left Side        | 1.01         | 0.00         | 0.40         | 1.41             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.13         | 0.40         | 0.24         | 0.77             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.47         | 0.85         | 1.45         | 2.77             | <b>Analyzed<br/>as below</b>        |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 27  | LTE 7<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.38         | 0.70         | 0.18         | 1.26             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Left Side        | 1.01         | 0.00         | 0.00         | 1.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.13         | 0.40         | 0.03         | 0.56             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.47         | 0.17         | 0.07         | 0.71             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 28  | LTE 7<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.38         | 1.06         | 0.18         | 1.62             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Left Side        | 1.01         | 0.00         | 0.00         | 1.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Right Side       | 0.13         | 0.40         | 0.03         | 0.56             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Top Side         | 0.47         | 0.85         | 0.07         | 1.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                             |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                       | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|--------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 29  | LTE 12<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 1.08         | 0.70         | 0.51         | 2.29             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.08         | 0.00         | 0.40         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.11         | 0.51             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 1.04         | 0.17         | 0.08         | 1.29             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 30  | LTE 12<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 1.08         | 1.06         | 0.99         | 3.13             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.08         | 0.00         | 0.40         | 0.48             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.24         | 0.64             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 1.04         | 0.85         | 1.45         | 3.34             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 31  | LTE 12<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 1.08         | 0.70         | 0.18         | 1.96             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.08         | 0.00         | 0.00         | 0.08             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 1.04         | 0.17         | 0.07         | 1.28             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 32  | LTE 12<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 1.08         | 1.06         | 0.18         | 2.32             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.08         | 0.00         | 0.00         | 0.08             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 1.04         | 0.85         | 0.07         | 1.96             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                       | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|--------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 33  | LTE 13<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.86         | 0.70         | 0.51         | 2.07             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.18         | 0.00         | 0.40         | 0.58             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.11         | 0.51             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.73         | 0.17         | 0.08         | 0.98             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 34  | LTE 13<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.86         | 1.06         | 0.99         | 2.91             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.18         | 0.00         | 0.40         | 0.58             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.24         | 0.64             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.73         | 0.85         | 1.45         | 3.03             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 35  | LTE 13<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.86         | 0.70         | 0.18         | 1.74             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.18         | 0.00         | 0.00         | 0.18             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.73         | 0.17         | 0.07         | 0.97             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 36  | LTE 13<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.86         | 1.06         | 0.18         | 2.10             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.18         | 0.00         | 0.00         | 0.18             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.73         | 0.85         | 0.07         | 1.65             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |



# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                       | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|--------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 37  | LTE 25<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.64         | 0.70         | 0.51         | 1.85             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.85         | 0.00         | 0.40         | 1.25             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.09         | 0.40         | 0.11         | 0.60             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 1.11         | 0.17         | 0.08         | 1.36             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 38  | LTE 25<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.64         | 1.06         | 0.99         | 2.69             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.85         | 0.00         | 0.40         | 1.25             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.09         | 0.40         | 0.24         | 0.73             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 1.11         | 0.85         | 1.45         | 3.41             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 39  | LTE 25<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.64         | 0.70         | 0.18         | 1.52             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Left Side        | 0.85         | 0.00         | 0.00         | 0.85             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.09         | 0.40         | 0.03         | 0.52             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 1.11         | 0.17         | 0.07         | 1.35             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 40  | LTE 25<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.64         | 1.06         | 0.18         | 1.88             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.85         | 0.00         | 0.00         | 0.85             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.09         | 0.40         | 0.03         | 0.52             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 1.11         | 0.85         | 0.07         | 2.03             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                       | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|--------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 41  | LTE 26<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 1.09         | 0.70         | 0.51         | 2.30             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.27         | 0.00         | 0.40         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.11         | 0.51             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.77         | 0.17         | 0.08         | 1.02             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 42  | LTE 26<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 1.09         | 1.06         | 0.99         | 3.14             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.27         | 0.00         | 0.40         | 0.67             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.24         | 0.64             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.77         | 0.85         | 1.45         | 3.07             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 43  | LTE 26<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 1.09         | 0.70         | 0.18         | 1.97             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.27         | 0.00         | 0.00         | 0.27             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.77         | 0.17         | 0.07         | 1.01             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 44  | LTE 26<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 1.09         | 1.06         | 0.18         | 2.33             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.27         | 0.00         | 0.00         | 0.27             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.77         | 0.85         | 0.07         | 1.69             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

# FCC SAR Test Report

| No. | Conditions<br>(SAR1 + SAR2<br>+ SAR 3)                       | Exposure<br>Condition | Test<br>Position | Max.<br>SAR1 | Max.<br>SAR2 | Max.<br>SAR3 | SAR<br>Summation | SPLSR<br>Analysis                   |
|-----|--------------------------------------------------------------|-----------------------|------------------|--------------|--------------|--------------|------------------|-------------------------------------|
| 45  | LTE 41<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>WLAN (DTS)<br>Ant1 | Body                  | Rear Face        | 0.18         | 0.70         | 0.51         | 1.39             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Left Side        | 0.45         | 0.00         | 0.40         | 0.85             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.11         | 0.51             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.21         | 0.17         | 0.08         | 0.46             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 46  | LTE 41<br>+<br>WLAN (NII)<br>Ant0<br>+<br>WLAN (NII)<br>Ant1 | Body                  | Rear Face        | 0.18         | 1.06         | 0.99         | 2.23             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Left Side        | 0.45         | 0.00         | 0.40         | 0.85             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.24         | 0.64             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.21         | 0.85         | 1.45         | 2.51             | <b>Analyzed<br/>as below</b>        |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 47  | LTE 41<br>+<br>WLAN (DTS)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.18         | 0.70         | 0.18         | 1.06             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Left Side        | 0.45         | 0.00         | 0.00         | 0.45             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.21         | 0.17         | 0.07         | 0.45             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |
| 48  | LTE 41<br>+<br>WLAN (NII)<br>Ant0<br>+<br>BT (DSS)<br>Ant1   | Body                  | Rear Face        | 0.18         | 1.06         | 0.18         | 1.42             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Left Side        | 0.45         | 0.00         | 0.00         | 0.45             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Right Side       | 0.00         | 0.40         | 0.03         | 0.43             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Top Side         | 0.21         | 0.85         | 0.07         | 1.13             | $\Sigma$ SAR < 1.6,<br>Not required |
|     |                                                              |                       | Bottom Side      | 0.00         | 0.40         | 0.40         | 0.80             | $\Sigma$ SAR < 1.6,<br>Not required |

## FCC SAR Test Report

### <SAR to Peak Location Separation Ratio Analysis>

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.


The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$

Where  $\text{SAR}_1$  and  $\text{SAR}_2$  are the highest reported or estimated SAR for each antenna in the pair, and  $R_i$  is the separation distance between the peak SAR locations for the antenna pair in mm.


When the SPLSR is  $\leq 0.04$ , the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA II Ch9400   | Body               | Rear Face     | 0.66             | 103.2       | -97.1 | 3.13  | 131.8                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

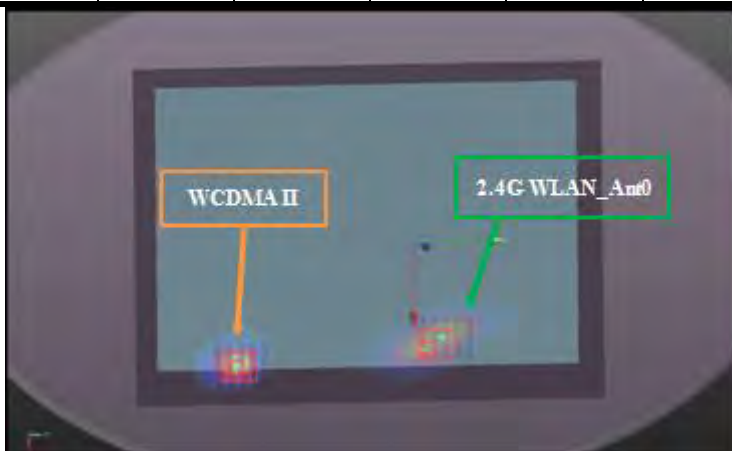


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA II Ch9400   | Body               | Rear Face     | 0.66             | 103.2       | -97.1 | 3.13  | 214.4                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

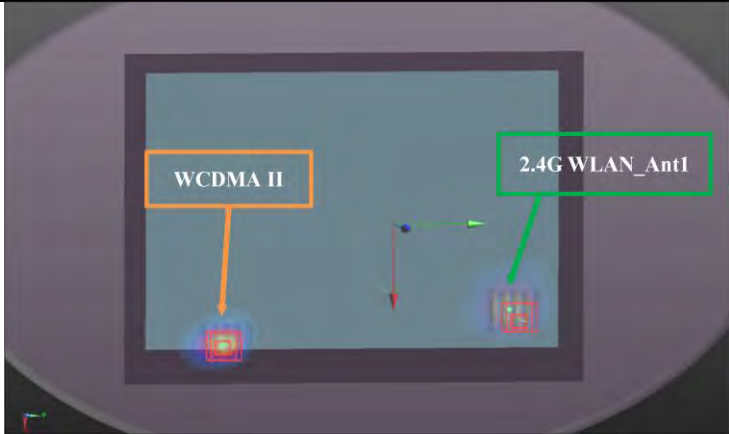


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

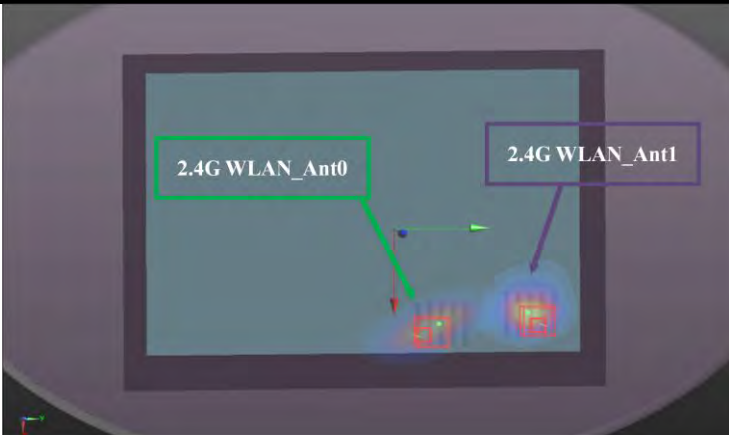


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA II Ch9400     | Body               | Rear Face     | 0.66             | 103.2       | -97.1 | 3.13 | 117.4                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |

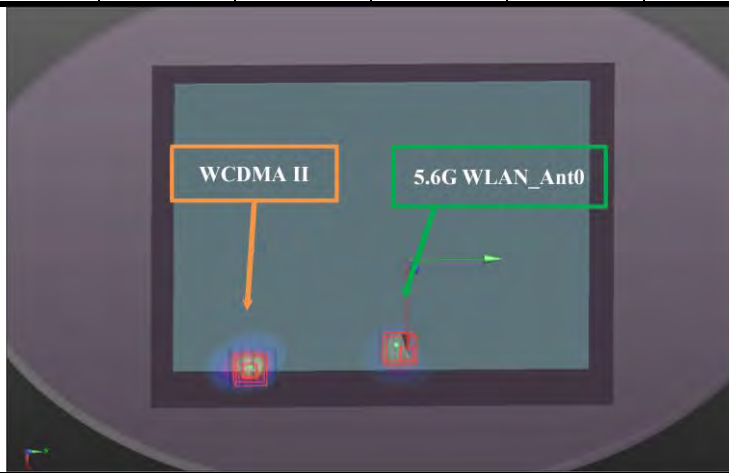


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA II Ch9400     | Body               | Rear Face     | 0.66             | 103.2       | -97.1 | 3.13 | 208.9                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

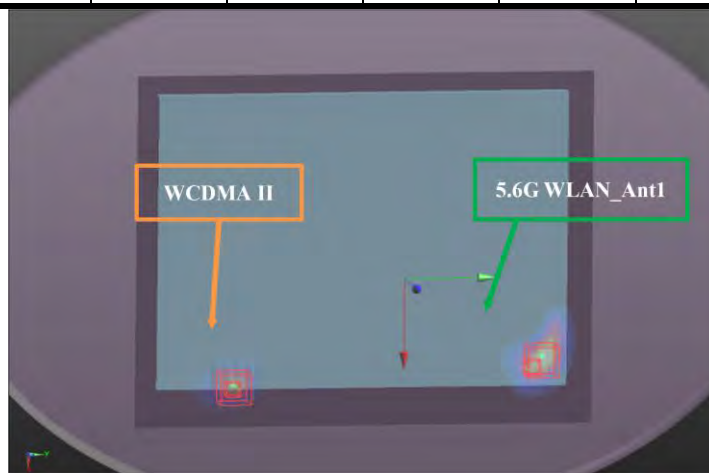


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

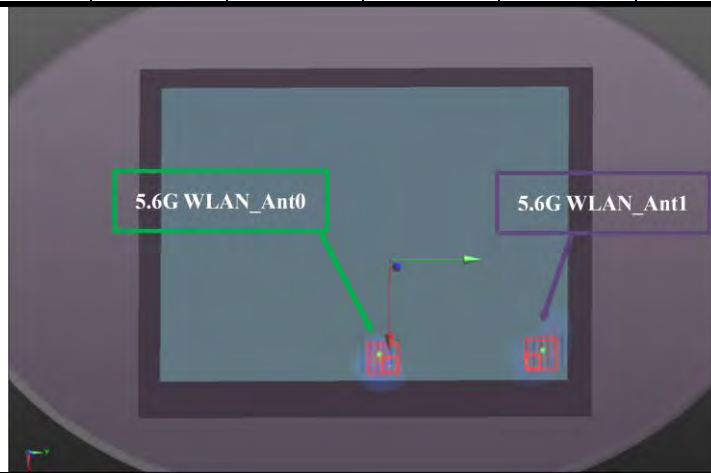


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA II Ch9262     | Body               | Top Side      | 1.30             | 5           | -79.1 | 0.04 | 105.0                                                   | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3 |                                                         |       |                                    |

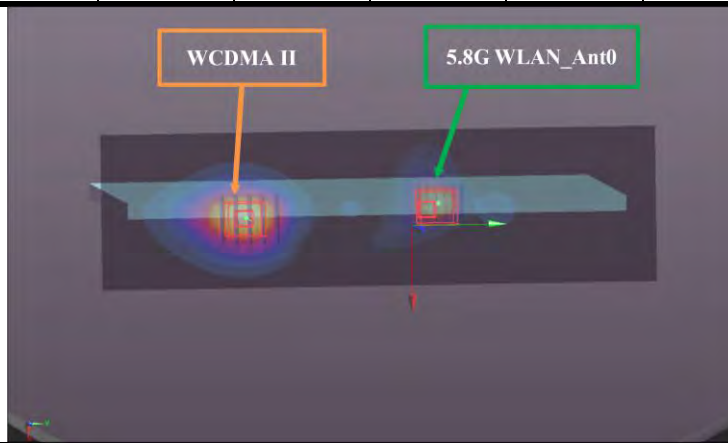


# FCC SAR Test Report

| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA II Ch9262    | Body               | Top Side      | 1.30             | 5           | -79.1 | 0.04  | 191.4                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112   | -2.96 |                                                         |       |                                    |

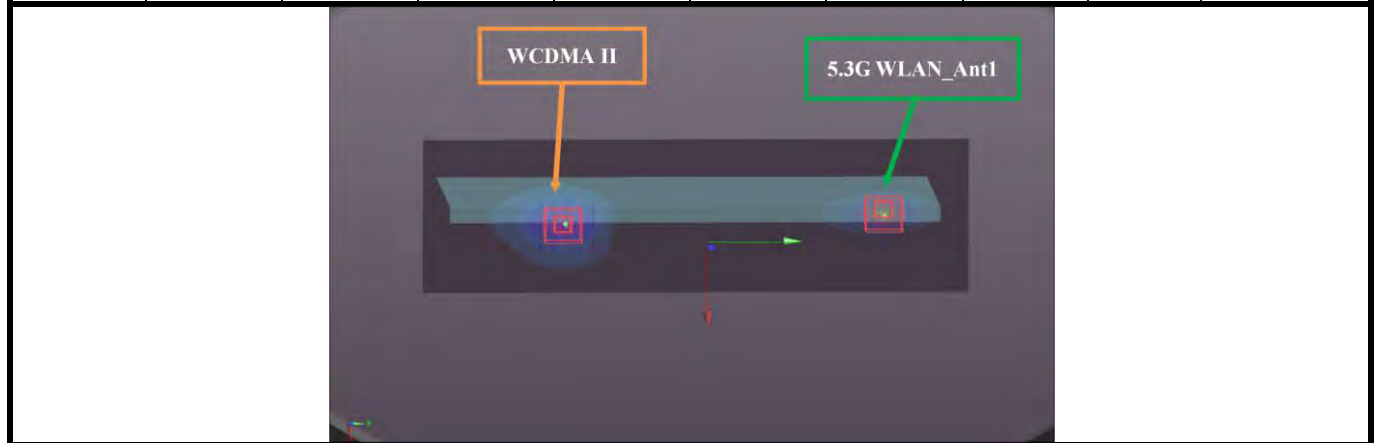

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

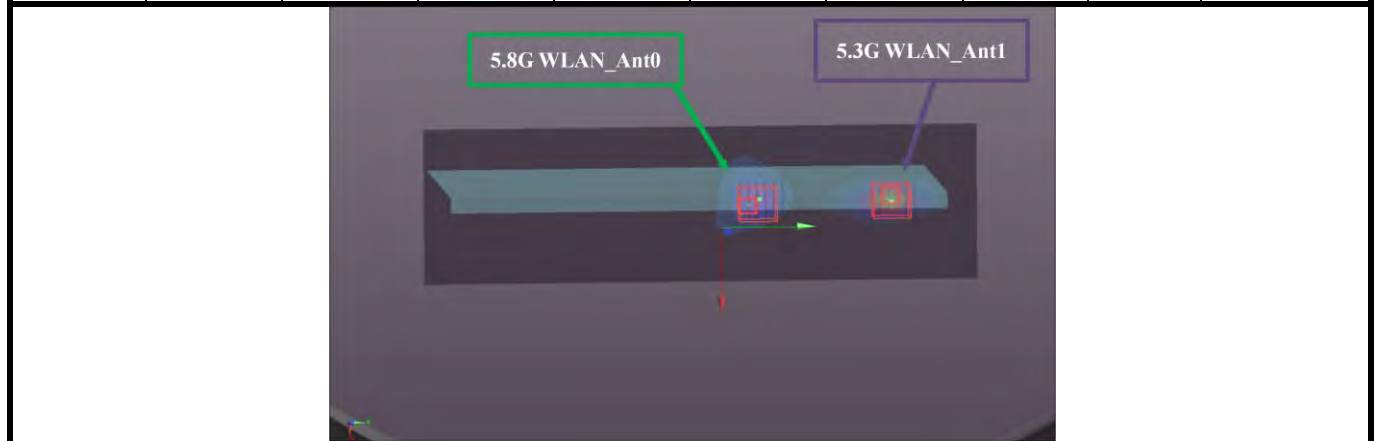




# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA II Ch9400     | Body               | Rear Face     | 0.66             | 103.2       | -97.1 | 3.13  | 136.3                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 9.66        | 2     | -0.12 |                                                         |       |                                    |

| Conditions      | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                 |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA II Ch9400 | Body               | Rear Face     | 0.66             | 103.2       | -97.1 | 3.13 | 206.4                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39     |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

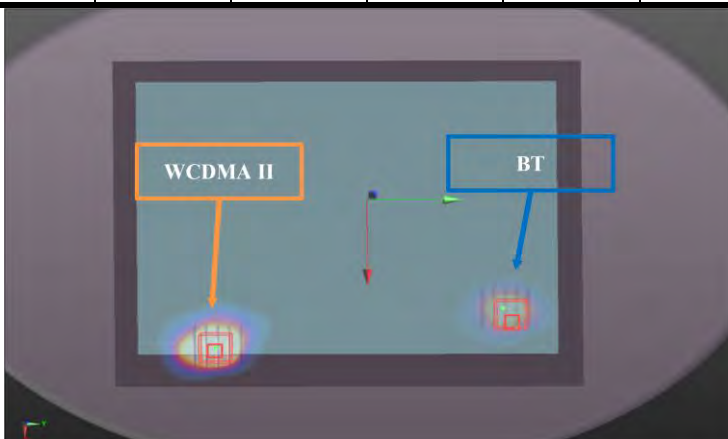


The diagram illustrates the SAR test setup for WCDMA II and BT signals. It shows a top-down view of a rectangular test area with a light blue background. Two signal sources are indicated: 'WCDMA II' (orange box) and 'BT' (blue box). Arrows point from these boxes to corresponding heatmaps on the test area. The WCDMA II heatmap is on the left, and the BT heatmap is on the right. A small red and black antenna is positioned between the two heatmaps. The entire setup is enclosed in a dark grey frame.

# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 9.66        | 2     | -0.12 | 133.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |




| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA II Ch9262     | Body               | Top Side      | 1.30             | 5           | -79.1 | 0.04 | 105.0                                                   | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3 |                                                         |       |                                    |

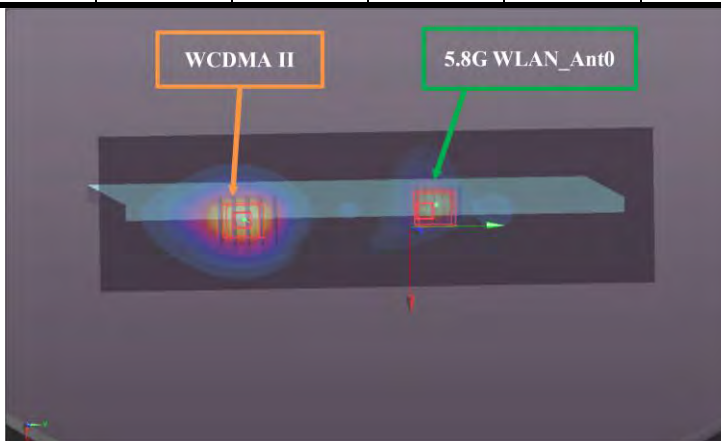


# FCC SAR Test Report

| Conditions      | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                 |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA II Ch9262 | Body               | Top Side      | 1.30             | 5           | -79.1 | 0.04  | 170.8                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39     |                    |               | 0.07             | -4          | 90.2  | -20.8 |                                                         |       |                                    |

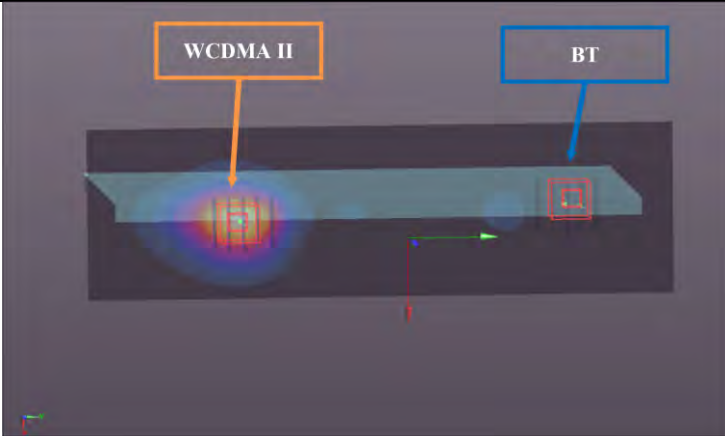


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 66.6                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.07             | -4          | 90.2 | -20.8 |                                                         |       |                                    |

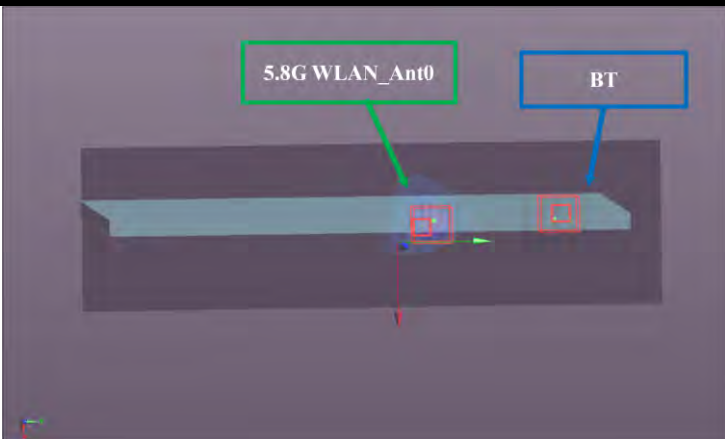


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-----|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y   | z     |                                                         |       |                                    |
| WCDMA IV Ch1413   | Body               | Rear Face     | 0.6              | 99.1        | -85 | 1.85  | 119.3                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34  | -0.81 |                                                         |       |                                    |

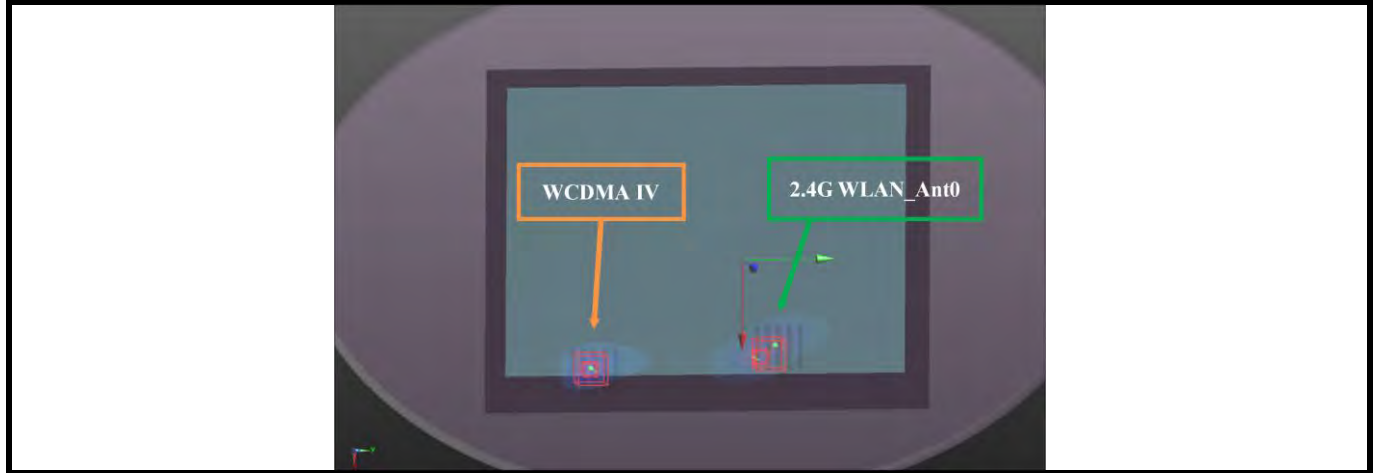

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA IV Ch1413   | Body               | Rear Face     | 0.6              | 99.1        | -85   | 1.85  | 201.9                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

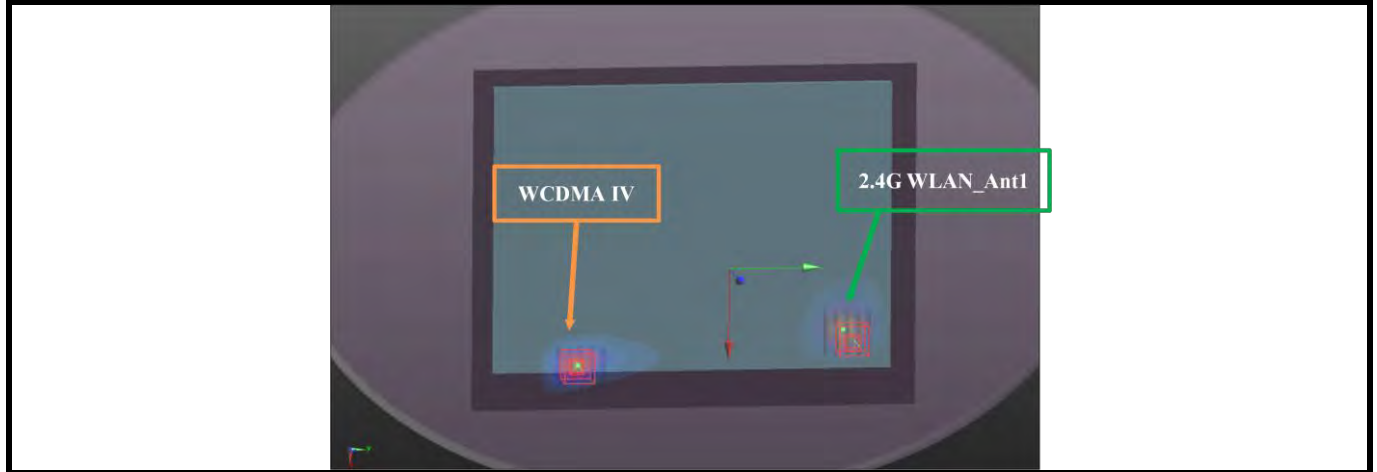


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |




| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-----|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y   | z    |                                                         |       |                                    |
| WCDMA IV Ch1413     | Body               | Rear Face     | 0.6              | 99.1        | -85 | 1.85 | 105.1                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20  | -1.2 |                                                         |       |                                    |

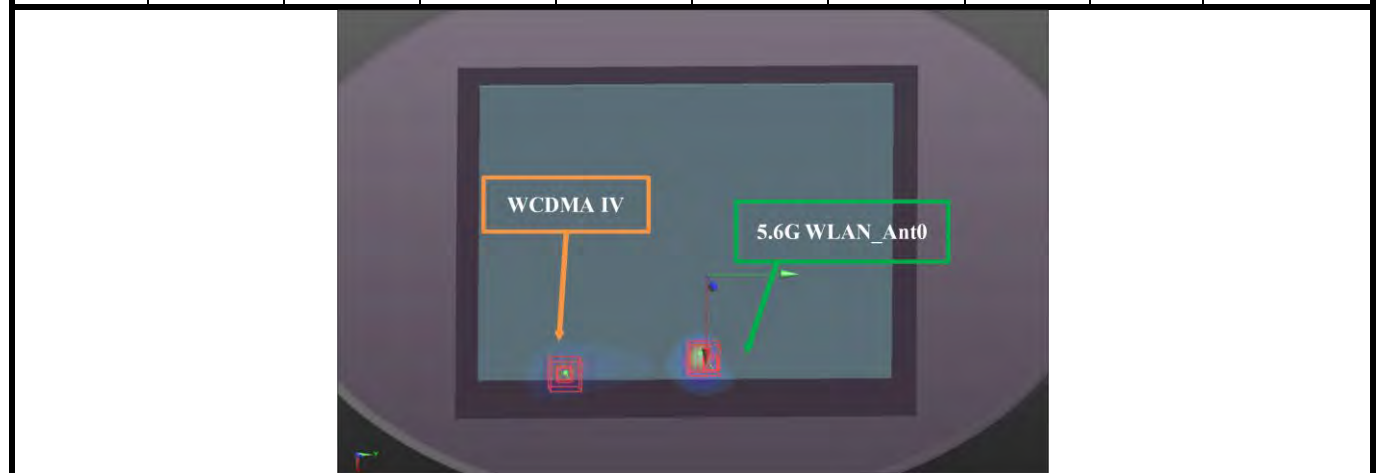


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA IV Ch1413     | Body               | Rear Face     | 0.6              | 99.1        | -85   | 1.85 | 196.7                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

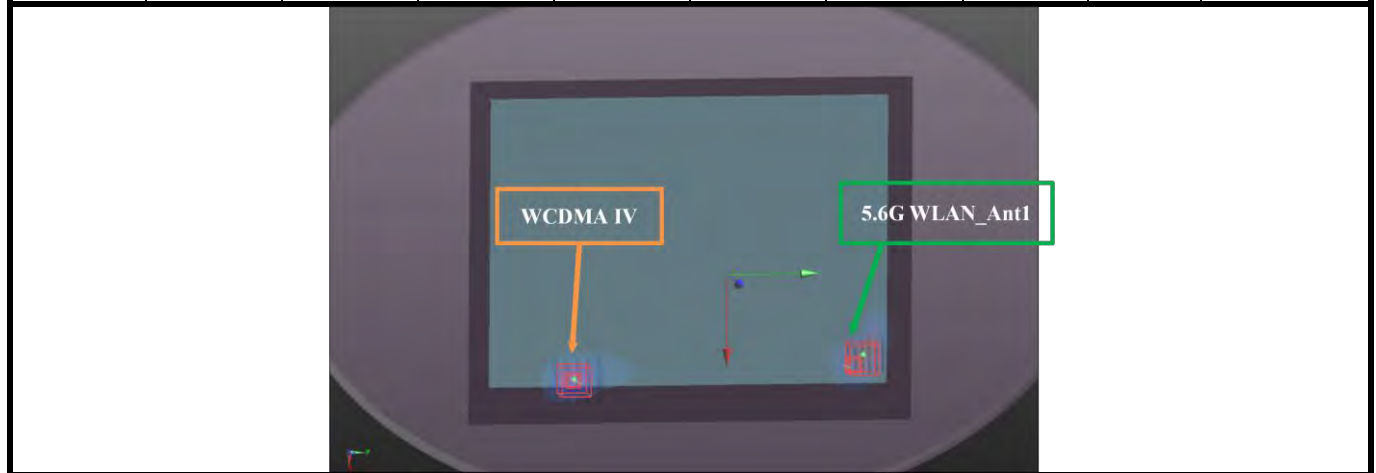


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

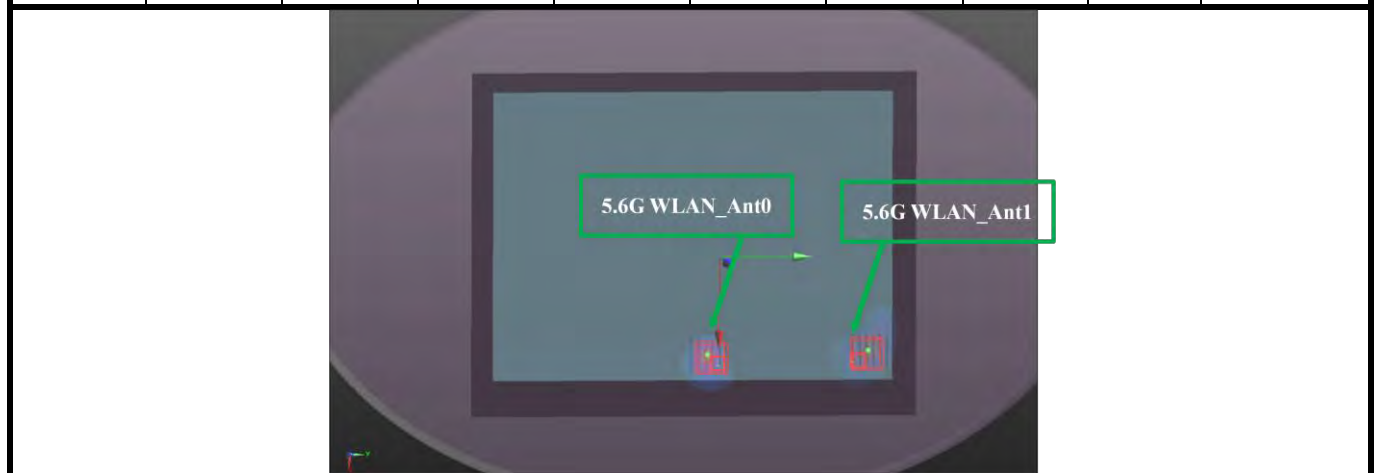


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z    |                                                         |       |                                    |
| WCDMA IV Ch1413     | Body               | Top Side      | 0.56             | -1.8        | -100 | 0.18 | 125.5                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4 | -5.3 |                                                         |       |                                    |

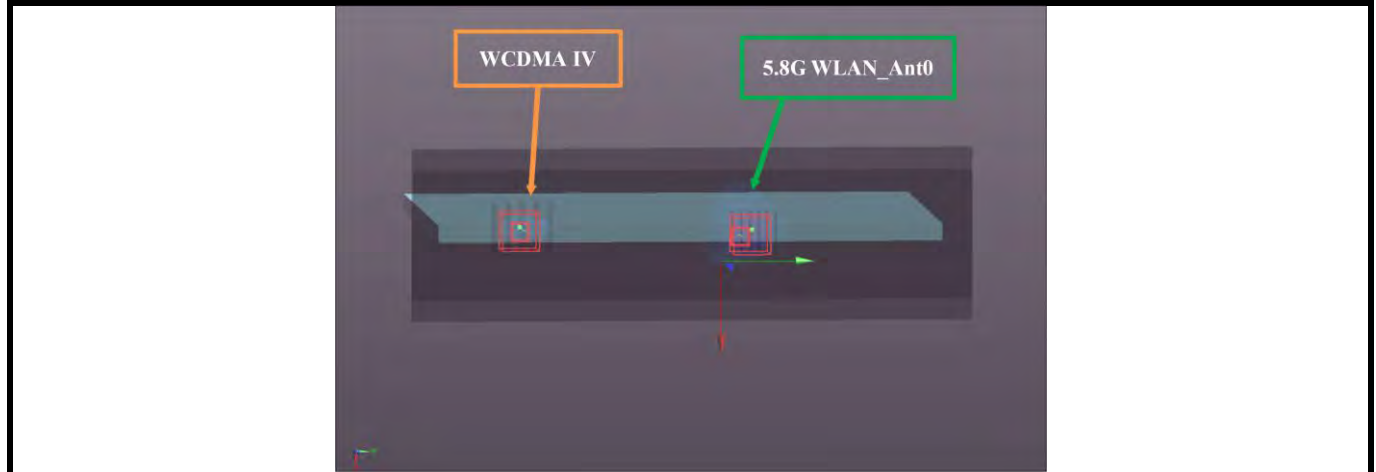


| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WCDMA IV Ch1413    | Body               | Top Side      | 0.56             | -1.8        | -100 | 0.18  | 212.0                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

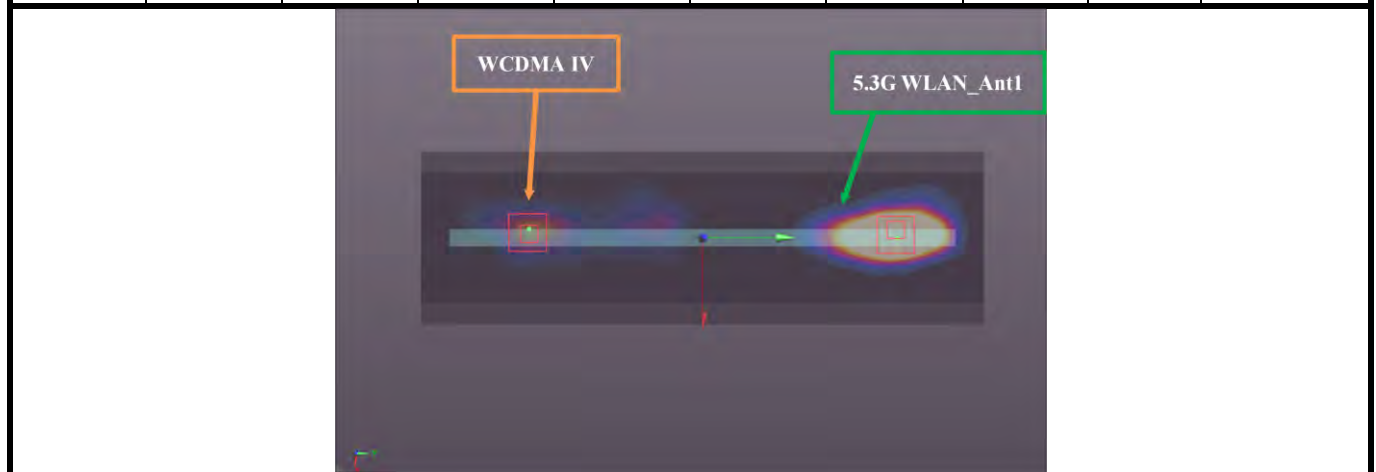




# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

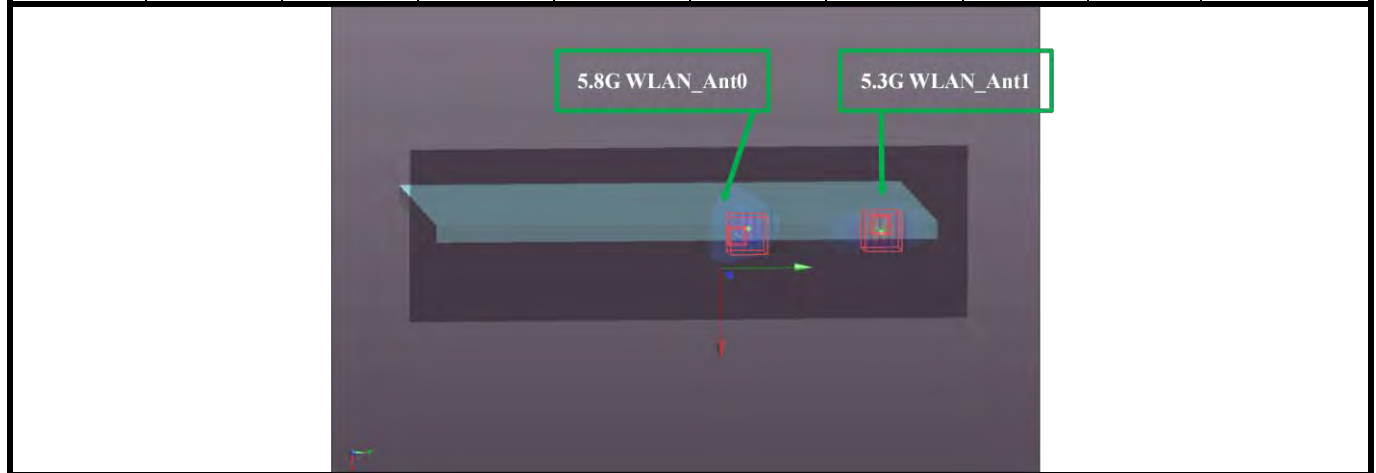


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-----|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y   | z     |                                                         |       |                                    |
| WCDMA IV Ch1413     | Body               | Rear Face     | 0.6              | 99.1        | -85 | 1.85  | 124.8                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 9.66        | 2   | -0.12 |                                                         |       |                                    |

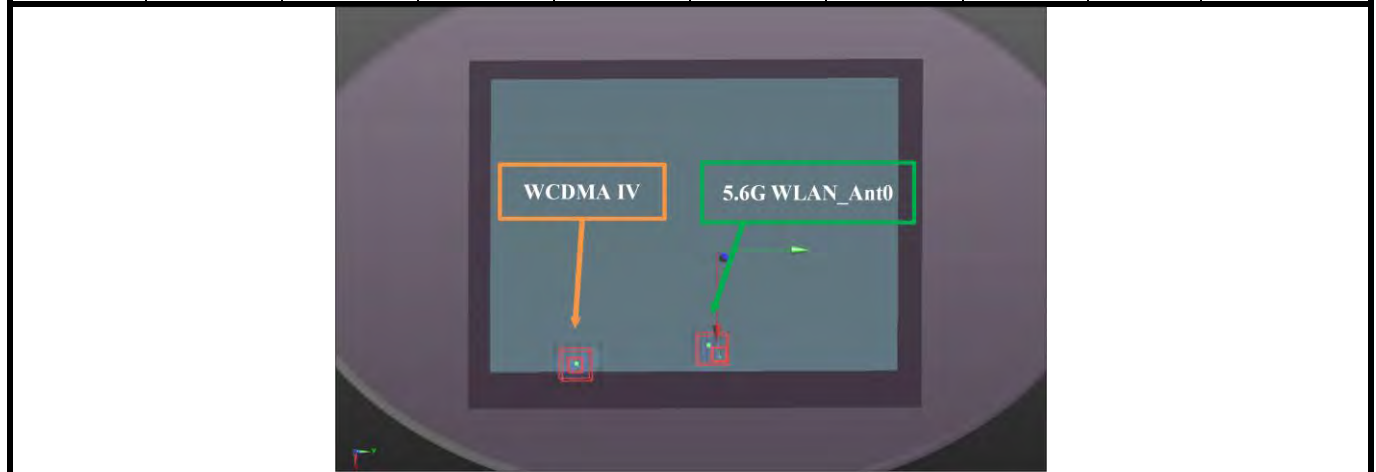




# FCC SAR Test Report

| Conditions      | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                 |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA IV Ch1413 | Body               | Rear Face     | 0.6              | 99.1        | -85   | 1.85 | 194.1                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39     |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

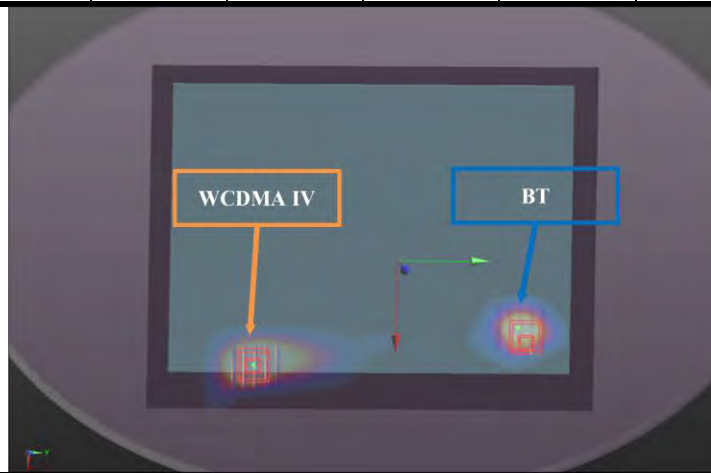


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 9.66        | 2     | -0.12 | 133.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

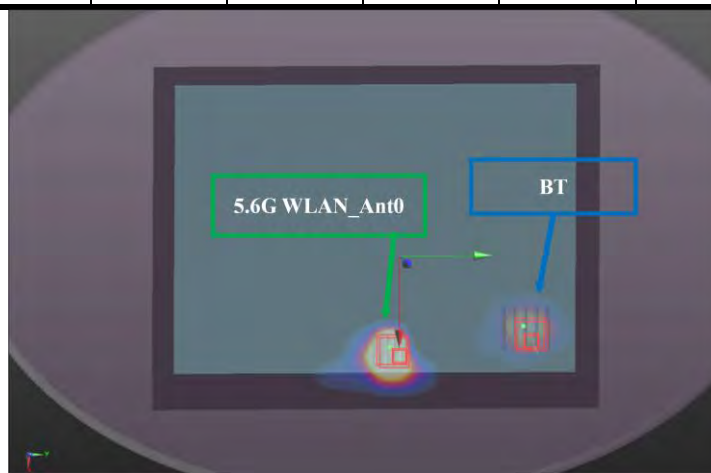


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA V Ch4233    | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81  | 119.6                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

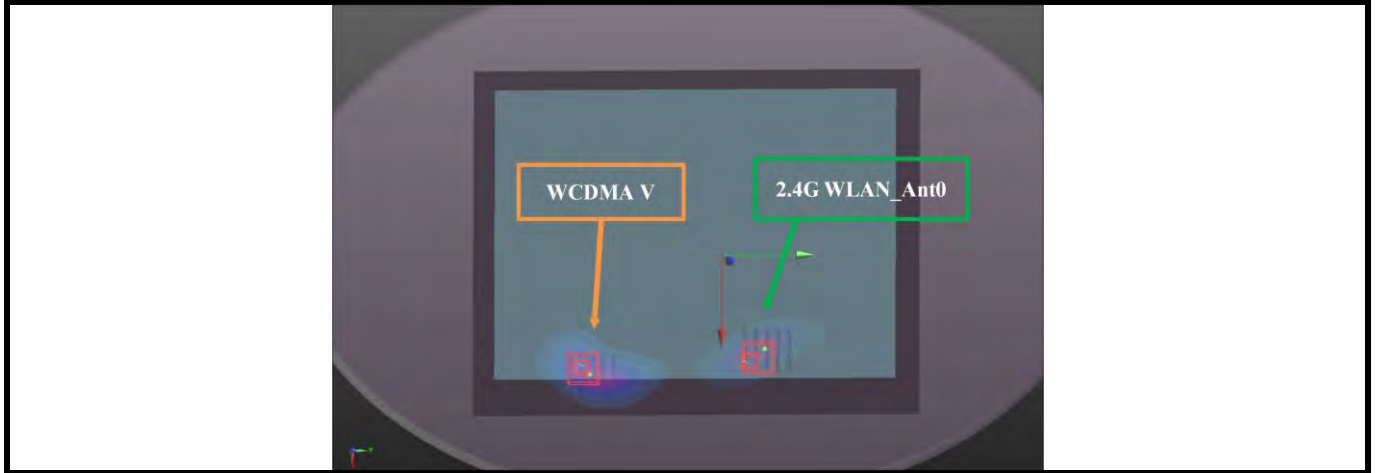


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA V Ch4233    | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81  | 202.1                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

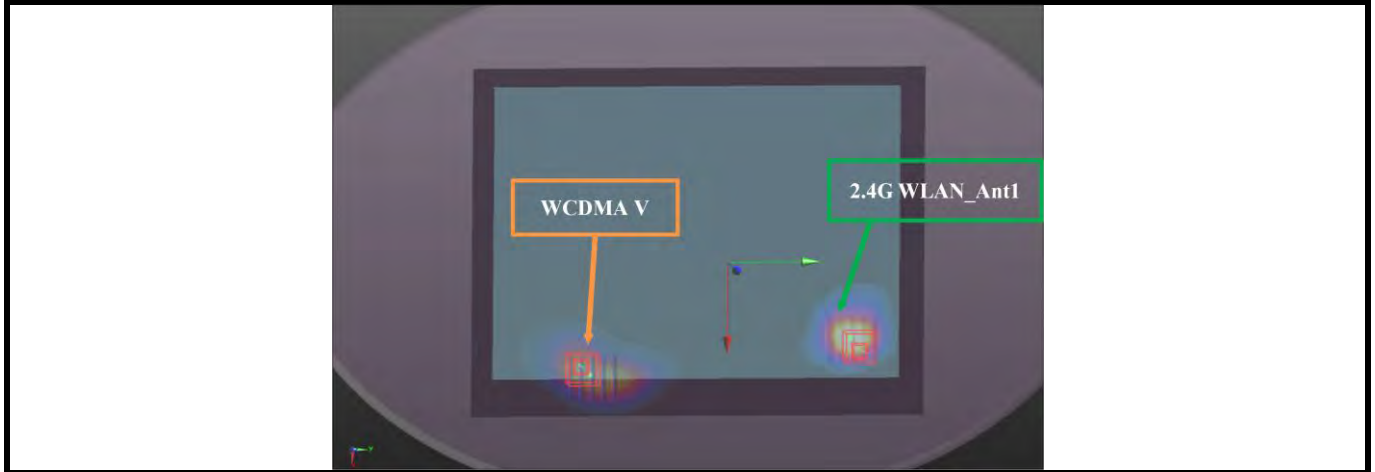


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

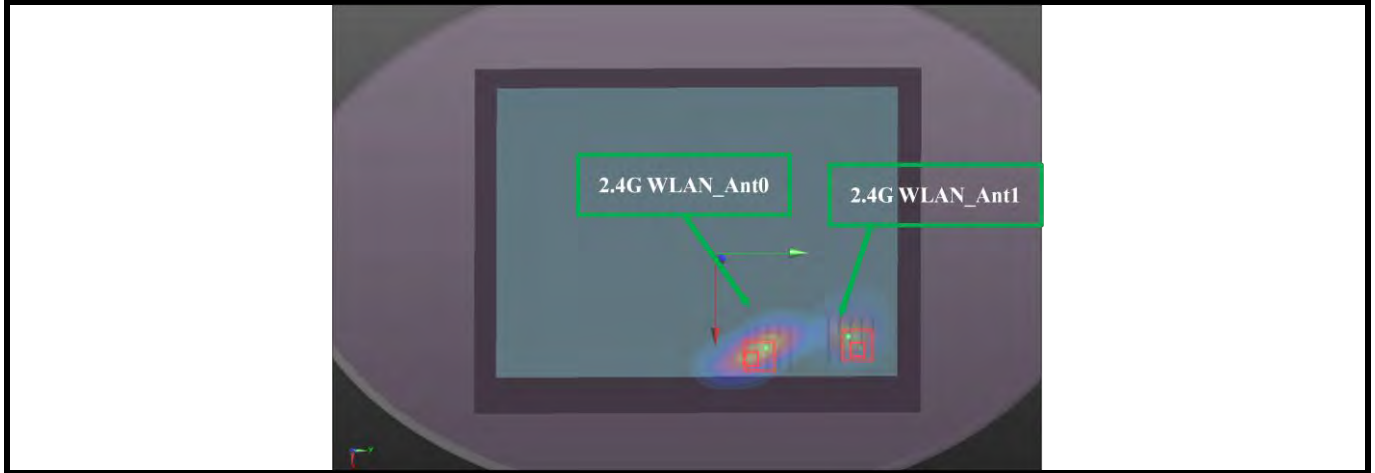

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA V Ch4233      | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81 | 105.6                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |

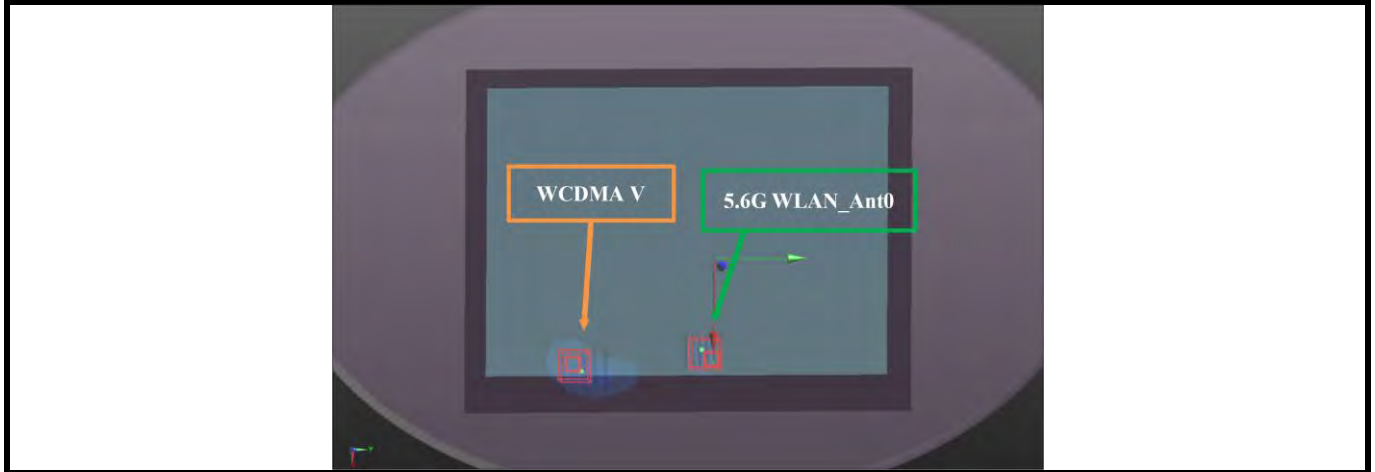

# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA V Ch4233      | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81 | 197.1                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |




| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |




# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA V Ch4233      | Body               | Top Side      | 0.62             | -3.4        | -76.5 | -0.34 | 102.0                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3  |                                                         |       |                                    |

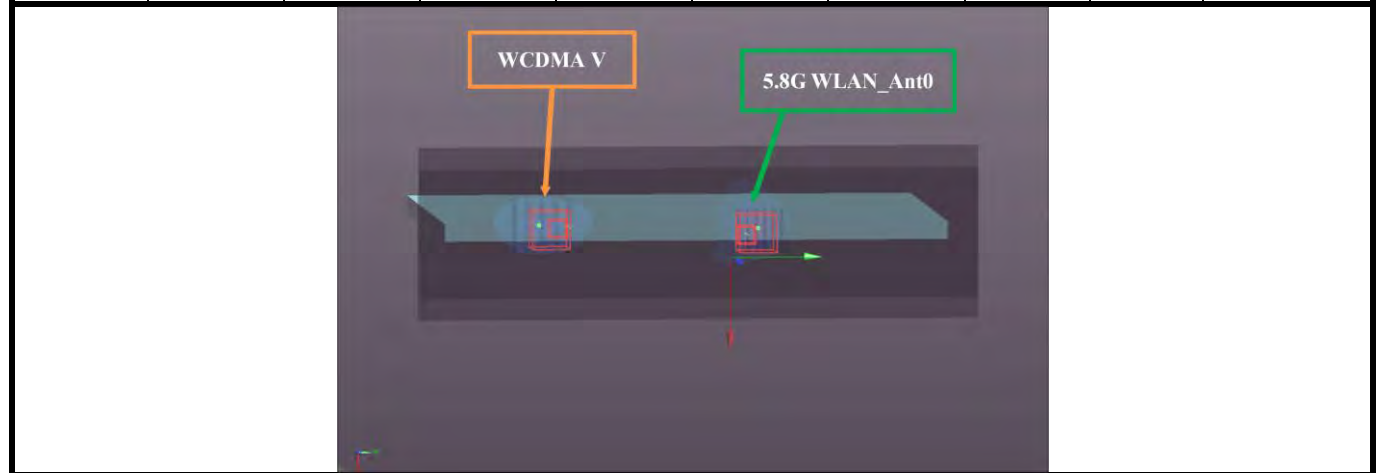


| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA V Ch4233     | Body               | Top Side      | 0.62             | -3.4        | -76.5 | -0.34 | 188.5                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112   | -2.96 |                                                         |       |                                    |

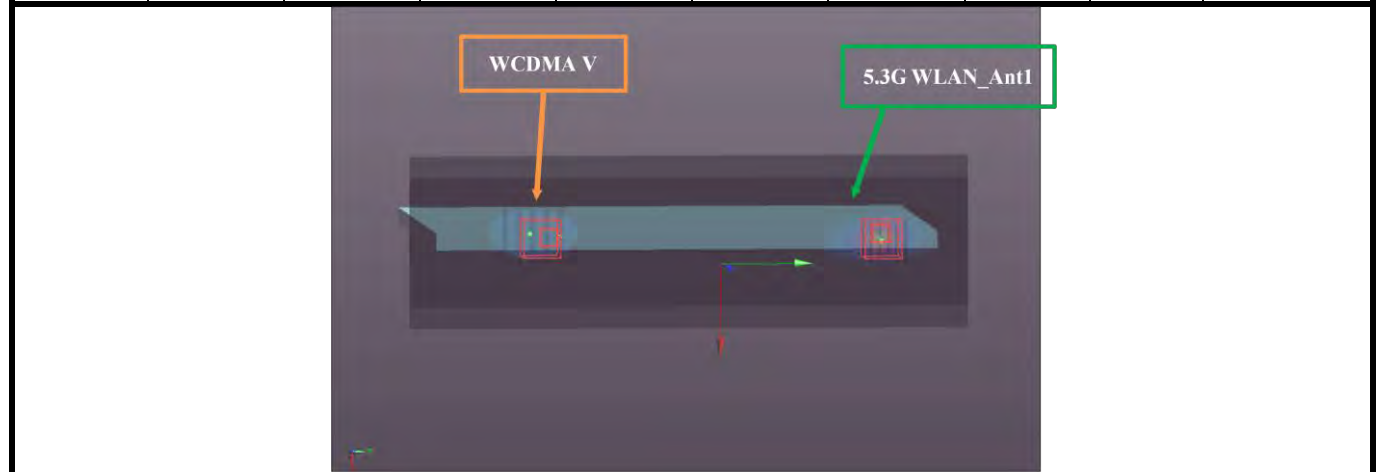


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

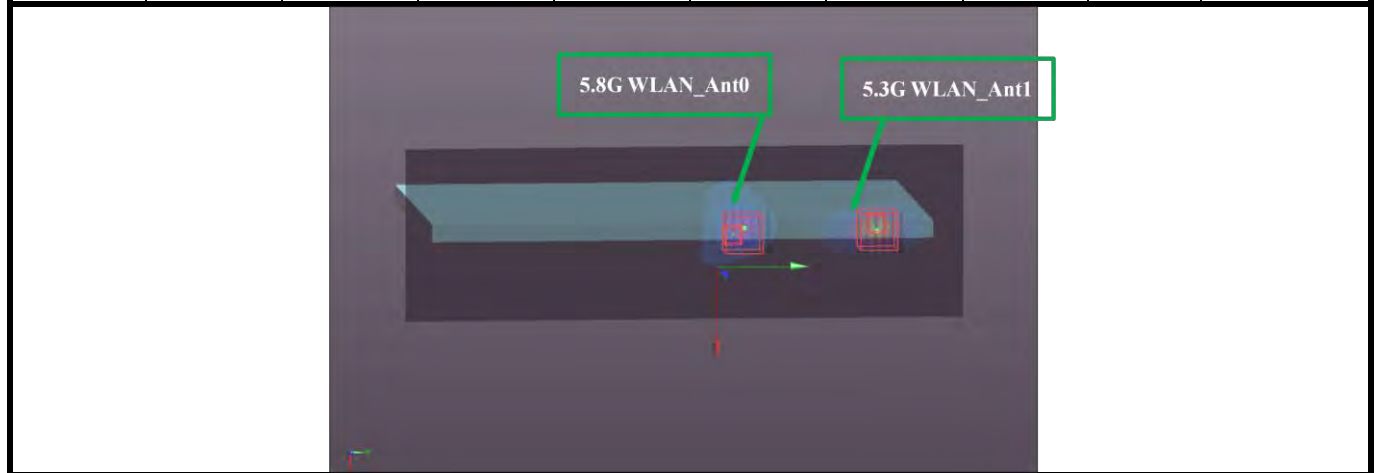


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA V Ch4233    | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81  | 119.6                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

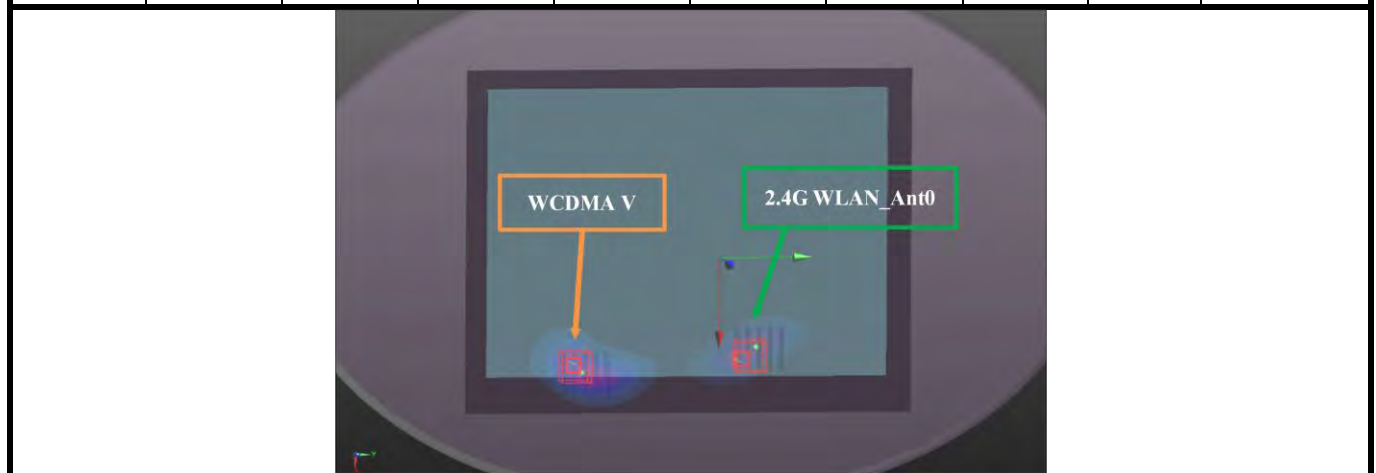


# FCC SAR Test Report

| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA V Ch4233 | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81 | 194.4                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39    |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

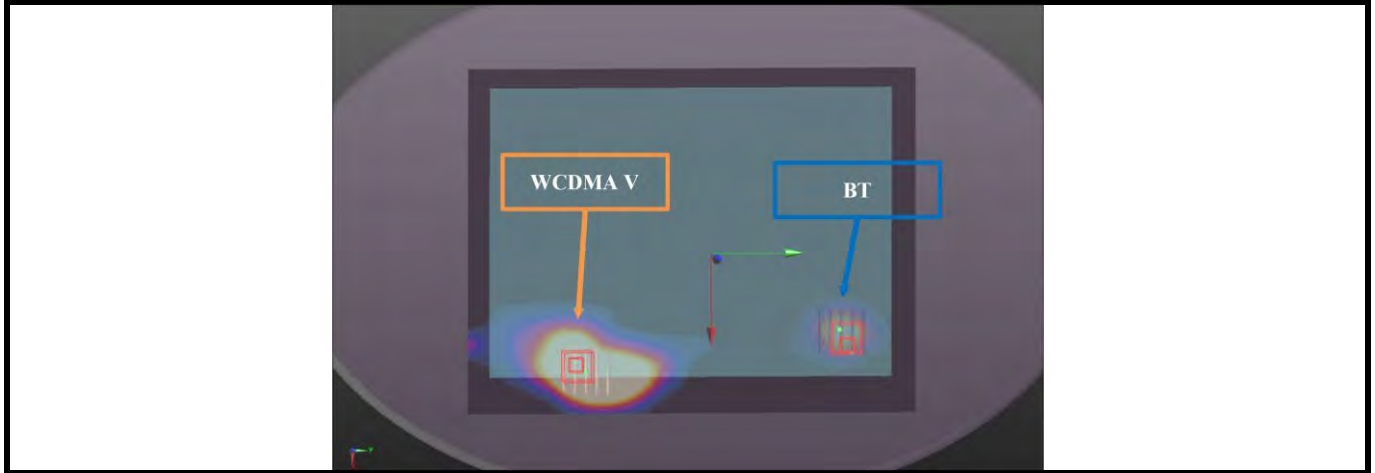


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 74.8                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39       |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

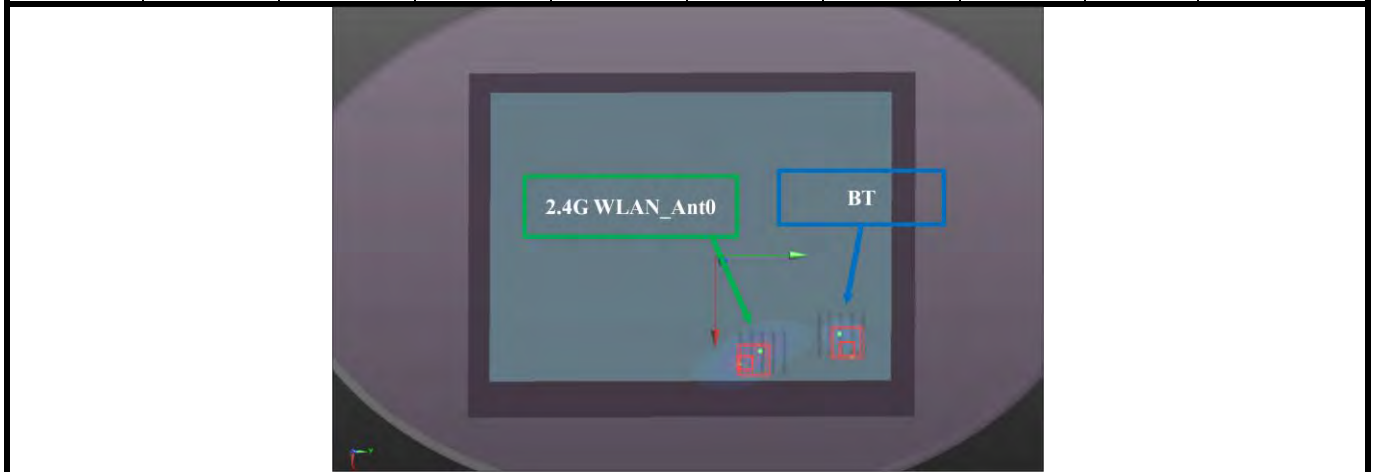




# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WCDMA V Ch4233      | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81  | 121.3                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 9.66        | 2     | -0.12 |                                                         |       |                                    |

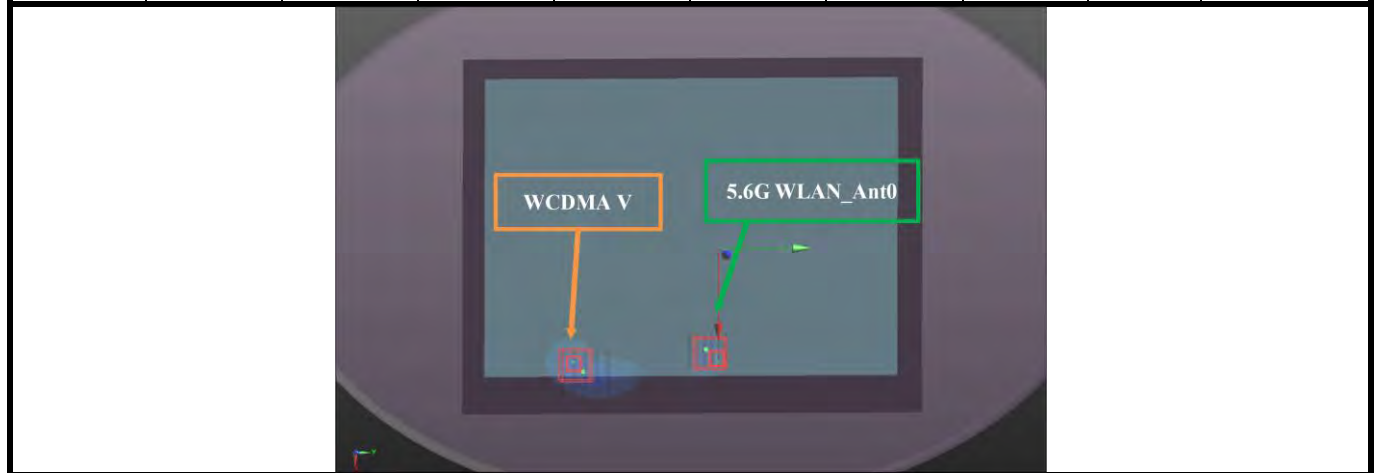


| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WCDMA V Ch4233 | Body               | Rear Face     | 0.79             | 93.6        | -85.5 | 1.81 | 194.4                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39    |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

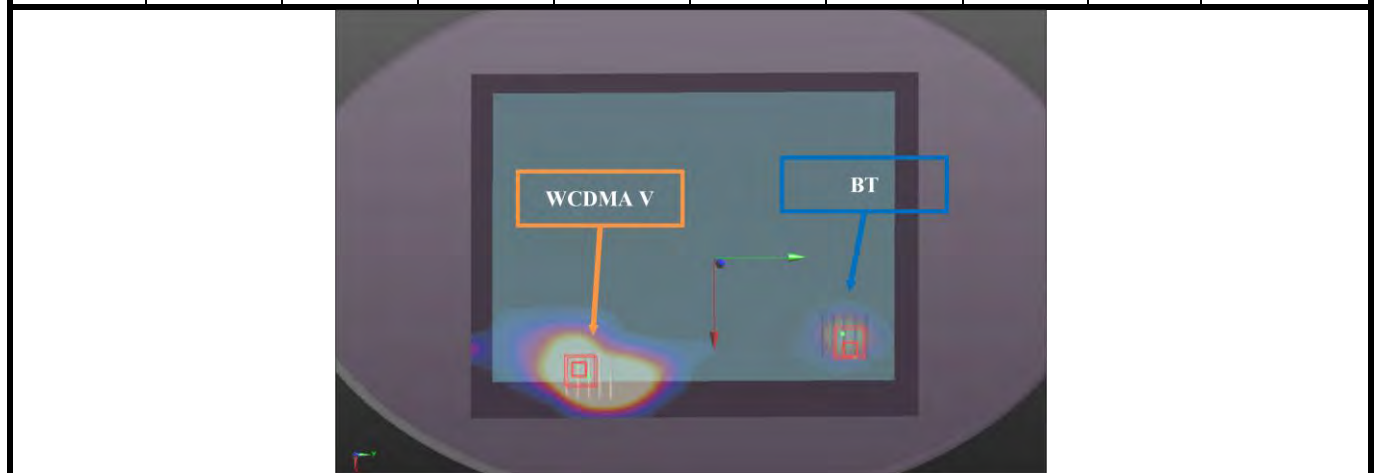




# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 9.66        | 2     | -0.12 | 133.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

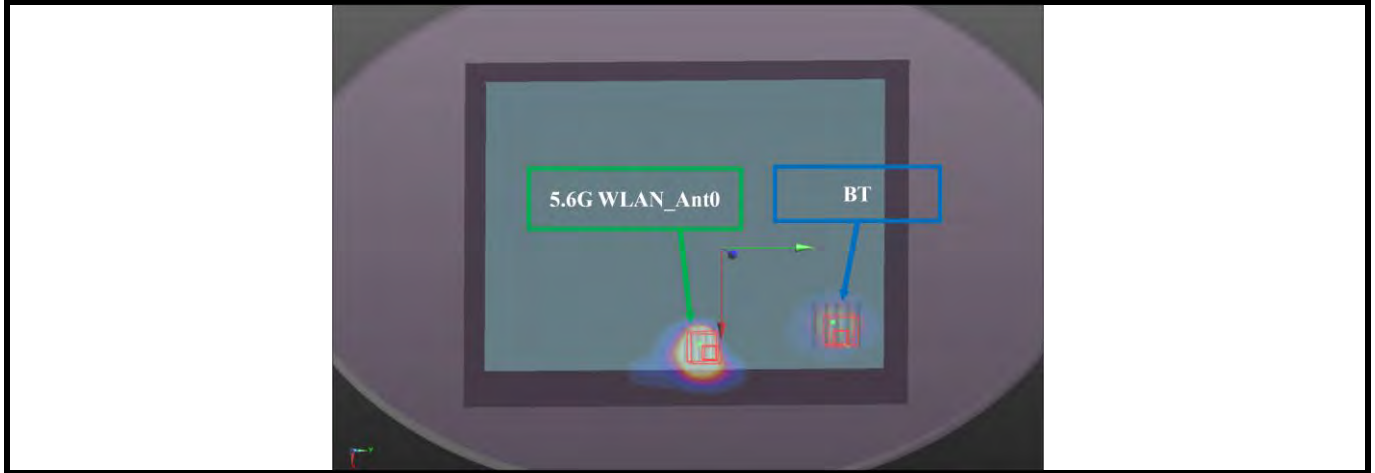


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 2 Ch19100     | Body               | Rear Face     | 0.65             | 103.2       | -94.1 | 2.16  | 128.8                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

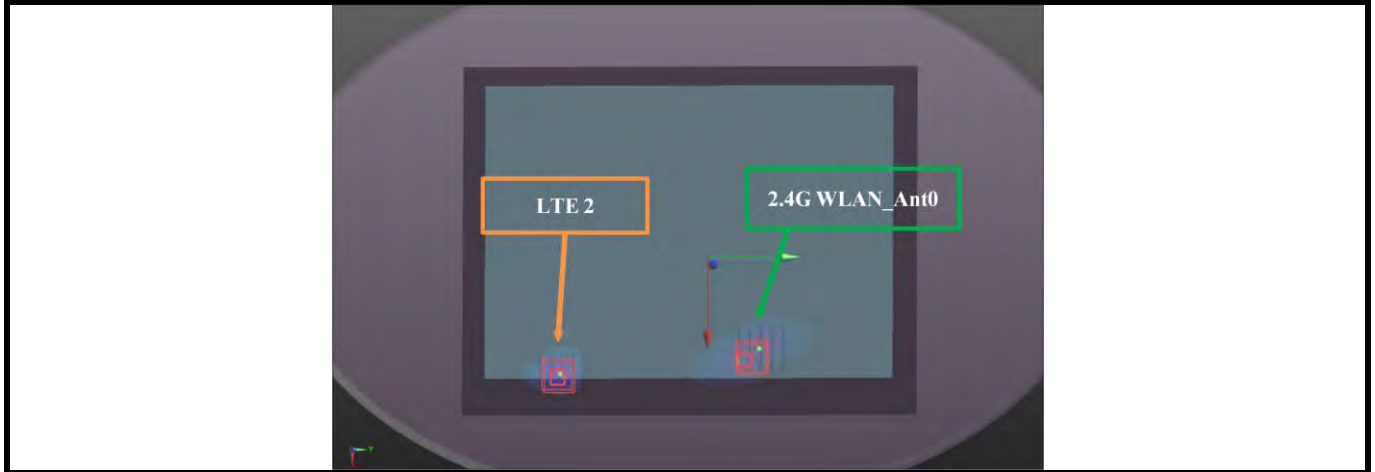


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 2 Ch19100     | Body               | Rear Face     | 0.65             | 103.2       | -94.1 | 2.16  | 211.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

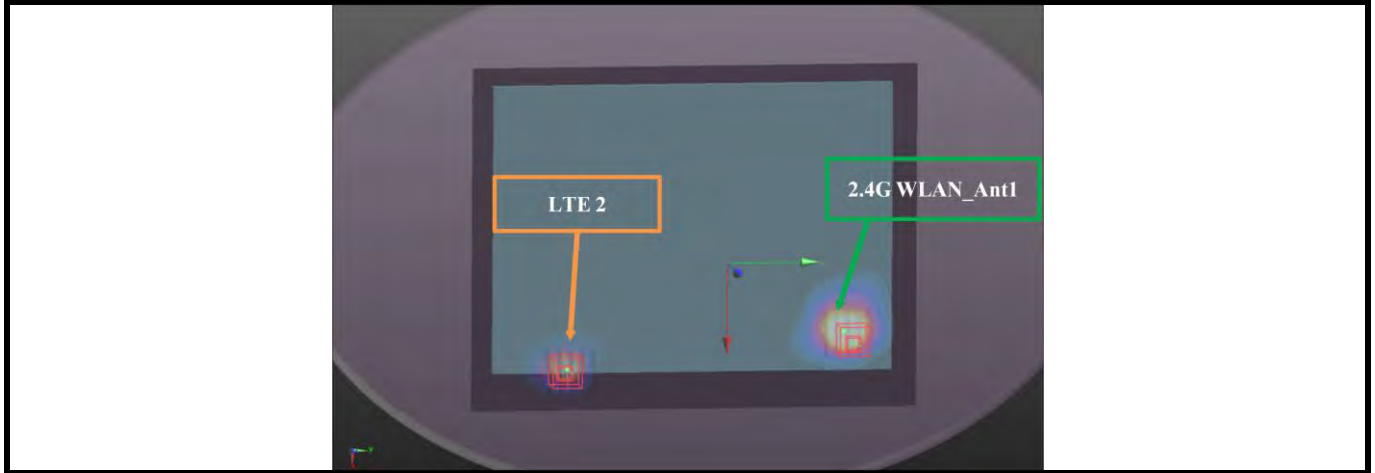


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

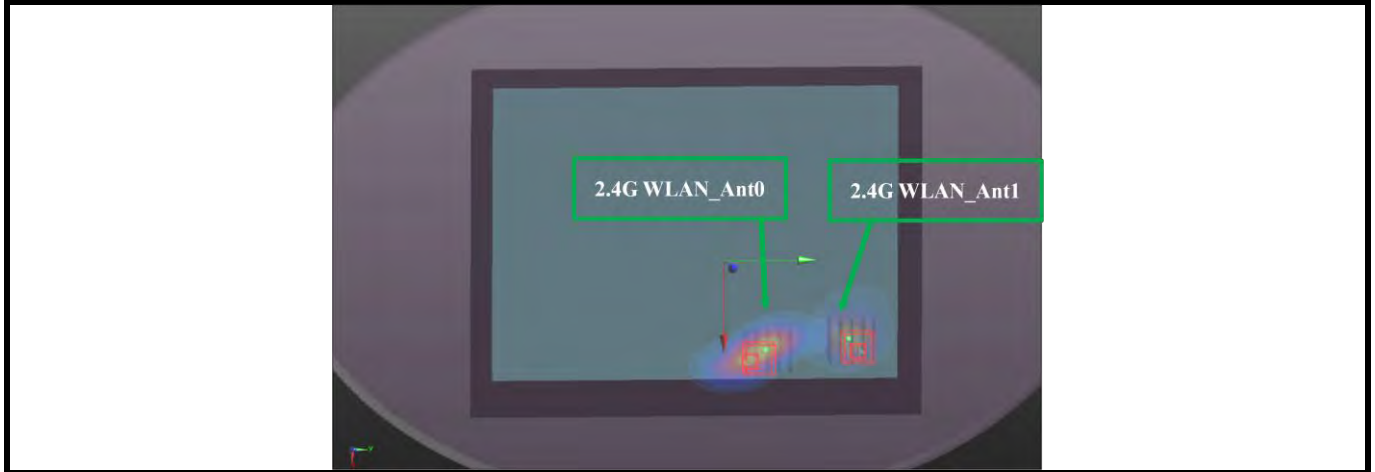


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 2 Ch19100       | Body               | Rear Face     | 0.65             | 103.2       | -94.1 | 2.16 | 114.3                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |

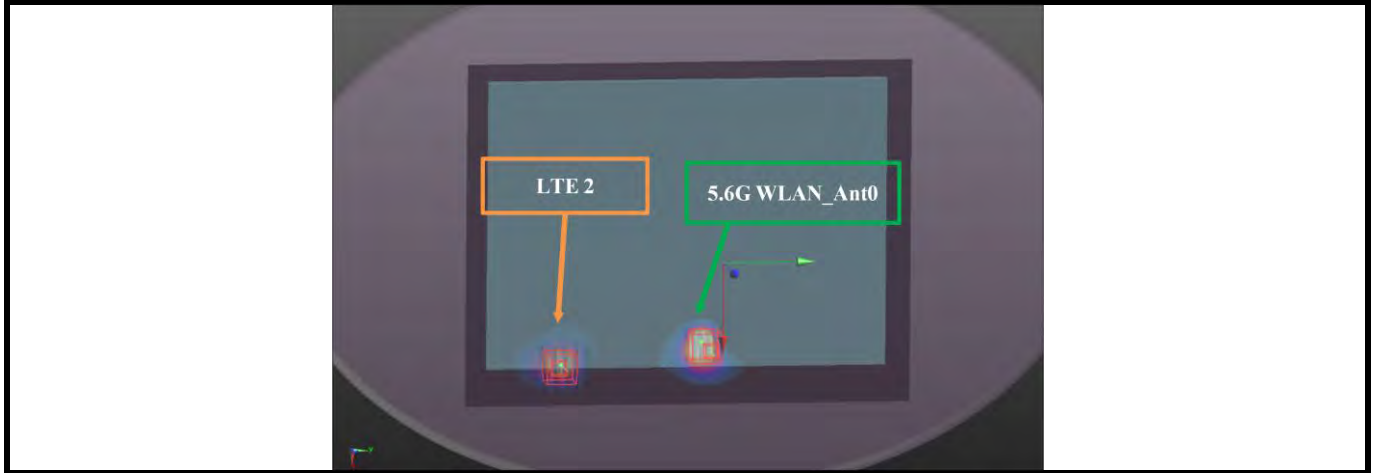


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 2 Ch19100       | Body               | Rear Face     | 0.65             | 103.2       | -94.1 | 2.16 | 205.9                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

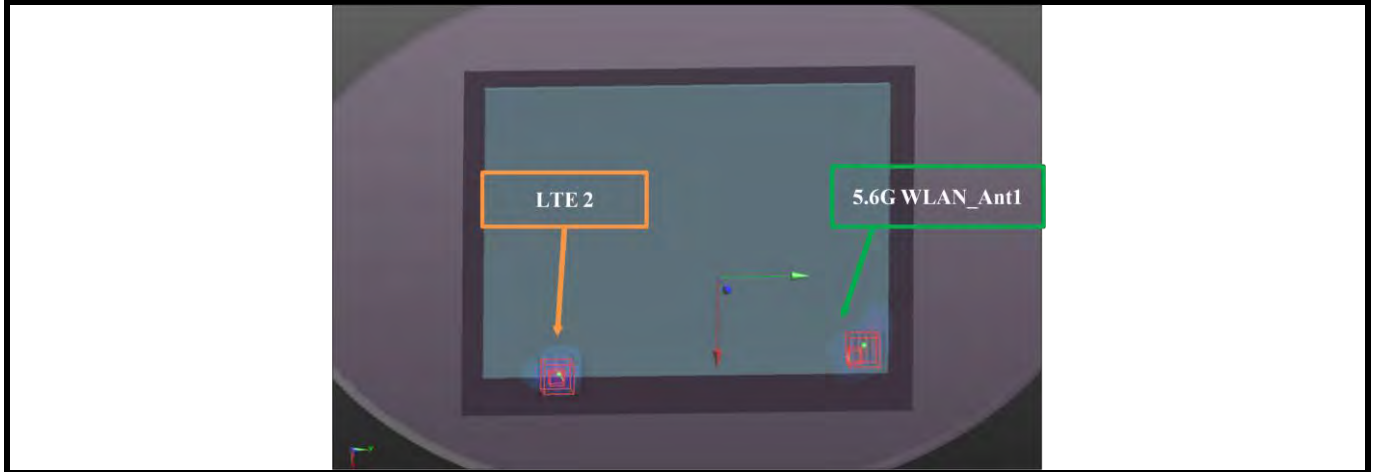


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

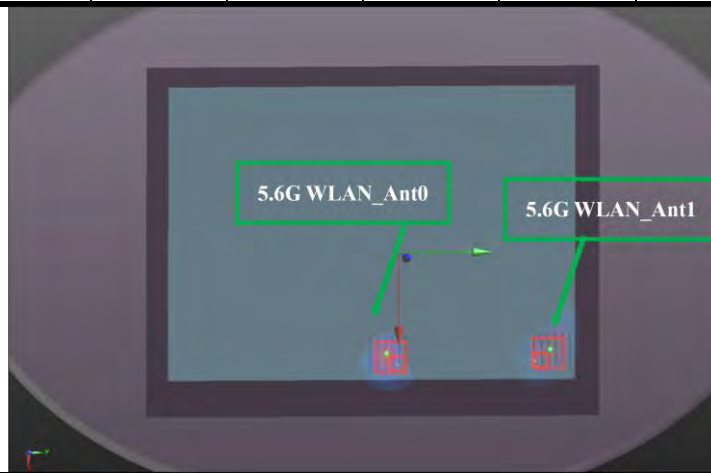


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 2 Ch18900       | Body               | Top Side      | 1.15             | -2.5        | -79.1 | -0.75 | 104.6                                                   | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3  |                                                         |       |                                    |

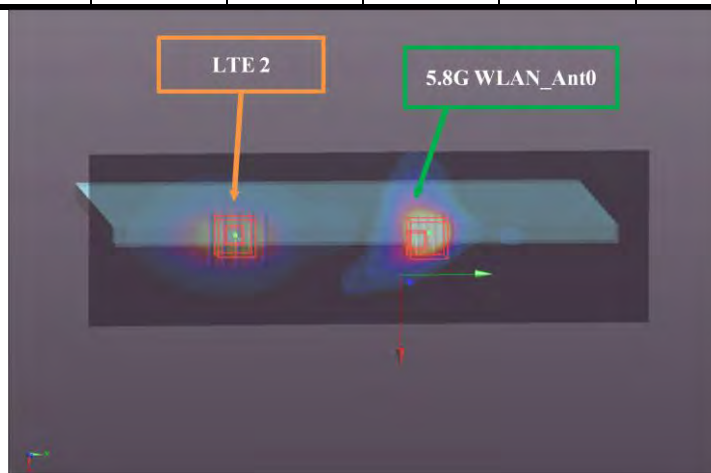


# FCC SAR Test Report

| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 2 Ch18900      | Body               | Top Side      | 1.15             | -2.5        | -79.1 | -0.75 | 191.1                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112   | -2.96 |                                                         |       |                                    |

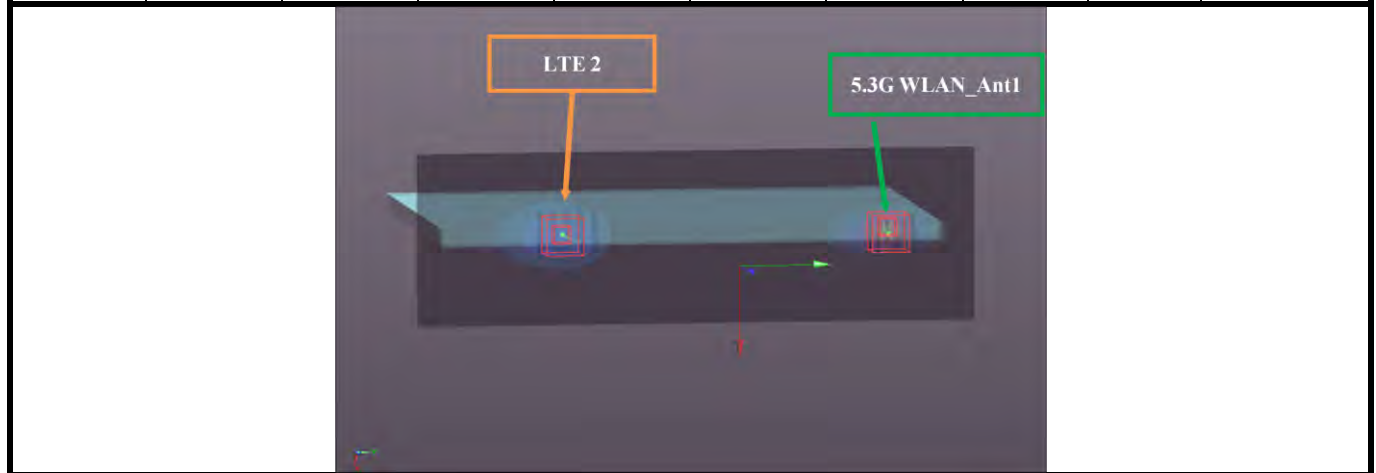


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

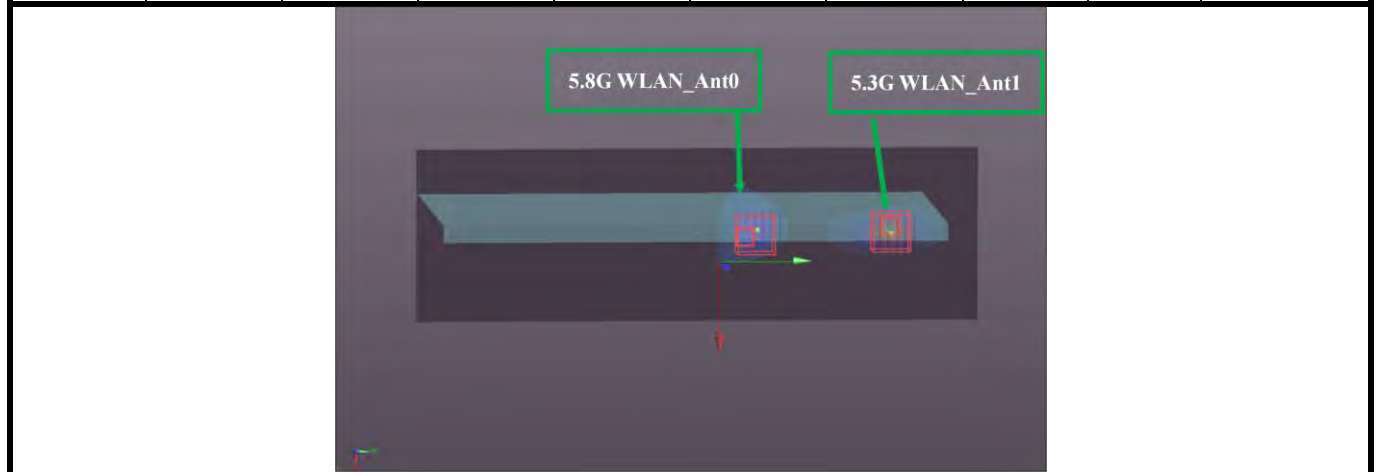


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 2 Ch19100       | Body               | Rear Face     | 0.65             | 103.2       | -94.1 | 2.16  | 134.1                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 9.66        | 2     | -0.12 |                                                         |       |                                    |

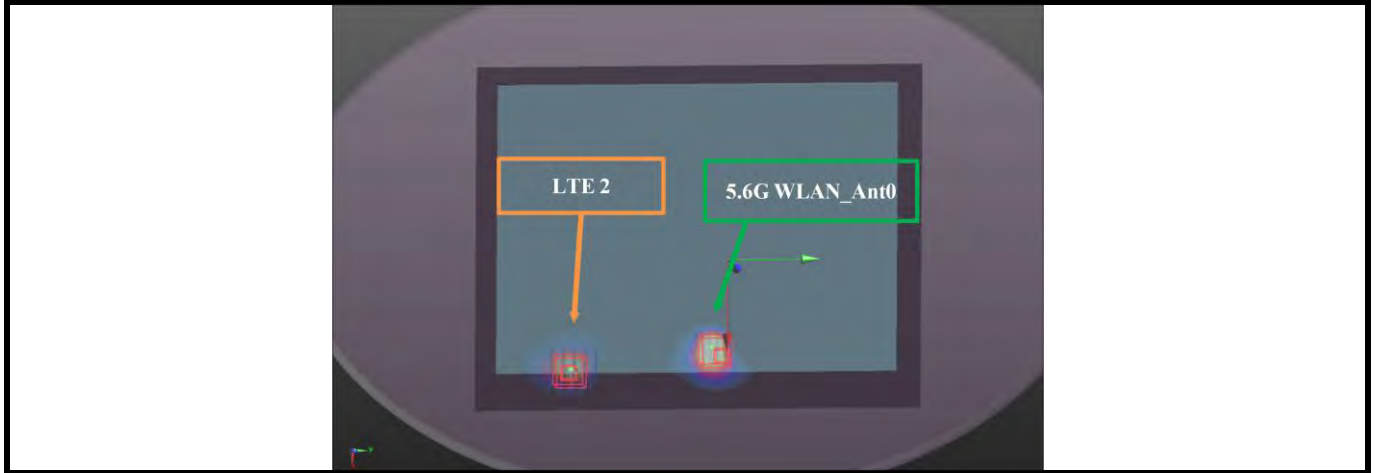

| Conditions    | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|               |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 2 Ch19100 | Body               | Rear Face     | 0.65             | 103.2       | -94.1 | 2.16 | 203.4                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39   |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

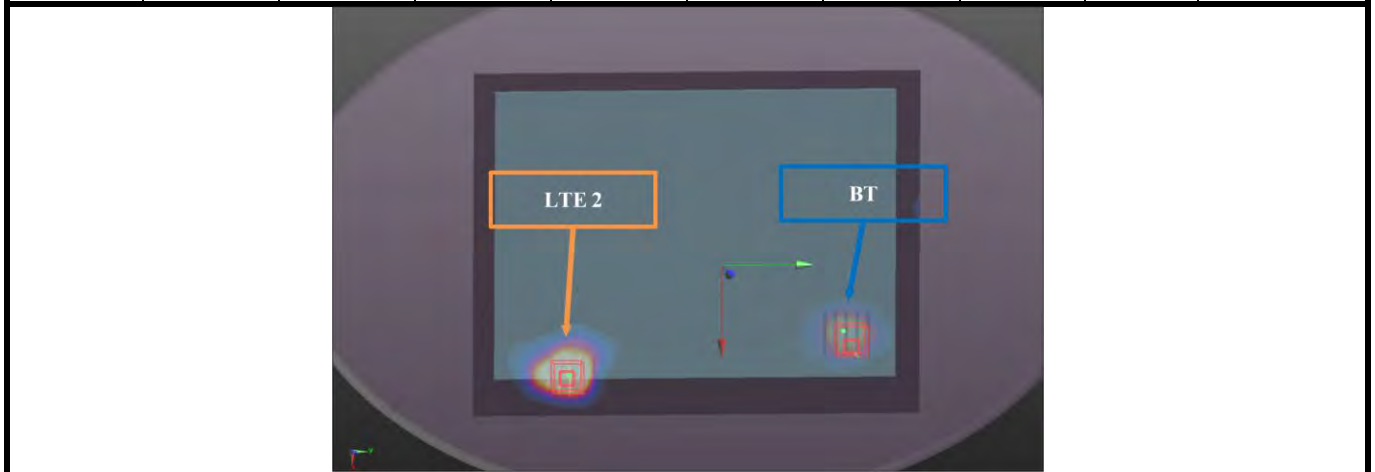


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 9.66        | 2     | -0.12 | 133.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |




| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 2 Ch18900       | Body               | Top Side      | 1.15             | -2.5        | -79.1 | -0.75 | 104.6                                                   | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3  |                                                         |       |                                    |

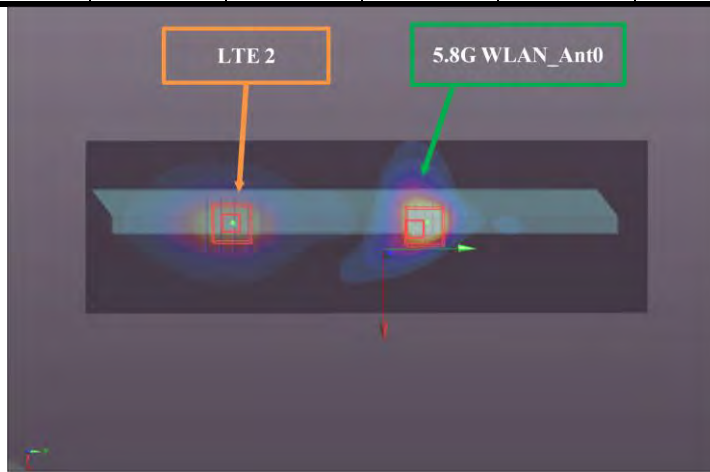




# FCC SAR Test Report

| Conditions    | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|               |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 2 Ch18900 | Body               | Top Side      | 1.15             | -2.5        | -79.1 | -0.75 | 173.4                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39   |                    |               | 0.07             | -40         | 90.2  | -2.8  |                                                         |       |                                    |

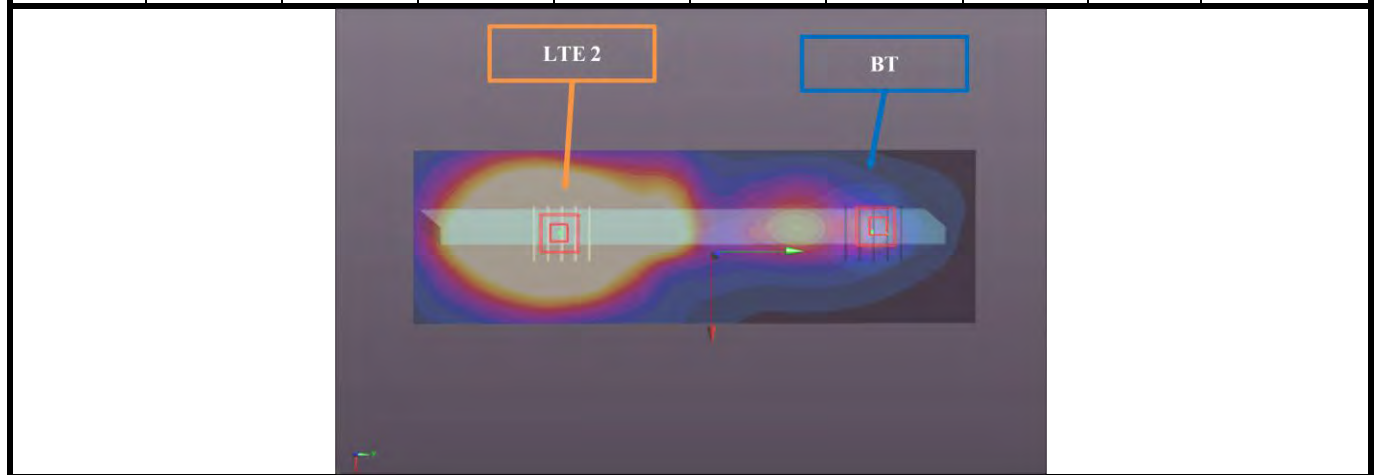


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z    |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3 | 74.2                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.07             | -40         | 90.2 | -2.8 |                                                         |       |                                    |

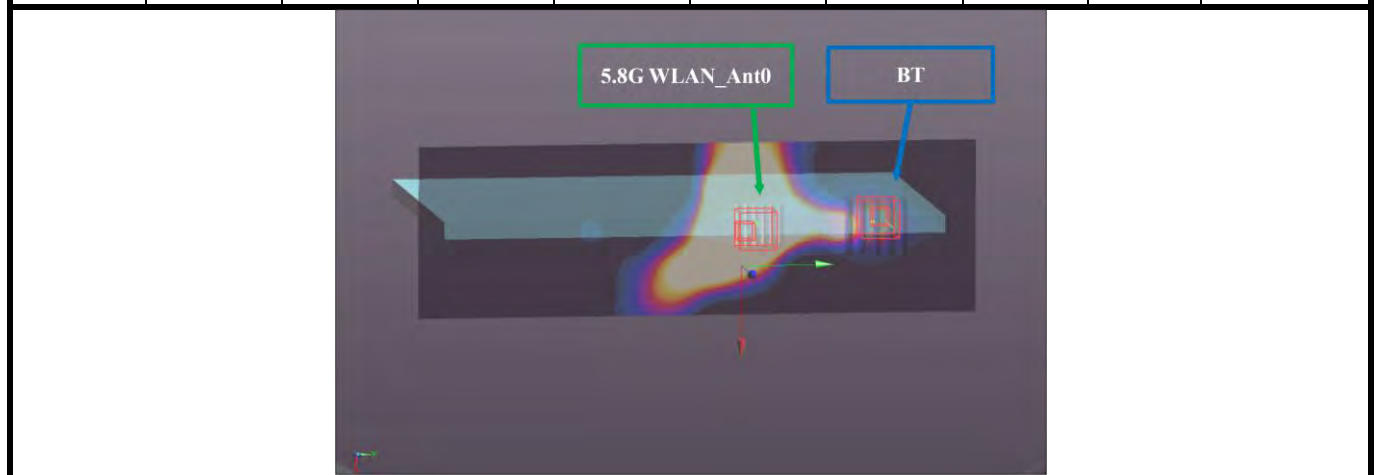



# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 4 Ch20175     | Body               | Rear Face     | 0.53             | 88.2        | -87.3 | 1.75  | 121.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

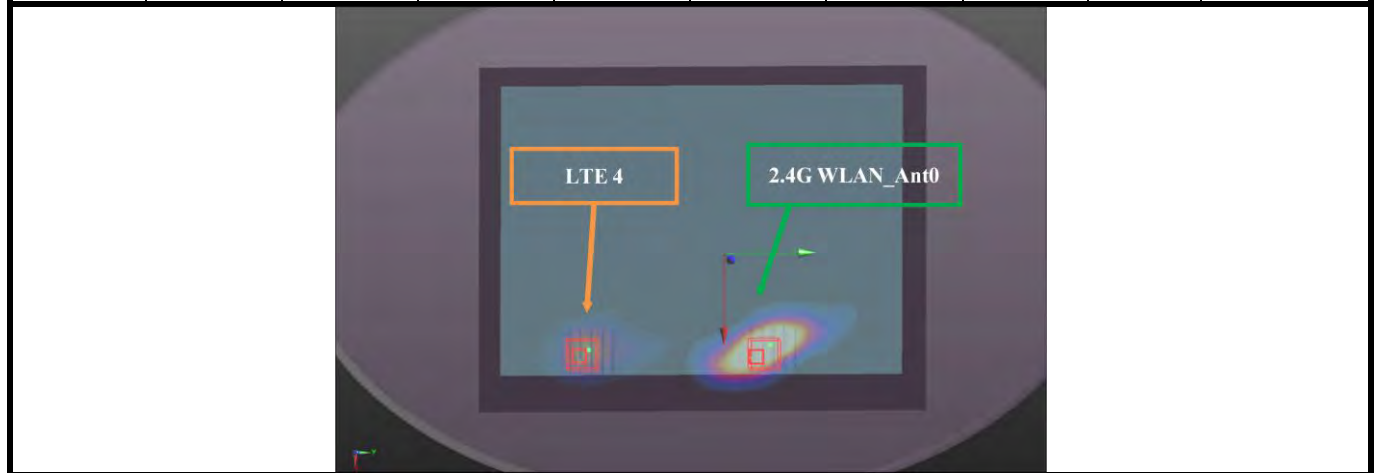


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 4 Ch20175     | Body               | Rear Face     | 0.53             | 88.2        | -87.3 | 1.75  | 203.8                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |




# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

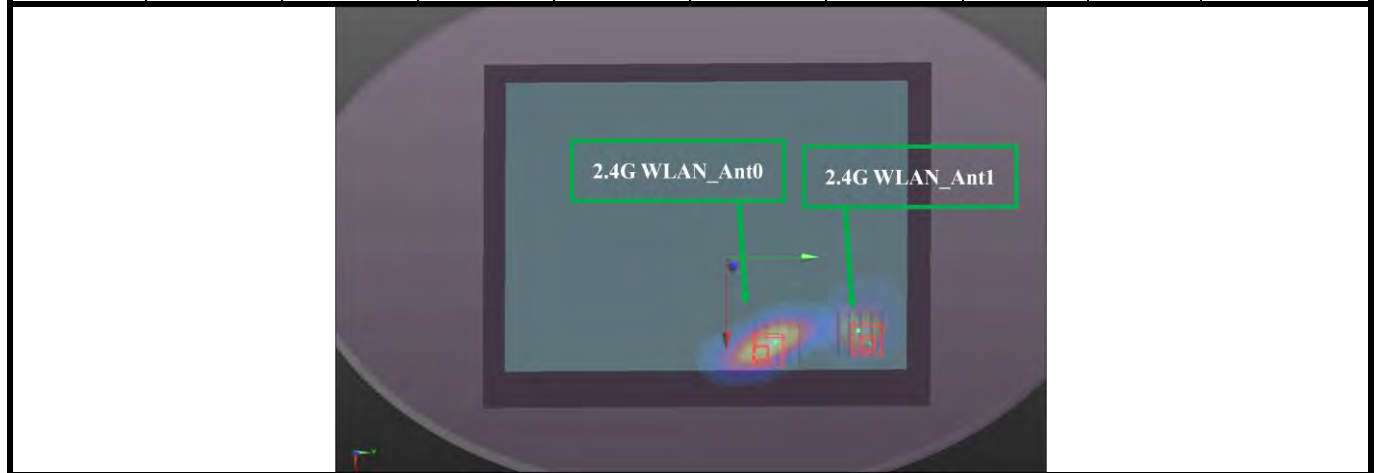


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 4 Ch20175       | Body               | Rear Face     | 0.53             | 88.2        | -87.3 | 1.75 | 107.7                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |

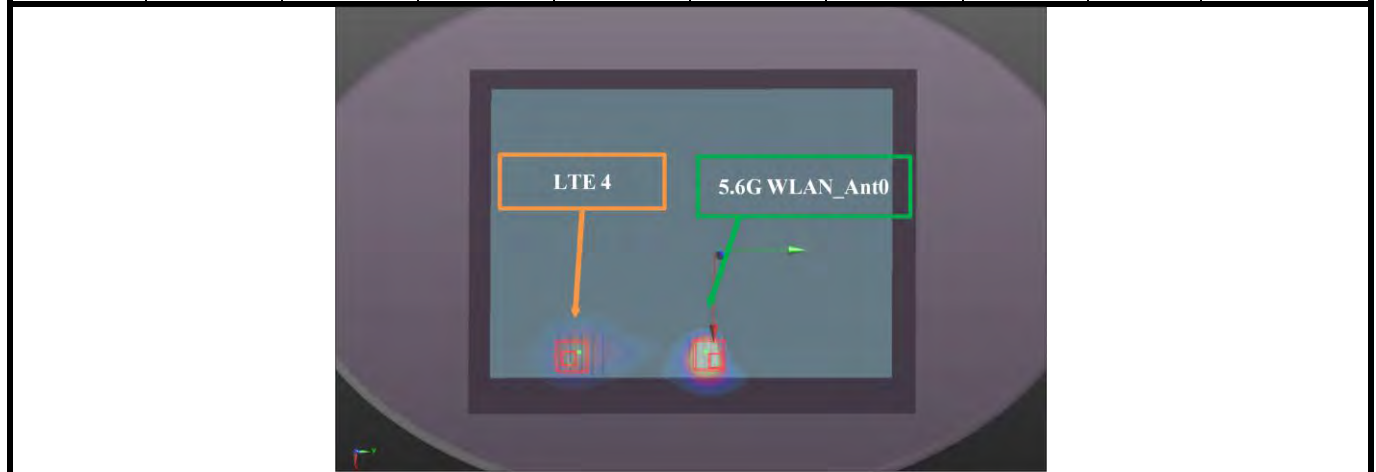


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 4 Ch20175       | Body               | Rear Face     | 0.53             | 88.2        | -87.3 | 1.75 | 199.0                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

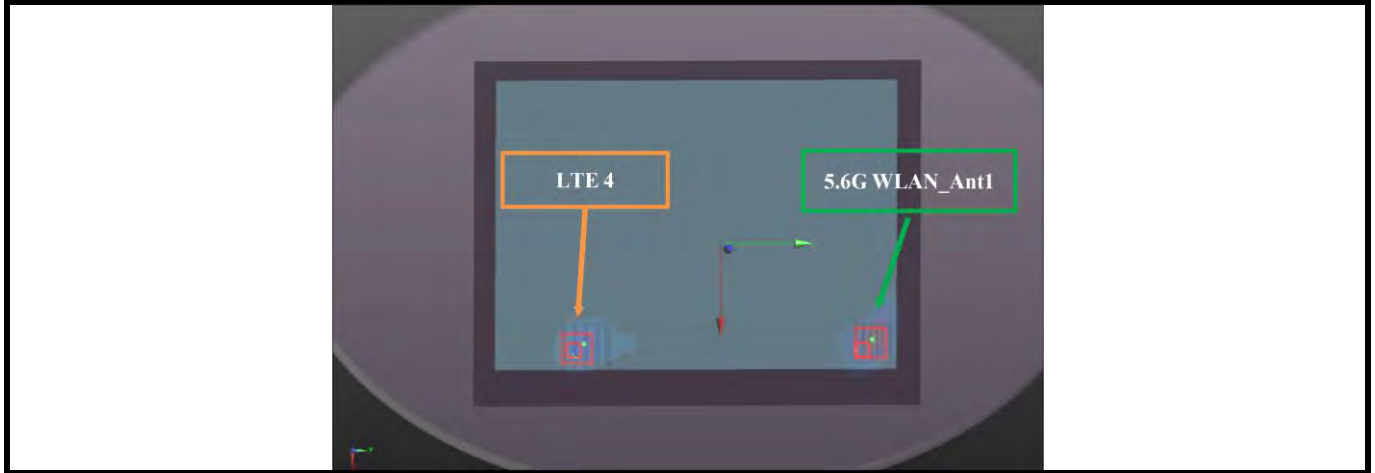

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

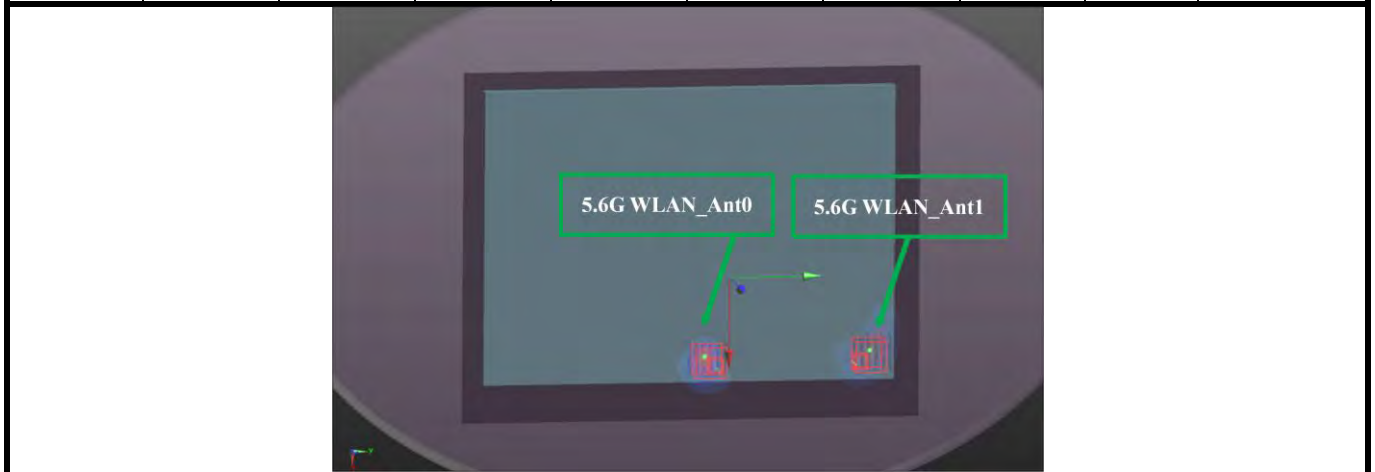


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |        |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|--------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y      | z    |                                                         |       |                                    |
| LTE 4 Ch20175       | Body               | Top Side      | 0.49             | -3.6        | -111.8 | 0.33 | 137.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4   | -5.3 |                                                         |       |                                    |



| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |        |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|--------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y      | z     |                                                         |       |                                    |
| LTE 4 Ch20175      | Body               | Top Side      | 0.49             | -3.6        | -111.8 | 0.33  | 223.8                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112    | -2.96 |                                                         |       |                                    |

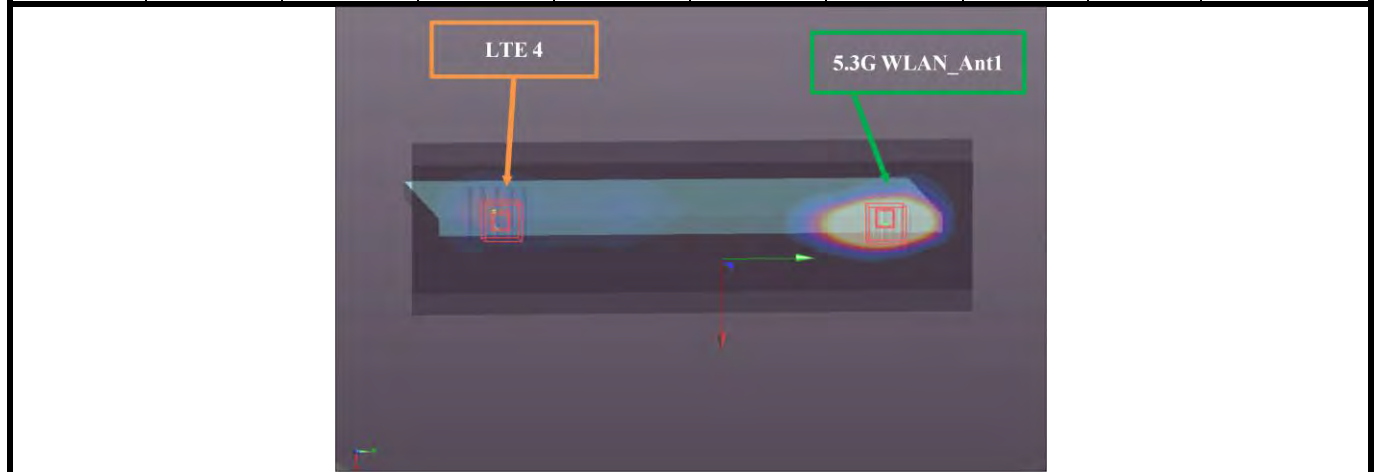


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |




| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 4 Ch20175       | Body               | Rear Face     | 0.53             | 88.2        | -87.3 | 1.75  | 118.9                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 9.66        | 2     | -0.12 |                                                         |       |                                    |

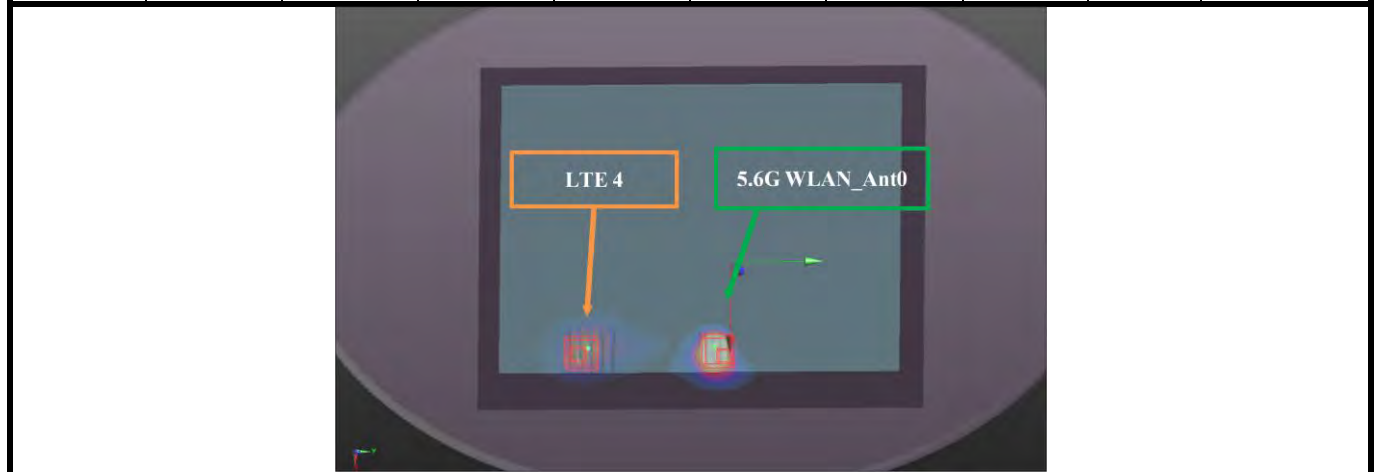

# FCC SAR Test Report

| Conditions    | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|               |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 4 Ch20175 | Body               | Rear Face     | 0.53             | 88.2        | -87.3 | 1.75 | 196.1                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39   |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

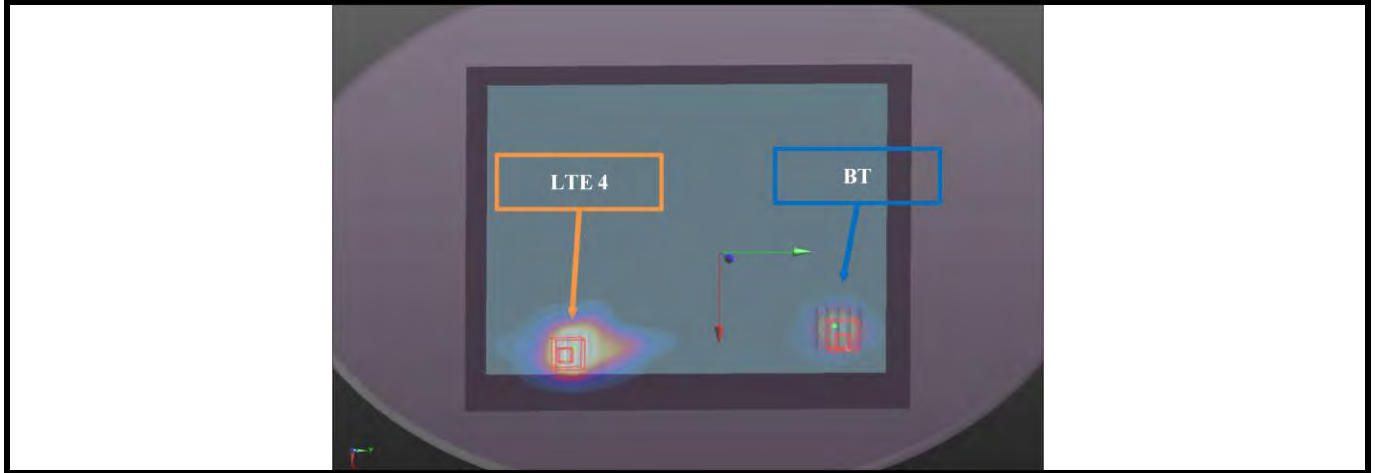


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 9.66        | 2     | -0.12 | 133.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |




# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 5 Ch20450     | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39  | 118.7                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

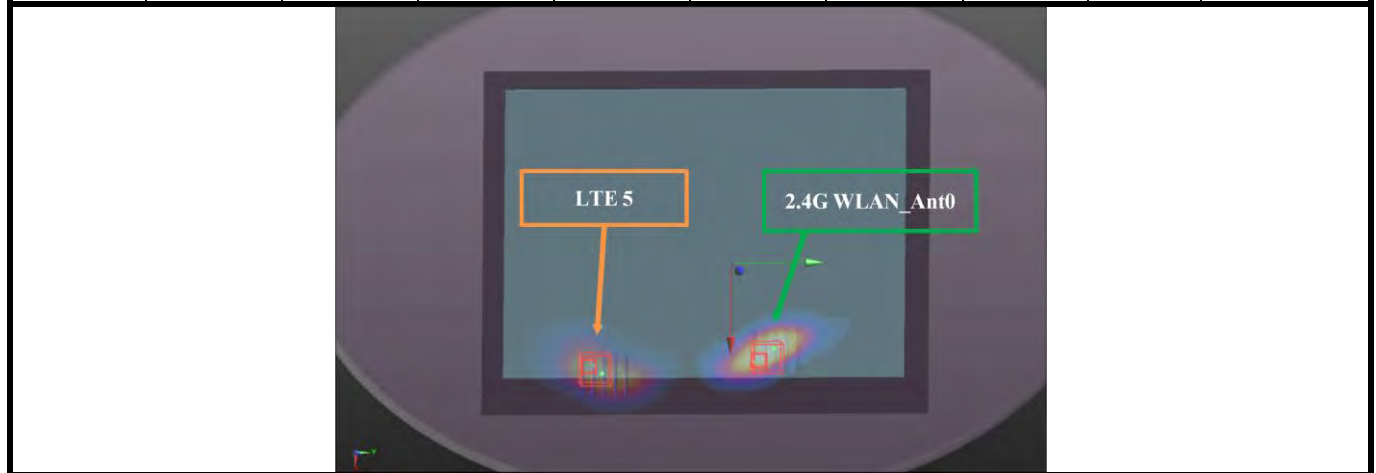


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 5 Ch20450     | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39  | 201.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

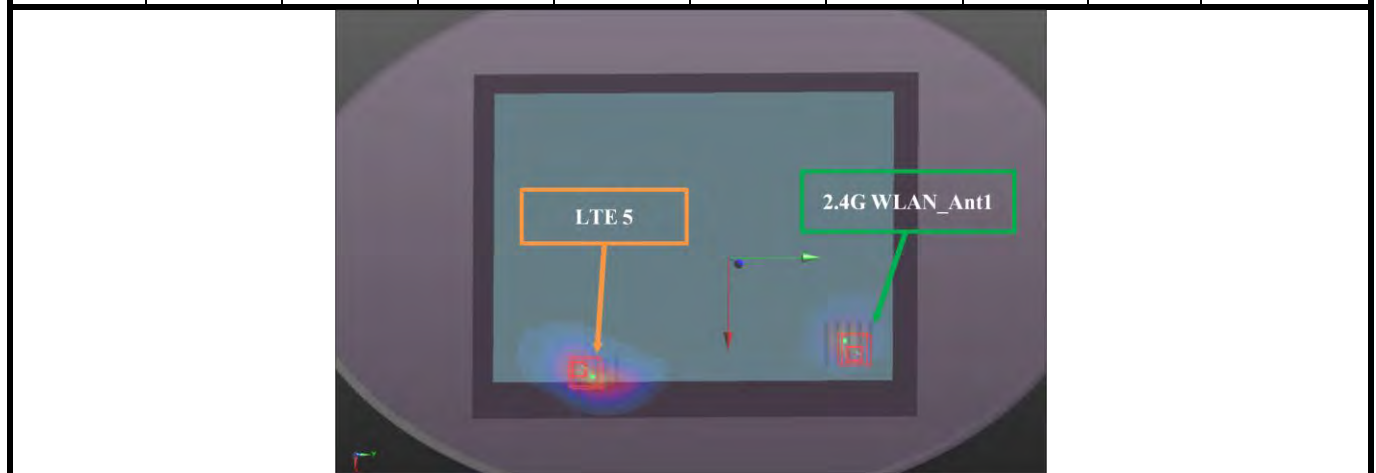




# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

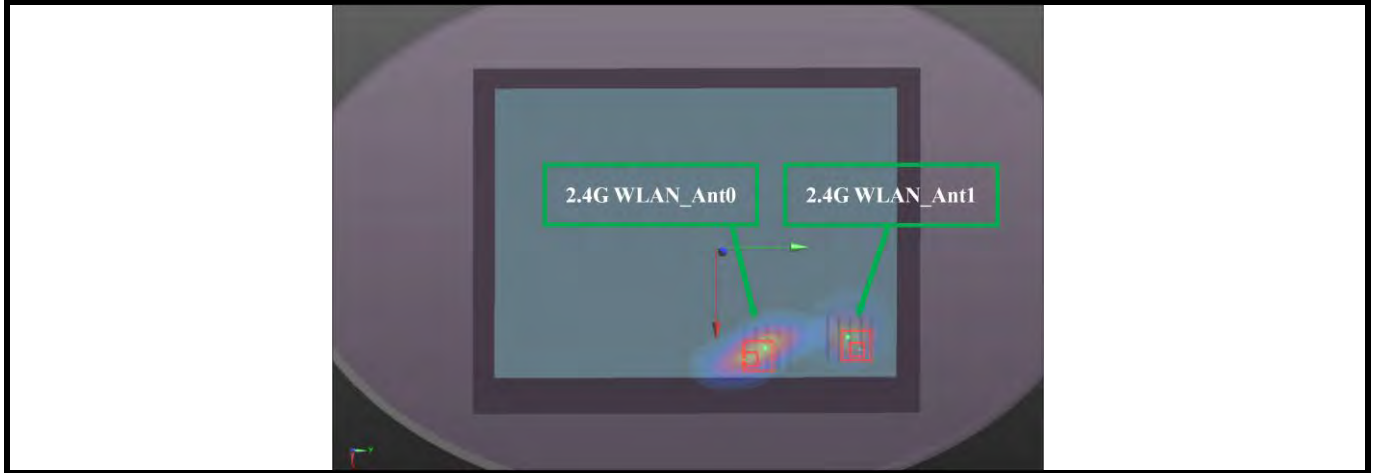


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 5 Ch20450       | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39 | 104.6                                                   | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |

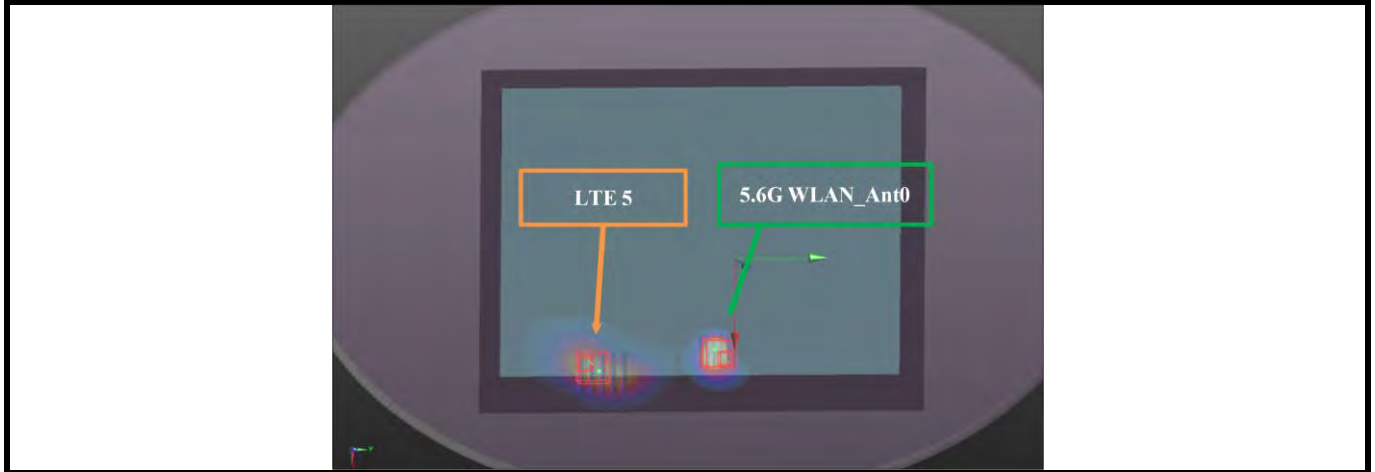



# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 5 Ch20450       | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39 | 196.2                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

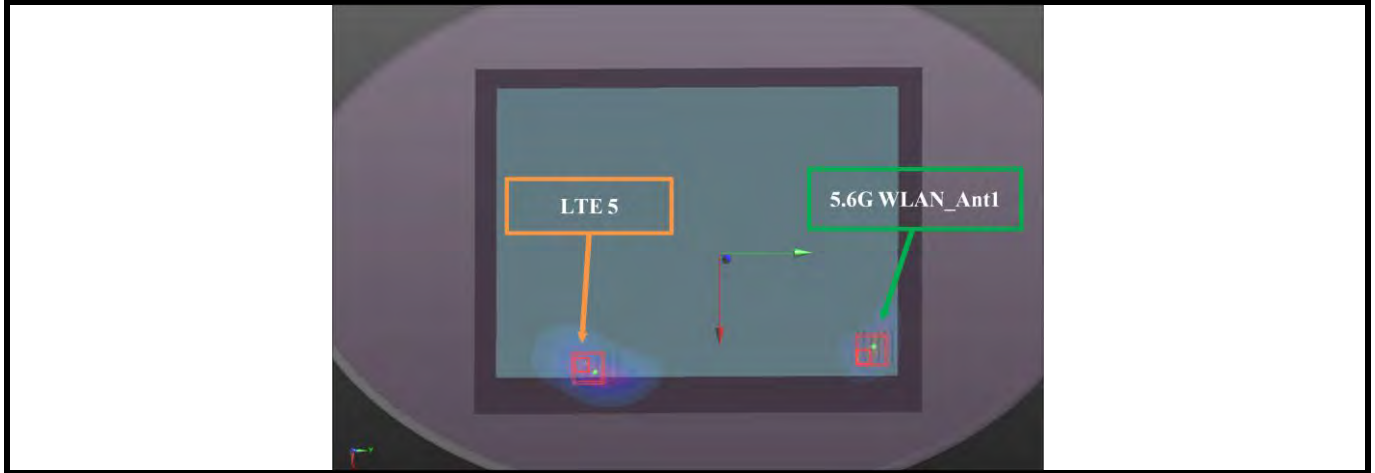


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |




# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 5 Ch20450       | Body               | Top Side      | 0.63             | -0.9        | -79  | -0.04 | 104.6                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4 | -5.3  |                                                         |       |                                    |

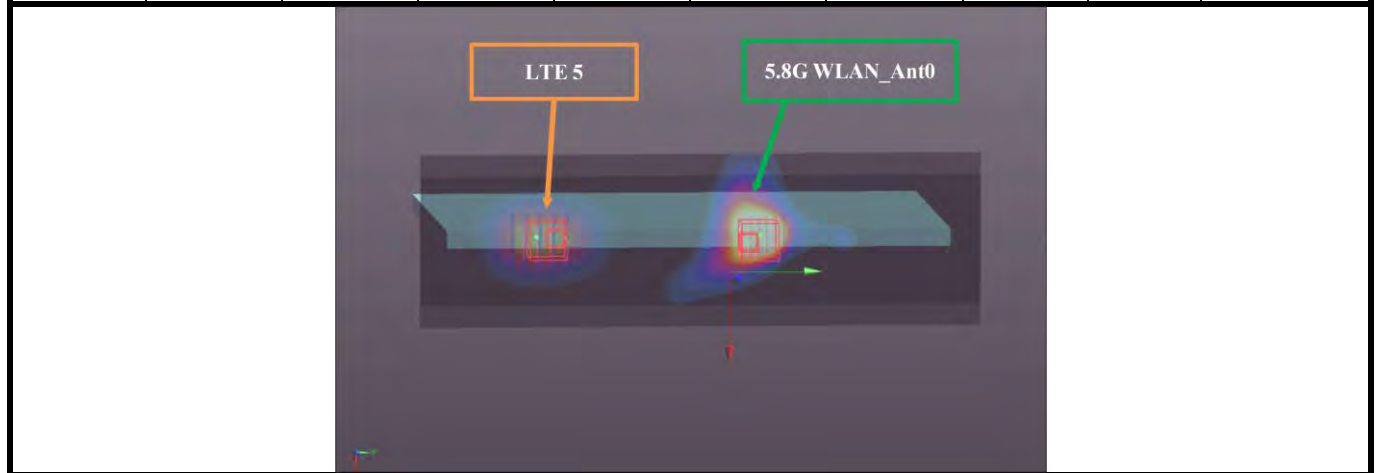


| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|-----|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y   | z     |                                                         |       |                                    |
| LTE 5 Ch20450      | Body               | Top Side      | 0.63             | -0.9        | -79 | -0.04 | 191.1                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112 | -2.96 |                                                         |       |                                    |

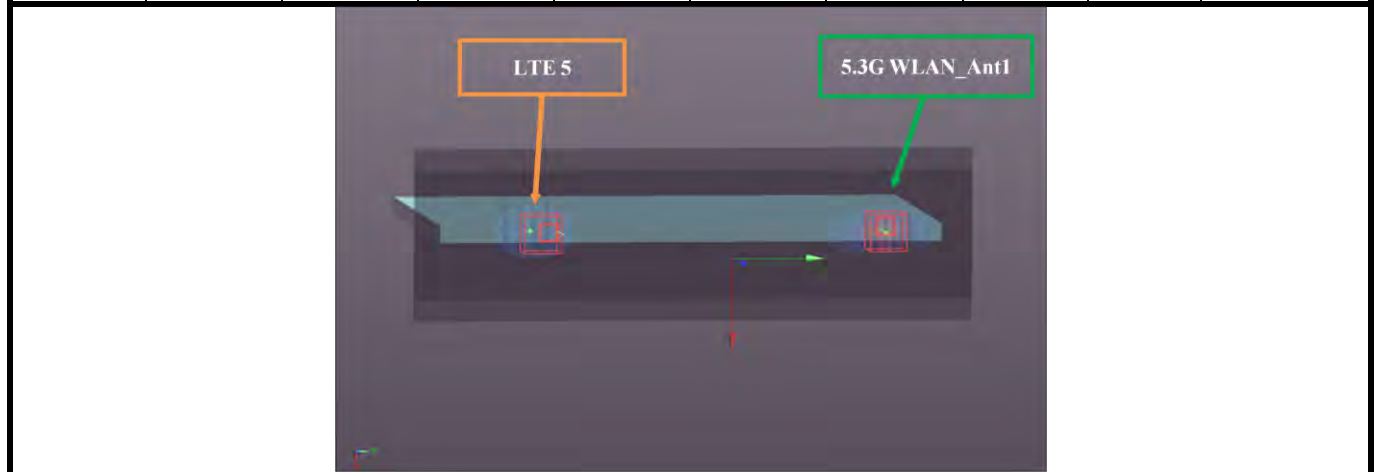


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

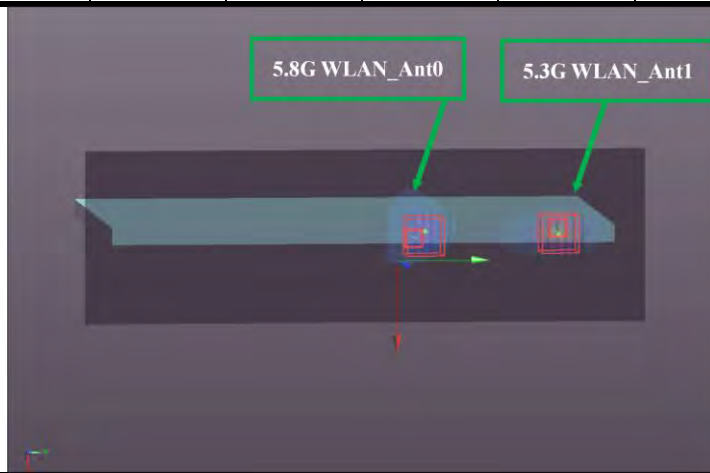


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 5 Ch20450     | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39  | 118.7                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

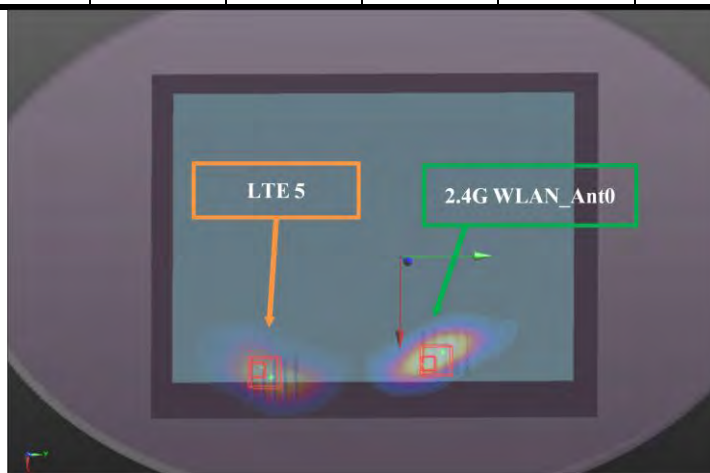


# FCC SAR Test Report

| Conditions    | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|               |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 5 Ch20450 | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39 | 193.5                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39   |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

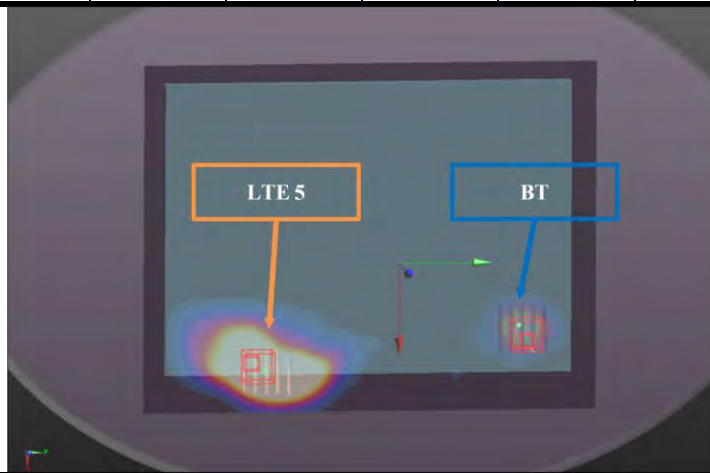


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 74.8                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39       |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

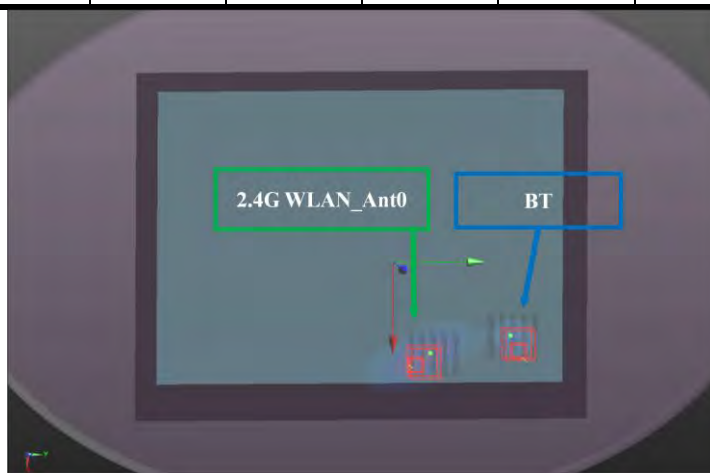


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 5 Ch20450       | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39  | 121.7                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 9.66        | 2     | -0.12 |                                                         |       |                                    |

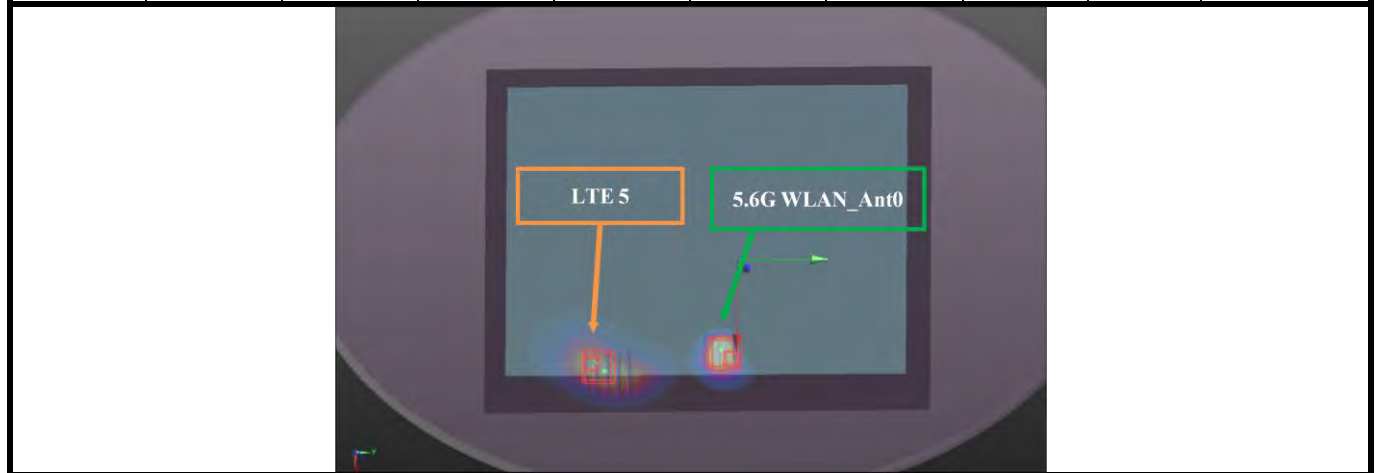


| Conditions    | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|               |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 5 Ch20450 | Body               | Rear Face     | 0.84             | 95.2        | -84.6 | 1.39 | 193.5                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39   |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

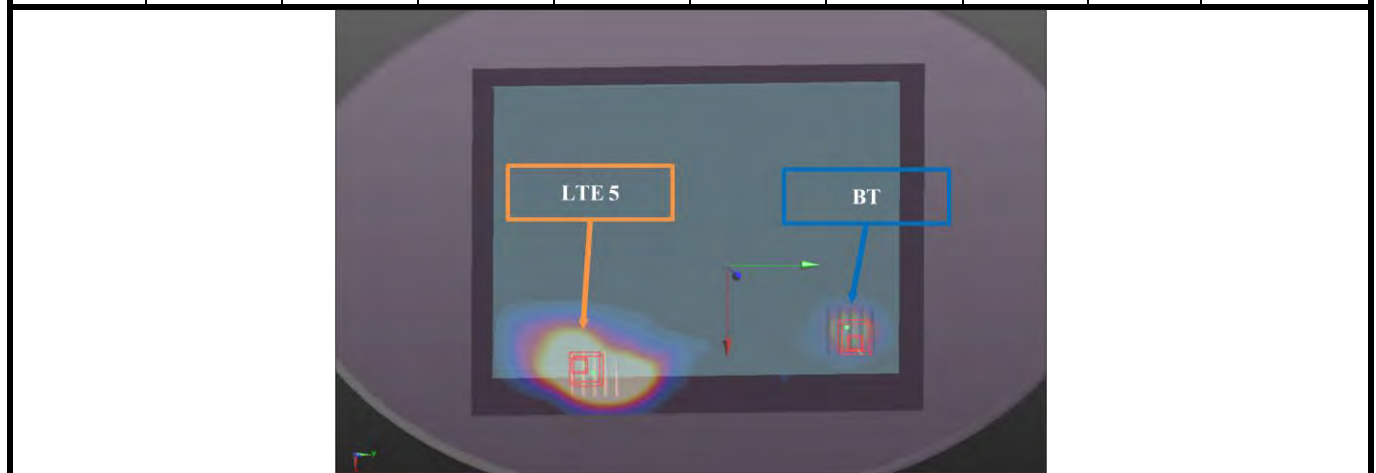

# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 9.66        | 2     | -0.12 | 133.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

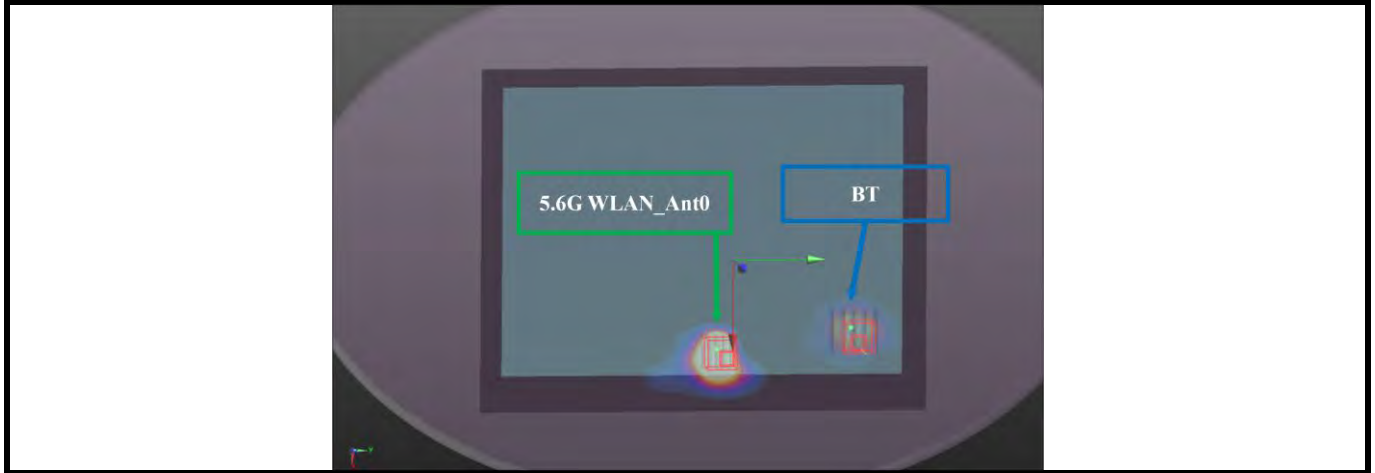


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 7 Ch21100       | Body               | Rear Face     | 0.38             | 100         | -91.6 | -2.53 | 111.7                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2  |                                                         |       |                                    |



# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 7 Ch21100       | Body               | Rear Face     | 0.38             | 100         | -91.6 | -2.53 | 203.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3  |                                                         |       |                                    |

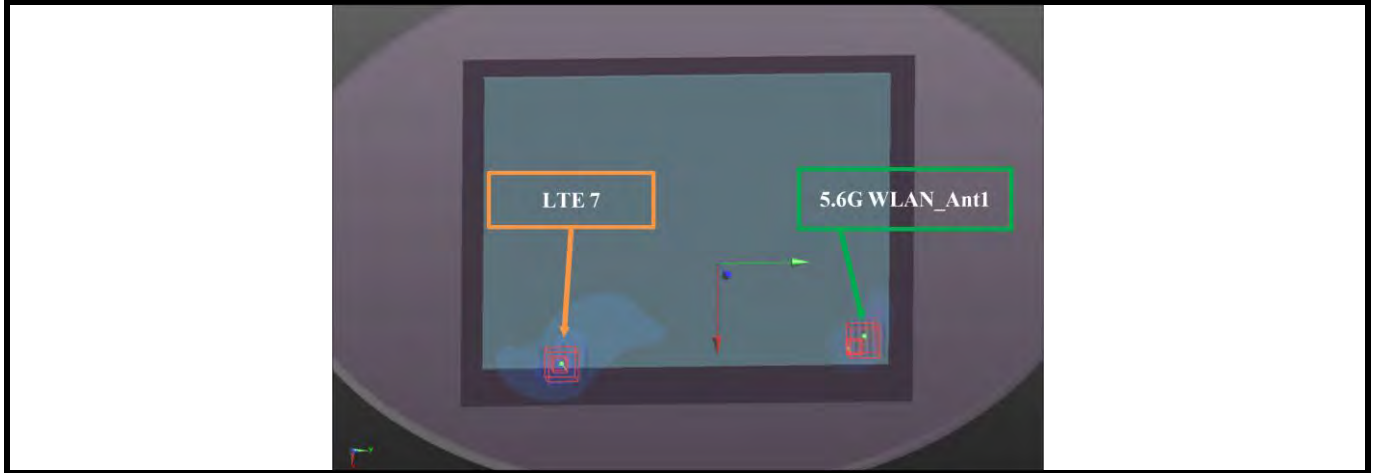


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |





# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 7 Ch21100       | Body               | Top Side      | 0.47             | -2.5        | -55.6 | -3.43 | 81.0                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3  |                                                         |       |                                    |

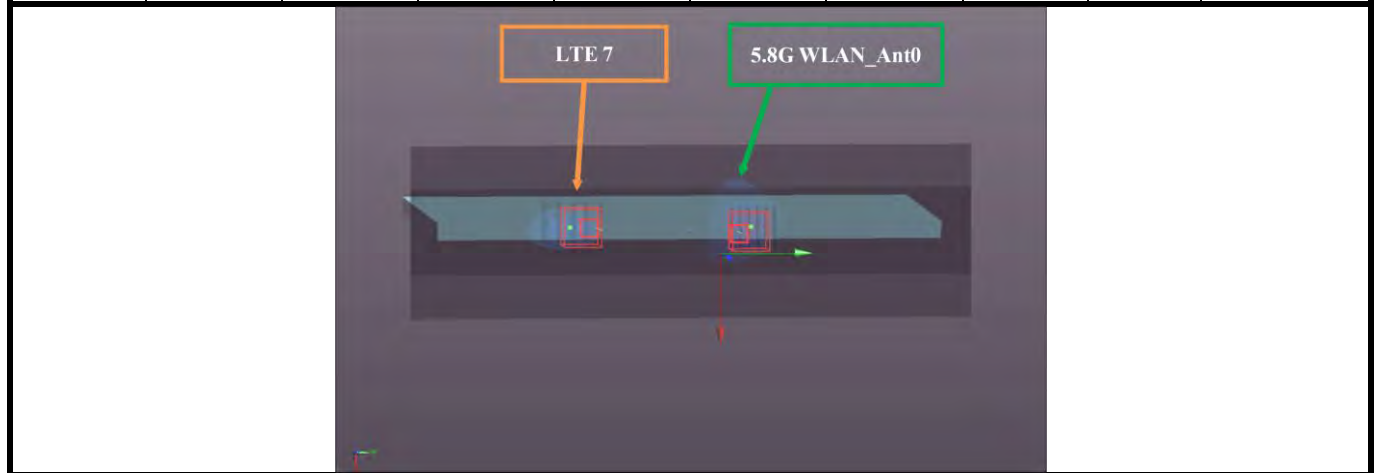


| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 7 Ch21100      | Body               | Top Side      | 0.47             | -2.5        | -55.6 | -3.43 | 167.6                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112   | -2.96 |                                                         |       |                                    |






# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

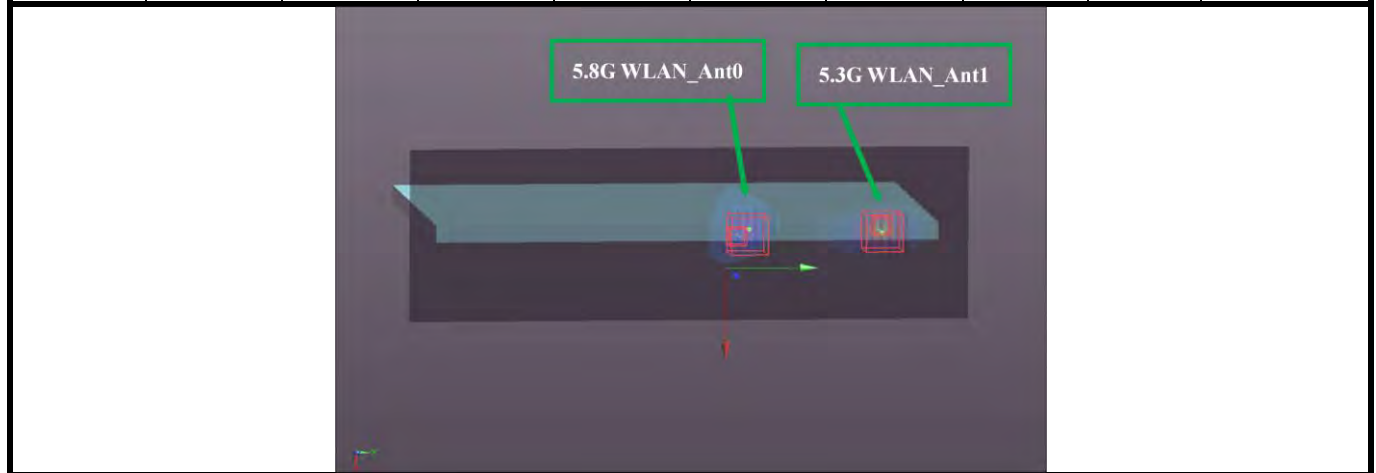

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 7 Ch21100       | Body               | Rear Face     | 0.38             | 100         | -91.6 | -2.53 | 130.1                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 Ant0 |                    |               | 1.06             | 9.66        | 2     | -0.12 |                                                         |       |                                    |

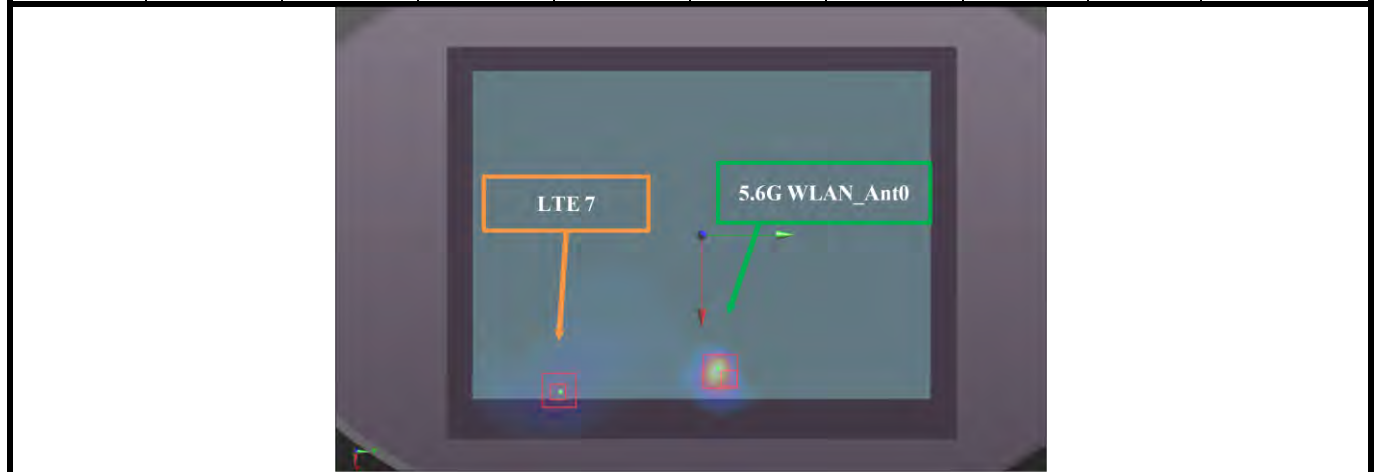


# FCC SAR Test Report

| Conditions    | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|               |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 7 Ch21100 | Body               | Rear Face     | 0.38             | 100         | -91.6 | -2.53 | 200.7                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT Ch39       |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |




| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN5600 Ch100 Ant0 | Body               | Rear Face     | 1.06             | 9.66        | 2     | -0.12 | 133.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT Ch39             |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

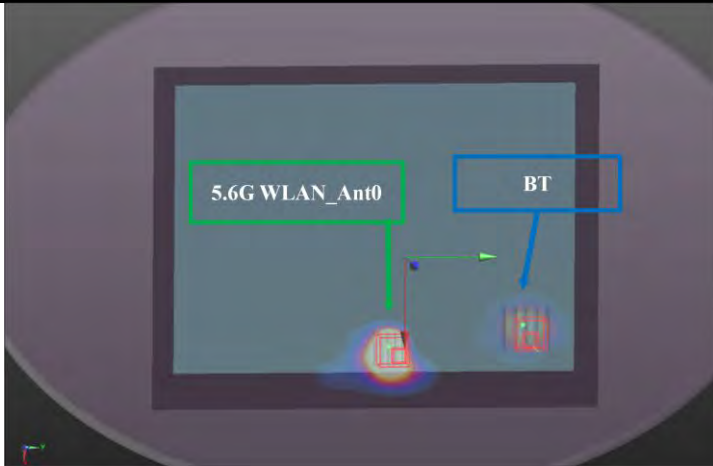


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 Ch23095    | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 107.9                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

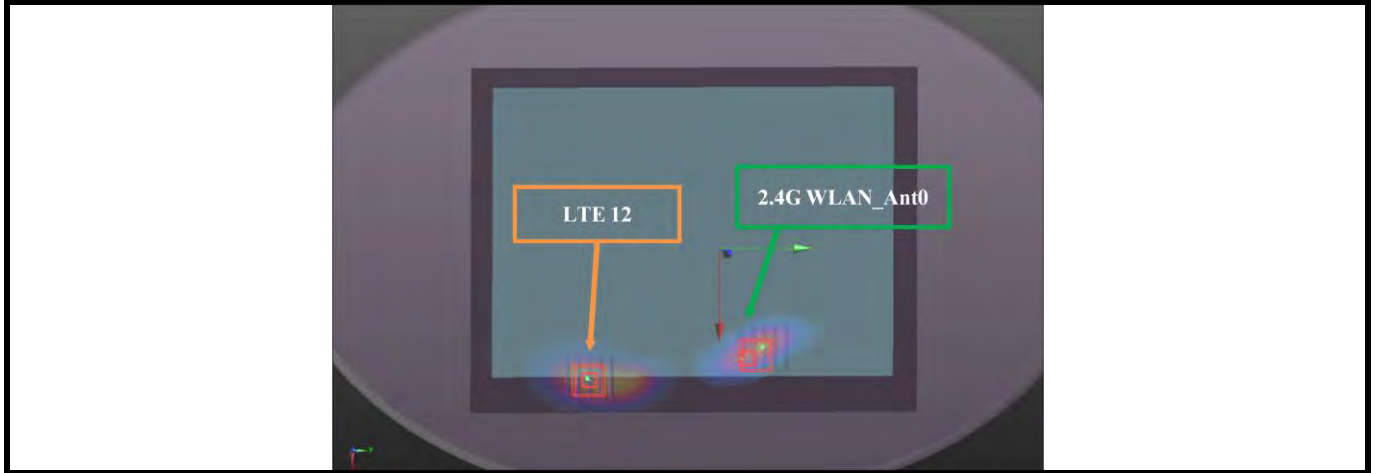


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 Ch23095    | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 190.4                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

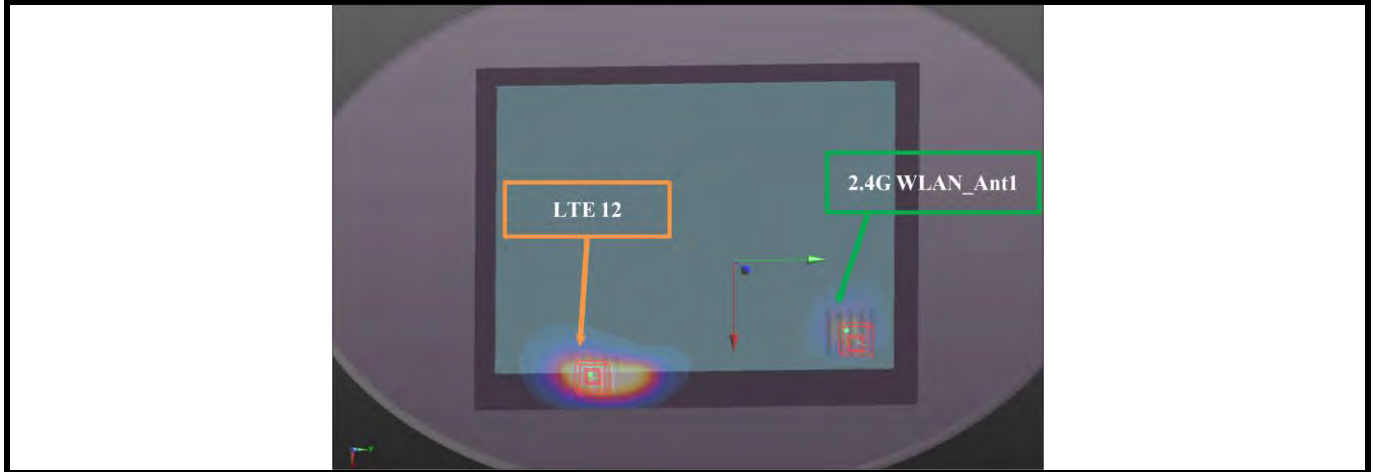


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

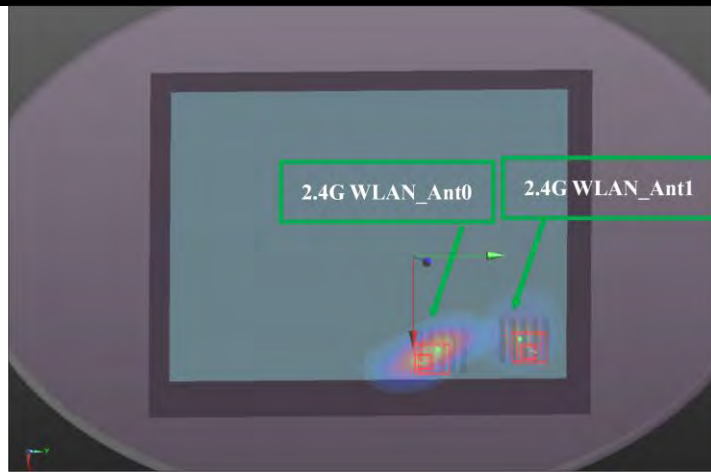


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 Ch23095      | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 93.2                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2  |                                                         |       |                                    |

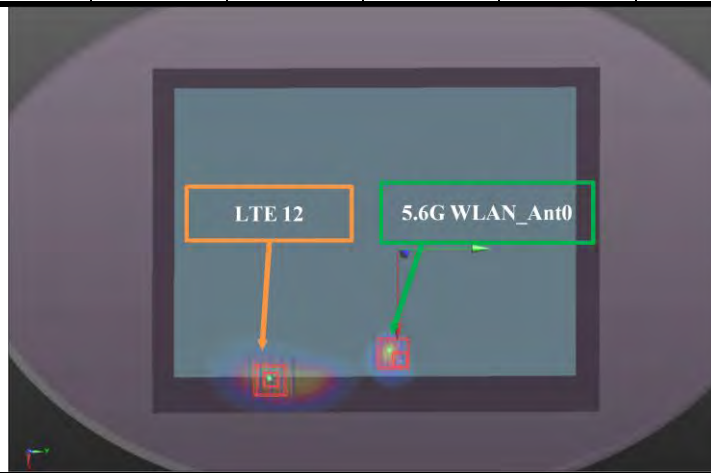


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 Ch23095      | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 184.7                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3  |                                                         |       |                                    |

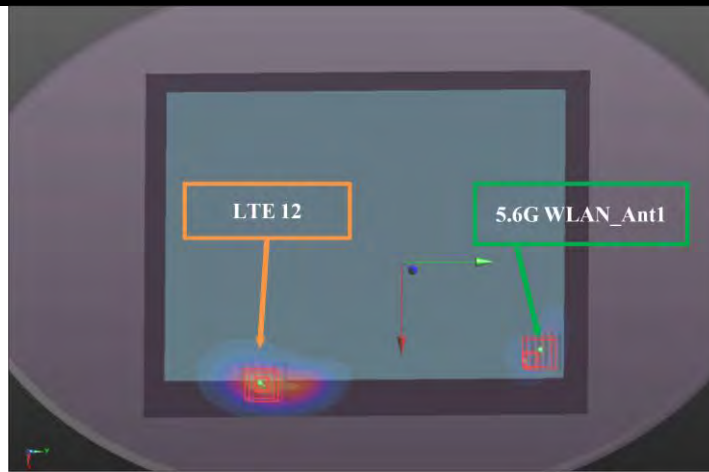


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

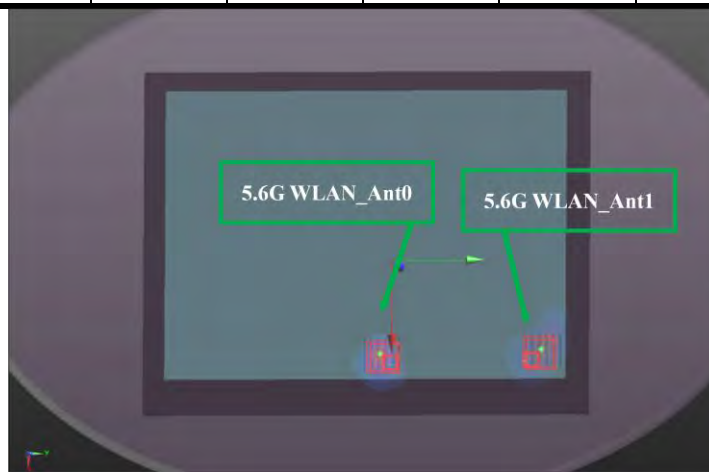


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 12 Ch23095      | Body               | Top Side      | 1.04             | 4.1         | -70  | -4.22 | 95.7                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4 | -5.3  |                                                         |       |                                    |

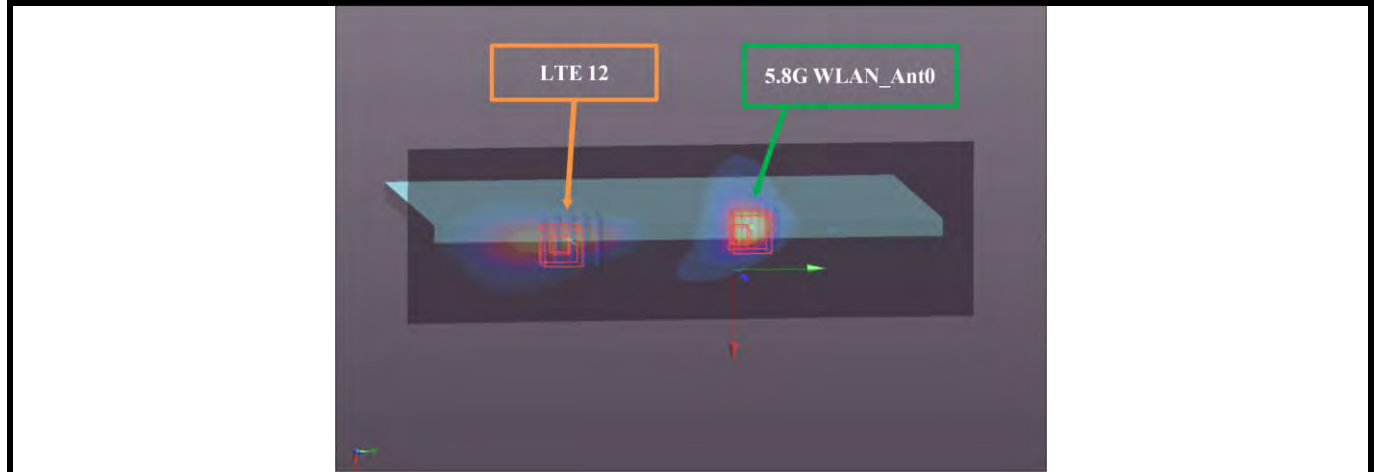


| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|-----|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y   | z     |                                                         |       |                                    |
| LTE 12 Ch23095     | Body               | Top Side      | 1.04             | 4.1         | -70 | -4.22 | 182.2                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112 | -2.96 |                                                         |       |                                    |

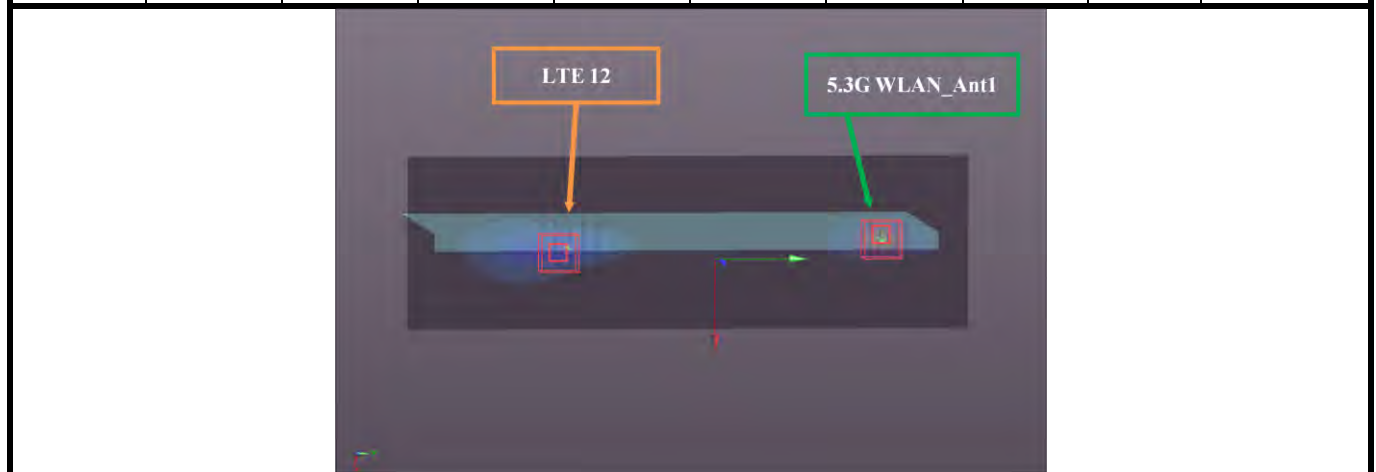

# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

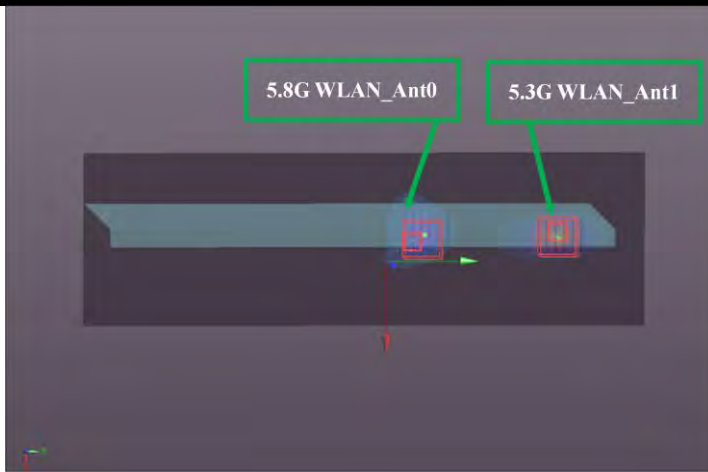


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 Ch23095    | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 107.9                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |






# FCC SAR Test Report

| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 Ch23095 | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 182.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39    |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

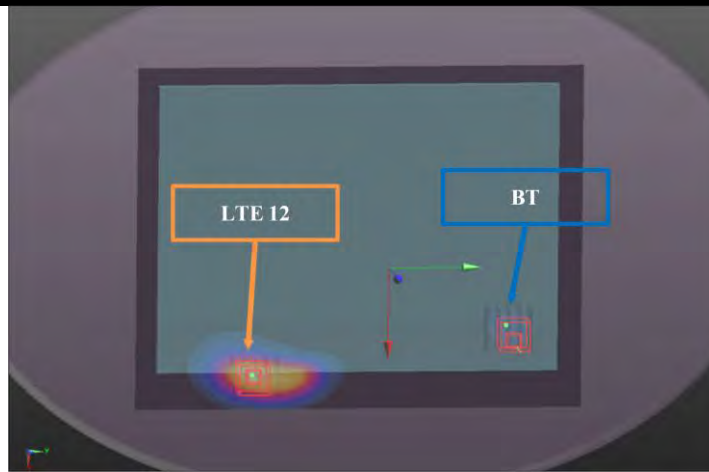


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 74.8                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39       |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

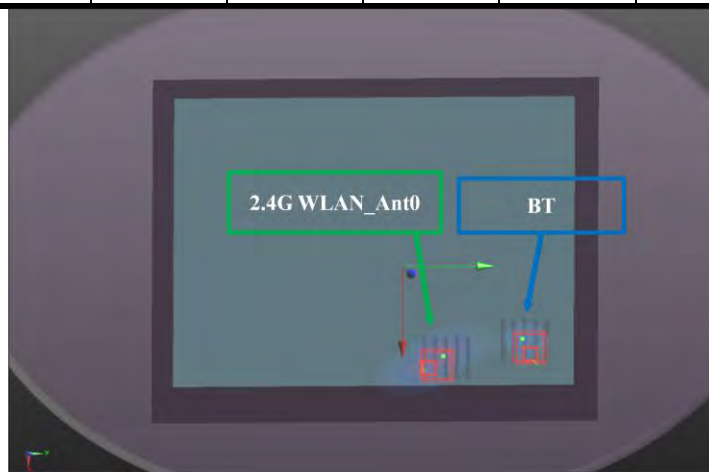




# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 Ch23095      | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 122.4                                                   | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 9.66        | 2     | -0.12 |                                                         |       |                                    |

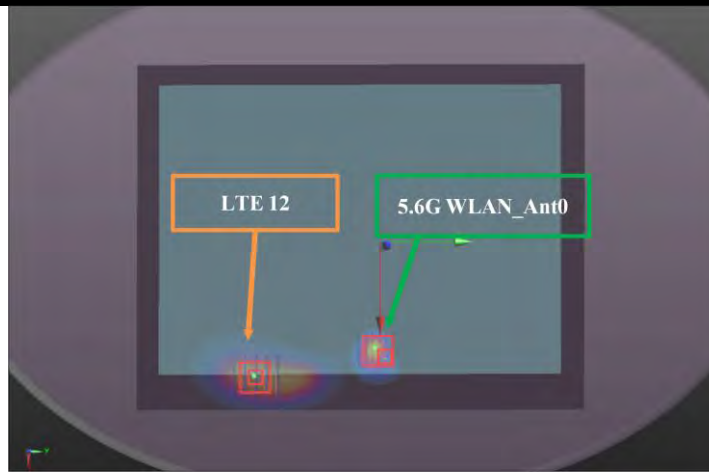

| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 12 Ch23095 | Body               | Rear Face     | 1.08             | 106.6       | -72.7 | -1.43 | 182.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39    |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

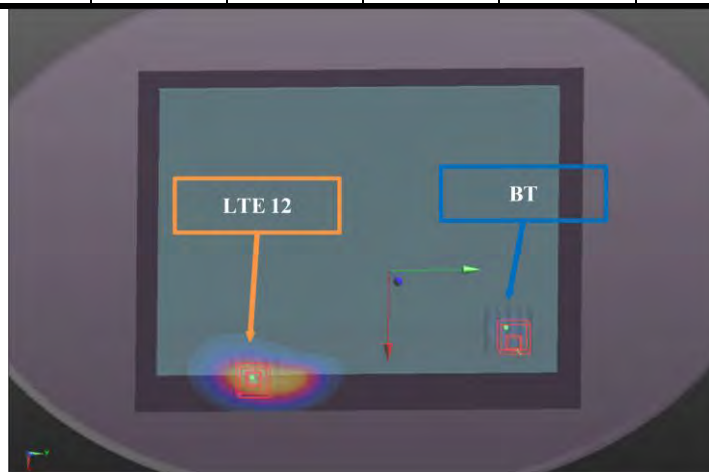


# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN5600<br>Ch100 ANT0 | Body               | Rear Face     | 1.06             | 9.66        | 2     | -0.12 | 133.3                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |




| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 12<br>Ch23095      | Body               | Top Side      | 1.04             | 4.1         | -70  | -4.22 | 95.7                                                    | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5800<br>Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4 | -5.3  |                                                         |       |                                    |

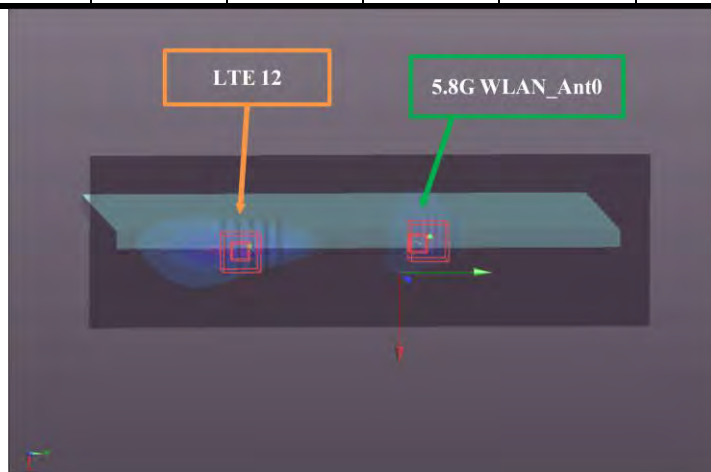


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 12<br>Ch23095 | Body               | Top Side      | 1.04             | 4.1         | -70  | -4.22 | 166.2                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39    |                    |               | 0.07             | -40         | 90.2 | -2.8  |                                                         |       |                                    |

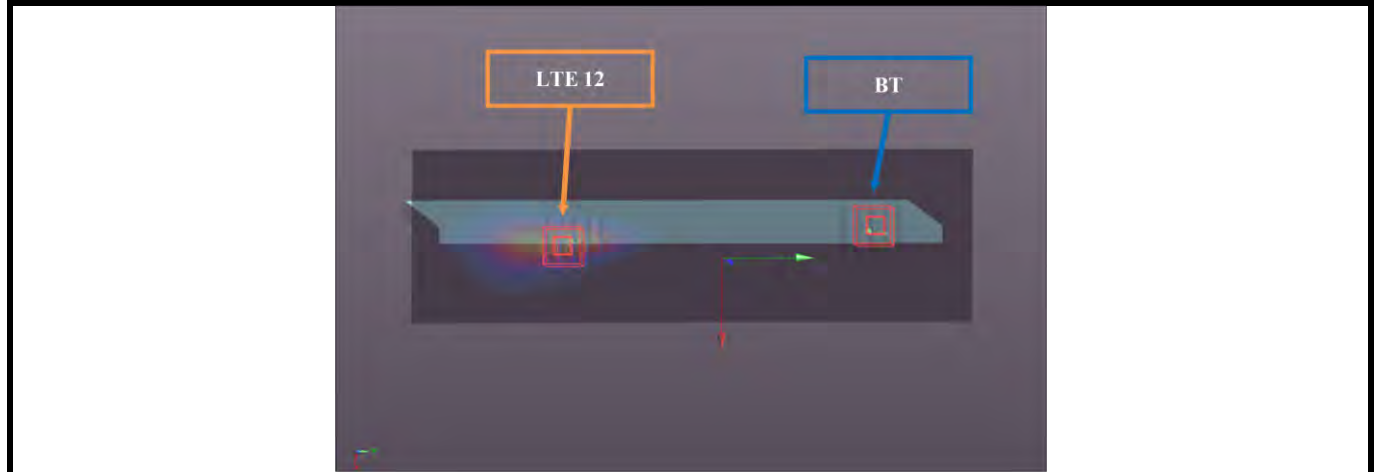


| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z    |                                                         |       |                                    |
| WLAN5800<br>Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3 | 74.2                                                    | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39         |                    |               | 0.07             | -40         | 90.2 | -2.8 |                                                         |       |                                    |

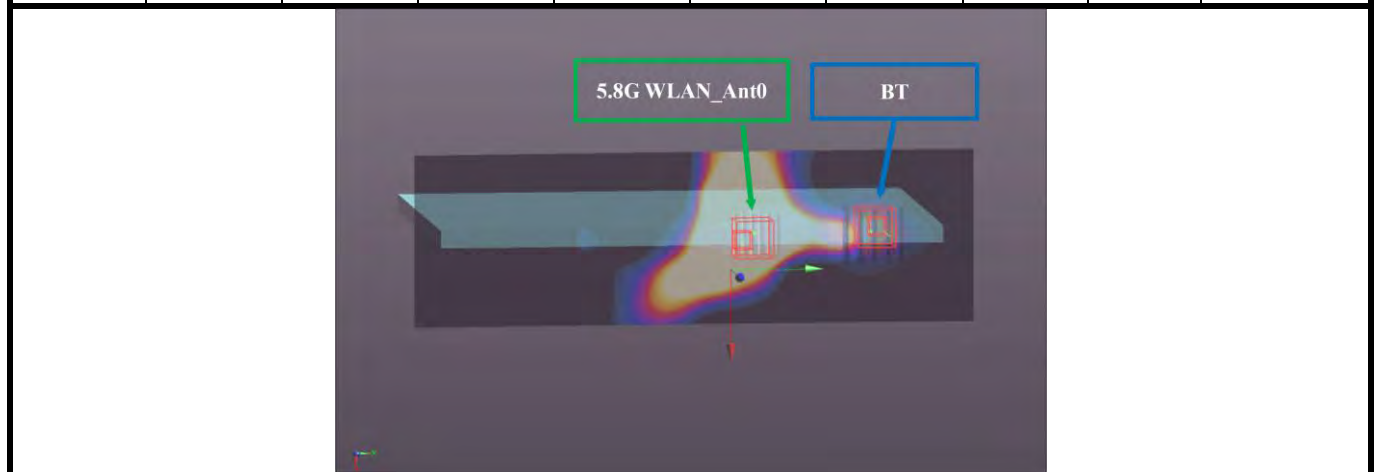


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-----|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y   | z     |                                                         |       |                                    |
| LTE 13 Ch23230    | Body               | Rear Face     | 0.86             | 108.2       | -59 | -1.4  | 94.7                                                    | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34  | -0.81 |                                                         |       |                                    |

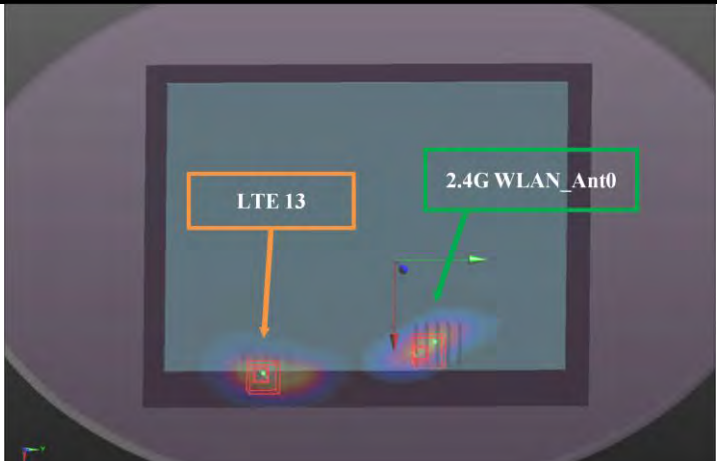

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 13 Ch23230    | Body               | Rear Face     | 0.86             | 108.2       | -59   | -1.4  | 177.0                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

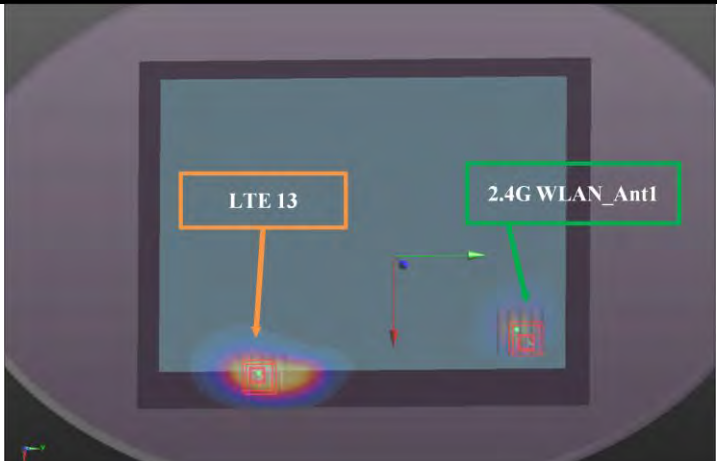


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |




| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-----|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y   | z    |                                                         |       |                                    |
| LTE 13 Ch23230      | Body               | Rear Face     | 0.86             | 108.2       | -59 | -1.4 | 79.8                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20  | -1.2 |                                                         |       |                                    |

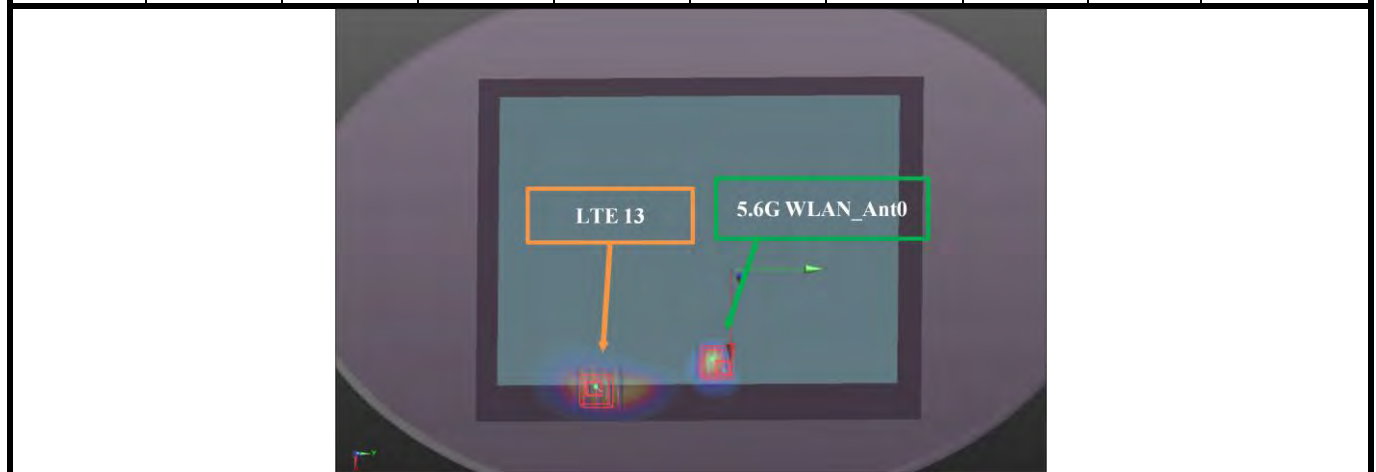


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 13 Ch23230      | Body               | Rear Face     | 0.86             | 108.2       | -59   | -1.4 | 171.2                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

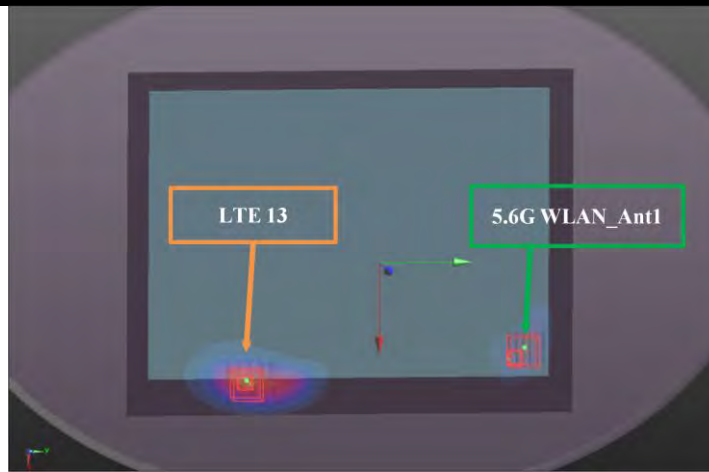


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

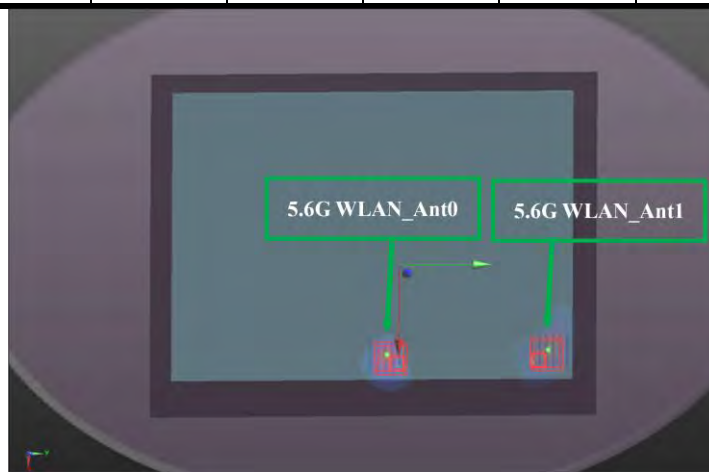


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 13 Ch23230      | Body               | Top Side      | 0.73             | 2.5         | -76.5 | -3.61 | 102.1                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3  |                                                         |       |                                    |

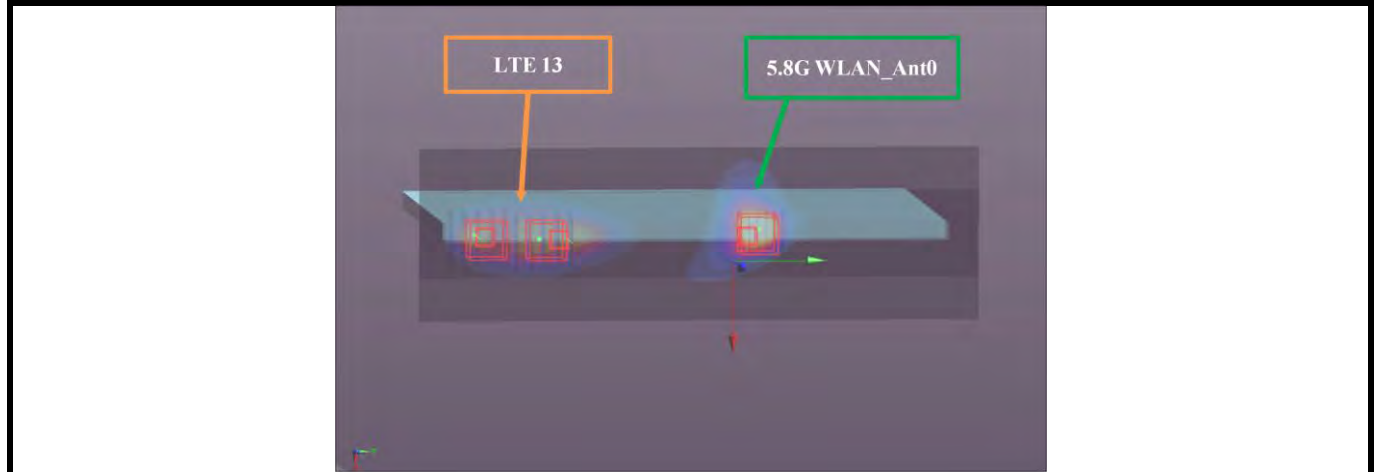


| Conditions         | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|--------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                    |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 13 Ch23230     | Body               | Top Side      | 0.73             | 2.5         | -76.5 | -3.61 | 188.6                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112   | -2.96 |                                                         |       |                                    |

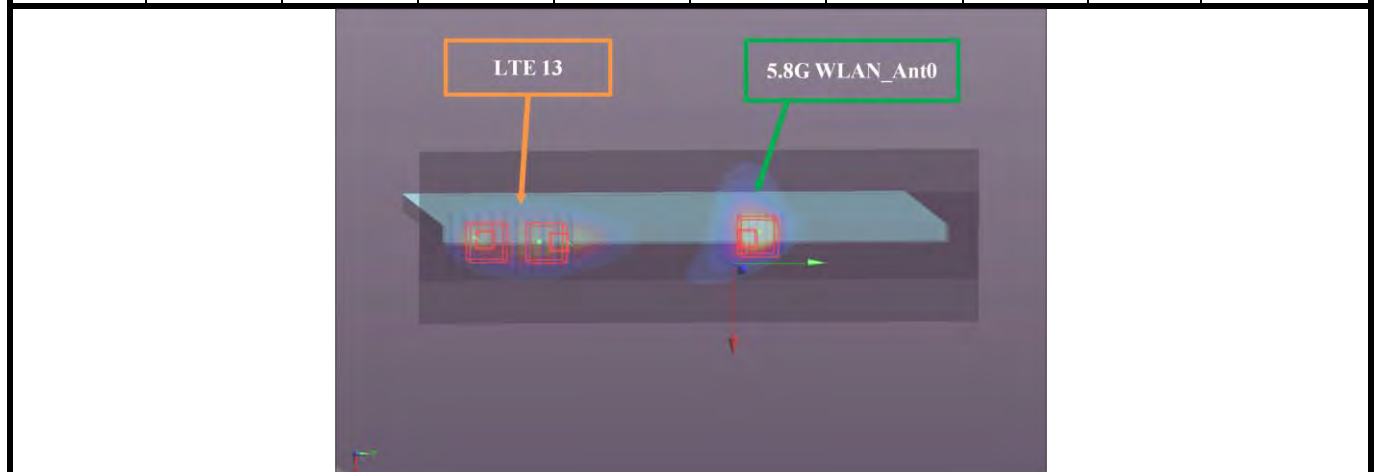




# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

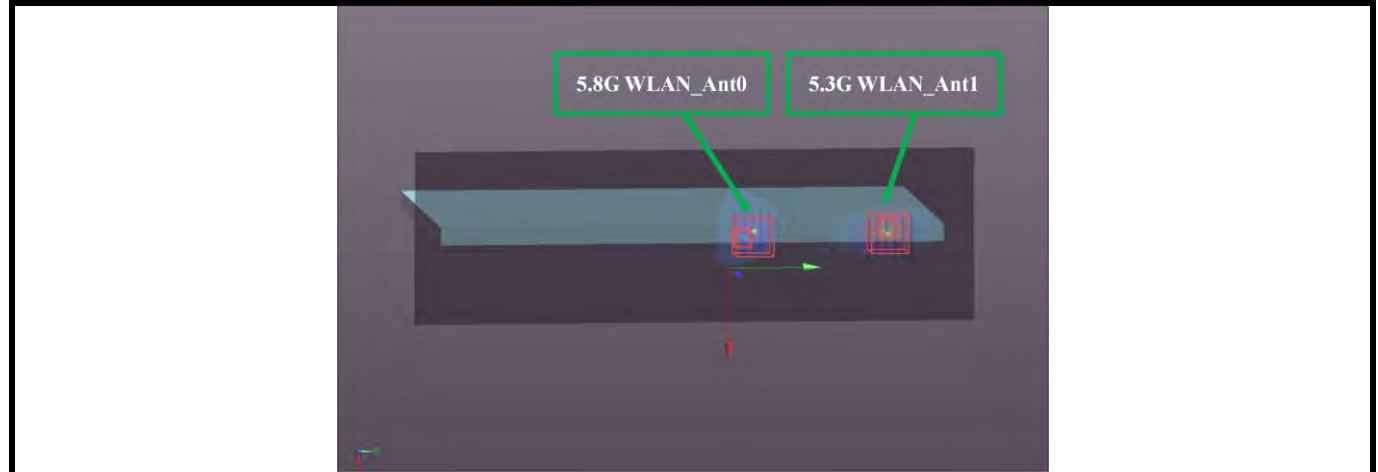


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-----|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y   | z     |                                                         |       |                                    |
| LTE 13 Ch23230    | Body               | Rear Face     | 0.86             | 108.2       | -59 | -1.4  | 94.7                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34  | -0.81 |                                                         |       |                                    |

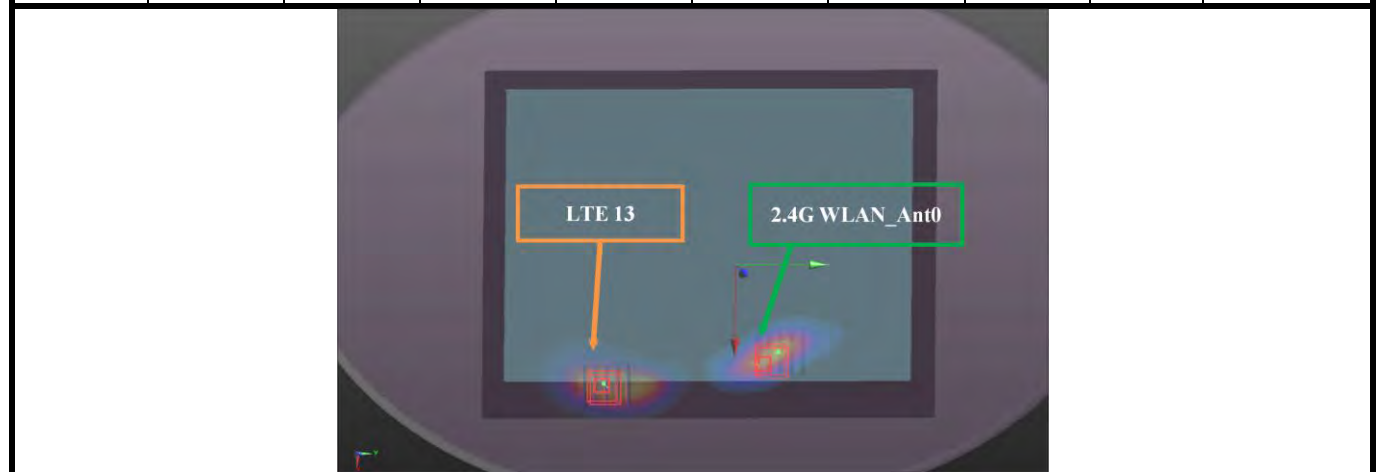




# FCC SAR Test Report

| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 13 Ch23230 | Body               | Rear Face     | 0.86             | 108.2       | -59   | -1.4 | 168.9                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39    |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

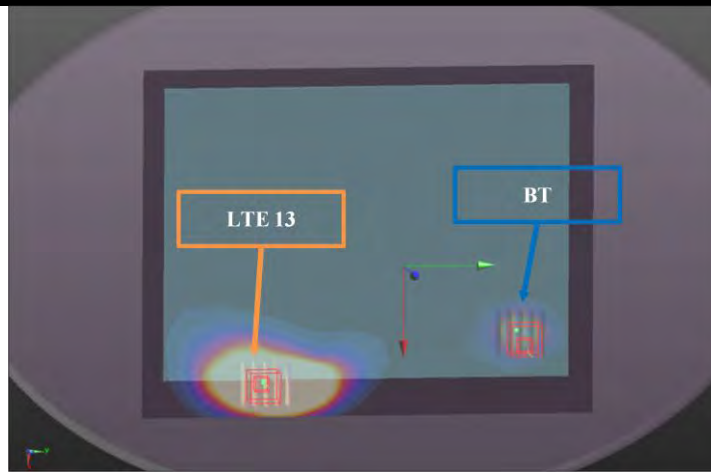


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 74.8                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39       |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

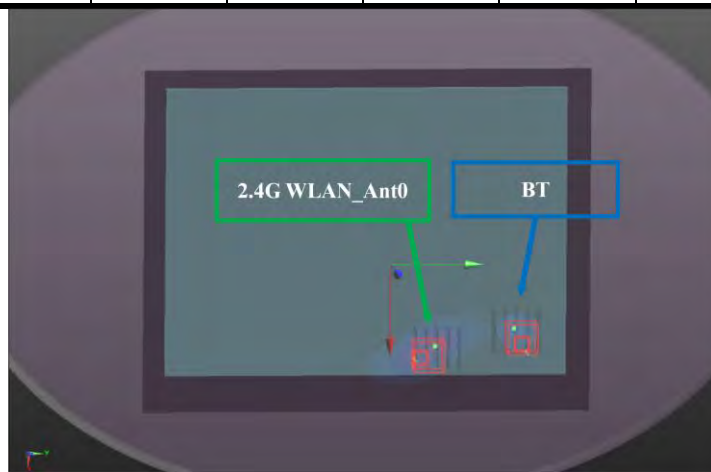


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-----|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y   | z     |                                                         |       |                                    |
| LTE 13 Ch23230      | Body               | Rear Face     | 0.86             | 108.2       | -59 | -1.4  | 115.9                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 9.66        | 2   | -0.12 |                                                         |       |                                    |

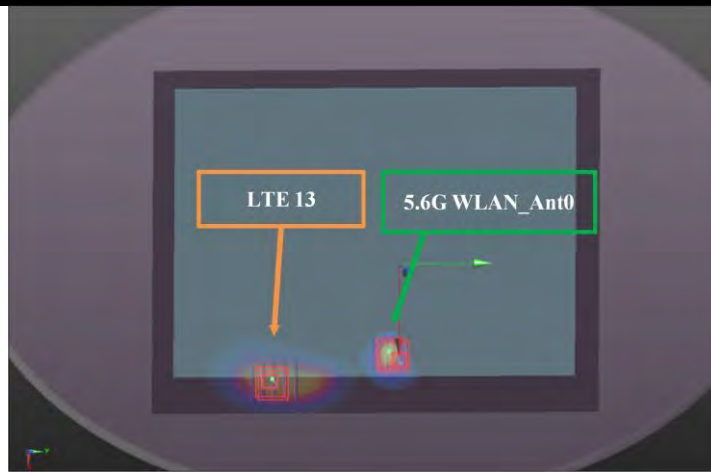


| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 13 Ch23230 | Body               | Rear Face     | 0.86             | 108.2       | -59   | -1.4 | 168.9                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39    |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

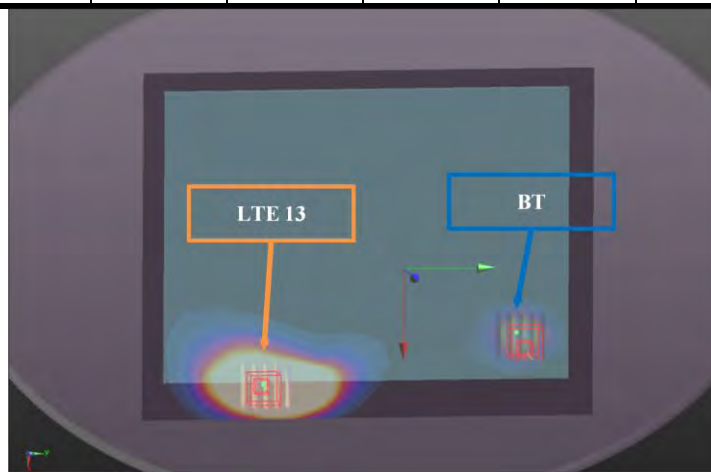


# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN5600<br>Ch100 ANT0 | Body               | Rear Face     | 1.06             | 9.66        | 2     | -0.12 | 133.3                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

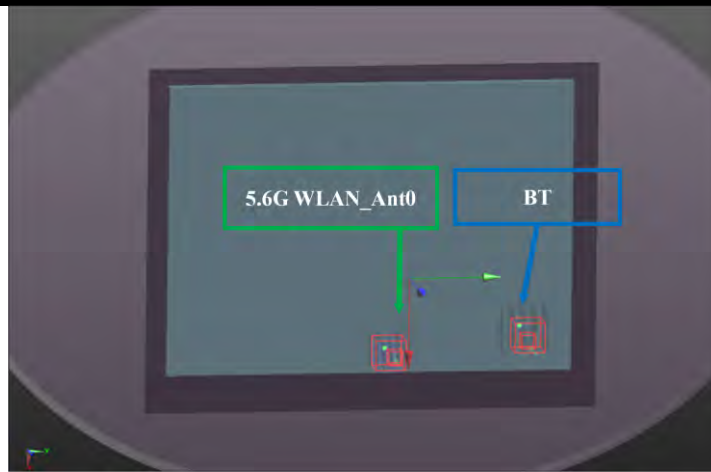


| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 13<br>Ch23230      | Body               | Top Side      | 0.73             | 2.5         | -76.5 | -3.61 | 102.1                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5800<br>Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3  |                                                         |       |                                    |

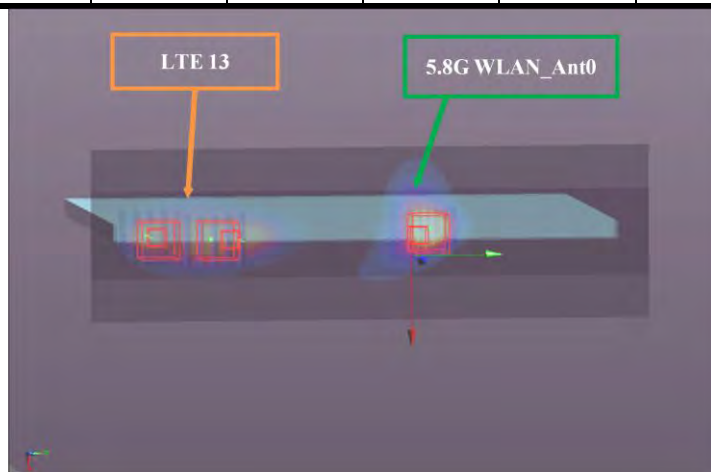


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 13<br>Ch23230 | Body               | Top Side      | 0.73             | 2.5         | -76.5 | -3.61 | 172.0                                                   | 0.00  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39    |                    |               | 0.07             | -40         | 90.2  | -2.8  |                                                         |       |                                    |

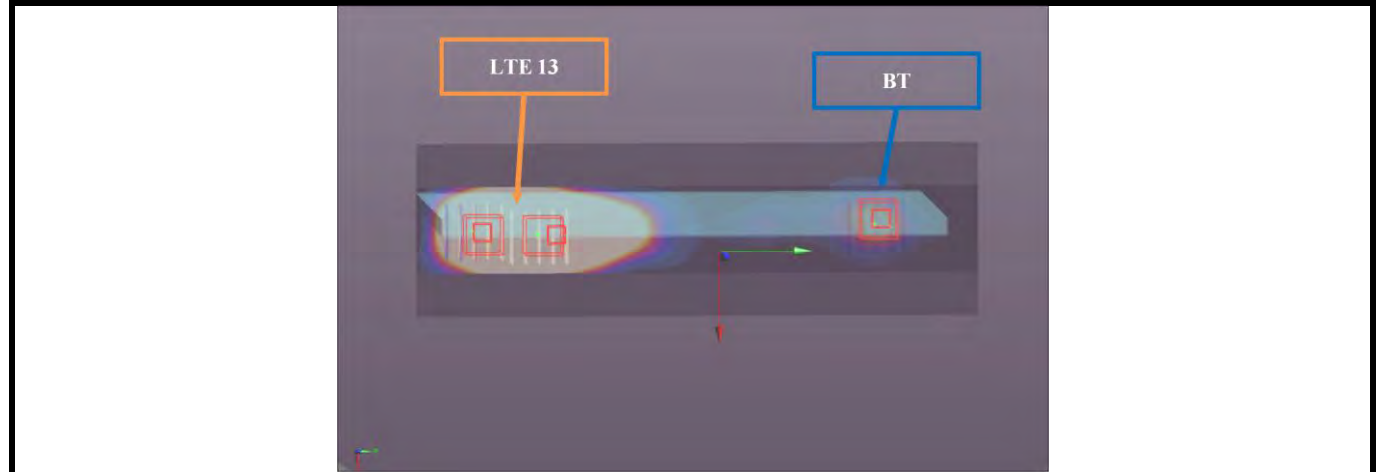


| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z    |                                                         |       |                                    |
| WLAN5800<br>Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3 | 74.2                                                    | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39         |                    |               | 0.07             | -40         | 90.2 | -2.8 |                                                         |       |                                    |

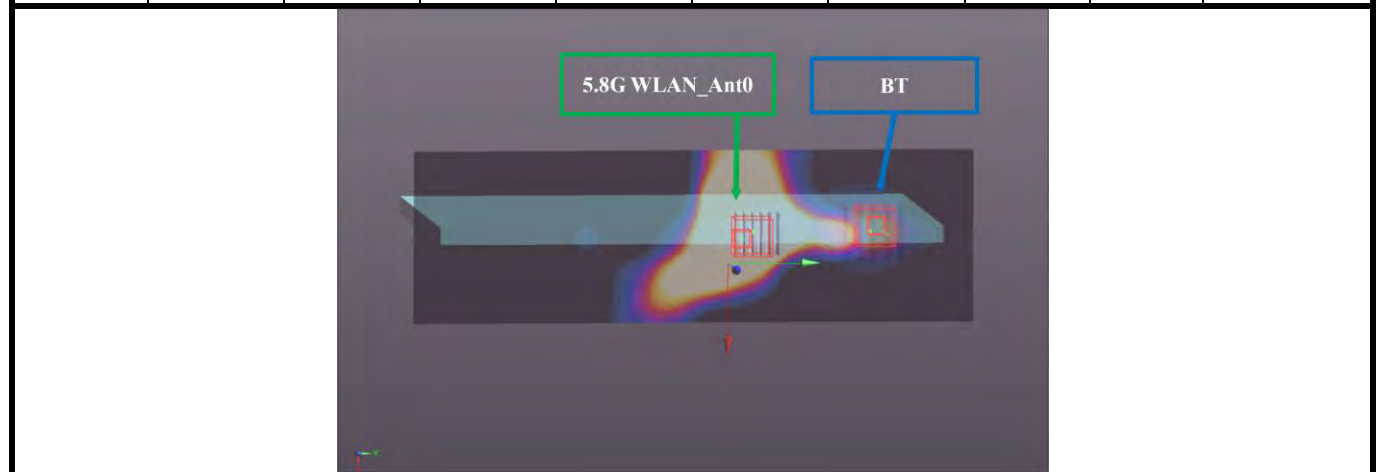


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 25 Ch26590    | Body               | Rear Face     | 0.64             | 100.7       | -94.1 | 2.06  | 128.5                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

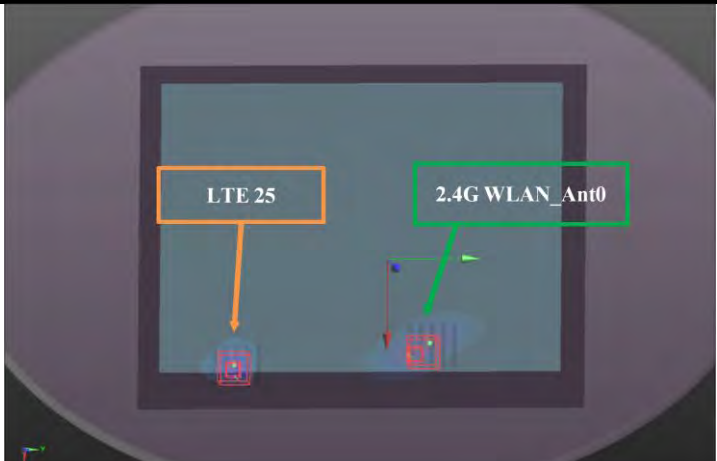

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 25 Ch26590    | Body               | Rear Face     | 0.64             | 100.7       | -94.1 | 2.06  | 211.1                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

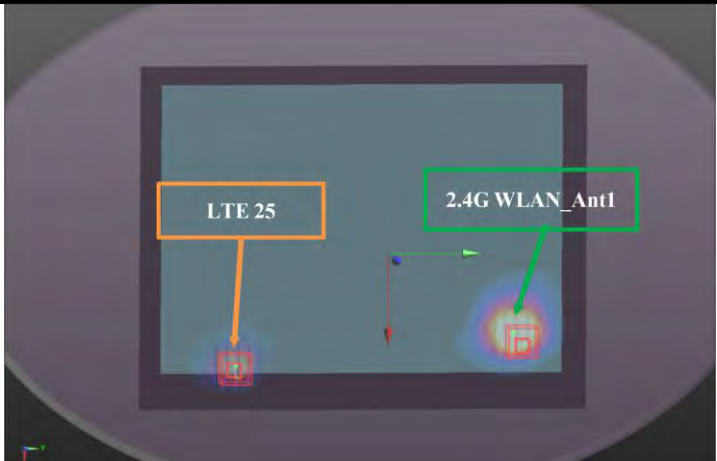


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |



| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 25 Ch26590      | Body               | Rear Face     | 0.64             | 100.7       | -94.1 | 2.06 | 114.2                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |

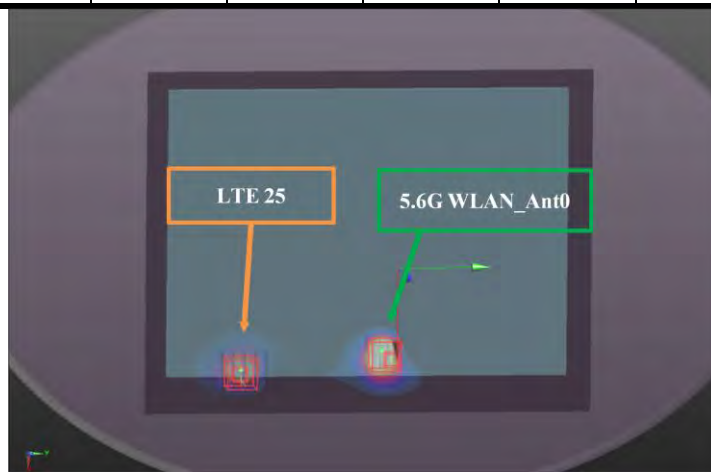


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 25 Ch26590      | Body               | Rear Face     | 0.64             | 100.7       | -94.1 | 2.06 | 205.8                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |




| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

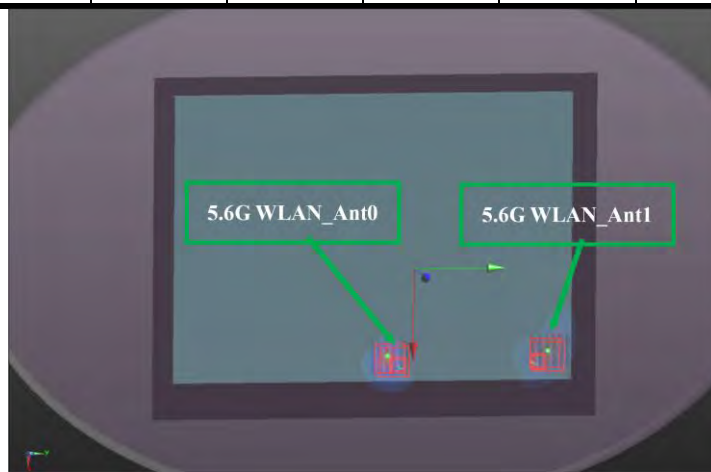




# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 25<br>Ch26140      | Body               | Top Side      | 1.11             | -8          | -74  | -0.98 | 99.6                                                    | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5800<br>Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4 | -5.3  |                                                         |       |                                    |

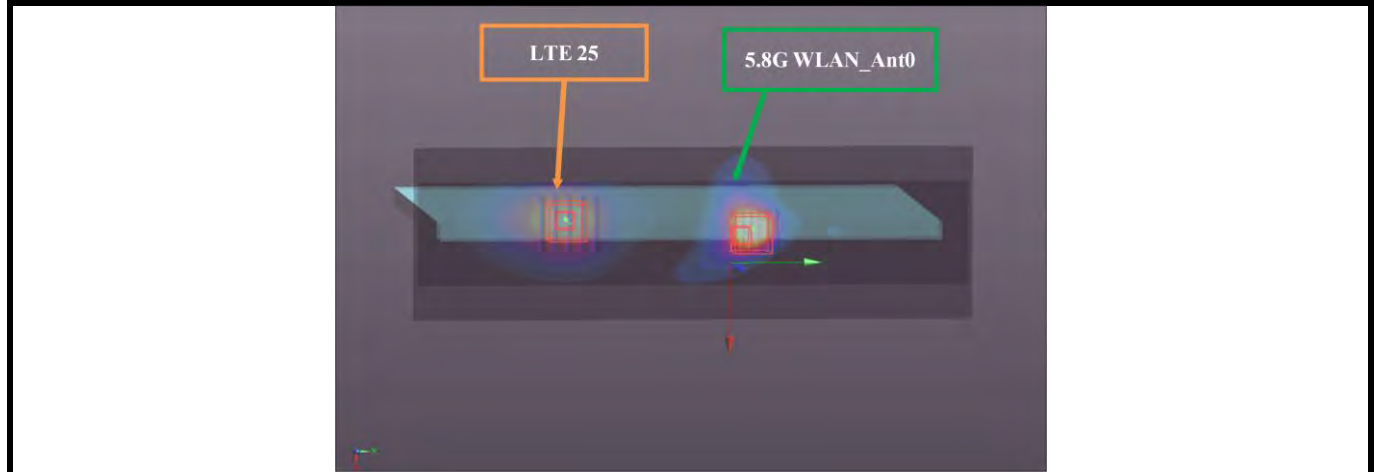

| Conditions            | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |     |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------------|--------------------|---------------|------------------|-------------|-----|-------|---------------------------------------------------------|-------|------------------------------------|
|                       |                    |               |                  | x           | y   | z     |                                                         |       |                                    |
| LTE 25<br>Ch26140     | Body               | Top Side      | 1.11             | -8          | -74 | -0.98 | 186.0                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5300<br>Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112 | -2.96 |                                                         |       |                                    |

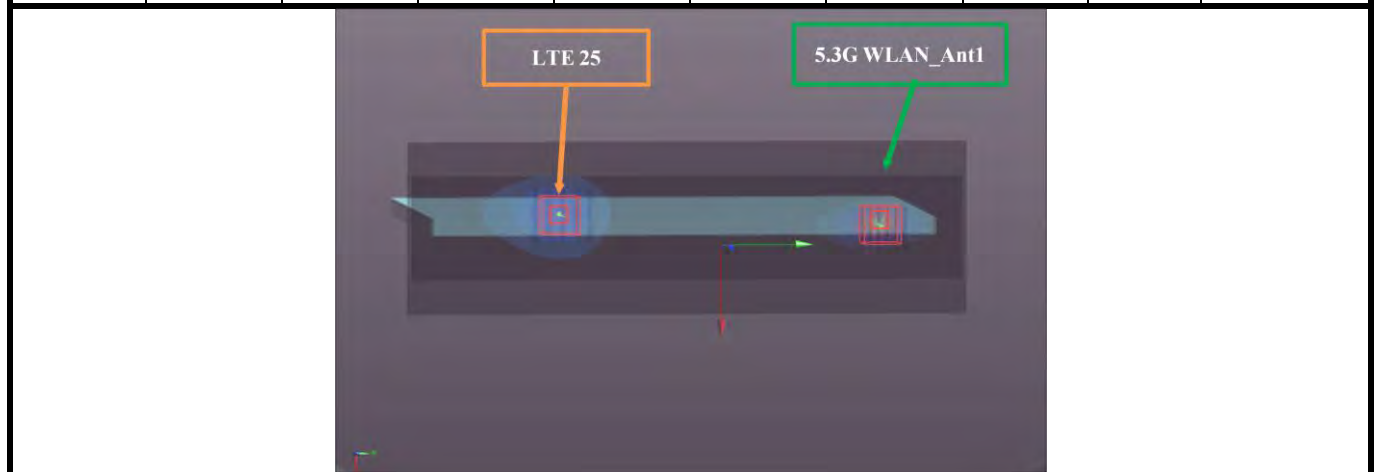



# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |




| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 25 Ch26590      | Body               | Rear Face     | 0.64             | 100.7       | -94.1 | 2.06 | 114.2                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |




# FCC SAR Test Report

| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 25 Ch26590 | Body               | Rear Face     | 0.64             | 100.7       | -94.1 | 2.06 | 203.3                                                   | 0.00  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39    |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

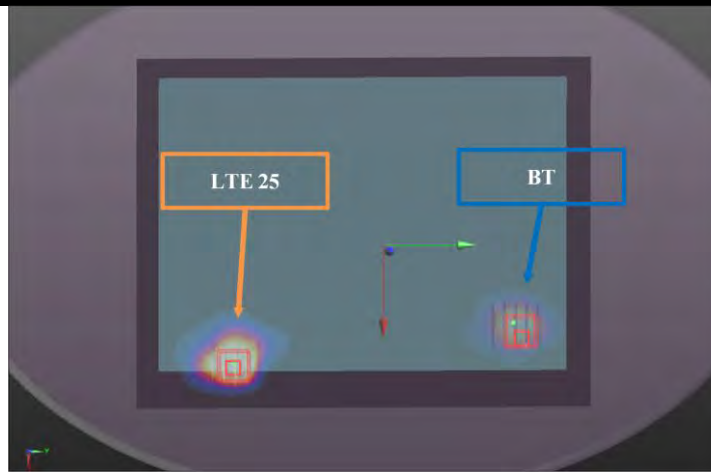


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 89.1                                                    | 0.02  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

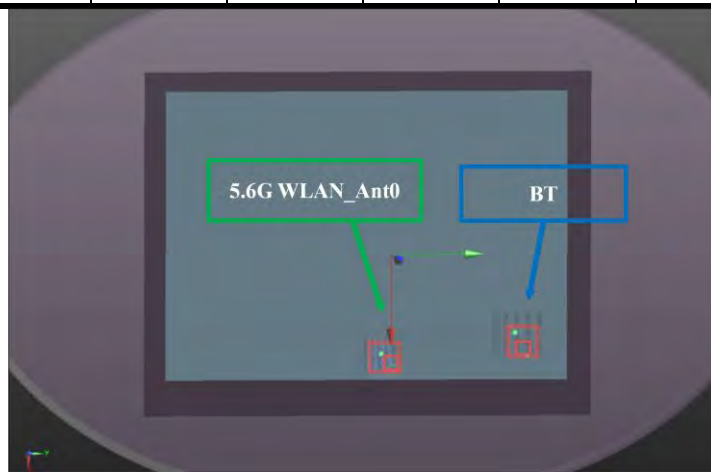


# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 25<br>Ch26140      | Body               | Top Side      | 1.11             | -8          | -74  | -0.98 | 99.6                                                    | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5800<br>Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4 | -5.3  |                                                         |       |                                    |

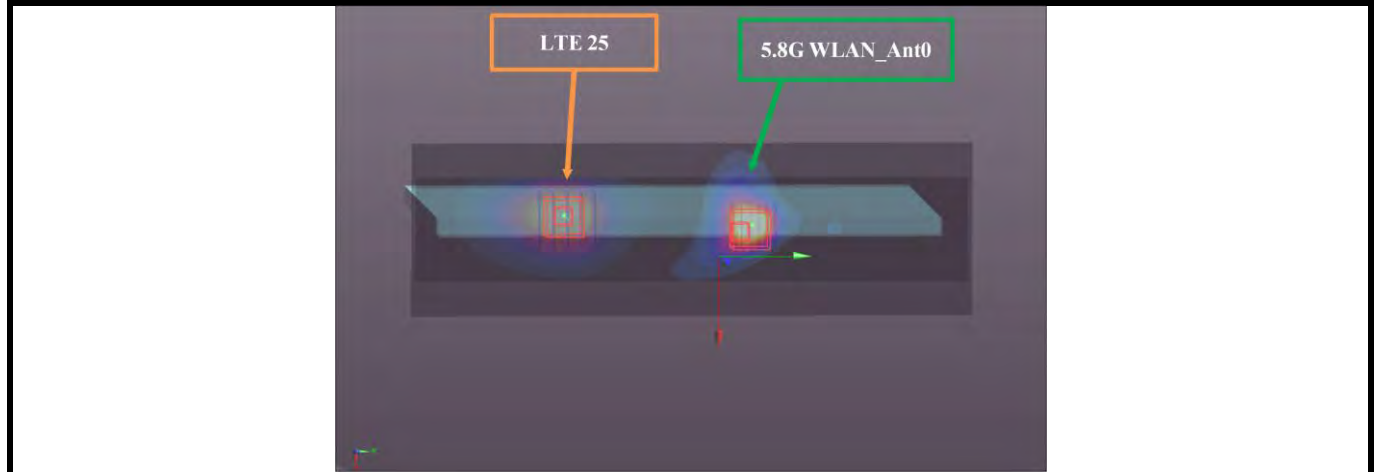


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| LTE 25<br>Ch26140 | Body               | Top Side      | 1.11             | -8          | -74  | -0.98 | 167.3                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39    |                    |               | 0.07             | -40         | 90.2 | -2.8  |                                                         |       |                                    |

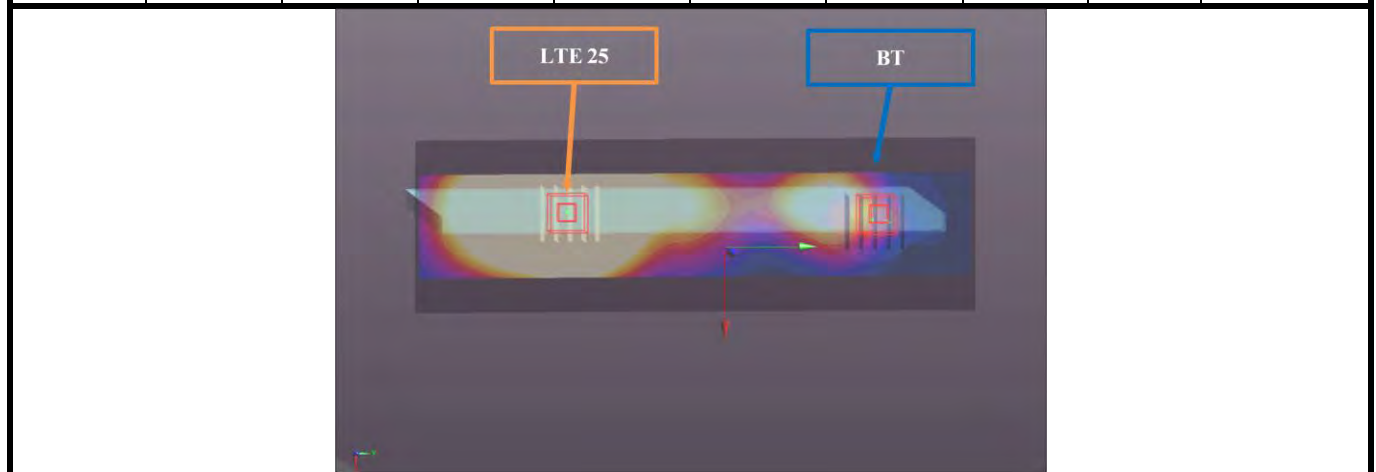


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z    |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3 | 74.2                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.07             | -40         | 90.2 | -2.8 |                                                         |       |                                    |

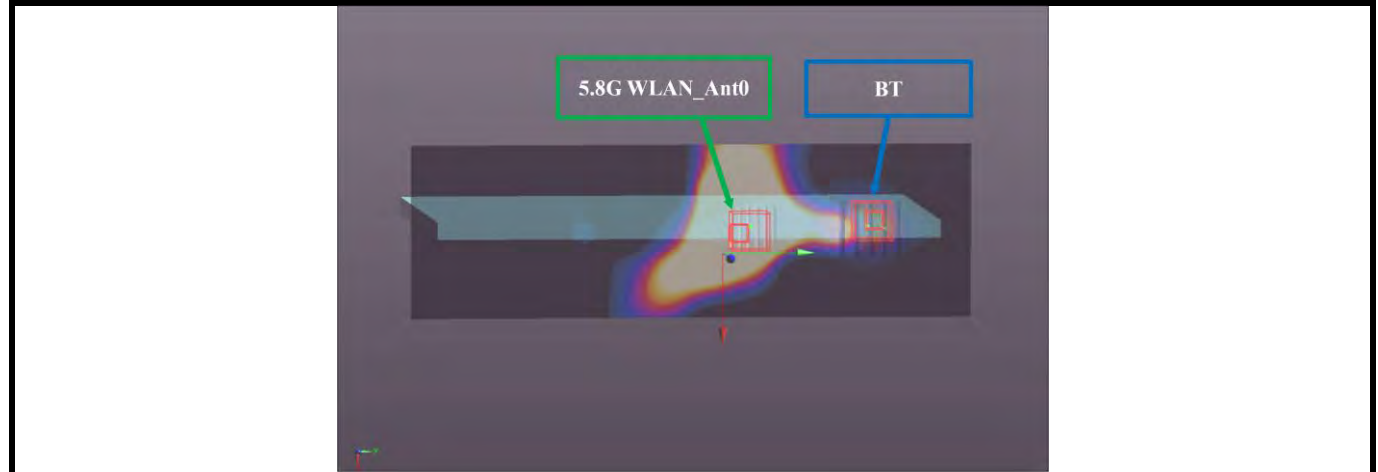


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 26 Ch26765    | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23  | 120.5                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |

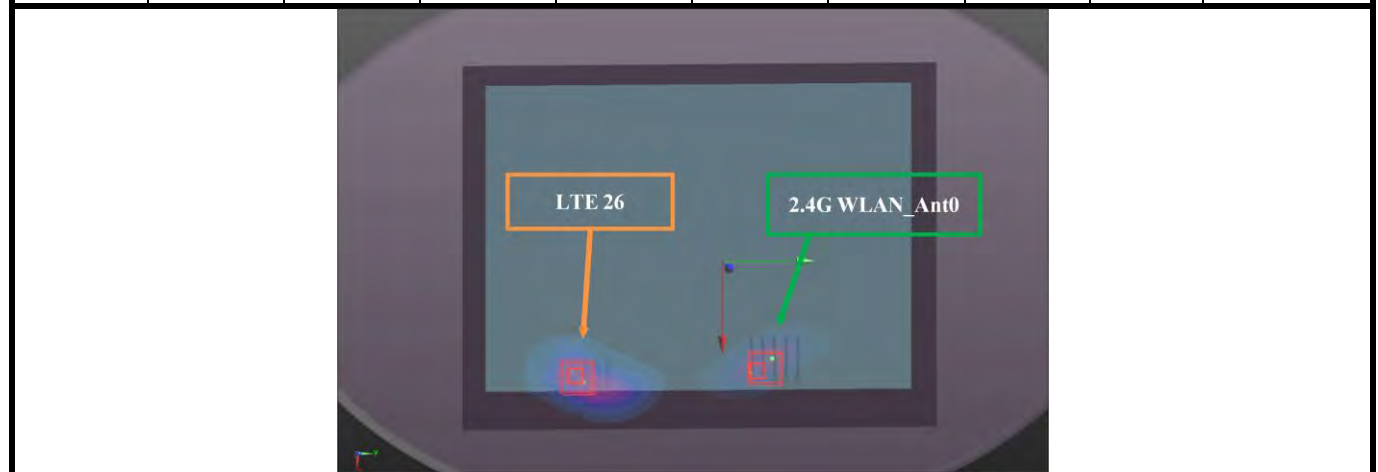


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 26 Ch26765    | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23  | 203.0                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

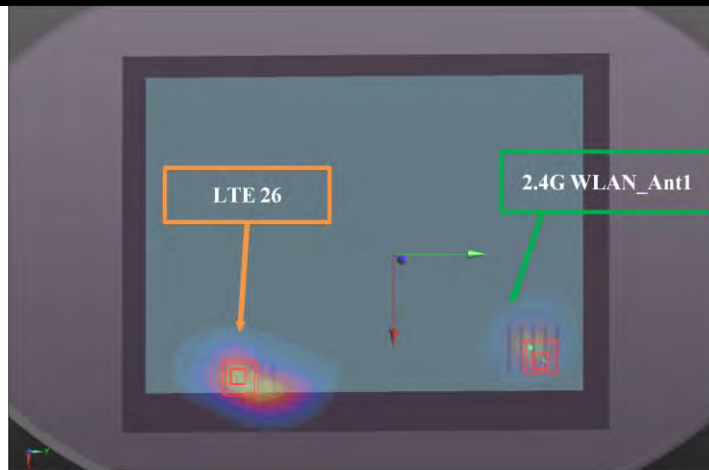


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 82.6                                                    | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN2450 Ch6 ANT1 |                    |               | 0.51             | 84.6        | 116.4 | -1.21 |                                                         |       |                                    |

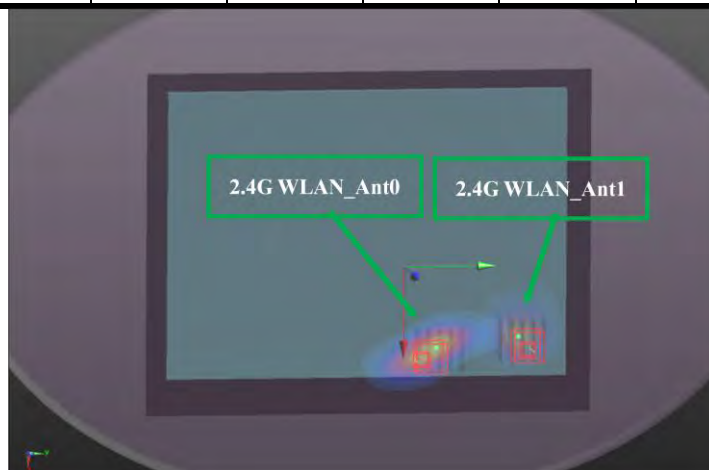

# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 26 Ch26765      | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23 | 106.6                                                   | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |

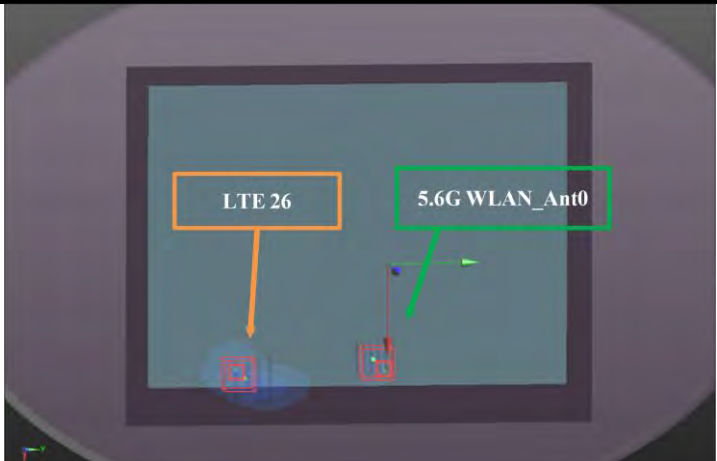


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 26 Ch26765      | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23 | 198.1                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |




# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

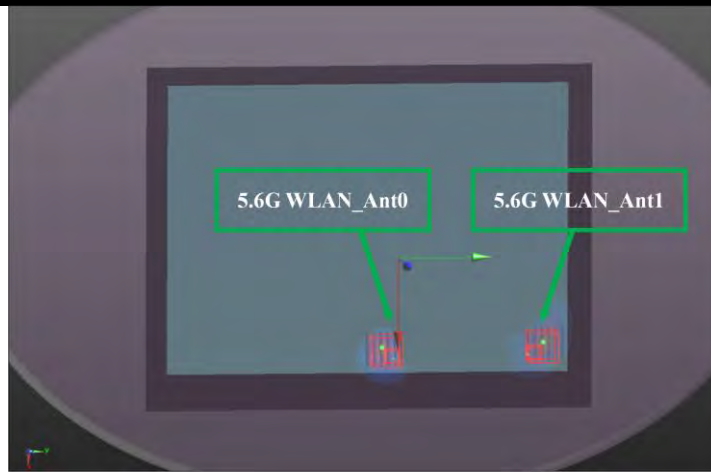

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 26 Ch26765      | Body               | Top Side      | 0.77             | -79         | -0.14 | 0.74 | 79.5                                                    | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5800 Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3 |                                                         |       |                                    |

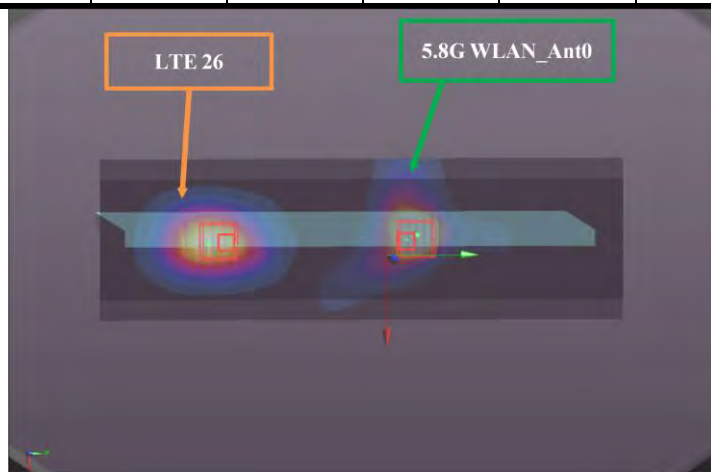




# FCC SAR Test Report

| Conditions            | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                       |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 26<br>Ch26765     | Body               | Top Side      | 0.77             | -79         | -0.14 | 0.74  | 134.7                                                   | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5300<br>Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112   | -2.96 |                                                         |       |                                    |



| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800<br>Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5300<br>Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

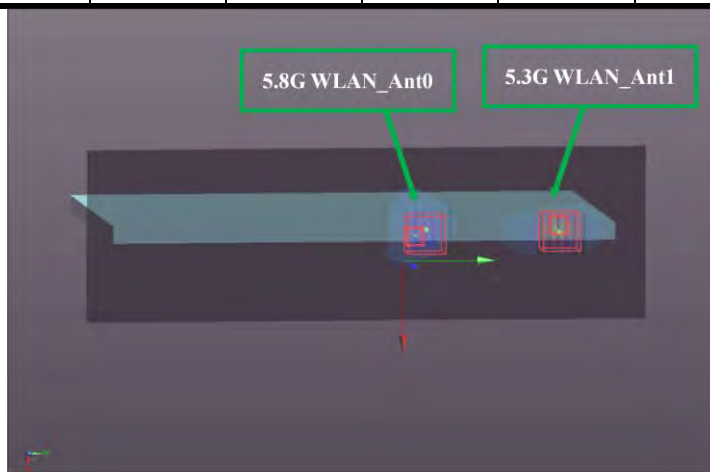




# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 26 Ch26765    | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23  | 120.5                                                   | 0.02  | SPLSR ≤ 0.04, Not required         |
| WLAN2450 Ch6 ANT0 |                    |               | 0.7              | 90.5        | 34    | -0.81 |                                                         |       |                                    |




| Conditions     | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|----------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 26 Ch26765 | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23 | 195.3                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39    |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

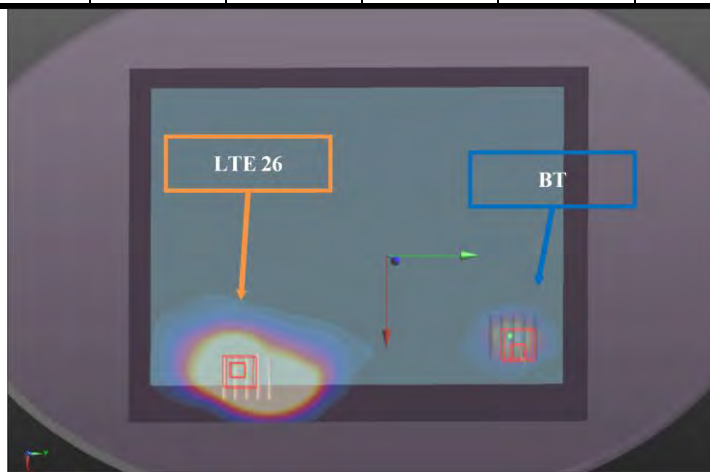


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| WLAN2450 Ch6 ANT0 | Body               | Rear Face     | 0.7              | 90.5        | 34    | -0.81 | 74.8                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39       |                    |               | 0.18             | 89.4        | 108.8 | -1.9  |                                                         |       |                                    |

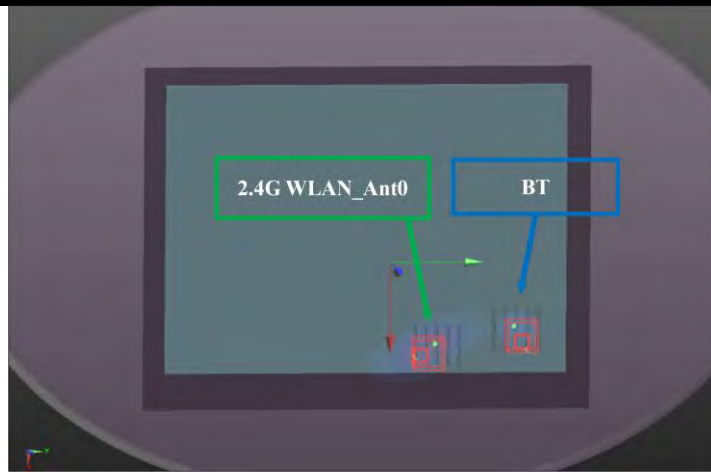


| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 26 Ch26765      | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23 | 106.6                                                   | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |

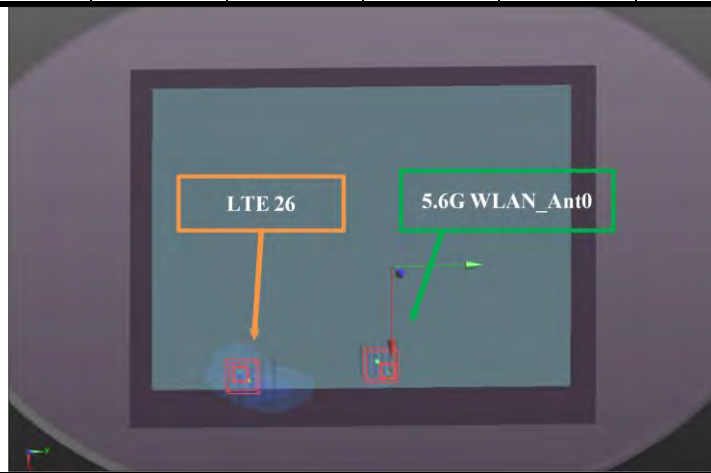


# FCC SAR Test Report

| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 26<br>Ch26765 | Body               | Rear Face     | 1.09             | 92.7        | -86.4 | 3.23 | 195.3                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39    |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

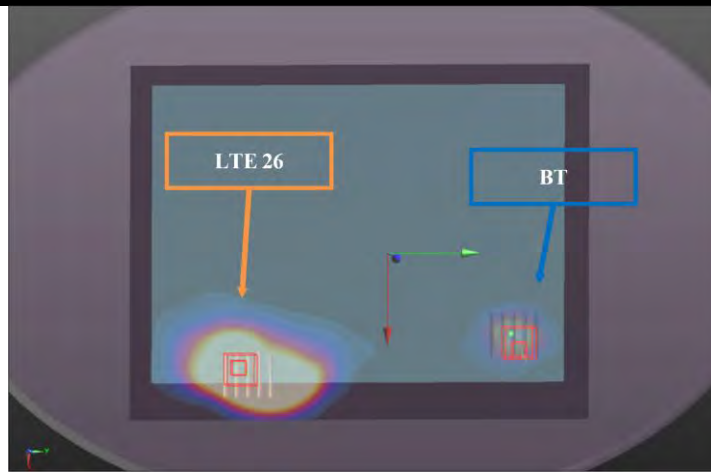


| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600<br>Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 89.1                                                    | 0.02  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39         |                    |               | 0.18             | 89.4        | 108.8 | -1.9 |                                                         |       |                                    |

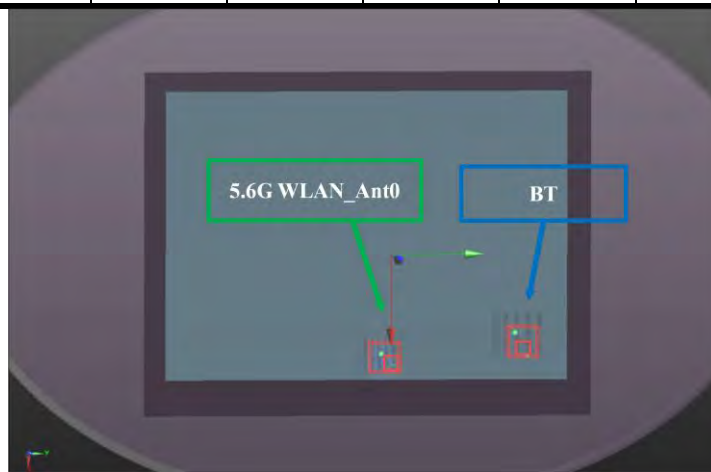


# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 26<br>Ch26765      | Body               | Top Side      | 0.77             | -79         | -0.14 | 0.74 | 79.5                                                    | 0.03  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5800<br>Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3 |                                                         |       |                                    |

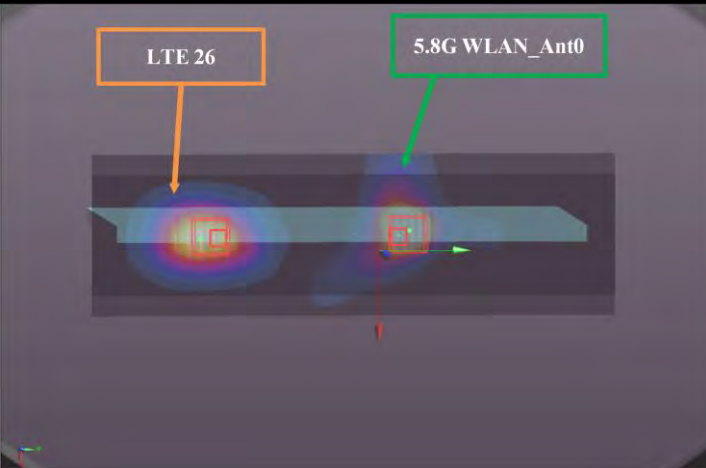


| Conditions        | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                   |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 26<br>Ch26765 | Body               | Top Side      | 0.77             | -79         | -0.14 | 0.74 | 98.5                                                    | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| BT2450<br>Ch39    |                    |               | 0.07             | -40         | 90.2  | -2.8 |                                                         |       |                                    |

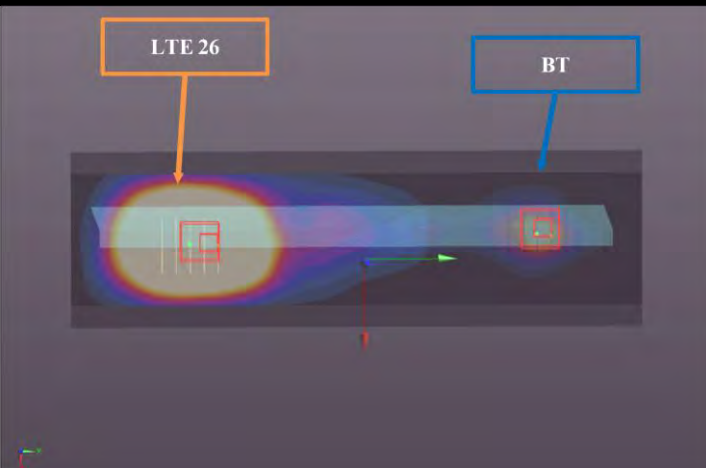


# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z    |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3 | 74.2                                                    | 0.01  | SPLSR ≤ 0.04, Not required         |
| BT2450 Ch39         |                    |               | 0.07             | -40         | 90.2 | -2.8 |                                                         |       |                                    |

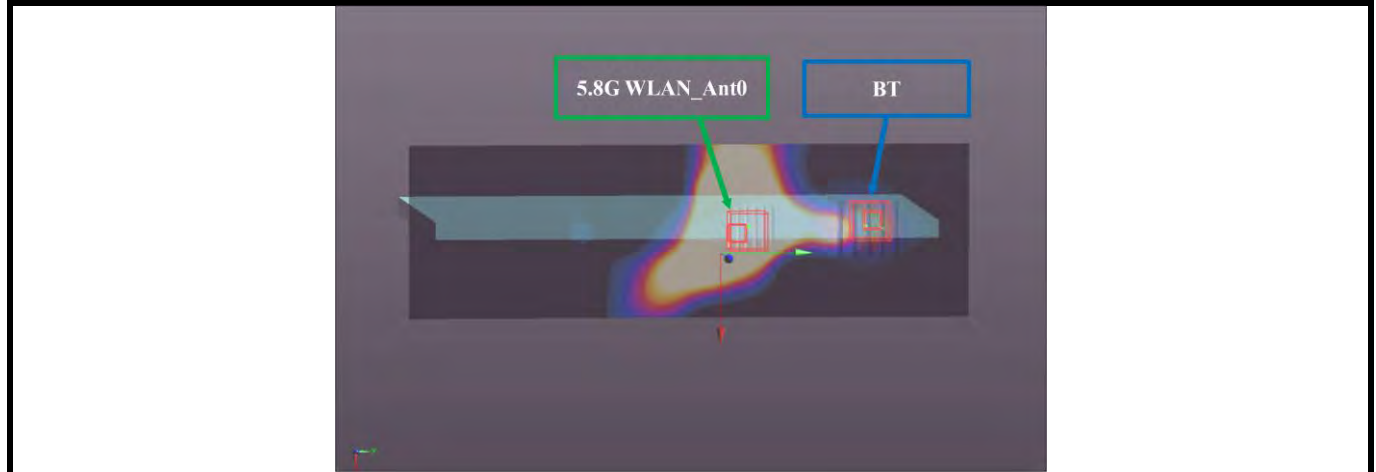

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 41 Ch40185      | Body               | Rear Face     | 0.18             | 100.7       | -82.5 | 2.11 | 102.6                                                   | 0.01  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT0 |                    |               | 1.06             | 96.6        | 20    | -1.2 |                                                         |       |                                    |

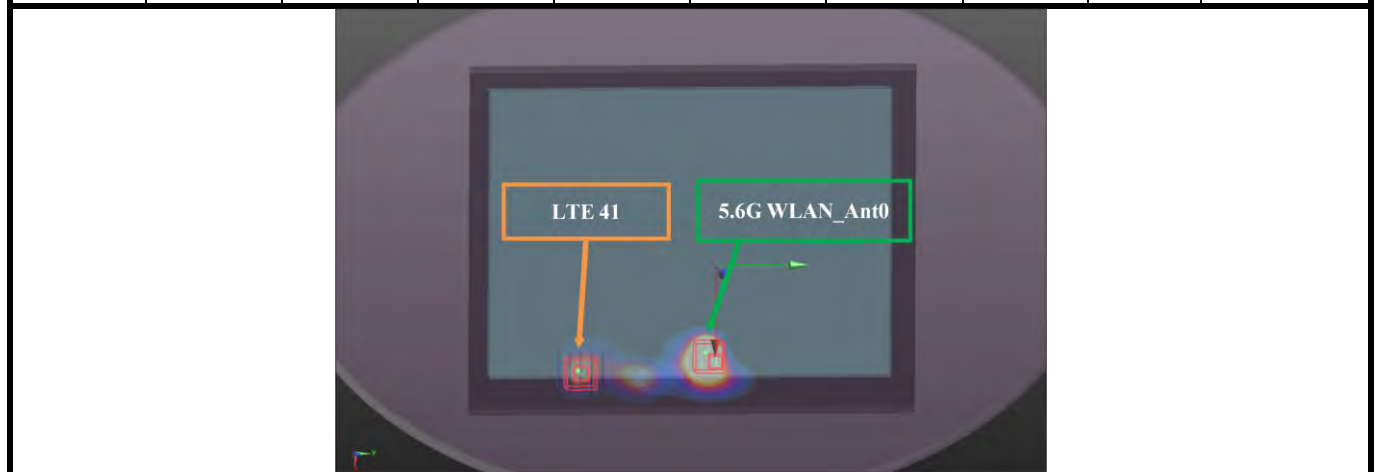


| Conditions | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |  |  | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------|--------------------|---------------|------------------|-------------|--|--|---------------------------------------------------------|-------|------------------------------------|
|------------|--------------------|---------------|------------------|-------------|--|--|---------------------------------------------------------|-------|------------------------------------|

# FCC SAR Test Report


|                        |      |           |      | x     | y     | z    |       |      |                               |
|------------------------|------|-----------|------|-------|-------|------|-------|------|-------------------------------|
| LTE 41<br>Ch40185      | Body | Rear Face | 0.18 | 100.7 | -82.5 | 2.11 | 194.2 | 0.01 | SPLSR ≤ 0.04,<br>Not required |
| WLAN5600<br>Ch100 ANT1 |      |           | 0.99 | 94.4  | 111.6 | -1.3 |       |      |                               |

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| WLAN5600 Ch100 ANT0 | Body               | Rear Face     | 1.06             | 96.6        | 20    | -1.2 | 91.6                                                    | 0.03  | SPLSR ≤ 0.04, Not required         |
| WLAN5600 Ch100 ANT1 |                    |               | 0.99             | 94.4        | 111.6 | -1.3 |                                                         |       |                                    |

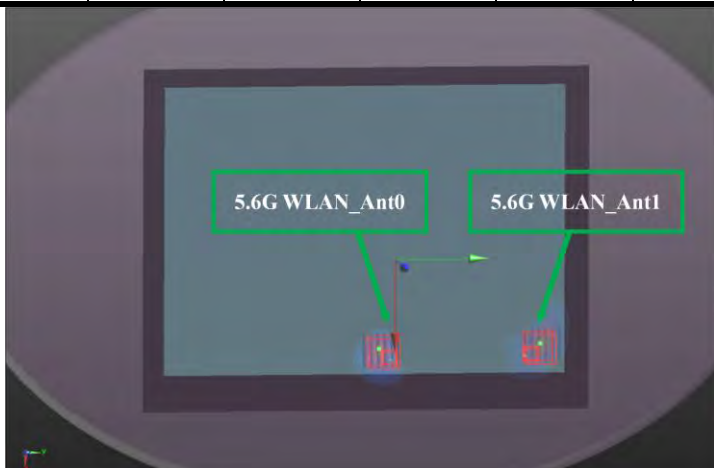

# FCC SAR Test Report

| Conditions             | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |      | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|------------------------|--------------------|---------------|------------------|-------------|-------|------|---------------------------------------------------------|-------|------------------------------------|
|                        |                    |               |                  | x           | y     | z    |                                                         |       |                                    |
| LTE 41<br>Ch40185      | Body               | Top Side      | 0.21             | 1.6         | -86.4 | 0.4  | 112.1                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5800<br>Ch149 ANT0 |                    |               | 0.85             | -4          | 25.4  | -5.3 |                                                         |       |                                    |

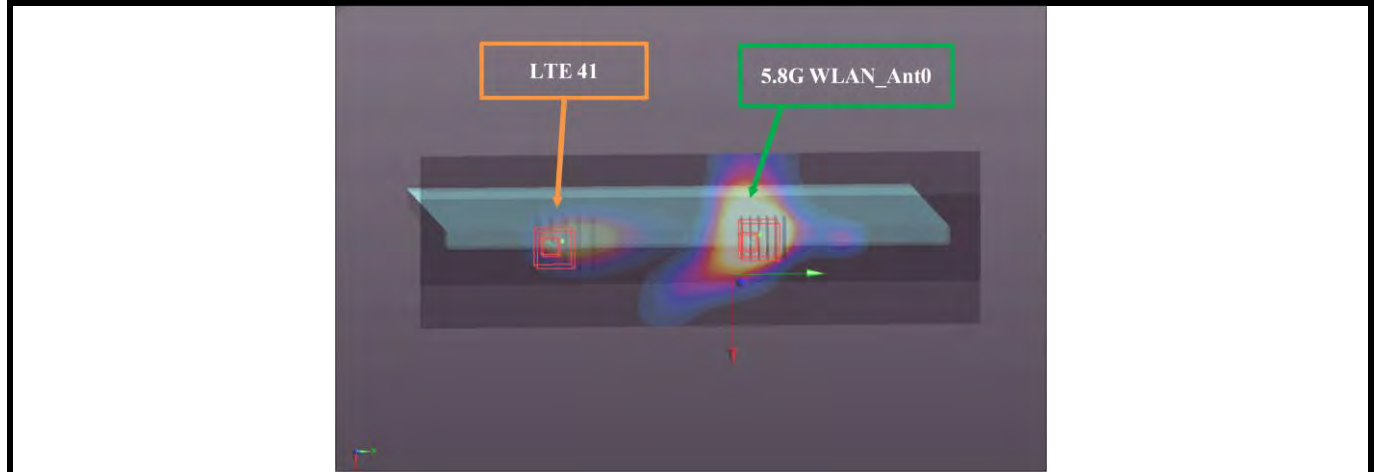


| Conditions            | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |       |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|-----------------------|--------------------|---------------|------------------|-------------|-------|-------|---------------------------------------------------------|-------|------------------------------------|
|                       |                    |               |                  | x           | y     | z     |                                                         |       |                                    |
| LTE 41<br>Ch40185     | Body               | Top Side      | 0.21             | 1.6         | -86.4 | 0.4   | 198.5                                                   | 0.01  | SPLSR ≤ 0.04,<br>Not required      |
| WLAN5300<br>Ch56 ANT1 |                    |               | 1.45             | -4.5        | 112   | -2.96 |                                                         |       |                                    |



# FCC SAR Test Report

| Conditions          | Exposure Condition | Test Position | SAR Value (W/kg) | Coordinates |      |       | Peak Location Separation Distance (R <sub>i</sub> , mm) | SPLSR | Simultaneous Transmission SAR Test |
|---------------------|--------------------|---------------|------------------|-------------|------|-------|---------------------------------------------------------|-------|------------------------------------|
|                     |                    |               |                  | x           | y    | z     |                                                         |       |                                    |
| WLAN5800 Ch149 ANT0 | Body               | Top Side      | 0.85             | -4          | 25.4 | -5.3  | 86.6                                                    | 0.04  | SPLSR ≤ 0.04, Not required         |
| WLAN5300 Ch56 ANT1  |                    |               | 1.45             | -4.5        | 112  | -2.96 |                                                         |       |                                    |

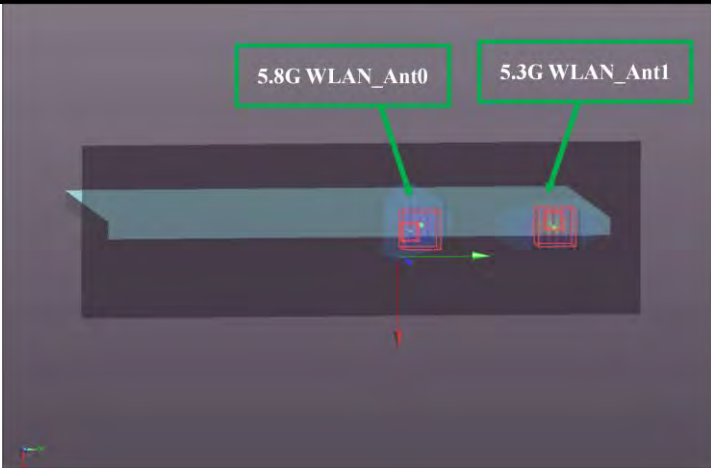

Test Engineer : Eric Wu, and Stanley Chuang



## 5. Calibration of Test Equipment

| Equipment                    | Manufacturer | Model   | SN         | Cal. Date     | Cal. Interval |
|------------------------------|--------------|---------|------------|---------------|---------------|
| System Validation Dipole     | SPEAG        | D750V3  | 1013       | Aug. 30, 2016 | 1 Year        |
| System Validation Dipole     | SPEAG        | D835V2  | 4d121      | Aug. 25, 2016 | 1 Year        |
| System Validation Dipole     | SPEAG        | D1750V2 | 1055       | Aug. 31, 2016 | 1 Year        |
| System Validation Dipole     | SPEAG        | D1900V2 | 5d036      | Jan. 22, 2016 | 1 Year        |
| System Validation Dipole     | SPEAG        | D1900V2 | 5d036      | Jan. 23, 2017 | 1 Year        |
| System Validation Dipole     | SPEAG        | D2450V2 | 737        | Aug. 26, 2016 | 1 Year        |
| System Validation Dipole     | SPEAG        | D2600V2 | 1020       | Aug. 26, 2016 | 1 Year        |
| System Validation Dipole     | SPEAG        | D5GHzV2 | 1019       | Aug. 23, 2016 | 1 Year        |
| Dosimetric E-Field Probe     | SPEAG        | ET3DV6  | 1790       | Jun. 24, 2016 | 1 Year        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4  | 3650       | Jul. 25, 2016 | 1 Year        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4  | 3661       | May 11, 2016  | 1 Year        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4  | 3864       | Jul. 25, 2016 | 1 Year        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4  | 3971       | Mar. 23, 2016 | 1 Year        |
| Data Acquisition Electronics | SPEAG        | DAE3    | 579        | Sep. 05, 2016 | 1 Year        |
| Data Acquisition Electronics | SPEAG        | DAE4    | 861        | Jun. 16, 2016 | 1 Year        |
| Data Acquisition Electronics | SPEAG        | DAE4    | 913        | Mar. 31, 2016 | 1 Year        |
| Data Acquisition Electronics | SPEAG        | DAE4    | 1431       | Mar. 21, 2016 | 1 Year        |
| Data Acquisition Electronics | SPEAG        | DAE4    | 1277       | Jul. 22, 2016 | 1 Year        |
| Data Acquisition Electronics | SPEAG        | DAE4    | 1305       | Dec. 15, 2016 | 1 Year        |
| Spectrum Analyzer            | R&S          | FSL6    | 102006     | Mar. 25, 2016 | 1 Year        |
| Spectrum Analyzer            | Agilent      | N9030A  | MY53120770 | Jan. 10, 2017 | 1 Year        |
| ENA Series Network Analyzer  | Agilent      | E5071C  | MY46214281 | Jun. 13, 2016 | 1 Year        |
| MXG Analog Signal Generator  | Agilent      | N5181A  | MY50143868 | Jul. 07, 2016 | 1 Year        |
| Vector Signal Generator      | Anritsu      | MG3710A | 6201599977 | Mar. 22, 2016 | 1 Year        |
| Power Meter                  | Anritsu      | ML2495A | 1218009    | Jul. 06, 2016 | 1 Year        |
| Power Sensor                 | Anritsu      | MA2411B | 1207252    | Jul. 06, 2016 | 1 Year        |
| Thermometer                  | YFE          | YF-160A | 150601220  | May 04, 2016  | 1 Year        |

# FCC SAR Test Report

## 6. Measurement Uncertainty

| Source of Uncertainty                                                            | Tolerance<br>(± %) | Probability<br>Distribution | Divisor | Ci<br>(1g) | Ci<br>(10g) | Standard<br>Uncertainty<br>(± %, 1g) | Standard<br>Uncertainty<br>(± %, 10g) | Vi |
|----------------------------------------------------------------------------------|--------------------|-----------------------------|---------|------------|-------------|--------------------------------------|---------------------------------------|----|
| <b>Measurement System</b>                                                        |                    |                             |         |            |             |                                      |                                       |    |
| Probe Calibration                                                                | 6.0                | Normal                      | 1       | 1          | 1           | 6.0                                  | 6.0                                   | ∞  |
| Axial Isotropy                                                                   | 4.7                | Rectangular                 | √3      | √0.5       | √0.5        | 1.9                                  | 1.9                                   | ∞  |
| Hemispherical Isotropy                                                           | 9.6                | Rectangular                 | √3      | √0.5       | √0.5        | 3.9                                  | 3.9                                   | ∞  |
| Boundary Effect                                                                  | 1.0                | Rectangular                 | √3      | 1          | 1           | 0.6                                  | 0.6                                   | ∞  |
| Linearity                                                                        | 4.7                | Rectangular                 | √3      | 1          | 1           | 2.7                                  | 2.7                                   | ∞  |
| System Detection Limits                                                          | 0.25               | Rectangular                 | √3      | 1          | 1           | 0.14                                 | 0.14                                  | ∞  |
| Modulation Response                                                              | 3.5                | Rectangular                 | √3      | 1          | 1           | 2.0                                  | 2.0                                   | ∞  |
| Readout Electronics                                                              | 0.3                | Normal                      | 1       | 1          | 1           | 0.3                                  | 0.3                                   | ∞  |
| Response Time                                                                    | 0.0                | Rectangular                 | √3      | 1          | 1           | 0.0                                  | 0.0                                   | ∞  |
| Integration Time                                                                 | 1.7                | Rectangular                 | √3      | 1          | 1           | 1.0                                  | 1.0                                   | ∞  |
| RF Ambient Conditions - Noise                                                    | 3.0                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| RF Ambient Conditions - Reflections                                              | 3.0                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| Probe Positioner Mechanical Tolerance                                            | 0.4                | Rectangular                 | √3      | 1          | 1           | 0.2                                  | 0.2                                   | ∞  |
| Probe Positioning with Respect to Phantom                                        | 2.9                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| Extrapolation, Interpolation, and Integration Algorithms for Max. SAR Evaluation | 2.0                | Rectangular                 | √3      | 1          | 1           | 1.2                                  | 1.2                                   | ∞  |
| <b>Test Sample Related</b>                                                       |                    |                             |         |            |             |                                      |                                       |    |
| Test Sample Positioning                                                          | 3.9 / 2.06         | Normal                      | 1       | 1          | 1           | 3.9                                  | 2.1                                   | 35 |
| Device Holder Uncertainty                                                        | 2.9 / 4.1          | Normal                      | 1       | 1          | 1           | 2.9                                  | 4.1                                   | 11 |
| Output Power Variation - SAR Drift Measurement                                   | 5.0                | Rectangular                 | √3      | 1          | 1           | 2.9                                  | 2.9                                   | ∞  |
| SAR Scaling                                                                      | 0.0                | Rectangular                 | √3      | 1          | 1           | 0.0                                  | 0.0                                   | ∞  |
| <b>Phantom and Tissue</b>                                                        |                    |                             |         |            |             |                                      |                                       |    |
| Phantom Shell Uncertainty - Shape, Thickness and Permittivity                    | 7.2                | Rectangular                 | √3      | 1          | 1           | 4.2                                  | 4.2                                   | ∞  |
| Uncertainty in SAR Correction for Deviations in Permittivity and Conductivity    | 1.2 / 0.97         | Normal                      | 1       | 1          | 0.84        | 1.2                                  | 0.8                                   | ∞  |
| Liquid Conductivity Measurement                                                  | 2.88               | Normal                      | 1       | 0.78       | 0.71        | 2.2                                  | 2.0                                   | 43 |
| Liquid Permittivity Measurement                                                  | 2.50               | Normal                      | 1       | 0.23       | 0.26        | 0.6                                  | 0.7                                   | 54 |
| Liquid Conductivity - Temperature Uncertainty                                    | 3.24               | Rectangular                 | √3      | 0.78       | 0.71        | 1.5                                  | 1.3                                   | ∞  |
| Liquid Permittivity - Temperature Uncertainty                                    | 1.13               | Rectangular                 | √3      | 0.23       | 0.26        | 0.2                                  | 0.2                                   | ∞  |
| <b>Combined Standard Uncertainty</b>                                             |                    |                             |         |            |             | ± 11.7 %                             | ± 11.5 %                              |    |
| <b>Expanded Uncertainty (K=2)</b>                                                |                    |                             |         |            |             | ± 23.4 %                             | ± 23.0 %                              |    |

Uncertainty budget for frequency range 300 MHz to 3 GHz

# FCC SAR Test Report

| Source of Uncertainty                                                            | Tolerance<br>(± %) | Probability<br>Distribution | Divisor | Ci<br>(1g) | Ci<br>(10g) | Standard<br>Uncertainty<br>(± %, 1g) | Standard<br>Uncertainty<br>(± %, 10g) | Vi |
|----------------------------------------------------------------------------------|--------------------|-----------------------------|---------|------------|-------------|--------------------------------------|---------------------------------------|----|
| <b>Measurement System</b>                                                        |                    |                             |         |            |             |                                      |                                       |    |
| Probe Calibration                                                                | 6.55               | Normal                      | 1       | 1          | 1           | 6.55                                 | 6.55                                  | ∞  |
| Axial Isotropy                                                                   | 4.7                | Rectangular                 | √3      | √0.5       | √0.5        | 1.9                                  | 1.9                                   | ∞  |
| Hemispherical Isotropy                                                           | 9.6                | Rectangular                 | √3      | √0.5       | √0.5        | 3.9                                  | 3.9                                   | ∞  |
| Boundary Effect                                                                  | 2.0                | Rectangular                 | √3      | 1          | 1           | 1.2                                  | 1.2                                   | ∞  |
| Linearity                                                                        | 4.7                | Rectangular                 | √3      | 1          | 1           | 2.7                                  | 2.7                                   | ∞  |
| System Detection Limits                                                          | 0.25               | Rectangular                 | √3      | 1          | 1           | 0.14                                 | 0.14                                  | ∞  |
| Modulation Response                                                              | 3.5                | Rectangular                 | √3      | 1          | 1           | 2.0                                  | 2.0                                   | ∞  |
| Readout Electronics                                                              | 0.3                | Normal                      | 1       | 1          | 1           | 0.3                                  | 0.3                                   | ∞  |
| Response Time                                                                    | 0.0                | Rectangular                 | √3      | 1          | 1           | 0.0                                  | 0.0                                   | ∞  |
| Integration Time                                                                 | 1.7                | Rectangular                 | √3      | 1          | 1           | 1.0                                  | 1.0                                   | ∞  |
| RF Ambient Conditions - Noise                                                    | 3.0                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| RF Ambient Conditions - Reflections                                              | 3.0                | Rectangular                 | √3      | 1          | 1           | 1.7                                  | 1.7                                   | ∞  |
| Probe Positioner Mechanical Tolerance                                            | 0.4                | Rectangular                 | √3      | 1          | 1           | 0.2                                  | 0.2                                   | ∞  |
| Probe Positioning with Respect to Phantom Shell                                  | 6.7                | Rectangular                 | √3      | 1          | 1           | 3.9                                  | 3.9                                   | ∞  |
| Extrapolation, Interpolation, and Integration Algorithms for Max. SAR Evaluation | 4.0                | Rectangular                 | √3      | 1          | 1           | 2.3                                  | 2.3                                   | ∞  |
| <b>Test Sample Related</b>                                                       |                    |                             |         |            |             |                                      |                                       |    |
| Test Sample Positioning                                                          | 3.9 / 2.06         | Normal                      | 1       | 1          | 1           | 3.9                                  | 2.1                                   | 35 |
| Device Holder Uncertainty                                                        | 2.9 / 4.1          | Normal                      | 1       | 1          | 1           | 2.9                                  | 4.1                                   | 11 |
| Output Power Variation - SAR Drift Measurement                                   | 5.0                | Rectangular                 | √3      | 1          | 1           | 2.9                                  | 2.9                                   | ∞  |
| SAR Scaling                                                                      | 0.0                | Rectangular                 | √3      | 1          | 1           | 0.0                                  | 0.0                                   | ∞  |
| <b>Phantom and Tissue</b>                                                        |                    |                             |         |            |             |                                      |                                       |    |
| Phantom Shell Uncertainty - Shape, Thickness and Permittivity                    | 7.6                | Rectangular                 | √3      | 1          | 1           | 4.4                                  | 4.4                                   | ∞  |
| Uncertainty in SAR Correction for Deviations in Permittivity and Conductivity    | 1.2 / 0.97         | Normal                      | 1       | 1          | 0.84        | 1.2                                  | 0.8                                   | ∞  |
| Liquid Conductivity Measurement                                                  | 2.88               | Normal                      | 1       | 0.78       | 0.71        | 2.2                                  | 2.0                                   | 43 |
| Liquid Permittivity Measurement                                                  | 2.50               | Normal                      | 1       | 0.23       | 0.26        | 0.6                                  | 0.7                                   | 54 |
| Liquid Conductivity - Temperature Uncertainty                                    | 3.24               | Rectangular                 | √3      | 0.78       | 0.71        | 1.5                                  | 1.3                                   | ∞  |
| Liquid Permittivity - Temperature Uncertainty                                    | 1.13               | Rectangular                 | √3      | 0.23       | 0.26        | 0.2                                  | 0.2                                   | ∞  |
| <b>Combined Standard Uncertainty</b>                                             |                    |                             |         |            |             | ± 12.7 %                             | ± 12.6 %                              |    |
| <b>Expanded Uncertainty (K=2)</b>                                                |                    |                             |         |            |             | ± 25.4 %                             | ± 25.2 %                              |    |

## Uncertainty budget for frequency range 3 GHz to 6 GHz

## FCC SAR Test Report

---

### 7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Taiwan HwaYa EMC/RF/Safety/Telecom Lab:**

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

**Taiwan LinKo EMC/RF Lab:**

Add: No. 47-2, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

**Taiwan HsinChu EMC/RF Lab:**

Add: No. 81-1, Lu Liao Keng, 9<sup>th</sup> Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The road map of all our labs can be found in our web site also.

---END---

### Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

### Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

### Appendix C. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.

## Appendix D. Photographs of EUT and Setup