



FCC RADIO TEST REPORT

FCC ID : N7NEM86T
Equipment : Radio Module
Brand Name : Sierra Wireless
Model Name : EM8695
Applicant : Sierra Wireless, ULC
13811 Wireless Way, Richmond, BC V6V 3A4 Canada
Manufacturer : Sierra Wireless, ULC
13811 Wireless Way, Richmond, BC V6V 3A4 Canada
Standard : FCC 47 CFR Part 2, 27

The product was received on Apr. 10, 2025 and testing was performed from Jun. 11, 2025 to Jun. 23, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system	8
2.4 Measurement Results Explanation Example.....	8
2.5 Frequency List of Low/Middle/High Channels	9
3 Conducted Test Items.....	10
3.1 Measuring Instruments	10
3.2 Conducted Output Power and ERP.....	11
3.3 Peak-to-Average Ratio	12
3.4 Occupied Bandwidth.....	13
3.5 Conducted Band Edge	14
3.6 Conducted Spurious Emission	15
3.7 Frequency Stability	16
4 Radiated Test Items	17
4.1 Measuring Instruments	17
4.2 Radiated Spurious Emission Measurement	19
5 List of Measuring Equipment.....	20
6 Measurement Uncertainty	21
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG541006D	01	Initial issue of report	Aug. 01, 2025



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§27.1507(a)	Effective Radiated Power (Band 106)	Pass	-
3.3	§27.1507 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §27.1506	Occupied Bandwidth	Pass	-
3.5	§2.1051 §27.1509 (a)	Conducted Band Edge Measurement	Pass	-
3.6	§2.1051 §27.1509 (a)	Conducted Spurious Emission	Pass	-
3.7	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §27.1509 (a)	Radiated Spurious Emission	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng**Report Producer: Clio Lo**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs LTE/5G NR/5G NR RedCap and GNSS.	
Antenna Type WWAN: Dipole Antenna	

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

Support band and evaluated information	
Supported band	B106
Evaluated and Tested band	B106

FDD band Power Class					
	SISO PC3	SISO PC2			
B106	V				

RF Exposure							
Max Antenna Gain information(dBi)							
Band	Ant1						Main Ant. #
B106	6.3						1

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Yuki Chen
Temperature (°C)	22.3~22.9
Relative Humidity (%)	53.2~55.5

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY (TAF Code: 3786)
Test Engineer	Fu Chen
Temperature (°C)	19.1~20.8
Relative Humidity (%)	53.1~65.8
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..


Modulation Type	Modulation
A	QPSK
B	16QAM
C	64QAM
D	256QAM

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C, D	1.4 /3 MHz	1, Half, Full	L, M, H
ERP	A, B, C, D	1.4 /3 MHz	1, Half, Full	L, M, H
PAR	A, B, C, D	3 MHz	Full	M
Bandwidth	A, B, C, D	1.4 /3 MHz	Full	M
CBE	A, B, C, D	1.4 /3 MHz	1RB Full	L, H
CSE	A	1.4 /3 MHz	1RB	L, M, H
Frequency Stability	A	1.4 MHz	Full	M
RSE	A	1.4 MHz	1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. One representative bandwidth is selected to perform PAR and frequency stability.

2.2 Connection Diagram of Test System

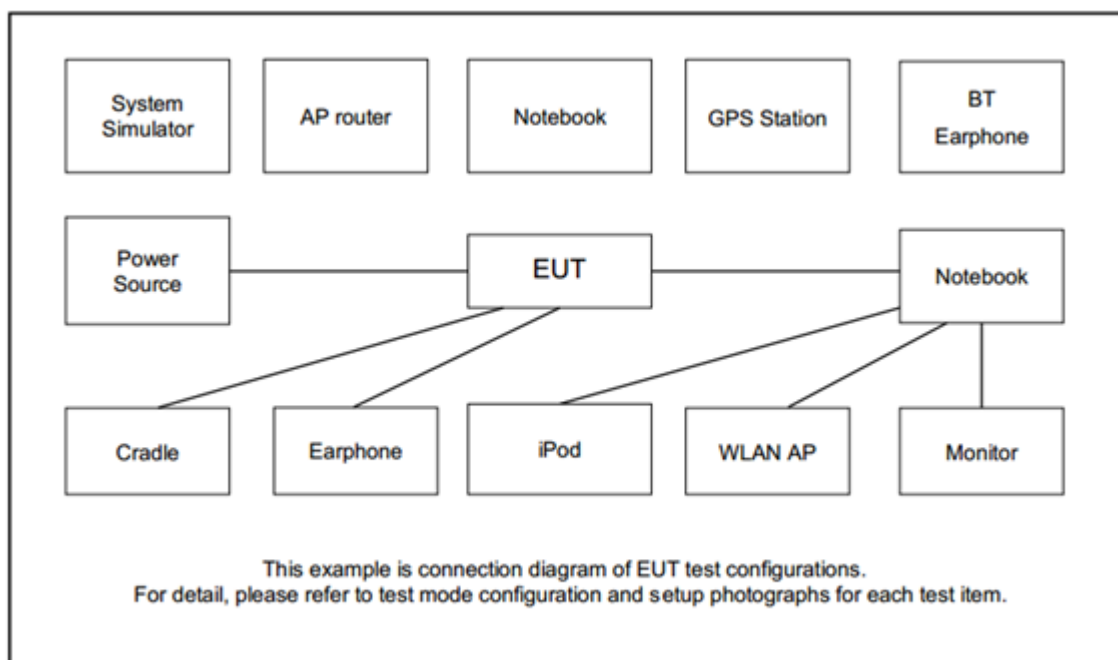

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

Band 106 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
3	Channel	-	134322	-
	Frequency	-	899	-
1.4	Channel	134314	134322	134330
	Frequency	898.2	899	899.8


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

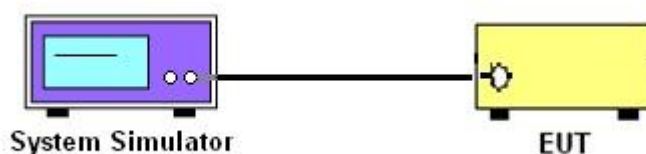

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

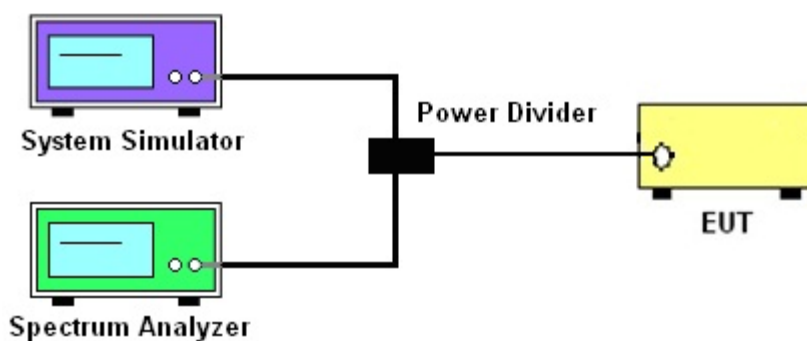

3.1.4 Frequency Stability

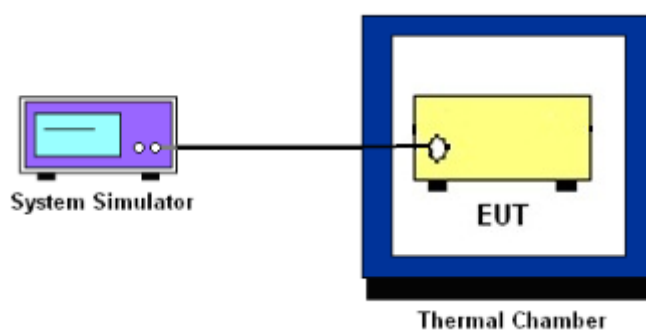

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP

3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 106.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

27.1509 (a)

For operations in the 897.5 - 900.5 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 100kHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The conducted spurious emission for the whole frequency range was taken.
4. Make the measurement with the spectrum analyzer's RBW = 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz, VBW = 3 * RBW.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

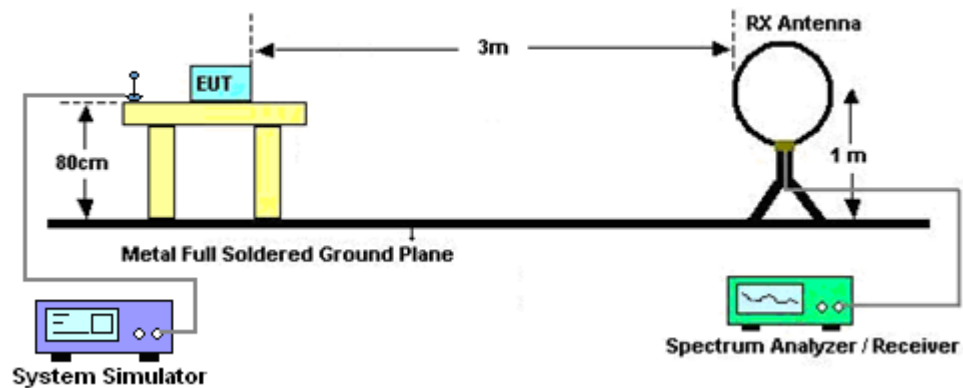

For radiated test from 30MHz to 1GHz

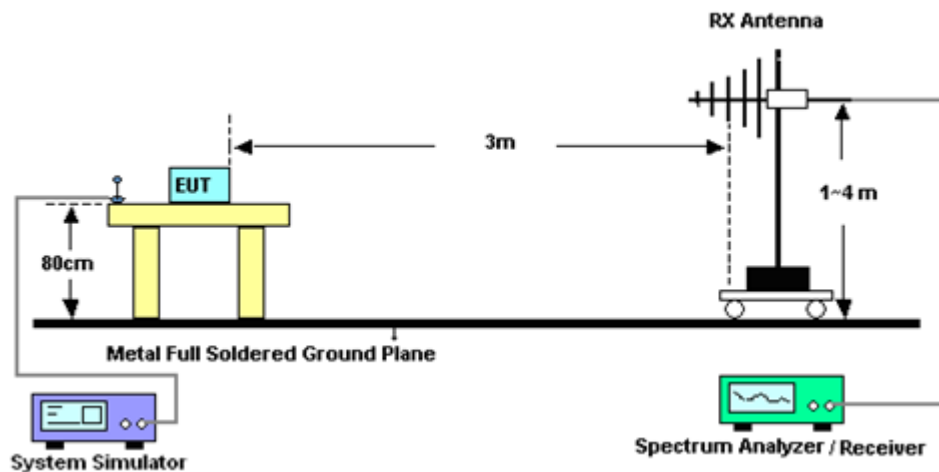

For radiated test above 1GHz

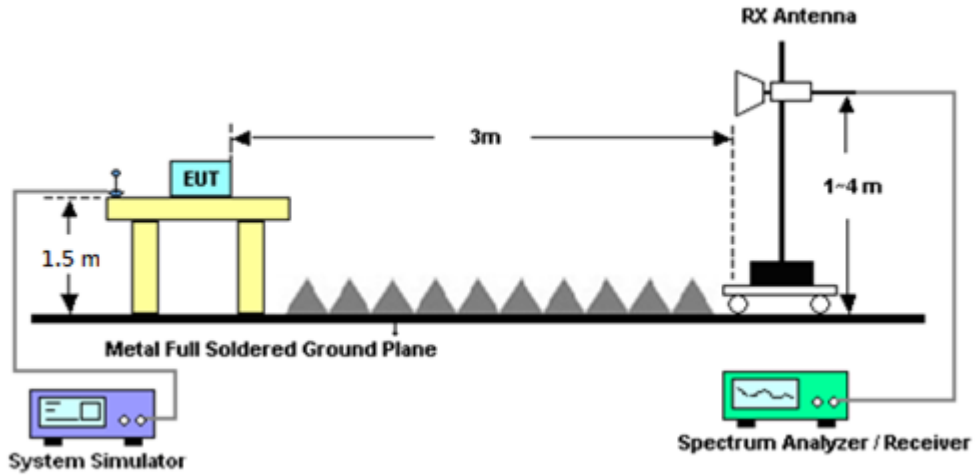

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7.
$$\text{Field Strength Level (dBm)} = \text{Spectrum Reading (dBm)} + \text{Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamp Factor}.$$
8.
$$\text{ERP (dBm)} = \text{EIRP (dBm)} - 2.15$$
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	Jun. 23, 2025	Nov. 26, 2025	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 18, 2024	Jun. 23, 2025	Dec. 17, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Jun. 23, 2025	Aug. 27, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 24, 2025	Jun. 23, 2025	Mar. 23, 2026	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Jun. 23, 2025	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Jun. 23, 2025	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 23, 2025	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 23, 2025	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 23, 2025	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jun. 23, 2025	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 29, 2024	Jun. 23, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 05, 2025	Jun. 23, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 05, 2025	Jun. 23, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 05, 2025	Jun. 23, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	30M~40G	May 10, 2025	Jun. 23, 2025	May 09, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-900-100 0-15000-60SS	SN12	1GHz High Pass Filter	Sep. 10, 2024	Jun. 23, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Radio Communication Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 01, 2024	Jun. 11, 2025~ Jun. 19, 2025	Sep. 01, 2025	Conducted (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 06, 2024	Jun. 11, 2025~ Jun. 19, 2025	Sep. 05, 2025	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPP-2323	GES906037	0V~64V ; 0A~6A	Nov. 27, 2024	Jun. 11, 2025~ Jun. 19, 2025	Nov. 26, 2025	Conducted (TH03-HY)
Coupler+10dB+ RFcable	Warison + WoKen + E-Instument	20dB 25W SMA Directional Coupler+ 10dB 18GHz_5W+SFL4 05_1.5M	#A+#1+#1+#7	1-18GHz	Jan. 03, 2025	Jun. 11, 2025~ Jun. 19, 2025	Jan. 02, 2026	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101905	10Hz~40GHz	Jul. 11, 2024	Jun. 11, 2025~ Jun. 19, 2025	Jul. 10, 2025	Conducted (TH03-HY)
Software	Sporton	LTE Conducted Test Tools	N/A	Conducted Test Item	N/A	Jun. 11, 2025~ Jun. 19, 2025	N/A	Conducted (TH03-HY)
Hygrometer	TECPEL	DTM-303B	TP200886	N/A	Mar. 03, 2025	Jun. 11, 2025~ Jun. 19, 2025	Mar. 02, 2026	Conducted (TH03-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.4 dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
--	--------

Appendix A. Test Results of Conducted Test



Conducted Output Power (Average power and ERP)

Part 27P LTE Band 106 Maximum Average Power [dBm] (GT - LC = 6.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
3	1	0	QPSK	-	24.30	-	28.45	0.6998
3	1	8		-	24.21	-		
3	1	14		-	24.15	-		
3	8	0		-	23.30	-		
3	8	4		-	23.30	-		
3	8	7		-	23.28	-		
3	15	0		-	23.25	-		
3	1	0	16-QAM	-	23.58	-	27.80	0.6026
3	1	8		-	23.65	-		
3	1	14		-	23.62	-		
3	8	0		-	22.43	-		
3	8	4		-	22.36	-		
3	8	7		-	22.30	-		
3	15	0		-	22.29	-		
3	1	0	64-QAM	-	22.49	-	26.66	0.4634
3	1	8		-	22.51	-		
3	1	14		-	22.34	-		
3	8	0		-	21.21	-		
3	8	4		-	21.19	-		
3	8	7		-	21.19	-		
3	15	0		-	21.20	-		
3	1	0	256-QAM	-	19.51	-	23.66	0.2323
3	1	8		-	19.44	-		
3	1	14		-	19.37	-		
3	8	0		-	19.37	-		
3	8	4		-	19.36	-		
3	8	7		-	19.33	-		
3	15	0		-	19.24	-		
Limit	ERP < 3W			Result			Pass	

Part 27P LTE Band 106 Maximum Average Power [dBm] (GT - LC = 6.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
1.4	1	0	QPSK	24.28	24.24	24.17	28.44	0.6982
1.4	1	3		24.19	24.25	24.25		
1.4	1	5		24.26	24.27	24.24		
1.4	3	0		24.17	24.29	24.26		
1.4	3	1		24.26	24.25	24.28		
1.4	3	3		24.25	24.23	24.27		
1.4	6	0		23.32	23.37	23.37		
1.4	1	0	16-QAM	23.65	23.75	23.67	28.01	0.6324
1.4	1	3		23.80	23.86	23.66		
1.4	1	5		23.83	23.78	23.78		
1.4	3	0		23.46	23.48	23.51		
1.4	3	1		23.50	23.46	23.44		
1.4	3	3		23.43	23.43	23.47		
1.4	6	0		22.40	22.52	22.40		
1.4	1	0	64-QAM	22.50	22.41	22.65	26.80	0.4786
1.4	1	3		22.52	22.47	22.59		
1.4	1	5		22.50	22.61	22.44		
1.4	3	0		22.44	22.44	22.33		
1.4	3	1		22.46	22.46	22.40		
1.4	3	3		22.40	22.44	22.39		
1.4	6	0		21.35	21.36	21.29		
1.4	1	0	256-QAM	19.55	19.46	19.41	23.70	0.2344
1.4	1	3		19.50	19.50	19.38		
1.4	1	5		19.51	19.54	19.32		
1.4	3	0		19.38	19.10	19.39		
1.4	3	1		19.38	19.54	19.39		
1.4	3	3		19.34	19.48	19.30		
1.4	6	0		19.50	19.43	19.35		
Limit	ERP < 3W			Result			Pass	

**LTE Band 106****Peak-to-Average Ratio**

Mode	LTE Band 106 / 3MHz				
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.58	5.57	6.20	6.55	PASS

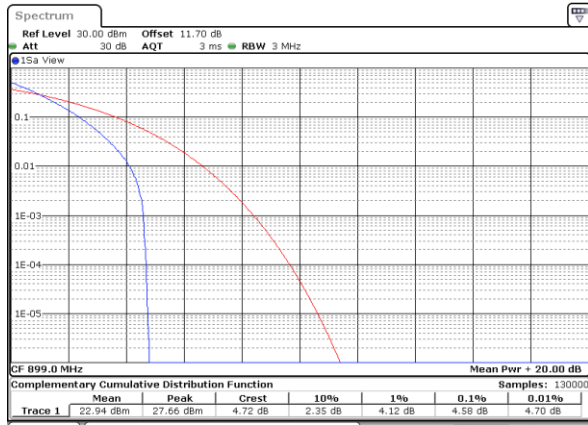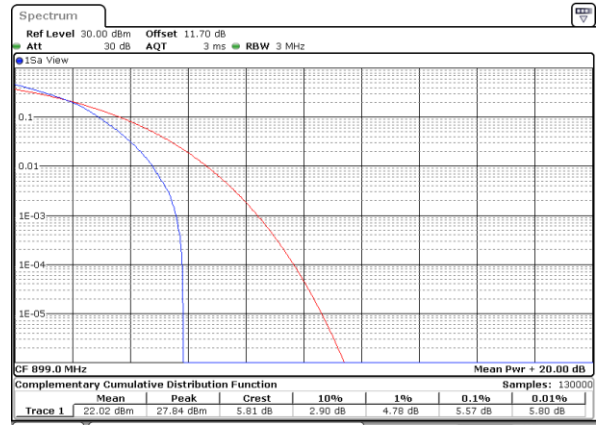LTE Band 106 / 3MHz / QPSK
Middle Channel / Full RB

LTE Band 106 / 3MHz / 16QAM
Middle Channel / Full RB

LTE Band 106 / 3MHz / 64QAM
Middle Channel / Full RB

LTE Band 106 / 3MHz / 256QAM
Middle Channel / Full RB



**26dB Bandwidth**

Mode	LTE Band 106 : 26dB BW(MHz)			
BW	1.4MHz		3MHz	
Mod.	QPSK	16QAM	QPSK	16QAM
Middle CH	1.33	1.37	3.04	3.06
Mode	LTE Band 106 : 26dB BW(MHz)			
BW	1.4MHz		3MHz	
Mod.	64QAM	256QAM	64QAM	256QAM
Middle CH	1.33	1.29	3.02	3.11




LTE Band 106


Middle Channel / 1.4MHz / QPSK

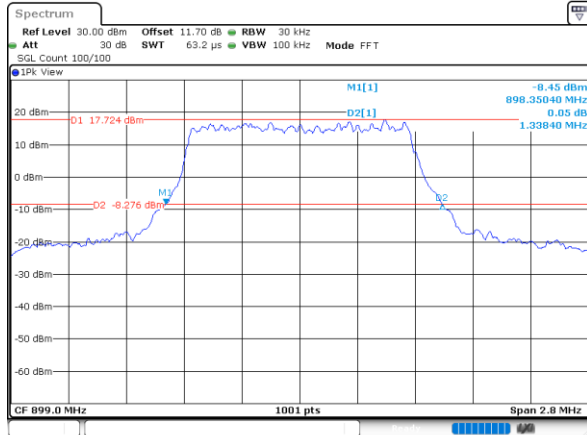


Middle Channel / 3MHz / QPSK

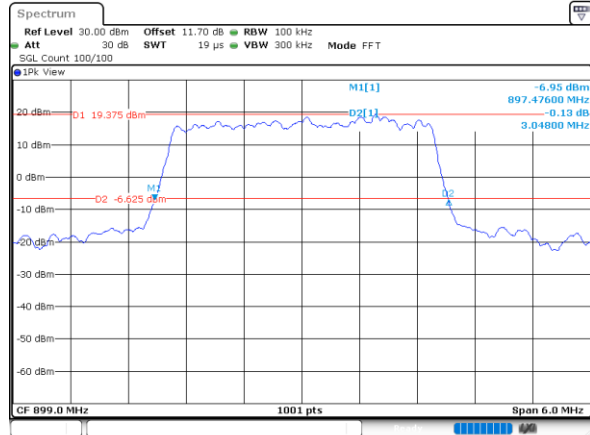

Middle Channel / 1.4MHz / 16QAM

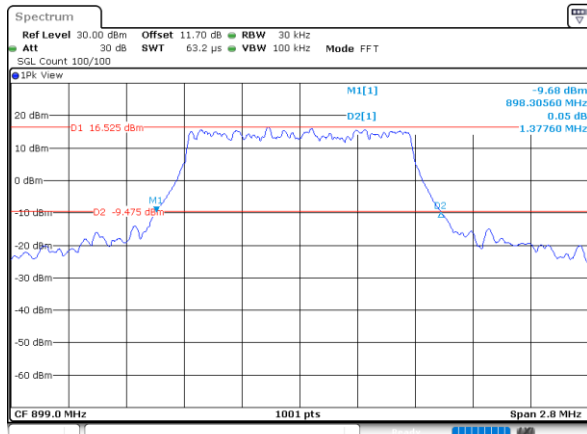


Middle Channel / 3MHz / 16QAM

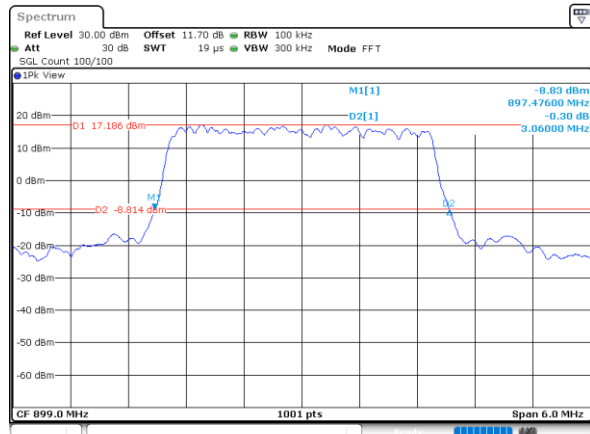




LTE Band 106

Middle Channel / 1.4MHz / 64QAM

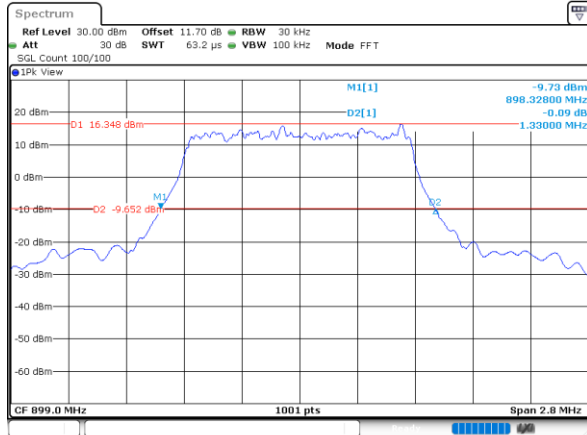


Middle Channel / 3MHz / 64QAM

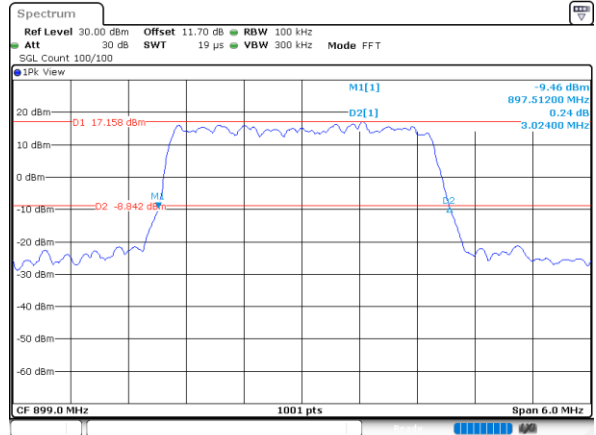


LTE Band 106

Middle Channel / 1.4MHz / 256QAM

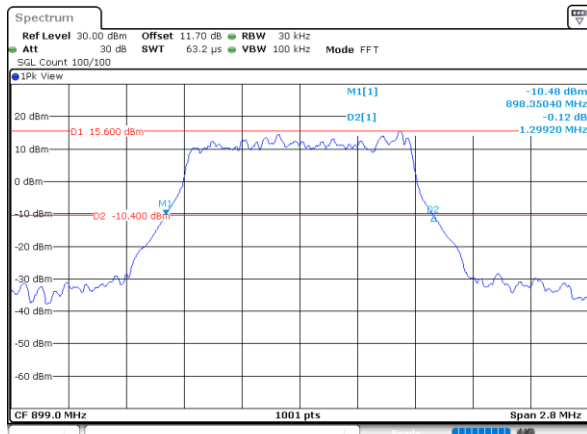

Middle Channel / 3MHz / 256QAM

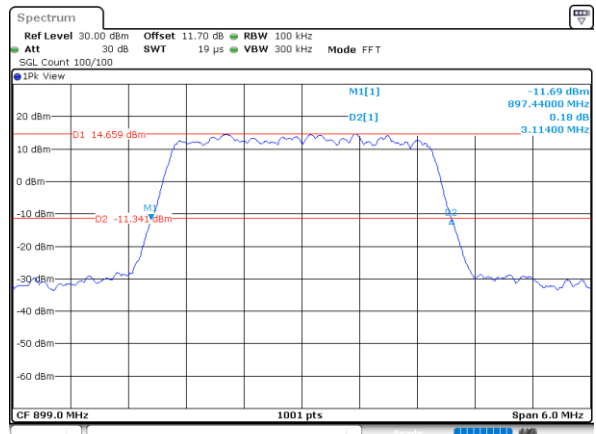


**Occupied Bandwidth**

Mode	LTE Band 106 : 99%OBW(MHz)			
BW	1.4MHz		3MHz	
Mod.	QPSK	16QAM	QPSK	16QAM
Middle CH	1.09	1.09	2.72	2.73
Mode	LTE Band 106 : 99%OBW(MHz)			
BW	1.4MHz		3MHz	
Mod.	64QAM	256QAM	64QAM	256QAM
Middle CH	1.10	1.08	2.74	2.73




LTE Band 106

Middle Channel / 1.4MHz / QPSK

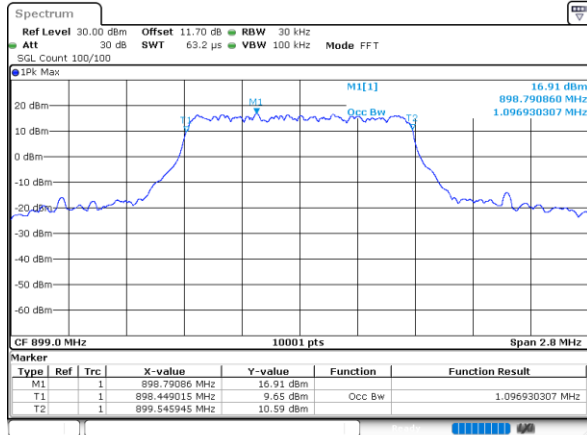


Date: 19 JUN 2025 10:02:40

Middle Channel / 3MHz / QPSK

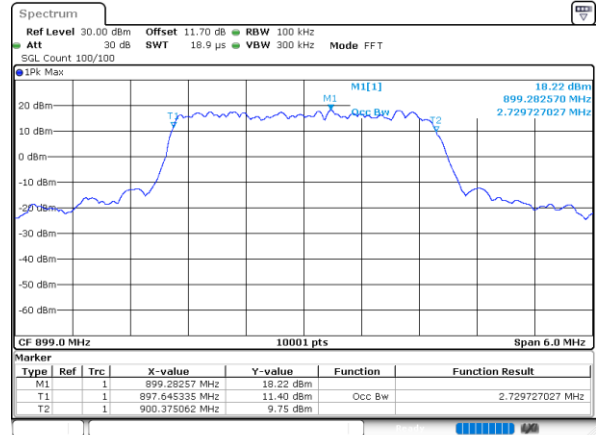


Date: 19 JUN 2025 10:28:49

Middle Channel / 1.4MHz / 16QAM

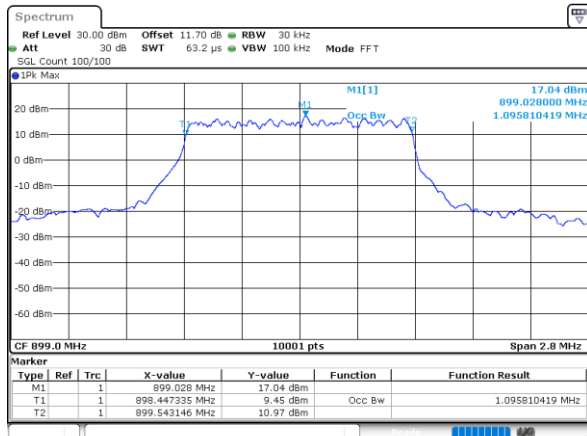

Date: 19 JUN 2025 10:03:03

Middle Channel / 3MHz / 16QAM

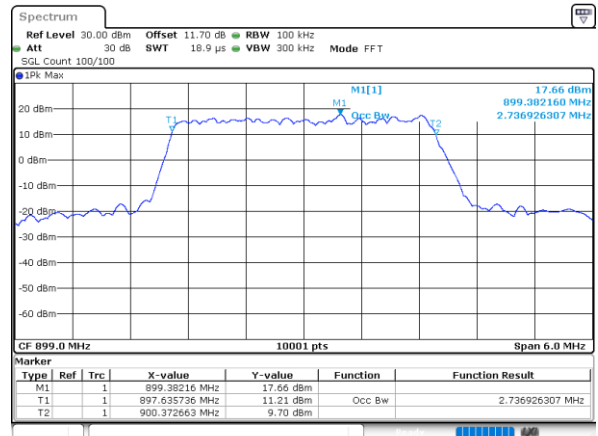


Date: 19 JUN 2025 10:29:12




LTE Band 106


Middle Channel / 1.4MHz / 64QAM

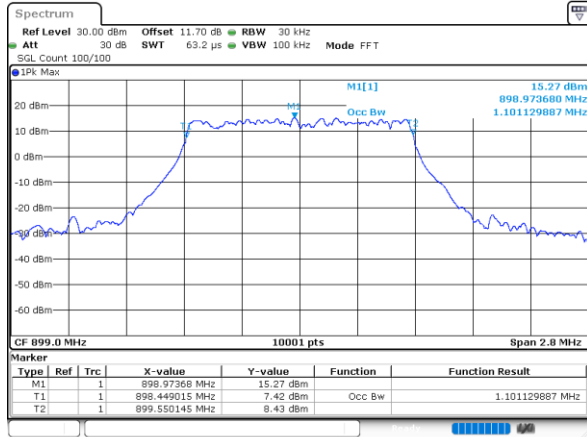


Middle Channel / 3MHz / 64QAM




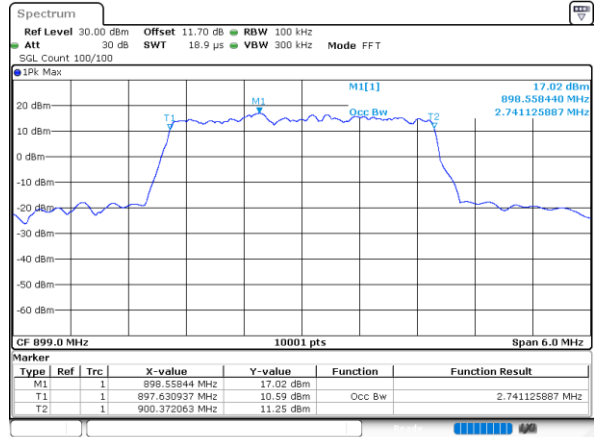


Middle Channel / 1.4MHz / 256QAM

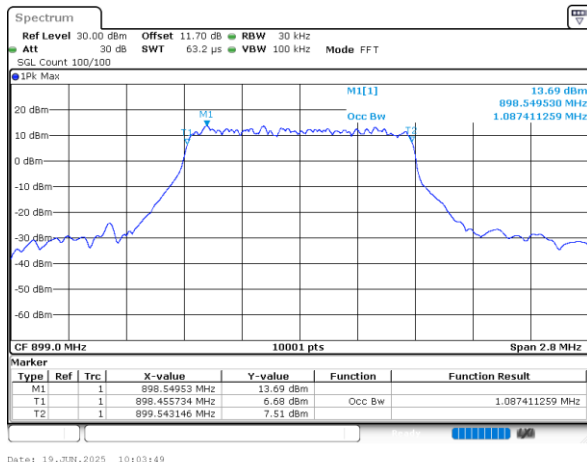

Middle Channel / 3MHz / 256QAM

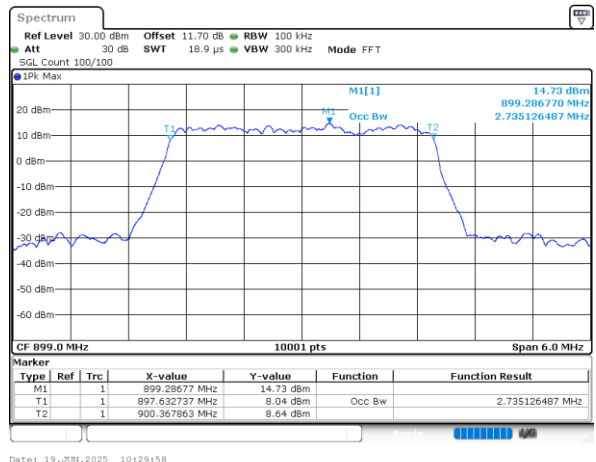


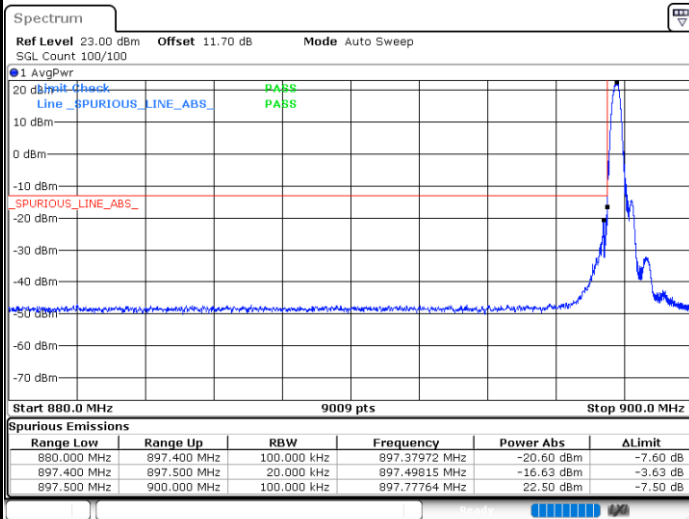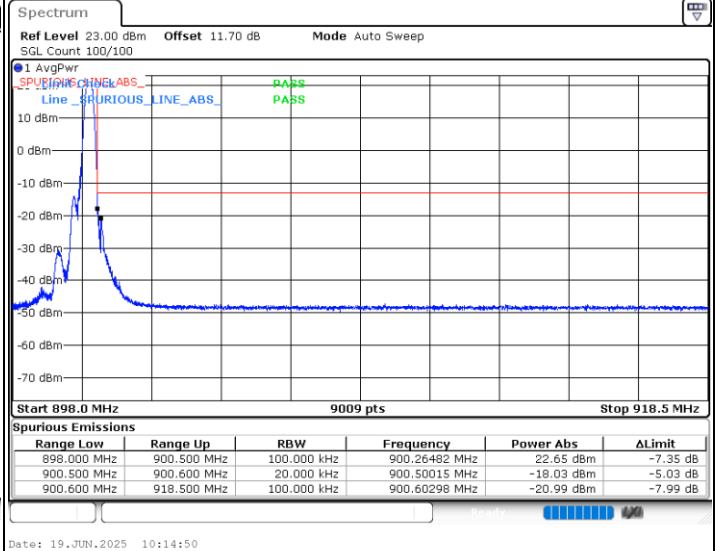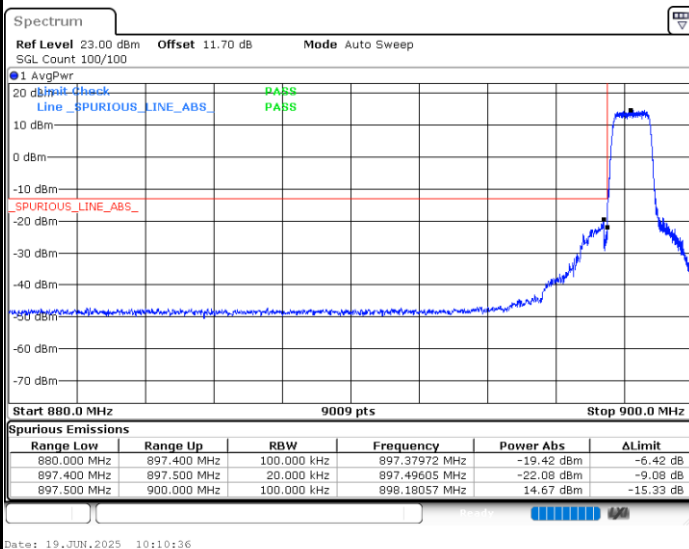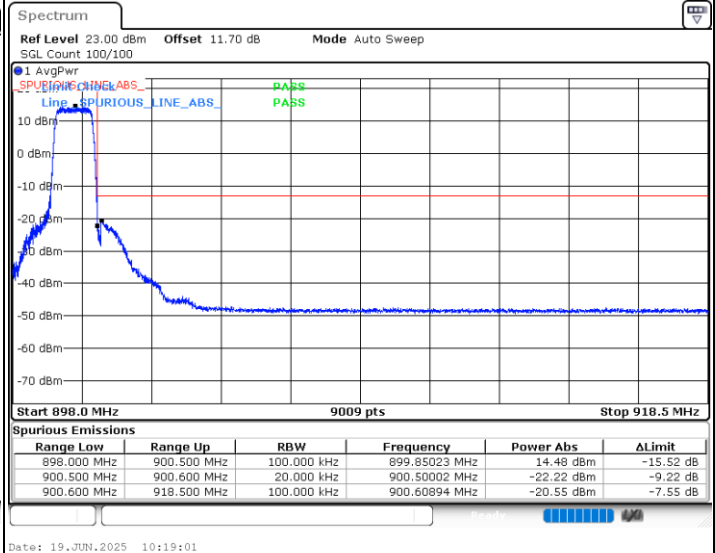**Conducted Band Edge****LTE Band 106 / 1.4MHz / QPSK****Lowest Band Edge / 1RB****Highest Band Edge / 1RB****Lowest Band Edge / Full RB****Highest Band Edge / Full RB**




LTE Band 106 / 1.4MHz / 16QAM


Lowest Band Edge / 1 RB

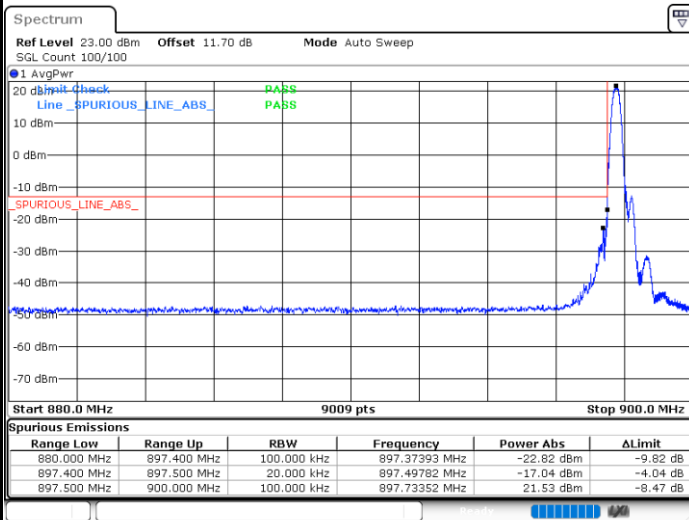


Highest Band Edge / 1 RB

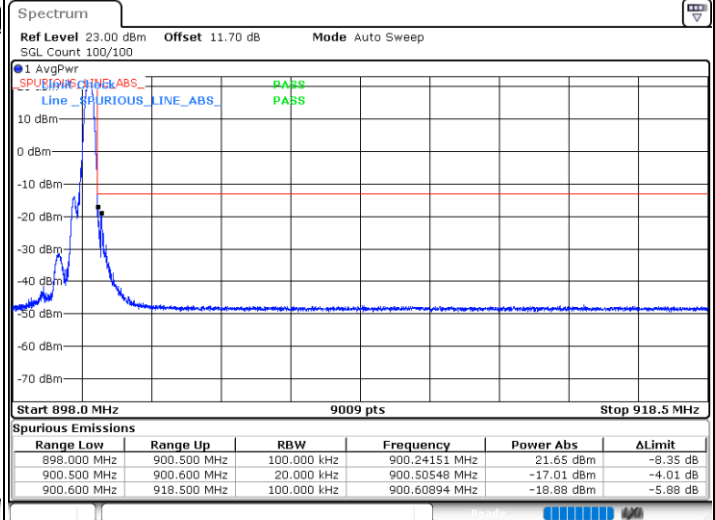

Lowest Band Edge / Full RB

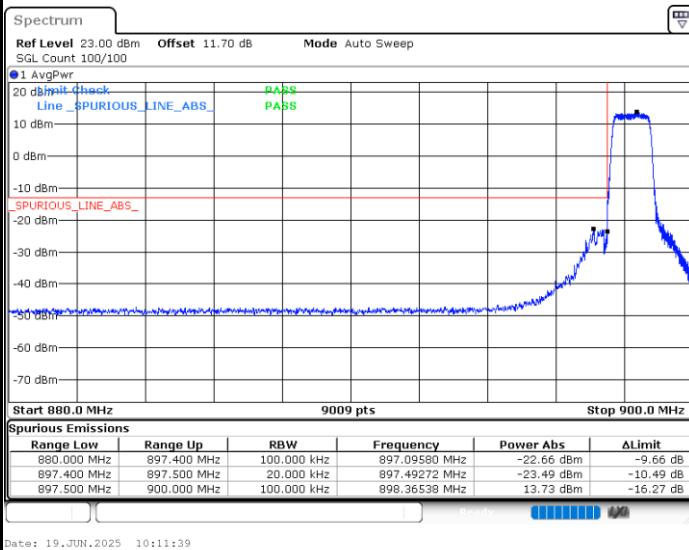


Highest Band Edge / Full RB

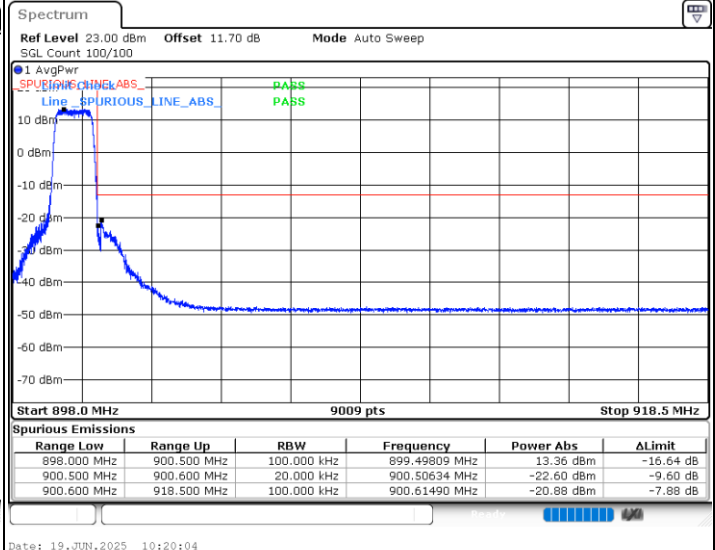




LTE Band 106 / 1.4MHz / 64QAM


Lowest Band Edge / 1 RB

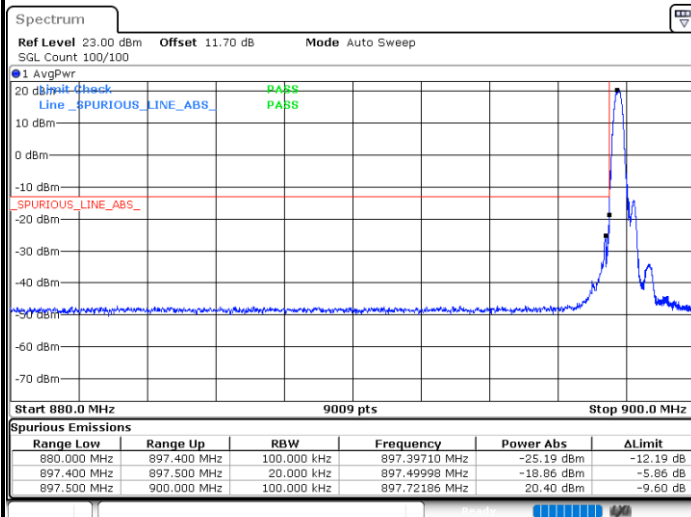


Highest Band Edge / 1 RB

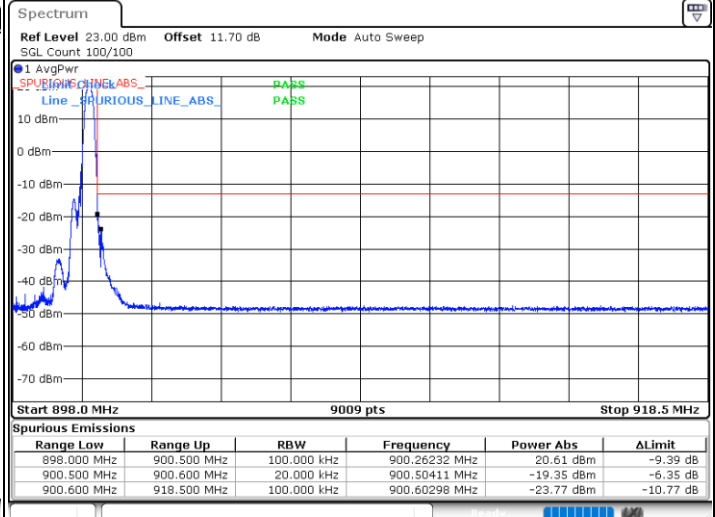

Lowest Band Edge / Full RB

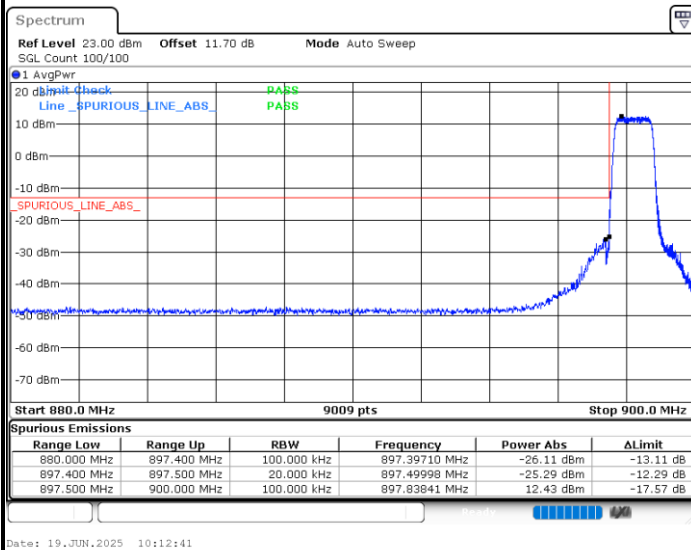


Highest Band Edge / Full RB

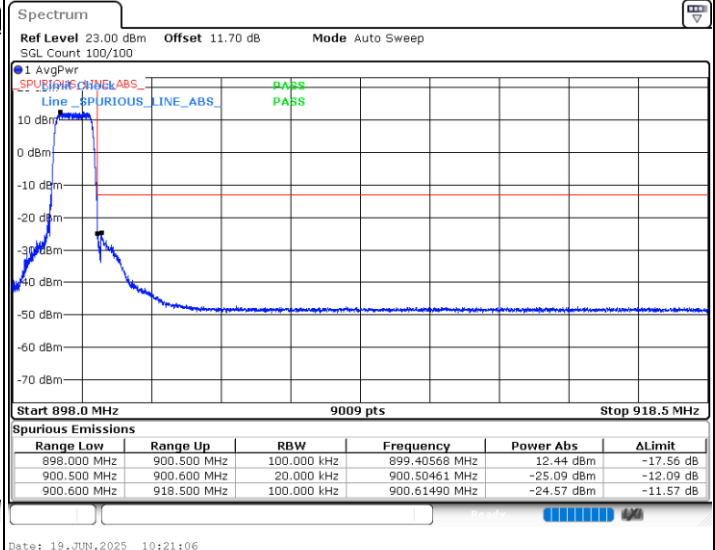




LTE Band 106 / 1.4MHz / 256QAM


Lowest Band Edge / 1 RB

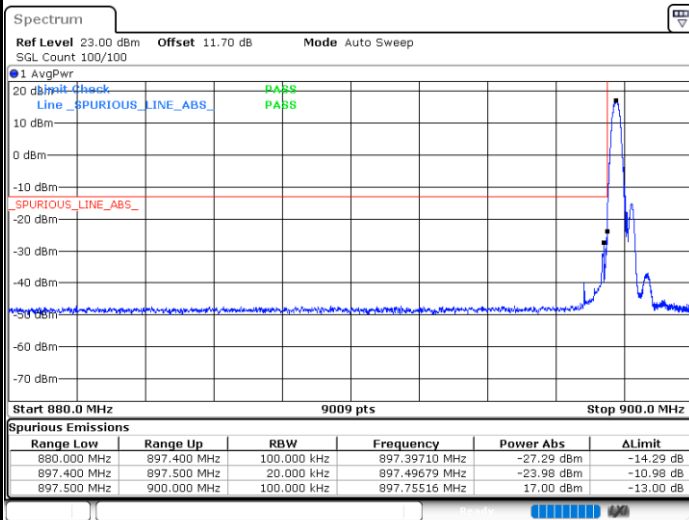


Highest Band Edge / 1 RB

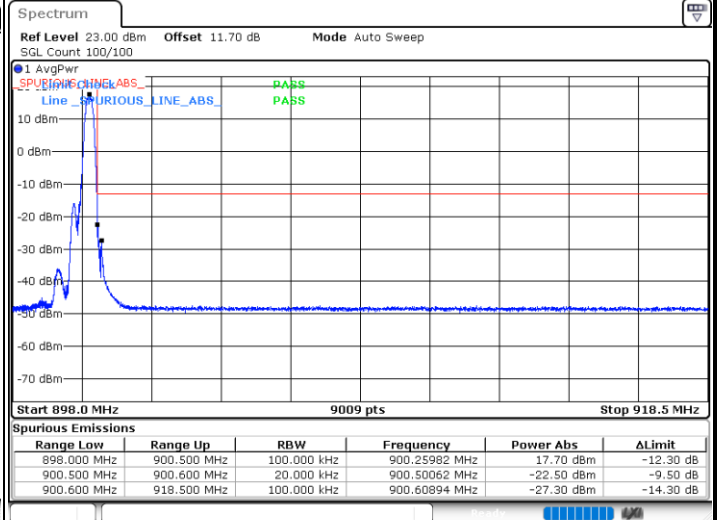

Lowest Band Edge / Full RB

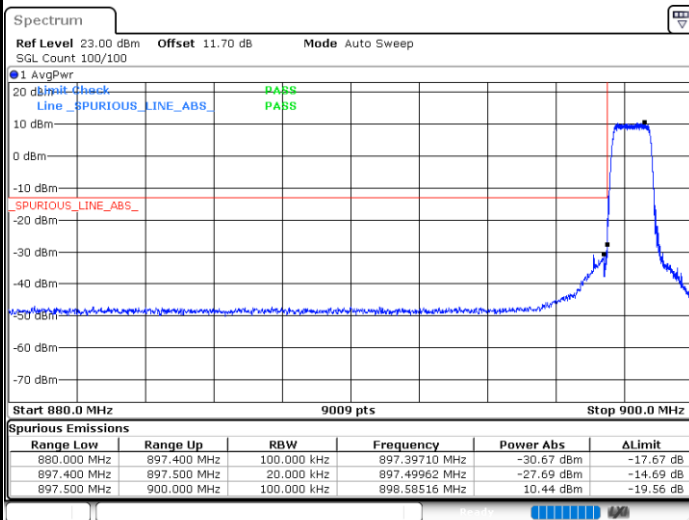

Highest Band Edge / Full RB

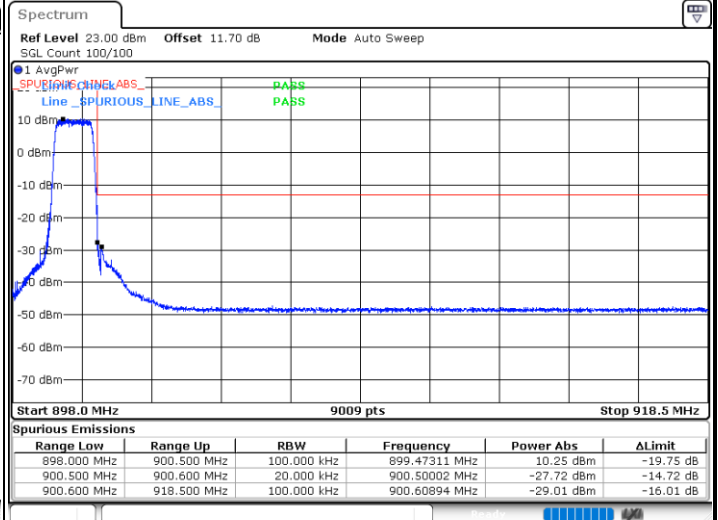





LTE Band 106 / 3MHz

Middle Band Edge / Full RB / QPSK

Middle Band Edge / Full RB / 16QAM

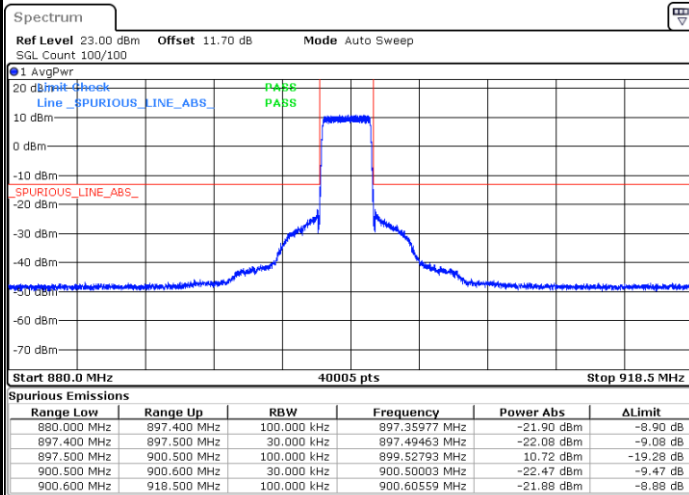


Date: 19.JUN.2025 10:32:35

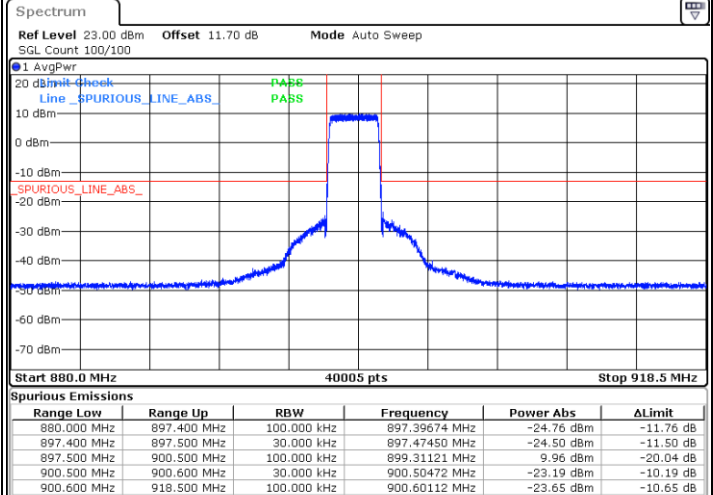


Date: 19.JUN.2025 10:33:38

Middle Band Edge / Full RB / 64QAM

Middle Band Edge / Full RB / 256QAM

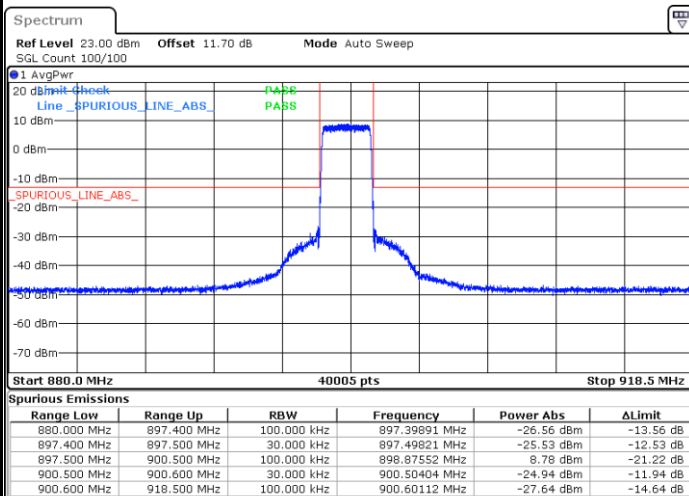

Date: 19.JUN.2025 10:34:40

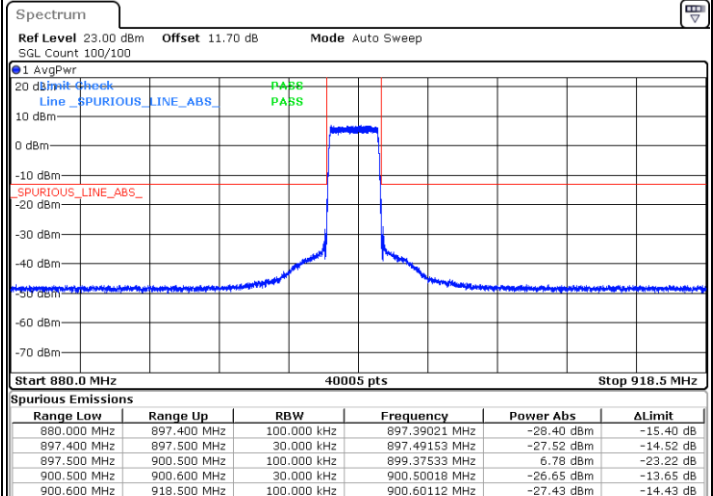


Date: 19.JUN.2025 10:35:42



Conducted Spurious Emission


LTE Band 106 / 1.4MHz

Lowest Channel / QPSK

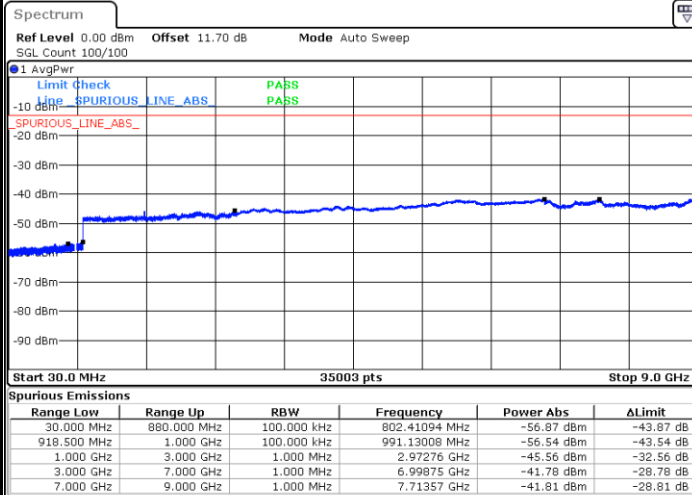


Date: 19.JUN.2025 09:59:30

Middle Channel / QPSK

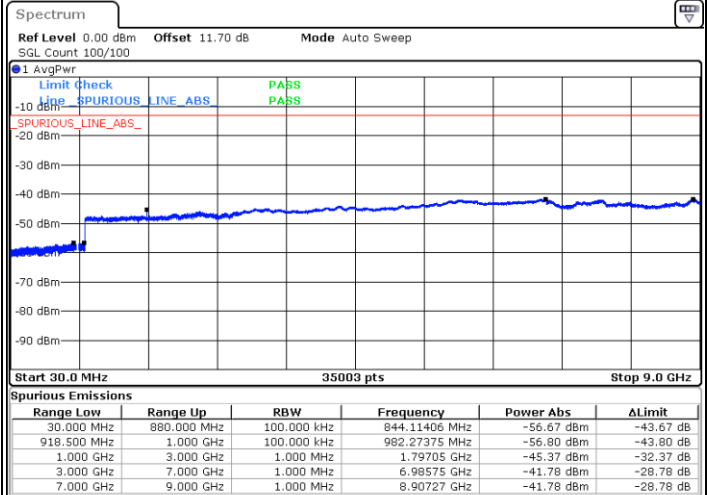

Date: 19.JUN.2025 10:00:52

Highest Channel / QPSK

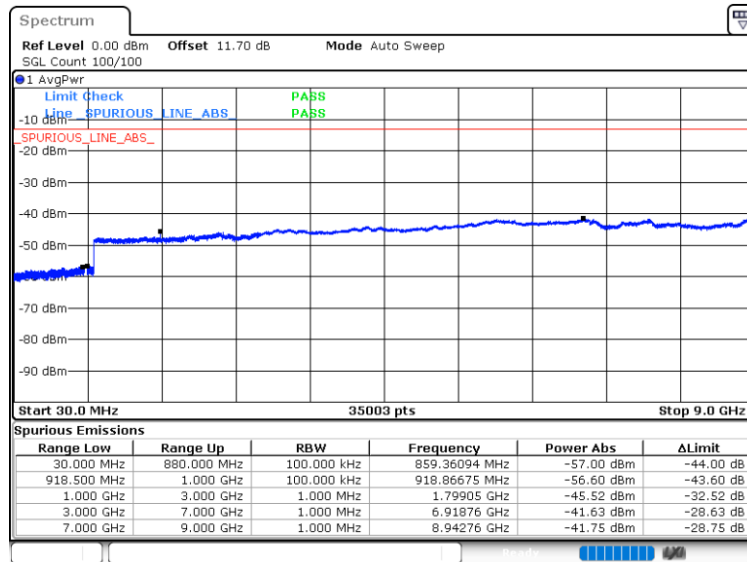


Date: 19.JUN.2025 10:02:15



LTE Band 106 / 3MHz

Middle Channel / QPSK

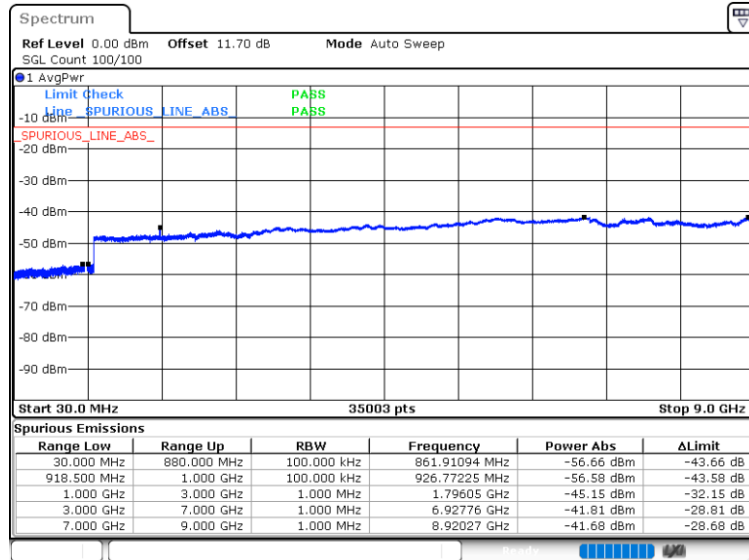

Date: 19 JUN 2025 10:38:48

Frequency Stability

Test Conditions		LTE Band 106 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 1.4MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0067	PASS
40	Normal Voltage	0.0003	
30	Normal Voltage	0.0009	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0067	
0	Normal Voltage	0.0089	
-10	Normal Voltage	0.0130	
-20	Normal Voltage	0.0053	
-30	Normal Voltage	0.0018	
20	Maximum Voltage	0.0011	
20	Normal Voltage	0.0000	
20	Minimum Voltage	0.0112	

Note:

1. Normal Voltage = 3.3 V. ; Minimum Voltage = 3.135 V. ; Maximum Voltage = 4.4 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

B1. Summary of each worse mode

Mode	Band	Part	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	LTE B106	Part 27P	L	2692	-42.56	RMS	28.30	-26.19	0.37	-95.23	50.19	-13.00	-29.56	V	1




Ant. 1

Part 27P Mode 1

LTE B106 1.4M Ch134299 1RB0 QPSK

L

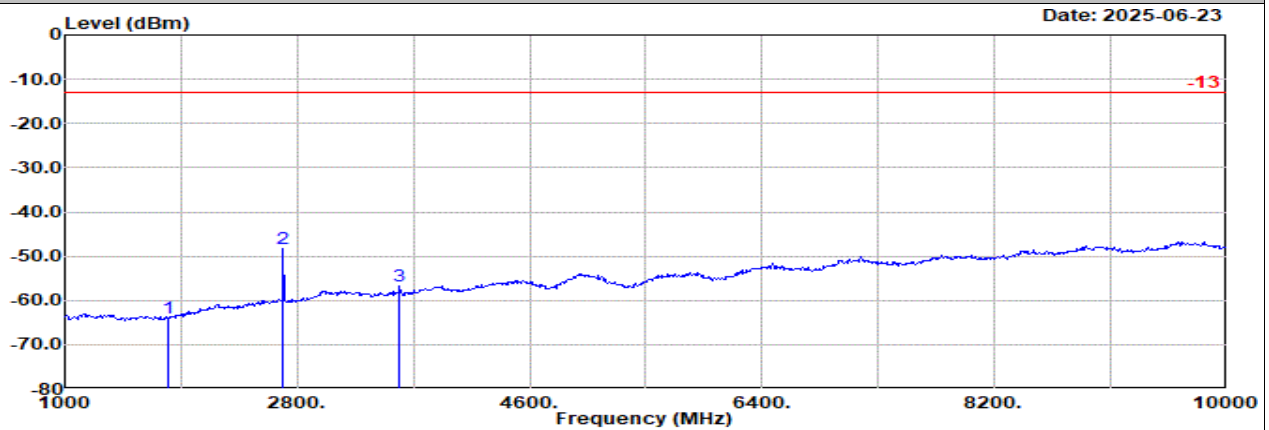


Site : 03CH11-HY

Condition: -13 3m 9120D_01620_240828 Horizontal

: LTE Band 106 1.4M Ch134299 1RB0 QPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin Limit		Margin Pol	
	MHz	dBm		Factor	dB		dB	dBuV	dBm	dB
1	1801.00	-63.86	RMS	25.00	-27.91	0.35	-95.23	0.00	-13.00	-50.86
2	2692.00	-48.38	RMS	28.30	-26.19	0.37	-95.23	44.37	-13.00	-35.38
3	3592.00	-56.71	RMS	29.68	-24.99	0.45	-95.23	33.38	-13.00	-43.71

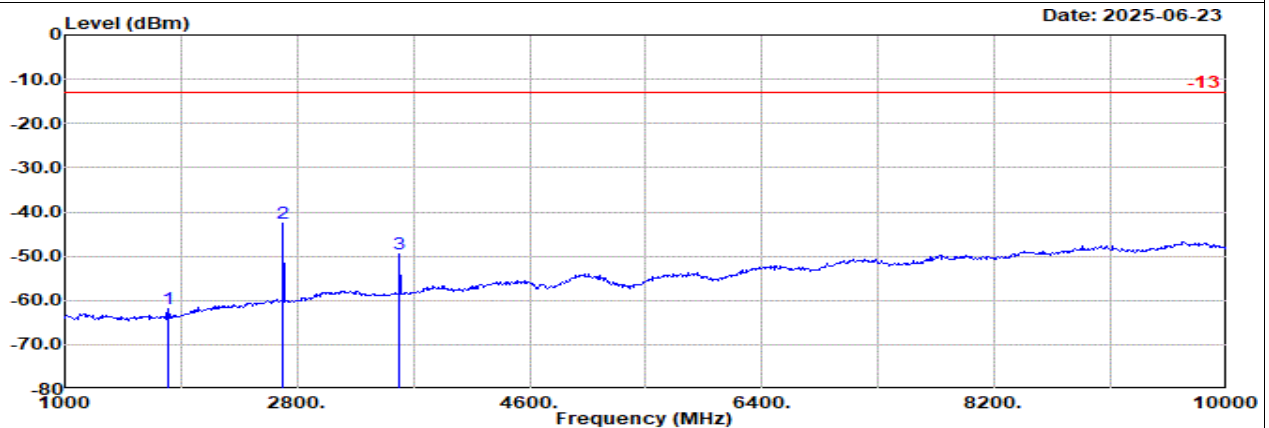

Site : 03CH11-HY

Condition: -13 3m 9120D_01620_240828 Vertical

: LTE Band 106 1.4M Ch134299 1RB0 QPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin Limit		Margin Pol	
	MHz	dBm		Factor	dB		dB	dBuV	dBm	dB
1	1801.00	-62.02	RMS	25.00	-27.91	0.35	-95.23	35.77	-13.00	-49.02
2	2692.00	-42.56	RMS	28.30	-26.19	0.37	-95.23	50.19	-13.00	-29.56
3	3592.00	-49.60	RMS	29.68	-24.99	0.45	-95.23	40.49	-13.00	-36.60




Ant. 1

Part 27P Mode 1

LTE B106 1.4M Ch134317 1RB0 QPSK

M

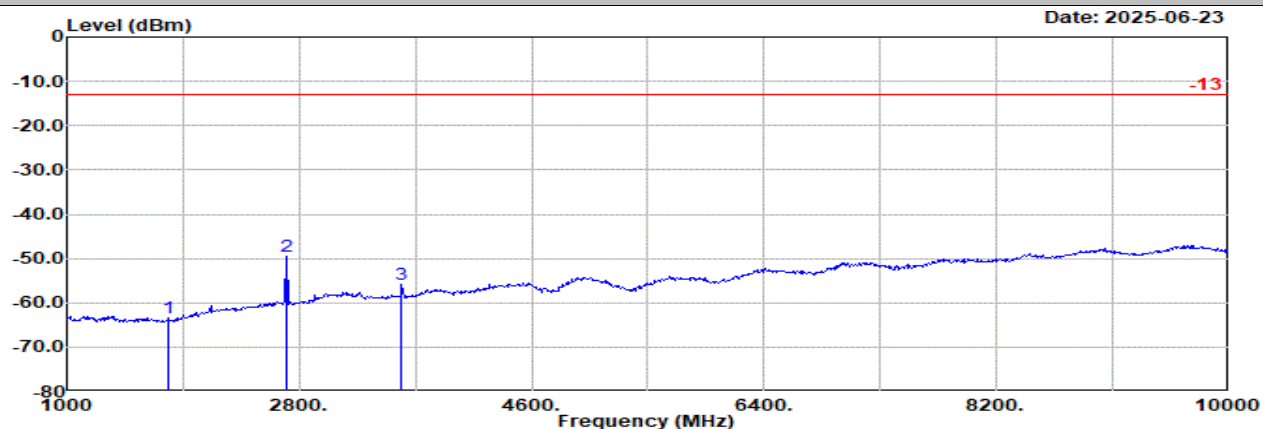


Site : 03CH11-HY

Condition: -13 3m 9120D_01620_240828 Horizontal

: LTE Band 106 1.4M Ch134317 1RB0 QPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
1	1792.00	-63.54	RMS	25.00	-27.93	0.36	-95.23	34.26	-13.00	-50.54 Horizontal
2	2701.00	-49.63	RMS	28.31	-26.17	0.37	-95.23	43.09	-13.00	-36.63 Horizontal
3	3592.00	-55.80	RMS	29.68	-24.99	0.45	-95.23	34.29	-13.00	-42.80 Horizontal

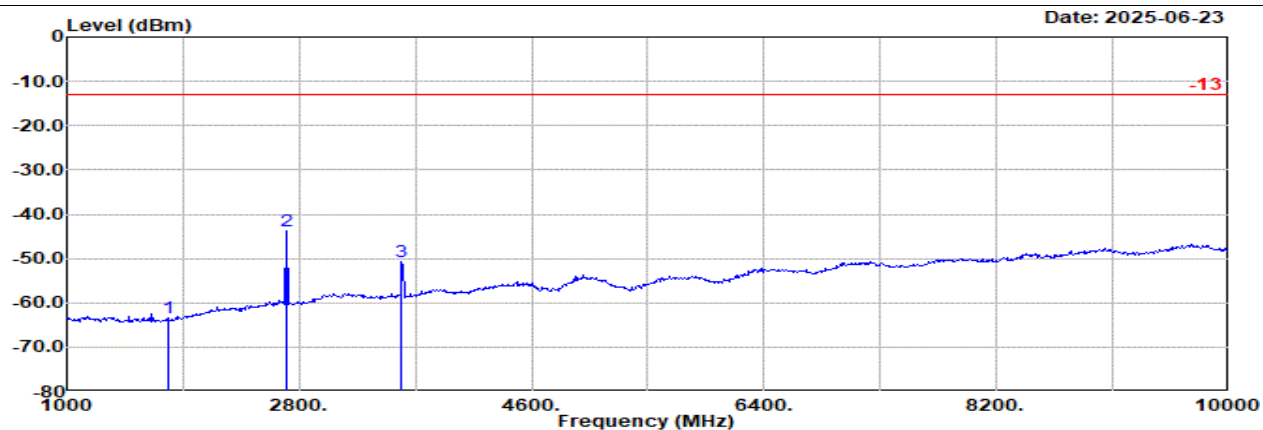

Site : 03CH11-HY

Condition: -13 3m 9120D_01620_240828 Vertical

: LTE Band 106 1.4M Ch134317 1RB0 QPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
1	1792.00	-63.45	RMS	25.00	-27.93	0.36	-95.23	34.35	-13.00	-50.45 Vertical
2	2701.00	-43.89	RMS	28.31	-26.17	0.37	-95.23	48.83	-13.00	-30.89 Vertical
3	3592.00	-50.57	RMS	29.68	-24.99	0.45	-95.23	39.52	-13.00	-37.57 Vertical




Ant. 1

Part 27P Mode 1

LTE B106 1.4M Ch134335 1RB0 QPSK

H

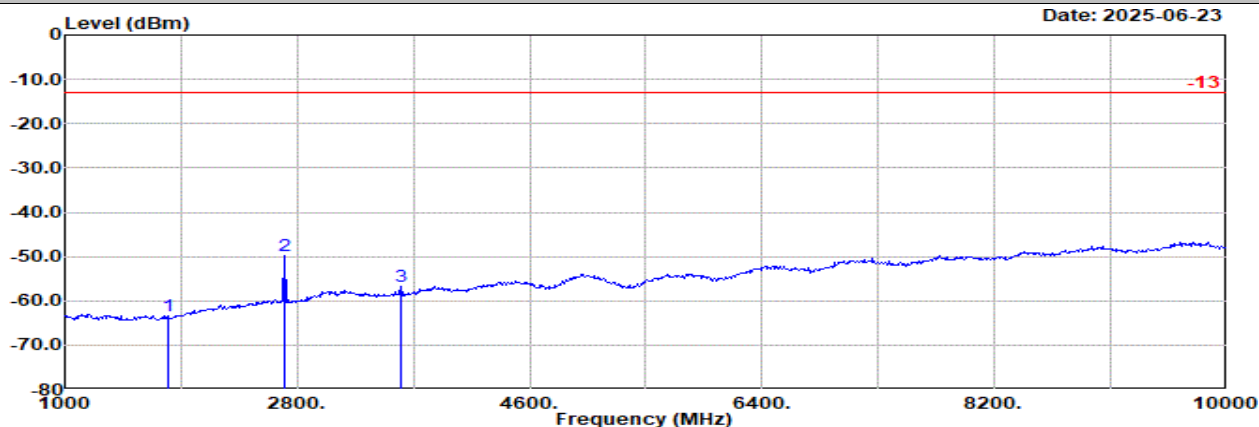


Site : 03CH11-HY

Condition: -13 3m 9120D_01620_240828 Horizontal

: LTE Band 106 1.4M Ch134335 1RB0 QPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1801.00	-63.38	RMS	25.00	-27.91	0.35	-95.23	34.41	-13.00	-50.38	Horizontal
2	2701.00	-49.81	RMS	28.31	-26.17	0.37	-95.23	42.91	-13.00	-36.81	Horizontal
3	3601.00	-56.89	RMS	29.70	-24.98	0.45	-95.23	33.17	-13.00	-43.89	Horizontal

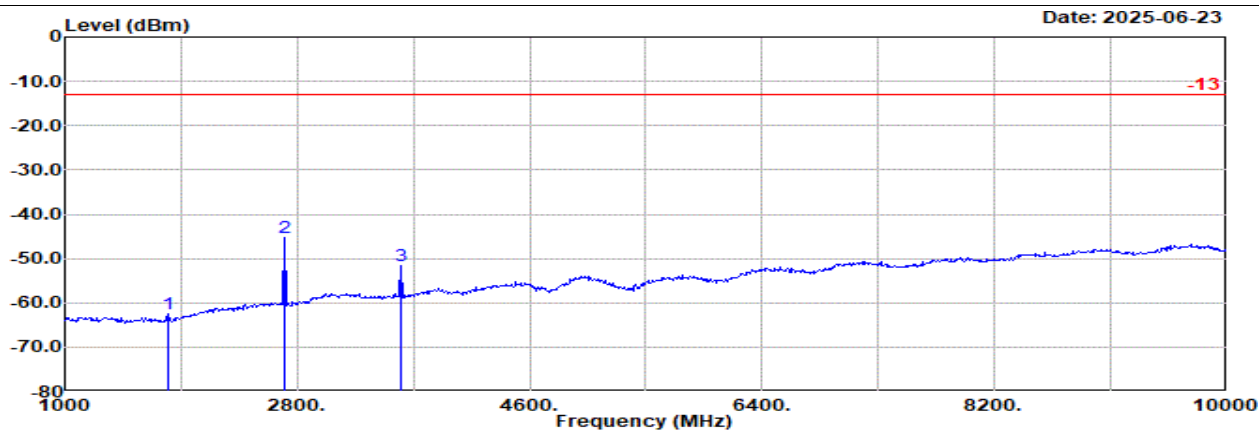

Site : 03CH11-HY

Condition: -13 3m 9120D_01620_240828 Vertical

: LTE Band 106 1.4M Ch134335 1RB0 QPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1801.00	-62.45	RMS	25.00	-27.91	0.35	-95.23	35.34	-13.00	-49.45	Vertical
2	2701.00	-45.14	RMS	28.31	-26.17	0.37	-95.23	47.58	-13.00	-32.14	Vertical
3	3601.00	-51.49	RMS	29.70	-24.98	0.45	-95.23	38.57	-13.00	-38.49	Vertical




Ant. 1

Part 27P Mode 1


LTE B106 1.4M Ch134299 1RB0 QPSK

L

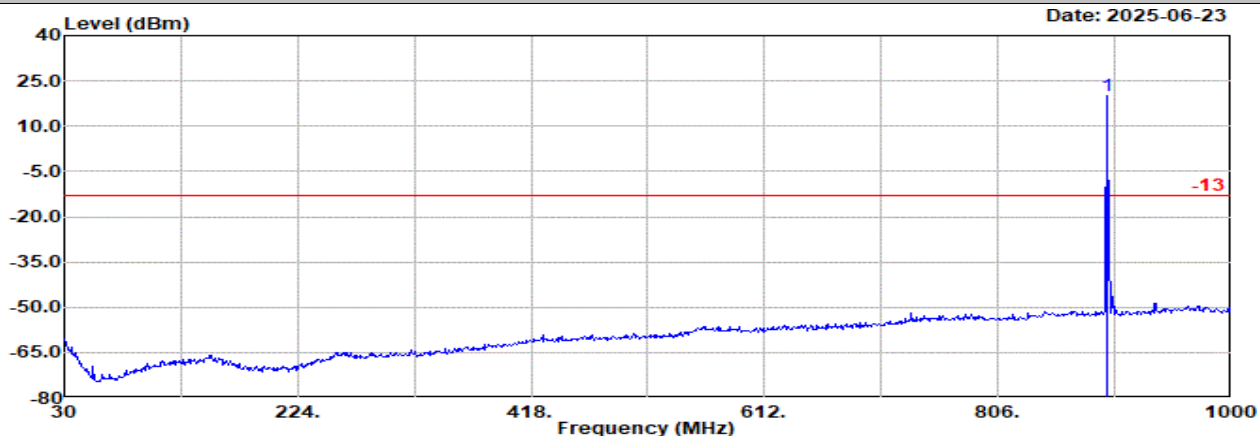

Site : 03CH11-HY
Condition: -13 3m BILOG_37059&01_241127 Horizontal
: LTE Band 106 1.4M Ch134299 1RB0 QPSK
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	897.18	20.18	RMS	29.17	4.19	0.00	-95.23	82.05	-13.00	33.18 Horizontal

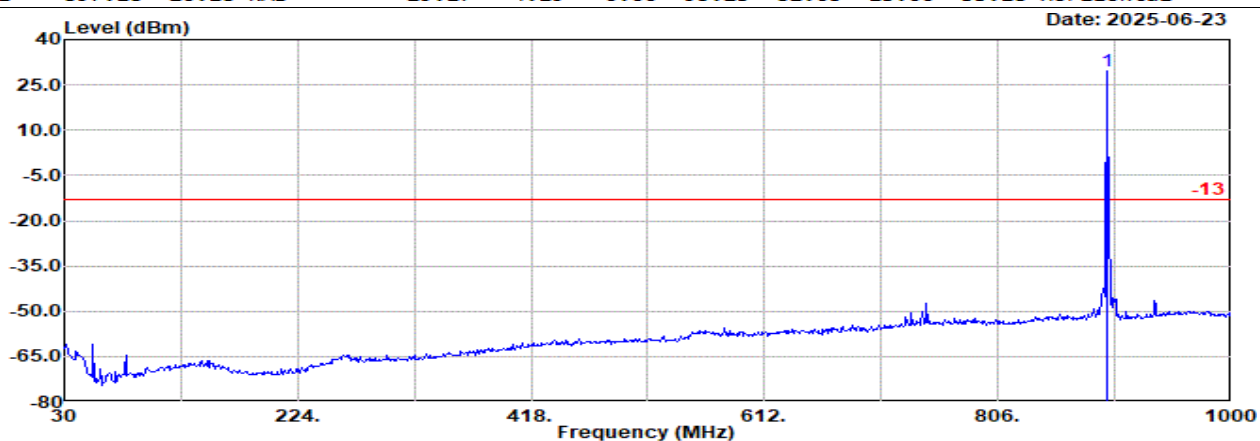

Site : 03CH11-HY
Condition: -13 3m BILOG_37059&01_241127 Vertical
: LTE Band 106 1.4M Ch134299 1RB0 QPSK
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	897.18	29.67	RMS	29.17	4.19	0.00	-95.23	91.54	-13.00	42.67 Vertical

Remark: #1 is fundamental signal which can be ignored.