



FCC OET BULLETIN 65 SUPPLEMENT C 01-01
IEEE STD 1528:2003

SAR EVALUATION REPORT

For

Intel® Centrino® Advanced-N6205
(Tested inside of Panasonic Tablet PC CF-19)

MODEL NUMBER: WL11A
FCC ID: ACJ9TGWL11A

REPORT NUMBER: 11J14001-2A1

ISSUE DATE: February 20, 2012

Prepared for
PANASONIC CORPORATION OF NORTH AMERICA
ONE PANASONIC WAY, 4B-8
SECAUCUS, NEW JERSEY 07094, U.S.A.

Prepared by
COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP®
NVLAP LAB CODE 200065-0


Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|-------------------|---|------------------|
| -- | January 19, 2012 | Initial Issue | -- |
| A | February 14, 2012 | Updated report based on reviewer's comments. 1. Sec. 11.2: Performed Output Power Measurement for All WiFi Channels for 5GHz Bands. | Bobby Bayani |
| A1 | February 20, 2012 | Updated report based on reviewer's comments. 1. Sec. 11.2: Added additional channel & frequency 2. Sec. 12: Performed Additional Testing for 5.5GHz Band. Removed unnecessary SAR Data. | Keisuke Kawamura |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. Attestation of Test Results..... | 4 |
| 2. Test Methodology | 5 |
| 3. Facilities and Accreditation | 5 |
| 4. Calibration and Uncertainty | 6 |
| 4.1. <i>Measuring Instrument Calibration</i> | 6 |
| 4.2. <i>Measurement Uncertainty.....</i> | 7 |
| 5. Equipment Under Test..... | 8 |
| 6. System Specification..... | 9 |
| 7. Composition of Ingredients for Tissue Simulating Liquids | 10 |
| 8. Tissue Dielectric Parameters | 11 |
| 8.1. <i>Liquid Check Results</i> | 12 |
| 9. System Verification..... | 14 |
| 9.1. <i>System Check Results.....</i> | 15 |
| 10. SAR Measurement Procedures | 16 |
| 11. RF Output Power Verification..... | 17 |
| 11.1. <i>RF OUTPUT POWER FOR 2.4 GHZ BAND.....</i> | 17 |
| 11.2. <i>RF OUTPUT POWER FOR 5 GHZ BANDS</i> | 18 |
| 12. SAR Test Results | 24 |
| 13. Appendixes | 31 |
| 13.1. <i>System Check Plots</i> | 31 |
| 13.2. <i>SAR Test Plots for 2.4 GHz.....</i> | 31 |
| 13.3. <i>SAR Test Plots for 5 GHz bands</i> | 31 |
| 13.4. <i>Calibration Certificate for EX3DV3 SN 3531.....</i> | 31 |
| 13.5. <i>Calibration Certificate for D2450V2 SN 706 w/ extended cal. Data.....</i> | 31 |
| 13.6. <i>Calibration Certificate for D5GHzV2 SN 1003</i> | 31 |
| 14. Summary of test configurations..... | 32 |
| 15. Antenna Locations & Separation Distances..... | 33 |
| 16. Setup Photos | 35 |
| 17. Host Device Photos..... | 38 |

1. Attestation of Test Results

| Applicant name: | Panasonic Corporation Of North America | | |
|---|--|--|--------------|
| EUT description: | Intel® Centrino® Advanced-N6205 (Tested inside of Panasonic Tablet PC, Model CF-19) | | |
| Model number: | WL11A | | |
| Device category: | Portable | | |
| Exposure category: | General Population/Uncontrolled Exposure | | |
| Date tested: | January 6, 2012 – January 13, 2012 February 20, 2012 (Additional Testing) | | |
| FCC / IC Rule Parts | Freq. Range [MHz] | Highest 1g SAR (mW/g) | Limit (mW/g) |
| 15.247 / RSS-102 | 2412 – 2462 | 0.12 W/kg (Primary Landscape) | 1.6 |
| | 5725 – 5850 | 0.67 W/kg (Primary Portrait) | |
| 15.407 | 5150 – 5250 | 0.57 W/kg (Primary Portrait) | |
| | 5250 – 5350 | 0.72 W/kg (Primary Portrait) | |
| | 5470 – 5725 | 0.86 W/kg (Primary Portrait) | |
| Applicable Standards | | | Test Results |
| OET Bulletin 65 Supplement C 01-01, IEEE STD 1528: 2003 | | | Pass |
| Compliance Certification Services, Inc. (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. | | | |
| Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above. | | | |
| Approved & Released For CCS By: | | Tested By: | |
|  | |  | |
| Sunny Shih Engineering Team Leader Compliance Certification Services (UL CCS) | | Keisuke Kawamura SAR Engineer Compliance Certification Services (UL CCS) | |

2. Test Methodology

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C Edition 01-01, IEEE STD 1528:2003, and the following KDB Procedures.

- 248227 SAR measurement procedures for 802.11a/b/g transmitters
- 865664 SAR 3 to 6 GHz Rev
- 447498 D01 Mobile Portable RF Exposure v04
- 616217 D03 SAR Supp Note and Netbook Laptop V01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

| Name of Equipment | Manufacturer | Type/Model | Serial No. | Cal. Due date | | |
|----------------------------------|---------------|--------------|------------|-----------------------------|----|------|
| | | | | MM | DD | Year |
| Robot - Six Axes | Stäubli | TX90 XL | N/A | | | N/A |
| Robot Remote Control | Stäubli | CS8C | N/A | | | N/A |
| DASY5 Measurement Server | SPEAG | SEUMS014AA | 1064 | | | N/A |
| Probe Alignment Unit | SPEAG | LB5 / 80 | N/A | | | N/A |
| Oval Flat Phantom (ELI v5.0 (A)) | SPEAG | QD OVA001 BB | 1117 | | | N/A |
| Oval Flat Phantom (ELI v5.0 (B)) | SPEAG | QD OVA001 BB | 1121 | | | N/A |
| Dielectric Probe Kit | HP | 85070C | N/A | | | N/A |
| Network Analyzer | Agilent | E5071B | MY42100131 | 2 | 2 | 2012 |
| Synthesized Signal Generator | Agilent | 8665B | 3438A00633 | 1 | 28 | 2012 |
| E-Field Probe | SPEAG | EX3DV3 | 3531 | 12 | 19 | 2012 |
| Thermometer | EXTECH | Thermometer | SCL29766 | 5 | 17 | 2012 |
| Data Acquisition Electronics | SPEAG | DAE4 | 1259 | 5 | 3 | 2012 |
| System Validation Dipole | SPEAG | D2450V2 | 706 | 4 | 19 | 2012 |
| System Validation Dipole | SPEAG | D5GHzV2 | 1003 | 8 | 23 | 2012 |
| Power Meter | HP | 438A | 3513U04320 | 9 | 17 | 2012 |
| Power Sensor | Agilent | 8481A | 2237A31744 | 8 | 17 | 2013 |
| Amplifier | Mini-Circuits | ZVE-8G | 90606 | | | N/A |
| Amplifier | Mini-Circuits | ZHL-42W | D072701-5 | | | N/A |
| Simulating Liquid | SPEAG | M2450 | N/A | Within 24 hrs of first test | | |
| Simulating Liquid | SPEAG | MSL5800 | N/A | Within 24 hrs of first test | | |

Note:

*Per KDB 450824 D02 requirements for dipole calibration, UL CCS has adopted two years calibration intervals. On annual basis, each measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
2. System validation with specific dipole is within 10% of calibrated value.
3. Return-loss is within 20% of calibrated measurement. (Verification data include with D2450V2 calibration certificate)
4. Impedance is within 5Ω of calibrated measurement. (Verification data include with dipole D2450V2 calibration certificate)

4.2. Measurement Uncertainty


| Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram | | | | | | |
|---|----------|--------------------|---------|-------------|-----------|---------|
| Component | error, % | Probe Distribution | Divisor | Sensitivity | U (Xi), % | |
| Measurement System | | | | | | |
| Probe Calibration (k=1) | 5.50 | Normal | 1 | 1 | 5.50 | |
| Axial Isotropy | 1.15 | Rectangular | 1.732 | 0.7071 | 0.47 | |
| Hemispherical Isotropy | 2.30 | Rectangular | 1.732 | 0.7071 | 0.94 | |
| Boundary Effect | 0.90 | Rectangular | 1.732 | 1 | 0.52 | |
| Probe Linearity | 3.45 | Rectangular | 1.732 | 1 | 1.99 | |
| System Detection Limits | 1.00 | Rectangular | 1.732 | 1 | 0.58 | |
| Readout Electronics | 0.30 | Normal | 1 | 1 | 0.30 | |
| Response Time | 0.80 | Rectangular | 1.732 | 1 | 0.46 | |
| Integration Time | 2.60 | Rectangular | 1.732 | 1 | 1.50 | |
| RF Ambient Conditions - Noise | 3.00 | Rectangular | 1.732 | 1 | 1.73 | |
| RF Ambient Conditions - Reflections | 3.00 | Rectangular | 1.732 | 1 | 1.73 | |
| Probe Positioner Mechanical Tolerance | 0.40 | Rectangular | 1.732 | 1 | 0.23 | |
| Probe Positioning with respect to Phantom | 2.90 | Rectangular | 1.732 | 1 | 1.67 | |
| Extrapolation, Interpolation and Integration | 1.00 | Rectangular | 1.732 | 1 | 0.58 | |
| Test Sample Related | | | | | | |
| Test Sample Positioning | 2.90 | Normal | 1 | 1 | 2.90 | |
| Device Holder Uncertainty | 3.60 | Normal | 1 | 1 | 3.60 | |
| Output Power Variation - SAR Drift | 5.00 | Rectangular | 1.732 | 1 | 2.89 | |
| Phantom and Tissue Parameters | | | | | | |
| Phantom Uncertainty (shape and thickness) | 4.00 | Rectangular | 1.732 | 1 | 2.31 | |
| Liquid Conductivity - deviation from target | 5.00 | Rectangular | 1.732 | 0.64 | 1.85 | |
| Liquid Conductivity - measurement | -0.76 | Normal | 1 | 0.64 | -0.49 | |
| Liquid Permittivity - deviation from target | 5.00 | Rectangular | 1.732 | 0.6 | 1.73 | |
| Liquid Permittivity - measurement | -4.87 | Normal | 1 | 0.6 | -2.92 | |
| Combined Standard Uncertainty Uc(y) = | | | | | | 9.89 |
| Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence = | | | | | | 19.79 % |
| Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence = | | | | | | 1.57 dB |

| 3 to 6 GHz averaged over 1 gram | | | | | | |
|---|----------|--------------|---------|-------------|-----------|---------|
| Component | error, % | Distribution | Divisor | Sensitivity | U (Xi), % | |
| Measurement System | | | | | | |
| Probe Calibration (k=1) @ 5GHz | 6.55 | Normal | 1 | 1 | 6.55 | |
| Axial Isotropy | 1.15 | Rectangular | 1.732 | 0.7071 | 0.47 | |
| Hemispherical Isotropy | 2.30 | Rectangular | 1.732 | 0.7071 | 0.94 | |
| Boundary Effect | 0.90 | Rectangular | 1.732 | 1 | 0.52 | |
| Probe Linearity | 3.45 | Rectangular | 1.732 | 1 | 1.99 | |
| System Detection Limits | 1.00 | Rectangular | 1.732 | 1 | 0.58 | |
| Readout Electronics | 1.00 | Normal | 1 | 1 | 1.00 | |
| Response Time | 0.80 | Rectangular | 1.732 | 1 | 0.46 | |
| Integration Time | 2.60 | Rectangular | 1.732 | 1 | 1.50 | |
| RF Ambient Conditions - Noise | 3.00 | Rectangular | 1.732 | 1 | 1.73 | |
| RF Ambient Conditions - Reflections | 3.00 | Rectangular | 1.732 | 1 | 1.73 | |
| Probe Positioner Mechanical Tolerance | 0.40 | Rectangular | 1.732 | 1 | 0.23 | |
| Probe Positioning with respect to Phantom | 2.90 | Rectangular | 1.732 | 1 | 1.67 | |
| Extrapolation, Interpolation and Integration | 3.90 | Rectangular | 1.732 | 1 | 2.25 | |
| Test Sample Related | | | | | | |
| Test Sample Positioning | 1.10 | Normal | 1 | 1 | 1.10 | |
| Device Holder Uncertainty | 3.60 | Normal | 1 | 1 | 3.60 | |
| Output Power Variation - SAR Drift | 5.00 | Rectangular | 1.732 | 1 | 2.89 | |
| Phantom and Tissue Parameters | | | | | | |
| Phantom Uncertainty (shape and thickness) | 4.00 | Rectangular | 1.732 | 1 | 2.31 | |
| Liquid Conductivity - deviation from target | 5.00 | Rectangular | 1.732 | 0.64 | 1.85 | |
| Liquid Conductivity - measurement | 4.92 | Normal | 1 | 0.64 | 3.15 | |
| Liquid Permittivity - deviation from target | 10.00 | Rectangular | 1.732 | 0.6 | 3.46 | |
| Liquid Permittivity - measurement uncertainty | -4.49 | Normal | 1 | 0.6 | -2.69 | |
| Combined Standard Uncertainty Uc(y), %: | | | | | | 11.24 |
| Expanded Uncertainty U, Coverage Factor = 1.96, > 95 % Confidence = | | | | | | 22.04 % |
| Expanded Uncertainty U, Coverage Factor = 1.96, > 95 % Confidence = | | | | | | 1.73 dB |

5. Equipment Under Test

| | | |
|---|---|---|
| <p>Intel® Centrino® Advanced-N6205, Model WL11A (Tested inside of Panasonic Tablet PC, Model CF-19)</p> | | |
| Normal operation: | <ul style="list-style-type: none">• Laptop mode (notebook)• Tablet with Multiple display orientations supporting both portrait and landscape configurations. | |
| Antenna tested: | <u>Manufactured</u> Intel Corporation | <u>Part number</u> Main (Chain A) Antenna: DFUP1886ZA-1 Aux (Chain B) Antenna: DFUP1886ZA-2 |
| Antenna-to-antenna/user separation distances: | See Section 15 for details of antenna locations and separation distances. | |
| Assessment for SAR evaluation for Simultaneous transmission: | WWAN co-located RF exposure assessment will be addressed in a separate FCC application filed under WWAN application. | |

6. System Specification

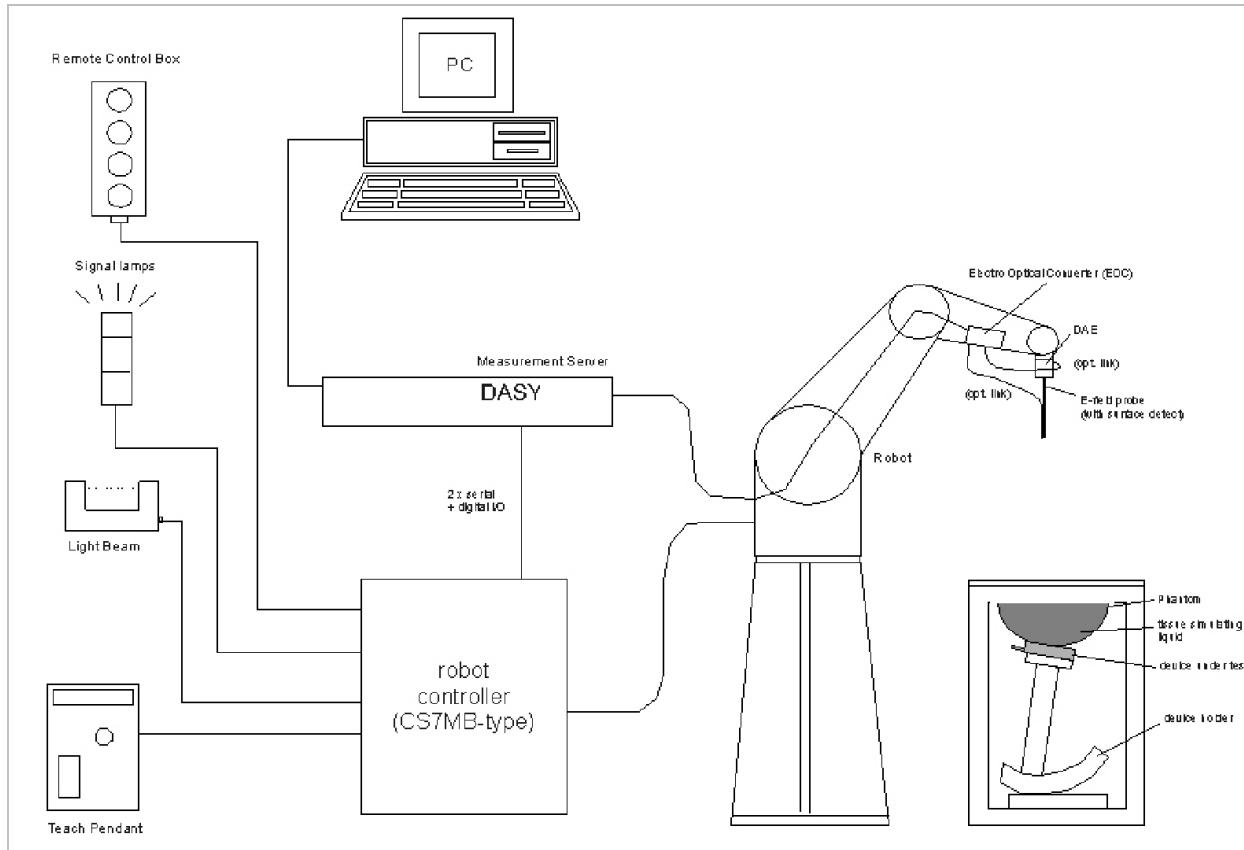

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

7. Composition of Ingredients for Tissue Simulating Liquids

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Ingredients (% by weight) | Frequency (MHz) | | | | | | | | | |
|------------------------------|-----------------|-------|-------|------|-------|-------|-------|------|------|------|
| | 450 | | 835 | | 915 | | 1900 | | 2450 | |
| Tissue Type | Head | Body | Head | Body | Head | Body | Head | Body | Head | Body |
| Water | 38.56 | 51.16 | 41.45 | 52.4 | 41.05 | 56.0 | 54.9 | 40.4 | 62.7 | 73.2 |
| Salt (NaCl) | 3.95 | 1.49 | 1.45 | 1.4 | 1.35 | 0.76 | 0.18 | 0.5 | 0.5 | 0.04 |
| Sugar | 56.32 | 46.78 | 56.0 | 45.0 | 56.5 | 41.76 | 0.0 | 58.0 | 0.0 | 0.0 |
| HEC | 0.98 | 0.52 | 1.0 | 1.0 | 1.0 | 1.21 | 0.0 | 1.0 | 0.0 | 0.0 |
| Bactericide | 0.19 | 0.05 | 0.1 | 0.1 | 0.1 | 0.27 | 0.0 | 0.1 | 0.0 | 0.0 |
| Triton X-100 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 36.8 | 0.0 |
| DGBE | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 44.92 | 0.0 | 0.0 | 26.7 |
| Dielectric Constant | 43.42 | 58.0 | 42.54 | 56.1 | 42.0 | 56.8 | 39.9 | 54.0 | 39.8 | 52.5 |
| Conductivity (S/m) | 0.85 | 0.83 | 0.91 | 0.95 | 1.0 | 1.07 | 1.42 | 1.45 | 1.88 | 1.78 |

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

| Ingredients | (% by weight) |
|--------------------|---------------|
| Water | 78 |
| Mineral oil | 11 |
| Emulsifiers | 9 |
| Additives and Salt | 2 |

8. Tissue Dielectric Parameters

The simulating liquids are checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. For frequencies in 300 MHz to just under 2 GHz, the measured conductivity and relative permittivity were within $\pm 5\%$ of the target values. For frequencies above 2 GHz the measured conductivity was within $\pm 5\%$ of the target values. The measured relative permittivity tolerance was within $\pm 10\%$ of the target value.

Reference Values of Tissue Dielectric Parameters for Head & Body Phantom

The body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

| Target Frequency (MHz) | Head | | Body | |
|------------------------|--------------|----------------|--------------|----------------|
| | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 150 | 52.3 | 0.76 | 61.9 | 0.8 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.9 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55 | 1.05 |
| 915 | 41.5 | 0.98 | 55 | 1.06 |
| 1450 | 40.5 | 1.2 | 54 | 1.3 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.4 |
| 1800 – 2000 | 40 | 1.4 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.8 | 52.7 | 1.95 |
| 3000 | 38.5 | 2.4 | 52 | 2.73 |
| 5800 | 35.3 | 5.27 | 48.2 | 6 |

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Reference Values of Tissue Dielectric Parameters for Body Phantom (for 3000 MHz – 5800 MHz)

In the current guidelines and draft standards for compliance testing of mobile phones (i.e., IEEE P1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given only at 3.0 GHz and 5.8 GHz. As an intermediate solution, dielectric parameters for the frequencies between 5 to 5.8 GHz were obtained using linear interpolation (see table below).

SPEAG has developed suitable head and body tissue simulating liquids consisting of the following ingredients: de-ionized water, salt and a special composition including mineral oil and an emulsifier. Dielectric parameters of these liquids were measured using an HP 8570C Dielectric Probe Kit in conjunction with an HP 8753ES Network Analyzer (30 kHz – 6G Hz). The differences with respect to the interpolated values were well within the desired $\pm 5\%$ for the whole 5 to 5.8 GHz range.

| f (MHz) | Body Tissue | | Reference |
|---------|-------------------|--------------|--------------|
| | rel. permittivity | conductivity | |
| 3000 | 52.0 | 2.73 | Standard |
| 5100 | 49.1 | 5.18 | Interpolated |
| 5200 | 49.0 | 5.30 | Interpolated |
| 5300 | 48.9 | 5.42 | Interpolated |
| 5400 | 48.7 | 5.53 | Interpolated |
| 5500 | 48.6 | 5.65 | Interpolated |
| 5600 | 48.5 | 5.77 | Interpolated |
| 5700 | 48.3 | 5.88 | Interpolated |
| 5800 | 48.2 | 6.00 | Standard |

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

8.1. Liquid Check Results

| Date | Freq. (MHz) | Liquid Parameters | | Measured | Target | Delta (%) | Limit ±(%) | |
|------------|-------------|-------------------|---------|---|--------|-----------|------------|----|
| 01/06/2012 | Body 2450 | e' | 50.1925 | Relative Permittivity (ϵ_r): | 50.19 | 52.70 | -4.76 | 5 |
| | | e" | 14.3603 | Conductivity (σ): | 1.96 | 1.95 | 0.32 | 5 |
| 01/06/2012 | Body 2410 | e' | 50.3273 | Relative Permittivity (ϵ_r): | 50.33 | 52.76 | -4.61 | 5 |
| | | e" | 14.2074 | Conductivity (σ): | 1.90 | 1.91 | -0.19 | 5 |
| 01/06/2012 | Body 2435 | e' | 50.2450 | Relative Permittivity (ϵ_r): | 50.25 | 52.73 | -4.71 | 5 |
| | | e" | 14.3010 | Conductivity (σ): | 1.94 | 1.93 | 0.27 | 5 |
| 01/06/2012 | Body 2475 | e' | 50.1011 | Relative Permittivity (ϵ_r): | 50.10 | 52.67 | -4.87 | 5 |
| | | e" | 14.4596 | Conductivity (σ): | 1.99 | 1.99 | 0.24 | 5 |
| 01/09/2012 | Body 2450 | e' | 50.2576 | Relative Permittivity (ϵ_r): | 50.26 | 52.70 | -4.63 | 5 |
| | | e" | 14.2796 | Conductivity (σ): | 1.95 | 1.95 | -0.24 | 5 |
| 01/09/2012 | Body 2410 | e' | 50.3870 | Relative Permittivity (ϵ_r): | 50.39 | 52.76 | -4.50 | 5 |
| | | e" | 14.1264 | Conductivity (σ): | 1.89 | 1.91 | -0.76 | 5 |
| 01/09/2012 | Body 2435 | e' | 50.3112 | Relative Permittivity (ϵ_r): | 50.31 | 52.73 | -4.58 | 5 |
| | | e" | 14.2217 | Conductivity (σ): | 1.93 | 1.93 | -0.29 | 5 |
| 01/09/2012 | Body 2475 | e' | 50.1626 | Relative Permittivity (ϵ_r): | 50.16 | 52.67 | -4.76 | 5 |
| | | e" | 14.3874 | Conductivity (σ): | 1.98 | 1.99 | -0.26 | 5 |
| 01/09/2012 | Body 5180 | e' | 49.1900 | Relative Permittivity (ϵ_r): | 49.19 | 49.05 | 0.29 | 10 |
| | | e" | 18.7807 | Conductivity (σ): | 5.41 | 5.27 | 2.62 | 5 |
| | Body 5200 | e' | 49.1650 | Relative Permittivity (ϵ_r): | 49.17 | 49.02 | 0.30 | 10 |
| | | e" | 18.8120 | Conductivity (σ): | 5.44 | 5.29 | 2.73 | 5 |
| | Body 5500 | e' | 48.6235 | Relative Permittivity (ϵ_r): | 48.62 | 48.61 | 0.02 | 10 |
| | | e" | 19.1401 | Conductivity (σ): | 5.85 | 5.64 | 3.70 | 5 |
| | Body 5800 | e' | 48.0441 | Relative Permittivity (ϵ_r): | 48.04 | 48.20 | -0.32 | 10 |
| | | e" | 19.4279 | Conductivity (σ): | 6.27 | 6.00 | 4.42 | 5 |
| | Body 5825 | e' | 48.0543 | Relative Permittivity (ϵ_r): | 48.05 | 48.20 | -0.30 | 10 |
| | | e" | 19.4369 | Conductivity (σ): | 6.30 | 6.00 | 4.92 | 5 |
| 01/11/2012 | Body 5180 | e' | 48.1603 | Relative Permittivity (ϵ_r): | 48.16 | 49.05 | -1.81 | 10 |
| | | e" | 18.4385 | Conductivity (σ): | 5.31 | 5.27 | 0.75 | 5 |
| | Body 5200 | e' | 48.1342 | Relative Permittivity (ϵ_r): | 48.13 | 49.02 | -1.81 | 10 |
| | | e" | 18.4559 | Conductivity (σ): | 5.34 | 5.29 | 0.78 | 5 |
| | Body 5500 | e' | 47.6855 | Relative Permittivity (ϵ_r): | 47.69 | 48.61 | -1.91 | 10 |
| | | e" | 18.7463 | Conductivity (σ): | 5.73 | 5.64 | 1.57 | 5 |
| | Body 5800 | e' | 47.1801 | Relative Permittivity (ϵ_r): | 47.18 | 48.20 | -2.12 | 10 |
| | | e" | 18.9058 | Conductivity (σ): | 6.10 | 6.00 | 1.62 | 5 |
| | Body 5825 | e' | 47.1353 | Relative Permittivity (ϵ_r): | 47.14 | 48.20 | -2.21 | 10 |
| | | e" | 18.9169 | Conductivity (σ): | 6.13 | 6.00 | 2.12 | 5 |

| Date | Freq. (MHz) | Liquid Parameters | | Measured | Target | Delta (%) | Limit ±(%) | |
|------------|-------------|-------------------|---------|---|--------|-----------|------------|----|
| 01/12/2012 | Body 5180 | e' | 47.1106 | Relative Permittivity (ϵ_r): | 47.11 | 49.05 | -3.95 | 10 |
| | | e" | 18.4591 | Conductivity (σ): | 5.32 | 5.27 | 0.86 | 5 |
| | Body 5200 | e' | 47.0875 | Relative Permittivity (ϵ_r): | 47.09 | 49.02 | -3.94 | 10 |
| | | e" | 18.5000 | Conductivity (σ): | 5.35 | 5.29 | 1.03 | 5 |
| | Body 5500 | e' | 46.5418 | Relative Permittivity (ϵ_r): | 46.54 | 48.61 | -4.26 | 10 |
| | | e" | 18.8187 | Conductivity (σ): | 5.76 | 5.64 | 1.96 | 5 |
| | Body 5800 | e' | 46.0583 | Relative Permittivity (ϵ_r): | 46.06 | 48.20 | -4.44 | 10 |
| | | e" | 19.0996 | Conductivity (σ): | 6.16 | 6.00 | 2.66 | 5 |
| | Body 5825 | e' | 46.0360 | Relative Permittivity (ϵ_r): | 46.04 | 48.20 | -4.49 | 10 |
| | | e" | 19.1229 | Conductivity (σ): | 6.19 | 6.00 | 3.23 | 5 |
| 01/13/2012 | Body 5180 | e' | 47.2279 | Relative Permittivity (ϵ_r): | 47.23 | 49.05 | -3.71 | 10 |
| | | e" | 17.8549 | Conductivity (σ): | 5.14 | 5.27 | -2.44 | 5 |
| | Body 5200 | e' | 47.2250 | Relative Permittivity (ϵ_r): | 47.23 | 49.02 | -3.66 | 10 |
| | | e" | 17.8999 | Conductivity (σ): | 5.18 | 5.29 | -2.25 | 5 |
| | Body 5500 | e' | 46.6823 | Relative Permittivity (ϵ_r): | 46.68 | 48.61 | -3.97 | 10 |
| | | e" | 18.0601 | Conductivity (σ): | 5.52 | 5.64 | -2.15 | 5 |
| | Body 5800 | e' | 46.2534 | Relative Permittivity (ϵ_r): | 46.25 | 48.20 | -4.04 | 10 |
| | | e" | 18.2711 | Conductivity (σ): | 5.89 | 6.00 | -1.79 | 5 |
| | Body 5825 | e' | 46.2035 | Relative Permittivity (ϵ_r): | 46.20 | 48.20 | -4.14 | 10 |
| | | e" | 18.2803 | Conductivity (σ): | 5.92 | 6.00 | -1.32 | 5 |
| 01/18/2012 | Body 5180 | e' | 47.5750 | Relative Permittivity (ϵ_r): | 47.58 | 49.05 | -3.00 | 10 |
| | | e" | 18.0243 | Conductivity (σ): | 5.19 | 5.27 | -1.52 | 5 |
| | Body 5200 | e' | 47.5890 | Relative Permittivity (ϵ_r): | 47.59 | 49.02 | -2.92 | 10 |
| | | e" | 18.0880 | Conductivity (σ): | 5.23 | 5.29 | -1.22 | 5 |
| | Body 5500 | e' | 47.0697 | Relative Permittivity (ϵ_r): | 47.07 | 48.61 | -3.18 | 10 |
| | | e" | 18.3165 | Conductivity (σ): | 5.60 | 5.64 | -0.76 | 5 |
| | Body 5800 | e' | 46.6304 | Relative Permittivity (ϵ_r): | 46.63 | 48.20 | -3.26 | 10 |
| | | e" | 18.6384 | Conductivity (σ): | 6.01 | 6.00 | 0.18 | 5 |
| | Body 5825 | e' | 46.6097 | Relative Permittivity (ϵ_r): | 46.61 | 48.20 | -3.30 | 10 |
| | | e" | 18.6363 | Conductivity (σ): | 6.04 | 6.00 | 0.60 | 5 |
| 02/20/2012 | Body 5180 | e' | 48.2575 | Relative Permittivity (ϵ_r): | 48.26 | 49.05 | -1.61 | 10 |
| | | e" | 17.7800 | Conductivity (σ): | 5.12 | 5.27 | -2.85 | 5 |
| | Body 5200 | e' | 48.2084 | Relative Permittivity (ϵ_r): | 48.21 | 49.02 | -1.65 | 10 |
| | | e" | 17.8189 | Conductivity (σ): | 5.15 | 5.29 | -2.69 | 5 |
| | Body 5500 | e' | 47.6674 | Relative Permittivity (ϵ_r): | 47.67 | 48.61 | -1.95 | 10 |
| | | e" | 18.0400 | Conductivity (σ): | 5.52 | 5.64 | -2.26 | 5 |
| | Body 5800 | e' | 47.1488 | Relative Permittivity (ϵ_r): | 47.15 | 48.20 | -2.18 | 10 |
| | | e" | 18.2542 | Conductivity (σ): | 5.89 | 6.00 | -1.88 | 5 |
| | Body 5825 | e' | 47.1357 | Relative Permittivity (ϵ_r): | 47.14 | 48.20 | -2.21 | 10 |
| | | e" | 18.2551 | Conductivity (σ): | 5.91 | 6.00 | -1.46 | 5 |

9. System Verification

The system performance check is performed prior to any usage of the system in order to verify SAR system accuracy. The system performance check verifies that the system operates within its specifications of $\pm 10\%$.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The DASY system with an Isotropic E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (2.4 GHz) fine cube was chosen for cube integration and Special 8x8x10 (5 GHz) fine cube was chosen for cube integration
- Distance between probe sensors and phantom surface was set to 2.5 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input powers (forward power) were 100 mW.
- The results are normalized to 1 W input power.

Reference SAR Values for HEAD & BODY-tissue from calibration certificate of SPEAG.

| Cal. certificate # | Validation dipole | Cal. date | Freq. (MHz) | Ref. SAR values (mW/g) (from cal. certificate) | | |
|--------------------|-------------------|-----------|-------------|---|------|------|
| | | | | Tissue: | Head | Body |
| D2450V2-706_Apr10 | D2450V2 | 4/19/10 | 2450 | 1g SAR: | 51.6 | 52.4 |
| | | | | 10g SAR: | 24.4 | 24.5 |
| D5GHz-1003_Aug11 | D5GHzV2 | 8/23/11 | 5200 | 1g SAR: | 76.5 | 74.5 |
| | | | | 10g SAR: | 21.8 | 20.8 |
| | | | 5500 | 1g SAR: | 80.9 | 80 |
| | | | | 10g SAR: | 23.1 | 22.3 |
| | | | 5800 | 1g SAR: | 76.3 | 76.3 |
| | | | | 10g SAR: | 21.7 | 21.2 |

9.1. System Check Results

| Date Tested | System Validation Dipole | Freq. (MHz) | Measured (Normalized to 1 W) | | Target | Delta (%) | Tolerance (%) |
|-------------|-----------------------------|-------------|---------------------------------|-------|--------|-----------|------------------|
| 01/06/12 | D2450V2-706 Body | 2450 | 1g SAR: | 52.70 | 52.40 | 0.57 | ±10 |
| | | | 10g SAR: | 24.40 | 24.50 | -0.41 | |
| 01/09/12 | D2450V2-706 Body | 2450 | 1g SAR: | 53.8 | 52.40 | 2.67 | ±10 |
| | | | 10g SAR: | 25.1 | 24.50 | 2.45 | |
| 01/09/12 | D5GHzV2 Body | 5200 | 1g SAR: | 73.9 | 74.5 | -0.81 | ±10 |
| | | | 10g SAR: | 20.7 | 20.8 | -0.48 | |
| | D5GHzV2 Body | 5500 | 1g SAR: | 76.1 | 80 | -4.88 | ±10 |
| | | | 10g SAR: | 21.4 | 22.3 | -4.04 | |
| 01/11/12 | D5GHzV2 Body | 5800 | 1g SAR: | 71.3 | 76.3 | -6.55 | ±10 |
| | | | 10g SAR: | 20.1 | 21.2 | -5.19 | |
| | D5GHzV2 Body | 5200 | 1g SAR: | 74.2 | 74.5 | -0.40 | ±10 |
| | | | 10g SAR: | 20.7 | 20.8 | -0.48 | |
| 01/12/12 | D5GHzV2 Body | 5500 | 1g SAR: | 74.0 | 80 | -7.50 | ±10 |
| | | | 10g SAR: | 20.6 | 22.3 | -7.62 | |
| | D5GHzV2 Body | 5800 | 1g SAR: | 72.1 | 76.3 | -5.50 | ±10 |
| | | | 10g SAR: | 20.2 | 21.2 | -4.72 | |
| 01/13/12 | D5GHzV2 Body | 5200 | 1g SAR: | 73.8 | 74.5 | -0.94 | ±10 |
| | | | 10g SAR: | 20.7 | 20.8 | -0.48 | |
| | D5GHzV2 Body | 5500 | 1g SAR: | 75.0 | 80 | -6.25 | ±10 |
| | | | 10g SAR: | 20.9 | 22.3 | -6.28 | |
| 01/18/12 | D5GHzV2 Body | 5800 | 1g SAR: | 77.3 | 76.3 | 1.31 | ±10 |
| | | | 10g SAR: | 21.6 | 21.2 | 1.89 | |
| | D5GHzV2 Body | 5200 | 1g SAR: | 71.4 | 74.5 | -4.16 | ±10 |
| | | | 10g SAR: | 20.0 | 20.8 | -3.85 | |
| 02/20/12 | D5GHzV2 Body | 5500 | 1g SAR: | 74.7 | 80 | -6.63 | ±10 |
| | | | 10g SAR: | 20.7 | 22.3 | -7.17 | |
| | D5GHzV2 Body | 5800 | 1g SAR: | 70.6 | 76.3 | -7.47 | ±10 |
| | | | 10g SAR: | 19.6 | 21.2 | -7.55 | |
| 01/18/12 | D5GHzV2 Body | 5500 | 1g SAR: | 81.0 | 80 | 1.25 | ±10 |
| | | | 10g SAR: | 22.7 | 22.3 | 1.79 | |
| | D5GHzV2 Body | 5800 | 1g SAR: | 80.4 | 76.3 | 5.37 | ±10 |
| | | | 10g SAR: | 22.6 | 21.2 | 6.60 | |
| 02/20/12 | D5GHzV2 Body | 5500 | 1g SAR: | 77.2 | 80 | -3.50 | ±10 |
| | | | 10g SAR: | 21.9 | 22.3 | -1.79 | |

10. SAR Measurement Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures $\geq 7 \times 7 \times 9$ (above 4.5 GHz) or $5 \times 5 \times 7$ (below 3 GHz) points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

11. RF Output Power Verification

The following procedures had been used to prepare the EUT for the SAR test.
The client provided a special driver and program, Intel DRTU v1.3.12-0263, which enable a user to control the frequency and output power of the module.

11.1. RF OUTPUT POWER FOR 2.4 GHZ BAND

| 2.4 GHz Band | | | | | | |
|--------------|-------|----------------|--|-------------|---------------------------|-------------|
| Mode | Ch. # | Freq. (MHz) | Original Target Pwr (dBm) from Project#11J13739-3 | | Actual Measured Pwr (dBm) | |
| | | | Chain A | Chain B | Chain A | Chain B |
| 802.11b | 1 | 2412 | 15.5 | | | |
| | 6 | 2437 | 15.7 | | 15.7 | |
| | 11 | 2462 | 15.5 | | | |
| | 1 | 2412 | | 15.6 | | 15.7 |
| | 6 | 2437 | | 15.5 | | |
| | 11 | 2462 | | 15.6 | | |
| 802.11g | 1 | 2412 | 14.0 | | | |
| | 6 | 2437 | 16.6 | | 16.7 | |
| | 11 | 2462 | 14.0 | | | |
| | 1 | 2412 | | 14.1 | | |
| | 6 | 2437 | | 16.5 | | |
| | 11 | 2462 | | 14.1 | | |
| 802.11n HT20 | 1 | 2412 | 13.1 | | | |
| | 6 | 2437 | 16.5 | | | |
| | 11 | 2462 | 12.4 | | | |
| | 1 | 2412 | | 13.1 | | |
| | 6 | 2437 | | 16.8 | | 16.8 |
| | 11 | 2462 | | 12.8 | | |
| | 1 | 2412 | 11.6 | 11.6 | | |
| | 6 | 2437 | 13.7 | 13.7 | | |
| | 11 | 2462 | 11.9 | 11.7 | | |
| 802.11n HT40 | 3 | 2422 | 9.1 | | | |
| | 6 | 2437 | 16.6 | | | |
| | 9 | 2450 | 9.6 | | | |
| | 3 | 2422 | | 9.6 | | |
| | 6 | 2437 | | 16.4 | | |
| | 9 | 2450 | | 10.0 | | |
| | 3 | 2422 | 8.0 | 8.0 | | |
| | 6 | 2437 | 13.7 | 13.7 | | |
| | 9 | 2450 | 8.6 | 8.6 | | |

Notes:

1. The modes with highest output power channel were chosen for the conducted output power.
2. Original target power is from SAR Report #11J13739-3. Refer to original report (FCC ID: PD962205ANH) for Average Power information as documented in 09/13/2010 original filing.

11.2. RF OUTPUT POWER FOR 5 GHZ BANDS

| 5.2 GHz Band | | | | | | |
|--------------|-------|----------------|--|-------------|---------------------------|-------------|
| Mode | Ch. # | Freq. (MHz) | Original Target Pwr (dBm) from Project#11J13739-3 | | Actual Measured Pwr (dBm) | |
| | | | Chain A | Chain B | Chain A | Chain B |
| 802.11a | 36 | 5180 | 16.1 | | 16.2 | |
| | 40 | 5200 | 16.0 | | 16.0 | |
| | 44 | 5220 | | | 16.0 | |
| | 48 | 5240 | 16.1 | | 16.1 | |
| | 36 | 5180 | | 16.2 | | 16.2 |
| | 44 | 5220 | | | | 16.1 |
| | 40 | 5200 | | 16.1 | | 16.1 |
| | 48 | 5240 | | 16.1 | | 16.1 |
| | 36 | 5180 | 15.6 | | 15.7 | |
| 802.11n HT20 | 40 | 5200 | 16.1 | | 16.1 | |
| | 44 | 5220 | | | 16.1 | |
| | 48 | 5240 | 16.1 | | 16.1 | |
| | 36 | 5180 | | 15.6 | | 15.6 |
| | 40 | 5200 | | 16.1 | | 16.1 |
| | 44 | 5220 | | | | 16.1 |
| | 48 | 5240 | | 16.0 | | 16.0 |
| | 36 | 5180 | 10.5 | 10.5 | 10.5 | 10.5 |
| | 40 | 5200 | 11.0 | 11.1 | 11.0 | 11.1 |
| | 44 | 5220 | | | 11.0 | 11.0 |
| | 48 | 5240 | 11.0 | 10.5 | 11.0 | 10.5 |
| | 38 | 5190 | 11.1 | | 11.1 | |
| 802.11n HT40 | 46 | 5230 | 16.1 | | 16.1 | |
| | 38 | 5190 | | 11.1 | | 11.1 |
| | 46 | 5230 | | 16.0 | | 16.0 |
| | 38 | 5190 | 8.5 | 8.3 | 8.5 | 8.3 |
| | 46 | 5230 | 11.7 | 10.6 | 11.7 | 10.6 |

Notes:

1. The modes with highest output power channel were chosen for the conducted output power.
2. Original target power is from SAR Report #11J13739-3. Please refer to original report (FCC ID: PD962205ANH) for Average Power information as documented in 09/13/2010 original filing.

5.3 GHz Band

| Mode | Ch. # | Freq. (MHz) | Original Target Pwr (dBm) from Project#11J13739-3 | | Actual Measured Pwr (dBm) | |
|--------------|-------|----------------|--|-------------|---------------------------|-------------|
| | | | Chain A | Chain B | Chain A | Chain B |
| 802.11a | 52 | 5260 | 16.1 | | 16.1 | |
| | 56 | 5280 | | | 16.1 | |
| | 60 | 5300 | 16.2 | | 16.3 | |
| | 64 | 5320 | 16.1 | | 16.1 | |
| | 52 | 5260 | | 16.2 | | 16.2 |
| | 56 | 5280 | | | | 16.2 |
| | 60 | 5300 | | 16.2 | | 16.3 |
| | 64 | 5320 | | 16.2 | | 16.2 |
| 802.11n HT20 | 52 | 5260 | 16.2 | | 16.2 | |
| | 56 | 5280 | | | 16.2 | |
| | 60 | 5300 | 16.1 | | 16.1 | |
| | 64 | 5320 | 16.0 | | 16.0 | |
| | 52 | 5260 | | 16.2 | | 16.2 |
| | 56 | 5280 | | | | 16.2 |
| | 60 | 5300 | | 16.1 | | 16.1 |
| | 64 | 5320 | | 16.2 | | 16.2 |
| | 52 | 5260 | 10.6 | 10.9 | 10.7 | 10.9 |
| | 56 | 5280 | | | 10.7 | 10.9 |
| | 60 | 5300 | 11.0 | 10.2 | 11.0 | 10.2 |
| | 64 | 5320 | 10.5 | 10.3 | 10.6 | 10.3 |
| 802.11n HT40 | 54 | 5270 | 16.5 | | 16.6 | |
| | 62 | 5310 | 11.2 | | 11.2 | |
| | 54 | 5270 | | 16.6 | | 16.7 |
| | 62 | 5310 | | 11.1 | | 11.1 |
| | 54 | 5270 | 10.8 | 11.3 | 10.8 | 10.8 |
| | 62 | 5310 | 7.9 | 7.5 | 8.0 | 7.6 |

Notes:

1. The modes with highest output power channel were chosen for the conducted output power.
2. Original target power is from SAR Report #11J13739-3. Please refer to original report (FCC ID: PD962205ANH) for Average Power information as documented in 09/13/2010 original filing.

| 5.5 GHz Band | | | | | | |
|--------------|-------|----------------|--|---------|---------------------------|---------|
| Mode | Ch. # | Freq. (MHz) | Original Target Pwr (dBm) from Project#11J13739-3 | | Actual Measured Pwr (dBm) | |
| | | | Chain A | Chain B | Chain A | Chain B |
| 802.11a | 100 | 5500 | 16.6 | | 16.6 | |
| | 104 | 5520 | | | 16.6 | |
| | 108 | 5540 | | | 16.6 | |
| | 112 | 5560 | | | 16.6 | |
| | 116 | 5580 | | | 16.6 | |
| | 120 | 5600 | 16.6 | | 16.6 | |
| | 124 | 5620 | | | 16.6 | |
| | 128 | 5640 | | | 16.6 | |
| | 132 | 5660 | | | 16.6 | |
| | 136 | 5680 | | | 16.6 | |
| | 140 | 5700 | 16.6 | | 16.6 | |
| | 100 | 5500 | | 16.6 | | 16.6 |
| | 104 | 5520 | | | | 16.6 |
| | 108 | 5540 | | | | 16.6 |
| | 112 | 5560 | | | | 16.6 |
| | 116 | 5580 | | | | 16.6 |
| | 120 | 5600 | | 16.7 | | 16.7 |
| | 124 | 5620 | | | | 16.6 |
| | 128 | 5640 | | | | 16.5 |
| | 132 | 5660 | | | | 16.5 |
| | 136 | 5680 | | | | 16.5 |
| | 140 | 5700 | | 16.5 | | 16.5 |

Notes:

1. The modes with highest output power channel were chosen for the conducted output power.
2. Original target power is from SAR Report #11J13739-3. Please refer to original report (FCC ID: PD962205ANH) for Average Power information as documented in 09/13/2010 original filing.

| 5.5 GHz Band | | | | | | |
|--------------|-------|----------------|--|---------|---------------------------|---------|
| Mode | Ch. # | Freq. (MHz) | Original Target Pwr (dBm) from Project#11J13739-3 | | Actual Measured Pwr (dBm) | |
| | | | Chain A | Chain B | Chain A | Chain B |
| 802.11n HT20 | 100 | 5500 | 16.7 | | 16.7 | |
| | 104 | 5520 | | | 16.7 | |
| | 108 | 5540 | | | 16.7 | |
| | 112 | 5560 | | | 16.6 | |
| | 116 | 5580 | | | 16.6 | |
| | 120 | 5600 | 16.7 | | 16.7 | |
| | 124 | 5620 | | | 16.6 | |
| | 128 | 5640 | | | 16.6 | |
| | 132 | 5660 | | | 16.5 | |
| | 136 | 5680 | | | 16.5 | |
| | 140 | 5700 | 16.5 | | 16.5 | |
| | 100 | 5500 | | 16.6 | | 16.6 |
| | 104 | 5520 | | | | 16.6 |
| | 108 | 5540 | | | | 16.6 |
| | 112 | 5560 | | | | 16.6 |
| | 116 | 5580 | | | | 16.6 |
| | 120 | 5600 | | 16.6 | | 16.6 |
| | 124 | 5620 | | | | 16.6 |
| | 128 | 5640 | | | | 16.6 |
| | 132 | 5660 | | | | 16.6 |
| | 136 | 5680 | | | | 16.7 |
| | 140 | 5700 | | 16.7 | | 16.7 |
| | 100 | 5500 | 11.3 | 10.9 | 11.4 | 10.9 |
| | 104 | 5520 | | | 11.4 | 10.9 |
| | 108 | 5540 | | | 11.4 | 10.9 |
| | 112 | 5560 | | | 11.4 | 11.0 |
| | 116 | 5580 | | | 11.4 | 12.1 |
| | 120 | 5600 | 11.5 | 12.2 | 11.5 | 12.2 |
| | 124 | 5620 | | | 11.5 | 12.1 |
| | 128 | 5640 | | | 11.6 | 11.7 |
| | 132 | 5660 | | | 11.6 | 11.7 |
| | 136 | 5680 | | | 12.0 | 11.7 |
| | 140 | 5700 | 12.0 | 11.7 | 12.1 | 11.7 |

Notes:

1. The modes with highest output power channel were chosen for the conducted output power.
2. Original target power is from SAR Report #11J13739-3. Please refer to original report (FCC ID: PD962205ANH) for Average Power information as documented in 09/13/2010 original filing.

| 5.5 GHz Band | | | | | | |
|--------------|-------|----------------|--|---------|---------------------------|---------|
| Mode | Ch. # | Freq. (MHz) | Original Target Pwr (dBm) from Project#11J13739-3 | | Actual Measured Pwr (dBm) | |
| | | | Chain A | Chain B | Chain A | Chain B |
| 802.11n HT40 | 102 | 5510 | 13.7 | | 13.8 | |
| | 110 | 5550 | | | 13.8 | |
| | 126 | 5630 | | | 16.5 | |
| | 134 | 5670 | 16.5 | | 16.5 | |
| | 102 | 5510 | | 13.6 | | 13.6 |
| | 110 | 5550 | | | | 13.6 |
| | 126 | 5630 | | | | 16.7 |
| | 134 | 5670 | | 16.7 | | 16.7 |
| | 102 | 5510 | 10.3 | 10.8 | 10.3 | 10.8 |
| | 110 | 5550 | | | 10.3 | 10.8 |
| | 126 | 5630 | | | 11.5 | 11.8 |
| | 134 | 5670 | 11.4 | 11.8 | 11.5 | 11.8 |

Notes:

1. The modes with highest output power channel were chosen for the conducted output power.
2. Original target power is from SAR Report #11J13739-3. Please refer to original report (FCC ID: PD962205ANH) for Average Power information as documented in 09/13/2010 original filing.

| 5.8 GHz Band | | | | | | |
|--------------|-------|----------------|--|-------------|---------------------------|-------------|
| Mode | Ch. # | Freq. (MHz) | Original Target Pwr (dBm) from Project#11J13739-3 | | Actual Measured Pwr (dBm) | |
| | | | Chain A | Chain B | Chain A | Chain B |
| 802.11a | 149 | 5745 | 16.6 | | 16.6 | |
| | 153 | 5765 | | | 16.6 | |
| | 157 | 5785 | 16.5 | | 16.5 | |
| | 161 | 5805 | | | 16.5 | |
| | 165 | 5825 | 16.5 | | 16.5 | |
| | 149 | 5745 | | 16.5 | | 16.5 |
| | 153 | 5765 | | | | 16.5 |
| | 157 | 5785 | | 16.5 | | 16.5 |
| | 161 | 5805 | | | | 16.5 |
| | 165 | 5825 | | 16.5 | | 16.5 |
| 802.11n HT20 | 149 | 5745 | 16.7 | | 16.7 | |
| | 153 | 5765 | | | 16.7 | |
| | 157 | 5785 | 16.7 | | 16.7 | |
| | 161 | 5805 | | | 16.6 | |
| | 165 | 5825 | 16.6 | | 16.6 | |
| | 149 | 5745 | | 16.7 | | 16.7 |
| | 153 | 5765 | | | | 16.7 |
| | 157 | 5785 | | 16.6 | | 16.6 |
| | 161 | 5805 | | | | 16.6 |
| | 165 | 5825 | | 16.6 | | 16.6 |
| | 149 | 5745 | 13.6 | 13.7 | 13.7 | 13.7 |
| | 153 | 5765 | | | 13.7 | 13.7 |
| | 157 | 5785 | 13.7 | 13.7 | 13.7 | 13.7 |
| | 161 | 5805 | | | 13.6 | 13.7 |
| 802.11n HT40 | 165 | 5825 | 13.6 | 13.7 | 13.6 | 13.7 |
| | 151 | 5755 | 16.7 | | 16.7 | |
| | 159 | 5795 | 16.6 | | 16.6 | |
| | 151 | 5755 | | 16.5 | | 16.5 |
| | 159 | 5795 | | 16.6 | | 16.6 |
| | 151 | 5755 | 13.6 | 13.7 | 13.6 | 13.7 |
| | 159 | 5795 | 13.5 | 13.7 | 13.6 | 13.7 |

Notes:

1. The modes with highest output power channel were chosen for the conducted output power.
2. Original target power is from SAR Report #11J13739-3. Please refer to original report (FCC ID: PD962205ANH) for Average Power information as documented in 09/13/2010 original filing.

12. SAR Test Results

(1) Bottom Face (Chain A & B)

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | |
|--------------|---------|---------|-------------------------|---------|------------------------|---------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR |
| 802.11b | 1 | 2412 | | | | |
| | 6 | 2437 | 15.7 | | 0.014 | 0.00662 |
| | 11 | 2462 | | | | |
| | 1 | 2412 | | 15.7 | 0.031 | 0.012 |
| | 6 | 2437 | | | | |
| | 11 | 2462 | | | | |
| 802.11g | 1 | 2412 | | | | |
| | 6 | 2437 | 16.7 | | 0.018 | 0.00914 |
| | 11 | 2462 | | | | |
| 802.11n HT20 | 1 | 2412 | | | | |
| | 6 | 2437 | | 16.8 | 0.072 | 0.027 |
| | 11 | 2462 | | | | |

(2) Primary Lanscape (Chain A & B)

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | |
|--------------|---------|---------|-------------------------|---------|------------------------|---------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR |
| 802.11b | 1 | 2412 | | | | |
| | 6 | 2437 | 15.7 | | 0.021 | 0.011 |
| | 11 | 2462 | | | | |
| | 1 | 2412 | | 15.7 | 0.12 | 0.065 |
| | 6 | 2437 | | | | |
| | 11 | 2462 | | | | |
| 802.11g | 1 | 2412 | | | | |
| | 6 | 2437 | 16.7 | | 0.026 | 0.013 |
| | 11 | 2462 | | | | |
| 802.11n HT20 | 1 | 2412 | | | | |
| | 6 | 2437 | | 16.8 | 0.065 | 0.036 |
| | 11 | 2462 | | | | |

Note(s):

1. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.8 W/kg with the operating frequency band having a range of < 100 MHz. Per KDB 447498 1) e) i).

(3) Primary Portrait (Chain B)

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | |
|--------------|---------|---------|-------------------------|-------------|------------------------|---------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR |
| 802.11b | 1 | 2412 | | 15.7 | 0.067 | 0.035 |
| | 6 | 2437 | | | | |
| | 11 | 2462 | | | | |
| 802.11n HT20 | 1 | 2412 | | | | |
| | 6 | 2437 | | 16.8 | 0.093 | 0.047 |
| | 11 | 2462 | | | | |

(4) Secondary Portrait (Chain A)

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | |
|---------|---------|---------|-------------------------|---------|------------------------|---------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR |
| 802.11b | 1 | 2412 | | | | |
| | 6 | 2437 | 15.7 | | 0.060 | 0.032 |
| | 11 | 2462 | | | | |
| 802.11g | 1 | 2412 | | | | |
| | 6 | 2437 | 16.7 | | 0.073 | 0.039 |
| | 11 | 2462 | | | | |

(5) Lap-Held (Chain A & B)

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | |
|--------------|---------|---------|-------------------------|-------------|------------------------|---------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR |
| 802.11b | 1 | 2412 | | | | |
| | 6 | 2437 | 15.7 | | 0.024 | 0.011 |
| | 11 | 2462 | | | | |
| | 1 | 2412 | | 15.7 | 0.025 | 0.012 |
| | 6 | 2437 | | | | |
| | 11 | 2462 | | | | |
| 802.11g | 1 | 2412 | | | | |
| | 6 | 2437 | 16.7 | | 0.031 | 0.015 |
| | 11 | 2462 | | | | |
| 802.11n HT20 | 1 | 2412 | | | | |
| | 6 | 2437 | | 16.8 | 0.024 | 0.011 |
| | 11 | 2462 | | | | |

Note(s):

1. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.8 W/kg with the operating frequency band having a range of < 100 MHz. Per KDB 447498 1) e) i).

(1) Bottom Face (Chain A & B)

5.2 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 36 | 5180 | 16.1 | | 0.024 | 0.00999 | |
| | 40 | 5200 | | | | | 1 |
| | 48 | 5240 | | | | | 1 |
| | 36 | 5180 | | 16.2 | 0.033 | 0.013 | |
| | 40 | 5200 | | | | | 1 |
| | 48 | 5240 | | | | | 1 |

5.3 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|--------------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 52 | 5260 | | | | | 1 |
| | 60 | 5300 | 16.3 | | 0.033 | 0.013 | |
| | 64 | 5320 | | | | | 1 |
| | 52 | 5260 | | | | | 1 |
| | 60 | 5300 | | 16.3 | 0.036 | 0.014 | |
| | 64 | 5320 | | | | | 1 |
| 802.11n HT40 | 54 | 5270 | 16.6 | | 0.022 | 0.0076 | |
| | 62 | 5310 | | | | | 1 |
| | 54 | 5270 | | 16.7 | 0.038 | 0.015 | |
| | 62 | 5310 | | | | | 1 |

5.5 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 100 | 5500 | | | | | 2 |
| | 120 | 5600 | 16.6 | | 0.046 | 0.016 | |
| | 140 | 5700 | | | | | 2 |
| | 100 | 5500 | | | | | 2 |
| | 120 | 5600 | | 16.7 | 0.058 | 0.022 | |
| | 140 | 5700 | | | | | 2 |

5.8 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 149 | 5745 | 16.6 | | 0.028 | 0.012 | |
| | 157 | 5785 | | | | | 1 |
| | 165 | 5825 | | | | | 1 |
| | 149 | 5745 | | | | | 1 |
| | 157 | 5785 | | 16.5 | 0.049 | 0.019 | |
| | 165 | 5825 | | | | | 1 |

Note(s):

1. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.8 W/kg with the operating frequency band having a range of < 100 MHz. Per KDB 447498 1) e) i).
2. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.4 W/kg with the operating frequency band having a range of ≤ 200 MHz. Per KDB 447498 1) e) ii).

(2) Primary Landscape (Chain A & B)

5.2 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 36 | 5180 | 16.1 | | 0.018 | 0.004 | |
| | 40 | 5200 | | | | | 1 |
| | 48 | 5240 | | | | | 1 |
| | 36 | 5180 | | 16.2 | 0.054 | 0.171 | |
| | 40 | 5200 | | | | | 1 |
| | 48 | 5240 | | | | | 1 |

5.3 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|--------------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 52 | 5260 | | | | | 1 |
| | 60 | 5300 | 16.3 | | 0.013 | 0.004 | |
| | 64 | 5320 | | | | | 1 |
| | 52 | 5260 | | | | | 1 |
| | 60 | 5300 | | 16.3 | 0.058 | 0.018 | |
| | 64 | 5320 | | | | | 1 |
| 802.11n HT40 | 54 | 5270 | 16.6 | | 0.015 | 0.00405 | |
| | 62 | 5310 | | | | | 1 |
| | 54 | 5270 | | 16.7 | 0.067 | 0.021 | |
| | 62 | 5310 | | | | | 1 |

5.5 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 100 | 5500 | | | | | 2 |
| | 120 | 5600 | 16.6 | | 0.0144 | 0.00464 | |
| | 140 | 5700 | | | | | 2 |
| | 100 | 5500 | | | | | 2 |
| | 120 | 5600 | | 16.7 | 0.028 | 0.00815 | |
| | 140 | 5700 | | | | | 2 |

5.8 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 149 | 5745 | 16.6 | | 0.026 | 0.0082 | |
| | 157 | 5785 | | | | | 1 |
| | 165 | 5825 | | | | | 1 |
| | 149 | 5745 | | | | | 1 |
| | 157 | 5785 | | 16.5 | 0.064 | 0.020 | |
| | 165 | 5825 | | | | | 1 |

Note(s):

1. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.8 W/kg with the operating frequency band having a range of < 100 MHz. Per KDB 447498 1) e) i).
2. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.4 W/kg with the operating frequency band having a range of ≤ 200 MHz. Per KDB 447498 1) e) ii).

(3) Primary Portrait (Chain B)

5.2 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 36 | 5180 | | 16.2 | 0.565 | 0.226 | |
| | 40 | 5200 | | | | | 1 |
| | 48 | 5240 | | | | | 1 |

5.3 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|--------------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 52 | 5260 | | | | | 1 |
| | 60 | 5300 | | 16.3 | 0.718 | 0.286 | |
| | 64 | 5320 | | | | | 1 |
| 802.11n HT40 | 54 | 5270 | | 16.7 | 0.640 | 0.256 | |
| | 62 | 5310 | | | | | 1 |

5.5 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|--------------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 104 | 5520 | | 16.6 | 0.705 | 0.277 | |
| | 120 | 5600 | | 16.7 | 0.857 | 0.347 | |
| | 124 | 5620 | | 16.5 | 0.763 | 0.302 | |
| | 136 | 5680 | | 16.5 | 0.804 | 0.316 | |

5.8 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 149 | 5745 | | | | | 1 |
| | 157 | 5785 | | 16.5 | 0.665 | 0.267 | |
| | 165 | 5825 | | | | | 1 |

Note(s):

1. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.8 W/kg with the operating frequency band having a range of < 100 MHz. Per KDB 447498 1) e) i).
2. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.4 W/kg with the operating frequency band having a range of ≤ 200 MHz. Per KDB 447498 1) e) ii).

(4) Secondary Portrait (Chain A)

5.2 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|---------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 36 | 5180 | 16.2 | | 0.390 | 0.154 | |
| | 40 | 5200 | | | | | 1 |
| | 48 | 5240 | | | | | 1 |

5.3 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|--------------|---------|---------|-------------------------|---------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 52 | 5260 | | | | | 1 |
| | 60 | 5300 | 16.3 | | 0.45 | 0.177 | |
| | 64 | 5320 | | | | | 1 |
| 802.11n HT40 | 54 | 5270 | 16.6 | | 0.492 | 0.194 | |
| | 62 | 5310 | | | | | 1 |

5.5 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|---------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 104 | 5520 | 16.6 | | 0.507 | 0.207 | |
| | 116 | 5580 | 16.6 | | 0.490 | 0.199 | |
| | 124 | 5620 | 16.6 | | 0.475 | 0.192 | |
| | 136 | 5680 | 16.6 | | 0.464 | 0.187 | |

5.8 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|---------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 149 | 5745 | 16.6 | | 0.391 | 0.150 | |
| | 157 | 5785 | | | | | 1 |
| | 165 | 5825 | | | | | 1 |

Note(s):

1. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.8 W/kg with the operating frequency band having a range of < 100 MHz. Per KDB 447498 1) e i).
2. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.4 W/kg with the operating frequency band having a range of ≤ 200 MHz. Per KDB 447498 1) e ii).

(5) Lap-Held (Chain A & B)

5.2 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|-----------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 36 | 5180 | 16.1 | | 0.000104 | 0.0000114 | |
| | 40 | 5200 | | | | | 1 |
| | 48 | 5240 | | | | | 1 |
| | 36 | 5180 | | 16.2 | 0.018 | 0.00674 | |
| | 40 | 5200 | | | | | 1 |
| | 48 | 5240 | | | | | 1 |

5.3 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|--------------|---------|---------|-------------------------|-------------|------------------------|------------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 52 | 5260 | | | | | 1 |
| | 60 | 5300 | 16.3 | | 0.000043 | 0.00000263 | |
| | 64 | 5320 | | | | | 1 |
| | 52 | 5260 | | | | | 1 |
| | 60 | 5300 | | 16.2 | 0.017 | 0.00733 | |
| | 64 | 5320 | | | | | 1 |
| 802.11n HT40 | 54 | 5270 | 16.6 | | 0.000383 | 0.0000815 | |
| | 62 | 5310 | | | | | 1 |
| | 54 | 5270 | | 16.7 | 0.0193 | 0.00689 | |
| | 62 | 5310 | | | | | 1 |

5.5 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|----------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 100 | 5500 | | | | | 2 |
| | 120 | 5600 | 16.7 | | 0.00222 | 0.000542 | |
| | 140 | 5700 | | | | | 2 |
| | 100 | 5500 | | | | | 2 |
| | 120 | 5600 | | 16.7 | 0.030 | 0.00972 | |
| | 140 | 5700 | | | | | 2 |

5.8 GHz Band

| Mode | Channel | f (MHz) | Avg. Output Power (dBm) | | Measured Result (mW/g) | | Note |
|---------|---------|---------|-------------------------|-------------|------------------------|---------|------|
| | | | Chain A | Chain B | 1g-SAR | 10g-SAR | |
| 802.11a | 149 | 5745 | 16.6 | | 0.0140 | 0.00166 | |
| | 157 | 5785 | | | | | 1 |
| | 165 | 5825 | | | | | 1 |
| | 149 | 5745 | | | | | 1 |
| | 157 | 5785 | | 16.5 | 0.029 | 0.00949 | |
| | 165 | 5825 | | | | | 1 |

Note(s):

1. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.8 W/kg with the operating frequency band having a range of < 100 MHz. Per KDB 447498 1) e) i).
2. Testing was performed on the channel with the highest output power only as the SAR was ≤ 0.4 W/kg with the operating frequency band having a range of ≤ 200 MHz. Per KDB 447498 1) e) ii).

13. Appendixes

- 13.1. **System Check Plots**
- 13.2. **SAR Test Plots for 2.4 GHz**
- 13.3. **SAR Test Plots for 5 GHz bands**
- 13.4. **Calibration Certificate for EX3DV3 SN 3531**
- 13.5. **Calibration Certificate for D2450V2 SN 706 w/ extended cal. Data**
- 13.6. **Calibration Certificate for D5GHzV2 SN 1003**

14. Summary of test configurations

| Configuration | Antenna-to-User distance | SAR Require | Comments |
|--|--|-------------|----------|
| (1) Bottom Face Tablet mode | 45 mm from Main (Chain A) to user. | Yes | |
| | 45 mm from Aux (Chain B) to user. | Yes | |
| Secondary Landscape | 85 mm from Main (Chain A) to user. | No | |
| | 85 mm from Aux (Chain B) to user. | No | |
| (2) Primary Landscape | 100 mm from Main (Chain A) to user. | Yes | |
| | 100 mm from Sub (Chain B) to user. | Yes | |
| (3) Primary Portrait | 284 mm from Main (Chain A) to user. | No | |
| | 16 mm from Main (Chain B) to user. | Yes | |
| (4) Secondary Portrait | 16 mm from Main (Chain A) to user. | Yes | |
| | 284 mm from Main (Chain B) to user. | No | |
| (5) Lap-held | 135 mm from Main (Chain A) to user. | Yes | |
| | 135 mm from Aux (Chain B) to user. | Yes | |