

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 2.4GHz b mode/Area Scan (7x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.206 mW/g

GPRS L ch collocation with BT and WLAN @ 2.4GHz b mode/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.240 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.252 mW/g

GPRS L ch collocation with BT and WLAN @ 2.4GHz b mode/Zoom Scan (5x5x7)/Cube


1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

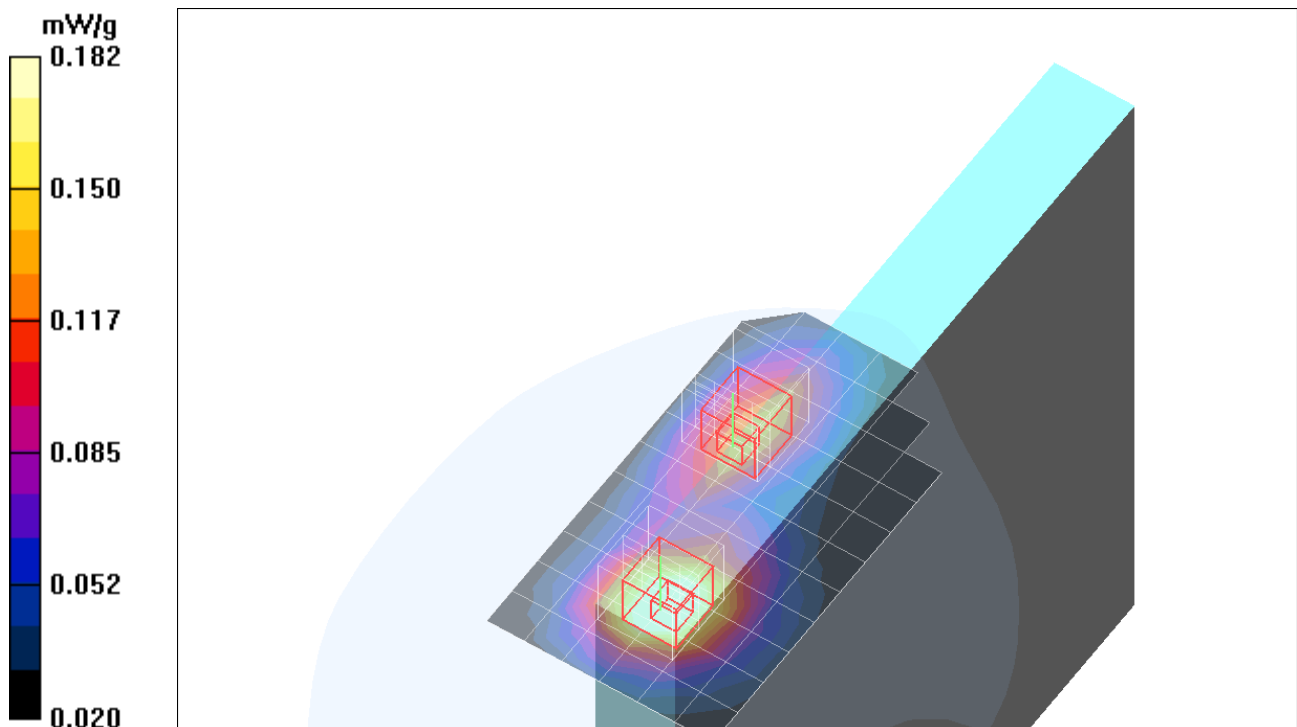


Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

GPRS L ch/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 0.129 mW/g

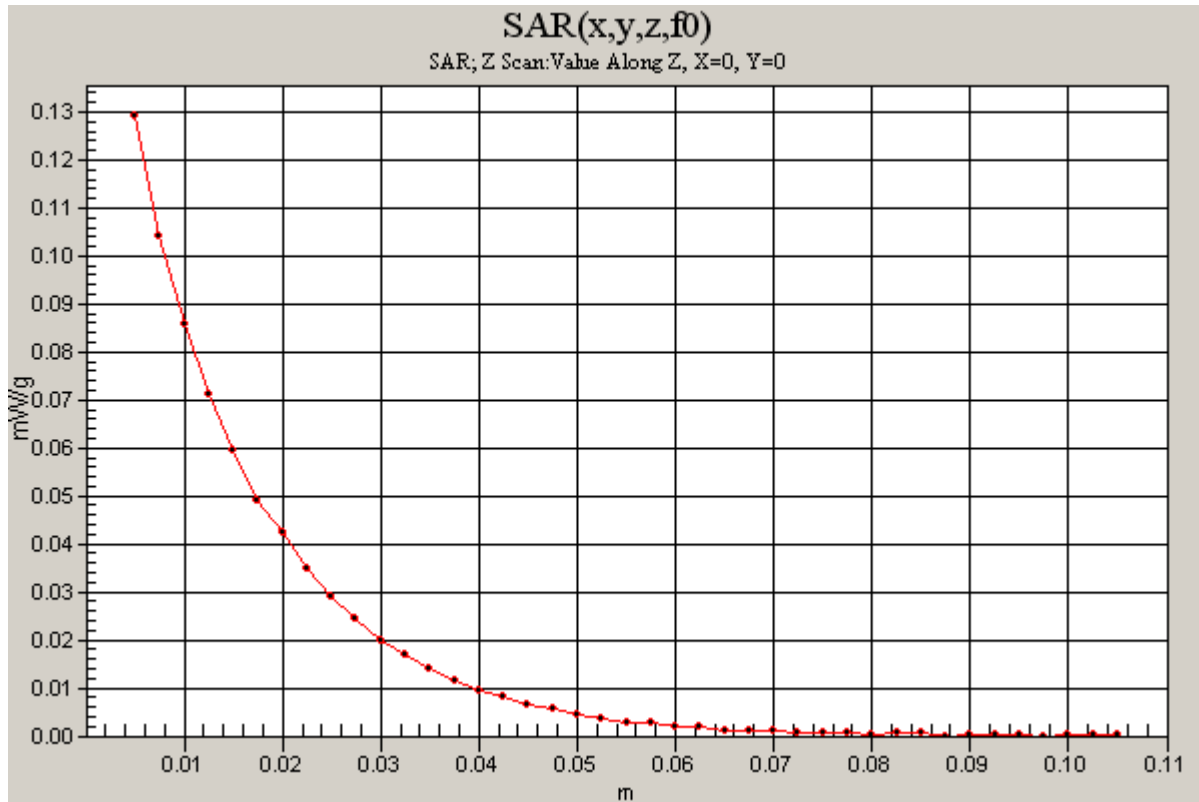

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 2.4GHz g mode/Area Scan (7x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.249 mW/g

GPRS L ch collocation with BT and WLAN @ 2.4GHz g mode/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.253 mW/g

GPRS L ch collocation with BT and WLAN @ 2.4GHz g mode/Zoom Scan (5x5x7)/Cube


1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.177 mW/g

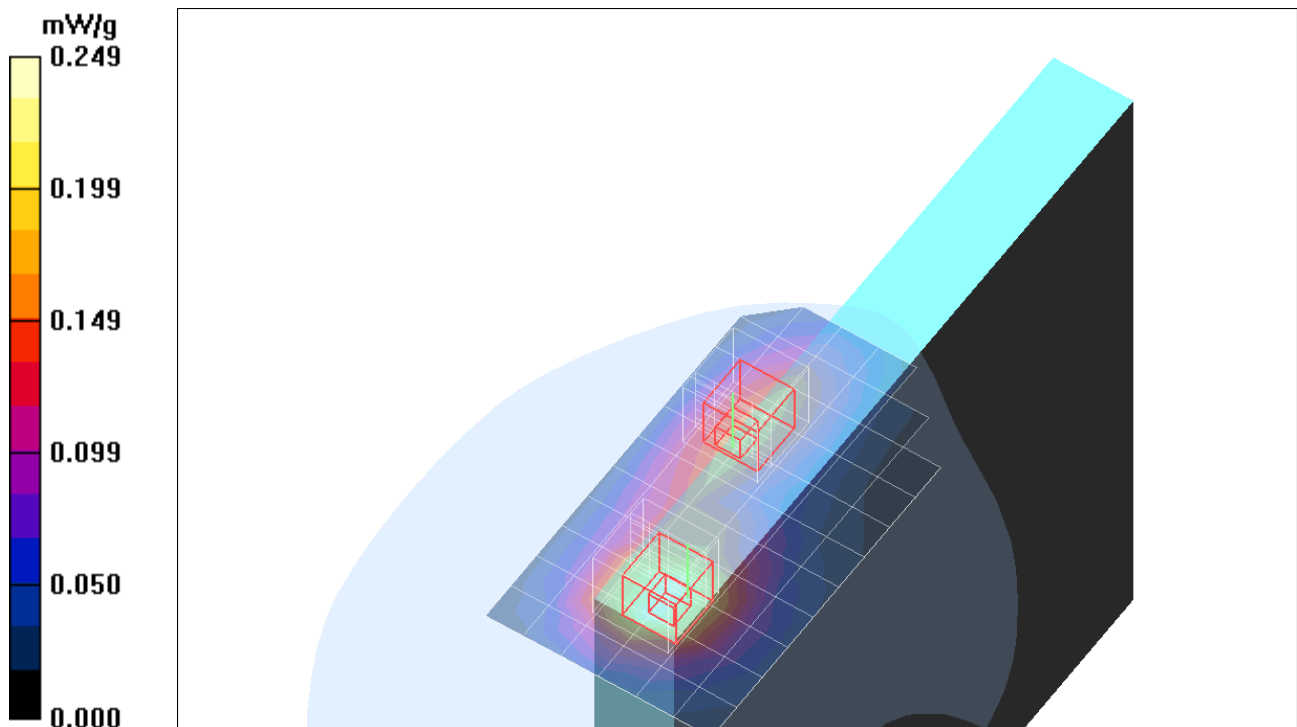

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.956 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 2.4GHz HT20 mode/Area Scan (7x13x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.253 mW/g

GPRS L ch collocation with BT and WLAN @ 2.4GHz HT20 mode/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.8 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.156 mW/g

Maximum value of SAR (measured) = 0.255 mW/g

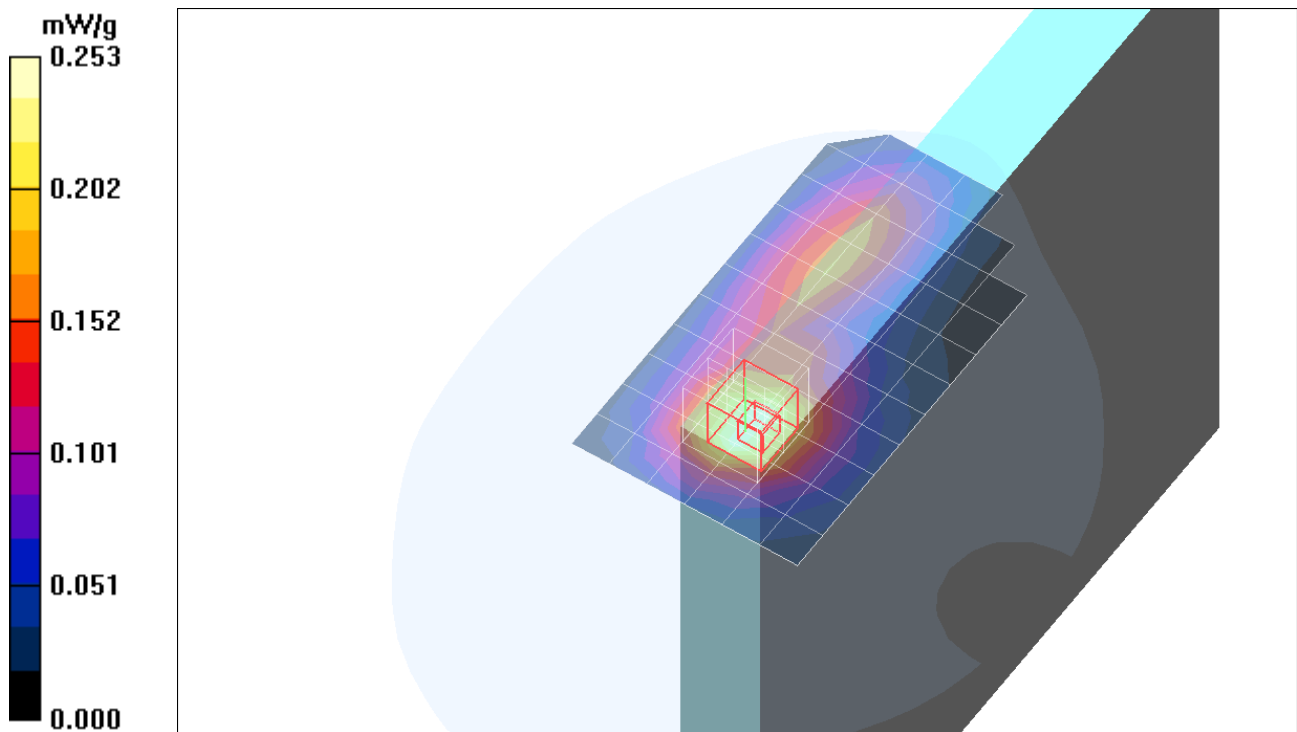

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.956 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 2.4GHz HT40 mode/Area Scan (7x13x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.255 mW/g


GPRS L ch collocation with BT and WLAN @ 2.4GHz HT40 mode/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.8 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.157 mW/g

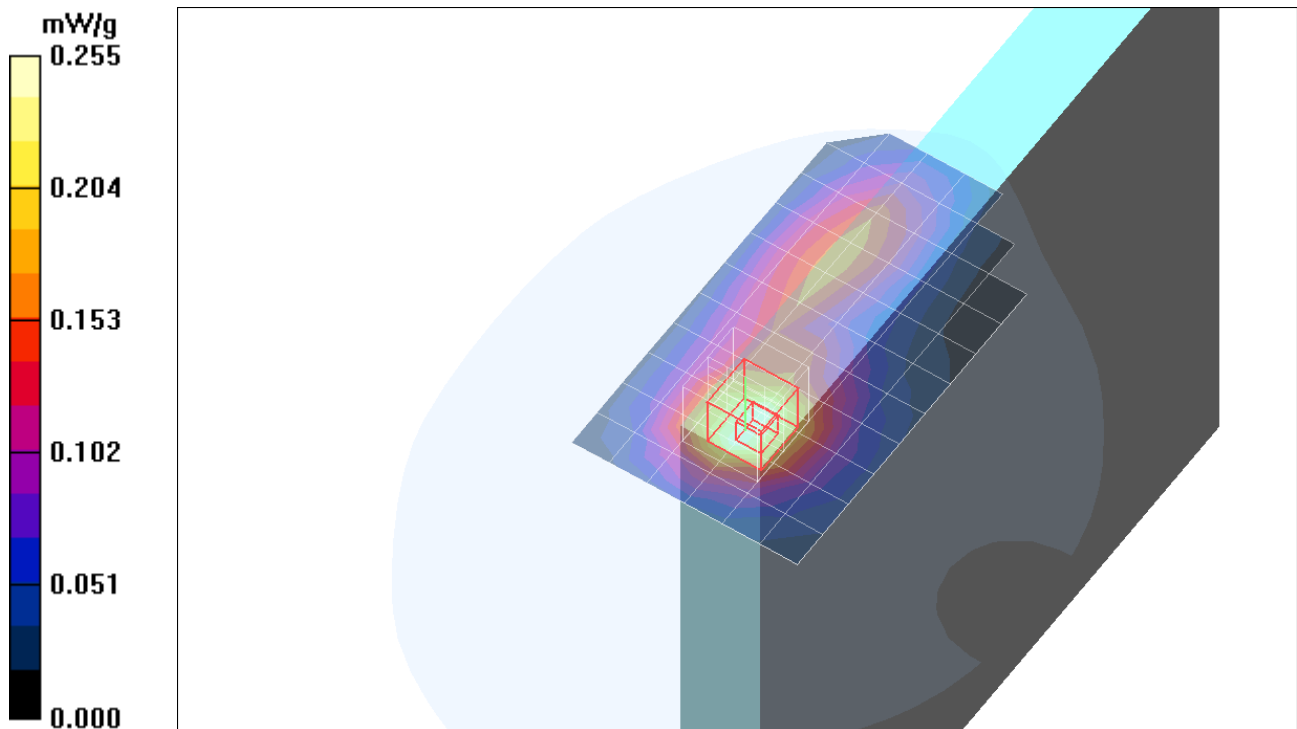

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 5.2GHz a mode/Area Scan (7x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 mW/g

GPRS L ch collocation with BT and WLAN @ 5.2GHz a mode/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

GPRS L ch collocation with BT and WLAN @ 5.2GHz a mode/Zoom Scan (5x5x7)/Cube


1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.172 mW/g

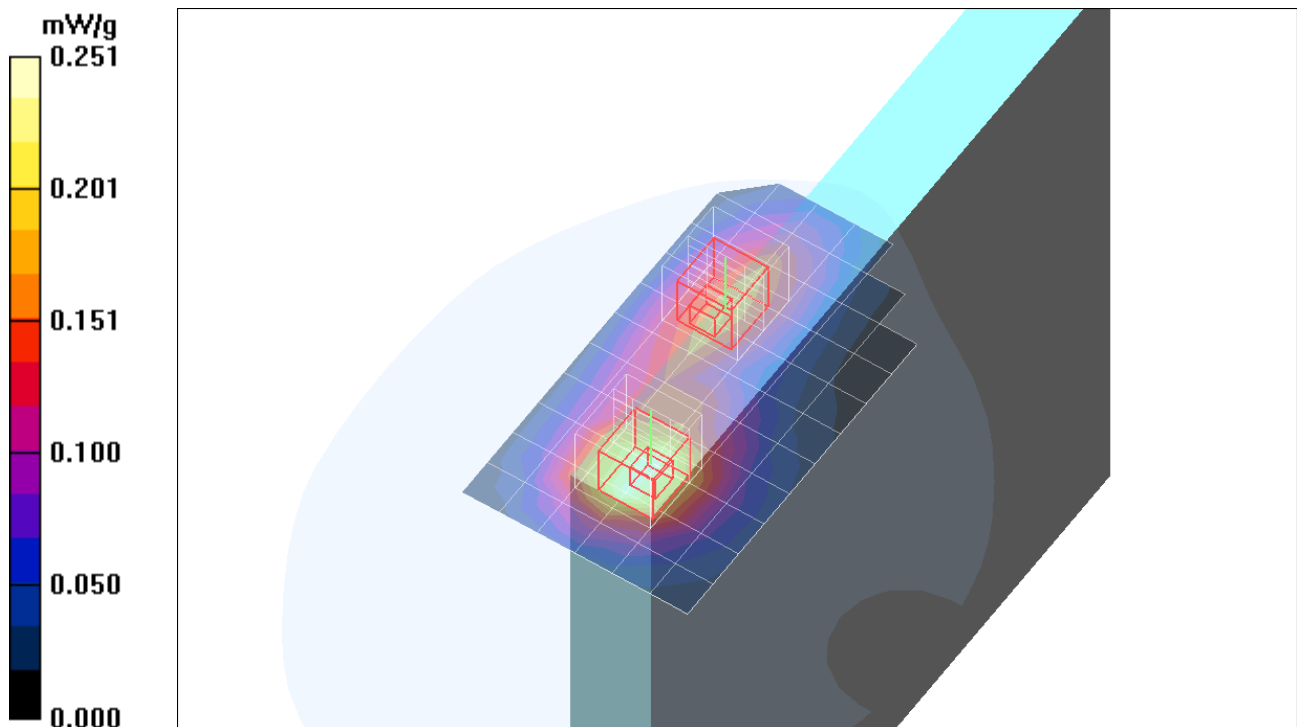

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 5.2GHz HT20 mode/Area Scan (7x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 mW/g

GPRS L ch collocation with BT and WLAN @ 5.2GHz HT20 mode/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

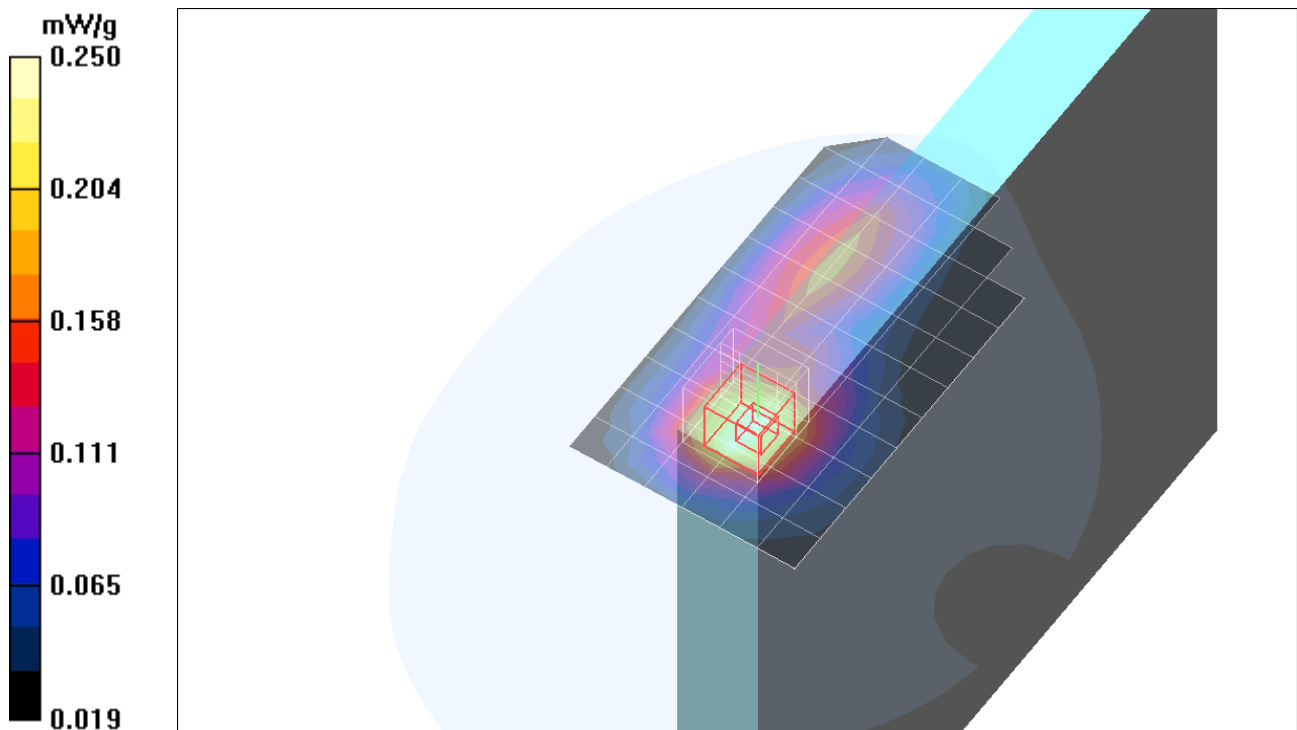

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 5.2GHz HT40 mode/Area Scan (7x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.250 mW/g

GPRS L ch collocation with BT and WLAN @ 5.2GHz HT40 mode/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.153 mW/g

GPRS L ch collocation with BT and WLAN @ 5.2GHz HT40 mode/Zoom Scan


(5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.171 mW/g

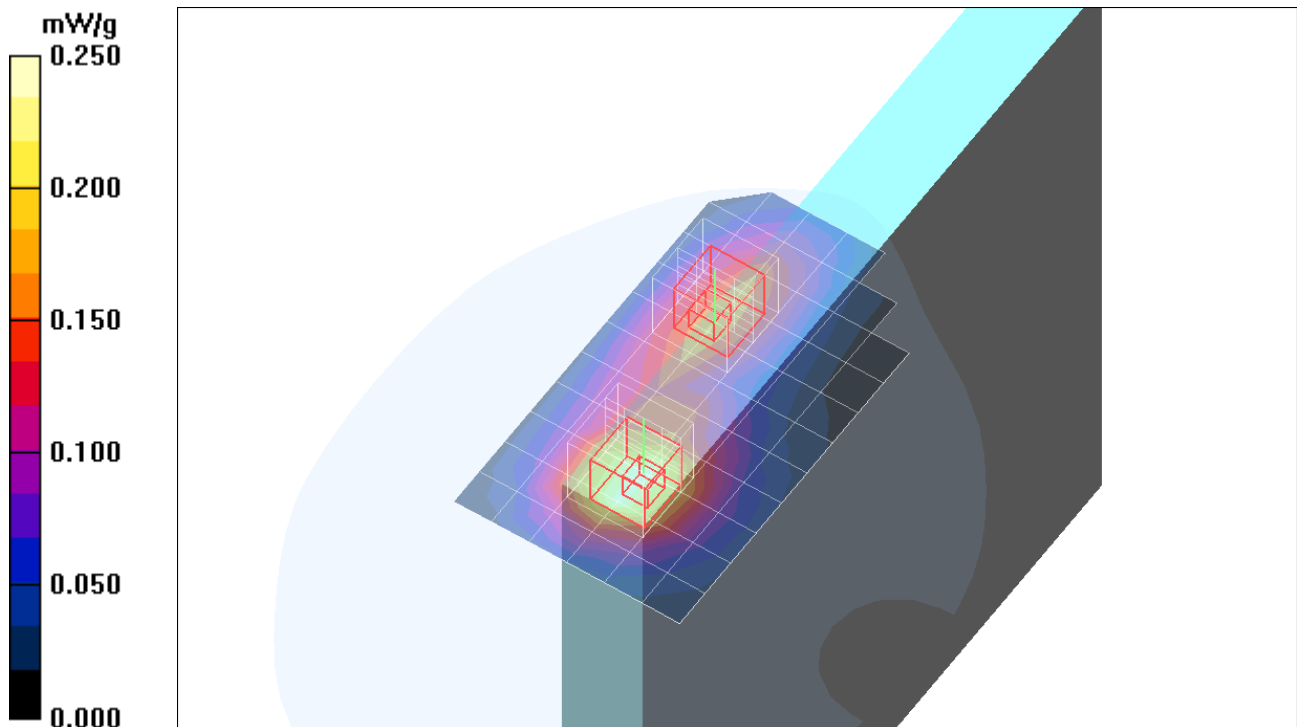

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 5.8GHz a mode/Area Scan (7x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.248 mW/g

GPRS L ch collocation with BT and WLAN @ 5.8GHz a mode/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

GPRS L ch collocation with BT and WLAN @ 5.8GHz a mode/Zoom Scan (5x5x7)/Cube


1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.171 mW/g

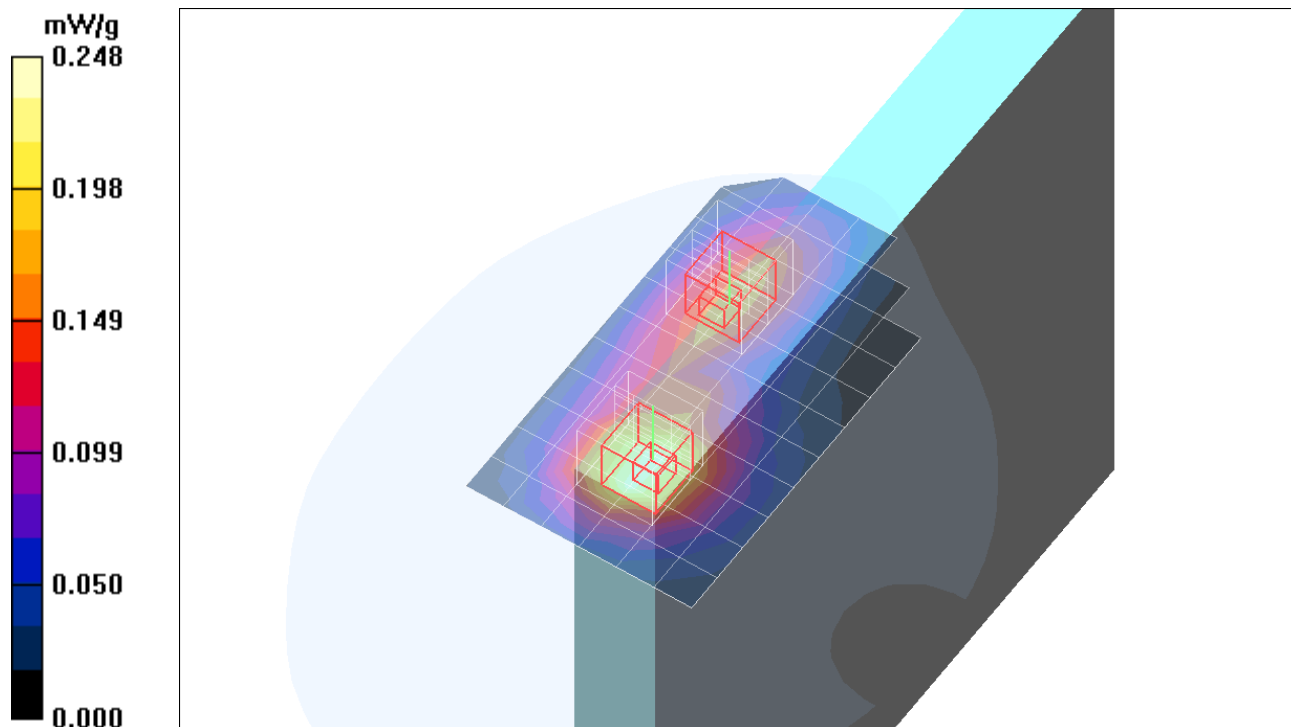

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 5.8GHz HT20 mode/Area Scan (7x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.248 mW/g

GPRS L ch collocation with BT and WLAN @ 5.8GHz HT20 mode/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.154 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

GPRS L ch collocation with BT and WLAN @ 5.8GHz HT20 mode/Zoom Scan


(5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.172 mW/g

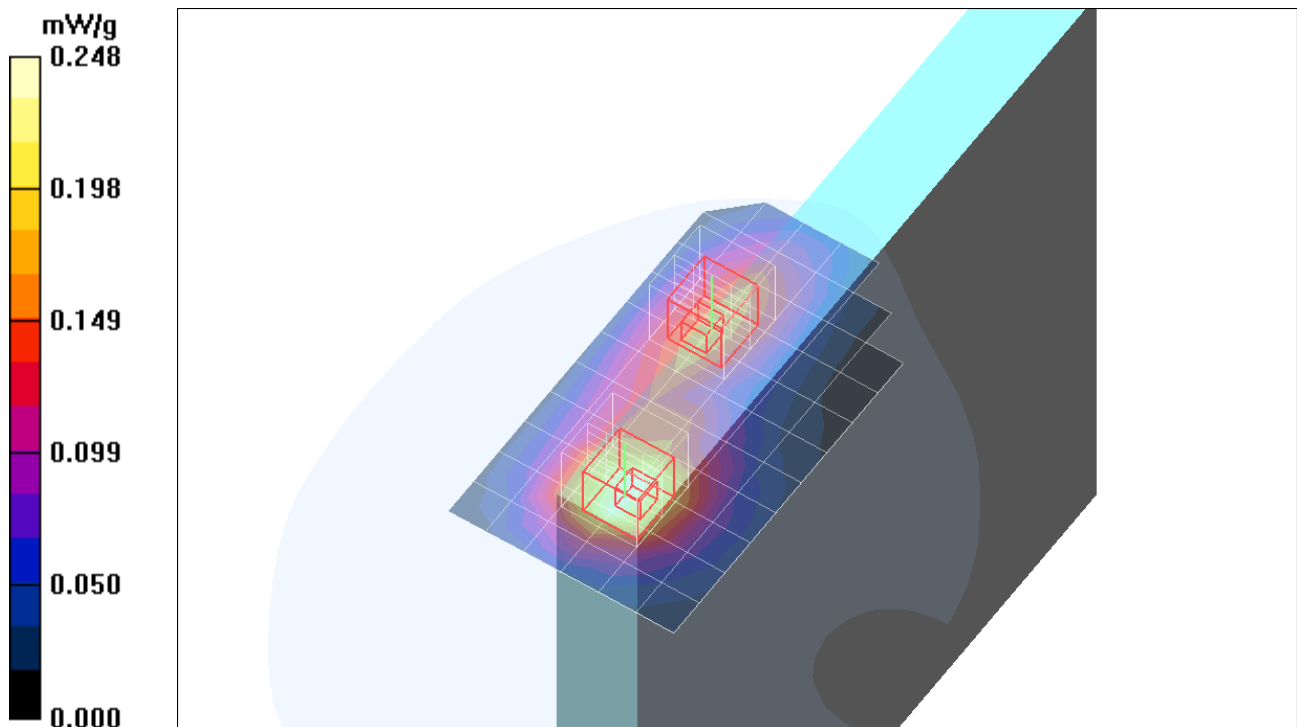

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position (Co - Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS L ch collocation with BT and WLAN @ 5.8GHz HT40 mode/Area Scan (7x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 mW/g

GPRS L ch collocation with BT and WLAN @ 5.8GHz HT40 mode/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.154 mW/g

GPRS L ch collocation with BT and WLAN @ 5.8GHz HT40 mode/Zoom Scan


(5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.186 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.171 mW/g

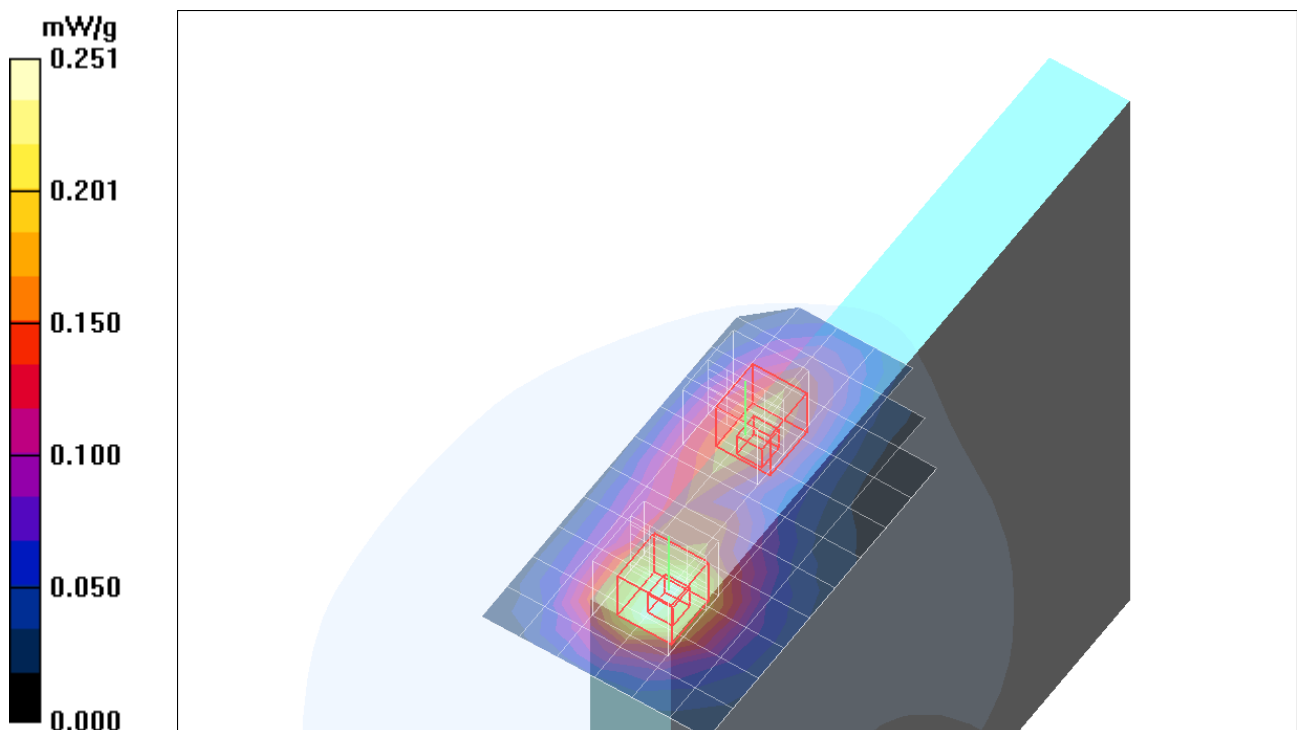

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837 \text{ MHz}$; $\sigma = 0.962 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11b legacy CCD mode)/Area Scan (9x10x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.116 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11b legacy CCD mode)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 7.49 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.082 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.123 mW/g

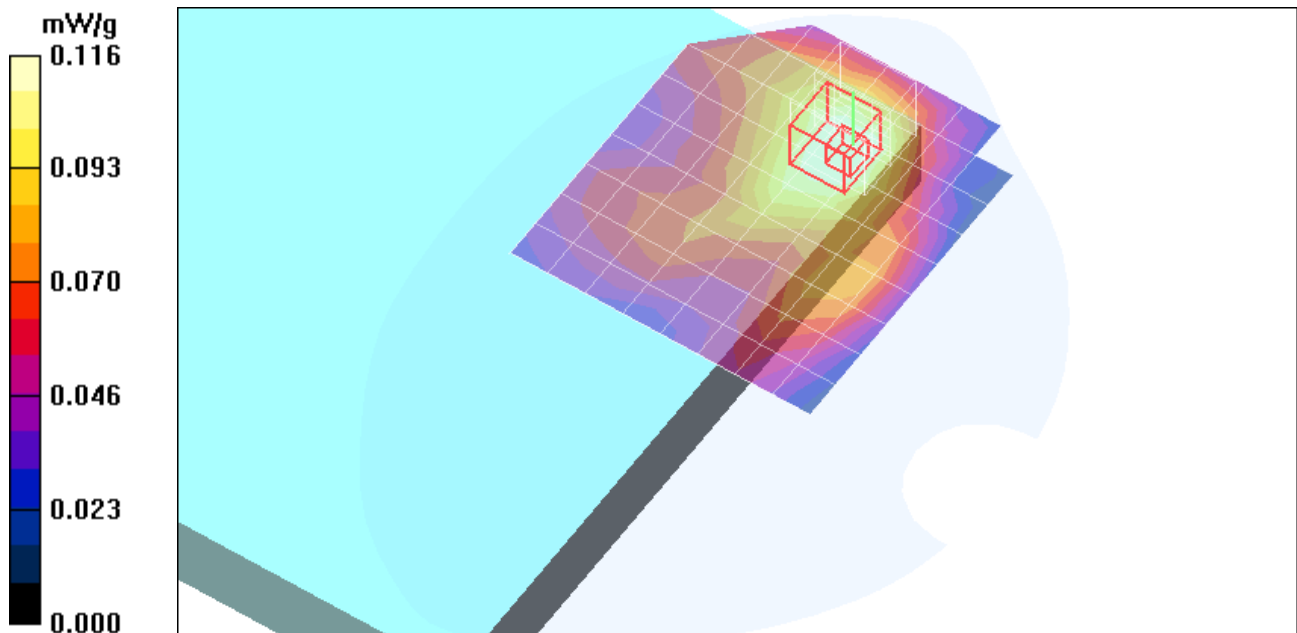

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11g legacy CCD mode)/Area Scan (9x10x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.108 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11g legacy CCD mode)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.22 V/m; Power Drift = -0.156 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.077 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.110 mW/g

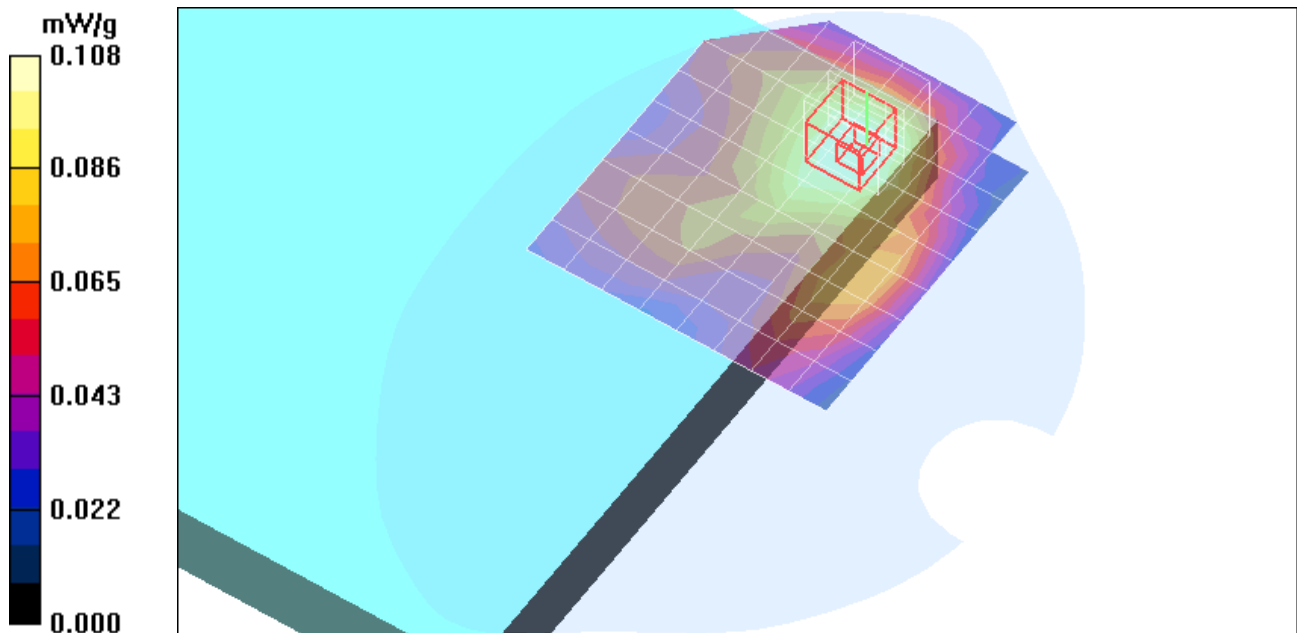

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11g HT20 MIMO mode)/Area Scan (9x10x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.119 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11g HT20 MIMO mode)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.53 V/m; Power Drift = -0.189 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.081 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.118 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11g HT20 MIMO mode)/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.53 V/m; Power Drift = -0.189 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.055 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.090 mW/g

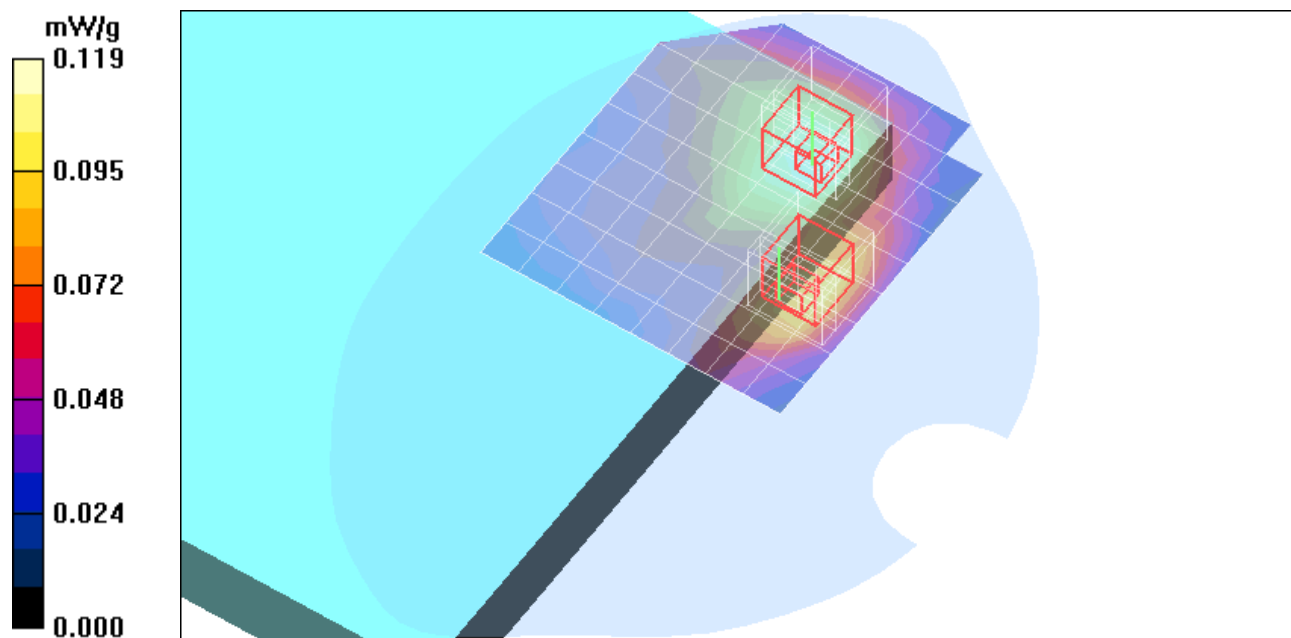

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837 \text{ MHz}$; $\sigma = 0.962 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11g HT40 MIMO mode)/Area Scan (9x10x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.116 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11g HT40 MIMO mode)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.79 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.082 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.119 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11g HT40 MIMO mode)/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$



Reference Value = 7.79 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.055 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.089 mW/g

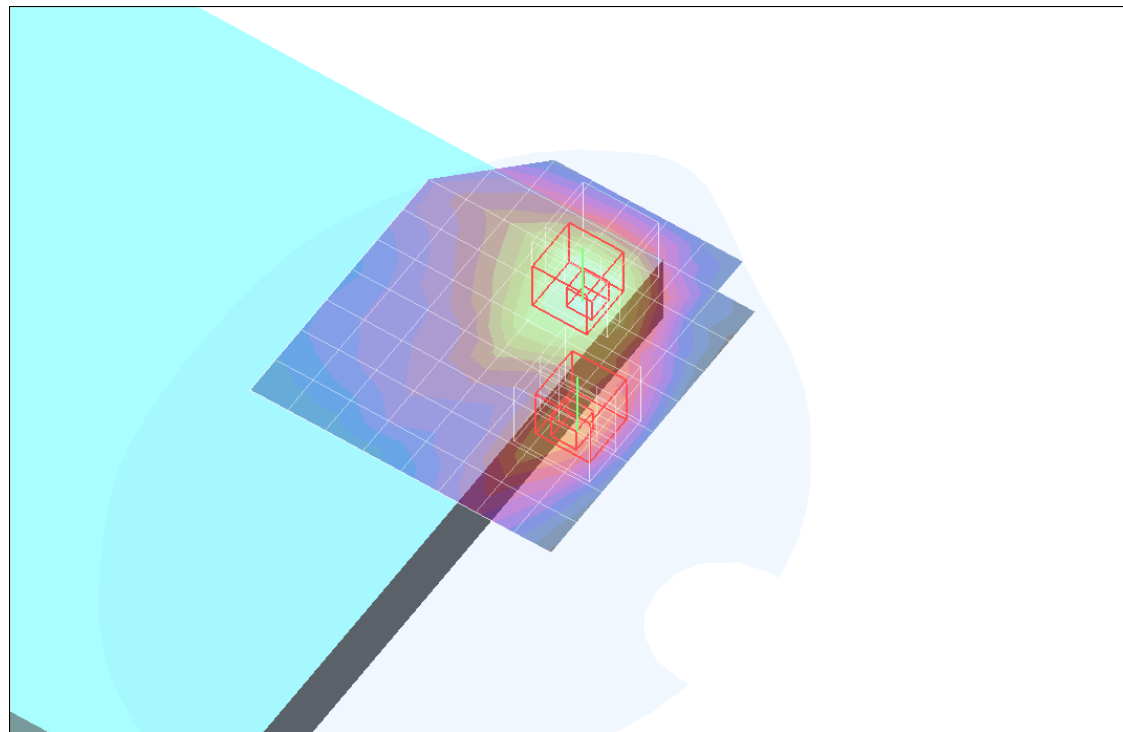

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.2 GHz legacy mode)/Area Scan

(9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.2 GHz legacy mode)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.51 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.074 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.108 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.2 GHz legacy mode)/Zoom Scan

(5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.51 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.056 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.092 mW/g

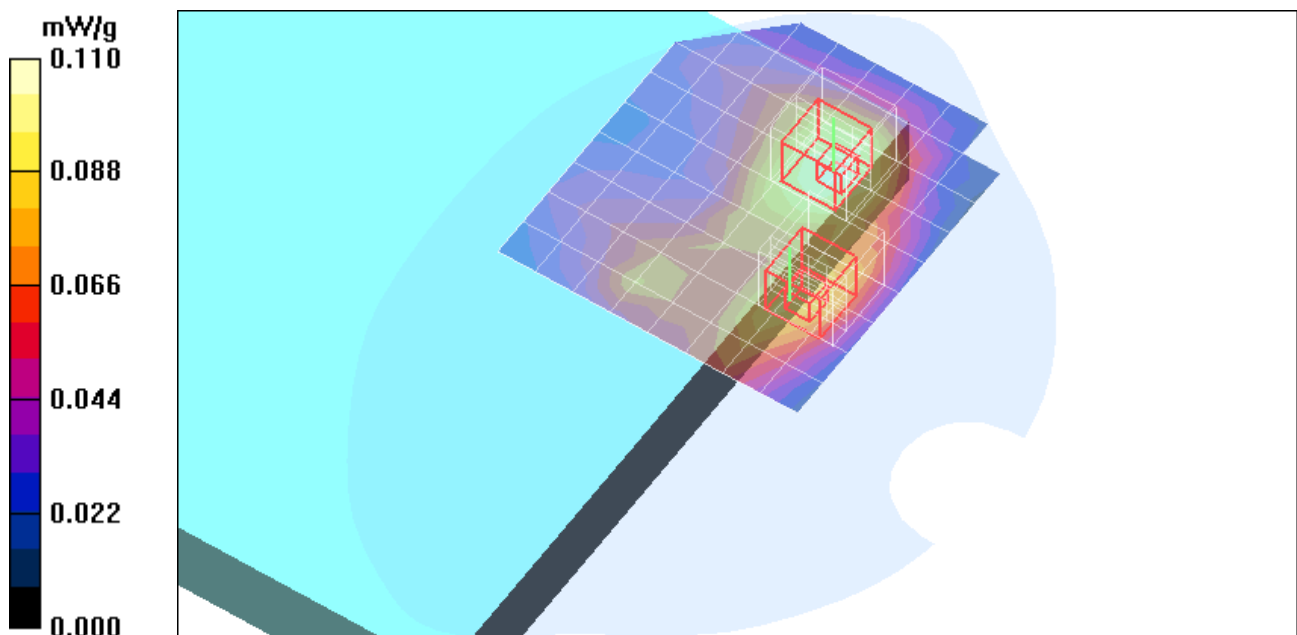

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837 \text{ MHz}$; $\sigma = 0.962 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.2 GHz HT20 MIMO mode)/Area Scan

(9x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.109 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.2 GHz HT20 MIMO mode)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.44 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.074 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.108 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.2 GHz HT20 MIMO mode)/Zoom Scan

(5x5x7)/Cube 1: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$



Reference Value = 8.44 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.056 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.092 mW/g

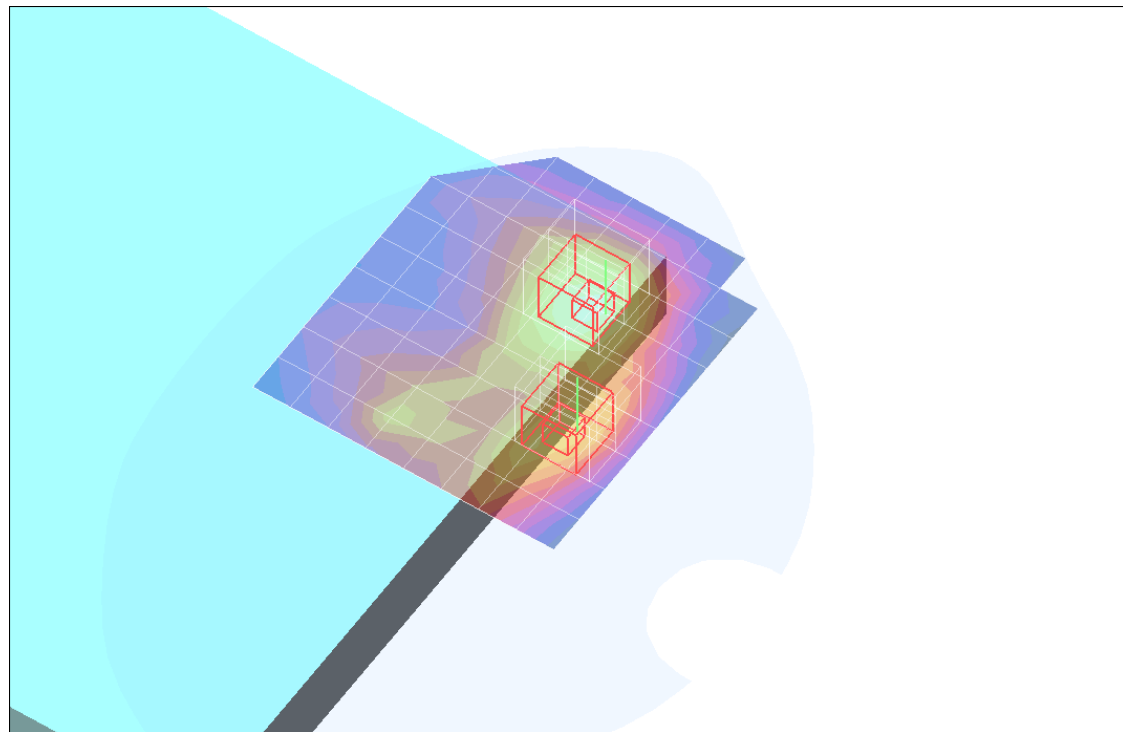

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.2 GHz HT40 MIMO mode)/Area Scan

(9x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.109 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.2 GHz HT40 MIMO mode)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.39 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.075 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.2 GHz HT40 MIMO mode)/Zoom Scan

(5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm



Reference Value = 8.39 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.059 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.097 mW/g

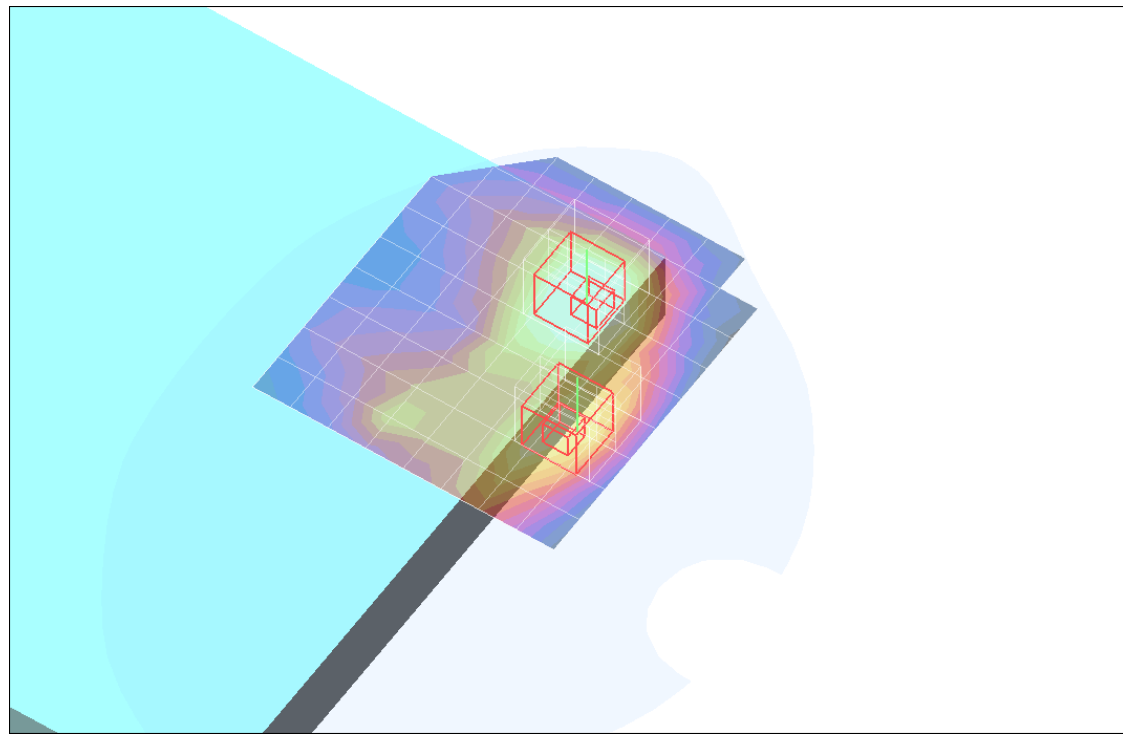

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837 \text{ MHz}$; $\sigma = 0.962 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.8 GHz legacy mode)/Area Scan

(9x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.109 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.8 GHz legacy mode)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.35 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.075 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.8 GHz legacy mode)/Zoom Scan

(5x5x7)/Cube 1: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$



Reference Value = 8.35 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.045 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.091 mW/g

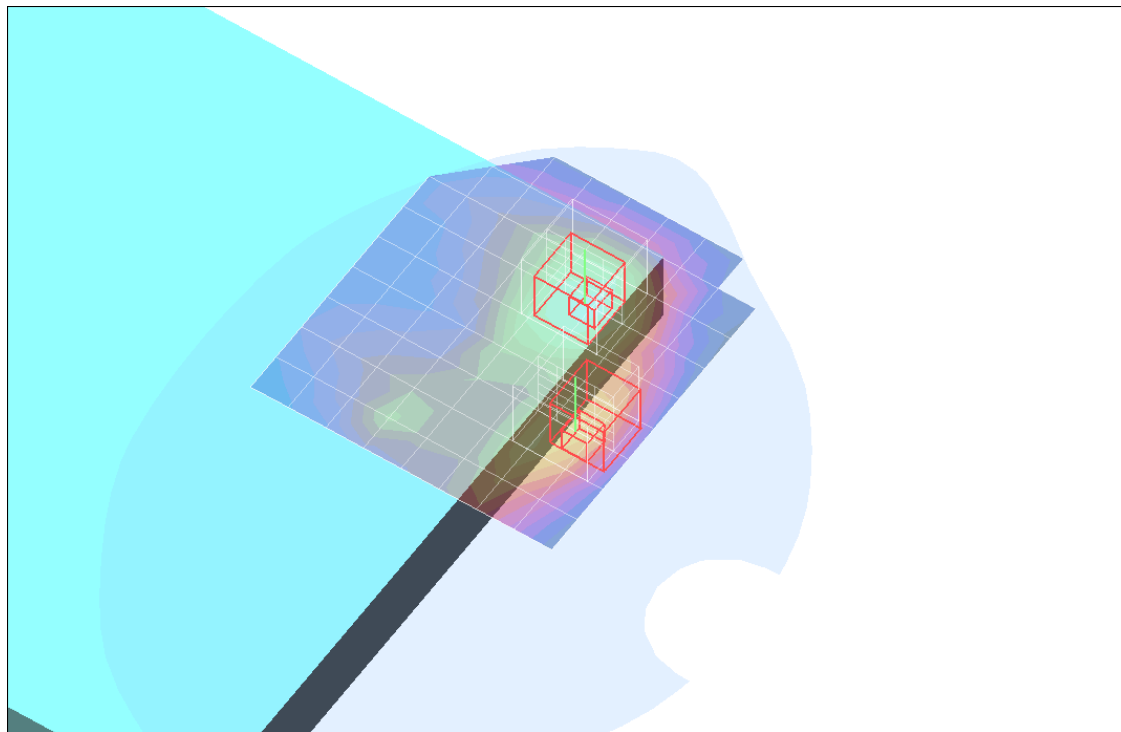

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837 \text{ MHz}$; $\sigma = 0.962 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.8 GHz HT20 mode)/Area Scan (9x10x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.109 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.8 GHz HT20 mode)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.18 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.074 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.8 GHz HT20 mode)/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$



Reference Value = 8.18 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.055 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.092 mW/g

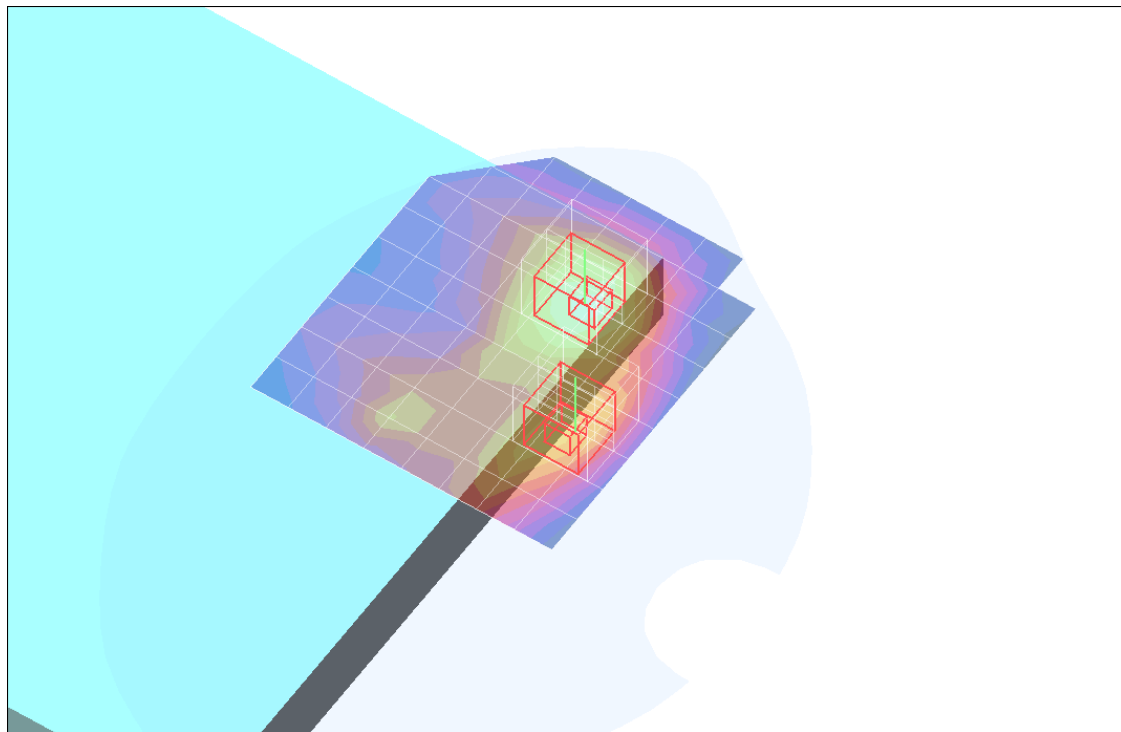

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837 \text{ MHz}$; $\sigma = 0.962 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.8 GHz HT40 mode)/Area Scan (9x10x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.108 mW/g

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.8 GHz HT40 mode)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.18 V/m; Power Drift = 0.164 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.074 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

GPRS M ch (Co-Tx w/ BT and WLAN 802.11a 5.8 GHz HT40 mode)/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.18 V/m; Power Drift = 0.164 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.056 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.093 mW/g

