

Test Laboratory: Compliance Certification Services

PCS Band -Primary Landscape

DUT: Think Pad X61 Tablet; Type: Tablet;Serial: N/A

Communication System: PCS 1900;Frequency: 1880 MHz;Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room AmbientTemperature: 22.0deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and witha peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GPRS Four Slots - M ch/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.010 mW/g


GPRS Four Slots - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.48 V/m; Power Drift = -0.192 dB

Peak SAR (extrapolated) = 0.004 W/kg

SAR(1 g) = 0.00226 mW/g; SAR(10 g) = 0.00198 mW/g

Maximum value of SAR (measured) = 0.003 mW/g

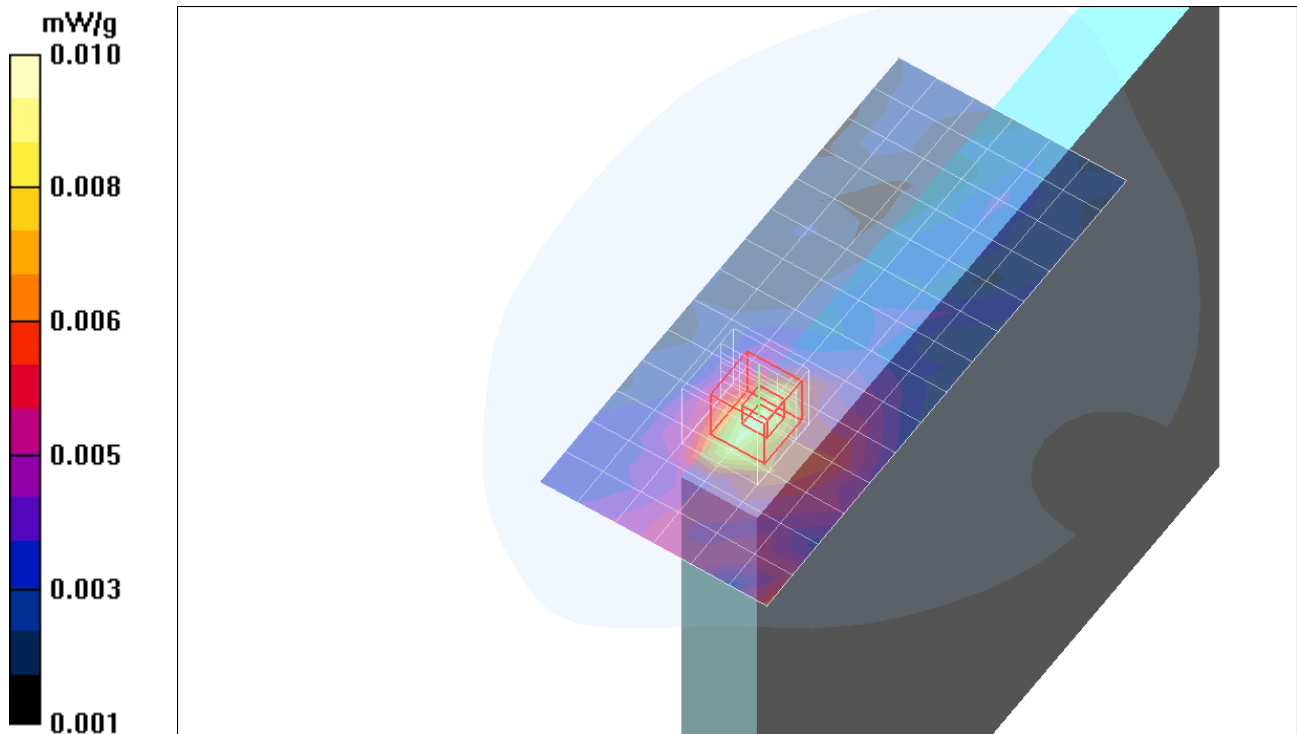

Test Laboratory: Compliance Certification Services

PCS Band - Primary Landscape

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

WCDMA 12.2k RMC - M ch/Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.005 mW/g


WCDMA 12.2k RMC - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.03 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.009 W/kg

SAR(1 g) = 0.00574 mW/g; SAR(10 g) = 0.00352 mW/g

Maximum value of SAR (measured) = 0.006 mW/g

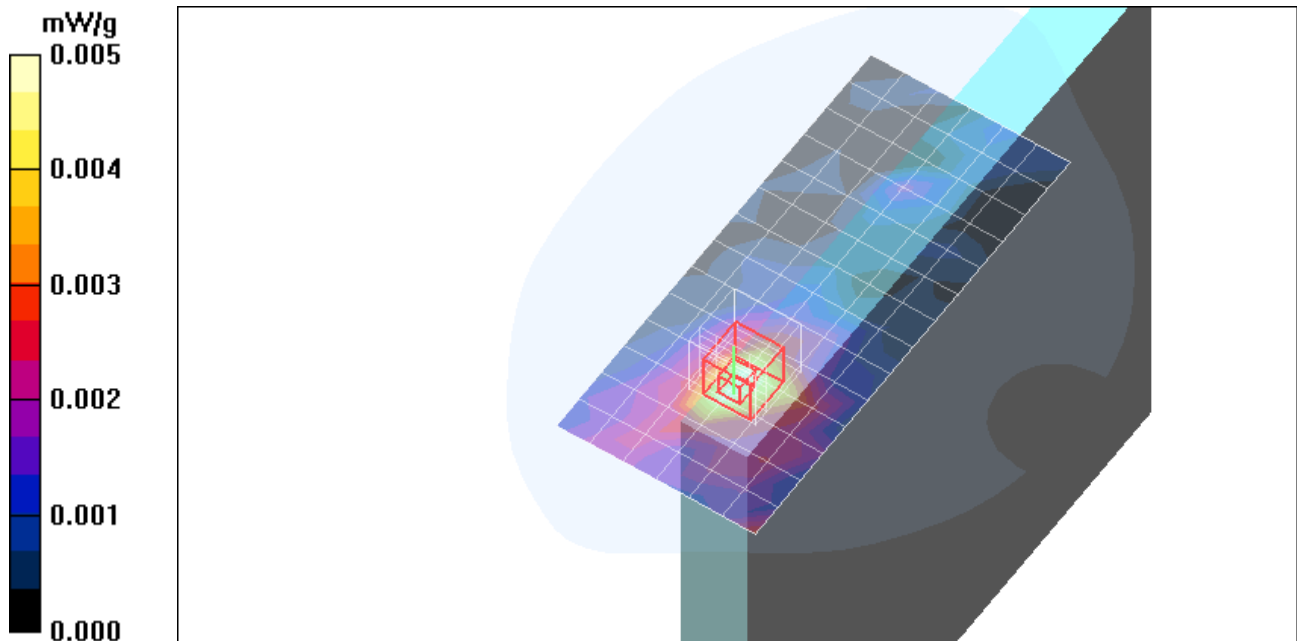

Test Laboratory: Compliance Certification Services

PCS Band - Primary portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GPRS Four Slots - M ch/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.262 mW/g


GPRS Four Slots - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.79 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.259 mW/g

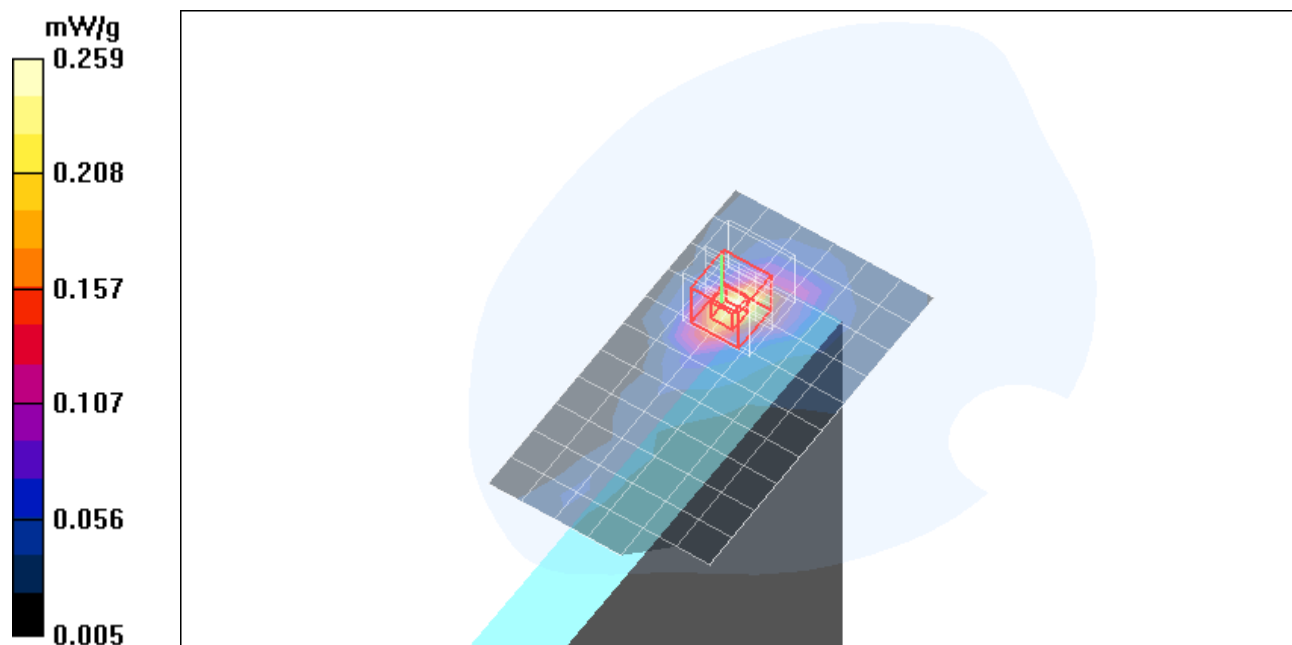

Test Laboratory: Compliance Certification Services

PCS Band - Primary portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

WCDMA 12.2k RMC - M ch/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.171 mW/g


WCDMA 12.2k RMC - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.14 V/m; Power Drift = 0.272 dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.160 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.170 mW/g

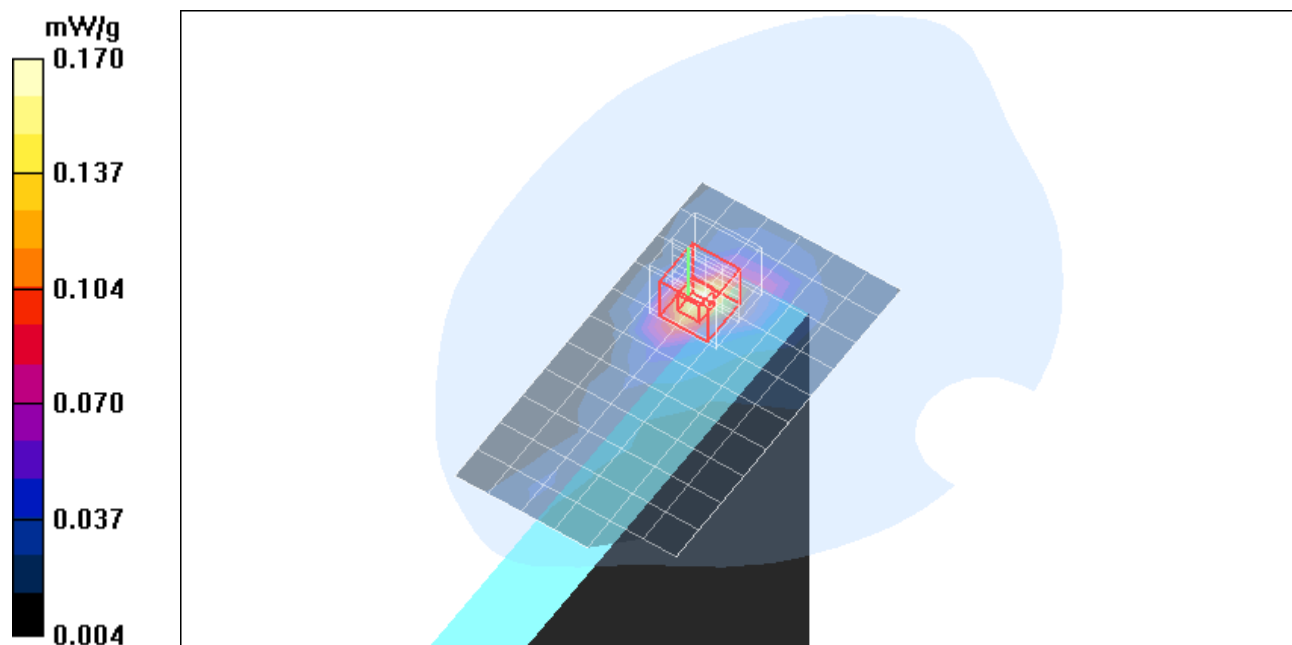

Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GPRS Single Slot - M ch/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.130 mW/g


GPRS Single Slot - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 2.51 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.146 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.157 mW/g

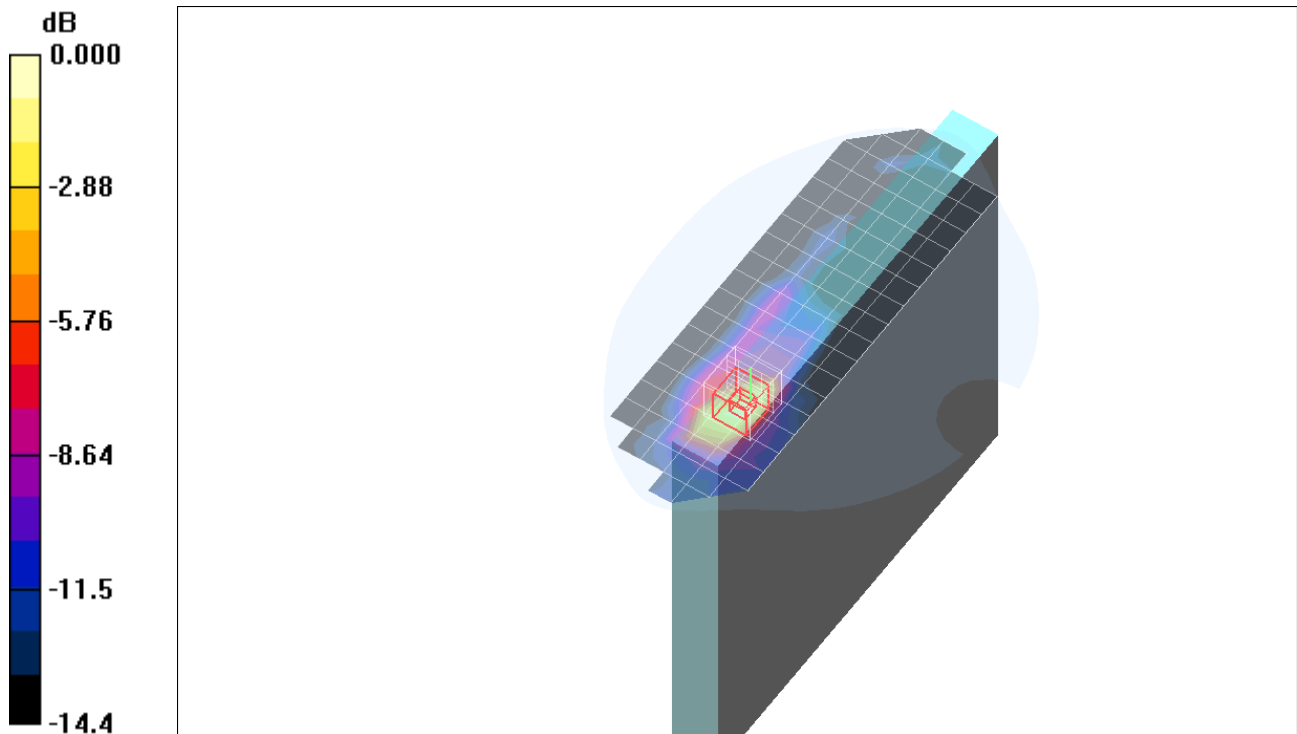

0 dB = 0.157 mW/g

Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GPRS Two Slots - M ch /Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 mW/g


GPRS Two Slots - M ch /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 2.98 V/m; Power Drift = 0.168 dB

Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.138 mW/g

Maximum value of SAR (measured) = 0.296 mW/g

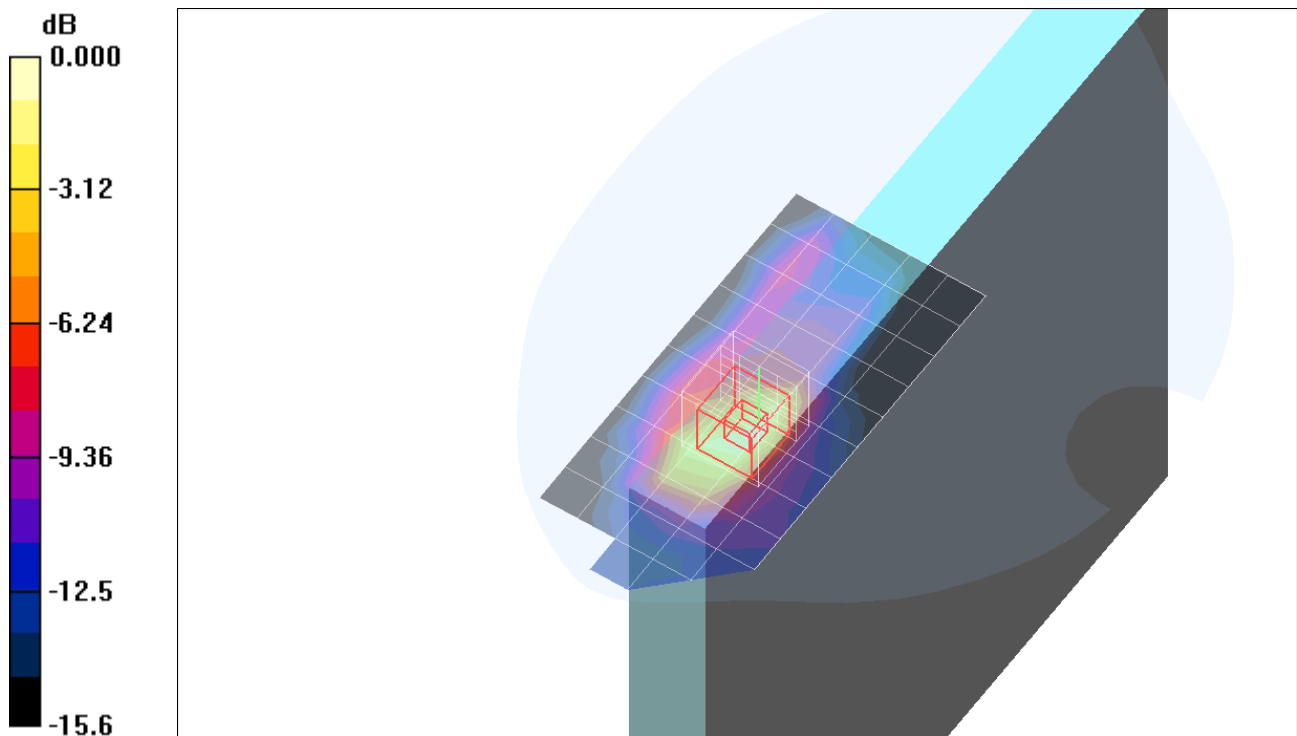

0 dB = 0.296 mW/g

Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.67

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GPRS Three Slots - M ch /Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.362 mW/g


GPRS Three Slots - M ch /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.53 V/m; Power Drift = 0.170 dB

Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.439 mW/g

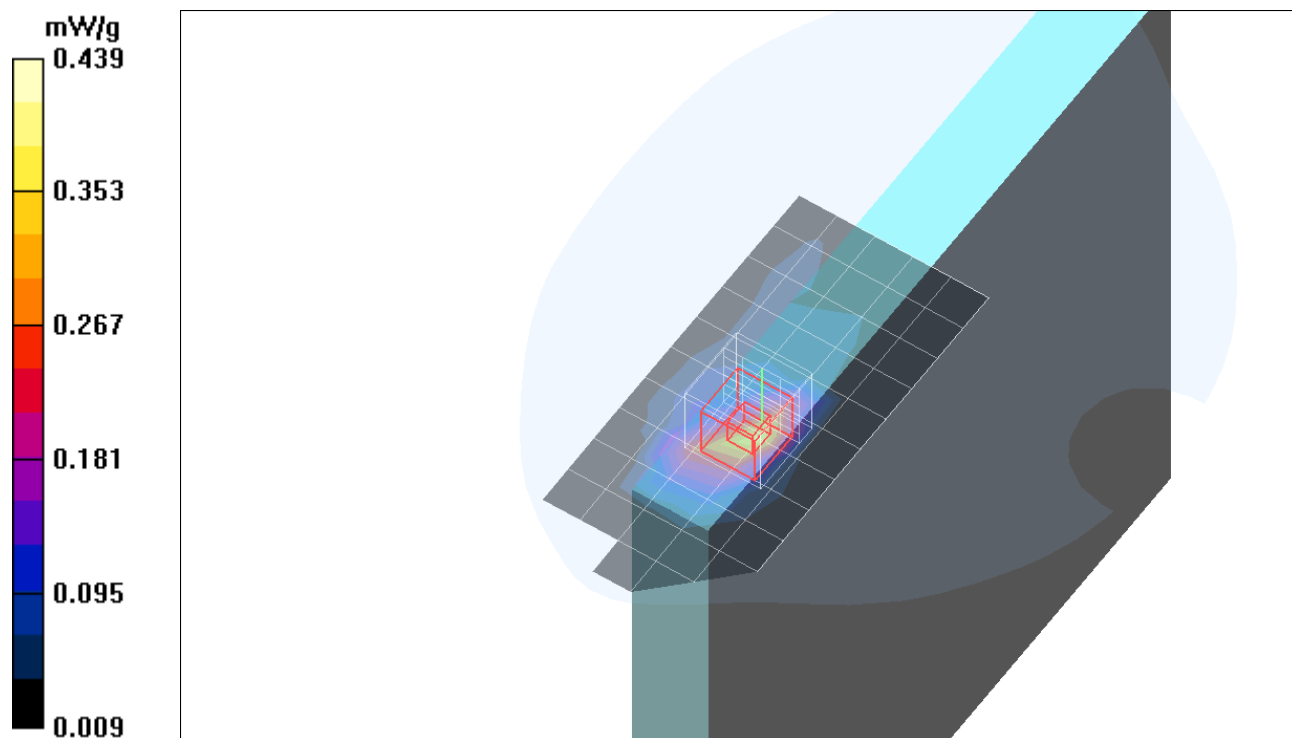

Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GPRS Four Slots - M ch/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.384 mW/g


GPRS Four Slots - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.42 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 0.897 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.544 mW/g

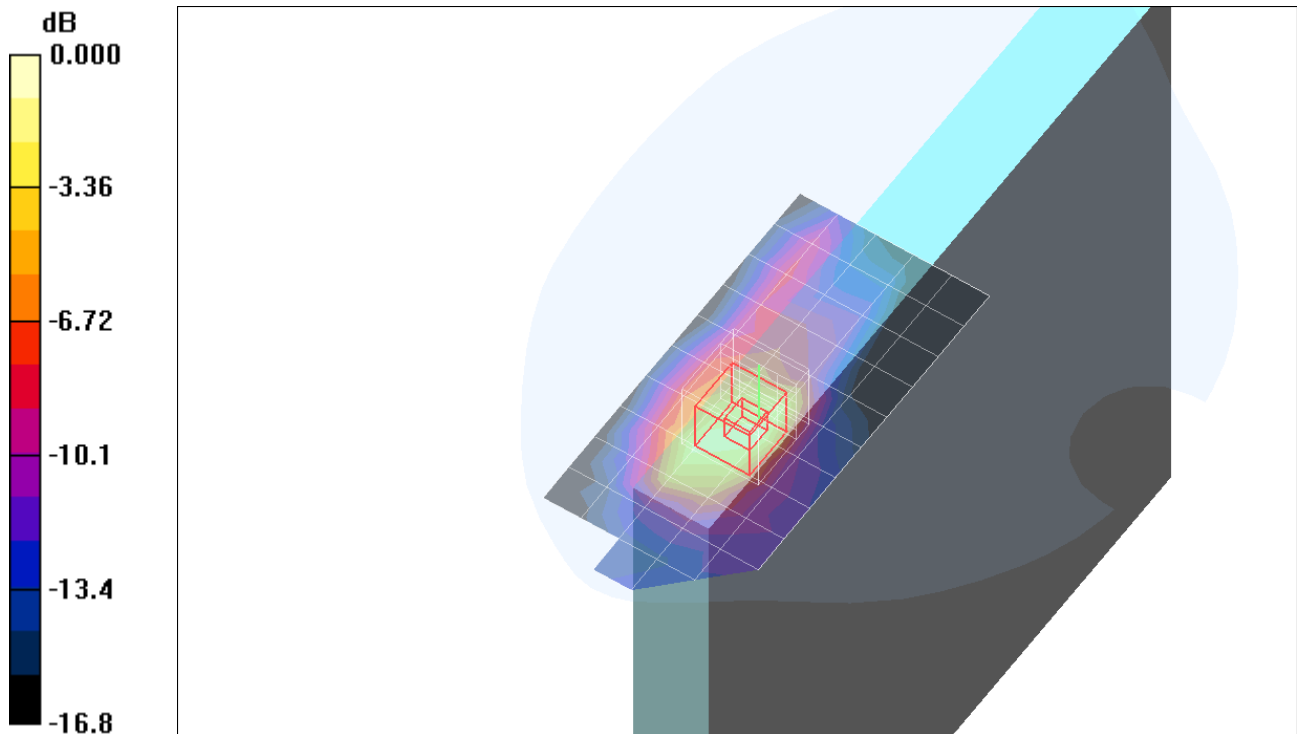

0 dB = 0.544 mW/g

Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GPRS Four Slots (Co-Tx) BT - M ch/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.473 mW/g


GPRS Four Slots (Co-Tx) BT - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.04 V/m; Power Drift = 0.166 dB

Peak SAR (extrapolated) = 0.927 W/kg

SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.260 mW/g

Maximum value of SAR (measured) = 0.581 mW/g

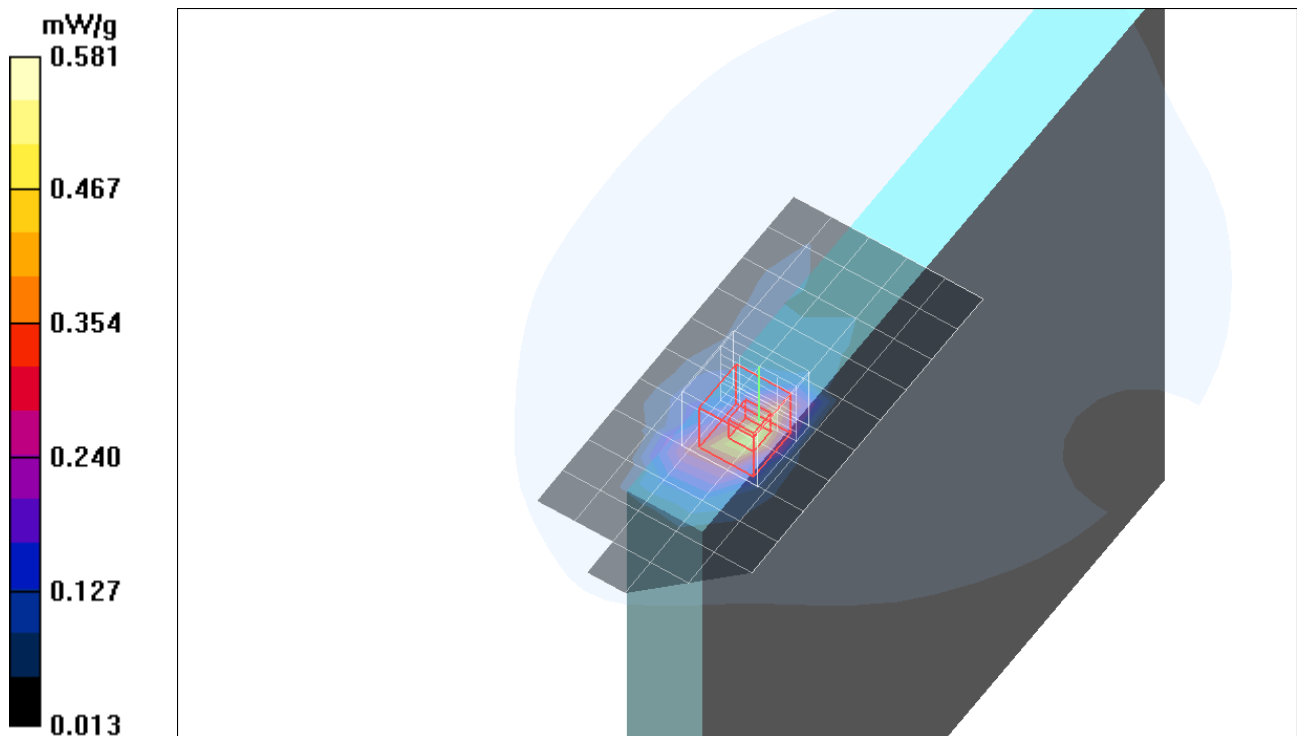


Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2

GPRS Four Slots (Co-Tx) BT - M ch/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 0.364 mW/g

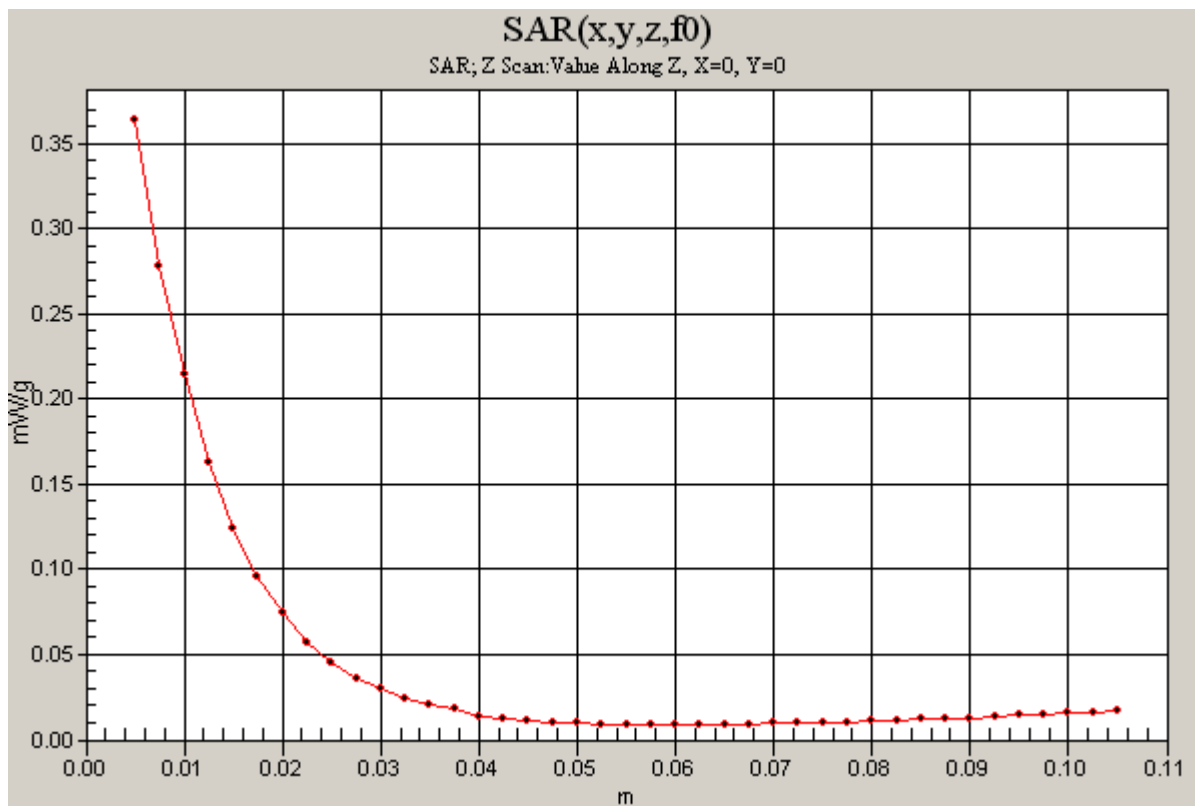

Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

EGPRS Four Slots - M ch/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.219 mW/g


EGPRS Four Slots - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 2.75 V/m; Power Drift = 0.154 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.315 mW/g

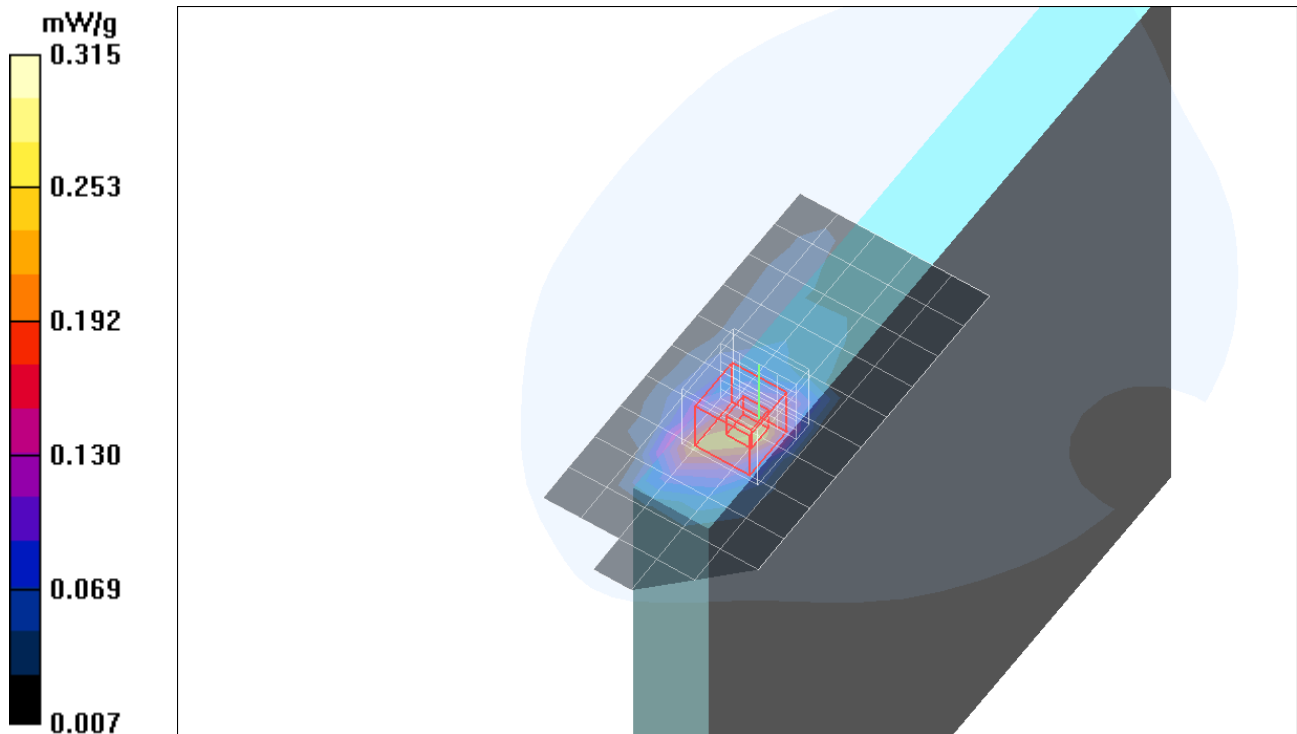

Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

WCDMA 12.2k RMC - M ch/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.253 mW/g


WCDMA 12.2k RMC - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 2.77 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.337 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.362 mW/g

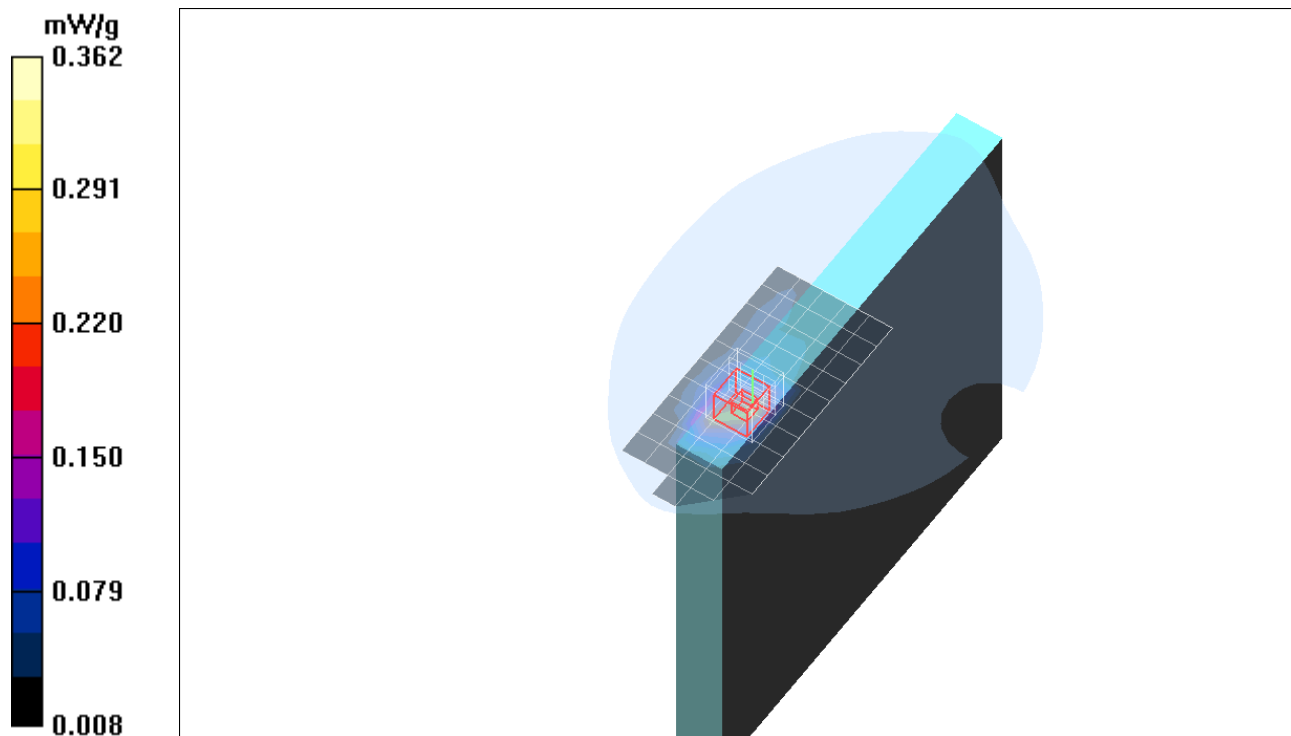

Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

WCDMA 384k RMC - M ch/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.292 mW/g


WCDMA 384k RMC - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.12 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.415 mW/g

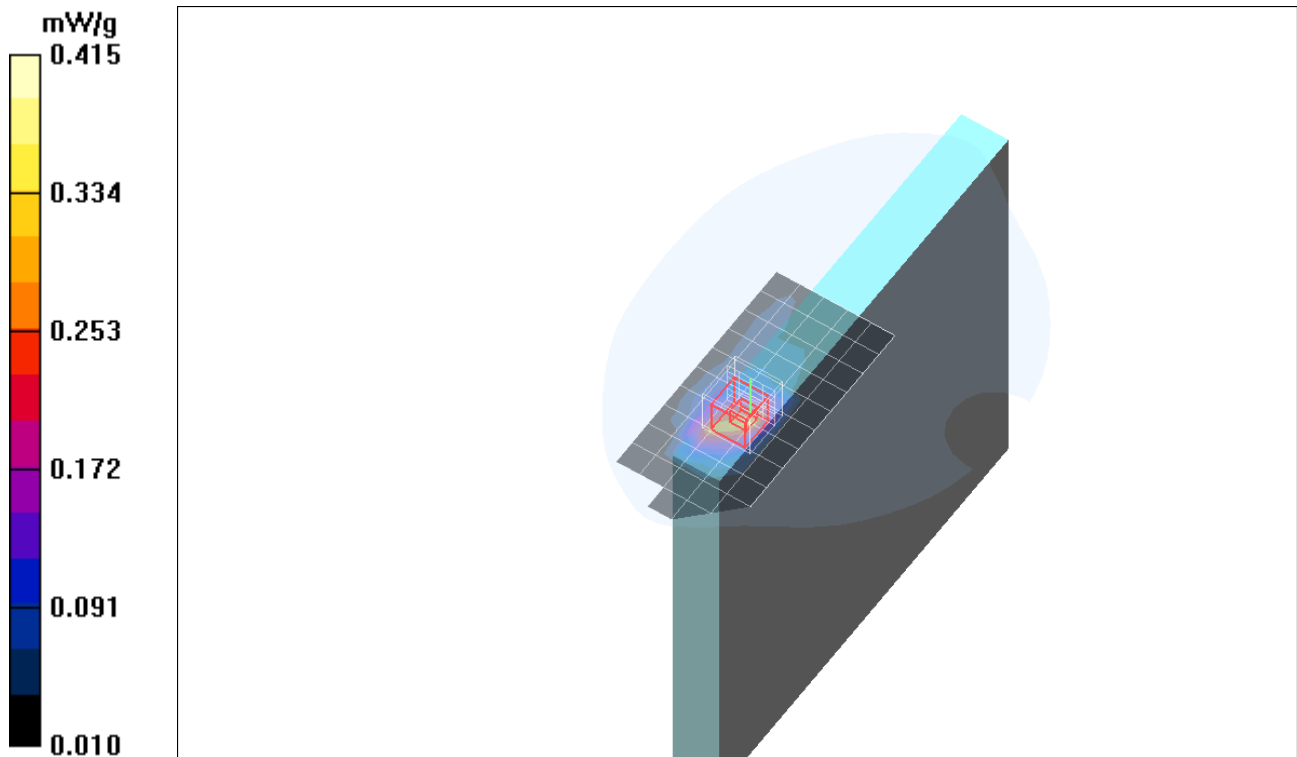

Test Laboratory: Compliance Certification Services

PCS Band - Secondary Portrait

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

WCDMA 12.2k RMC + HSDPA - M ch/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.246 mW/g


WCDMA 12.2k RMC + HSDPA - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 2.85 V/m; Power Drift = 0.127 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.165 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

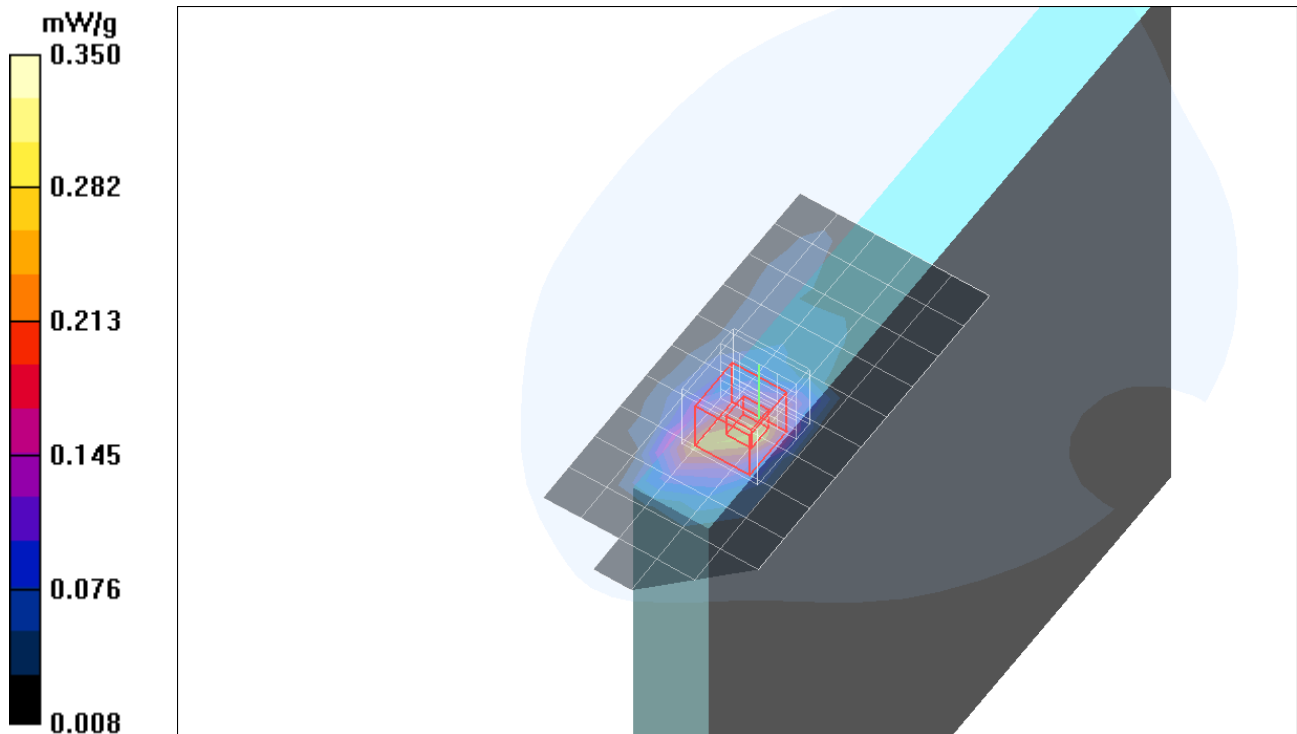

Test Laboratory: Compliance Certification Services

PCS Band - Lap-held

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GPRS Four Slots - M ch/Area Scan (10x20x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.313 mW/g


GPRS Four Slots - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.179 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

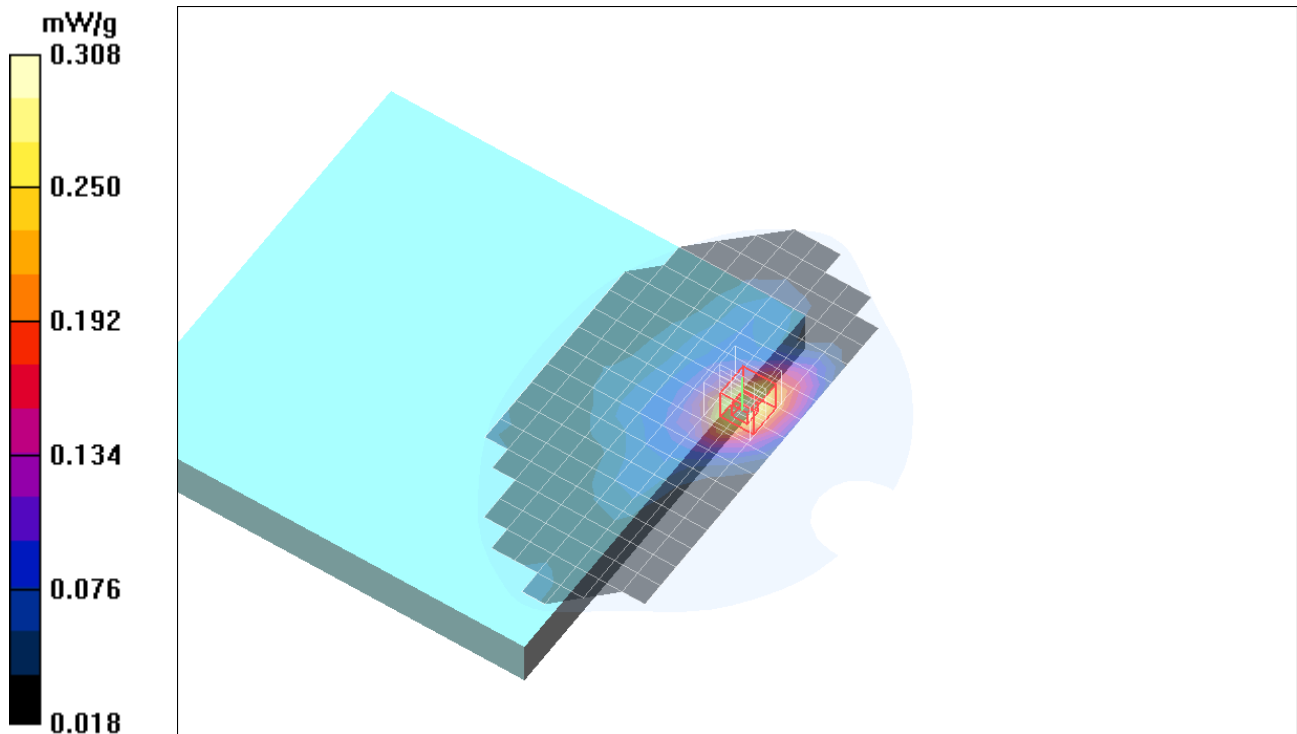

Test Laboratory: Compliance Certification Services

PCS Band - Lap-held

DUT: Think Pad X61 Tablet; Type: Tablet; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 22.0 deg. C; Liquid Temperature: 21.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

WCDMA 12.2k RMC - M ch/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.210 mW/g

WCDMA 12.2k RMC - M ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.36 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.193 mW/g

