

**TEST REPORT****Report Number: HK10080946-1**

Application  
for

Original Grant of 47 CFR Part 15 Certification  
New Family of RSS-210 Issue 8 Equipment Certification

2.4GHz Frequency Hopping Spread Spectrum Parent Unit

**FCC ID: N7TAC1100R****IC: 5786A-AC1100R**

Prepared and Checked by:



---

Koo Wai Ip  
Lead Engineer  
November 30, 2010

Approved by:



---

Nip Ming Fung, Melvin  
Supervisor  
November 30, 2010

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etsemko.com](http://www.hk.intertek-etsemko.com)

# INTERTEK TESTING SERVICES

---

## GENERAL INFORMATION

<b>Applicant Name:</b>	Angelcare Monitors Inc.
<b>Applicant Address:</b>	3980, Rue St-Ambroise, Montreal, Quebec, H4C 2C7, Canada.
<b>FCC Specification Standard:</b>	FCC Part 15, October 1, 2009 Edition
<b>FCC ID:</b>	N7TAC1100R
<b>FCC Model(s):</b>	AC1100, AC1120
<b>IC Specification Standard:</b>	RSS-210 Issue 8, December 2010 RSS-Gen Issue 3, December 2010 RSS-102 Issue 4, March 2010
<b>IC:</b>	5786A-AC1100R
<b>IC Model(s):</b>	AC1100-P, AC1120-P
<b>Type of EUT:</b>	Spread Spectrum Transmitter
<b>Description of EUT:</b>	2.4GHz Frequency Hopping Spread Spectrum Parent Unit
<b>Serial Number:</b>	N/A
<b>Sample Receipt Date:</b>	August 19, 2010
<b>Date of Test:</b>	October 14-November 22, 2010
<b>Report Date:</b>	November 30, 2010
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%

# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0 Test Results Summary &amp; Statement of Compliance</b> .....	4
1.1 Summary of Test Results .....	4
1.2 Statement of Compliance .....	5
<b>2.0 General Description</b> .....	7
2.1 Product Description .....	7
2.2 Test Methodology .....	8
2.3 Test Facility .....	8
<b>3.0 System Test Configuration</b> .....	10
3.1 Justification .....	10
3.2 EUT Exercising Software .....	11
3.3 Details of EUT and Description of Accessories .....	12
3.4 Measurement Uncertainty .....	12
3.5 Equipment Modification .....	12
<b>4.0 Test Results</b> .....	14
4.1 Maximum Conducted Output Power at Antenna Terminals .....	14
4.2 Maximum 20 dB RF Bandwidth .....	15
4.3 Minimum Number of Hopping Frequencies .....	16
4.4 Minimum Hopping Channel Carrier Frequency Separation .....	17
4.5 Average Channel Occupancy Time .....	18
4.6 Out of Band Conducted Emissions .....	19
4.7 Field Strength Calculation .....	20
4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions .....	21
4.8.1 Radiated Emission Configuration Photograph .....	22
4.8.2 Radiated Emission Data .....	22
4.8.3 Transmitter Duty Cycle Calculation .....	23
4.9 Radiated Emissions from Receiver .....	28
4.9.1 Radiated Emission Configuration Photograph .....	28
4.9.2 Radiated Emission Data .....	28
4.10 AC Power Line Conducted Emission .....	30
4.10.1 AC Power Line Conducted Emission Configuration Photograph .....	30
4.10.2 AC Power Line Conducted Emission Data .....	30
4.11 Radio Frequency Radiation Exposure .....	37
4.12 Radio Frequency Exposure Compliance .....	37
<b>5.0 Equipment List</b> .....	39

## Appendix – Exhibits for Application of Certification

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 1**

### **TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE**

# INTERTEK TESTING SERVICES

---

## 1.0 Test Results Summary & Statement of Compliance

### 1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-210/ RSS-Gen#/ Section	Results	Details see section
Antenna Requirement	15.203	7.1.2 <sup>#</sup>	Pass	2.1
Max. Conducted Output Power	15.247(b)(1) & (4)	A8.4(2)	Pass	4.1
Max. 20dB RF Bandwidth	N/A	N/A	N/A	4.2
Min. No. of Hopping Frequencies	15.247(a)(1)(iii)	A8.1(d)	Pass	4.3
Min. Hopping Channel Carrier Frequency Separation	15.247(a)(1)	A8.1(b)	Pass	4.4
Average Time of Occupancy	15.247(a)(1)(iii)	A8.1(d)	Pass	4.5
Out of Band Antenna Conducted Emission	15.247(d)	A8.5	Pass	4.6
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d) & 15.109	2.2	Pass	4.8
Radiated Emission from Receiver	N/A	2.3	Pass	4.9
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4 <sup>#</sup>	Pass	4.10
Radio Frequency Radiation Exposure	15.247(i)	RSS-102	Pass	4.11 4.12

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

## **INTERTEK TESTING SERVICES**

---

---

### **1.2 Statement of Compliance**

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2009 Edition  
RSS-210 Issue 8, December 2010  
RSS-Gen Issue 3, December 2010  
RSS-102 Issue 4, March 2010

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 2**

### **GENERAL DESCRIPTION**

## INTERTEK TESTING SERVICES

---

### 2.0 General Description

#### 2.1 Product Description

The Equipment Under Test (EUT) is a 2.4GHz Frequency Hopping Spread Spectrum Parent Unit of Video Baby Monitor. It operates at frequency range of 2404.125MHz to 2464.875MHz, and it uses 19 channels in a clear RF environment and 16 channels in a RF interference environment. The EUT is powered by 3 x "AAA" size "Ni-MH" type rechargeable battery (1.2V 600mAh).

The antenna used in the EUT is integral, and the test sample is a prototype.

For FCC, the Model(s): AC1120 is the same as the Model: AC1100 in electronics/electrical designs, including software & firmware, PCB layout and construction design/physical design/enclosure. The only differences between these models are model number to be sold for marketing purpose.

For IC, the Model(s): AC1100-P and AC1120-P are the same as the Model: AC1100 in electronics/electrical designs, including software & firmware, PCB layout and construction design/physical design/enclosure. The only differences between these models are model number to be sold for marketing purpose.

The circuit description and frequency hopping algorithm are attached in the Appendix and saved with filename: descri.pdf.

## INTERTEK TESTING SERVICES

---

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). Preliminary radiated scans and all radiated measurements were performed in Open Area Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Justification Section"** of this Application. Antenna port conducted measurements were performed according to FCC Public Notice DA 00-705. All other measurements were made in accordance with the procedures in 47 CFR Part 2.

### 2.3 Test Facility

The open area test site, AC Power Line conducted measurement facility, and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data, and conductive data are at Roof Top, 2<sup>nd</sup> Floor, and 5<sup>th</sup> Floor respectively of Intertek Testing Services Hong Kong Ltd., which is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC and the Industry Canada.

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 3**

### **SYSTEM TEST CONFIGURATION**

## INTERTEK TESTING SERVICES

---

### 3.0 System Test Configuration

#### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a fully charged battery or with a charger.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the EUT attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

For transmitter radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz. The resolution bandwidth was 1 MHz for frequencies above 1000 MHz.

For receiver radiated measurement, the spectrum analyzer resolution bandwidth was 1MHz for measurement above 1GHz while 100kHz for measurement from 30MHz to 1GHz.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Receiver was performed from 30MHz to the fifth harmonic of the highest frequency or 40GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.109.

## INTERTEK TESTING SERVICES

---

### 3.1 Justification - Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data is included in this report.

### 3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## INTERTEK TESTING SERVICES

---

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

An AC adaptor and/or a battery (provided with the unit) were used to power the device. Their description are listed below.

- (1) Parent Battery: 3 x "AAA" size "Ni-MH" type rechargeable battery (1.2V 600mAh) (Supplied by Client)

#### Description of Accessories:

- (1) AC adaptor for a Charger (100-240VAC to 7.5VDC 0.5A, Model: T07505U002) (Supplied by Client)
- (2) Angelcare Baby Unit, Model: AC1100, FCC ID: N7TAC1100T (Supplied by Client)

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

### 3.5 Equipment Modification

Any modifications installed previous to testing by Angelcare Monitors Inc. will be incorporated in each production model sold/leased in the United States and Canada.

No modifications were installed by Commercial & Electrical Division, Intertek Testing Services Hong Kong Ltd.

## **INTERTEK TESTING SERVICES**

---

---

### **EXHIBIT 4**

### **TEST RESULTS**

# INTERTEK TESTING SERVICES

---

## 4.0 Test Results

### 4.1 Maximum Conducted Output Power at Antenna Terminals

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.
- The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW>20dB bandwidth and power was read directly in dBm. External attenuation and cable loss were compensated for using the OFFSET function of the analyser.

(Parent Unit) Antenna Gain = 0 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2404.125	14.78	30.06
Middle Channel: 2434.500	15.15	32.73
High Channel: 2464.875	15.12	32.51

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation:  included in OFFSET function  
 added to SA raw reading

dBm max. output level = 15.15 dBm

Limits:

- 0.125W (21dBm) for antennas with gains of 6dBi or less
- 0.25W (24dBm) for antennas with gains of 6dBi or less
- 1W (30dBm) for antennas with gains of 6dBi or less
- \_\_\_\_W (\_\_\_\_dBm) for antennas with gains more than 6dBi

The plots of conducted output power are attached in the Appendix and saved with filename: maxop.pdf

## INTERTEK TESTING SERVICES

---

### 4.2 Maximum 20 dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the display line.

Parent Unit	
Frequency (MHz)	20 dB Bandwidth (kHz)
Low Channel: 2404.125	3498
Middle Channel: 2434.500	3408
High Channel: 2464.875	3312

Limits

- ≤500kHz for 902-928MHz
- N/A for 2400-2483.5MHz
- ≤1MHz for 5725-5850MHz

The plots of 20dB RF bandwidth are attached in the Appendix and saved with filename: 20dB.pdf

## INTERTEK TESTING SERVICES

---

### 4.3 Minimum Number of Hopping Frequencies

With the analyzer set to MAX HOLD readings were taken for 2-3 minutes in each band. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

Parent Unit	
No. of hopping channels (traffic – in a RF interference environment)	16

#### Minimum Requirements:

- at least 50 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel < 250kHz)
- at least 25 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel  $\geq$  250kHz)
- at least 15 hopping channels for 2400MHz-2483.5MHz.
- at least 75 hopping channels for 5725MHz-5850MHz.

The plots of number of hopping frequencies are attached in the Appendix and saved with filename: chno.pdf

## INTERTEK TESTING SERVICES

---

### 4.4 Minimum Hopping Channel Carrier Frequency Separation

Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and met the requirement.

Parent Unit	
Channel Separation (Channel 9 and Channel 10)	3375

Limits:

The channel separation must be larger than:

- 25 kHz
- 20 dB bandwidth of hopping channel: \_\_\_\_Hz
- 2/3 of 20dB bandwidth of hopping channel: 2332 kHz

The plot(s) of hopping channel carrier frequency separation is attached in the Appendix and saved with filename: fsepa.pdf

## INTERTEK TESTING SERVICES

---

### 4.5 Average Channel Occupancy Time

The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 1ms, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

The SWEEP was then set to the time required by the regulation (20 seconds for 902-928 MHz devices, if the 20dB bandwidth is less than 250kHz, 10 seconds for 902-928 MHz if the 20dB bandwidth is or greater than 250kHz, “0.4 seconds x Number of hopping channels employed” seconds for 2400-2483.5 MHz, 30 seconds for 5725-5850 MHz). The analyzer was set to SINGLE SWEEP, the total ON time was added and compared against the limit (0.4 seconds).

Parent Unit	
Average Occupancy Time (Traffic – in a clear RF environment) =	0.220 ms x 350 = 77 ms

Limits:

Average 0.4 seconds maximum occupancy in:

- 7.6 seconds (0.4 sec. x 19) for 2400MHz-2483.5MHz  
(Traffic – in a clear RF environment)
- 20 seconds for 902MHz-928MHz  $\geq$  50 hopping channels
- 10 seconds for 902MHz-928MHz  $\geq$  25 hopping channels
- 30 seconds for 5725-5850MHz

The plots of average channel occupancy time are attached in the Appendix and saved with filename: avetime.pdf

## INTERTEK TESTING SERVICES

---

### 4.6 Out of Band Conducted Emissions

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

The plot(s) of bandedge compliance is shown the worst-case which has been already considered between enable and disable the hopping function of the EUT.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The plots of out of band conducted emissions are attached in the Appendix and saved with filenames: obantcon.pdf

## INTERTEK TESTING SERVICES

---

### 4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where      FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflects the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

## **INTERTEK TESTING SERVICES**

---

---

### **4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions**

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

## **INTERTEK TESTING SERVICES**

---

---

### **4.8.1 Radiated Emission Configuration Photograph**

Worst Case Restricted Band Radiated Emission  
at

Parent Unit: 204.000 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

### **4.8.2 Radiated Emission Data**

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Parent Unit: Passed by 7.3 dB margin

## INTERTEK TESTING SERVICES

---

---

### 4.8.3 Transmitter Duty Cycle Calculation

$$\begin{aligned}\text{Duty Cycle (DC)} &= (\text{Maximum ON time in 1.608 ms}) / (1.608 \text{ ms}) \\ &= 0.220 \text{ ms} / 1.608 \text{ ms}\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF)} &= 20 \log(\text{DC}) \\ &= 20 * \log (0.220 / 1.608) \\ &= -17.2 \text{ dB}\end{aligned}$$

The plot(s) shows the bit timing is attached in the Appendix and saved with filename: `dcc.pdf`

# INTERTEK TESTING SERVICES

---

---

Mode: TX-Channel 1

Table 1, Parent Unit

## Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4808.250</b>	<b>49.0</b>	<b>33</b>	<b>34.9</b>	<b>17.2</b>	<b>33.7</b>	<b>54.0</b>	<b>-20.3</b>
<b>H</b>	<b>12020.625</b>	<b>43.1</b>	<b>33</b>	<b>40.5</b>	<b>17.2</b>	<b>33.4</b>	<b>54.0</b>	<b>-20.6</b>
<b>H</b>	<b>19233.000</b>	<b>45.2</b>	<b>33</b>	<b>37.7</b>	<b>17.2</b>	<b>32.7</b>	<b>54.0</b>	<b>-21.3</b>

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4808.250</b>	<b>49.0</b>	<b>33</b>	<b>34.9</b>	<b>50.9</b>	<b>74.0</b>	<b>-23.1</b>
<b>H</b>	<b>12020.625</b>	<b>43.1</b>	<b>33</b>	<b>40.5</b>	<b>50.6</b>	<b>74.0</b>	<b>-23.4</b>
<b>H</b>	<b>19233.000</b>	<b>45.2</b>	<b>33</b>	<b>37.7</b>	<b>49.9</b>	<b>74.0</b>	<b>-24.1</b>

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

## INTERTEK TESTING SERVICES

---



---

Mode: TX-Channel 10

Table 2, Parent Unit

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2338.464</b>	<b>62.2</b>	<b>33</b>	<b>29.4</b>	<b>17.2</b>	<b>41.4</b>	<b>54.0</b>	<b>-12.6</b>
<b>H</b>	<b>4869.000</b>	<b>48.9</b>	<b>33</b>	<b>34.9</b>	<b>17.2</b>	<b>33.6</b>	<b>54.0</b>	<b>-20.4</b>
<b>H</b>	<b>7303.500</b>	<b>45.6</b>	<b>33</b>	<b>37.9</b>	<b>17.2</b>	<b>33.3</b>	<b>54.0</b>	<b>-20.7</b>
<b>H</b>	<b>12172.500</b>	<b>42.1</b>	<b>33</b>	<b>40.5</b>	<b>17.2</b>	<b>32.4</b>	<b>54.0</b>	<b>-21.6</b>
<b>H</b>	<b>19476.000</b>	<b>44.7</b>	<b>33</b>	<b>37.7</b>	<b>17.2</b>	<b>32.2</b>	<b>54.0</b>	<b>-21.8</b>

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2338.464</b>	<b>62.2</b>	<b>33</b>	<b>29.4</b>	<b>58.6</b>	<b>74.0</b>	<b>-15.4</b>
<b>H</b>	<b>4869.000</b>	<b>48.9</b>	<b>33</b>	<b>34.9</b>	<b>50.8</b>	<b>74.0</b>	<b>-23.2</b>
<b>H</b>	<b>7303.500</b>	<b>45.6</b>	<b>33</b>	<b>37.9</b>	<b>50.5</b>	<b>74.0</b>	<b>-23.5</b>
<b>H</b>	<b>12172.500</b>	<b>42.1</b>	<b>33</b>	<b>40.5</b>	<b>49.6</b>	<b>74.0</b>	<b>-24.4</b>
<b>H</b>	<b>19476.000</b>	<b>44.7</b>	<b>33</b>	<b>37.7</b>	<b>49.4</b>	<b>74.0</b>	<b>-24.6</b>

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

## INTERTEK TESTING SERVICES

---



---

Mode: TX-Channel 19

Table 3, Parent Unit

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	**2464.875	115.0	33	29.4	17.2	94.2	--	--
H	<b>2368.852</b>	<b>63.0</b>	<b>33</b>	<b>29.4</b>	<b>17.2</b>	<b>42.2</b>	<b>54.0</b>	<b>-11.8</b>
H	<b>4929.750</b>	<b>48.9</b>	<b>33</b>	<b>34.9</b>	<b>17.2</b>	<b>33.6</b>	<b>54.0</b>	<b>-20.4</b>
H	<b>7394.625</b>	<b>45.7</b>	<b>33</b>	<b>37.9</b>	<b>17.2</b>	<b>33.4</b>	<b>54.0</b>	<b>-20.6</b>
H	<b>12324.375</b>	<b>42.1</b>	<b>33</b>	<b>40.5</b>	<b>17.2</b>	<b>32.4</b>	<b>54.0</b>	<b>-21.6</b>
H	<b>19719.000</b>	<b>44.7</b>	<b>33</b>	<b>37.8</b>	<b>17.2</b>	<b>32.3</b>	<b>54.0</b>	<b>-21.7</b>

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	**2464.875	115.0	33	29.4	111.4	--	--
H	<b>2368.852</b>	<b>63.0</b>	<b>33</b>	<b>29.4</b>	<b>59.4</b>	<b>74.0</b>	<b>-14.6</b>
H	<b>4929.750</b>	<b>48.9</b>	<b>33</b>	<b>34.9</b>	<b>50.8</b>	<b>74.0</b>	<b>-23.2</b>
H	<b>7394.625</b>	<b>45.7</b>	<b>33</b>	<b>37.9</b>	<b>50.6</b>	<b>74.0</b>	<b>-23.4</b>
H	<b>12324.375</b>	<b>42.1</b>	<b>33</b>	<b>40.5</b>	<b>49.6</b>	<b>74.0</b>	<b>-24.4</b>
H	<b>19719.000</b>	<b>44.7</b>	<b>33</b>	<b>37.8</b>	<b>49.5</b>	<b>74.0</b>	<b>-24.5</b>

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

\*\* Fundamental emission was measured for determining band-edge compliance of using delta measurement technique. Peak level and average level at the upper bandedge were 58.0 dB $\mu$ V/m and 40.8 dB $\mu$ V/m respectively.

## INTERTEK TESTING SERVICES

---

Mode: Talk

Table 4, Parent Unit

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>V</b>	<b>120.000</b>	<b>35.4</b>	<b>16</b>	<b>14.0</b>	<b>33.4</b>	<b>43.5</b>	<b>-10.1</b>
<b>H</b>	<b>132.000</b>	<b>36.6</b>	<b>16</b>	<b>14.0</b>	<b>34.6</b>	<b>43.5</b>	<b>-8.9</b>
H	180.000	31.0	16	20.0	35.0	43.5	-8.5
H	204.000	36.2	16	16.0	36.2	43.5	-7.3
H	216.000	34.9	16	17.0	35.9	43.5	-7.6
<b>H</b>	<b>240.000</b>	<b>32.2</b>	<b>16</b>	<b>19.0</b>	<b>35.2</b>	<b>46.0</b>	<b>-10.8</b>
<b>H</b>	<b>264.000</b>	<b>29.5</b>	<b>16</b>	<b>21.0</b>	<b>34.5</b>	<b>46.0</b>	<b>-11.5</b>
H	312.000	26.9	16	23.0	33.9	46.0	-12.1
H	360.000	25.6	16	24.0	33.6	46.0	-12.4
<b>H</b>	<b>408.000</b>	<b>24.6</b>	<b>16</b>	<b>24.0</b>	<b>32.6</b>	<b>46.0</b>	<b>-13.4</b>

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

## **INTERTEK TESTING SERVICES**

---

---

### **4.9 Radiated Emissions from Receiver**

#### **4.9.1 Radiated Emission Configuration Photograph**

Worst Case Radiated Emission  
at

Parent Unit: 2430.000 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

#### **4.9.2 Radiated Emission Data**

The data in tables 5 list the significant emission frequencies, the limit and the margin of compliance.

Judgement –

Parent Unit: Passed by 13.1 dB margin

## INTERTEK TESTING SERVICES

---

Mode: Receiving – Middle Channel

Table 5, Parent Unit

### Radiated Emissions Data

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	2430.000	44.5	33	29.4	40.9	54.0	-13.1
V	4860.000	38.5	33	34.9	40.4	54.0	-13.6
V	7290.000	35.1	33	37.9	40.0	54.0	-14.0
V	9720.000	32.2	33	40.4	39.6	54.0	-14.4
V	12150.000	31.9	33	40.5	39.4	54.0	-14.6

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

## INTERTEK TESTING SERVICES

---

### 4.10 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line indirectly through a charger. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 4.10.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at

1.532 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf


#### 4.10.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 11.36 dB margin compare with quasi-peak limit

# INTERTEK TESTING SERVICES

## Worst Case: Hold Mode

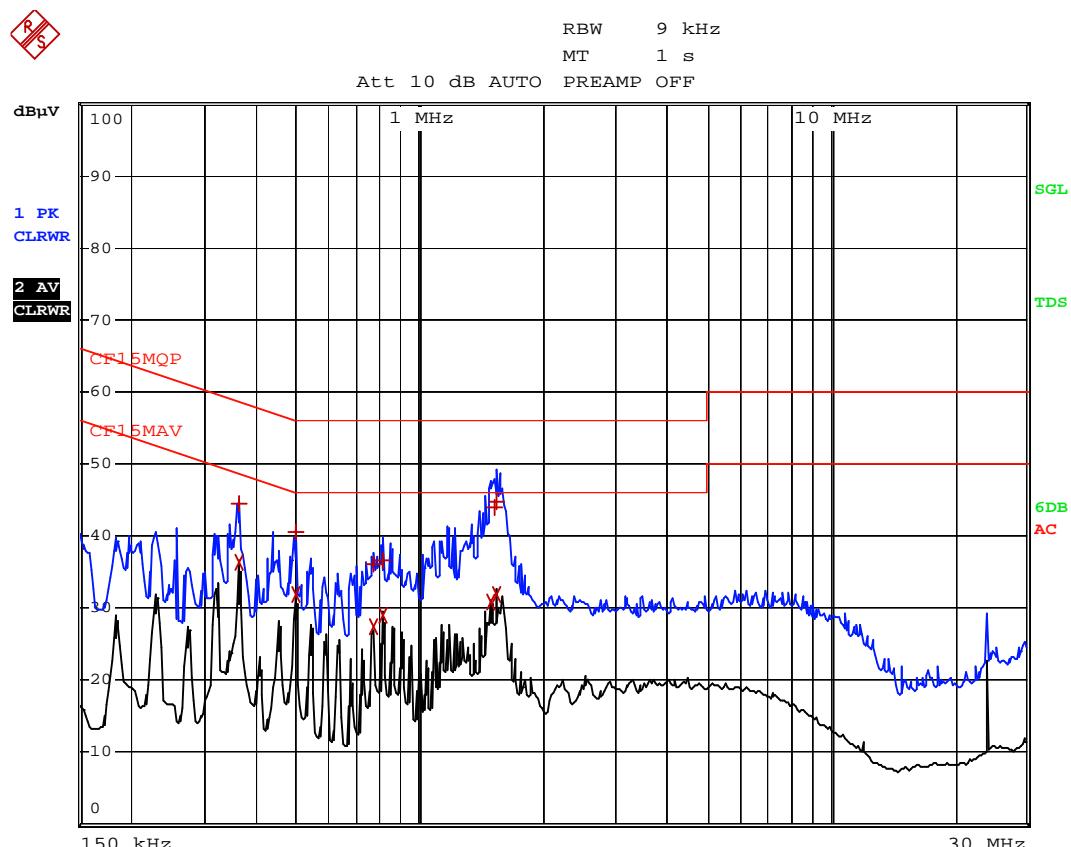

Date: 15.OCT.2010 00:14:34

# INTERTEK TESTING SERVICES

---


## Worst Case: Hold Mode

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dB $\mu$ V	DELTA	LIMIT dB	
1	Quasi Peak 361.5 kHz	44.60	N gnd	-14.09	
2	CISPR Average 361.5 kHz	36.32	L1 gnd	-12.37	
1	Quasi Peak 496.5 kHz	40.58	N gnd	-15.47	
2	CISPR Average 496.5 kHz	31.88	L1 gnd	-14.17	
1	Quasi Peak 771 kHz	36.00	N gnd	-19.99	
2	CISPR Average 771 kHz	27.49	L1 gnd	-18.50	
1	Quasi Peak 816 kHz	36.67	N gnd	-19.32	
2	CISPR Average 816 kHz	29.02	L1 gnd	-16.98	
2	CISPR Average 1.4955 MHz	30.82	L1 gnd	-15.17	
1	Quasi Peak 1.5225 MHz	44.02	L1 gnd	-11.97	
1	Quasi Peak 1.5315 MHz	44.63	L1 gnd	-11.36	
2	CISPR Average 1.5405 MHz	31.91	N gnd	-14.08	

Date: 15.OCT.2010 00:14:23

# INTERTEK TESTING SERVICES

## Worst Case: Alarm Mode with Vibration

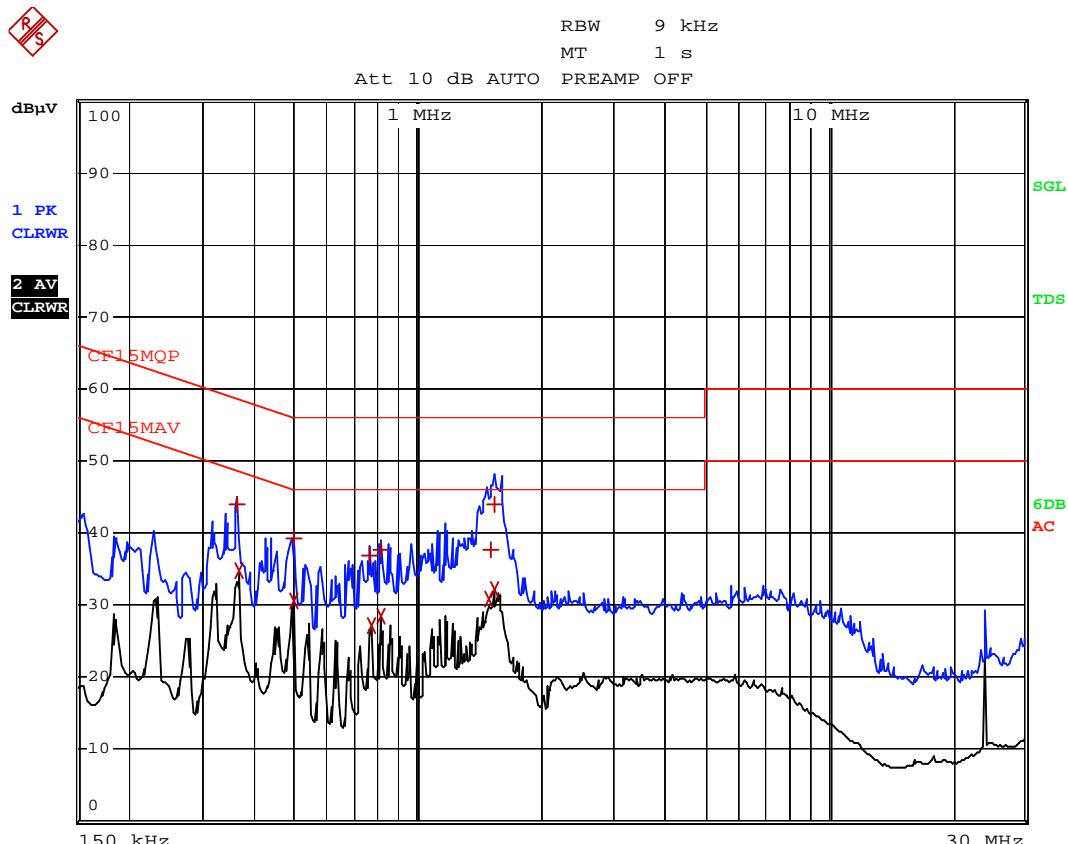

Date: 15.OCT.2010 00:19:27

# INTERTEK TESTING SERVICES

---


## Worst Case: Alarm Mode with Vibration

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dB $\mu$ V	DELTA	LIMIT dB	
1	Quasi Peak 361.5 kHz	43.85	N	gnd	-14.84
2	CISPR Average 366 kHz	34.82	L1	gnd	-13.76
1	Quasi Peak 496.5 kHz	39.29	N	gnd	-16.76
2	CISPR Average 496.5 kHz	30.60	L1	gnd	-15.45
1	Quasi Peak 766.5 kHz	36.97	N	gnd	-19.02
2	CISPR Average 771 kHz	27.23	L1	gnd	-18.76
1	Quasi Peak 811.5 kHz	37.53	N	gnd	-18.46
2	CISPR Average 816 kHz	28.42	L1	gnd	-17.57
2	CISPR Average 1.4955 MHz	30.72	L1	gnd	-15.27
1	Quasi Peak 1.5 MHz	37.70	L1	gnd	-18.29
1	Quasi Peak 1.5315 MHz	43.98	L1	gnd	-12.02
2	CISPR Average 1.536 MHz	32.20	L1	gnd	-13.80

Date: 15.OCT.2010 00:19:16

# INTERTEK TESTING SERVICES

## Worst Case: Rx Mode

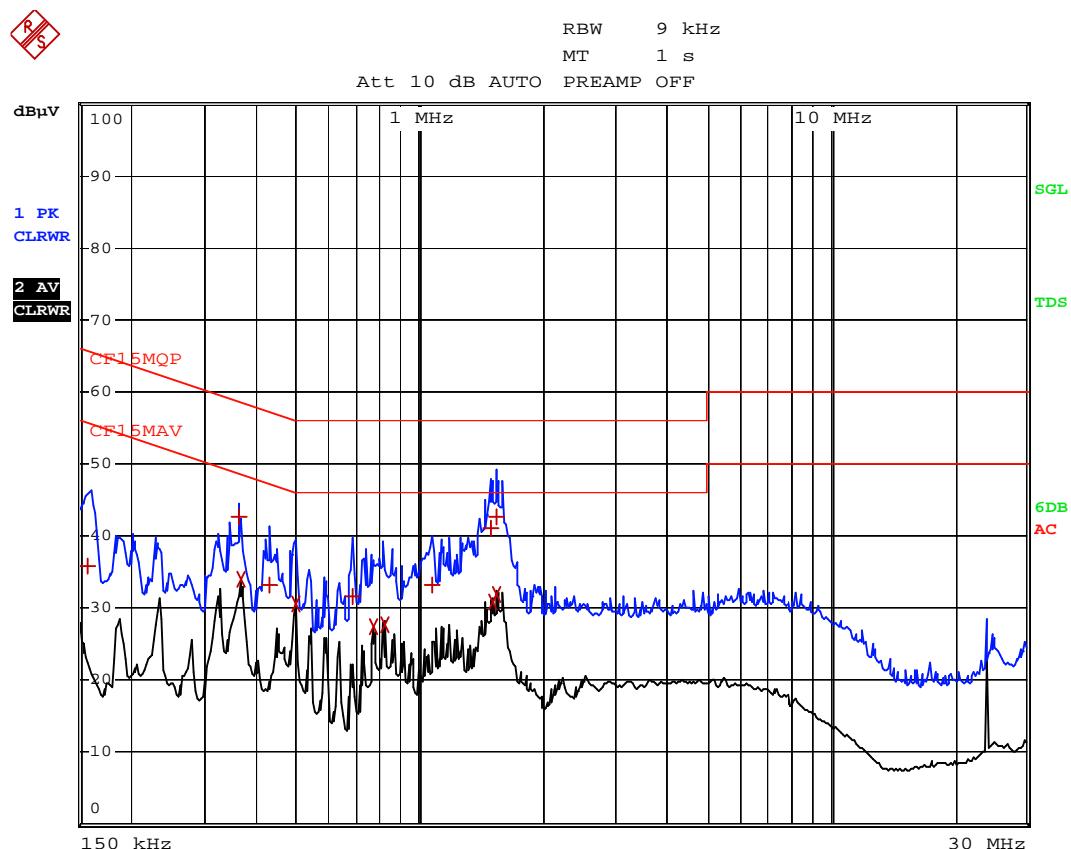

Date: 15.OCT.2010 00:09:49

# INTERTEK TESTING SERVICES

---

## Worst Case: Rx Mode

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dB $\mu$ V	DELTA	LIMIT dB	
1	Quasi Peak 159 kHz	35.92	N	gnd	-29.59
1	Quasi Peak 361.5 kHz	42.70	N	gnd	-15.98
2	CISPR Average 366 kHz	33.88	L1	gnd	-14.70
1	Quasi Peak 429 kHz	33.27	N	gnd	-23.99
2	CISPR Average 496.5 kHz	30.52	L1	gnd	-15.53
1	Quasi Peak 685.5 kHz	31.69	N	gnd	-24.31
2	CISPR Average 771 kHz	27.34	L1	gnd	-18.65
2	CISPR Average 820.5 kHz	27.61	L1	gnd	-18.38
1	Quasi Peak 1.077 MHz	33.32	N	gnd	-22.67
1	Quasi Peak 1.4955 MHz	41.15	L1	gnd	-14.84
2	CISPR Average 1.5 MHz	30.87	L1	gnd	-15.12
1	Quasi Peak 1.5315 MHz	42.66	L1	gnd	-13.33
2	CISPR Average 1.545 MHz	31.77	L1	gnd	-14.22

Date: 15.OCT.2010 00:09:40

## INTERTEK TESTING SERVICES

---

### 4.11 Radio Frequency Radiation Exposure

EUT is subject to the radio frequency exposure requirements specified in FCC Rule §§ 1.1307. It shall be considered to operate in a “general population / uncontrolled” environment.

- Output power is less than the applicable low threshold from SAR evaluation. The evaluation calculation results are saved as filename: RF exposure info.pdf
- EUT was evaluated for Maximum Permissible Exposure (MPE) evaluation compliance according to OET Bulletin 65 (Edition 97-01). The evaluation calculation results are attached in the Appendix and saved as filename: RF exposure info.pdf

### 4.12 Radio Frequency Exposure Compliance

The Routine RF Exposure Evaluation, Routine SAR Evaluation and Declaration of RF Exposure Compliance are saved as filename: RF exposure.pdf

---

---

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 5**  
**EQUIPMENT LIST**

# INTERTEK TESTING SERVICES

---

## 5.0 Equipment List

### 1) Radiated Emissions Test

Equipment	Biconical Antenna	Log Periodic Antenna	Double Ridged Guide Antenna	Digital Multimeter
Registration No.	EW-0954	EW-0446	EW-1015	EW-1237
Manufacturer	EMCO	EMCO	EMCO	FLUKE
Model No.	3104C	3146	3115	179
Calibration Date	Apr. 14, 2010	Apr. 26, 2010	Feb. 09, 2010	Sep. 01, 2010
Calibration Due Date	Apr. 14, 2011	Oct. 26, 2011	Aug. 09, 2011	Oct. 01, 2011

Equipment	EMI Test Receiver	Spectrum Analyzer	Broad-Band Horn Antenna
Registration No.	EW-2251	EW-2188	EW-1679
Manufacturer	R&S	AGILENTTECH	SCHWARZBECK
Model No.	ESCI	E4407B	BBHA9170
Calibration Date	Oct. 22, 2009	Dec. 25, 2009	Feb. 17, 2010
Calibration Due Date	Jan. 22, 2011	Dec. 31, 2010	Feb. 17, 2011

### 2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN	Pulse Limiter
Registration No.	EW-2500	EW-0090	EW-0698
Manufacturer	R&S	R&S	R&S
Model No.	ESCI	ESH3-Z5	ESH3-Z2
Calibration Date	Sep. 20, 2009	Feb. 05, 2010	Mar. 01, 2010
Calibration Due Date	Dec. 20, 2010	Feb. 05, 2011	Mar. 01, 2011

### 3) Conductive Measurement Test

Equipment	Spectrum Analyzer
Registration No.	EW-2466
Manufacturer	R&S
Model No.	FSP30
Calibration Date	Nov. 11, 2009
Calibration Due Date	Feb. 11, 2011

**END OF TEST REPORT**