

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5655
Tino.Pan@sgs.com

Report No.: SHEMO10040044202
Page 1 of 38

TEST REPORT

Application No. : SHEMO10040044202

Applicant: Kohler Co.

FCC ID: N82-KOHLER006

IC ID: 4554A-KOHLER006

Fundamental Frequency : 2405MHz to 2480MHz

Equipment Under Test (EUT):

Name: NUMI Integrated Toilet

Model No.: K-3900

Standards: FCC PART 15 SUBPART C, Section 15.247, ANSI 63.4: 2003, KDB 558074

RSS 210 issue 7, RSS GEN issue 2

Date of Receipt: Jun 1, 2010


Date of Test: Jun 1, 2010 to Jun 18, 2010

Date of Issue: June 19, 2010

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.


Approved by:

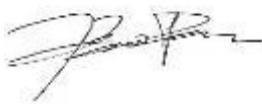

Tino Pan

E&E Section Manager

Tested By:

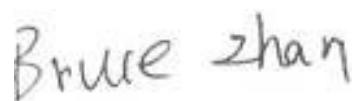

Bruce Zhan

EMC TEST Engineer

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Test Summary

The customer requested FCC tests for remote receiver 2.4GHz			
Test	Test Requirements	Test Methods	Result
AC Power Line Conducted Emission	FCC part 15 Section 15.207(a) RSS GEN Table 2	ANSI 63.4: 2003 RSS GEN	PASS
Peak Output Power	FCC part 15 Section 15.247(b)(3) RSS 210 A8.4	KDB 558074 RSS GEN	PASS
6dB Bandwidth	FCC part 15 Section 15.247(a)(2) RSS 210 A8.2	KDB 558074 RSS GEN	PASS
100KHz Bandwidth of Frequency Band Edges	FCC part 15 Section 15.247(d) RSS 210 A8.5	ANSI C63.4,2003 KDB 558074 RSS GEN	PASS
Spurious Emission	FCC part 15 Section 15.247(d) RSS 210 A8.5	ANSI C63.4,2003 KDB 558074 RSS GEN	PASS
Peak Power Density	FCC part 15 Section 15.247(e) RSS 210 A8.2	KDB 558074 RSS GEN	PASS
Antenna Requirement	FCC part 15 Section 15.203 RSS GEN issue 2	N/A	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION	4
4.2 DETAILS OF E.U.T	4
4.3 DESCRIPTION OF SUPPORT UNITS.....	5
4.4 TEST LOCATION	5
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	5
4.6 TEST FACILITY	5
5 TEST RESULTS	6
5.1 TEST INSTRUMENTS.....	6
5.2 E.U.T. OPERATION.....	7
5.3 TEST PROCEDURE & MEASUREMENT DATA	7
5.3.1 <i>Antenna Requirement</i>	7
5.3.2 <i>Conducted Emission Test</i>	9
5.3.3 <i>Peak Output Power Measurement</i>	12
5.3.4 <i>6dB Bandwidth</i>	16
5.3.5 <i>100KHz Bandwidth Of Band Edges Measuremnet</i>	20
5.3.6 <i>Spurious Radiated Emission Test</i>	24
5.3.7 <i>Peak Power Spectral Density</i>	34
5.4 RF EXPOSURE COMPLIANCE REQUIREMENT	38
5.4.1 <i>Standard requirement</i>	38
5.4.2 <i>EUT RF Exposure</i>	38

4 General Information

4.1 Client Information

Applicant : Kohler Co.
Applicant Address: 444 Highland Drive Kohler, WI 53044
Manufacturer: Shanghai KOHLER Electronics, Ltd.
Manufacturer Address: Building E, 18 Jindian Road, Pudong New area, Shanghai, the PRC

4.2 Details of E.U.T.

Name:	NUMI Integrated Toilet
Model No.:	K-3900
Power Supply:	120VAC 60Hz
Power Cord:	About 1.5m
Modulation type	DSSS
Antenna of Remote Receiver:	Integral Model:RMA-2R450G-A1
Operating Frequency Band:2200-2700MHz	
Frequency Range& Channel number	Gain:3.0dBi 1.2405 MHz 2.2410 MHz 3.2415 MHz 4.2420 MHz 5.2425 MHz 6.2430 MHz 7.2435 MHz 8.2440 MHz 9.2445 MHz 10.2450 MHz 11.2455 MHz 12.2460 MHz 13.2465 MHz 14.2470 MHz 15.2475 MHz 16.2480 MHz Test Channel Channel 1,9,16

4.3 Description of Support Units

None.

4.4 Test Location

Tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5655

4.5 Other Information Requested by the Customer

None.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2011-07-29.

- FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2012-03-17.

- Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2011-09-29.

- VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3172 and C-3514 respectively. Date of Registration: 2009-11-30. Date of Expiry: 2012-03-17.

5 Test Results

5.1 Test Instruments

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2010-6-4	2011-6-3
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2010-6-4	2011-6-3
3	Broadband Horn ANTENNA	SCHWARZBECK	BBHA9170	9168-313	2010-6-4	2011-6-3
4	Horn Antenna	Rohde & Schwarz	HF906	100284	2010-4-9	2011-4-8
5	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2010-6-4	2011-6-3
6	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2009-10-9	2010-10-8
7	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2003P	--	2009-10-15	2010-10-14
8	METER	FLUKE	17B	10560713	2009-9-16	2010-9-15
9	Thermo-Hygrometer	ZHICHEN	ZC1-2	01050033	2009-10-15	2010-10-14
10	High-low temperature cabinet	Shanghai YuanZhen	GW2050	--	2010-6-17	2011-6-16
11	DC power	KIKUSUI	PMC35-3	NF100260	2010-1-16	2011-1-15
12	Power meter	Rohde & Schwarz	NRP	101641	2010-5-4	2011-5-3
13	High pass Filter	FSCW	HP 12/2800- 5AA2	19A45-02	2010-4-11	2011-4-10
14	Low nosie amplifier	TESEQ	LNA6900	70133	2010-7-7	2011-7-6

5.2 E.U.T. Operation

Input voltage: AC 120V , 60Hz
Operating Environment:
Temperature: 20.0-25.0 °C
Humidity: 45-56 % RH
Atmospheric Pressure: 990-1018mbar
EUT Operation: The EUT has been tested under operating condition.

5.3 Test Procedure & Measurement Data

5.3.1 Antenna Requirement

Test Requirement: FCC 15.203
RSS GEN issue 2
Test Date: Jun 1,2010
Measurement Distance: 3m (Semi-Anechoic Chamber)
Requirements: An intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219 or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**FCC Rules
(Section 15.203)** Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.


The exception in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:

- The application (or intended use) of the EUT
- The installation requirements of the EUT
- The method by which the EUT will be marketed

Conclusion The directional gains of antenna remote transmitter/receiver used for transmitting is 2.5dBi/3.0dBi. The RF transmitter uses an integrated antenna without connector. Please refer to the following

picture.

Remote receiver

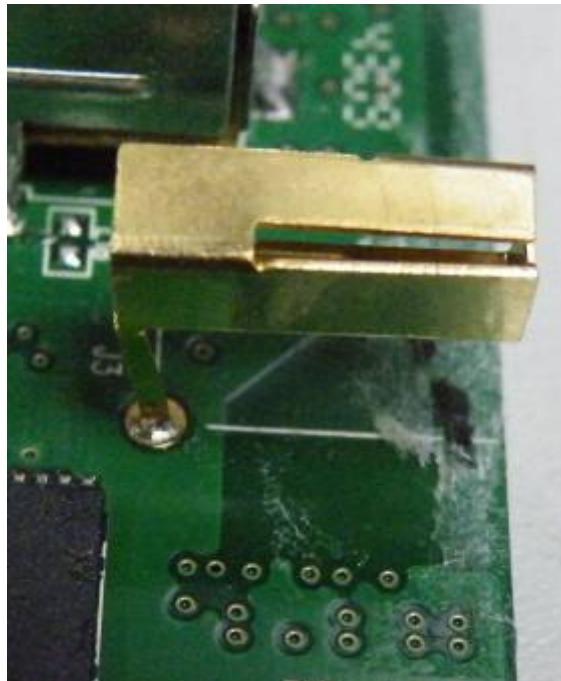

5.3.2 Conducted Emission Test

Test Requirement: FCC 15.207
Test Standard: RSS GEN Table 2

Test methods: ANSI 63.4: 2003

Test methods: ANSI 63.4. 2003

Test date: Jun 1, 2010

Standard Applicable: According to section 15.207, frequency 150KHz to 30MHz shall not exceed the limit table as below.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

EUT Setup: 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.

2. The AC/DC Power adaptor of EUT was plug-in LISN. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.


3. The LISN was connected with 120V AC/60Hz power source.

Measurement Result : Operation mode:Normal Link Mode

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 10 of 38


L line:

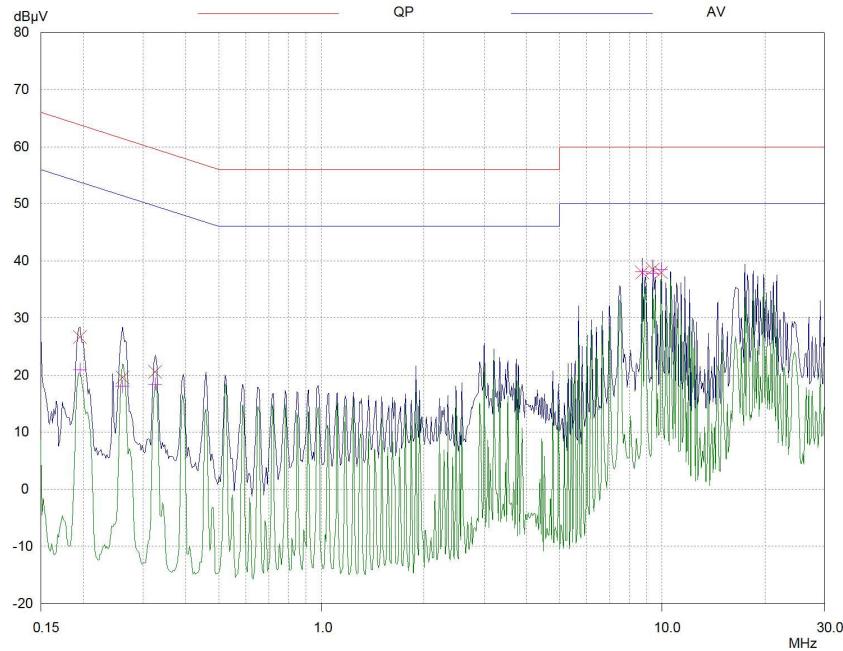

Frequency MHz	QP Level dB μ V	QP Limit dB μ V	QP Delta dB
0.19511	26.69	63.82	37.13
0.25993	19.60	61.43	41.83
0.3249	20.58	59.58	39.00
8.72896	37.94	60.00	22.06
9.37793	38.54	60.00	21.46
9.91587	37.93	60.00	22.07

Frequency MHz	AV Level dB μ V	AV Limit dB μ V	AV Delta dB
0.19511	20.98	53.82	32.84
0.25993	18.04	51.43	33.39
0.3249	18.39	49.58	31.19
8.72896	38.10	50.00	11.90
9.37793	37.83	50.00	12.17
9.91587	38.53	50.00	11.47

N Line:

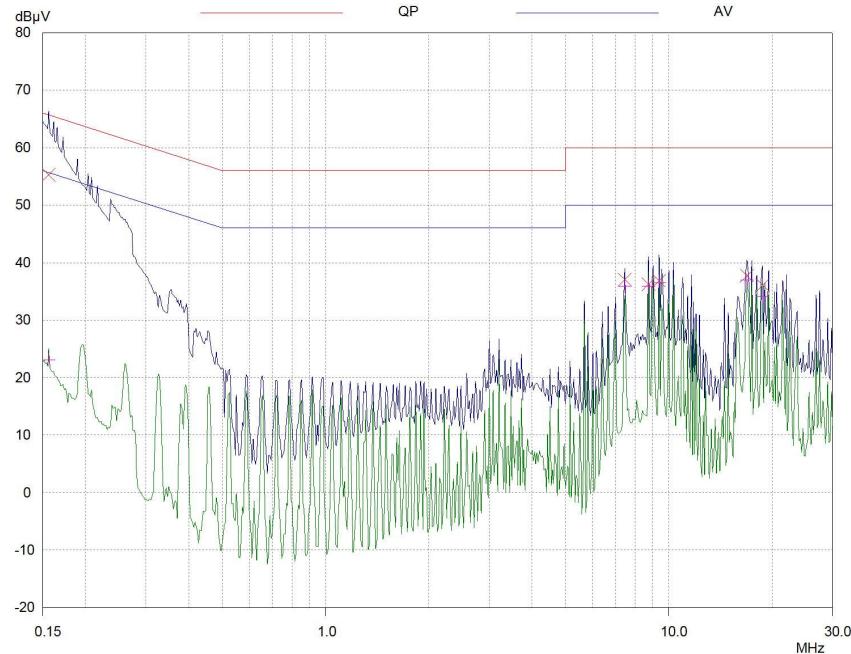

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB
0.15609	55.25	65.67	10.42
7.44306	37.09	60.00	22.91
8.72896	36.26	60.00	23.74
9.37793	36.86	60.00	23.14
16.91168	37.75	60.00	22.25
18.75744	36.10	60.00	23.90

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB
0.15609	23.08	55.67	32.59
7.44306	35.87	50.00	14.13
8.72896	35.93	50.00	14.07
9.37793	36.54	50.00	13.46
16.91168	36.96	50.00	13.04
18.75744	34.15	50.00	15.85

5.3.3 Peak Output Power Measurement

Test Requirement:	FCC 15.247(b)(3) RSS 210 A8.4
Test methods:	KDB 558074 RSS GEN
Test date:	June 8,2010
Standard Applicable:	<p>According to section 15.247(a)(2),(b)</p> <p>(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.</p> <p>(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>(c) Operation with directional antenna gains greater than 6 dBi.</p> <p>(1) Fixed point-to-point operation:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.</p>
Measuremet Producet:	<ol style="list-style-type: none">1. Place the EUT on the table and set it in transmitting mode.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

3. Record the max.reading
4. Repeat above procedures until all the frequency measured were complete.

Measurement Result:


Remote receiver:

CH	Frequency (MHz)	Reading Power(dBm)	Cable Loss (dB)	Resolution Bandwidth Corrector (dB)	Output Power (dBm)	Limit (dBm)	Result
Low	2405	-0.19	0.2	1.97	1.98	30	PASS
Middle	2445	-1.39	0.2	1.97	0.78	30	PASS
High	2480	-5.73	0.2	1.97	-3.56	30	PASS

Remote receiver:

Peak Power Output Data Plot


Channel Low

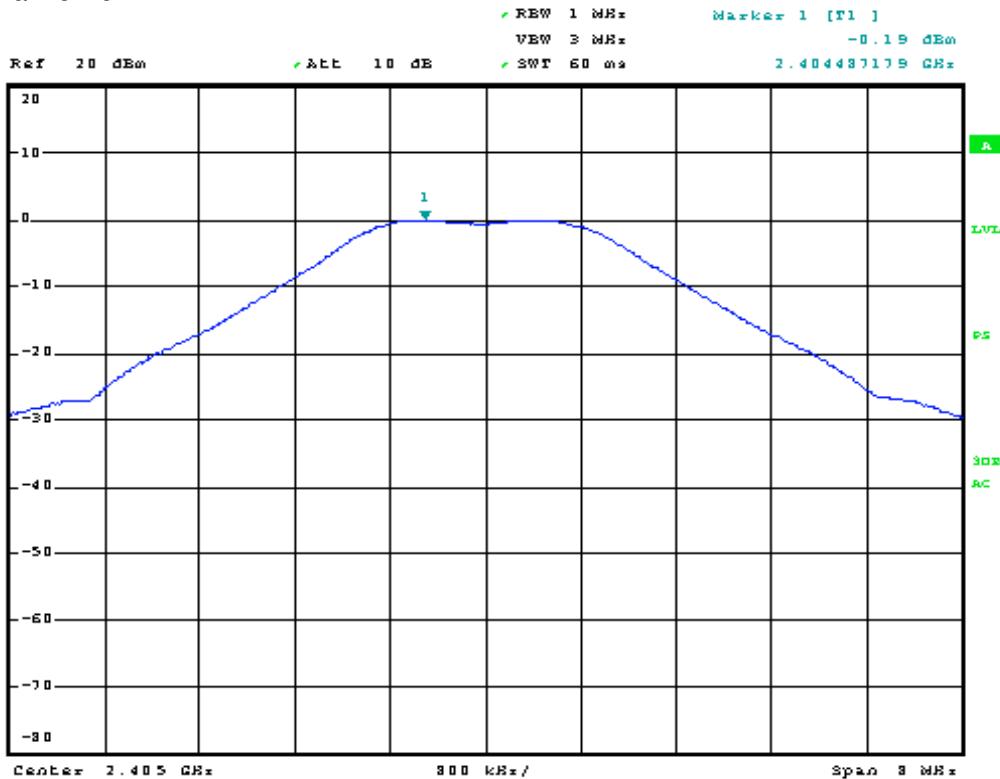

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 14 of 38

Channel Middle

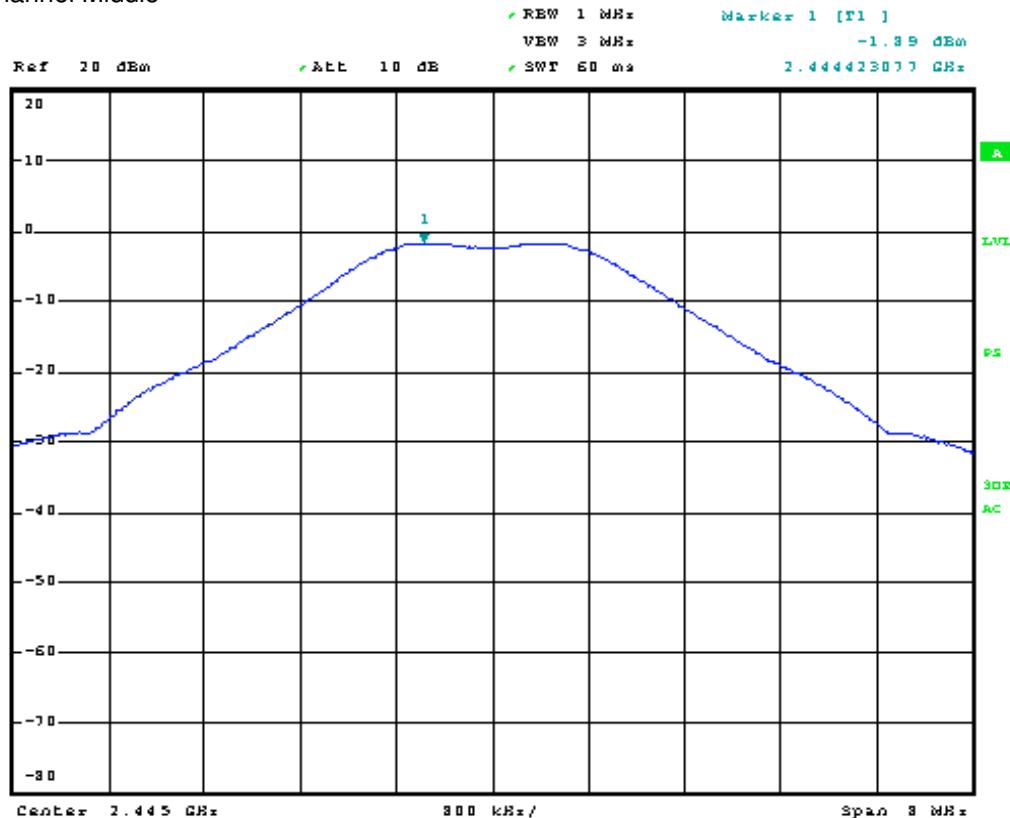


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 15 of 38

Channel High

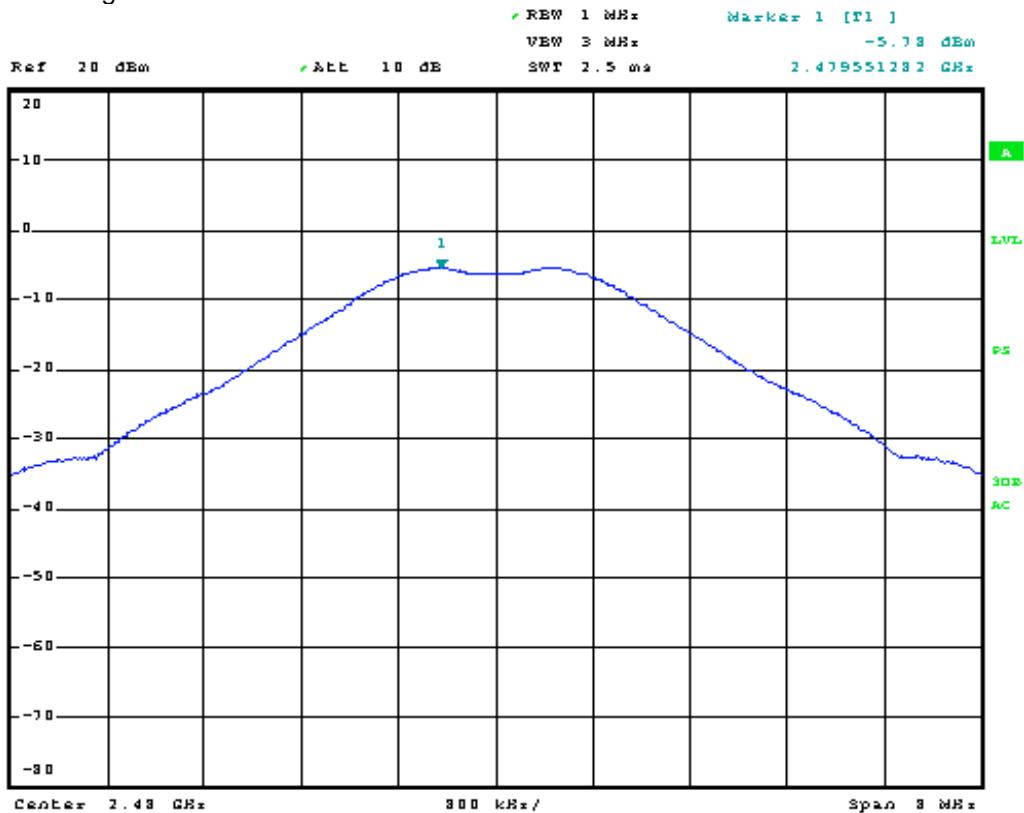

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

5.3.4 6dB Bandwidth

Test Requirement:	FCC 15.247(a)(2) RSS 210 A8.2
Test methods:	KDB 558074 RSS GEN
Test date:	June 7,2010
Standard Applicable:	According to section 15.247(a)(2),Systems using digital modulationg techniques may operate in the 902-928MHz,2400-2483.5MHz, and 5725-5850MHz bands.The minimum 6dB bandwidth shall be at least 500KHz.
Measurement Procedure:	<ol style="list-style-type: none">1. Place the EUT on the table and set it in transmitting mode.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.3. Set the spectrum analyzer as RBW=1% bandwidth, VBW =3* RBW, Span=30/ 50MHz, Sweep=auto4. Mark the peak frequency and -6dB (upper and lower) frequency.5. Repeat above procedures until all frequency measured were complete.

Measurement Result:


Remote receiver:

CH	Frequency (MHz)	Bandwidth (kHz)	Limit Bandwidth (KHz)	Result
Low	2405	1536.5	500	PASS
Middle	2445	1570.4	500	PASS
High	2480	1570.5	500	PASS

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 17 of 38

Remote receiver:
Test Data
Channel low

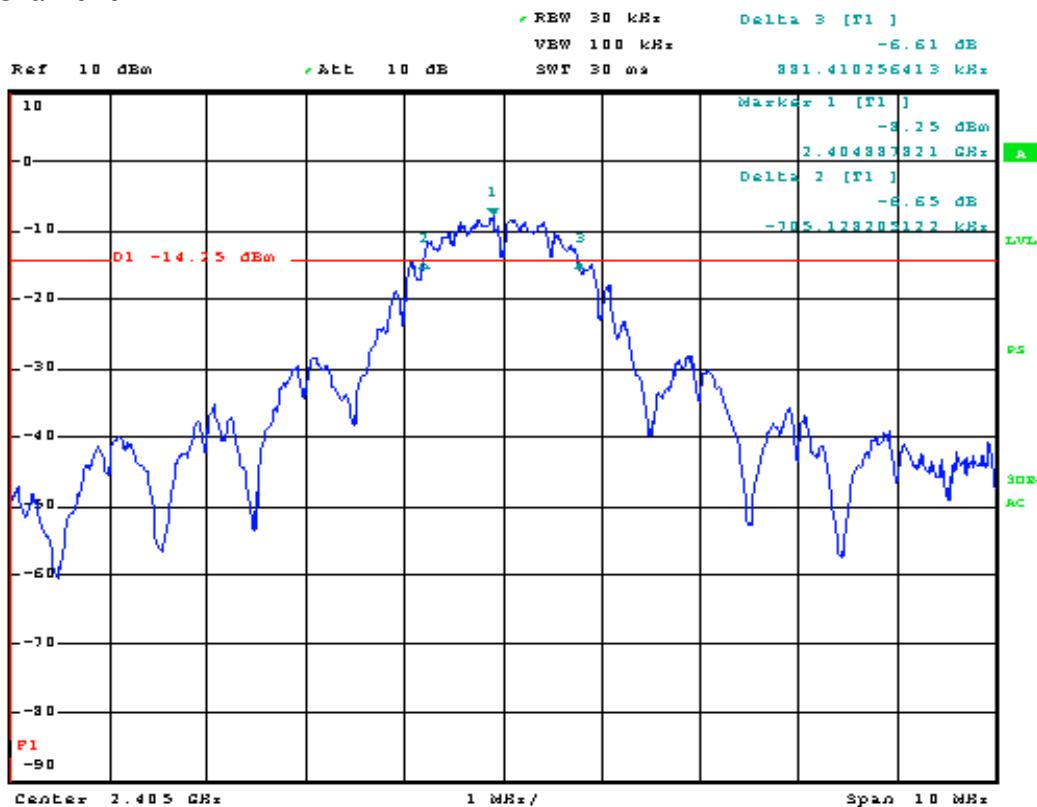


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 18 of 38

Channel middle

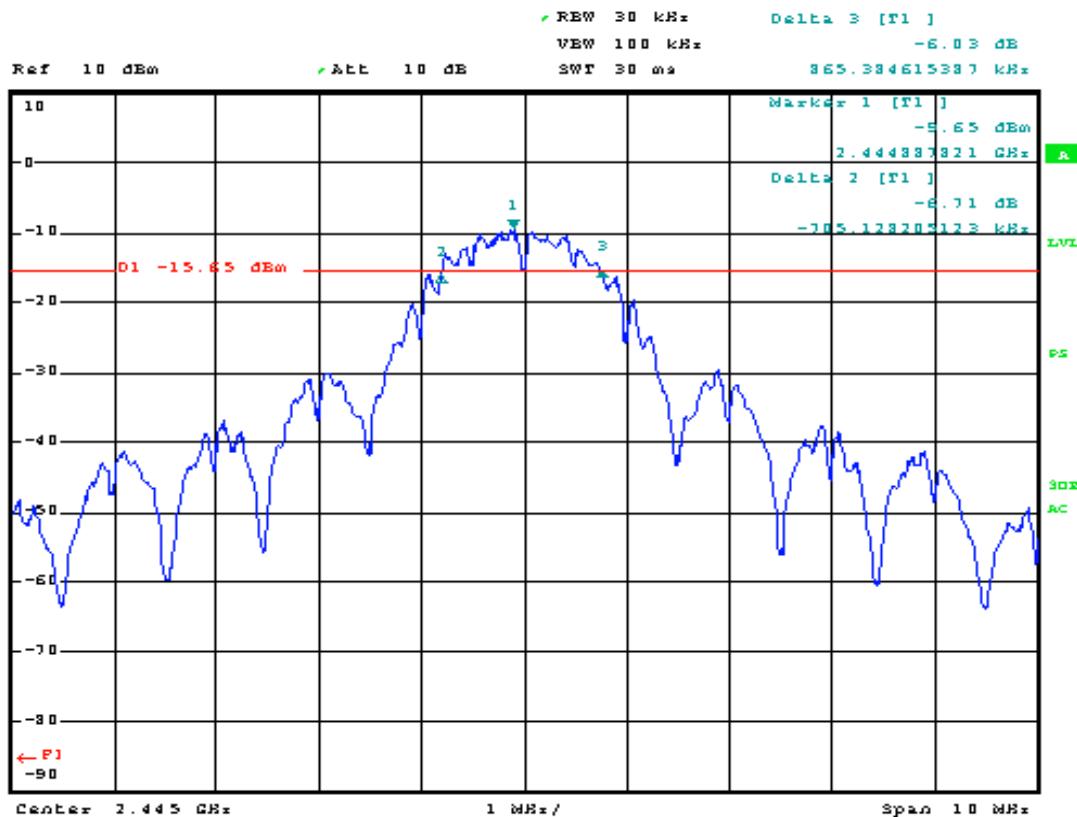


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 19 of 38

Channel high

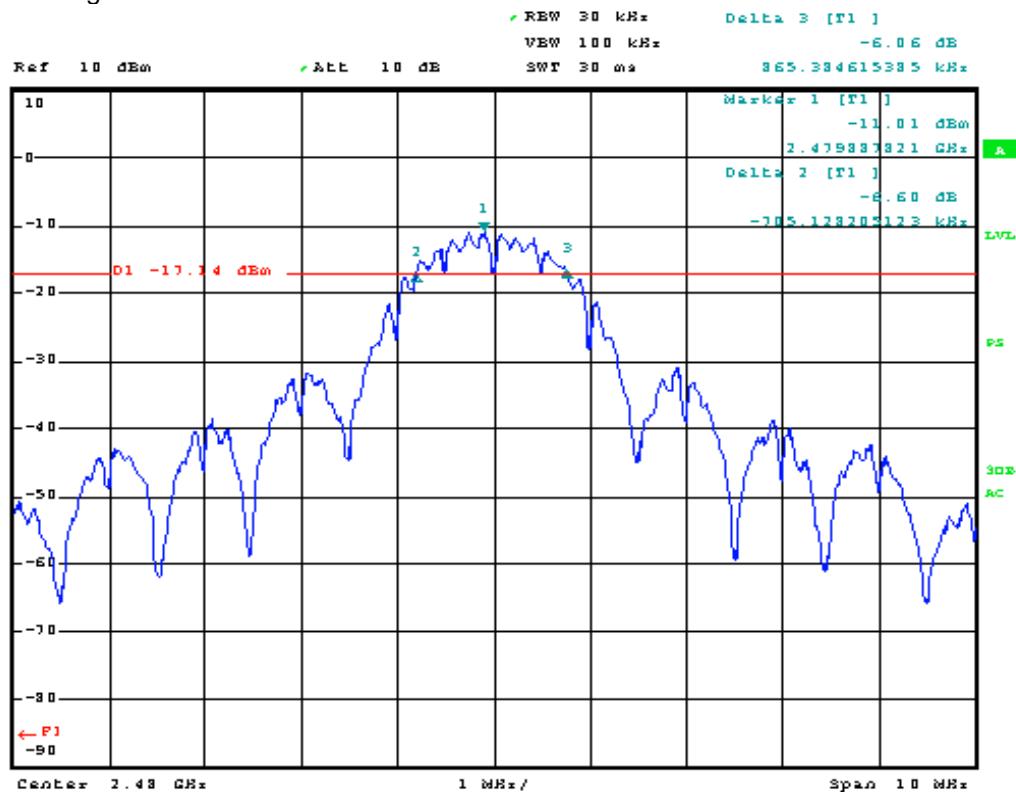


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

5.3.5 100KHz Bandwidth Of Band Edges Measuremnet

Test Requirement:	FCC 15.247(d) RSS 210 A8.5
Test methods:	ANSI C63.4,2003 KDB 558074 RSS GEN
Test date:	Jun 18,2010
Standard Applicable:	According to section 15.247(c),in any 100KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating,the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power,In addition,radiated emissions which fall in the restricted bands,as defined in section 15.205(a),must also comply with the radiated emission limits specified in 15.209(a).
Measurement Procedure:	<ol style="list-style-type: none">1. Place the EUT on the table and set it in transmitting mode.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.3. Set center frequency of spectrum analyzer = operating frequency.4. Set the spectrum analyzer as RBW=100KHz VBW=300KHz, Sweep = auto5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level. The turn table shall rotate 360 degrees to determine the position of maximum emission level.EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.6. Repeat above procedures until all frequency measured were complete.

Radiated Emission Test Set-up Frequency Over 1GHz

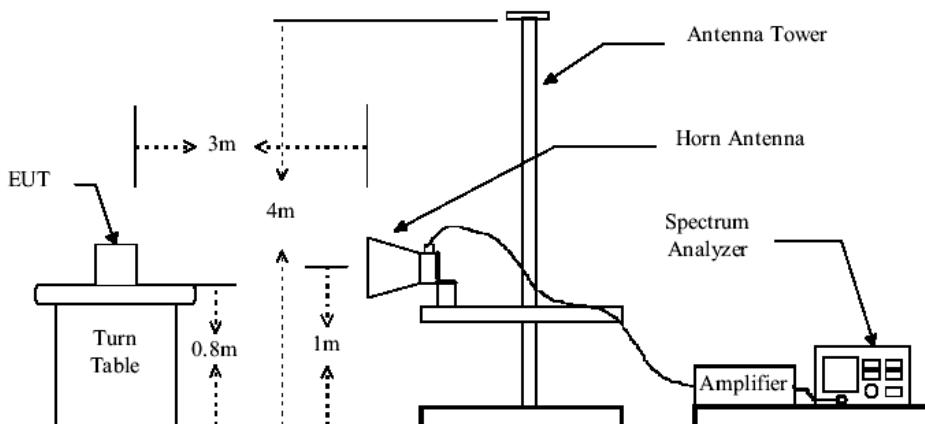


The field strength is calculated by adding the Antenna Factor, Cable Factor & preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – preamplifier Factor

Remote receiver

Band Edges Test Data CH-Low mode

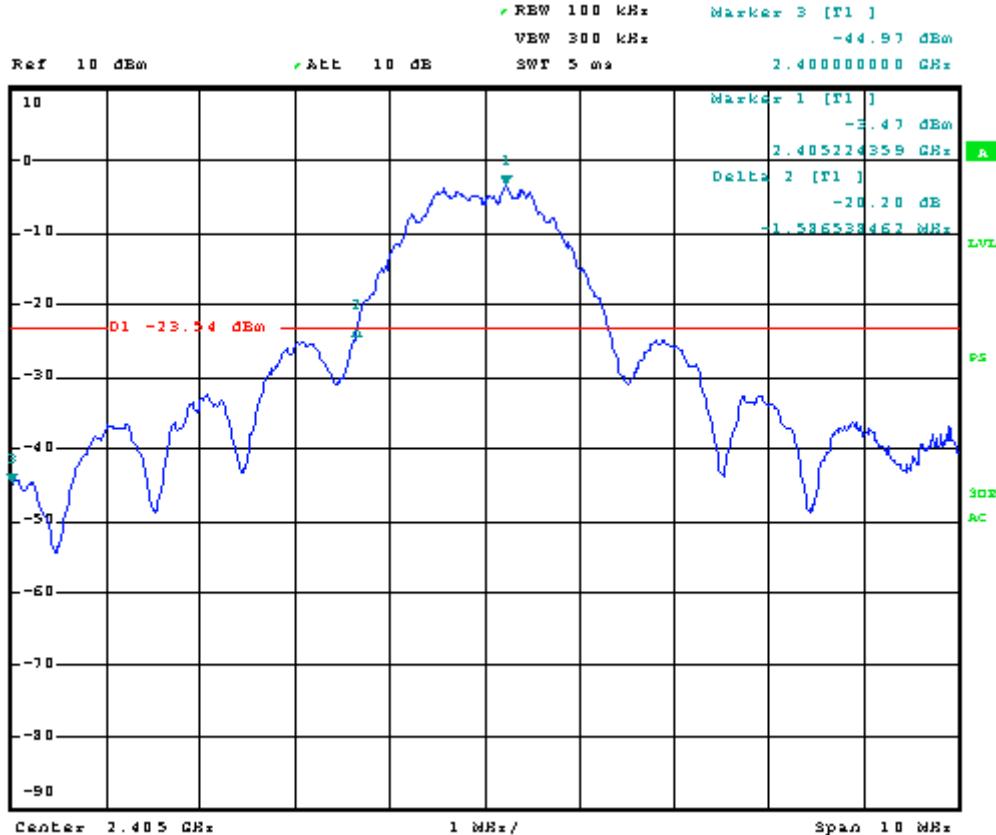

Band Edges Test Data CH-High mode

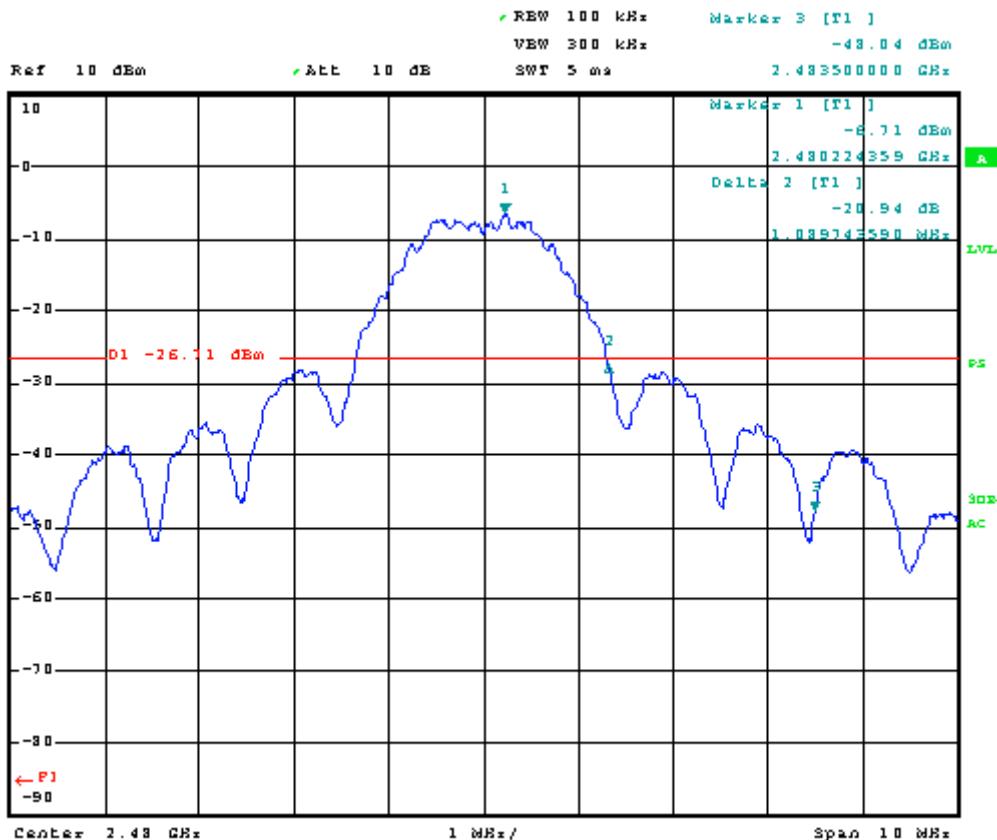

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 23 of 38

Remote receiver

CH Low

Horizontal:

Frequency (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB/m)	Peak Level (dBuV/m)	AV Level (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)
2390.00	35.50	30.09	-1.39	34.11	28.70	74.00	54.00
2483.50	43.30	29.80	-1.92	41.38	27.88	74.00	54.00

Vertical:

Frequency (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB/m)	Peak Level (dBuV/m)	AV Level (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)
2390.00	38.90	30.02	-1.39	37.51	28.63	74.00	54.00
2483.50	43.20	30.20	-1.92	41.28	28.28	74.00	54.00

CH High

Horizontal:

Frequency (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB/m)	Peak Level (dBuV/m)	AV Level (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)
2390.00	35.10	31.09	-1.39	33.71	29.70	74.00	54.00
2483.50	43.12	30.25	-1.92	41.20	28.31	74.00	54.00

Vertical:

Frequency (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Factor (dB/m)	Peak Level (dBuV/m)	AV Level (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)
2390.00	35.39	31.08	-1.39	34.00	29.69	74.00	54.00
2483.50	42.50	30.00	-1.92	40.58	28.61	74.00	54.00

Remark:

(1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 6dB below the permissible limits or the field strength is too small to be measured.


(2) Radiated emissions measured in the frequency above 1GHz were made with an instrument using Peak detector mode and average detector mode of the emission show in Actual FS colum. When measured Peak value is under AV Limit, It does not need to measure AV value again.

5.3.6 Spurious Radiated Emission Test


Test Requirement:	FCC part 15 Section 15.247(d) RSS 210 A8.5
Test methods:	ANSI C63.4,2003 KDB 558074 RSS GEN
Test date:	Jun 18,2010
Standard Applicable:	According to section 15.247(c),all other emissions outside these bands shall not exceed the general radiated emission limits specified in section15.209(a).And according to section 15.33(a)(1),for an intentional radiator operates below 10GHz,the frequency range of measurements:to the tenth harmonic of the highest fundamental frequency or to 40GHz,which is lower.
Measurement Procedure:	1. The EUT was placed on a turn table which is 0.8m above ground plane. 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level. 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions. 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance. 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. 6. Repeat above procedures until all frequency measured were complete.

Radiated Test Set-up:

Radiated Emission Test Set-up, Frequency Below 1000MHz

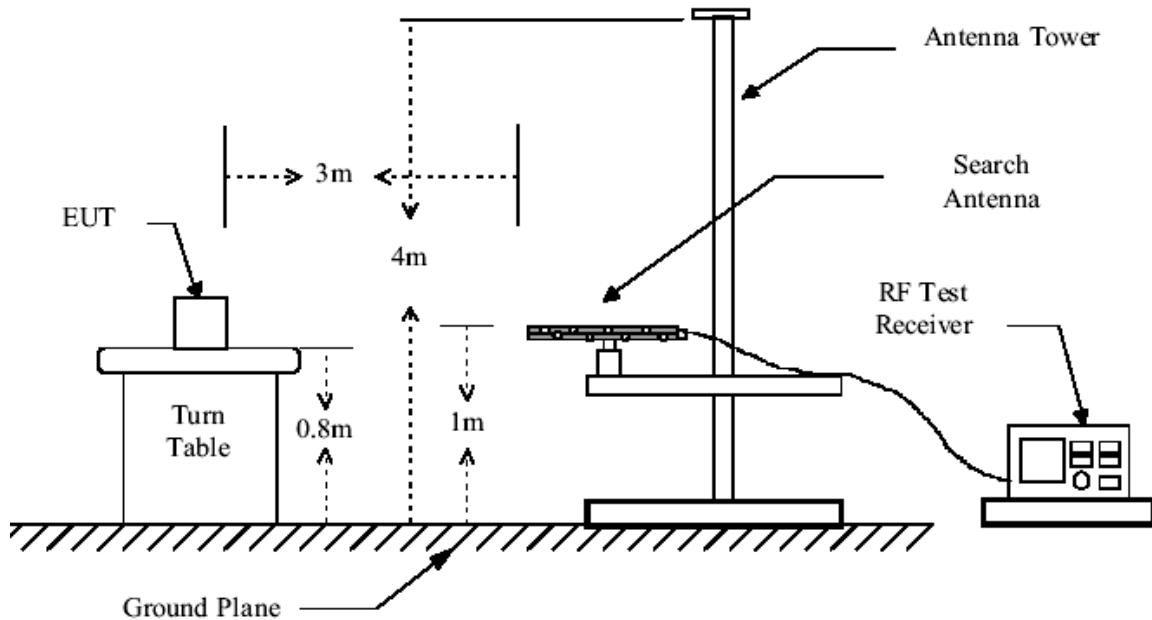

Radiated Emission Test Set-up Frequency Over 1GHz

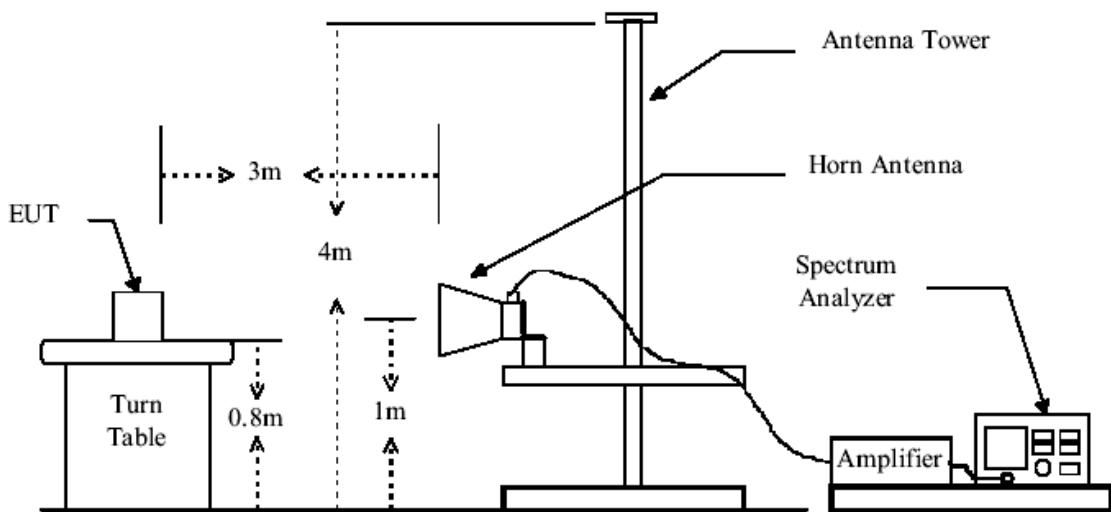

The field strength is calculated by adding the Antenna Factor, Cable Factor & preamplifier. The basic equation with a sample calculation is as follows:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – preamplifier Factor

Measurement Result:

Remote receiver


Conducted Spurious Emission Measurement

Ch Low

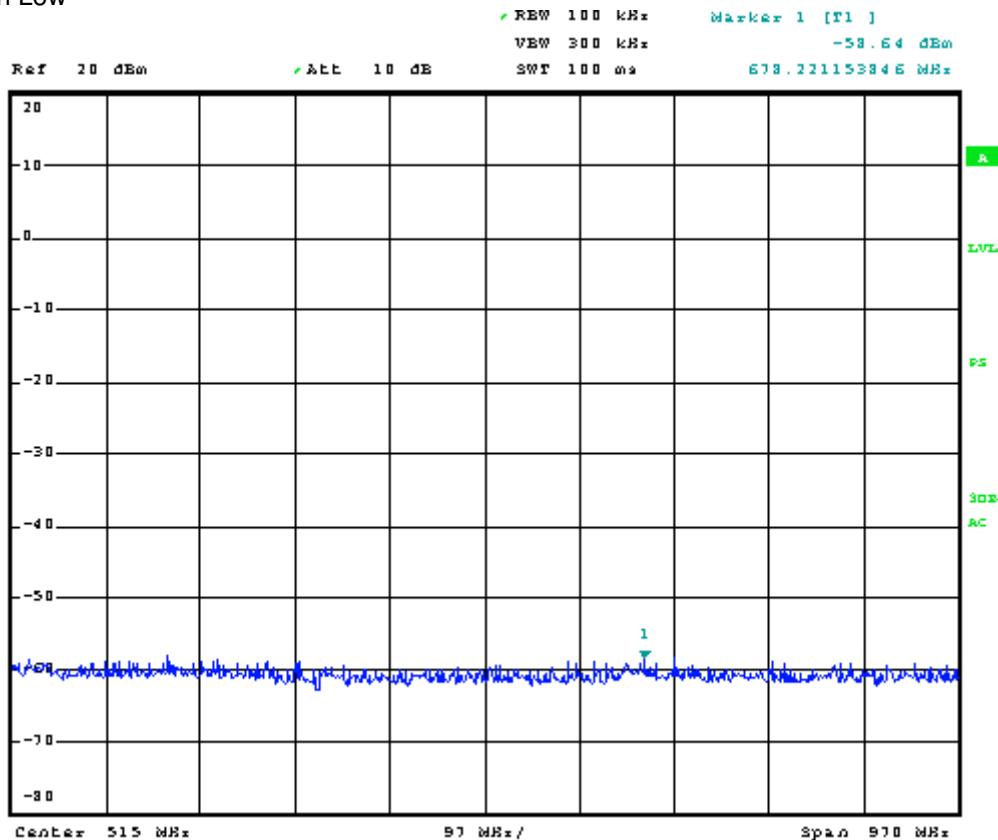

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 27 of 38

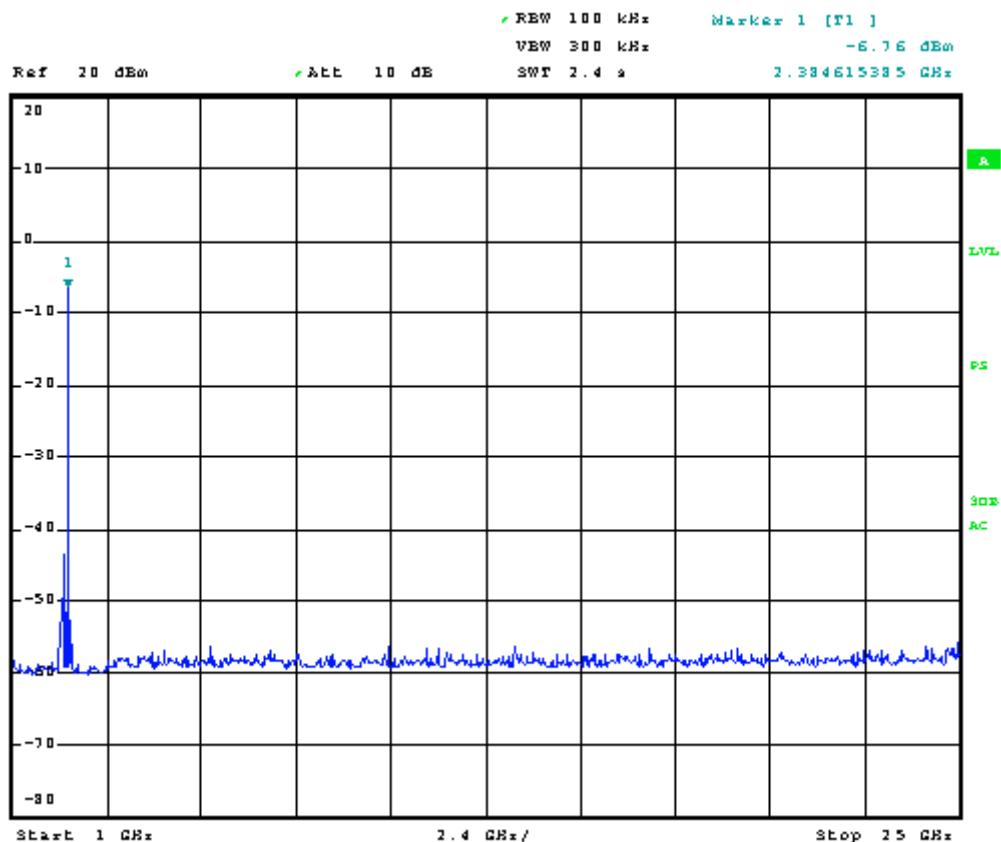


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 28 of 38


Ch Mid

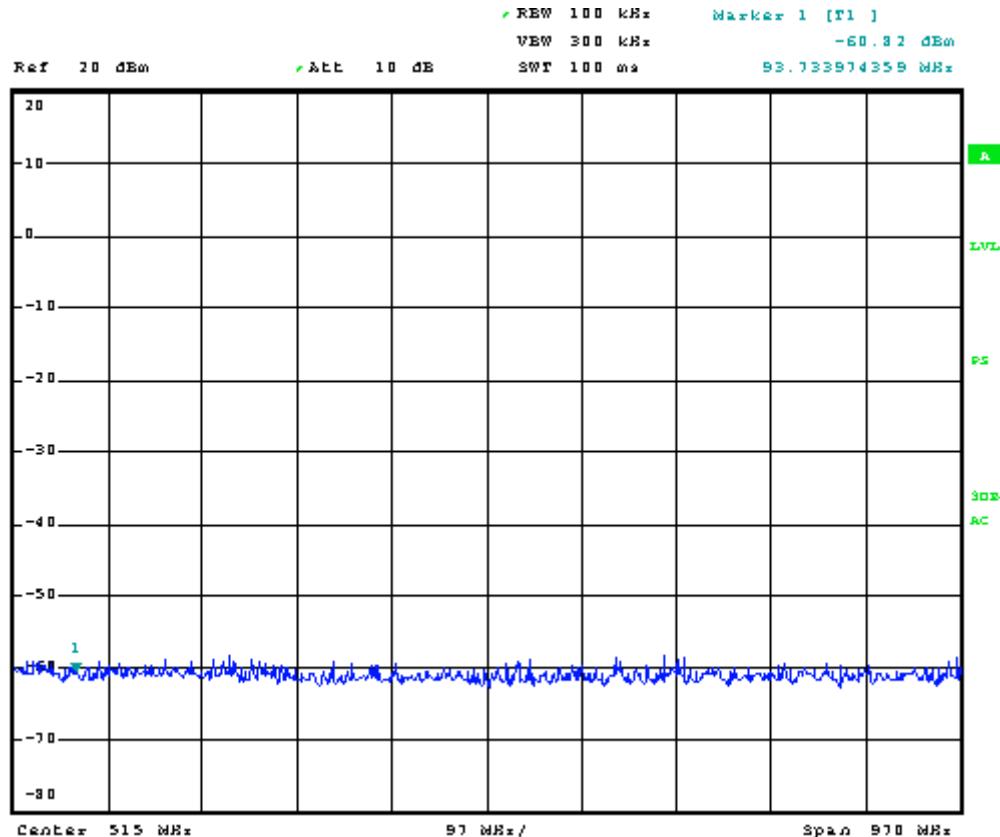

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 29 of 38

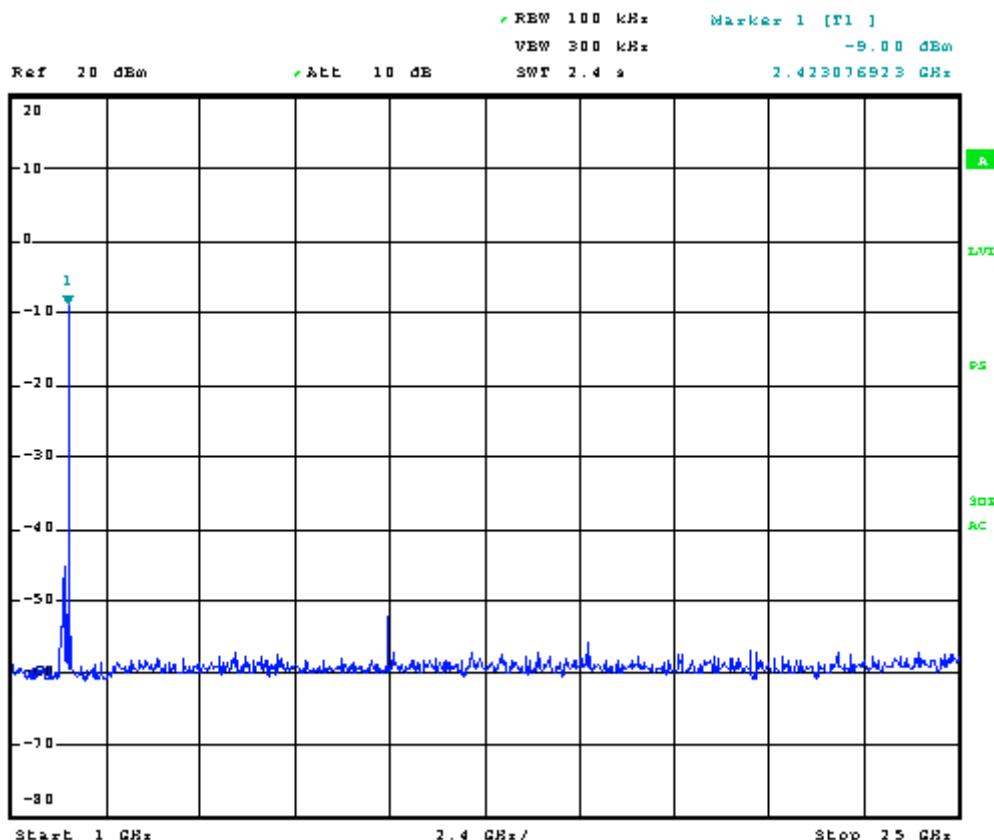


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 30 of 38


Ch High

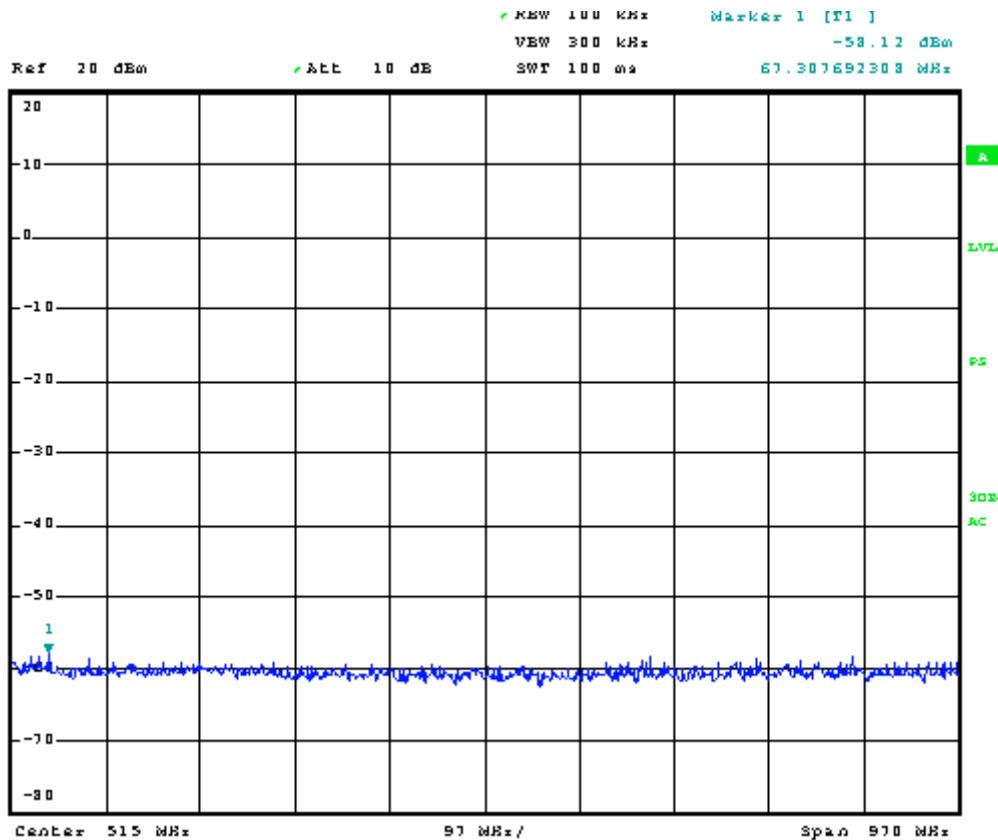

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 31 of 38

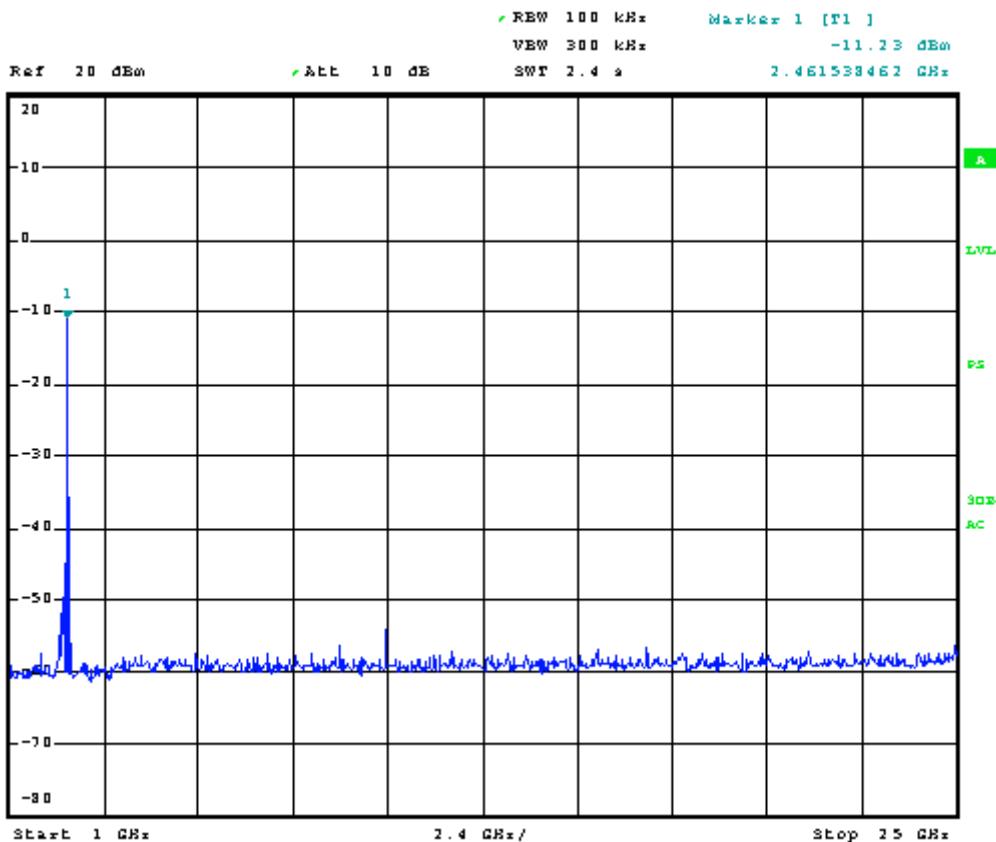

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Radiated Spurious Emission Quasi-Peak Measurement Result

Note:Final Test Level =Receiver Reading +Factor

Factor= Antenna Factor + Cable Factor-preamplifier Factor

Remote receiver

Operation Mode: CH Low

Frequency (MHz)	QP Reading Level (dBuV)	Factor (dB/m)	QP Level (dBuV/m)	QP Limit Line (dBuV/m)	Safe Margin (dB)	Ant.Pol (H/V)
408.00	42.5	-4.1	38.4	46.0	7.6	V
4810.00	58.1	-11.4	46.7	74.0	27.3	V
7215.00	48.0	-5.4	42.6	74.0	30.4	V
408.00	41.4	-4.1	37.3	46.0	8.7	H
4810.00	55.0	-11.4	43.6	74.0	30.4	H
7215.00	48.5	-5.4	43.1	74.0	29.9	H

Operation Mode: CH Mid

Frequency (MHz)	QP Reading Level (dBuV)	Factor (dB/m)	QP Level (dBuV/m)	QP Limit Line (dBuV/m)	Safe Margin (dB)	Ant.Pol (H/V)
408.00	42.8	-4.1	38.7	46.0	7.3	V
4890.00	57.6	-11.2	46.4	74.0	27.6	V
7335.00	48.2	-5.6	42.6	74.0	31.4	V
408.00	42.0	-4.1	37.9	46.0	8.1	H
4890.00	57.8	-11.2	46.6	74.0	27.4	H
7335.00	47.5	-5.6	41.9	74.0	32.1	H

Operation Mode: CH High

Frequency (MHz)	QP Reading Level (dBuV)	Factor (dB/m)	QP Level (dBuV/m)	QP Limit Line (dBuV/m)	Safe Margin (dB)	Ant.Pol (H/V)
408.00	42.8	-4.1	38.7	46.0	7.3	V
4960.00	57.3	-10.9	46.4	74.0	27.6	V
7350.00	49.3	-5.5	43.8	74.0	30.2	V
408.00	41.6	-4.1	37.5	46.0	8.5	H
4960.00	58.2	-10.9	47.3	74.0	26.7	H

7440.00	50.0	-5.5	44.5	74.0	29.6	H
---------	------	------	------	------	------	---

Note:

1. Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range show"-"-in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.
4. Final Test Level =Receiver Reading +Factor
Factor= Antenna Factor + Cable Factor – preamplifier Factor

5.3.7 Peak Power Spectral Density

Test Requirement:	FCC 15.247(e) RSS 210 A8.2
Test methods:	KDB 558074 RSS GEN
Test date:	Jun 7,2010
Standard Applicable:	According to section 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dB in any 3KHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph(b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Measurement Procedure:	<ol style="list-style-type: none">1. Place the EUT on the table and set it in transmitting mode.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.3. Record the max. reading.4. Repeat above procedures until all frequency measured were complete.

Measurement Result:

Remote receiver


Test Results

CH	Frequency (MHz)	RF Power Density Reading (MHz)	Cable loss (dB)	RF Power Density Level(dBm)	Max Limit (dbm)
LOW	2405	-16.21	0.2	-16.01	8
MID	2445	-17.36	0.2	-17.16	8
HIGH	2480	-19.46	0.2	-19.26	8

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 35 of 38

Remote receiver
Channel low

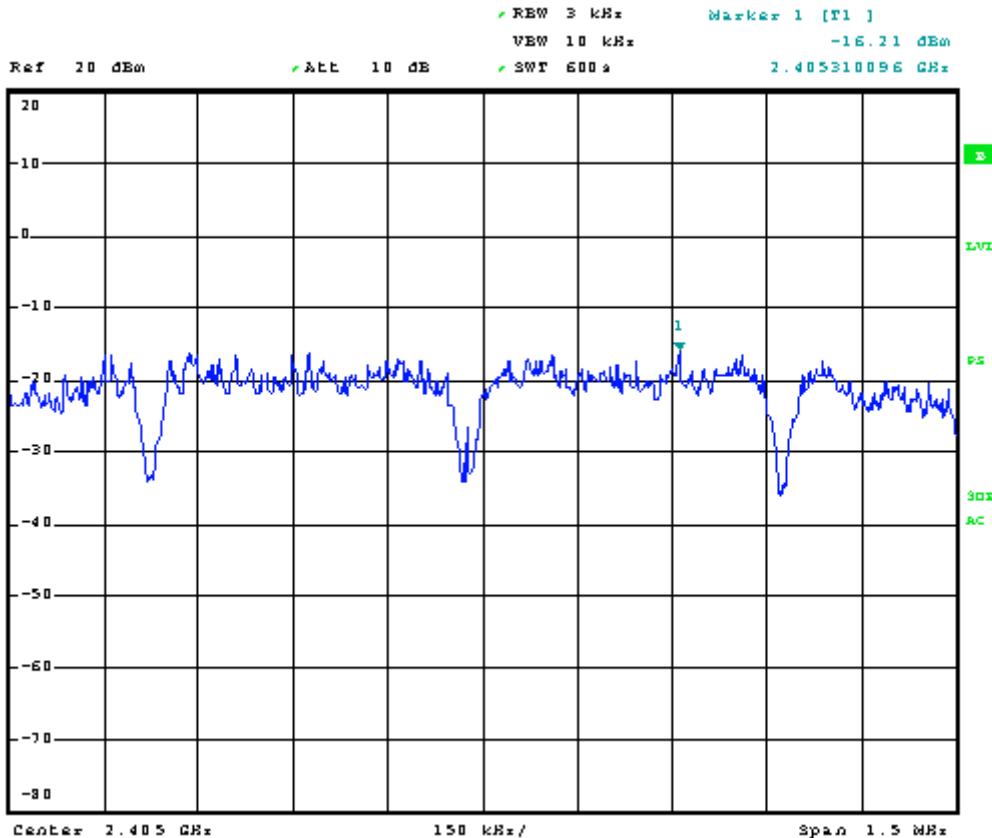


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 36 of 38

Channel middle

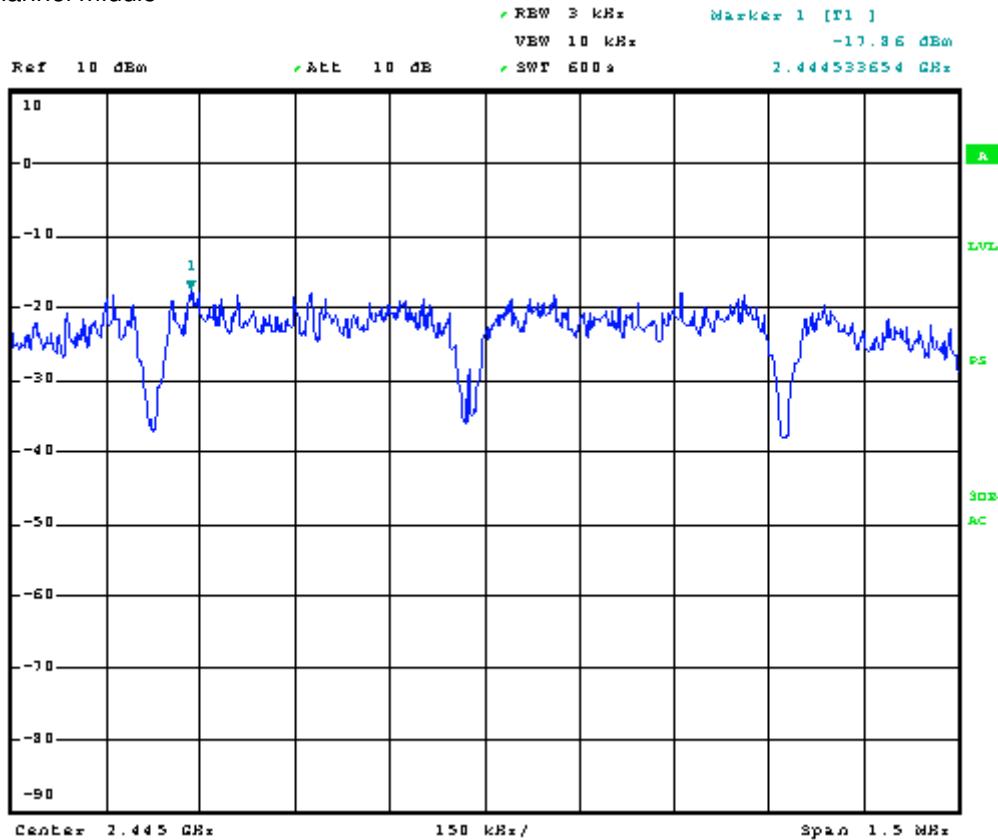


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEMO10040044202
Page: 37 of 38

Channel high

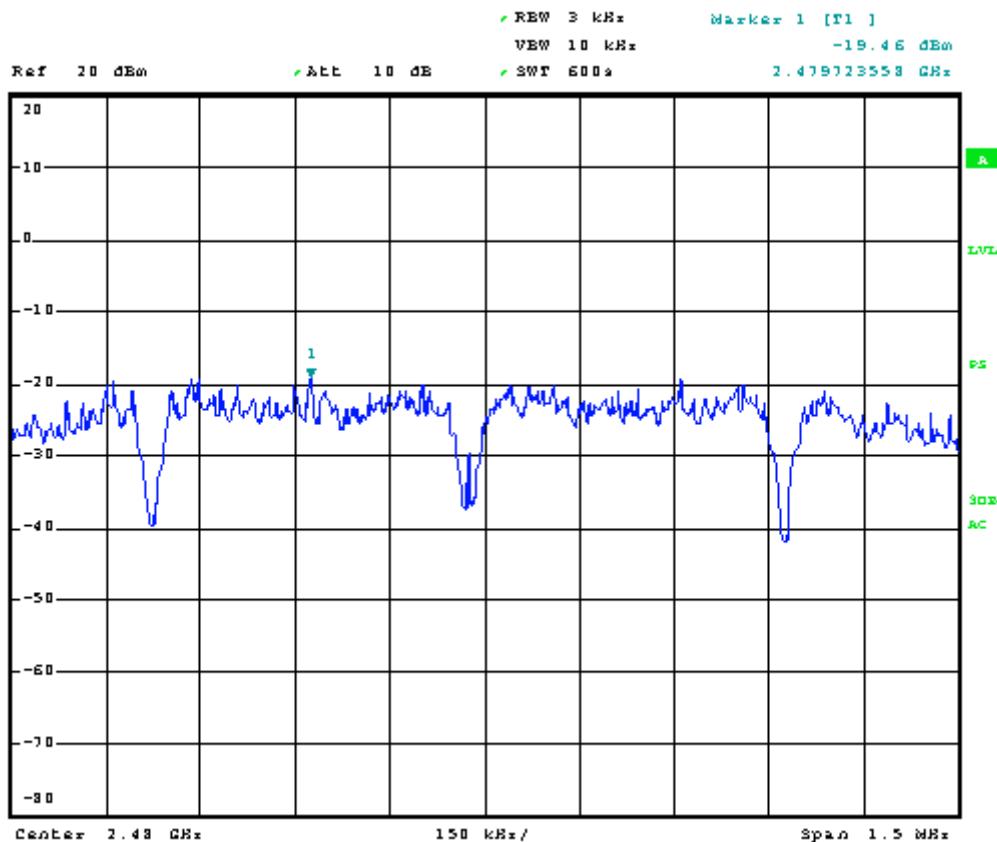

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

5.4 RF Exposure Compliance Requirement

5.4.1 Standard requirement

FCC15.247(b)(4)/RSS 102 requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section. if transmitting antennas of directional gain greater than 6 dBi are used. the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1). (b)(2). and (b)(3) of this section. as appropriate. by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TCB Exclusion List (11/10/2009)

Exposure category	low threshold	high threshold
general population	(60/fGHz) mW. (120/fGHz) mW.	(900/[fGHz] ^{-0.5}) mW.
occupational	(375/fGHz) mW. (900/fGHz) mW.	(2250/[fGHz] ^{-0.5}) mW.

5.4.2 EUT RF Exposure

The Max remote receiver Conducted Peak Output Power is 0.01dBm(1.00mW)
remote receiver: Antenna Gain(dBi)=3.0 dBi

According to the formula. calculate the EIRP test result:

remote receiver: $EIRP = P \times G = 3.01\text{dBm}$ ①

SAR requirement:

Low threshold= $60 / f(\text{GHz}) = 60/2.450 = 24.5 \text{ mW} = 13.89\text{dBm}$ ② ;

① < ②.

So the SAR report is not required.