

RF TEST REPORT



Report No.: 14020873-FCC-R1-V1

Supersede Report No.: N/A

Applicant	Kohler Co.	
Product Name	Kohler DTV Plus Amplifier	
Model No.	K-99696-NA	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2009	
Test Date	October 10 to October 20, 2014	
Issue Date	October 27, 2014	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification	☒	
Equipment did not comply with the specification	☐	
		
Deon Dai Test Engineer	Alex Liu Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China

Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	14020873-FCC-R1-V1
Page	3 of 53

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION.....	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 RF EXPOSURE	8
6.2 ANTENNA REQUIREMENT	9
6.3 CHANNEL SEPARATION.....	10
6.4 20DB BANDWIDTH	14
6.5 PEAK OUTPUT POWER	18
6.6 NUMBER OF HOPPING CHANNEL.....	22
6.7 TIME OF OCCUPANCY (DWEEL TIME)	24
6.8 BAND EDGE	28
6.9 AC POWER LINE CONDUCTED EMISSIONS.....	33
6.10 RADIATED SPURIOUS EMISSIONS	36
ANNEX A. TEST INSTRUMENT	40
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	41
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	49
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	52
ANNEX E. DECLARATION OF SIMILARITY	53

Test Report No.	14020873-FCC-R1-V1
Page	5 of 53

1. Report Revision History

Report No.	Report Version	Description	Issue Date
14020873-FCC-R1-V1	NONE	Original	October 27, 2014

2. Customer information

Applicant Name	Kohler Co.
Applicant Add	444 Highland Drive Kohler, WI 53044 United Status
Manufacturer	Dayton Audio
Manufacturer Add	705 Pleasant Valley Drive Springboro, Ohio 45066

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

4. Equipment under Test (EUT) Information

Description of EUT:	Kohler DTV Plus Amplifier
Main Model:	K-99696-NA
Serial Model:	N/A
Date EUT received:	August 28, 2014
Test Date(s):	October 10 to October 20, 2014
Output power	-1.73dBm (0.67mW)
Antenna Gain:	4 dBi
Type of Modulation:	Bluetooth: GFSK& π /4DQPSK&8DPSK
RF Operating Frequency (ies):	Bluetooth: 2402-2480 MHz
Number of Channels:	Bluetooth: 79CH
Port:	Power Port, LAN Port, +R--L+ Port, AUDIO IN Port*2, AUDIO OUT Port
Input Power:	Adapter: Model: KSAS0452400188D5 Input Power: 100-240Vac 50/60Hz 1.2A Output Power:24Vdc 1.88A
Trade Name :	Kohler
FCC ID:	N82-KOHLER010

5. Test Summary

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Radiated Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB

Test Report No.	14020873-FCC-R1-V1
Page	8 of 53

6. Measurements, Examination And Derived Results

6.1 RF Exposure

The EUT is a mobile device, thus requires RF exposure evaluation;
Please refer to SIEMIC RF Exposure Report: 14020873-FCC-H1.

6.2 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules.

§15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antenna:


a PIFA antenna for Bluetooth, the gain is 4 dBi

Result: Compliance.

6.3 Channel Separation

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 10, 2014
Tested By :	Deon Dai

Requirement(s):

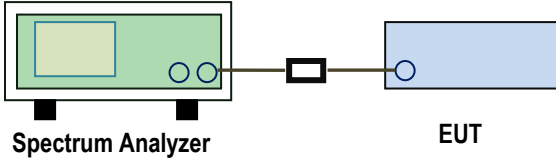
Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥1% of the span - Video (or Average) Bandwidth (VBW) ≥RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.		
Remark			
Result	☒ Pass ☐ Fail		
Test Data	☒ Yes ☐ N/A		
Test Plot	☒ Yes (See below) ☐ N/A		

Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.008	0.798	Pass
	Adjacency Channel	2403			
	Mid Channel	2441	1.002	0.804	Pass
	Adjacency Channel	2440			
	High Channel	2480	1.002	0.804	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.002	0.828	Pass
	Adjacency Channel	2403			
	Mid Channel	2441	1.002	0.820	Pass
	Adjacency Channel	2440			
	High Channel	2480	1.008	0.824	Pass
	Adjacency Channel	2479			
CH Separation 8-DPSK	Low Channel	2402	1.004	0.852	Pass
	Adjacency Channel	2403			
	Mid Channel	2441	1.008	0.840	Pass
	Adjacency Channel	2440			
	High Channel	2480	1.002	0.844	Pass
	Adjacency Channel	2479			


Test Plots

Channel Separation measurement result

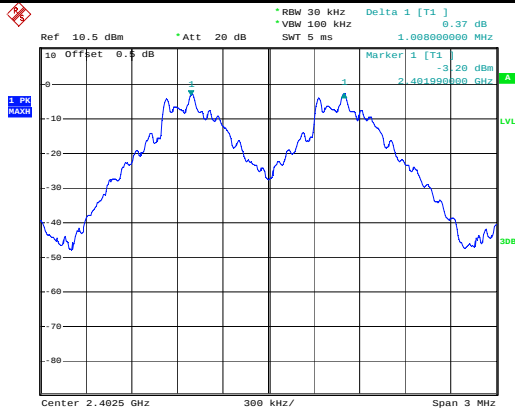


Date: 10.OCT.2014 21:48:14

GFSK - Low Channel

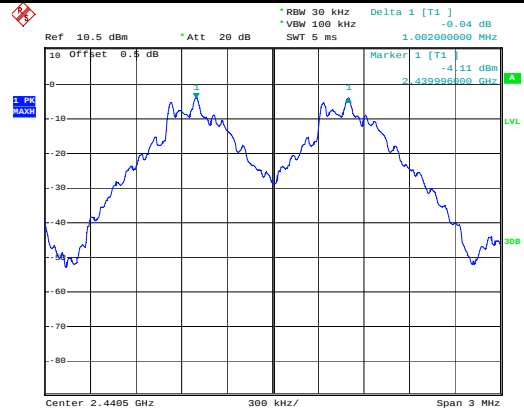


Date: 10.OCT.2014 21:49:47

GFSK - Middle Channel

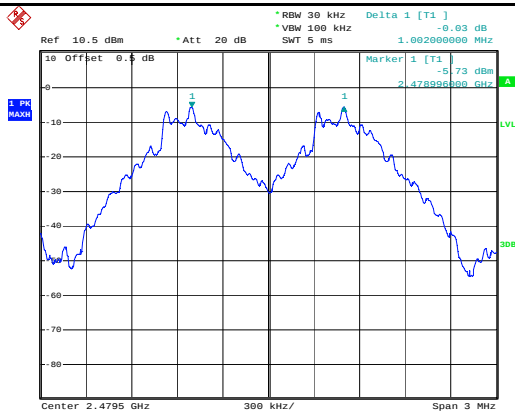


Date: 10.OCT.2014 21:50:35

GFSK - High Channel

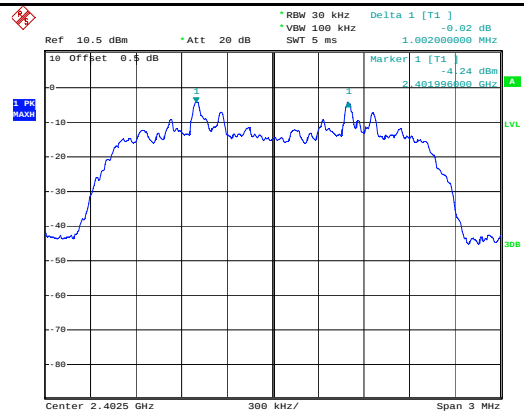


Date: 10.OCT.2014 22:14:16

$\pi/4$ DPSK - Low Channel

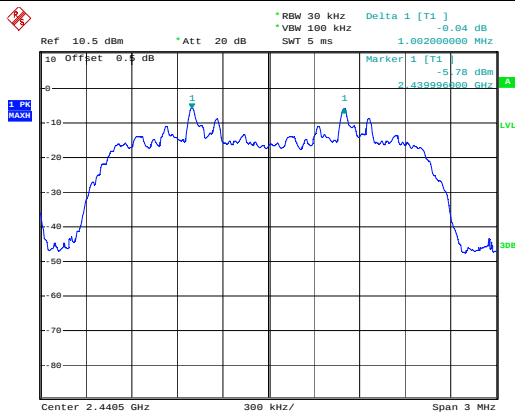


Date: 10.OCT.2014 22:15:35

$\pi/4$ DQPSK - Middle Channel

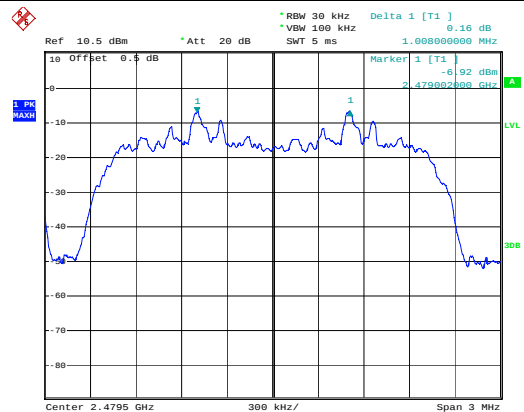


Date: 10.OCT.2014 22:16:54

$\pi/4$ DQPSK - High Channel

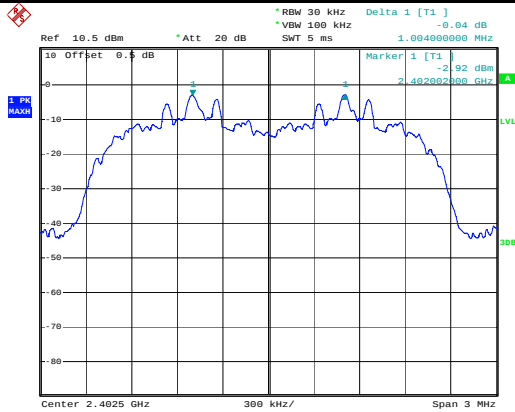


Date: 10.OCT.2014 22:36:46

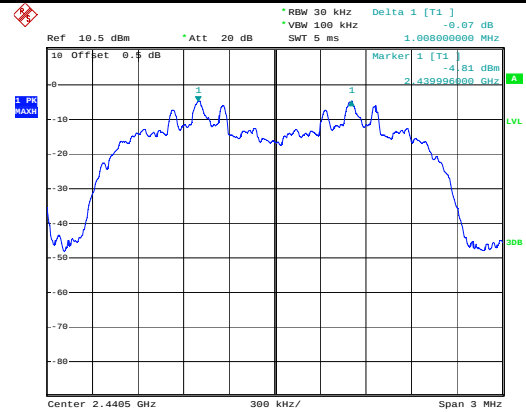

Date: 10.OCT.2014 22:37:44

8DPSK - Low Channel

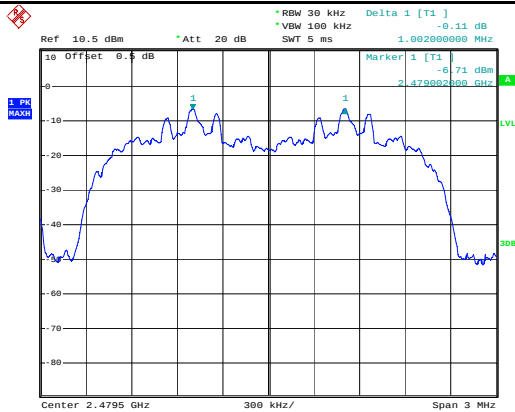

Date: 10.OCT.2014 22:38:46


8DPSK - Middle Channel

8DPSK - High Channel

6.4 20dB Bandwidth

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 10, 2014
Tested By :	Deon Dai

Requirement(s):


Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW $\geq 1\%$ of the 20 dB bandwidth - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).		
Remark			
Result	☒ Pass ☐ Fail		
Test Data	☒ Yes ☐ N/A		
Test Plot	☒ Yes (See below) ☐ N/A		

20dB Bandwidth measurement result

Type	Modulation	CH	CH Freq (MHz)	20dB Bandwidth(MHz)
20dB BW	GFSK	Low	2402	0.798
		Mid	2441	0.804
		High	2480	0.804
	$\pi/4$ DQPSK	Low	2402	1.242
		Mid	2441	1.230
		High	2480	1.236
	8-DPSK	Low	2402	1.278
		Mid	2441	1.260
		High	2480	1.266


Test Plots

20dB Bandwidth measurement result

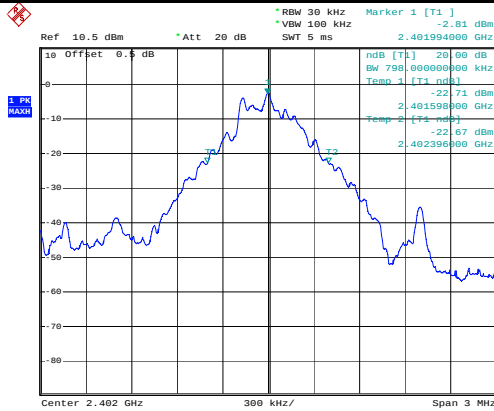


Date: 10.OCT.2014 21:55:39

GFSK - Low Channel

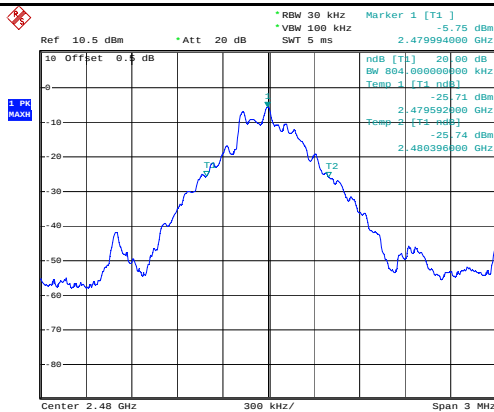


Date: 10.OCT.2014 21:52:36

GFSK - Middle Channel

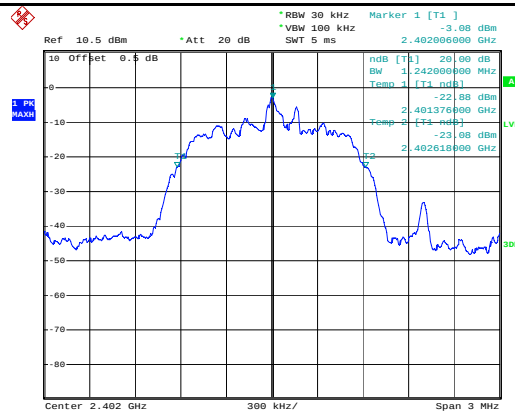


Date: 10.OCT.2014 22:19:14

GFSK - High Channel

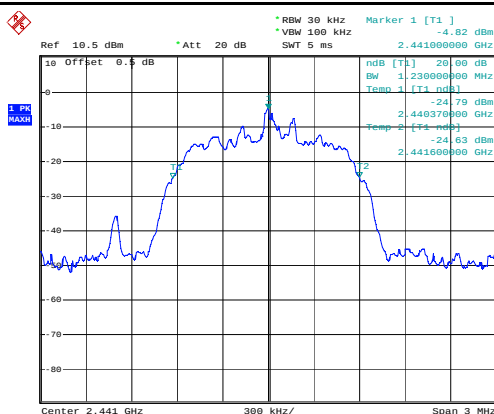

Date: 10.OCT.2014 22:18:51


$\pi/4$ DPSK - Low Channel

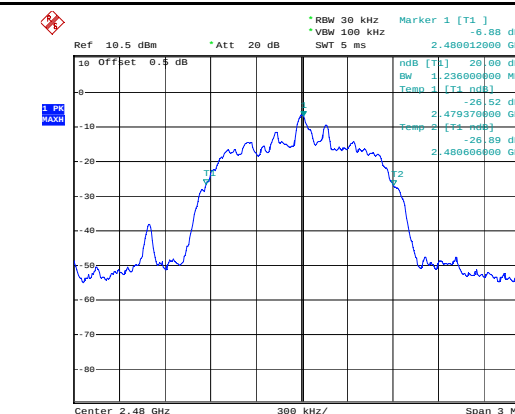


Date: 10.OCT.2014 22:18:22

$\pi/4$ DQPSK - Middle Channel

$\pi/4$ DQPSK - High Channel

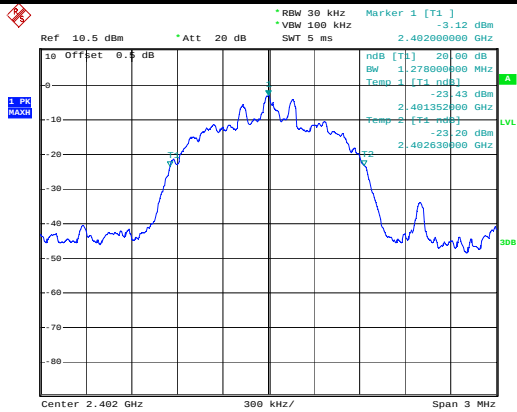


Date: 10.OCT.2014 22:42:02

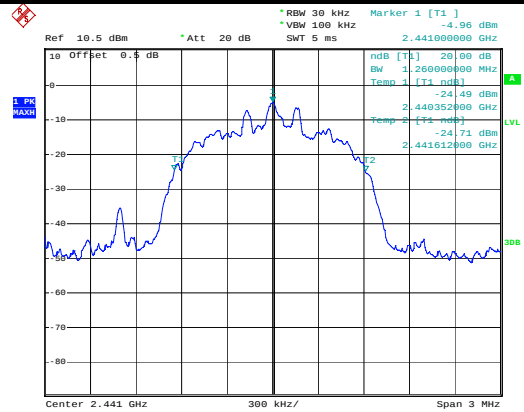

Date: 10.OCT.2014 22:41:28

8DPSK - Low Channel

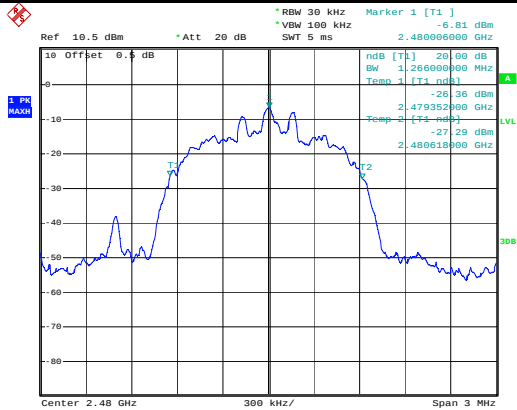

Date: 10.OCT.2014 22:40:54

8DPSK - Middle Channel


8DPSK - High Channel

6.5 Peak Output Power

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 10, 2014
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	☒
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	☐
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	☐
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	☐
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	☐
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt	☐

Test Setup	 Spectrum Analyzer EUT
------------	--

Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
----------------	---


Remark	
Result	☒ Pass ☐ Fail
Test Data	☒ Yes ☐ N/A
Test Plot	☒ Yes (See below) ☐ N/A

Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Conducted Power (mW)	Limit (mW)	Result
Output power	GFSK	Low	2402	-2.64	0.54	1000	Pass
		Mid	2441	-2.53	0.56	1000	Pass
		High	2480	-4.01	0.40	1000	Pass
	$\pi/4$ DQPSK	Low	2402	-2.13	0.61	125	Pass
		Mid	2441	-3.85	0.41	125	Pass
		High	2480	-5.55	0.28	125	Pass
	8-DPSK	Low	2402	-1.73	0.67	125	Pass
		Mid	2441	-3.65	0.43	125	Pass
		High	2480	-5.28	0.30	125	Pass


Test Plots

Output Power measurement result

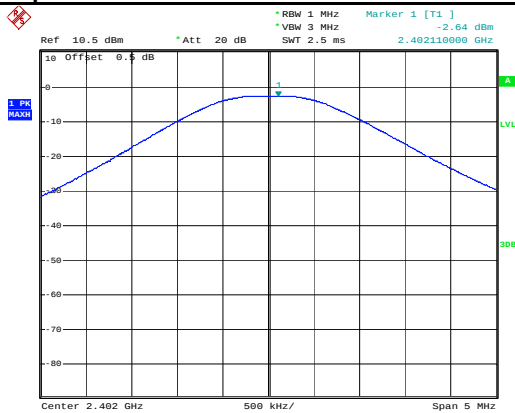


Date: 10.OCT.2014 22:25:26

GFSK Output power - Low CH 2402

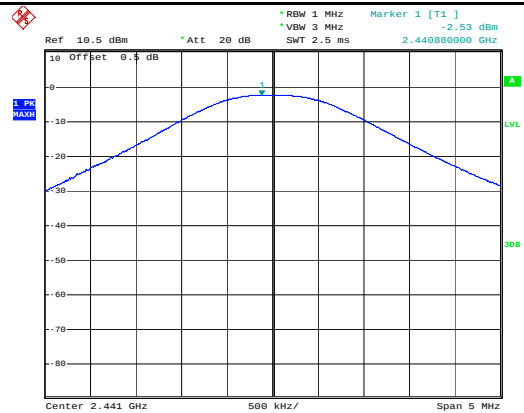


Date: 10.OCT.2014 22:25:56

GFSK Output power - Mid CH 2441

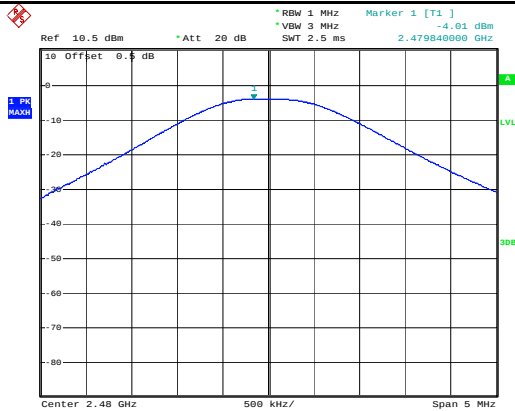


Date: 10.OCT.2014 22:26:18

GFSK Output power - High CH 2480

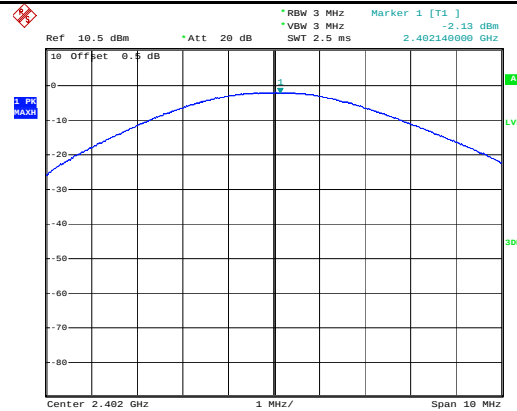


Date: 10.OCT.2014 22:24:49

$\pi/4$ DQPSK Output power - Low CH 2402

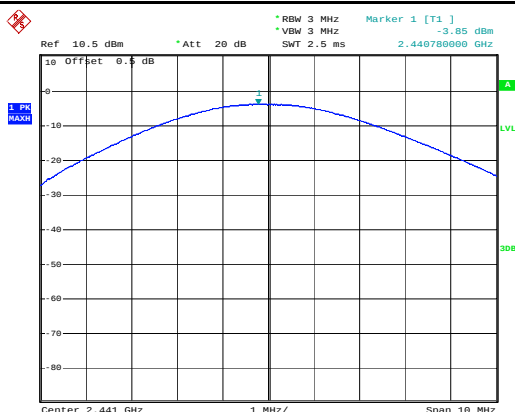


Date: 10.OCT.2014 22:24:32

$\pi/4$ DQPSK Output power - Mid CH 2441

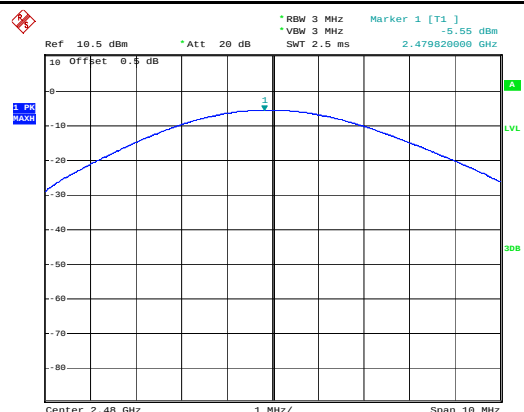


Date: 10.OCT.2014 22:24:05

$\pi/4$ DQPSK Output power - High CH 2480

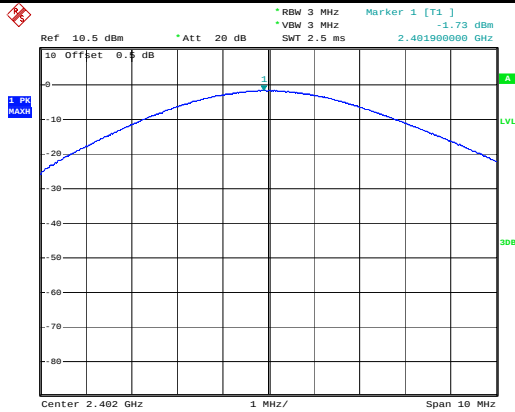


Date: 10.OCT.2014 22:27:54

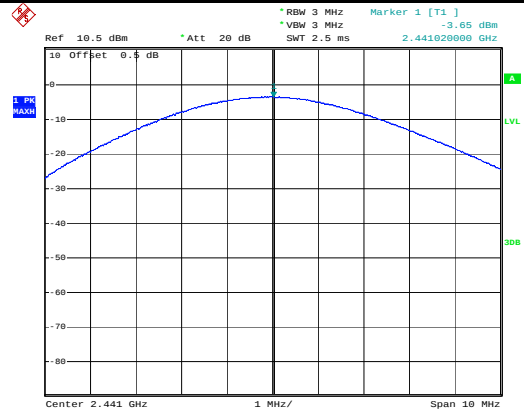

Date: 10.OCT.2014 22:27:34

8DPSK Output power - Low CH 2402

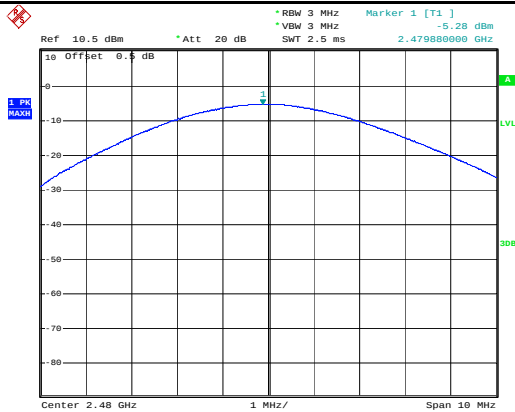

Date: 10.OCT.2014 22:27:01


8DPSK Output power - Mid CH 2441

8DPSK Output power - High CH 2480

6.6 Number of Hopping Channel

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 10, 2014
Tested By :	Deon Dai

Requirement(s):

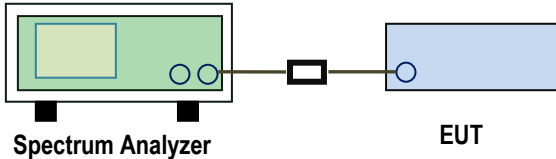
Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz $\geq$ 15 channels	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled. - Span = the frequency band of operation - RBW $\geq$ 1% of the span - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).		
Remark			
Result	☒ Pass ☐ Fail		
Test Data	☒ Yes ☐ N/A		
Test Plot	☒ Yes (See below) ☐ N/A		

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

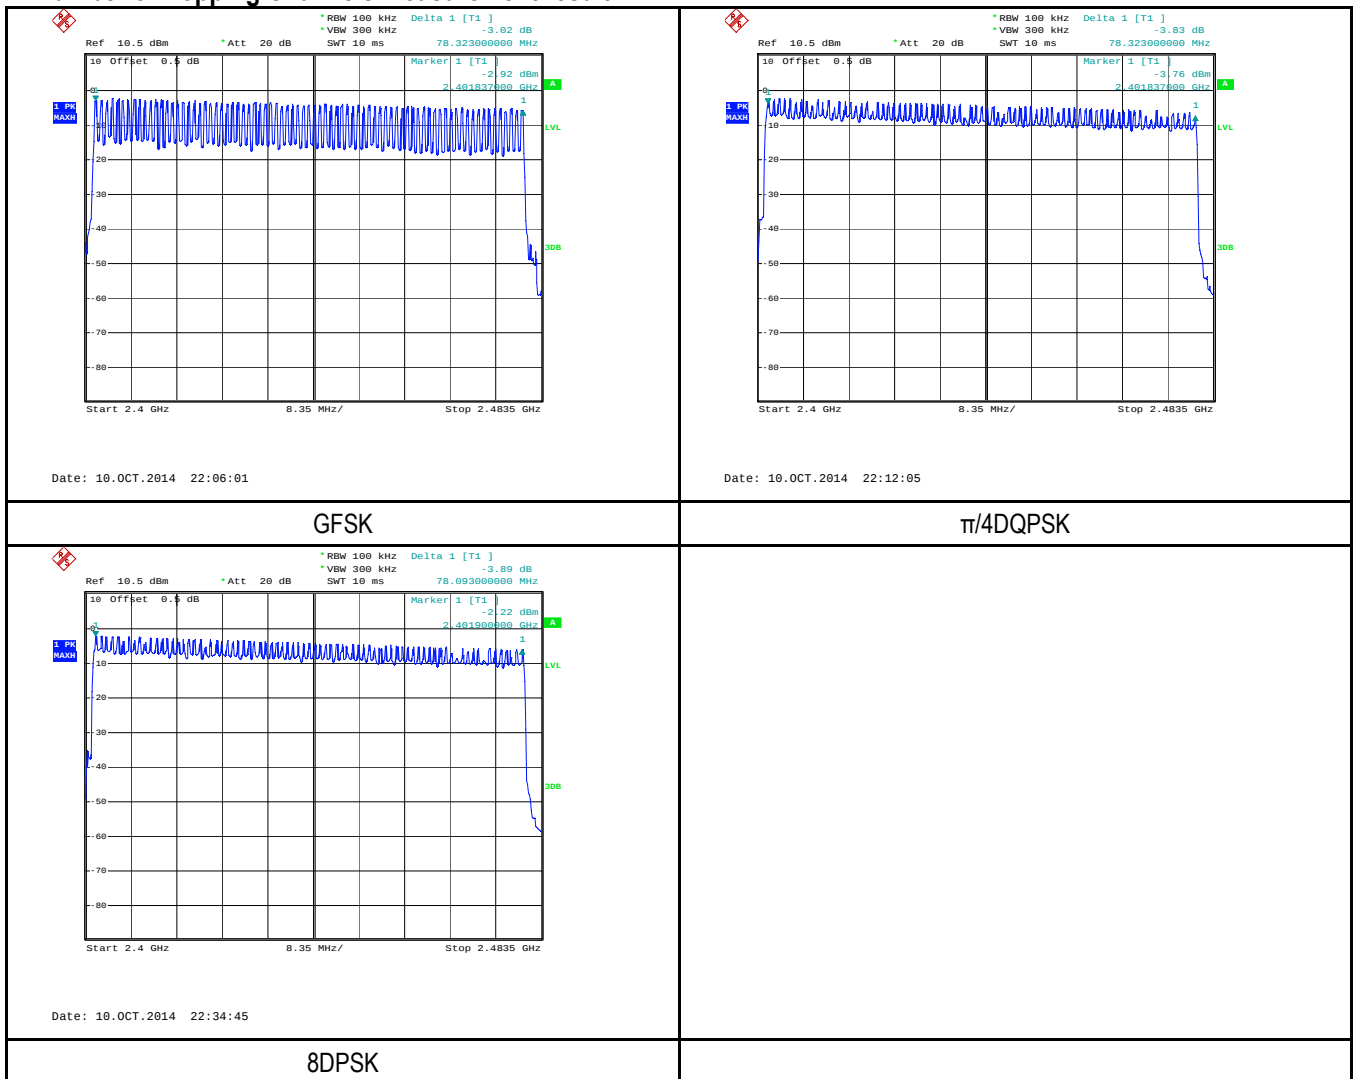

6.7 Time of Occupancy (Dwell Time)

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 10, 2014
Tested By :	Deon Dai

Requirement(s):

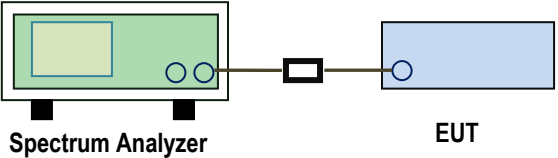Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time		
Remark			
Result	☒ Pass ☐ Fail		
Test Data	☒ Yes ☐ N/A		
Test Plot	☒ Yes (See below) ☐ N/A		

Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Dwell Time (DH5)	GFSK	Low	3.08	0.32853	0.4	Pass
		Mid	3.08	0.32853	0.4	Pass
		High	3.08	0.32853	0.4	Pass
	π/4 DQPSK	Low	3.09	0.32960	0.4	Pass
		Mid	3.12	0.33280	0.4	Pass
		High	3.12	0.33280	0.4	Pass
	8-DPSK	Low	3.09	0.32960	0.4	Pass
		Mid	3.09	0.32960	0.4	Pass
		High	3.09	0.32960	0.4	Pass

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second

Note: Other modes were verified, only the result of worst case DH5 mode was presented.


Test Plots

Dwell Time measurement result

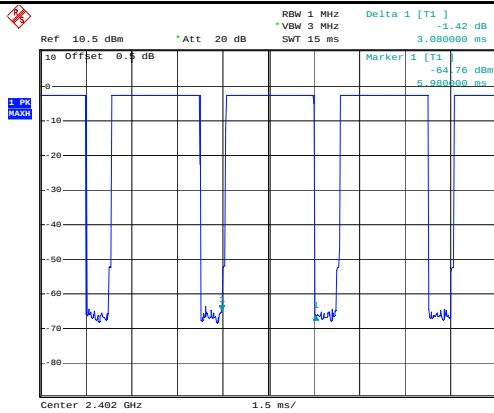


Date: 10.OCT.2014 21:58:22

GFSK - Low CH 2402

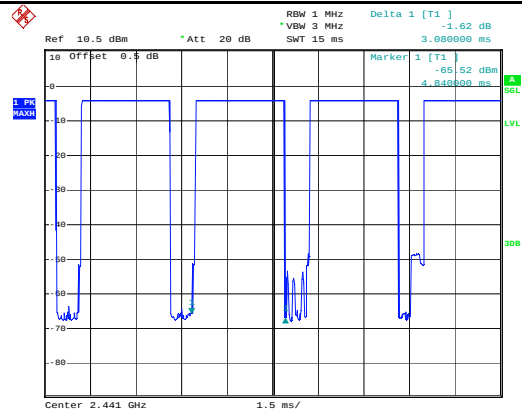


Date: 10.OCT.2014 21:59:19

GFSK - Mid CH 2441

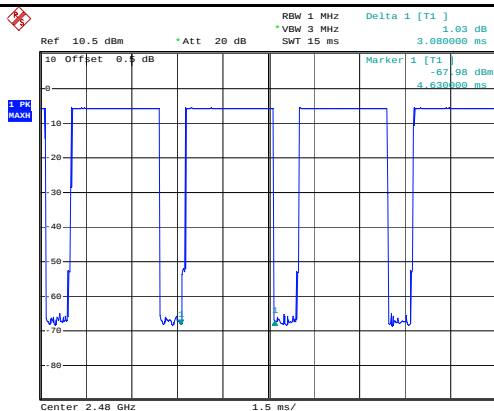


Date: 10.OCT.2014 21:59:48

GFSK - High CH 2480

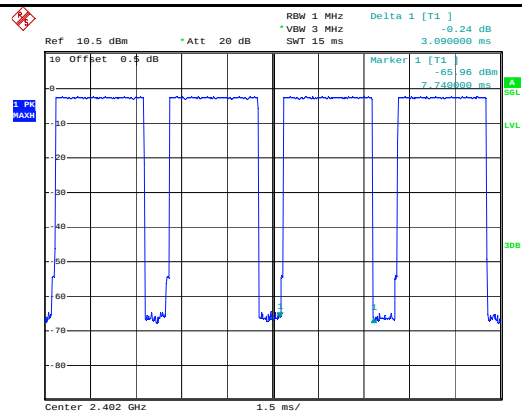


Date: 10.OCT.2014 22:20:10

$\pi/4$ DQPSK - Low CH 2402

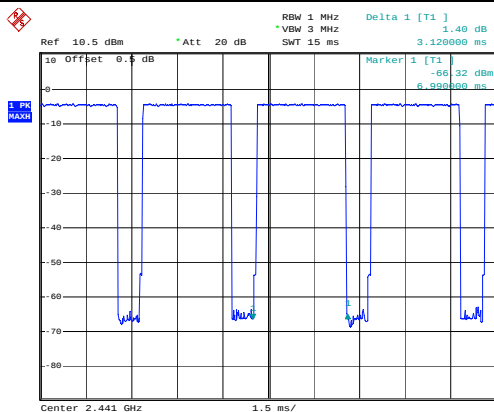


Date: 10.OCT.2014 22:20:52

$\pi/4$ DQPSK - Mid CH 2441

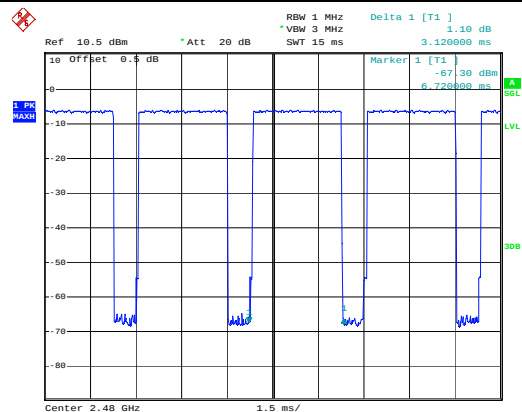


Date: 10.OCT.2014 22:21:38

$\pi/4$ DQPSK - Mid CH 2441

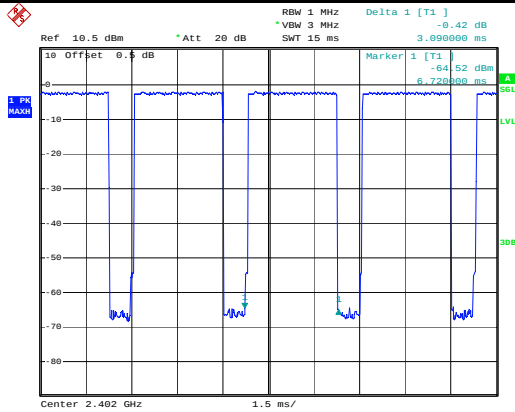


Date: 10.OCT.2014 22:43:02

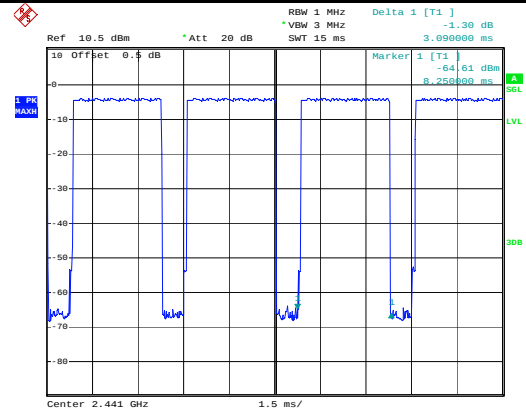

Date: 10.OCT.2014 22:43:35

8DPSK - Low CH 2402

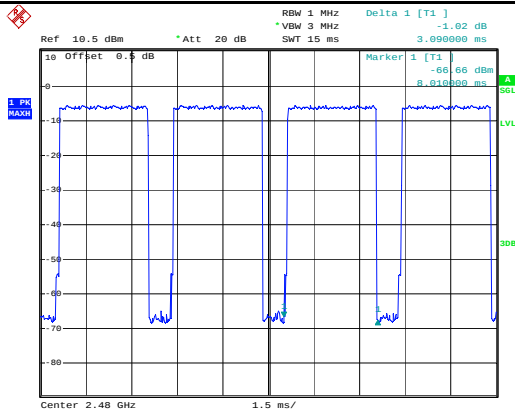

Date: 10.OCT.2014 22:44:44


8DPSK - Mid CH 2441

8DPSK - High CH 2480

6.8 Band Edge

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 20, 2014
Tested By :	Deon Dai


Requirement(s):

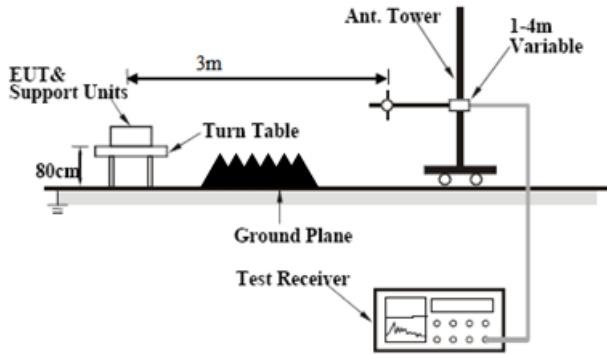Spec	Item	Requirement	Applicable
§15.247(a)(1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	☒
Test Setup		 The diagram illustrates the test setup for radiated emissions. It shows the EUT (Equipment Under Test) and its support units placed on a turn table at a height of 80cm. The turn table is positioned 3m away from an antenna tower. The antenna tower is at a variable distance of 1-4m from the EUT. A ground plane is located between the turn table and the antenna tower. A test receiver is connected to the antenna tower to measure the radiated emissions.	
Test Procedure		The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth for Average detection (AV) as below at frequency above 1GHz. ■ 1/T kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%) 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. 5. Repeat above procedures until all measured frequencies were complete.	
Remark			
Result	☒ Pass ☐ Fail		


Test Report No.	14020873-FCC-R1-V1
Page	29 of 53

Test Data	☒ Yes	☒ N/A
Test Plot	☒ Yes (See below)	☐ N/A

Test Plots
Band Edge measurement result
GFSK Mode:

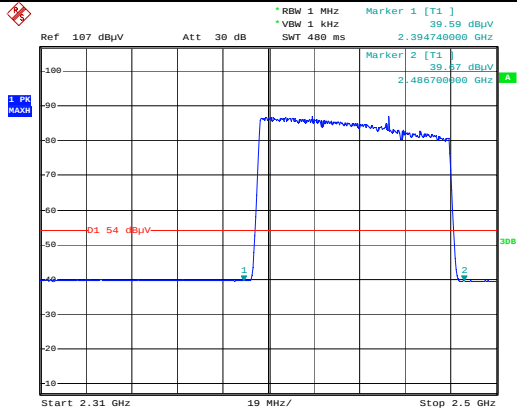


Date: 20.OCT.2014 10:54:40

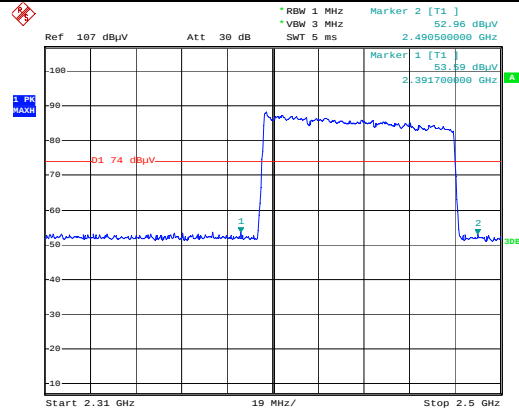


Date: 20.OCT.2014 10:43:28

GFSK-Hopping-Ave

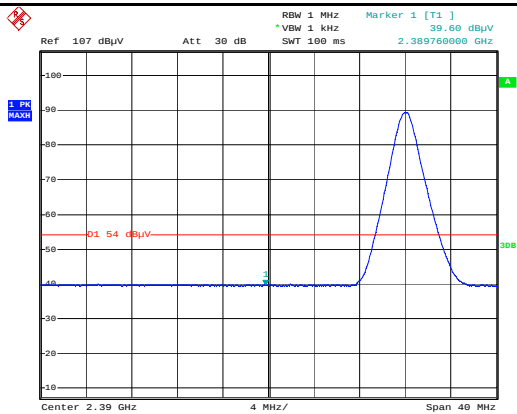


Date: 20.OCT.2014 10:33:47

GFSK-Hopping-PK

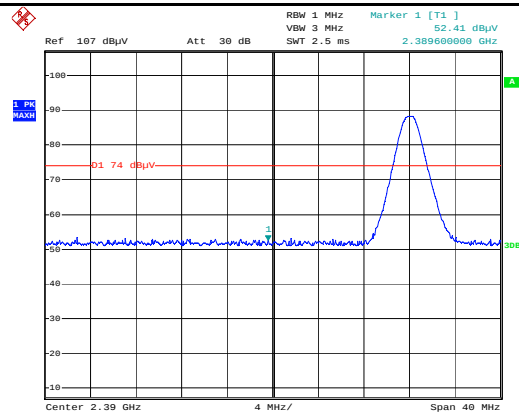


Date: 20.OCT.2014 10:31:18

GFSK-Left Side-Ave

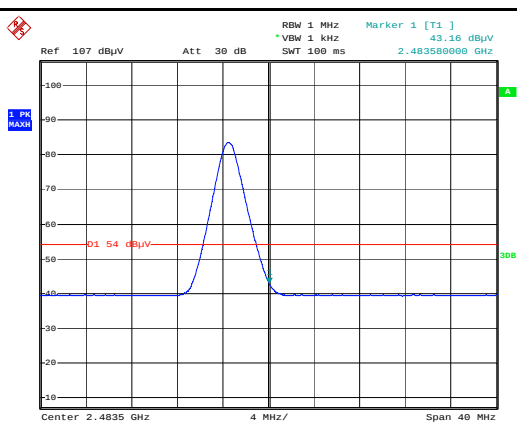

Date: 20.OCT.2014 10:38:06

GFSK-Left Side-PK

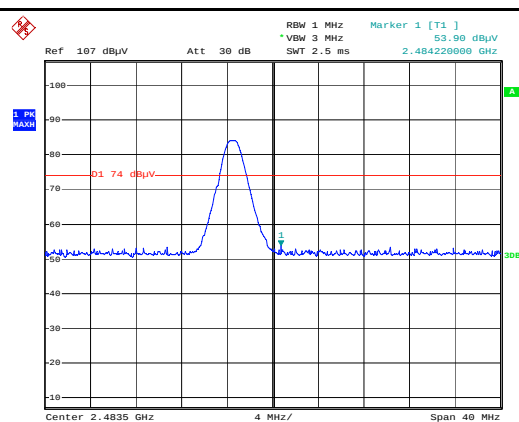


Date: 20.OCT.2014 10:39:31


GFSK-Right Side-Ave

GFSK-Right Side-PK

$\pi/4$ DQPSK Mode:

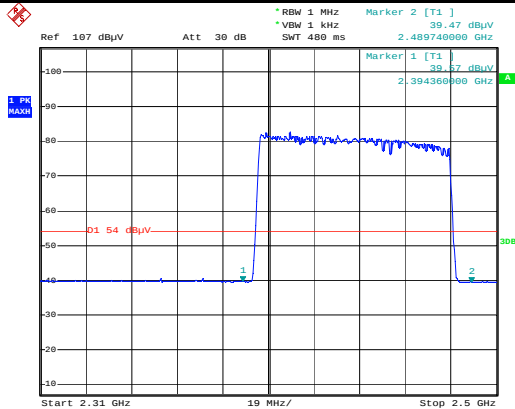


Date: 20.OCT.2014 11:02:28

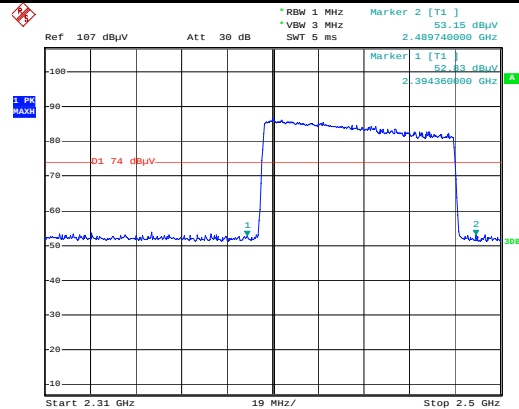


Date: 20.OCT.2014 10:58:17

$\pi/4$ DQPSK-Hopping-Ave-Left Side

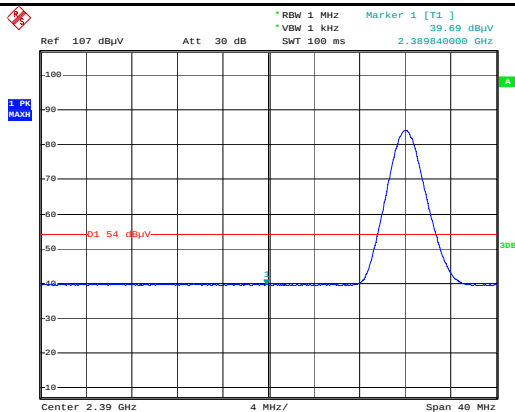


Date: 20.OCT.2014 11:16:06

$\pi/4$ DQPSK-Hopping-PK

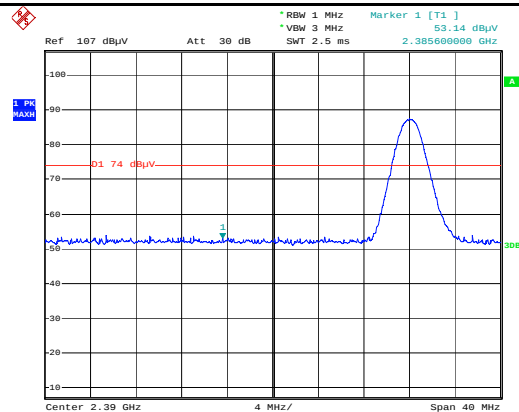


Date: 20.OCT.2014 11:13:53

$\pi/4$ DQPSK-Left Side-Ave

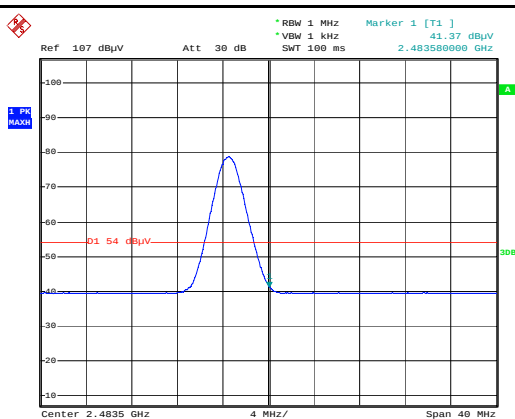

Date: 20.OCT.2014 11:08:20

$\pi/4$ DQPSK-Left Side-PK

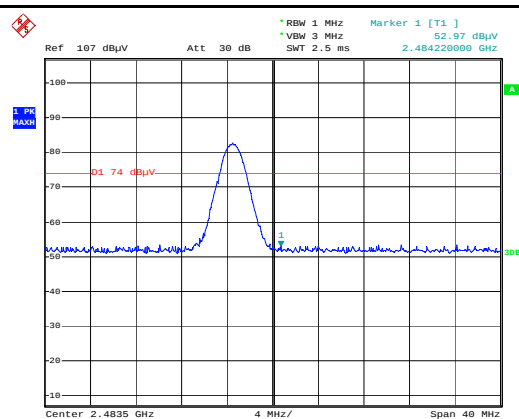


Date: 20.OCT.2014 11:10:41


$\pi/4$ DQPSK-Right Side-Ave

$\pi/4$ DQPSK-Right Side-PK

8DPSK Mode:

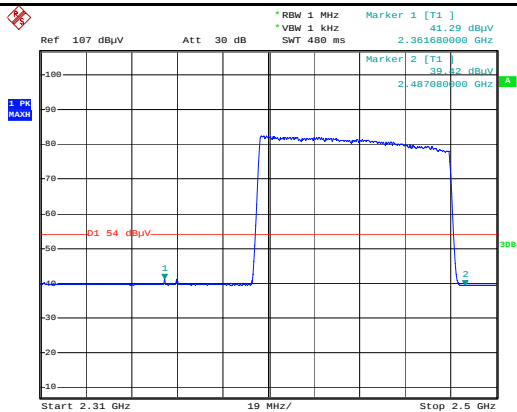


Date: 20.OCT.2014 11:30:57

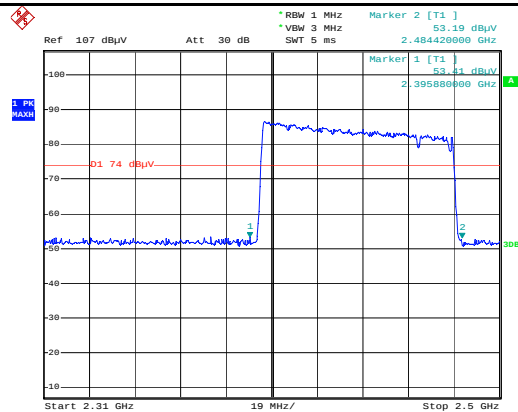


Date: 20.OCT.2014 11:34:06

8DPSK-Hopping-Ave-Left Side

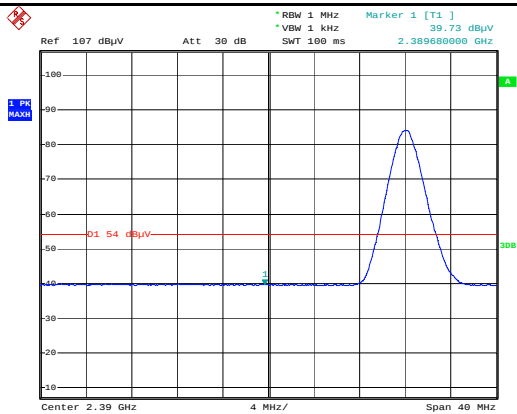


Date: 20.OCT.2014 11:19:01

8DPSK-Hopping-PK

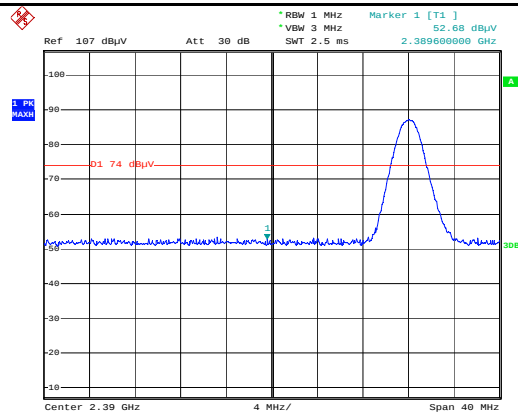


Date: 20.OCT.2014 11:20:08

8DPSK-Left Side-Ave

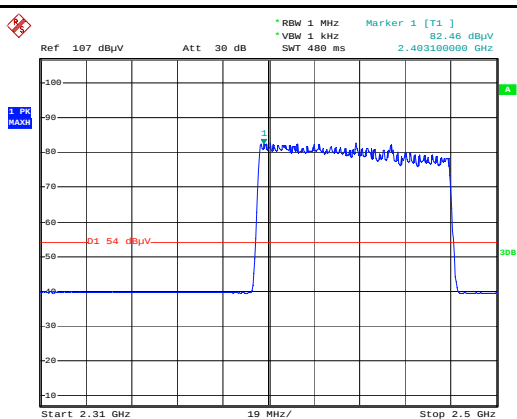

Date: 20.OCT.2014 11:28:37

8DPSK-Left Side-PK

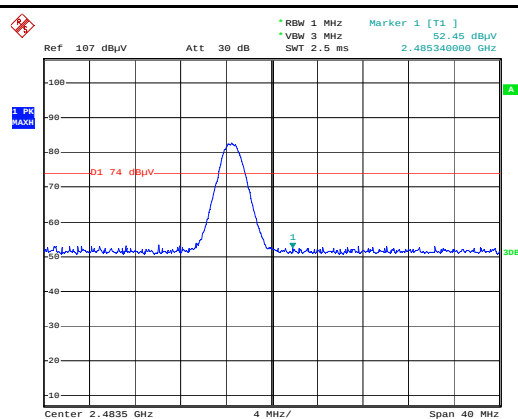

Date: 20.OCT.2014 11:22:03

8DPSK-Right Side-Ave

8DPSK-Right Side-PK


6.9 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 20, 2014
Tested By :	Deon Dai

Requirement(s):

Requirement(s)	Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)		a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☒														
			<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
			Frequency ranges (MHz)			Limit (dBµV)												
					QP	Average												
			0.15 ~ 0.5		66 – 56	56 – 46												
0.5 ~ 5	56	46																
5 ~ 30	60	50																
Test Setup																		
			Procedure		- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment was powered separately from another main supply.													
						Remark												
Result	☒ Pass ☐ Fail																	
Test Data	☒ Yes ☐ N/A																	
Test Plot	☒ Yes (See below) ☐ N/A																	

Test Mode: Transmitting Mode

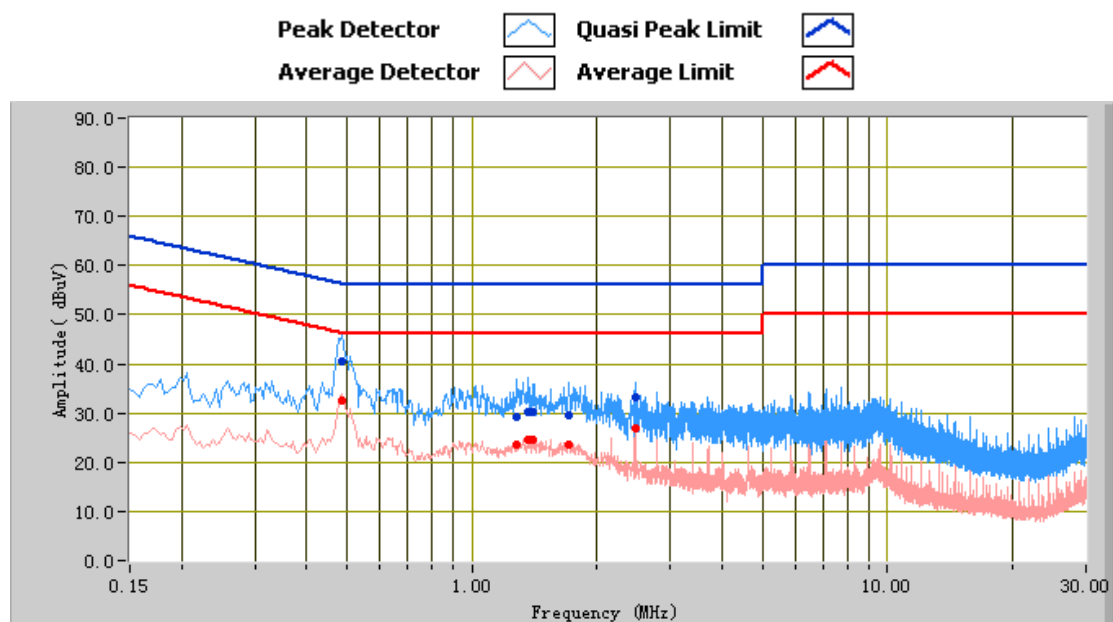


Test Data

Phase Line Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.49	40.59	56.24	-15.65	32.44	46.24	-13.80	11.11
1.36	30.31	56.00	-25.69	24.46	46.00	-21.54	10.75
1.28	29.35	56.00	-26.65	23.58	46.00	-22.42	10.74
2.47	33.06	56.00	-22.94	27.00	46.00	-19.00	10.88
1.71	29.48	56.00	-26.52	23.67	46.00	-22.33	10.82
1.40	30.11	56.00	-25.89	24.42	46.00	-21.58	10.76

Test Mode: Transmitting Mode

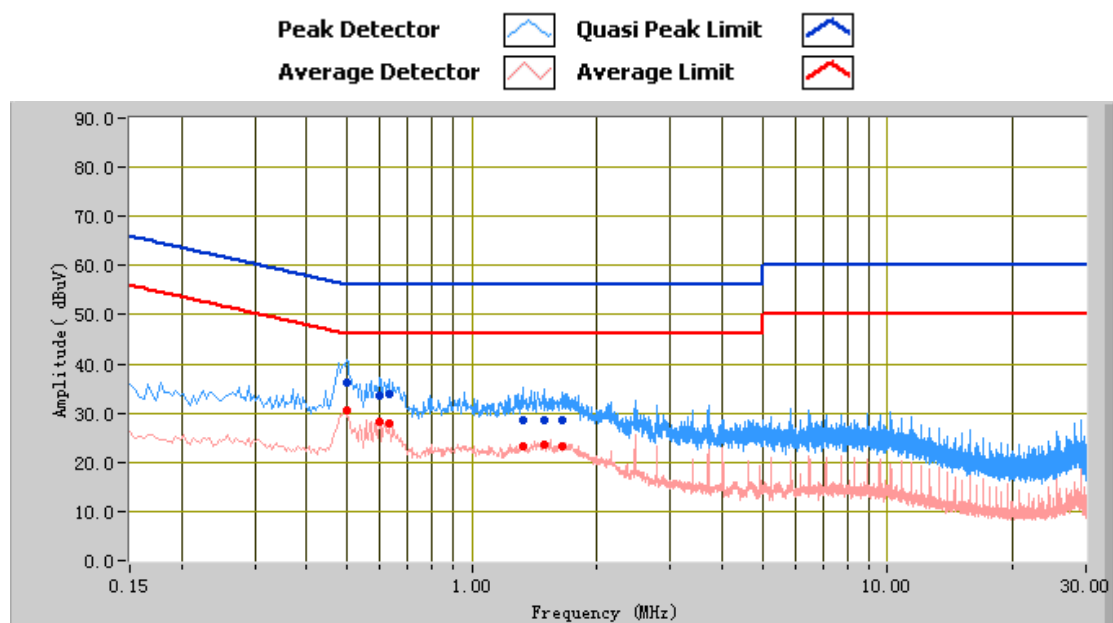

Test Data

Phase Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.50	36.22	56.03	-19.81	30.53	46.03	-15.51	11.06
0.60	33.63	56.00	-22.37	28.29	46.00	-17.71	10.99
0.63	33.93	56.00	-22.07	27.88	46.00	-18.12	10.97
1.32	28.43	56.00	-27.57	23.15	46.00	-22.85	10.77
1.49	28.60	56.00	-27.40	23.52	46.00	-22.48	10.81
1.64	28.43	56.00	-27.57	23.36	46.00	-22.64	10.84

6.10 Radiated Spurious Emissions

Temperature	24°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 20, 2014
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges		
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 960		200
		Above 960		500

Test Setup	
------------	--


Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. - The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - A Quasi-peak measurement was then made for that frequency point. - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
-----------	--

Remark	
Result	☒ Pass ☐ Fail
Test Data	☒ Yes ☐ N/A
Test Plot	☒ Yes (See below) ☐ N/A

Test Mode: Transmitting Mode

(Below 1GHz)

Peak Detector 
Quasi Peak Limit 

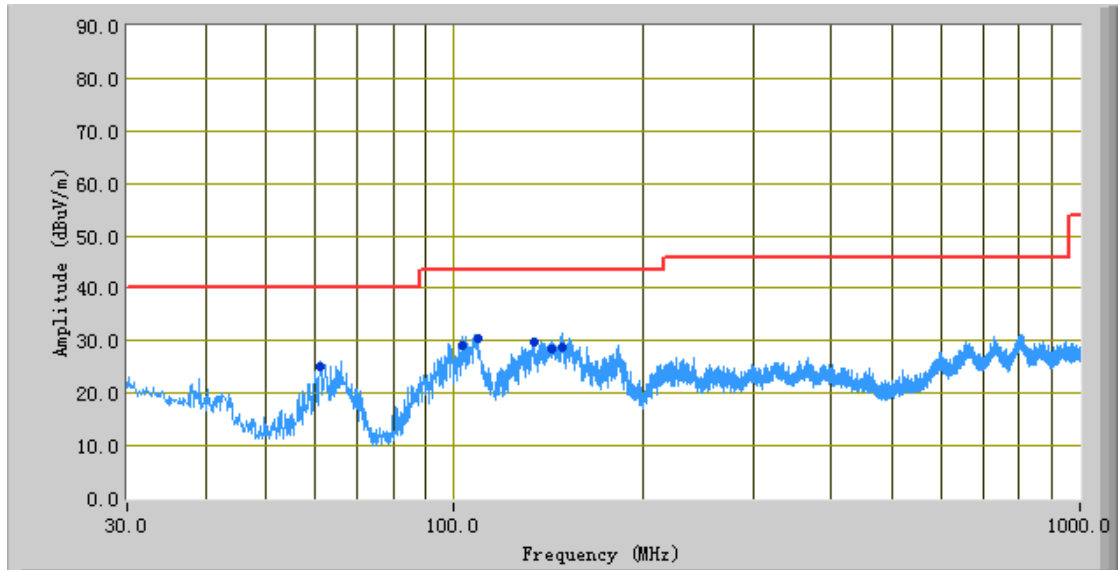

Test Data

Vertical Polarity Plot @3m


Frequency (MHz)	Quasi Peak (dBμV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBμV/m)	Margin (dB)
149.02	28.69	78.00	V	259.00	-31.19	43.50	-14.81
108.79	30.33	286.00	V	321.00	-32.99	43.50	-13.17
103.05	29.17	298.00	V	351.00	-33.35	43.50	-14.33
134.42	29.63	249.00	V	236.00	-31.39	43.50	-13.87
143.11	28.50	284.00	V	273.00	-31.09	43.50	-15.00
61.09	25.10	1.00	V	114.00	-37.44	40.00	-14.90

Note: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not recorded.

Test Mode: Transmitting Mode

(Below 1GHz)

Peak Detector 
Quasi Peak Limit 

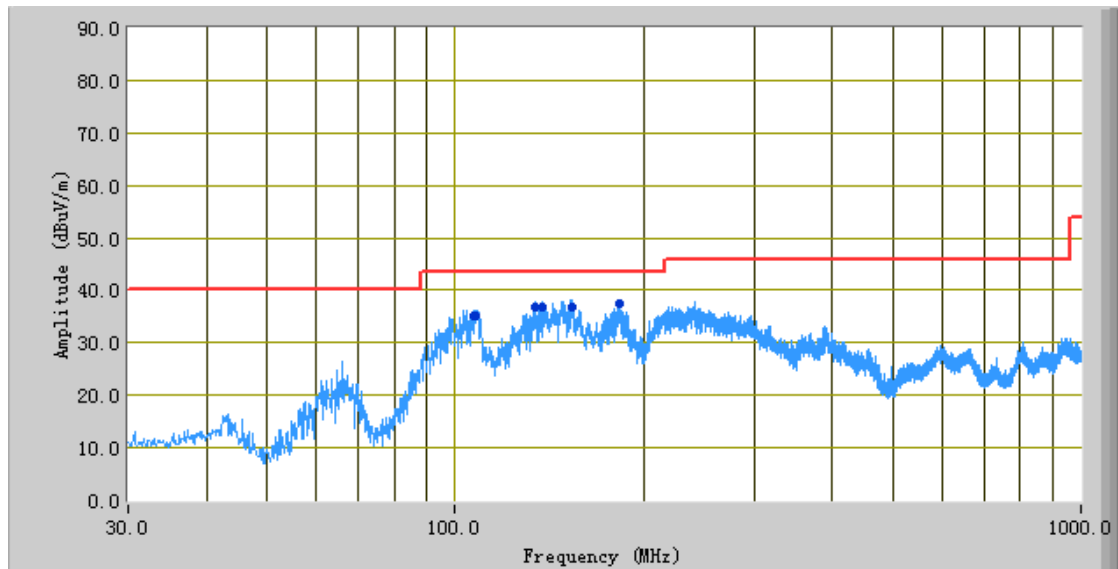

Test Data

Horizontal Polarity Plot @3m

Frequency (MHz)	Quasi Peak (dBμV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBμV/m)	Margin (dB)
153.92	36.85	173.00	H	183.00	-31.46	43.50	-6.65
138.14	36.64	156.00	H	232.00	-31.49	43.50	-6.86
134.40	36.97	187.00	H	222.00	-31.58	43.50	-6.53
182.74	37.57	1.00	H	204.00	-31.51	43.50	-5.93
106.83	35.27	11.00	H	313.00	-32.27	43.50	-8.23
107.68	35.22	221.00	H	278.00	-32.25	43.50	-8.28

Note: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not recorded.

Test Mode:	Transmitting Mode
-------------------	--------------------------

Note: Other modes were verified, only the result of worst case basic rate mode was presented.

Low Channel (2402 MHz)

Frequency (MHz)	Substituted level (dBμV/m)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804.00	32.53	AV	V	33.83	4.87	24	47.23	54	-6.77
4804.00	34.25	AV	H	33.83	4.87	24	48.95	54	-5.05
4804.00	43.98	PK	V	33.83	4.87	24	58.68	74	-15.32
4804.00	46.28	PK	H	33.83	4.87	24	60.98	74	-13.02

Middle Channel (2441 MHz)

Frequency (MHz)	Substituted level (dBμV/m)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882.00	34.25	AV	V	33.83	4.87	24	48.95	54	-5.05
4882.00	34.02	AV	H	34.83	4.87	24	49.72	54	-4.28
4882.00	44.25	PK	V	35.83	4.87	24	60.95	74	-13.05
4882.00	43.98	PK	H	36.83	4.87	24	61.68	74	-12.32

High Channel (2480 MHz)

Frequency (MHz)	Substituted level (dBμV/m)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960.00	33.05	AV	V	33.9	4.87	24	47.82	54	-6.18
4960.00	34.85	AV	H	33.9	4.87	24	49.62	54	-4.38
4960.00	43.21	PK	V	33.9	4.87	24	57.98	74	-16.02
4960.00	44.58	PK	H	33.9	4.87	24	59.35	74	-14.65

Annex A. TEST INSTRUMENT


Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions Emission					
R&S EMI Test Receiver	ESPI3	101216	09/27/2014	09/26/2015	☒
V-LISN	ESH3-Z5	838979/005	09/27/2014	09/26/2015	☒
Com-Power Transient Limiter	LIT-153	531021	09/27/2014	09/26/2015	☒
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2014	10/08/2015	☒
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A	☒
RF conducted test					
R&S EMI Receiver	ESPI3	101216	09/27/2014	09/26/2015	☒
Power Splitter	1#	1#	02/02/2014	02/01/2015	☒
Hp Spectrum Analyzer	8563E	3821A09023	09/27/2014	09/26/2015	☒
Temperature/Humidity Chamber	1007H	N/A	01/07/2014	01/06/2015	☒
Radiated Emissions					
Hp Spectrum Analyzer	8563E	3821A09023	09/27/2014	09/26/2015	☒
R&S EMI Receiver	ESPI3	101216	09/27/2014	09/26/2015	☒
Antenna (30MHz~6GHz)	JB6	A121411	04/15/2014	04/14/2015	☒
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	10/09/2014	10/08/2015	☒
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2014	10/08/2015	☒
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2014	04/22/2015	☒
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/29/2014	05/28/2015	☒
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2013	10/26/2014	☒
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D-00101800-30-10P	1451709	10/27/2013	10/26/2014	☒
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo




EUT – All Package Front View

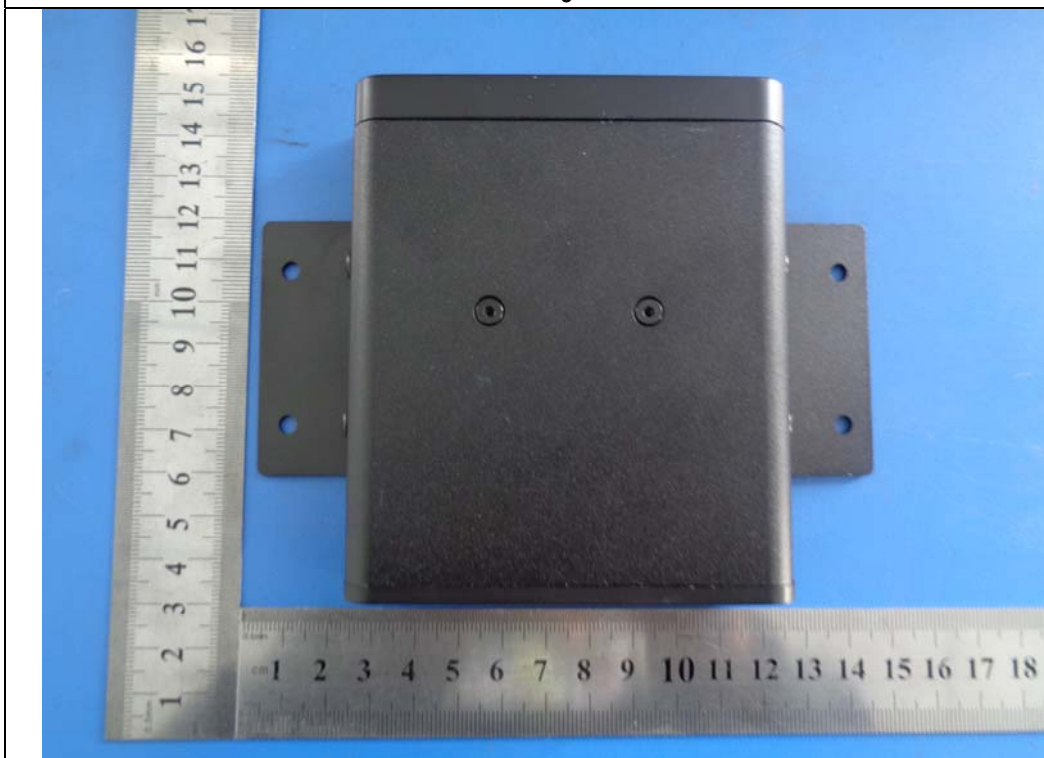

EUT – Front View

Test Report No.	14020873-FCC-R1-V1
Page	42 of 53

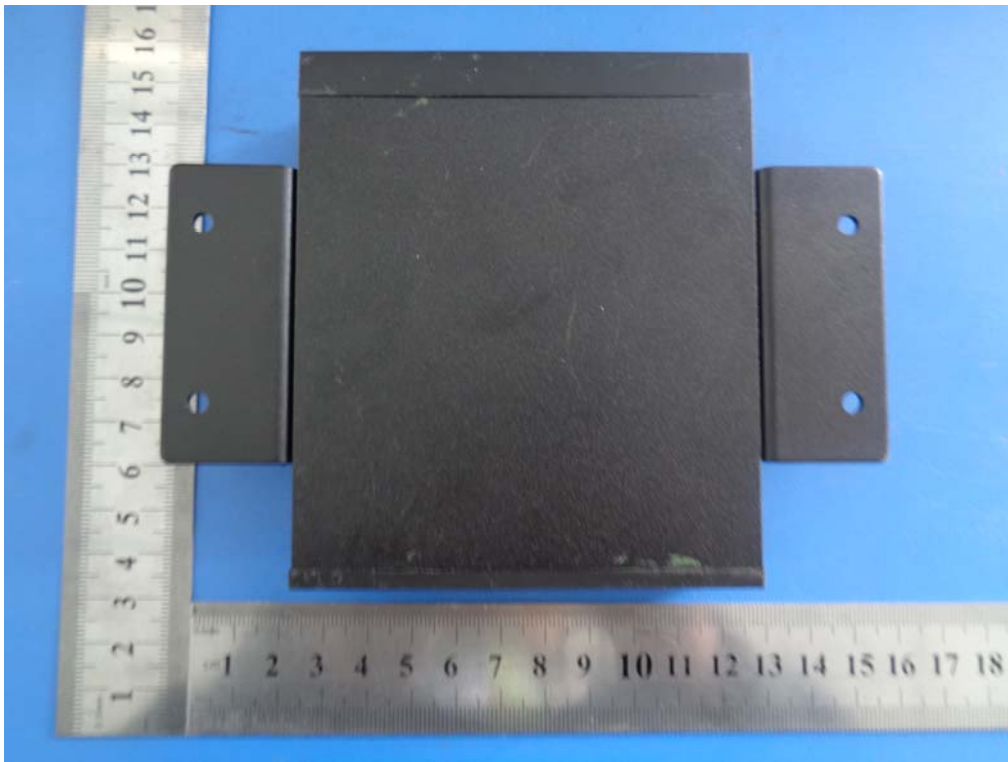


EUT – Rear View



EUT – Top View




EUT – Bottom View

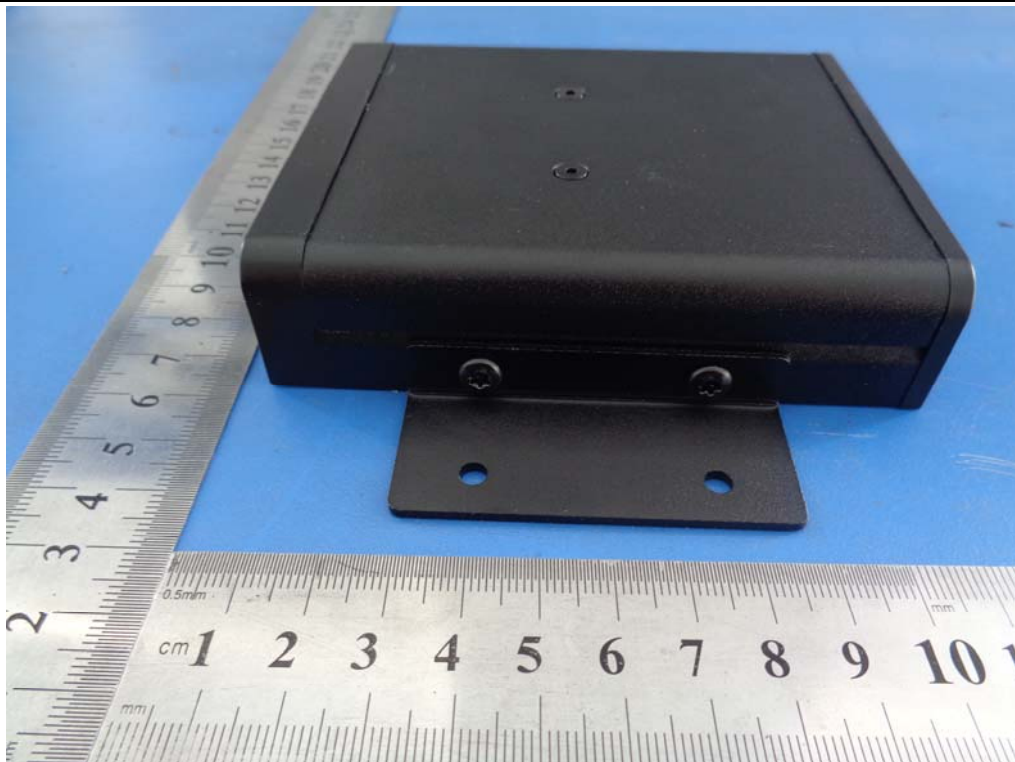

EUT – Left View

Test Report No.	14020873-FCC-R1-V1
Page	44 of 53

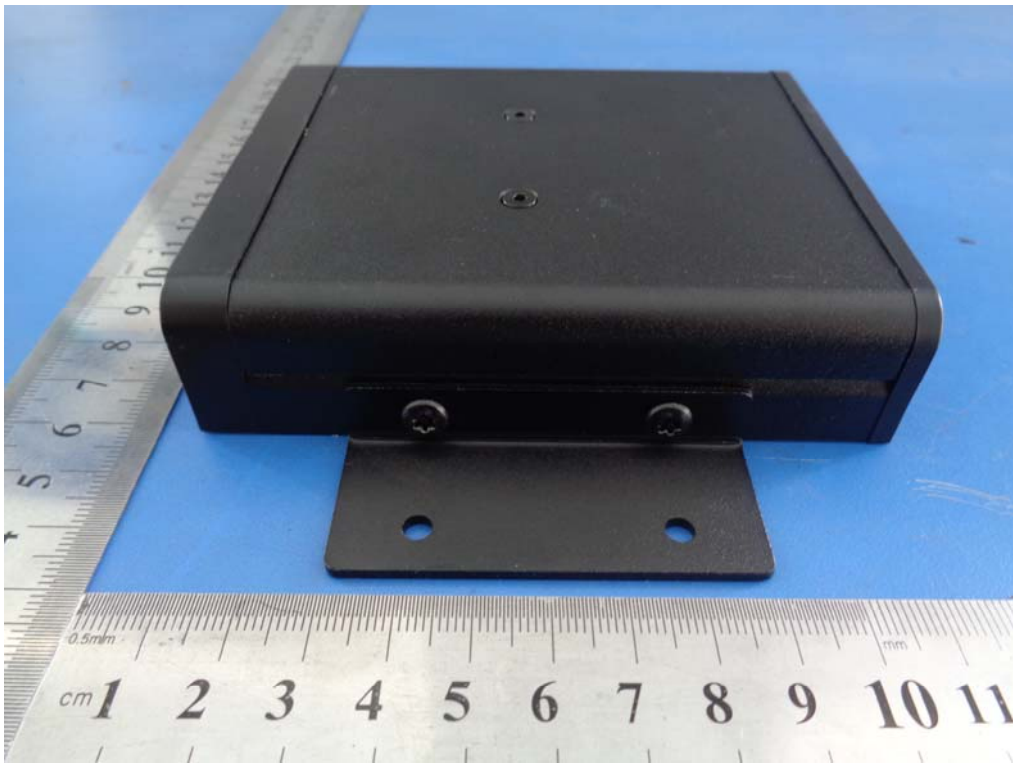


EUT – Right View


Annex B.ii. Photograph: EUT Internal Photo



EUT – Uncover Front View 1

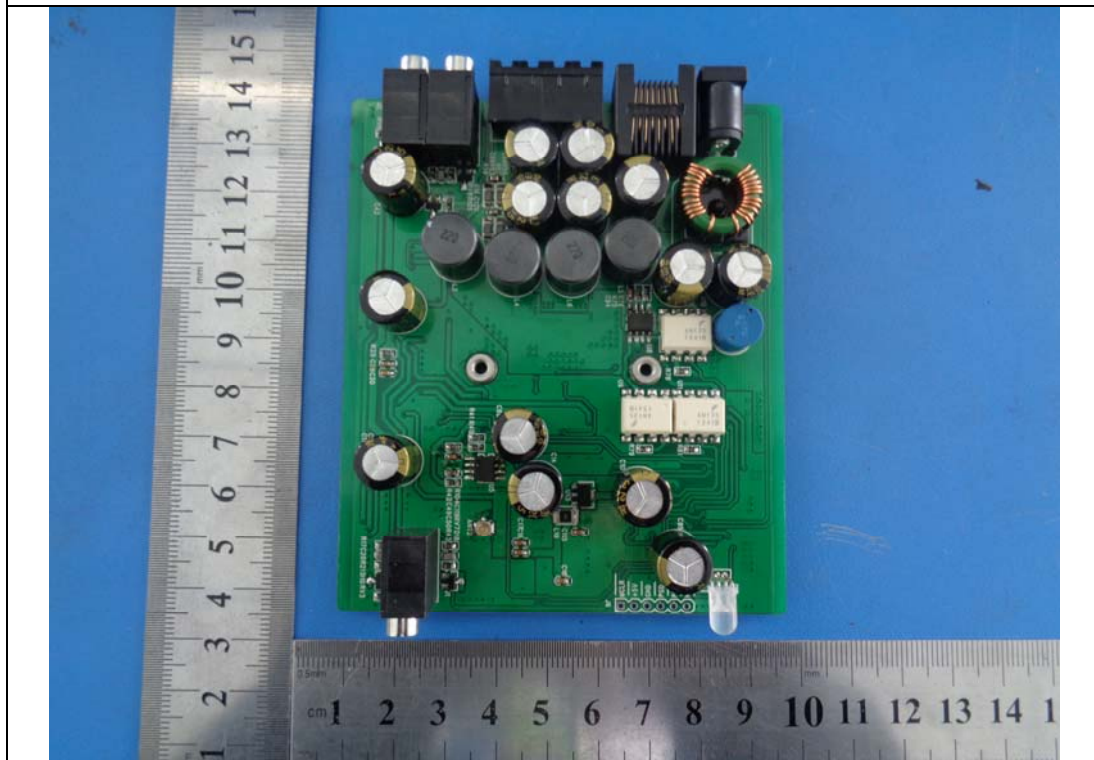


EUT – PCB Front View

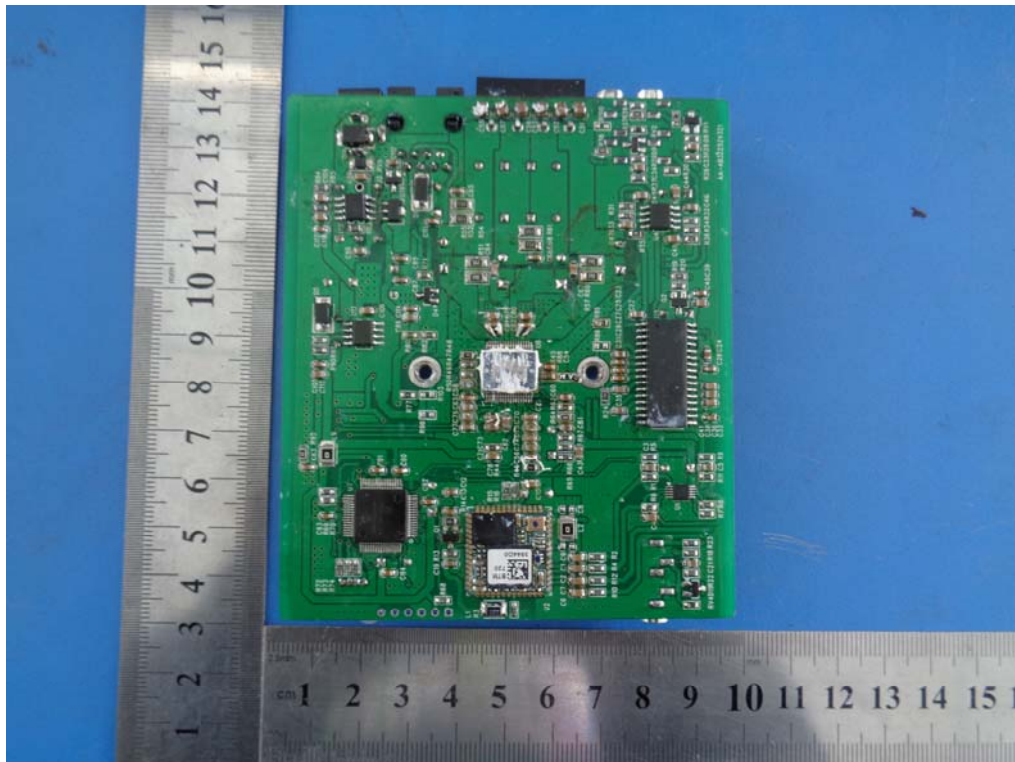

EUT – PCB Rear View

BT Antenna

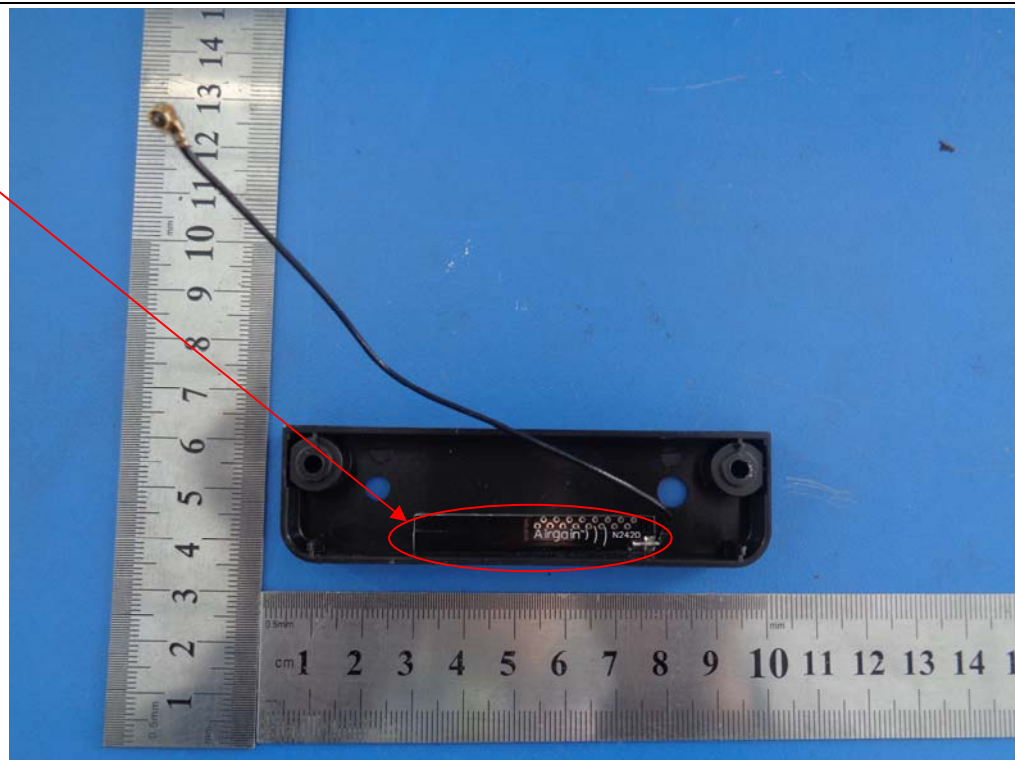

EUT – Antenna Front View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View

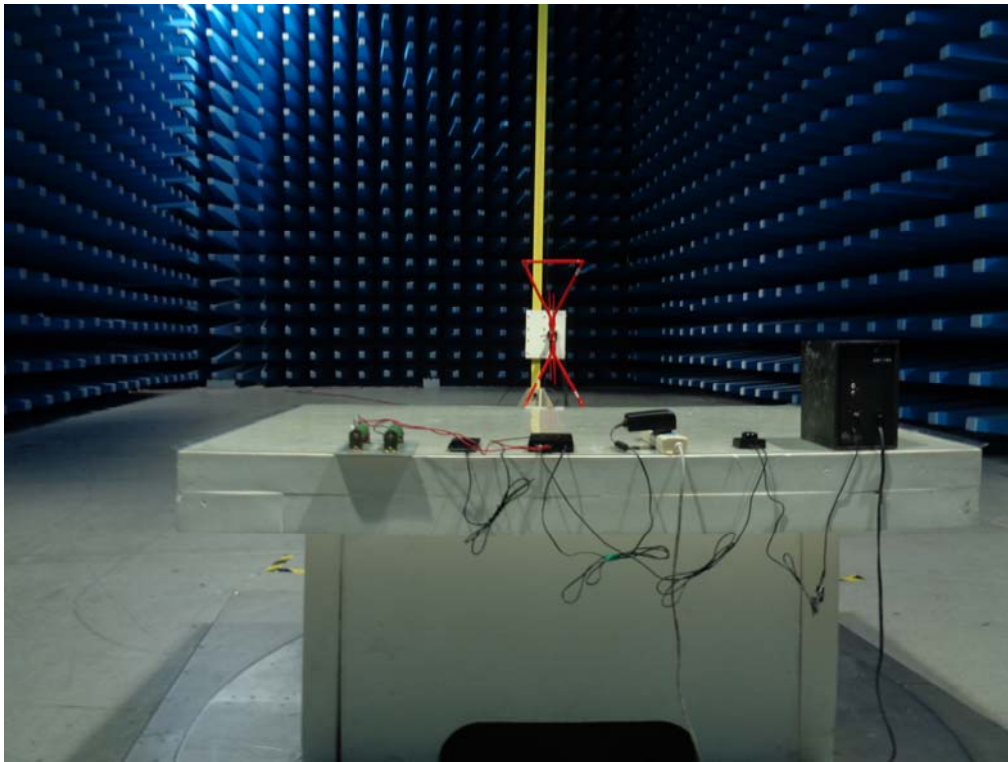

Radiated Spurious Emissions Test Setup Below 1GHz

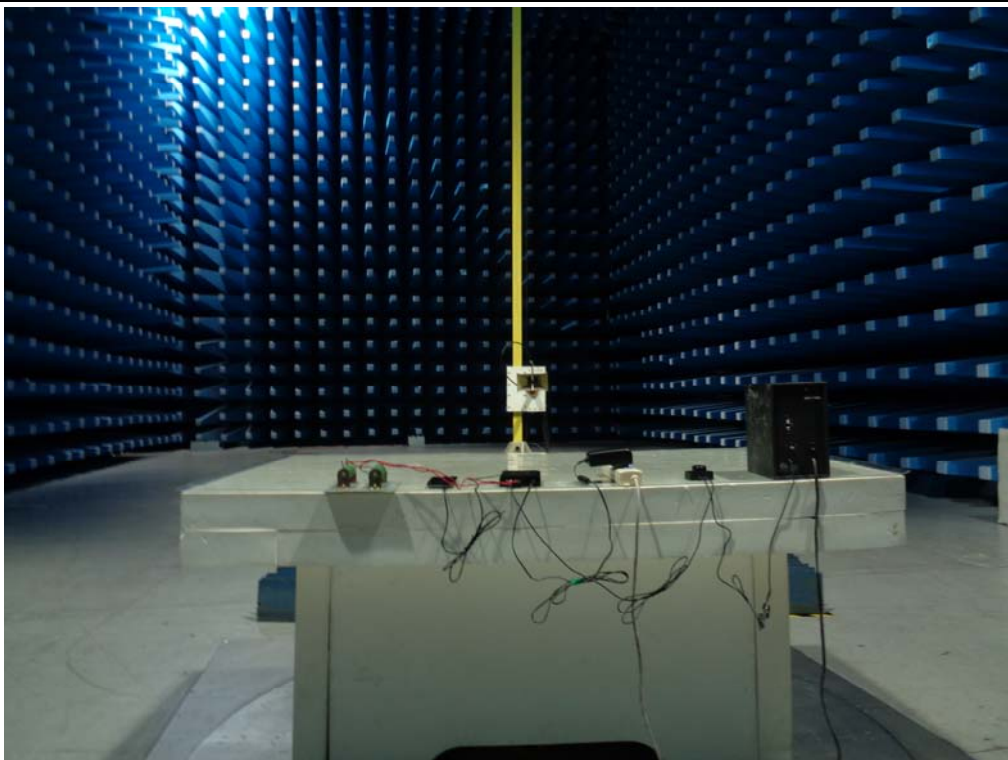


Radiated Spurious Emissions Test Setup Below 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for AC Line Conducted Emissions

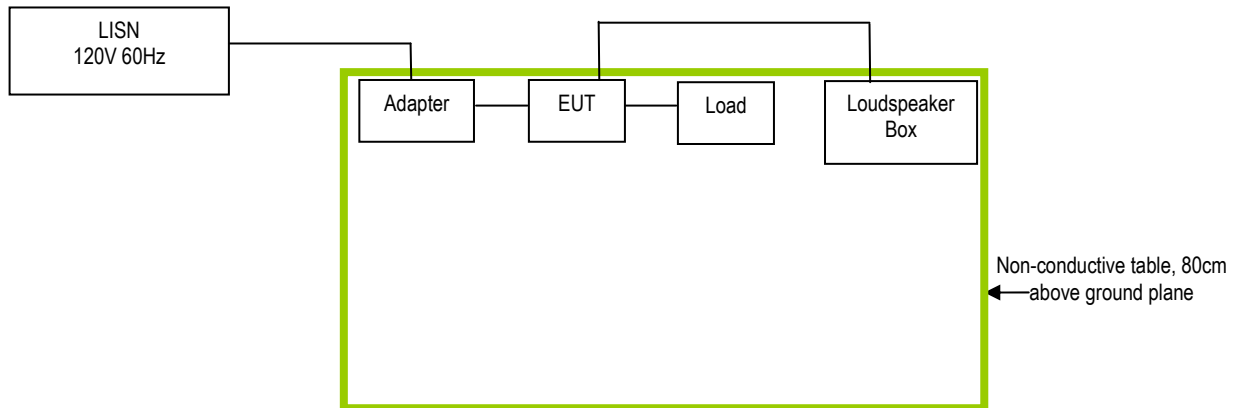

Block Configuration Diagram for Radiated Emissions

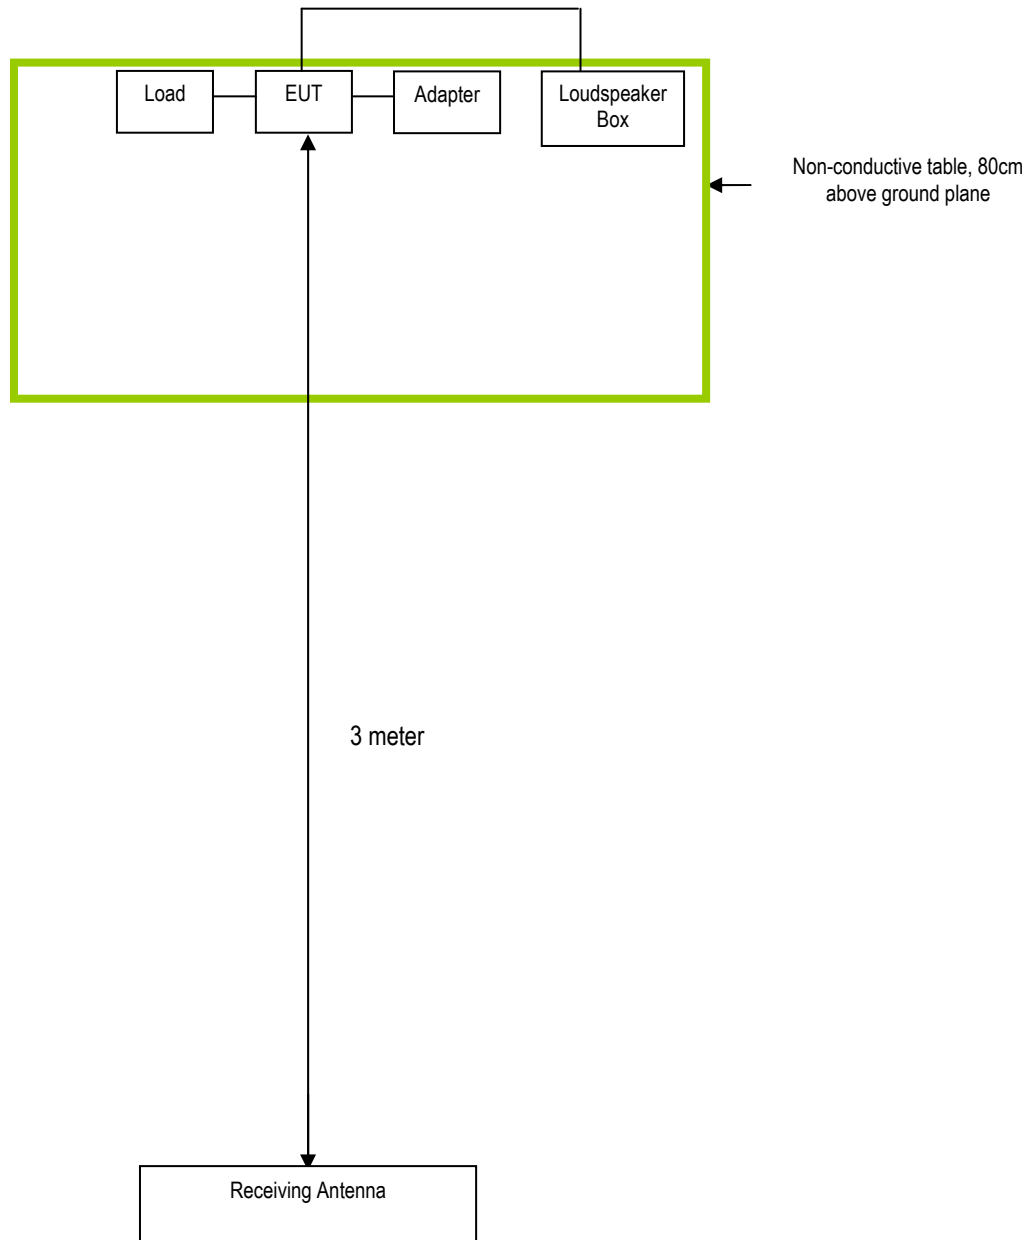

Test Report No.	14020873-FCC-R1-V1
Page	51 of 53

Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
Lenovo	Lenovo Laptop	E40& 0579A52	N/A	N/A
Load	N/A	N/A	N/A	N/A
Loudspeaker Box	N/A	N/A	N/A	N/A

Test Report No.	14020873-FCC-R1-V1
Page	52 of 53

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report No.	14020873-FCC-R1-V1
Page	53 of 53

Annex E. DECLARATION OF SIMILARITY

N/A