



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	CyberTAN Technology, Inc.
Applicant Address	99 Park Avenue III, Science Park, Hsinchu 308 Taiwan, R.O.C.
FCC ID	N89-ISB7105
Manufacturer's company	CyberTAN Technology, Inc.
Manufacturer Address	99 Park Avenue III, Science Park, Hsinchu 308 Taiwan, R.O.C.

Product Name	Internet Protocol Set Top Box Basic SD/HD with WiFi
Brand Name	Cisco
Model Name	ISB7105
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Aug. 01, 2012
Final Test Date	Nov. 02, 2012
Submission Type	Original Equipment
Operating Mode	Slave

Statement

Test result included is for the IEEE 802.11n (5150 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart E** and KDB 789033 -20120926.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE.....	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION.....	3
3.1. Product Details	3
3.2. Accessories	5
3.3. Table for Filed Antenna	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	9
3.9. Test Configurations.....	10
4. TEST RESULT.....	12
4.1. AC Power Line Conducted Emissions Measurement	12
4.2. 99% Occupied Bandwidth Measurement.....	16
4.3. Maximum Conducted Output Power Measurement.....	26
4.4. Power Spectral Density Measurement.....	31
4.5. Peak Excursion Measurement	37
4.6. Radiated Emissions Measurement.....	42
4.7. Band Edge Emissions Measurement.....	64
4.8. Frequency Stability Measurement.....	72
4.9. Antenna Requirements	74
5. LIST OF MEASURING EQUIPMENTS	75
6. TEST LOCATION.....	77
7. TAF CERTIFICATE OF ACCREDITATION.....	78
APPENDIX A. TEST PHOTOS.....	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O0812AB	Rev. 01	Initial issue of report	Nov. 12, 2012

1. CERTIFICATE OF COMPLIANCE

Product Name : Internet Protocol Set Top Box Basic SD/HD with WiFi
Brand Name : Cisco
Model Name : ISB7105
Applicant : CyberTAN Technology, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 01, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	11.70 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.1 dB
4.4	15.407(a)	Power Spectral Density	Complies	1.14 dB
4.5	15.407(a)	Peak Excursion	Complies	4.09 dB
4.6	15.407(b)	Radiated Emissions	Complies	1.08 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.51 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	16 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 16.80 MHz ; MCS0 (40MHz): 37.12 MHz
Conducted Output Power	Band 1: MCS0 (20MHz): 16.62 dBm ; MCS0 (40MHz): 16.53 dBm Band 2: MCS0 (20MHz): 23.38 dBm ; MCS0 (40MHz): 23.70 dBm Band 3: MCS0 (20MHz): 23.38 dBm ; MCS0 (40MHz): 23.90 dBm
TPC Function	Without TPC
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Two (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11n	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
									800nsGI		400nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

Power	Brand Holder	Model	Rating
Adapter 1	AcBel	ADB022	Input: 100-120V~50/60Hz, 0.6A Output: 12V - 2A
Adapter 2	LITEON	PB-1240-6SA1	Input: 100-120V~50/60Hz, 0.6A Output: 12V - 2A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Metal antenna	Connector	Gain (dBi)
1	-	-	Metal Antenna	I-PEX	3
2	-	-	Metal Antenna	I-PEX	3

Note:


For IEEE 802.11n (2TX, 4RX)

Chain 1 and Chain 2 can be used as transmitting antenna.

Chain 1 and Chain 2 could both transmit simultaneously.

Chain 1, Chain 2, Chain 3 and Chain 4 can be used as receive antenna.

Chain 1, Chain 2, Chain 3 and Chain 4 could both receive simultaneously

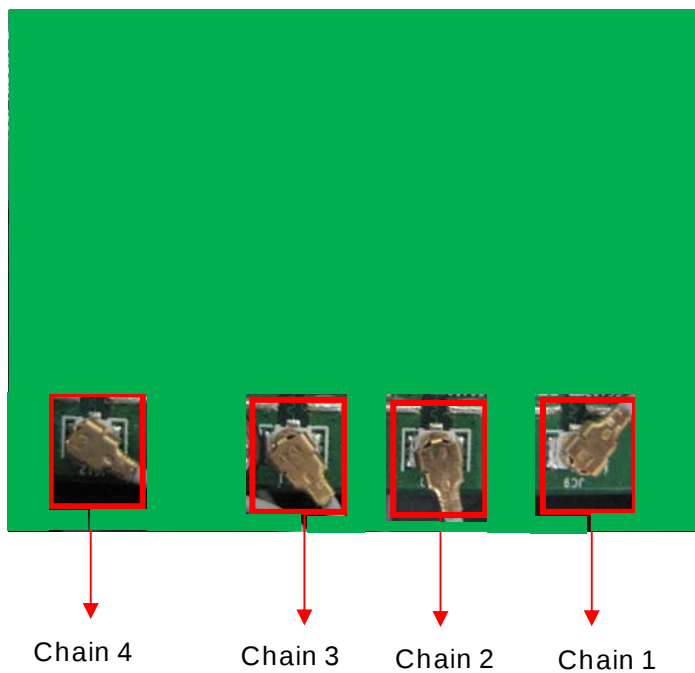

3.4. Table for Carrier Frequencies

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140.

For both 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 134.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	116	5580 MHz
	102	5510MHz	132	5660 MHz
	104	5520 MHz	134	5670 MHz
	108	5540 MHz	136	5680 MHz
	110	5550 MHz	140	5700 MHz
	112	5560 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	CTX		Auto	-	-
Max. Conducted Output Power	MCS0/20MHz	Band 1~2	7.2Mbps	36/40/48/52/60/64	1+2
		Band 3	7.2Mbps	100/116/140	1+2
	MCS0/40MHz	Band 1~2	15Mbps	38/46/54/62	1+2
		Band 3	15Mbps	102/134	1+2
Maximum Conducted Output Power	MCS0/20MHz	Band 1~2	7.2Mbps	36/40/48/52/60/64	1+2
		Band 3	7.2Mbps	100/116/140	1+2
	MCS0/40MHz	Band 1~2	15Mbps	38/46/54/62	1+2
		Band 3	15Mbps	102/134	1+2
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Peak Excursion	MCS0/20MHz	Band 1~2	7.2Mbps	36/40/48/52/60/64	1+2
		Band 3	7.2Mbps	100/116/140	1+2
	MCS0/40MHz	Band 1~2	15Mbps	38/46/54/62	1+2
		Band 3	15Mbps	102/134	1+2
Radiated Emission Below 1GHz	CTX		Auto	-	-
Radiated Emission Above 1GHz	MCS0/20MHz	Band 1~2	7.2Mbps	36/40/48/52/60/64	1+2
		Band 3	7.2Mbps	100/116/140	1+2
	MCS0/40MHz	Band 1~2	15Mbps	38/46/54/62	1+2
		Band 3	15Mbps	102/134	1+2
Band Edge Emission	MCS0/20MHz	Band 1~2	7.2Mbps	36/40/48/52/60/64	1+2
		Band 3	7.2Mbps	100/140	1+2
	MCS0/40MHz	Band 1~2	15Mbps	38/46/54/62	1+2
		Band 3	15Mbps	102/140	1+2
Frequency Stability	Un-modulation		-	40/60	N/A

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1.: EUT-Lying +LITEON adapter

Mode 2.: EUT-Lying +AcBel adapter

Due to Mode 1 generated the worst test result, so it was recorded in this report.

For Radiated Emission test:

Mode 1.: EUT-Lying +LITEON adapter

Mode 2.: EUT-Lying +AcBel adapter

For 30MHz~1GHz:

Mode 1 generated the worst case, so it was selected to perform test and its test result was written in the report.

For above1 GHz:

Mode 1 generated the worst case, so it was selected to perform test and its test result was written in the report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Client Notebook	IBM	L3AT171	-
Client AP Router	CISCO	linksys	-

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Telnet								
Frequency	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
20MHz MCS0	13	13	13	20	20	20	20	21	19


Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Telnet						
Frequency	5190 MHz	5230 MHz	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
40MHz MCS0	13	13	21	17	16	22	21

During the test, "Telnet" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration

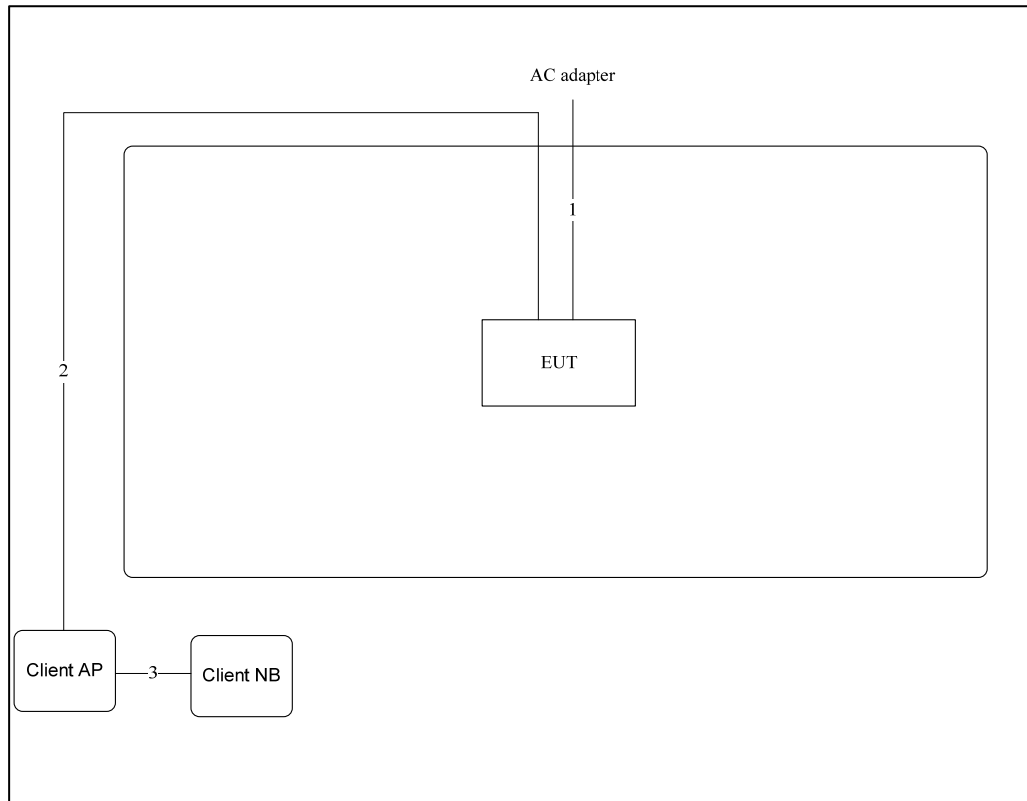

Item	Cable	Shield	Length
1	AC adapter	No	2M
2	RJ-45 cable	No	10M
3	RJ-45 cable	No	1M

3.9.2. AC Power Line Conduction Emissions Test Configuration

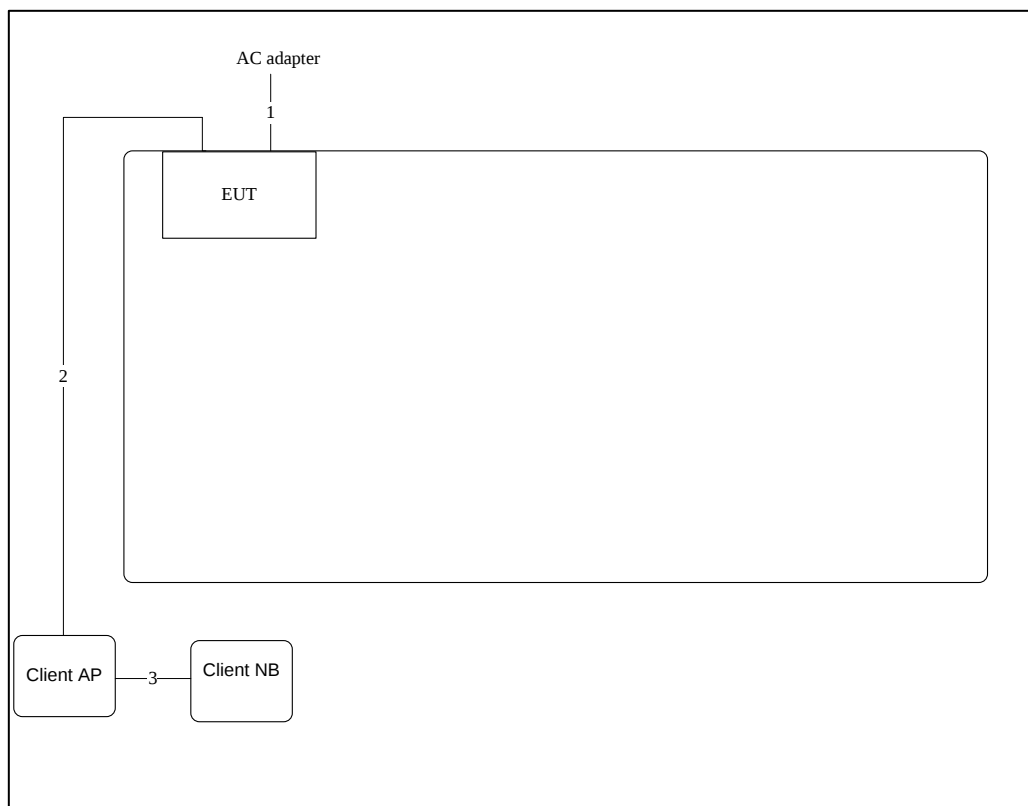

Item	Cable	Shield	Length
1	AC adapter	No	2M
2	RJ-45 cable	No	10M
3	RJ-45 cable	No	1M

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

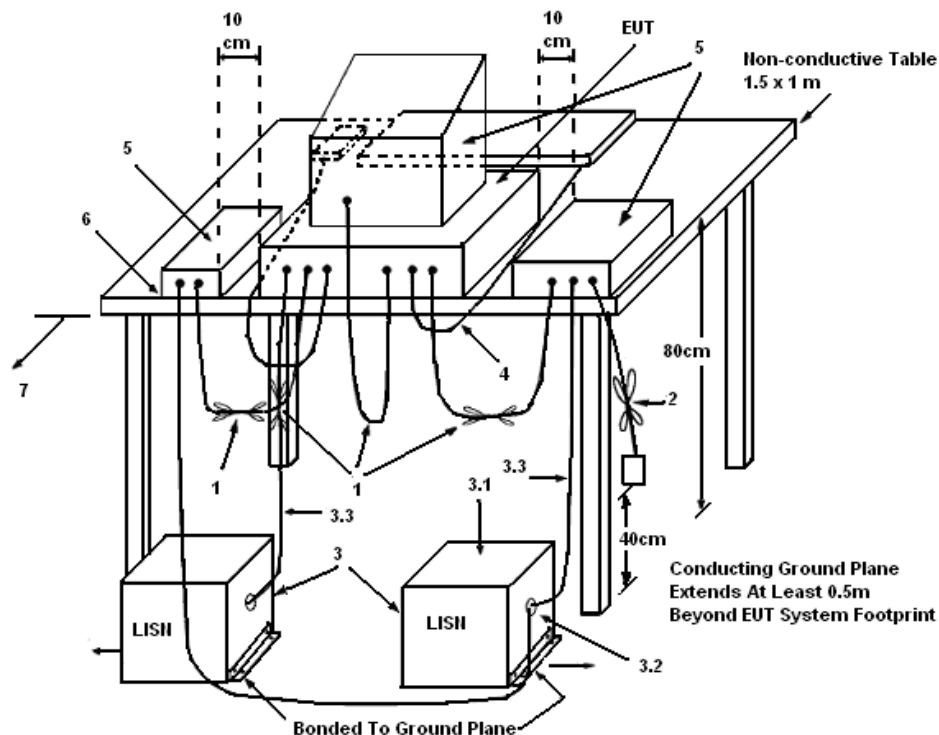

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	63%
Test Engineer	Ryo Fan	Phase	Line
Configuration	CTX / Mode 1		

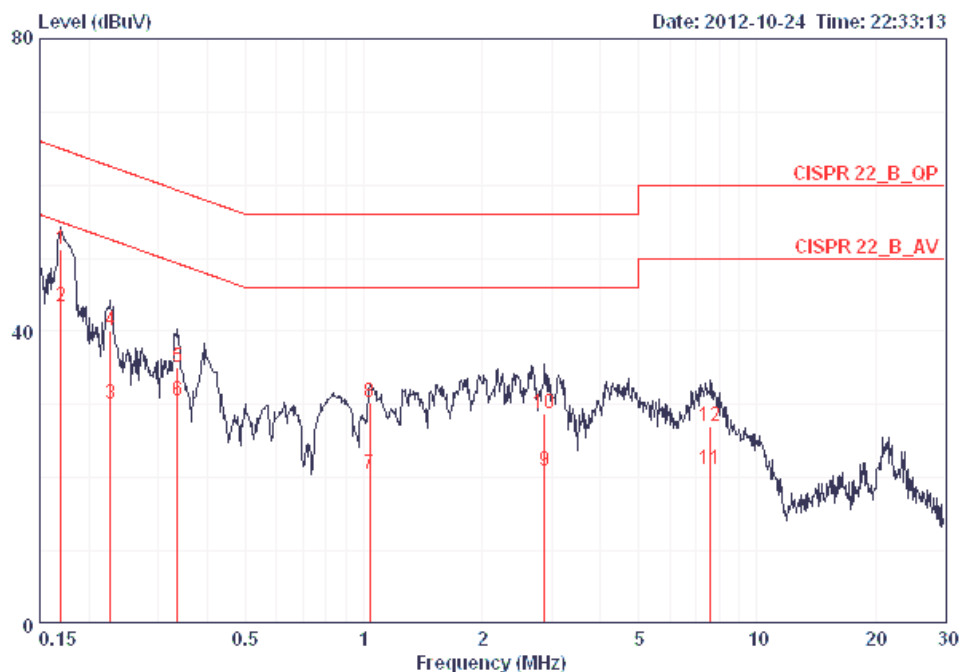

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 @	0.16944	51.17	-13.82	64.99	50.81	0.16	0.20	LINE	QP
2 @	0.16944	43.29	-11.70	54.99	42.93	0.16	0.20	LINE	AVERAGE
3	0.22676	30.16	-22.41	52.57	29.81	0.15	0.20	LINE	AVERAGE
4	0.22676	40.04	-22.53	62.57	39.69	0.15	0.20	LINE	QP
5	0.33562	35.05	-24.26	59.31	34.70	0.15	0.20	LINE	QP
6	0.33562	30.41	-18.90	49.31	30.06	0.15	0.20	LINE	AVERAGE
7	1.037	20.39	-25.61	46.00	20.03	0.17	0.19	LINE	AVERAGE
8	1.037	30.32	-25.68	56.00	29.96	0.17	0.19	LINE	QP
9	2.884	20.88	-25.12	46.00	20.48	0.20	0.20	LINE	AVERAGE
10	2.884	28.73	-27.27	56.00	28.33	0.20	0.20	LINE	QP
11	7.606	21.24	-28.76	50.00	20.55	0.29	0.40	LINE	AVERAGE
12	7.606	26.93	-33.07	60.00	26.24	0.29	0.40	LINE	QP

Temperature	23°C	Humidity	63%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	CTX/ Mode 1		

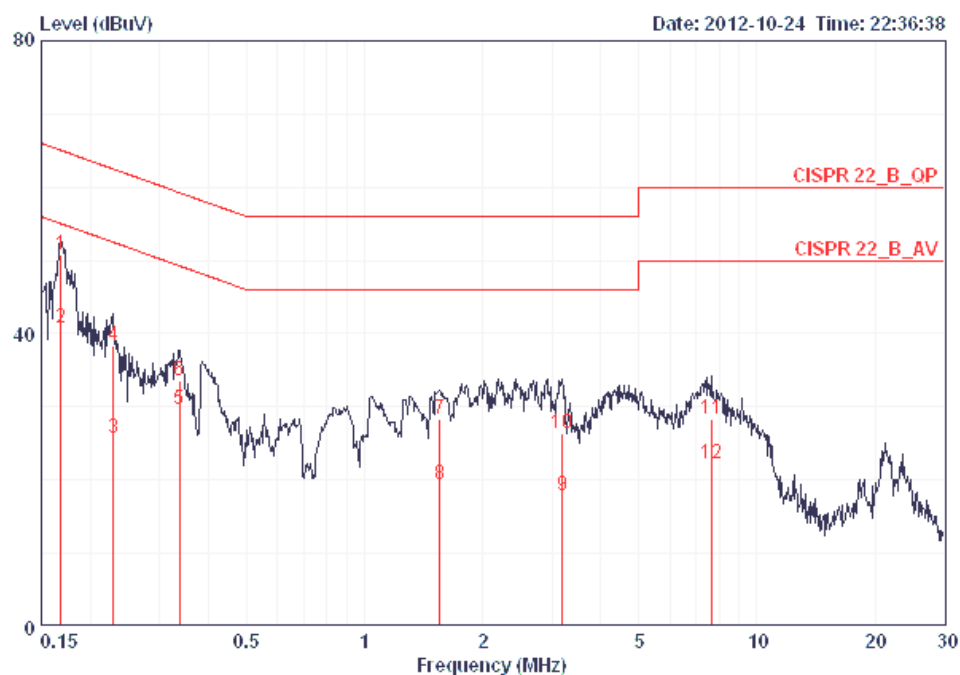

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16854	50.73	-14.30	65.03	50.45	0.08	0.20	NEUTRAL	QP
2	0.16854	40.77	-14.26	55.03	40.49	0.08	0.20	NEUTRAL	AVERAGE
3	0.22918	25.65	-26.83	52.48	25.37	0.08	0.20	NEUTRAL	AVERAGE
4	0.22918	38.33	-24.15	62.48	38.05	0.08	0.20	NEUTRAL	QP
5	0.33740	29.66	-19.61	49.27	29.38	0.08	0.20	NEUTRAL	AVERAGE
6	0.33740	33.52	-25.75	59.27	33.24	0.08	0.20	NEUTRAL	QP
7	1.552	28.35	-27.65	56.00	28.14	0.10	0.11	NEUTRAL	QP
8	1.552	19.29	-26.71	46.00	19.08	0.10	0.11	NEUTRAL	AVERAGE
9	3.190	17.98	-28.02	46.00	17.62	0.12	0.24	NEUTRAL	AVERAGE
10	3.190	26.41	-29.59	56.00	26.05	0.12	0.24	NEUTRAL	QP
11	7.646	28.33	-31.67	60.00	27.74	0.20	0.40	NEUTRAL	QP
12	7.646	22.22	-27.78	50.00	21.63	0.20	0.40	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 3000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

4.2.4. Test Setup Layout

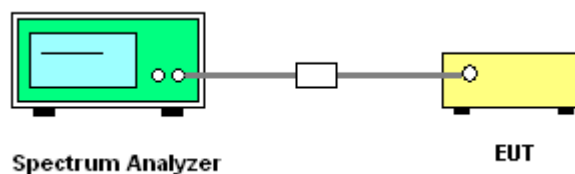

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	26°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n


Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	21.12	16.32
40	5200 MHz	21.60	16.00
48	5240 MHz	21.44	16.00
52	5260 MHz	21.60	16.32
60	5300 MHz	21.44	16.64
64	5320 MHz	21.12	16.80
100	5500 MHz	21.28	16.48
116	5580 MHz	21.44	16.64
140	5700 MHz	22.08	16.32

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	42.56	36.80
46	5230 MHz	42.88	36.80
54	5270 MHz	44.16	37.12
62	5310 MHz	43.84	37.12
102	5510MHz	44.16	36.80
110	5550 MHz	44.16	36.80
134	5670 MHz	43.84	37.12

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5180 MHz

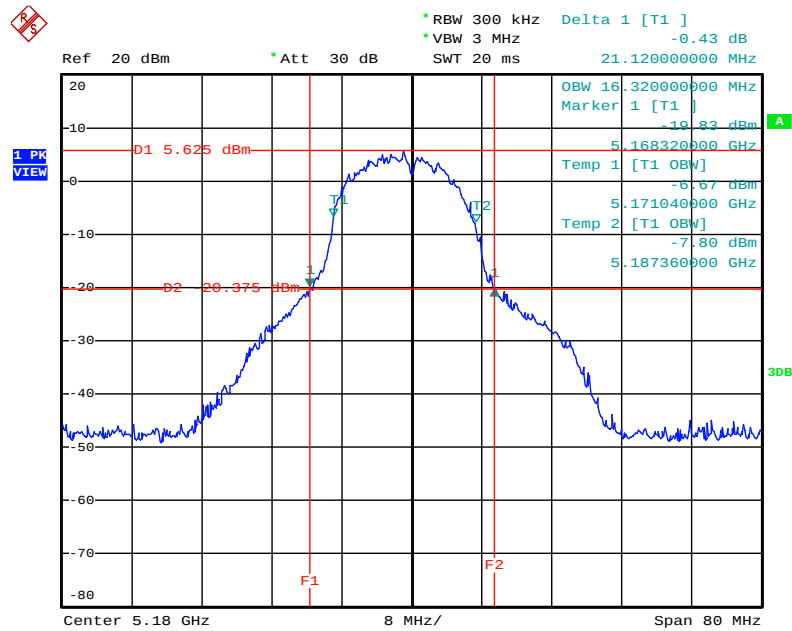


Date: 2.NOV.2012 17:49:54

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5200 MHz

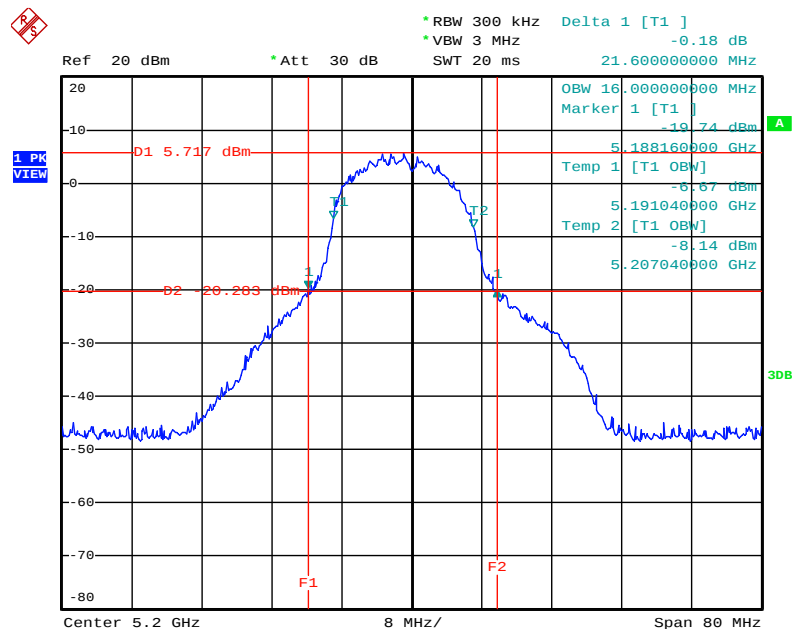


Date: 2.NOV.2012 17:50:39

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5240 MHz

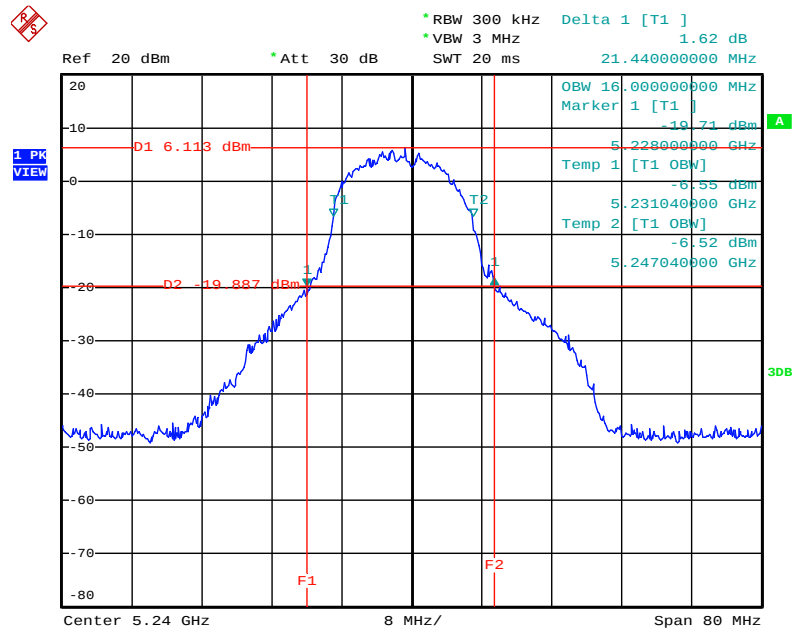


Date: 2.NOV.2012 17:53:07

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5260 MHz

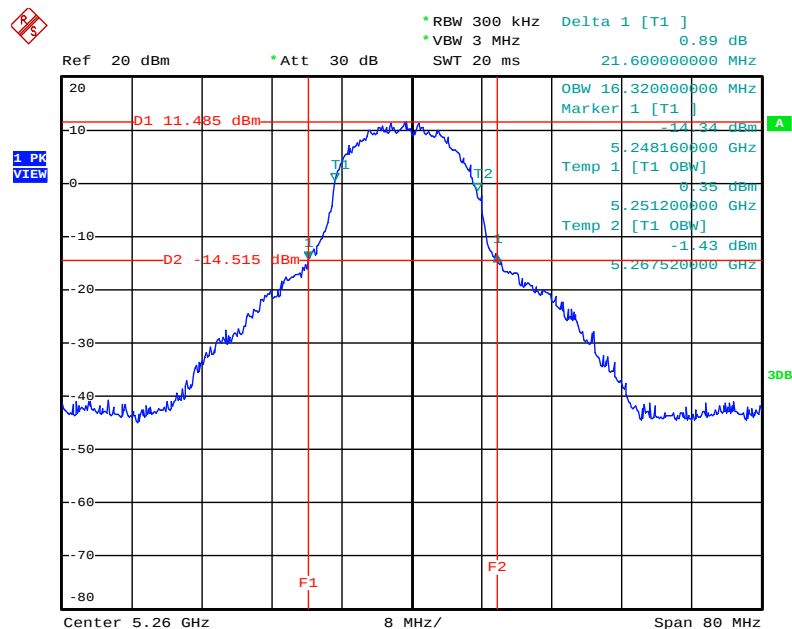


Date: 2.NOV.2012 17:54:54

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5300 MHz

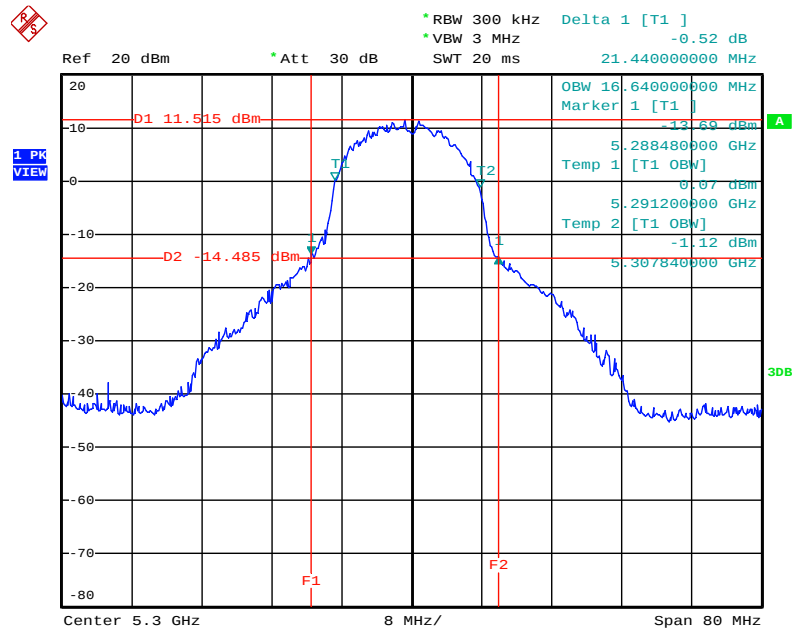


Date: 2.NOV.2012 17:56:54

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5320 MHz

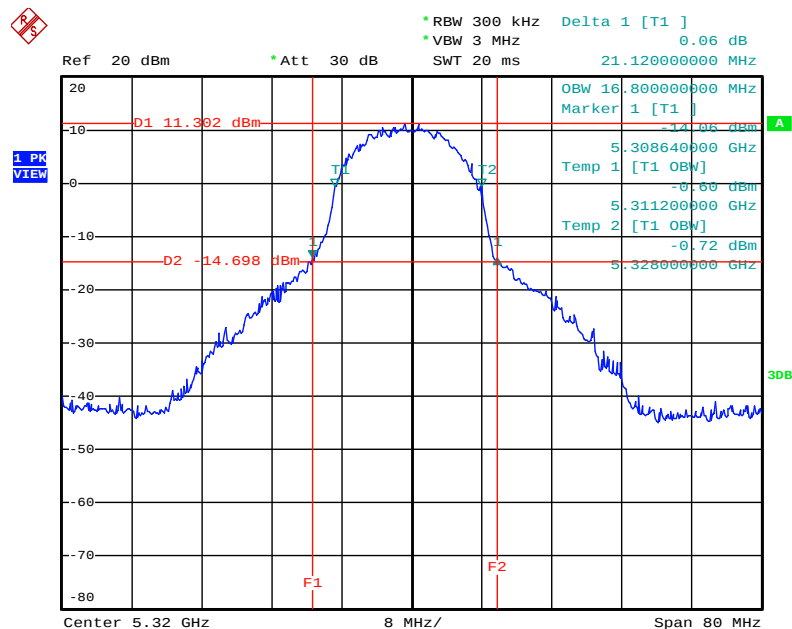


Date: 2.NOV.2012 17:57:27

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5500 MHz

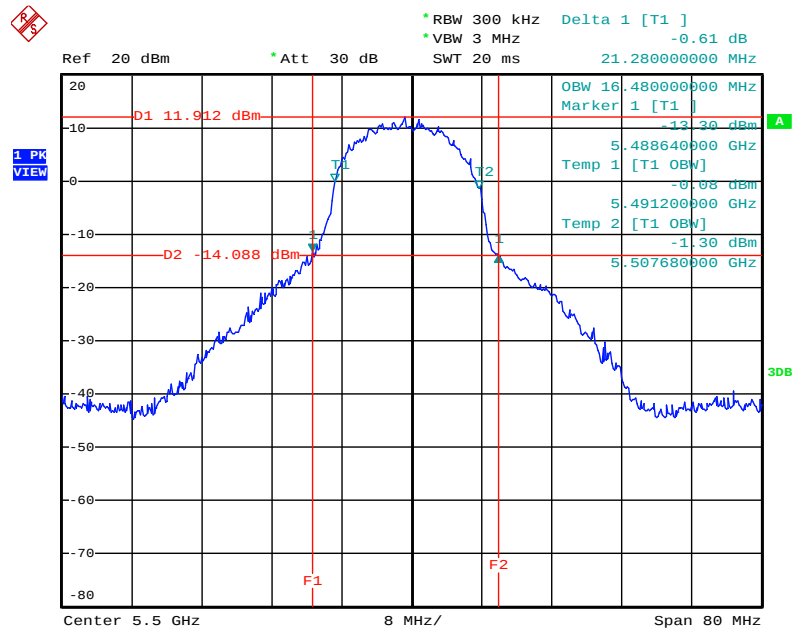


Date: 2.NOV.2012 17:58:32

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5580 MHz

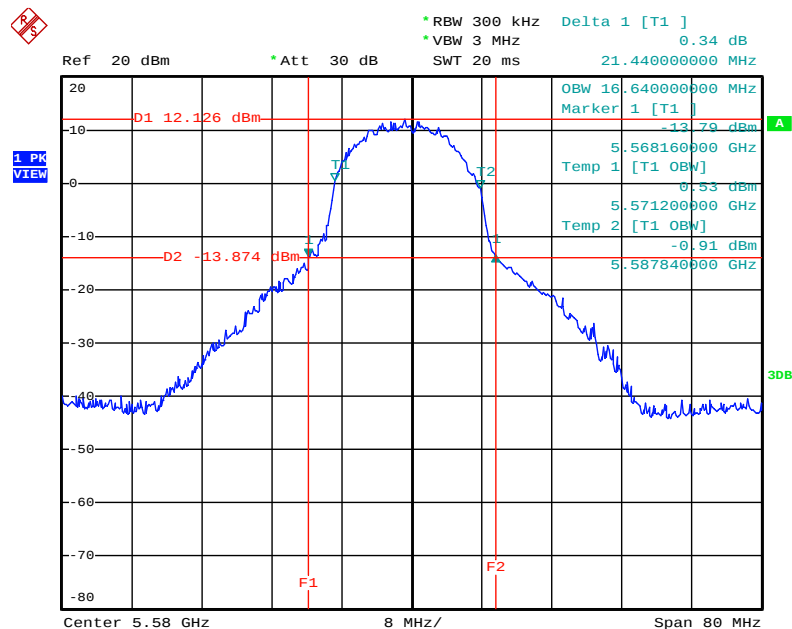


Date: 2.NOV.2012 18:01:04

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5700 MHz

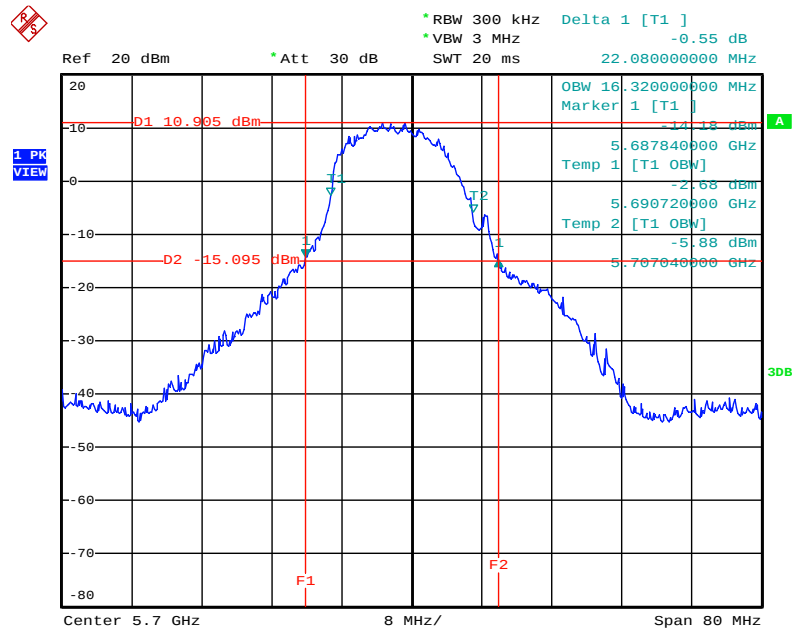


Date: 2.NOV.2012 18:01:56

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5190 MHz

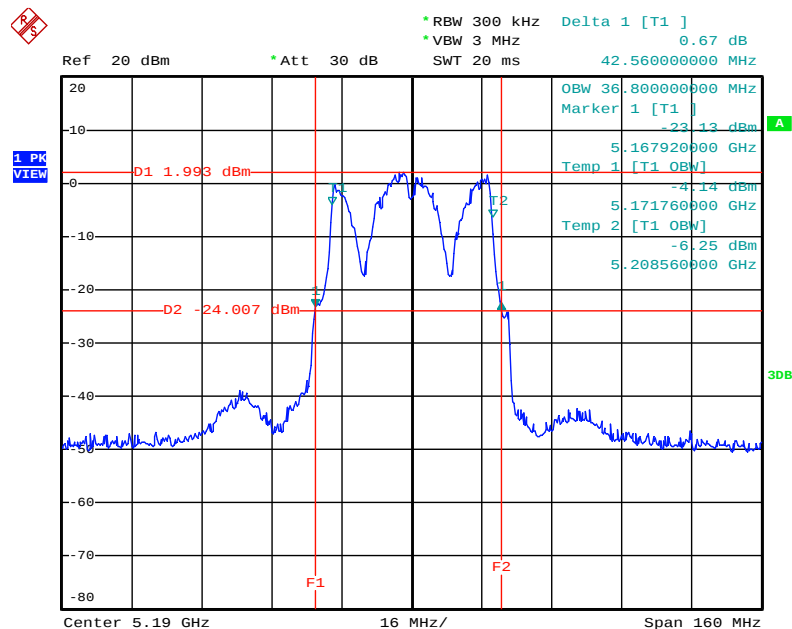


Date: 2.NOV.2012 18:03:57

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5230 MHz

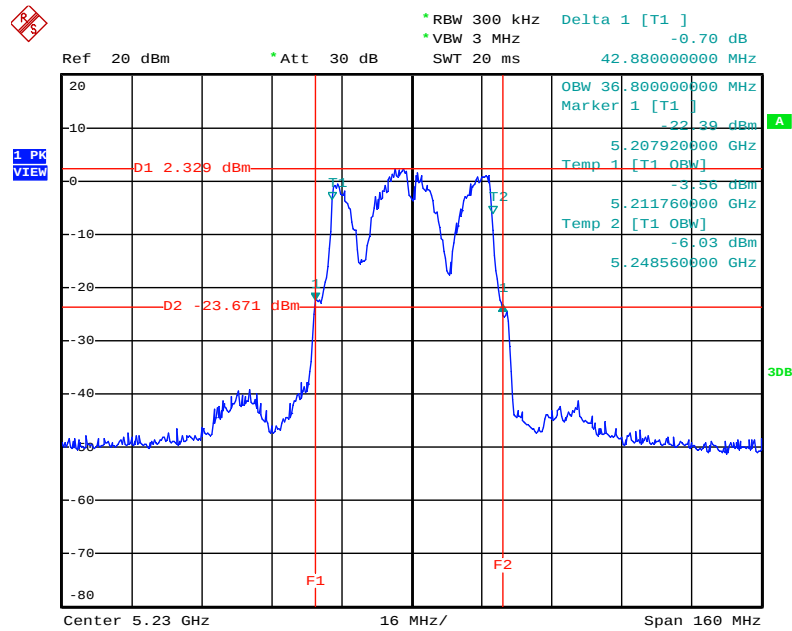


Date: 2.NOV.2012 18:04:49

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5270 MHz

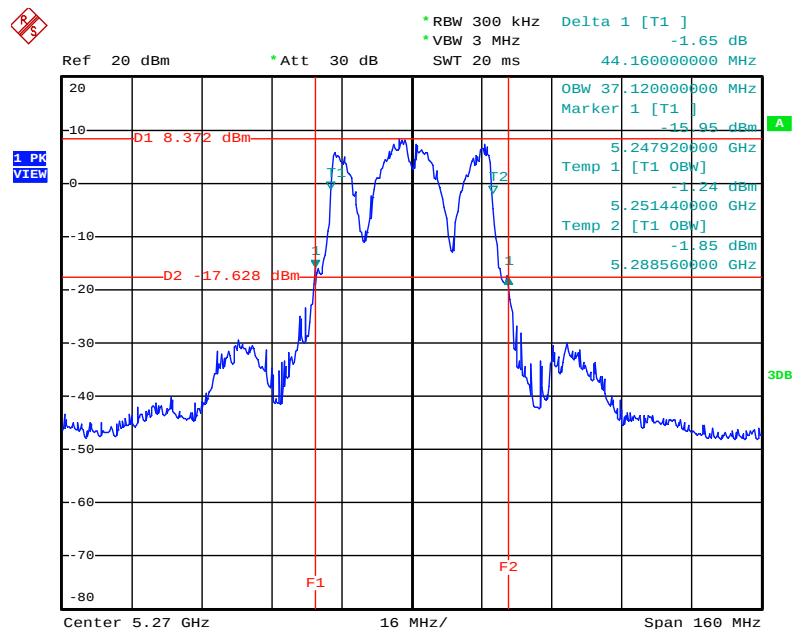


Date: 2.NOV.2012 18:05:27

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5310 MHz

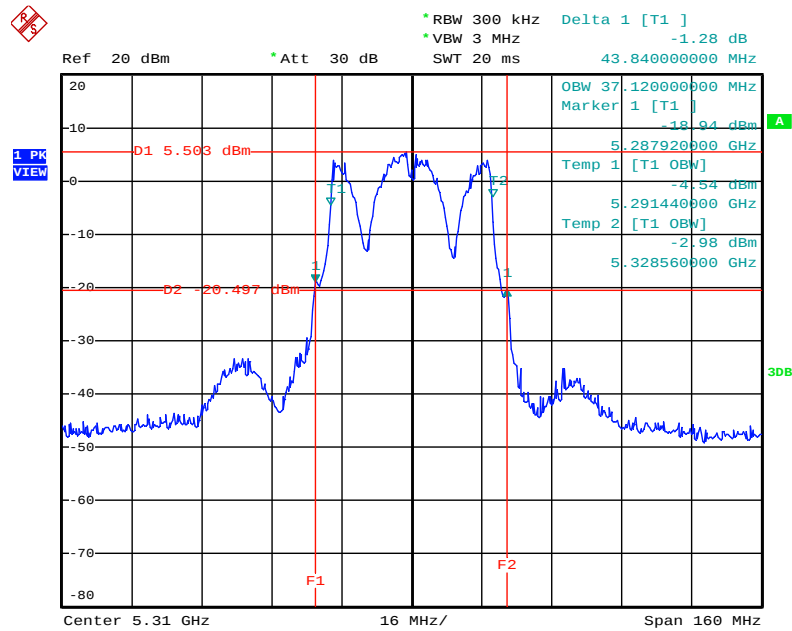


Date: 2.NOV.2012 18:06:08

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5510MHz

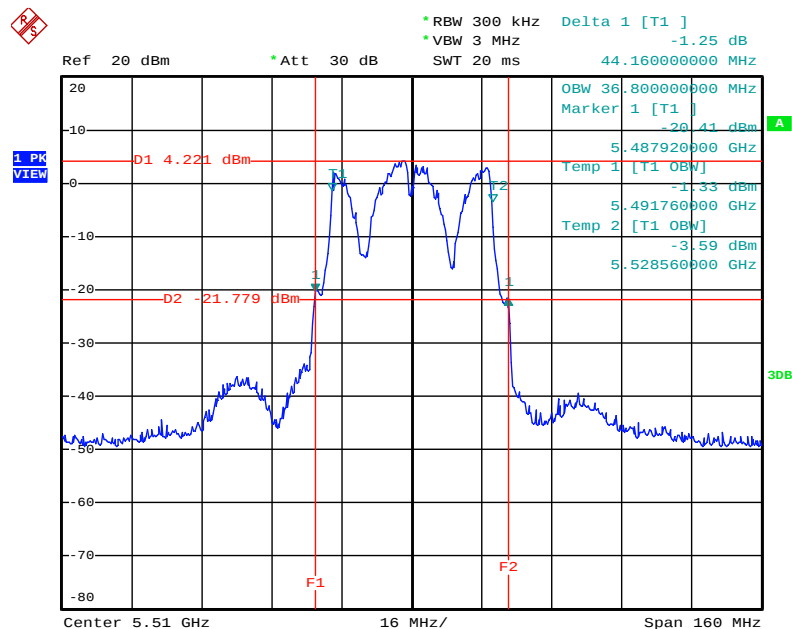


Date: 2.NOV.2012 18:06:57

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5550 MHz

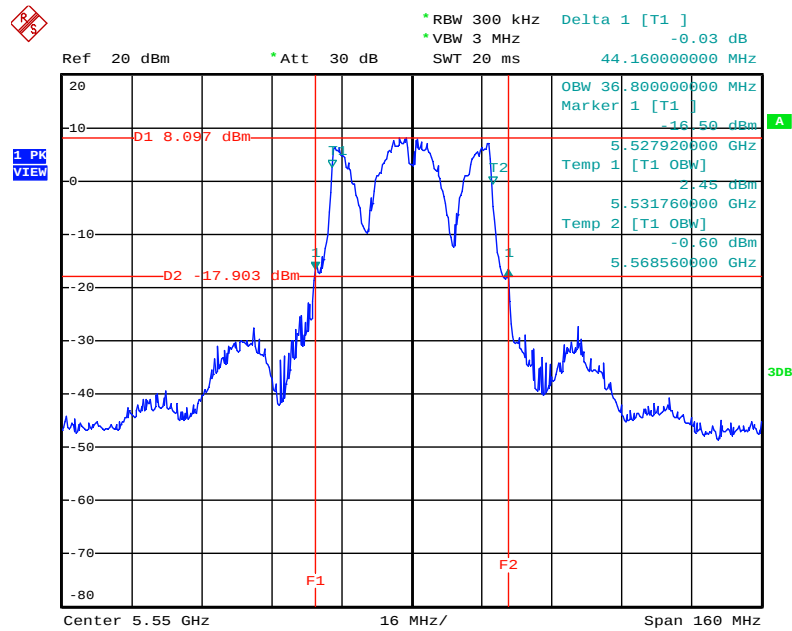

Date: 2.NOV.2012 18:07:50

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5670 MHz

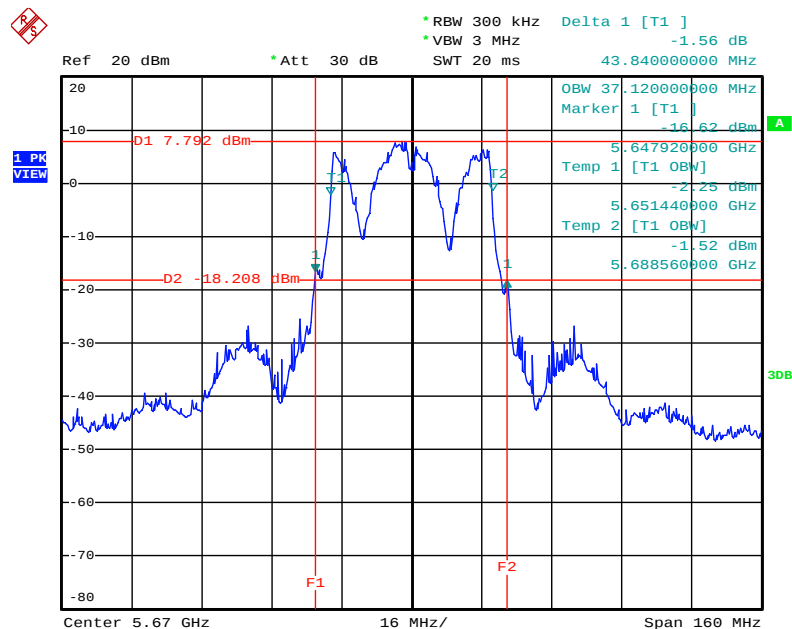

Date: 2.NOV.2012 18:08:28

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power =>(4) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n
Test Date	Nov. 02, 2012		

Configuration IEEE 802.11n MCS0 20MHz / Chain 1

Channel	Frequency	Conducted Power (dBm)
36	5180 MHz	13.75
40	5200 MHz	13.51
48	5240 MHz	13.53
52	5260 MHz	20.48
60	5300 MHz	20.41
64	5320 MHz	20.33
100	5500 MHz	19.51
116	5580 MHz	20.49
140	5700 MHz	19.57

Configuration IEEE 802.11n MCS0 20MHz / Chain 2

Channel	Frequency	Conducted Power (dBm)
36	5180 MHz	13.46
40	5200 MHz	13.41
48	5240 MHz	13.37
52	5260 MHz	20.26
60	5300 MHz	20.08
64	5320 MHz	20.06
100	5500 MHz	19.53
116	5580 MHz	20.25
140	5700 MHz	19.33

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	16.62	17.00	Complies
40	5200 MHz	16.47	17.00	Complies
48	5240 MHz	16.46	17.00	Complies
52	5260 MHz	23.38	24.00	Complies
60	5300 MHz	23.26	24.00	Complies
64	5320 MHz	23.21	24.00	Complies
100	5500 MHz	22.53	24.00	Complies
116	5580 MHz	23.38	24.00	Complies
140	5700 MHz	22.46	24.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Chain 1

Channel	Frequency	Conducted Power (dBm)
38	5190 MHz	13.54
46	5230 MHz	13.62
54	5270 MHz	20.85
62	5310 MHz	17.07
102	5510MHz	15.33
110	5550 MHz	21.03
134	5670 MHz	20.58

Configuration IEEE 802.11nMCS0 40MHz / Chain 2

Channel	Frequency	Conducted Power (dBm)
38	5190 MHz	13.49
46	5230 MHz	13.19
54	5270 MHz	20.53
62	5310 MHz	17.05
102	5510MHz	15.11
110	5550 MHz	20.75
134	5670 MHz	20.02

Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	16.53	17.00	Complies
46	5230 MHz	16.42	17.00	Complies
54	5270 MHz	23.70	24.00	Complies
62	5310 MHz	20.07	24.00	Complies
102	5510MHz	18.23	24.00	Complies
110	5550 MHz	23.90	24.00	Complies
134	5670 MHz	23.32	24.00	Complies

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5470-5725	11

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance with KDB 662911 in-Band Power Spectral Density (PSD) Measurements (1) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

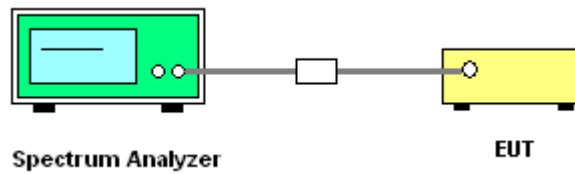

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n
Test Date	Nov. 02, 2012		

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	2.85	3.99	Complies
40	5200 MHz	2.74	3.99	Complies
48	5240 MHz	2.80	3.99	Complies
52	5260 MHz	8.73	10.99	Complies
60	5300 MHz	8.05	10.99	Complies
64	5320 MHz	7.98	10.99	Complies
100	5500 MHz	8.71	10.99	Complies
116	5580 MHz	9.09	10.99	Complies
140	5700 MHz	8.19	10.99	Complies

Note: $Directional\ gain = G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 6.01\text{dBi} > 6\text{dBi}$, So Band1 Limit = 3.99dBm/MHz

Note: $Directional\ gain = G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 6.01\text{dBi} > 6\text{dBi}$, So Band2 Limit = 10.99dBm/MHz


Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-0.94	3.99	Complies
46	5230 MHz	-0.67	3.99	Complies
54	5270 MHz	5.07	10.99	Complies
62	5310 MHz	2.66	10.99	Complies
102	5510MHz	1.65	10.99	Complies
110	5550 MHz	5.33	10.99	Complies
140	5700 MHz	5.67	10.99	Complies


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5180 MHz

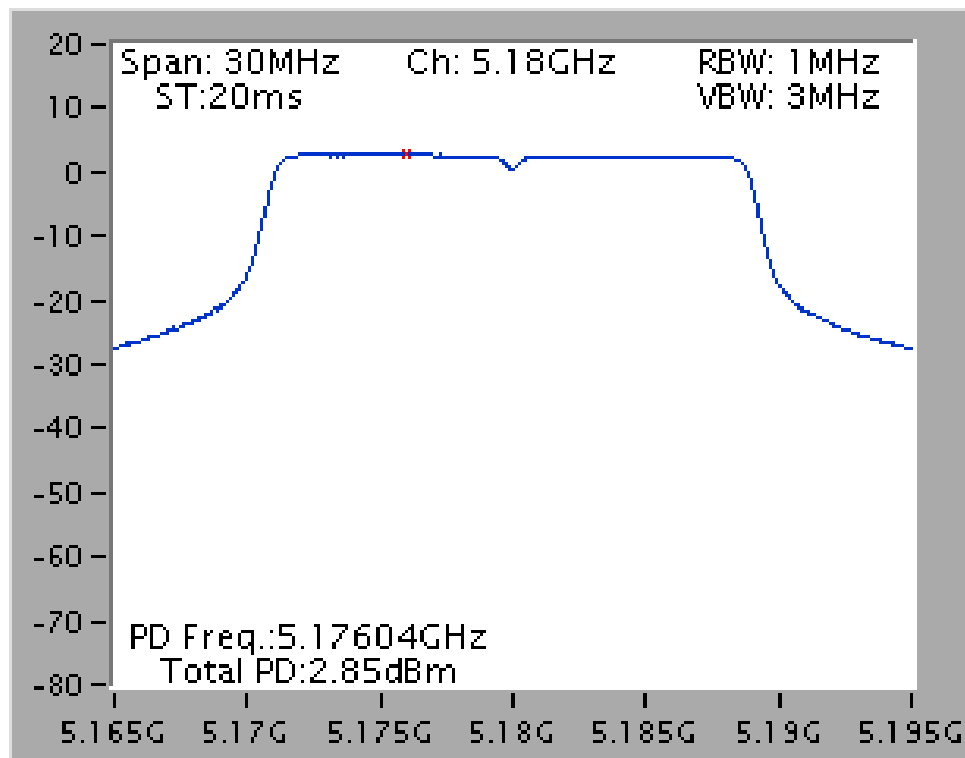


Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5260 MHz

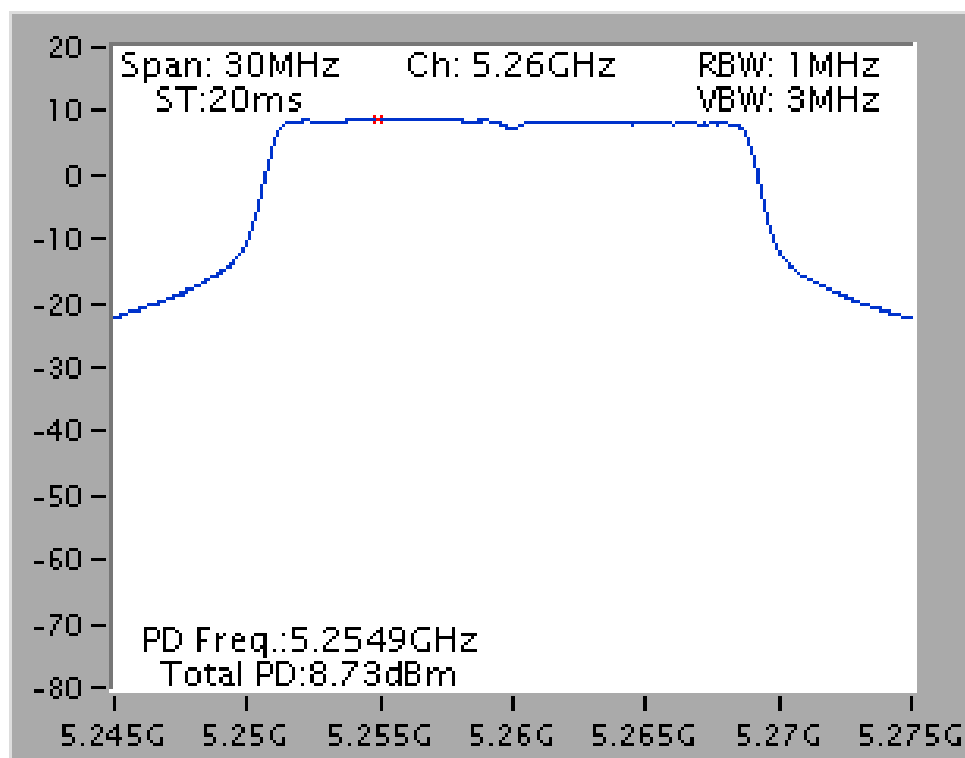


Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5580 MHz

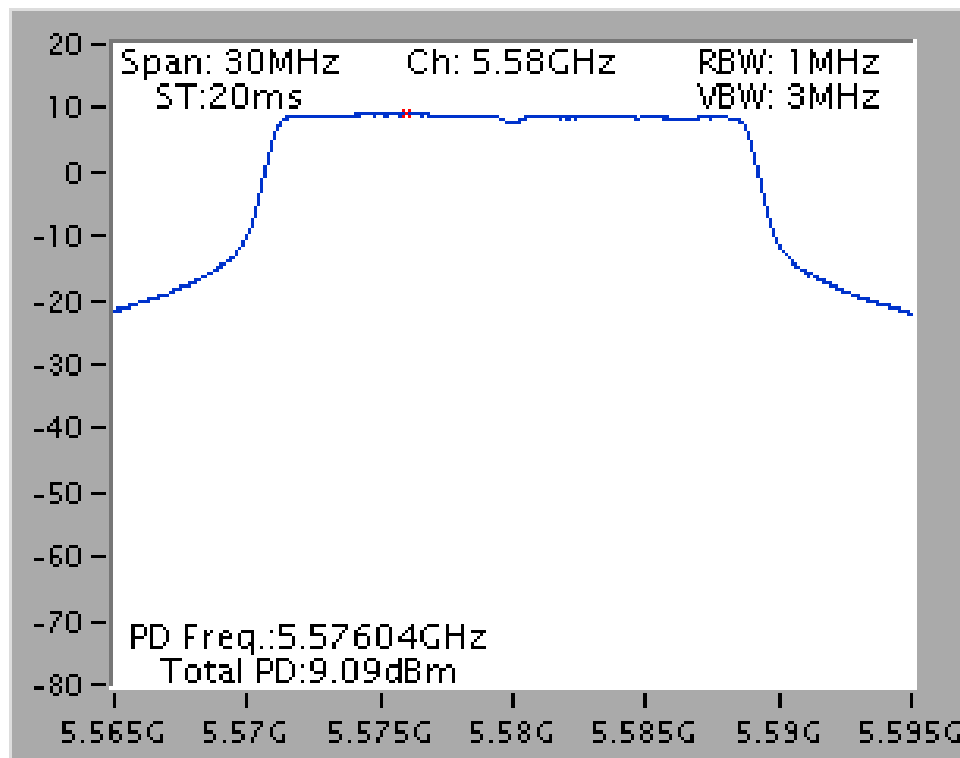


Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5230 MHz

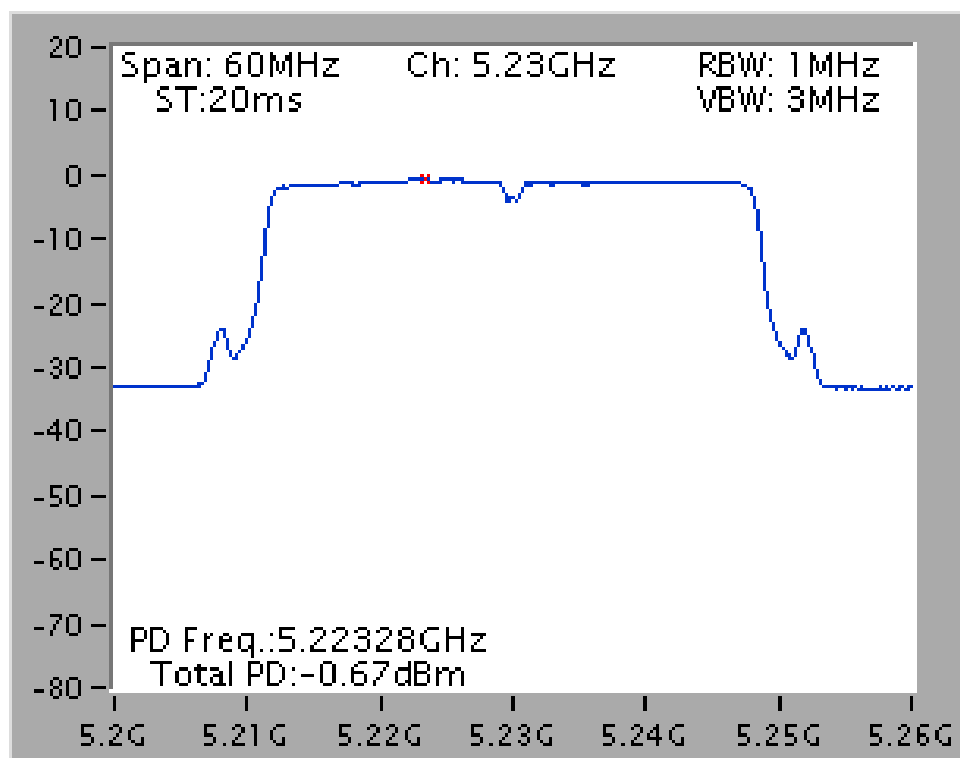

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5270 MHz

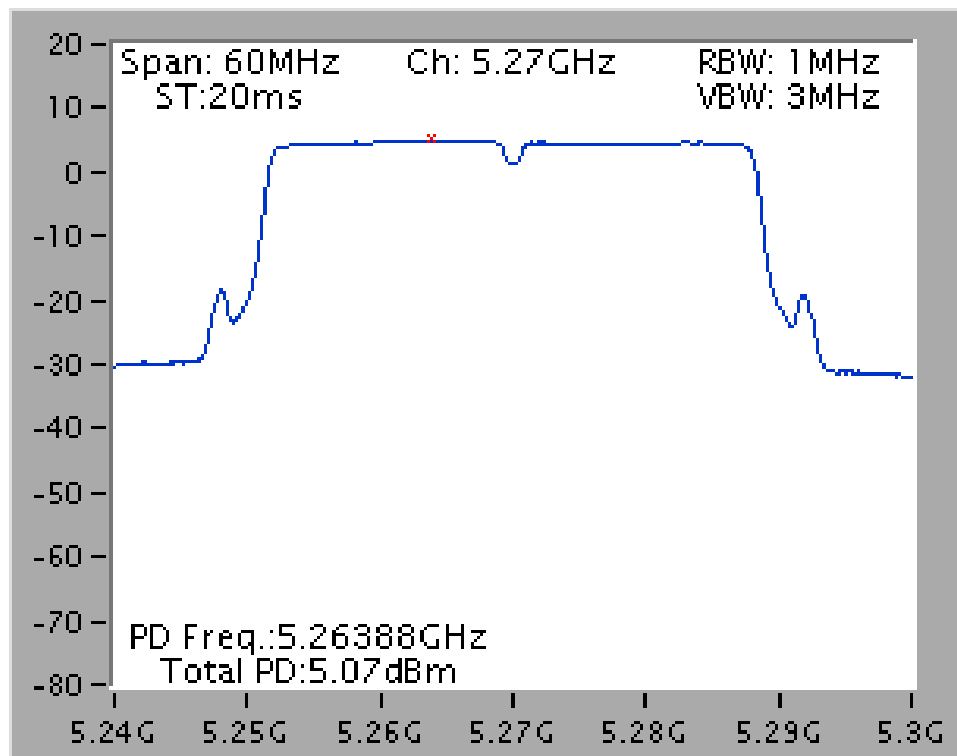

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5670 MHz

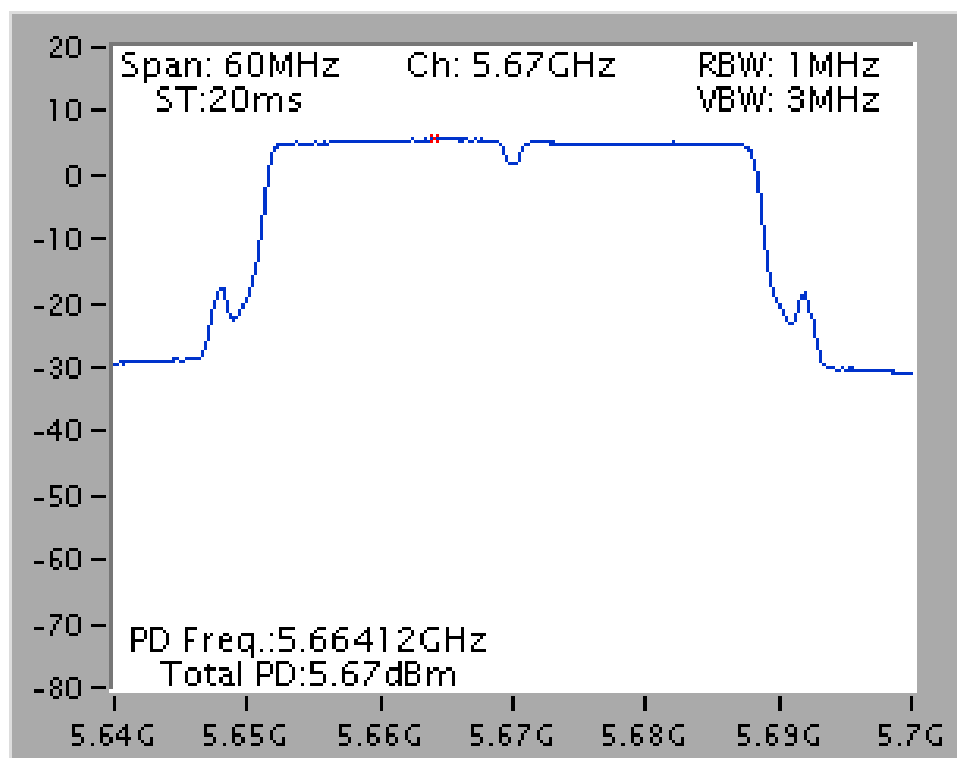

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz (Peak Trace) / 1MHz (Average Trace)
VB	3MHz (Peak Trace) / 3MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS
Trace	Peak : Trace :Max hold/Average: Trace Average Sweep Count 100
Sweep Time	AUTO

4.5.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.
5. Testing each modulation mode on a single channel is sufficient to demonstrate compliance with the peak excursion requirement.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	26°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	8.51	13	Complies
64	5320 MHz	8.55	13	Complies
116	5580 MHz	8.81	13	Complies


Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
38	5190 MHz	8.64	13	Complies
54	5270 MHz	8.88	13	Complies
134	5670 MHz	8.91	13	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5180 MHz

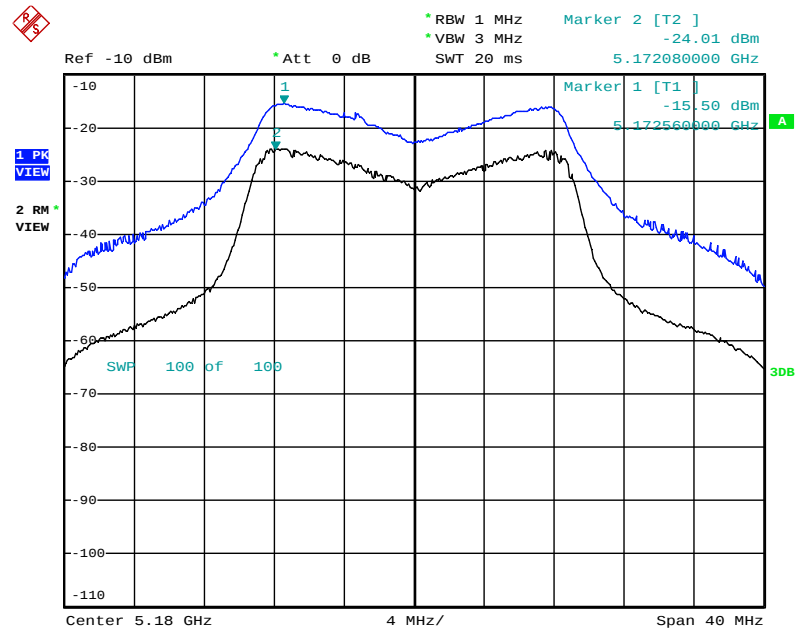


Date: 2.NOV.2012 19:10:49

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5320 MHz

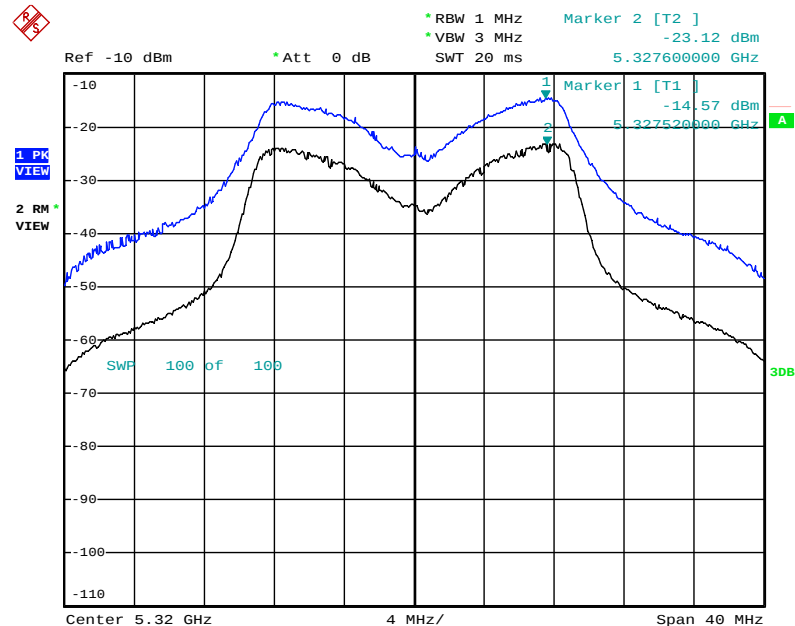


Date: 2.NOV.2012 19:12:13

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 / 5580 MHz

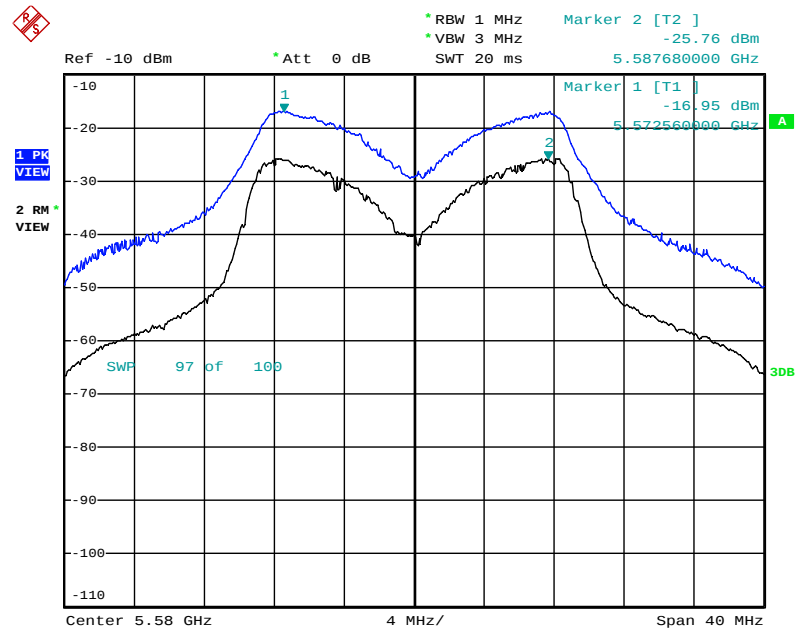


Date: 2.NOV.2012 19:13:29

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5190 MHz

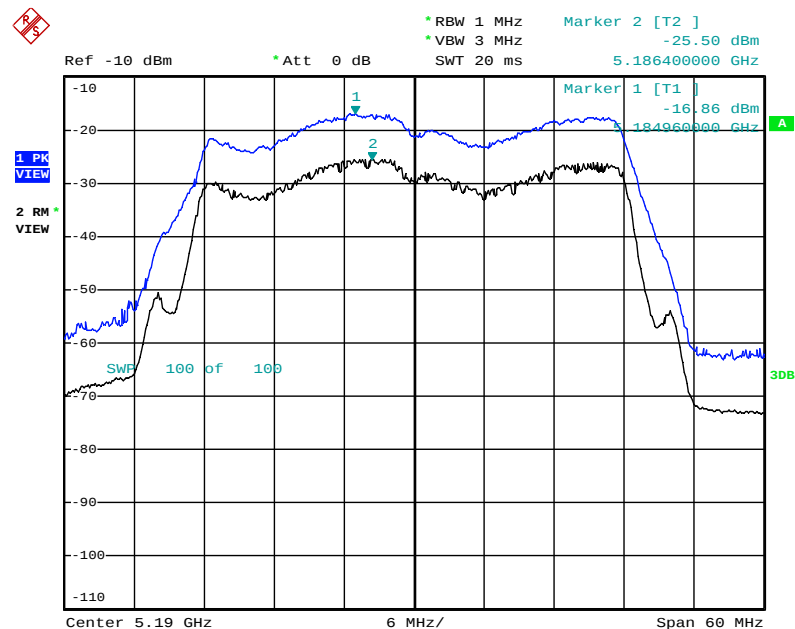


Date: 2.NOV.2012 19:16:38

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5270 MHz

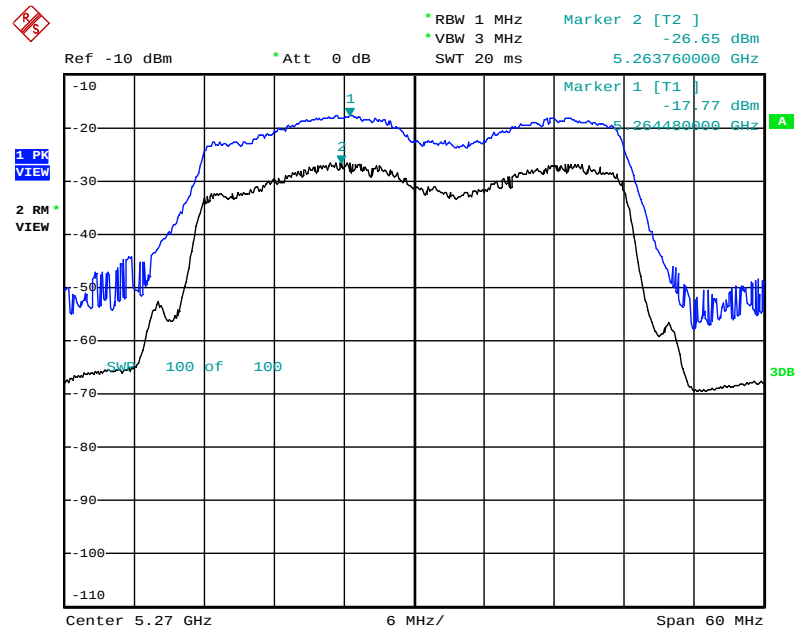

Date: 2.NOV.2012 19:15:28

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5670 MHz

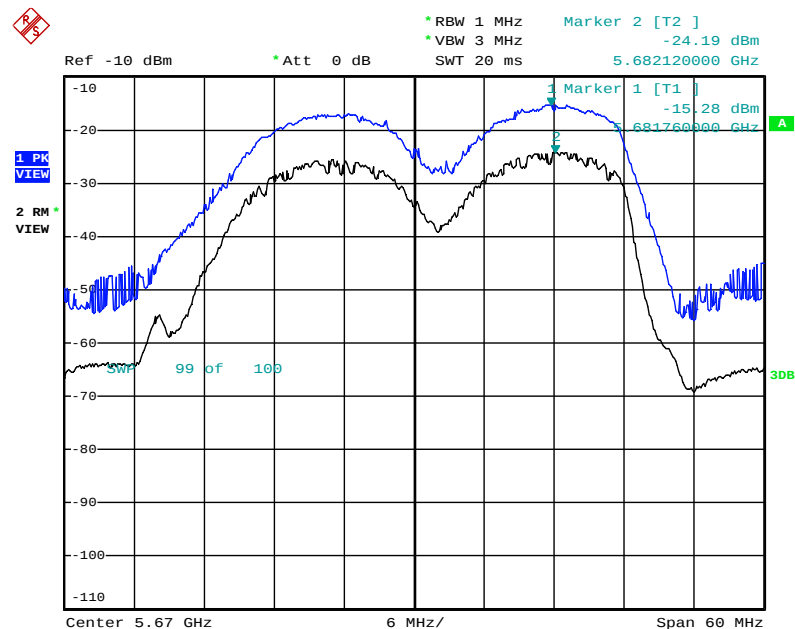

Date: 2.NOV.2012 19:14:18

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

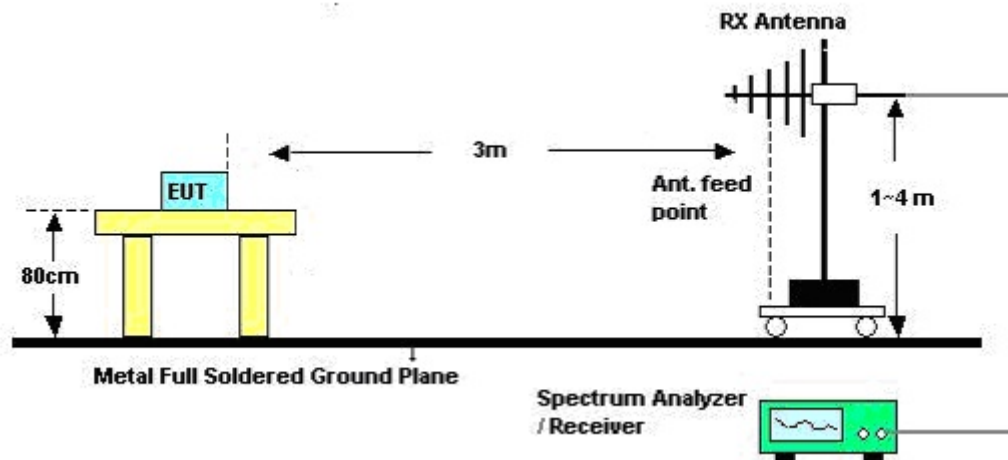

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

Distance extrapolation factor = $20 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	CTX
Test Date	Oct. 23, 2012		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Test Mode: Mode 1


Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	CTX

Horizontal

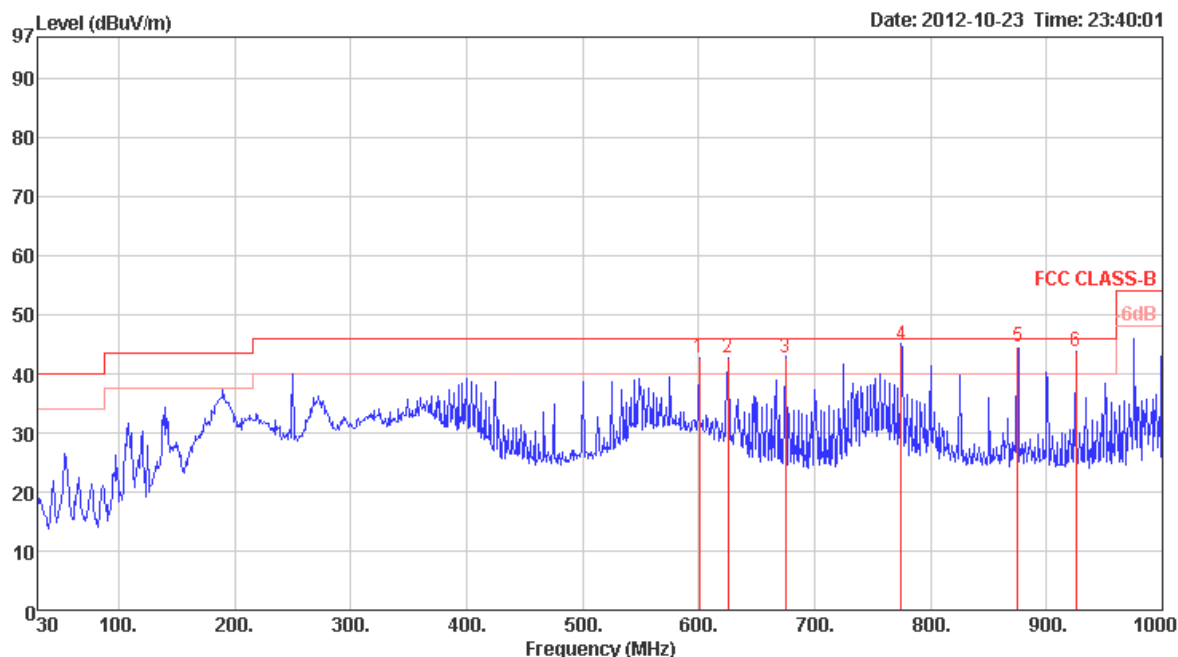

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	600.36	42.68	46.00	-3.32	49.11	2.90	18.77	28.10	Peak	100	0 HORIZONTAL
2	625.58	42.64	46.00	-3.36	48.81	3.05	18.85	28.07	Peak	100	0 HORIZONTAL
3	675.05	42.74	46.00	-3.26	48.35	3.40	19.01	28.02	Peak	100	0 HORIZONTAL
4	775.00	44.80	46.00	-1.20	49.50	3.40	19.60	27.70	QP	130	104 HORIZONTAL
5	875.00	44.69	46.00	-1.31	48.30	3.50	20.34	27.45	QP	110	303 HORIZONTAL
6	925.31	43.85	46.00	-2.15	46.83	3.60	20.72	27.30	QP	121	141 HORIZONTAL

Vertical

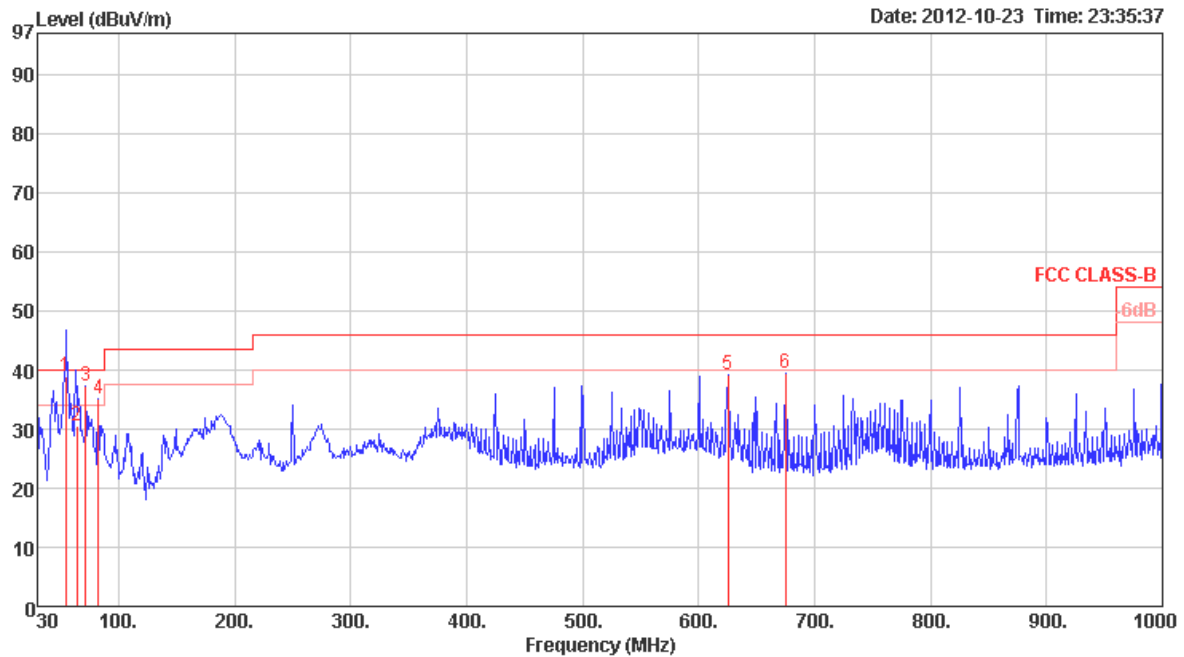

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	cm	deg	Pol/Phase
1	54.15	38.92	40.00	-1.08	58.09	0.78	7.83	27.78	100	328	VERTICAL
2	64.20	30.45	40.00	-9.55	50.59	0.88	6.72	27.74	175	360	VERTICAL
3	71.71	37.40	40.00	-2.60	57.53	0.84	6.74	27.71	100	12	VERTICAL
4	82.38	35.24	40.00	-4.76	54.28	1.10	7.53	27.67	400	0	VERTICAL
5	625.58	39.09	46.00	-6.91	45.26	3.05	18.85	28.07	400	0	VERTICAL
6	675.05	39.41	46.00	-6.59	45.02	3.40	19.01	28.02	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Test Mode: Mode 1

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 36 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15515.64	49.62	80.00	-30.38	41.10	6.13	37.68	35.29	100	280	HORIZONTAL
2	15540.24	36.96	60.00	-23.04	28.49	6.13	37.65	35.31	100	280	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15537.20	49.84	80.00	-30.16	41.27	6.13	37.73	35.29	100	217	VERTICAL
2	15540.16	37.08	60.00	-22.92	28.57	6.13	37.69	35.31	100	217	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 40 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15594.47	48.56	80.00	-31.44	40.17	6.13	37.60	35.34	100	270	HORIZONTAL
2	15597.28	36.69	60.00	-23.31	28.30	6.13	37.60	35.34	100	270	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15593.03	49.89	80.00	-30.11	41.50	6.13	37.60	35.34	100	188	VERTICAL
2	15606.73	39.01	60.00	-20.99	30.64	6.13	37.58	35.34	100	188	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 48 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15719.60	49.13	80.00	-30.87	40.90	6.14	37.48	35.39 Peak	100	232	HORIZONTAL
2	15722.80	39.02	60.00	-20.98	30.79	6.14	37.48	35.39 Average	100	232	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15698.13	50.59	80.00	-29.41	42.34	6.14	37.49	35.38 Peak	100	283	VERTICAL
2	15716.07	38.06	60.00	-21.94	29.82	6.14	37.48	35.38 Average	100	283	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 52 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15780.64	51.09	80.00	-28.91	42.96	6.14	37.41	35.42 Peak	100	90	HORIZONTAL
2	15782.08	38.77	60.00	-21.23	30.64	6.14	37.41	35.42 Average	100	90	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15784.57	41.05	60.00	-18.95	32.92	6.14	37.41	35.42 Average	100	127	VERTICAL
2	15786.41	51.64	80.00	-28.36	43.51	6.14	37.41	35.42 Peak	100	127	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 60 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10605.05	49.53	60.00	-10.47	41.56	5.01	38.38	35.42 Average	100	230	HORIZONTAL
2	10605.45	63.45	80.00	-16.55	55.48	5.01	38.38	35.42 Peak	100	230	HORIZONTAL
3	15903.77	52.49	80.00	-27.51	44.49	6.15	37.29	35.44 Peak	100	88	HORIZONTAL
4	15904.33	39.09	60.00	-20.91	31.09	6.15	37.29	35.44 Average	100	88	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10592.55	50.75	74.00	-23.25	42.80	5.01	38.38	35.44 Average	100	141	VERTICAL
2	10593.83	63.89	74.00	-10.11	55.94	5.01	38.38	35.44 Peak	100	141	VERTICAL
3	15895.51	55.24	80.00	-24.76	47.23	6.15	37.30	35.44 Peak	100	98	VERTICAL
4	15895.99	40.45	60.00	-19.55	32.45	6.15	37.29	35.44 Average	100	98	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 64 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10632.23	61.07	80.00	-18.93	53.08	5.01	38.37	35.39 Peak	100	226	HORIZONTAL
2	10639.52	50.08	60.00	-9.92	42.09	5.01	38.37	35.39 Average	100	226	HORIZONTAL
3	15937.40	36.16	60.00	-23.84	28.20	6.15	37.25	35.44 Average	100	171	HORIZONTAL
4	15957.12	49.11	80.00	-30.89	41.17	6.15	37.23	35.44 Peak	100	171	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10632.15	63.90	80.00	-16.10	55.91	5.01	38.37	35.39 Peak	100	142	VERTICAL
2	10632.23	50.10	60.00	-9.90	42.11	5.01	38.37	35.39 Average	100	142	VERTICAL
3	15959.60	52.49	80.00	-27.51	44.55	6.15	37.23	35.44 Peak	100	70	VERTICAL
4	15960.16	41.17	60.00	-18.83	33.23	6.15	37.23	35.44 Average	100	70	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 100 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11000.08	46.75	60.00	-13.25	38.52	5.01	38.32	35.10	Average	100	50 HORIZONTAL
2	11002.24	61.53	80.00	-18.47	53.30	5.01	38.32	35.10	Peak	100	50 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10994.23	62.33	80.00	-17.67	54.12	5.01	38.30	35.10	Peak	100	147 VERTICAL
2	10995.03	46.56	60.00	-13.44	38.35	5.01	38.30	35.10	Average	100	147 VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 116 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11152.31	66.34	80.00	-13.66	58.01	5.04	38.45	35.16	100	56	HORIZONTAL
2	11152.71	52.43	60.00	-7.57	44.10	5.04	38.45	35.16	100	56	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11162.80	64.28	80.00	-15.72	55.93	5.05	38.47	35.17	101	147	VERTICAL
2	11163.69	49.52	60.00	-10.48	41.17	5.05	38.47	35.17	101	147	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 140 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11400.08	47.41	60.00	-12.59	38.86	5.10	38.70	35.25	Average	100	59 HORIZONTAL
2	11402.80	61.53	80.00	-18.47	52.98	5.10	38.70	35.25	Peak	100	59 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11402.16	60.37	80.00	-19.63	51.82	5.10	38.70	35.25	Peak	100	122 VERTICAL
2	11403.61	47.18	60.00	-12.82	38.63	5.10	38.70	35.25	Average	100	122 VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 38 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15570.16	37.13	60.00	-22.87	28.70	6.13	37.63	35.33	Average	100	131 HORIZONTAL
2	15591.88	49.58	80.00	-30.42	41.19	6.13	37.60	35.34	Peak	100	131 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15560.87	49.75	80.00	-30.25	41.28	6.13	37.65	35.31	Peak	100	262 VERTICAL
2	15570.16	37.96	60.00	-22.04	29.51	6.13	37.65	35.33	Average	100	262 VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 46 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15687.12	49.63	80.00	-30.37	41.35	6.14	37.51	35.37	100	162	HORIZONTAL
2	15692.72	38.52	60.00	-21.48	30.27	6.14	37.49	35.38	100	162	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15690.32	41.37	60.00	-18.63	33.09	6.14	37.51	35.37	100	104	VERTICAL
2	15704.10	50.17	80.00	-29.83	41.92	6.14	37.49	35.38	100	104	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 54 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10540.00	48.99	74.00	-25.01	41.07	5.01	38.39	35.48 Average	100	57	HORIZONTAL
2	10540.80	62.17	74.00	-11.83	54.25	5.01	38.39	35.48 Peak	100	57	HORIZONTAL
3	15788.61	49.00	80.00	-31.00	40.87	6.14	37.41	35.42 Peak	100	137	HORIZONTAL
4	15813.61	37.13	60.00	-22.87	29.05	6.14	37.37	35.43 Average	100	137	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10532.63	47.76	74.00	-26.24	39.84	5.01	38.39	35.48 Average	100	139	VERTICAL
2	10550.26	60.02	74.00	-13.98	52.08	5.01	38.39	35.46 Peak	100	139	VERTICAL
3	15799.10	38.20	60.00	-21.80	30.10	6.14	37.39	35.43 Average	100	152	VERTICAL
4	15800.38	50.31	80.00	-29.69	42.21	6.14	37.39	35.43 Peak	100	152	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 62 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10620.16	42.60	60.00	-17.40	34.63	5.01	38.38	35.42 Average	100	234	HORIZONTAL
2	10620.32	53.19	80.00	-26.81	45.22	5.01	38.38	35.42 Peak	100	234	HORIZONTAL
3	15898.43	36.38	60.00	-23.62	28.38	6.15	37.29	35.44 Average	100	310	HORIZONTAL
4	15901.47	48.41	80.00	-31.59	40.41	6.15	37.29	35.44 Peak	100	310	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10620.00	44.70	60.00	-15.30	36.73	5.01	38.38	35.42 Average	100	130	VERTICAL
2	10622.24	53.90	80.00	-26.10	45.93	5.01	38.38	35.42 Peak	100	130	VERTICAL
3	15901.47	36.04	60.00	-23.96	28.04	6.15	37.29	35.44 Average	100	217	VERTICAL
4	15908.37	48.47	80.00	-31.53	40.47	6.15	37.29	35.44 Peak	100	217	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 102 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11020.00	41.29	60.00	-18.71	33.05	5.02	38.33	35.11	Average	100	226 HORIZONTAL
2	11020.64	53.46	80.00	-26.54	45.22	5.02	38.33	35.11	Peak	100	226 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11020.16	41.36	60.00	-18.64	33.13	5.02	38.32	35.11	Average	100	106 VERTICAL
2	11020.48	52.10	80.00	-27.90	43.87	5.02	38.32	35.11	Peak	100	106 VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 110 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11107.85	50.91	60.00	-9.09	42.61	5.03	38.42	35.15	Average	100	56 HORIZONTAL
2	11107.85	63.65	80.00	-16.35	55.35	5.03	38.42	35.15	Peak	100	56 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11092.47	49.24	60.00	-10.76	40.95	5.03	38.40	35.14	Average	100	149 VERTICAL
2	11108.97	62.53	80.00	-17.47	54.23	5.03	38.42	35.15	Peak	100	149 VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 134 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11340.00	47.47	60.00	-12.53	39.00	5.08	38.63	35.24	Average	100	61 HORIZONTAL
2	11340.64	60.96	80.00	-19.04	52.48	5.09	38.63	35.24	Peak	100	61 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11340.00	45.99	60.00	-14.01	37.52	5.08	38.63	35.24	Average	100	113 VERTICAL
2	11340.48	58.59	80.00	-21.41	50.11	5.09	38.63	35.24	Peak	100	113 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for Peak

4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 36, 40,48 /Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	59.14	60.00	-0.86	22.04	3.43	33.67	0.00 Average	128	106	HORIZONTAL
2	5150.00	74.48	80.00	-5.52	37.38	3.43	33.67	0.00 Peak	128	106	HORIZONTAL
3	5172.00	117.98			80.84	3.44	33.70	0.00 Peak	128	106	HORIZONTAL
4	5188.00	107.79			70.62	3.44	33.73	0.00 Average	128	106	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	57.54	60.00	-2.46	20.44	3.43	33.67	0.00 Average	110	83	HORIZONTAL
2	5150.00	70.24	80.00	-9.76	33.14	3.43	33.67	0.00 Peak	110	83	HORIZONTAL
3	5197.20	111.98			74.77	3.45	33.76	0.00 Average	110	83	HORIZONTAL
4	5199.20	121.96			84.75	3.45	33.76	0.00 Peak	110	83	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5136.80	68.48	80.00	-11.52	31.41	3.43	33.64	0.00 Peak	130	158	VERTICAL
2	5139.20	55.61	60.00	-4.39	18.54	3.43	33.64	0.00 Average	130	158	VERTICAL
3	5244.20	119.73			82.45	3.46	33.82	0.00 Peak	130	158	VERTICAL
4	5245.40	110.07			72.79	3.46	33.82	0.00 Average	130	158	VERTICAL
5	5351.20	67.98	80.00	-12.02	30.46	3.49	34.03	0.00 Peak	130	158	VERTICAL
6	5360.20	54.75	60.00	-5.25	17.23	3.49	34.03	0.00 Average	130	158	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 52,60, 64 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Channel 52

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5137.40	68.51	80.00	-11.49	31.44	3.43	33.64	0.00 Peak	129	158	VERTICAL
2	5139.20	55.28	60.00	-4.72	18.21	3.43	33.64	0.00 Average	129	158	VERTICAL
3	5263.00	109.33			71.99	3.46	33.88	0.00 Average	129	158	VERTICAL
4	5264.80	119.46			82.12	3.46	33.88	0.00 Peak	129	158	VERTICAL
5	5358.40	54.65	60.00	-5.35	17.13	3.49	34.03	0.00 Average	129	158	VERTICAL
6	5361.40	68.23	80.00	-11.77	30.71	3.49	34.03	0.00 Peak	129	158	VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5298.80	113.15			75.73	3.48	33.94	0.00 Average	124	92	HORIZONTAL
2	5299.20	123.69			86.27	3.48	33.94	0.00 Peak	124	92	HORIZONTAL
3	5350.00	58.15	60.00	-1.85	20.63	3.49	34.03	0.00 Average	124	92	HORIZONTAL
4	5351.60	70.04	80.00	-9.96	32.52	3.49	34.03	0.00 Peak	124	92	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5325.00	120.11			82.65	3.49	33.97	0.00 Peak	121	140	VERTICAL
2	5325.40	110.10			72.64	3.49	33.97	0.00 Average	121	140	VERTICAL
3	5350.00	59.25	60.00	-0.75	21.73	3.49	34.03	0.00 Average	121	140	VERTICAL
4	5354.00	74.35	80.00	-5.65	36.83	3.49	34.03	0.00 Peak	121	140	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 20MHz Ch 100,140 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5458.80	68.81	80.00	-11.19	31.10	3.52	34.19	0.00	Peak	113	91 HORIZONTAL
2	5460.00	56.84	60.00	-3.16	19.13	3.52	34.19	0.00	Average	113	91 HORIZONTAL
3	5469.00	74.94	80.00	-5.06	37.21	3.52	34.21	0.00	Peak	113	91 HORIZONTAL
4	5470.00	59.03	60.00	-0.97	21.30	3.52	34.21	0.00	Average	113	91 HORIZONTAL
5	5507.60	120.01			82.22	3.54	34.25	0.00	Peak	113	91 HORIZONTAL
6	5508.20	109.77			71.98	3.54	34.25	0.00	Average	113	91 HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5707.00	107.57			69.63	3.60	34.34	0.00	Average	126	349 VERTICAL
2	5707.60	117.85			79.91	3.60	34.34	0.00	Peak	126	349 VERTICAL
3	5725.00	59.03	60.00	-0.97	21.09	3.60	34.34	0.00	Average	126	349 VERTICAL
4	5725.00	74.25	80.00	-5.75	36.31	3.60	34.34	0.00	Peak	126	349 VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 38, 46 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	59.49	60.00	-0.51	22.39	3.43	33.67	0.00 Average	124	160	VERTICAL
2	5150.00	73.04	80.00	-6.96	35.94	3.43	33.67	0.00 Peak	124	160	VERTICAL
3	5173.60	110.36			73.22	3.44	33.70	0.00 Peak	124	160	VERTICAL
4	5190.00	100.56			63.39	3.44	33.73	0.00 Average	124	160	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	58.57	60.00	-1.43	21.47	3.43	33.67	0.00 Average	127	160	VERTICAL
2	5150.00	71.92	80.00	-8.08	34.82	3.43	33.67	0.00 Peak	127	160	VERTICAL
3	5213.60	119.96			82.72	3.45	33.79	0.00 Peak	127	160	VERTICAL
4	5214.00	108.71			71.47	3.45	33.79	0.00 Average	127	160	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 54, 62 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Channel 54

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5267.60	109.41			72.07	3.46	33.88	0.00	Average	123	93	HORIZONTAL
2	5268.80	120.31			82.97	3.46	33.88	0.00	Peak	123	93	HORIZONTAL
3	5350.00	58.36	60.00	-1.64	20.84	3.49	34.03	0.00	Average	123	93	HORIZONTAL
4	5350.00	72.28	80.00	-7.72	34.76	3.49	34.03	0.00	Peak	123	93	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5308.00	103.31			65.89	3.48	33.94	0.00	Average	123	76	HORIZONTAL
2	5308.00	113.82			76.40	3.48	33.94	0.00	Peak	123	76	HORIZONTAL
3	5350.00	59.19	60.00	-0.81	21.67	3.49	34.03	0.00	Average	123	76	HORIZONTAL
4	5350.80	71.38	80.00	-8.62	33.86	3.49	34.03	0.00	Peak	123	76	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11n MCS0 40MHz Ch 102, 110, 134 / Chain 1 + Chain 2
Test Date	Oct. 15, 2012		

Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	5460.00	54.91	60.00	-5.09	17.18	3.52	34.21	0.00	Average	124	148 VERTICAL
2	5460.00	66.28	80.00	-13.72	28.55	3.52	34.21	0.00	Peak	124	148 VERTICAL
3	5470.00	58.83	60.00	-1.17	21.07	3.52	34.24	0.00	Average	124	148 VERTICAL
4	5470.00	72.06	80.00	-7.94	34.30	3.52	34.24	0.00	Peak	124	148 VERTICAL
5	5507.76	111.17			73.35	3.54	34.28	0.00	Peak	124	148 VERTICAL
6	5508.08	100.46			62.64	3.54	34.28	0.00	Average	124	148 VERTICAL

Item 5, 6 are the fundamental frequency at 5510MHz.

Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	5454.23	69.42	80.00	-10.58	31.71	3.52	34.19	0.00	Peak	129	87 HORIZONTAL
2	5455.83	57.01	60.00	-2.99	19.30	3.52	34.19	0.00	Average	129	87 HORIZONTAL
3	5470.00	58.87	60.00	-1.13	21.14	3.52	34.21	0.00	Average	129	87 HORIZONTAL
4	5470.00	71.90	80.00	-8.10	34.17	3.52	34.21	0.00	Peak	129	87 HORIZONTAL
5	5536.86	109.92			72.08	3.55	34.29	0.00	Average	129	87 HORIZONTAL
6	5556.73	120.89			83.03	3.55	34.31	0.00	Peak	129	87 HORIZONTAL

Item 5, 6 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	5664.87	118.36			80.44	3.59	34.33	0.00	Peak	122	83 HORIZONTAL
2	5670.00	109.15			71.23	3.59	34.33	0.00	Average	122	83 HORIZONTAL
3	5725.00	59.28	60.00	-0.72	21.34	3.60	34.34	0.00	Average	122	83 HORIZONTAL
4	5726.60	71.69	80.00	-8.31	33.75	3.60	34.34	0.00	Peak	122	83 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz..

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (IEEE 802.11nspecification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- EUT have transmitted absence of modulation signal and fixed channelize.
- Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
- Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
- f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11nspecification).
- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
- Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

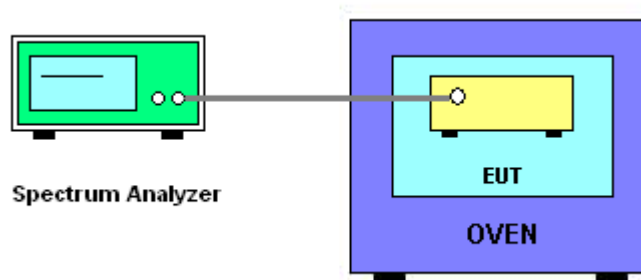

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)		
(V)	5200	5300	5500
126.50	5200.0098	5300.0102	5500.0059
110.00	5200.0046	5300.0098	5500.0064
93.50	5200.0023	5300.0092	5500.0098
Max. Deviation (MHz)	0.009800	0.010200	0.009800
Max. Deviation (ppm)	1.88	1.92	1.78

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)		
(°C)	5200	5300	5500
-30	5199.9855	5299.9542	5499.9865
-20	5199.9403	5299.9562	5499.9731
-10	5199.9488	5299.9555	5499.9782
0	5199.9446	5299.9564	5499.9732
10	5199.9547	5299.9601	5499.9783
20	5199.9556	5299.9642	5499.9765
30	5199.9543	5299.9589	5499.9732
40	5199.9529	5299.9554	5499.9728
50	5199.9537	5299.9546	5499.9756
Max. Deviation (MHz)	0.059700	0.045800	0.027200
Max. Deviation (ppm)	11.48	8.6415	4.95

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 25, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 29, 2011	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Dec. 04, 2011	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Dec. 04, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2011	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Dec. 04, 2011	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	May 09, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz ~ 18GHz	May 09, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071042	1GHz ~ 18GHz	May 09, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	May 09, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	May 09, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix