



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

|                        |                                                                             |
|------------------------|-----------------------------------------------------------------------------|
| Applicant's company    | CyberTAN Technology Inc.                                                    |
| Applicant Address      | No. 99, Park Avenue III, Science-based Industrial Park, Hsinchu, 308 Taiwan |
| FCC ID                 | N89-NU361                                                                   |
| Manufacturer's company | CyberTAN Technology Inc.                                                    |
| Manufacturer Address   | No. 99, Park Avenue III, Science-based Industrial Park, Hsinchu, 308 Taiwan |

|                  |                                                 |
|------------------|-------------------------------------------------|
| Product Name     | 802.11a/b/g/n/ac Wi-Fi + Bluetooth Combo Module |
| Brand Name       | CyberTAN                                        |
| Model Name       | NU361-HS                                        |
| Test Rule        | 47 CFR FCC Part 15 Subpart C § 15.247           |
| Test Freq. Range | 2402 ~ 2480MHz                                  |
| Received Date    | Mar. 10, 2015                                   |
| Final Test Date  | Apr. 10, 2015                                   |
| Submission Type  | Original Equipment                              |

### Statement

**Test result included is only for the Bluetooth BR/EDR of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

|                                                               |                |
|---------------------------------------------------------------|----------------|
| <b>1. VERIFICATION OF COMPLIANCE .....</b>                    | <b>1</b>       |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>                    | <b>2</b>       |
| <b>3. GENERAL INFORMATION .....</b>                           | <b>3</b>       |
| 3.1. Product Details.....                                     | 3              |
| 3.2. Accessories.....                                         | 3              |
| 3.3. Table for Carrier Frequencies .....                      | 3              |
| 3.4. Table for Filed Antenna.....                             | 4              |
| 3.5. Table for Test Modes .....                               | 5              |
| 3.6. Table for Testing Locations.....                         | 6              |
| 3.7. Table for Supporting Units .....                         | 7              |
| 3.8. Table for Parameters of Test Software Setting .....      | 8              |
| 3.9. EUT Operation during Test .....                          | 8              |
| 3.10. Duty Cycle .....                                        | 8              |
| 3.11. Test Configurations .....                               | 9              |
| <b>4. TEST RESULT .....</b>                                   | <b>11</b>      |
| 4.1. AC Power Line Conducted Emissions Measurement.....       | 11             |
| 4.2. Maximum Conducted Output Power Measurement.....          | 15             |
| 4.3. Hopping Channel Separation Measurement .....             | 17             |
| 4.4. Number of Hopping Frequency Measurement.....             | 28             |
| 4.5. Dwell Time Measurement.....                              | 30             |
| 4.6. Radiated Emissions Measurement .....                     | 37             |
| 4.7. Emissions Measurement .....                              | 49             |
| 4.8. Antenna Requirements .....                               | 63             |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>                  | <b>64</b>      |
| <b>6. MEASUREMENT UNCERTAINTY.....</b>                        | <b>66</b>      |
| <b>APPENDIX A. TEST PHOTOS .....</b>                          | <b>A1 ~ A9</b> |
| <b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>         | <b>B1 ~ B4</b> |
| <b>APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT .....</b> | <b>C1 ~ C5</b> |


## History of This Test Report

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FR530540AB | Rev. 01 | Initial issue of report | Apr. 13, 2015 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## 1. VERIFICATION OF COMPLIANCE

Product Name : 802.11a/b/g/n/ac Wi-Fi + Bluetooth Combo Module  
Brand Name : CyberTAN  
Model No. : NU361-HS  
Applicant : CyberTAN Technology Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 10, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

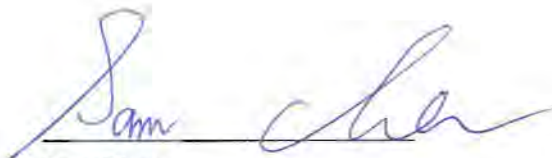

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C |              |                                   |          |             |
|------------------------------------------------|--------------|-----------------------------------|----------|-------------|
| Part                                           | Rule Section | Description of Test               | Result   | Under Limit |
| 4.1                                            | 15.207       | AC Power Line Conducted Emissions | Complies | 20.31 dB    |
| 4.2                                            | 15.247(b)(1) | Maximum Conducted Output Power    | Complies | 15.23 dB    |
| 4.3                                            | 15.247(a)(1) | Hopping Channel Separation        | Complies | -           |
| 4.4                                            | 15.247(b)(1) | Number of Hopping Frequency       | Complies | -           |
| 4.5                                            | 15.247(a)(1) | Dwell Time                        | Complies | -           |
| 4.6                                            | 15.247(d)    | Radiated Emissions                | Complies | 3.00 dB     |
| 4.7                                            | 15.247(d)    | Band Edge Emissions               | Complies | 3.74 dB     |
| 4.8                                            | 15.203       | Antenna Requirements              | Complies | -           |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

| Items                                                                                 | Description                                                                                             |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Power Type                                                                            | From host system                                                                                        |
| Modulation                                                                            | FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)                                                                    |
| Data Rate (Mbps)                                                                      | GFSK: 1 ; $\pi/4$ -DQPSK: 2 ; 8DPSK: 3                                                                  |
| Frequency Range                                                                       | 2402 ~ 2480MHz                                                                                          |
| Channel Number                                                                        | 79                                                                                                      |
| Channel Band Width (99%)                                                              | BR (GFSK) 1 Mbps: 0.908 MHz<br>EDR ( $\pi/4$ -DQPSK) 2 Mbps: 1.236 MHz<br>EDR (8DPSK) 3 Mbps: 1.228 MHz |
| Maximum Conducted Peak Output Power                                                   | BR (GFSK) 1 Mbps: 4.14 dBm<br>EDR ( $\pi/4$ -DQPSK) 2 Mbps: 5.41 dBm<br>EDR (8DPSK) 3 Mbps: 5.77 dBm    |
| Maximum Conducted Average Output Power                                                | BR (GFSK) 1 Mbps: 0.69 dBm<br>EDR ( $\pi/4$ -DQPSK) 2 Mbps: 2.71 dBm<br>EDR (8DPSK) 3 Mbps: 4.81 dBm    |
| Carrier Frequencies                                                                   | Please refer to section 3.3                                                                             |
| Antenna                                                                               | Please refer to section 3.4                                                                             |
| Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).                              |                                                                                                         |
| Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps). |                                                                                                         |

#### 3.2. Accessories

N/A

#### 3.3. Table for Carrier Frequencies

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 0           | 2402 MHz  | 40          | 2442 MHz  |
|                | 1           | 2403 MHz  | :           | :         |
|                | :           | :         | 77          | 2479 MHz  |
|                | 38          | 2440 MHz  | 78          | 2480 MHz  |
|                | 39          | 2441 MHz  | -           | -         |

### 3.4. Table for Filed Antenna

| Ant. | Brand       | Part No.          | Antenna Type | Connector | Gain (dBi) |      |           |
|------|-------------|-------------------|--------------|-----------|------------|------|-----------|
|      |             |                   |              |           | 2.4GHz     | 5GHz | Bluetooth |
| 1    | INPAQ       | WAG-M-LB-00-002   | PIFA Antenna | Murata    | 1.21       | 3.97 | -         |
| 2    | INPAQ       | WAG-M-LB-00-003   | PIFA Antenna | Murata    | 1.21       | 3.97 | -         |
| 3    | MAG. LAYERS | MSA-3507-25GC1-A1 | PIFA Antenna | I-PEX     | -          | -    | 4.12      |

Note:

**For 2.4GHz:**

**For IEEE 802.11b mode (1TX/1RX)**

Only Chain 1 can be used as transmitting/receiving antenna.

**For IEEE 802.11g/n mode (2TX/2RX)**

Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

**For 5GHz:**


**For IEEE 802.11a/n/ac mode (2TX/2RX)**

Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

**For Bluetooth mode (1TX/1RX)**

Only Chain 3 can be used as transmitting/receiving antenna.

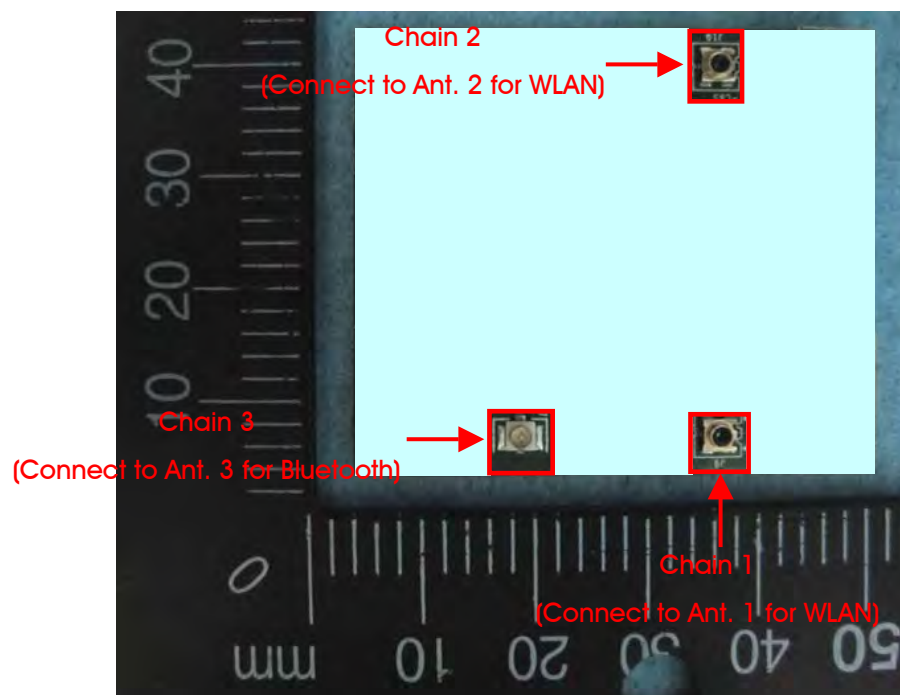

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                     | Mode                         | Data Rate | Channel               | Chain |
|--------------------------------|------------------------------|-----------|-----------------------|-------|
| AC Power Conducted Emissions   | Normal Link                  | -         | -                     | -     |
| Maximum Conducted Output Power | BR (GFSK)                    | 1 Mbps    | 0/39/78               | 3     |
|                                | EDR ( $\pi/4$ -DQPSK)        | 2 Mbps    | 0/39/78               | 3     |
|                                | EDR (8DPSK)                  | 3 Mbps    | 0/39/78               | 3     |
| Hopping Channel Separation     | BR (GFSK)                    | 1 Mbps    | 0~1<br>39~40<br>77~78 | 3     |
|                                | EDR ( $\pi/4$ -DQPSK)        | 2 Mbps    | 0~1<br>39~40<br>77~78 | 3     |
|                                | EDR (8DPSK)                  | 3 Mbps    | 0~1<br>39~40<br>77~78 | 3     |
| Number of Hopping Frequency    | EDR (8DPSK)                  | 3 Mbps    | 0~78                  | 3     |
| Dwell Time                     | BR (GFSK)<br>(DH1, DH3, DH5) | 1 Mbps    | 0/39/78               | 3     |
| Radiated Emissions Below 1GHz  | Normal Link                  | -         | -                     | -     |
| Radiated Emissions Above 1GHz  | BR (GFSK)                    | 1 Mbps    | 0/39/78               | 3     |
|                                | EDR (8DPSK)                  | 3 Mbps    | 0/39/78               | 3     |
| Band Edge Emissions            | BR (GFSK)                    | 1 Mbps    | 0/39/78               | 3     |
|                                | EDR (8DPSK)                  | 3 Mbps    | 0/39/78               | 3     |

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. 2.4GHz WLAN Function + Bluetooth Function

Mode 2. 5GHz WLAN Function + Bluetooth Function

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Below 1GHz):**

Mode 1. 2.4GHz WLAN Function + Bluetooth Function + X axis

Mode 2. 2.4GHz WLAN Function + Bluetooth Function + Y axis

Mode 3. 2.4GHz WLAN Function + Bluetooth Function + Z axis

Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.

Mode 4. 5GHz WLAN Function + Bluetooth Function + X axis

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Above 1GHz):**

The EUT was performed at X axis, Y axis and Z axis position. The worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.

Mode 1. EUT Z axis

**For Co-location MPE and Radiated Emission Co-location Test:**

Mode 1. 2.4GHz WLAN Function + Bluetooth Function

Mode 2. 5GHz WLAN Function + Bluetooth Function

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

| Test Site Location |                                                                            |          |              |             |              |
|--------------------|----------------------------------------------------------------------------|----------|--------------|-------------|--------------|
| Address:           | No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. |          |              |             |              |
| TEL:               | 886-3-656-9065                                                             |          |              |             |              |
| FAX:               | 886-3-656-9085                                                             |          |              |             |              |
| Test Site No.      | Site Category                                                              | Location | FCC Reg. No. | IC File No. | VCCI Reg. No |
| 03CH01-CB          | SAC                                                                        | Hsin Chu | 262045       | IC 4086D    | -            |
| CO01-CB            | Conduction                                                                 | Hsin Chu | 262045       | IC 4086D    | -            |
| TH01-CB            | OVEN Room                                                                  | Hsin Chu | -            | -           | -            |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (Below 1GHz)

| Support Unit    | Brand    | Model      | FCC ID |
|-----------------|----------|------------|--------|
| NB              | DELL     | E6430      | DoC    |
| Wireless AP     | Planex   | GW-AP54SGX | N/A    |
| BT base station | Anritsu  | MT8852B    | N/A    |
| Earphone        | E-BOOKI  | E-EPC040   | N/A    |
| Mouse           | Logitech | M-U0026    | DoC    |

For Test Site No: 03CH01-CB (Above 1GHz)

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E6430 | DoC    |

For Test Site No: CO01-CB

| Support Unit    | Brand    | Model      | FCC ID    |
|-----------------|----------|------------|-----------|
| NB              | DELL     | E6430      | DoC       |
| AP Router       | Planex   | GW-AP54SGX | AP Router |
| BT base station | Anritsu  | MT8852B    | N/A       |
| Earphone        | e-Power  | S90W       | N/A       |
| Mouse           | Logitech | M-U0026    | DoC       |

For Test Site No: TH01-CB

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E6220 | DoC    |

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of Bluetooth

For BR (GFSK) 1 Mbps:

| Test Software Version | Broadcom Bluetooth Tool 1.8.0.8 |          |          |
|-----------------------|---------------------------------|----------|----------|
| Frequency             | 2402 MHz                        | 2441 MHz | 2480 MHz |
| Power Parameters      | 0                               | 0        | 0        |

For EDR ( $\pi/4$ -DQPSK) 2 Mbps:

| Test Software Version | Broadcom Bluetooth Tool 1.8.0.8 |          |          |
|-----------------------|---------------------------------|----------|----------|
| Frequency             | 2402 MHz                        | 2441 MHz | 2480 MHz |
| Power Parameters      | 0                               | 0        | 0        |

For EDR (8DPSK) 3 Mbps:

| Test Software Version | Broadcom Bluetooth Tool 1.8.0.8 |          |          |
|-----------------------|---------------------------------|----------|----------|
| Frequency             | 2402 MHz                        | 2441 MHz | 2480 MHz |
| Power Parameters      | 0                               | 0        | 0        |

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

| Mode        | On Time (ms) | On+Off Time (ms) | Duty Cycle (%) | Duty Factor (dB) | 1/T Minimum VBW (kHz) |
|-------------|--------------|------------------|----------------|------------------|-----------------------|
| BR (GFSK)   | 2.885        | 3.743            | 77.08%         | 1.13             | 0.35                  |
| EDR (8DPSK) | 2.899        | 3.739            | 77.52%         | 1.11             | 0.34                  |


### 3.11. Test Configurations

#### 3.11.1. AC Power Line Conduction Emissions and Radiation Emissions (Below 1GHz) Test Configuration

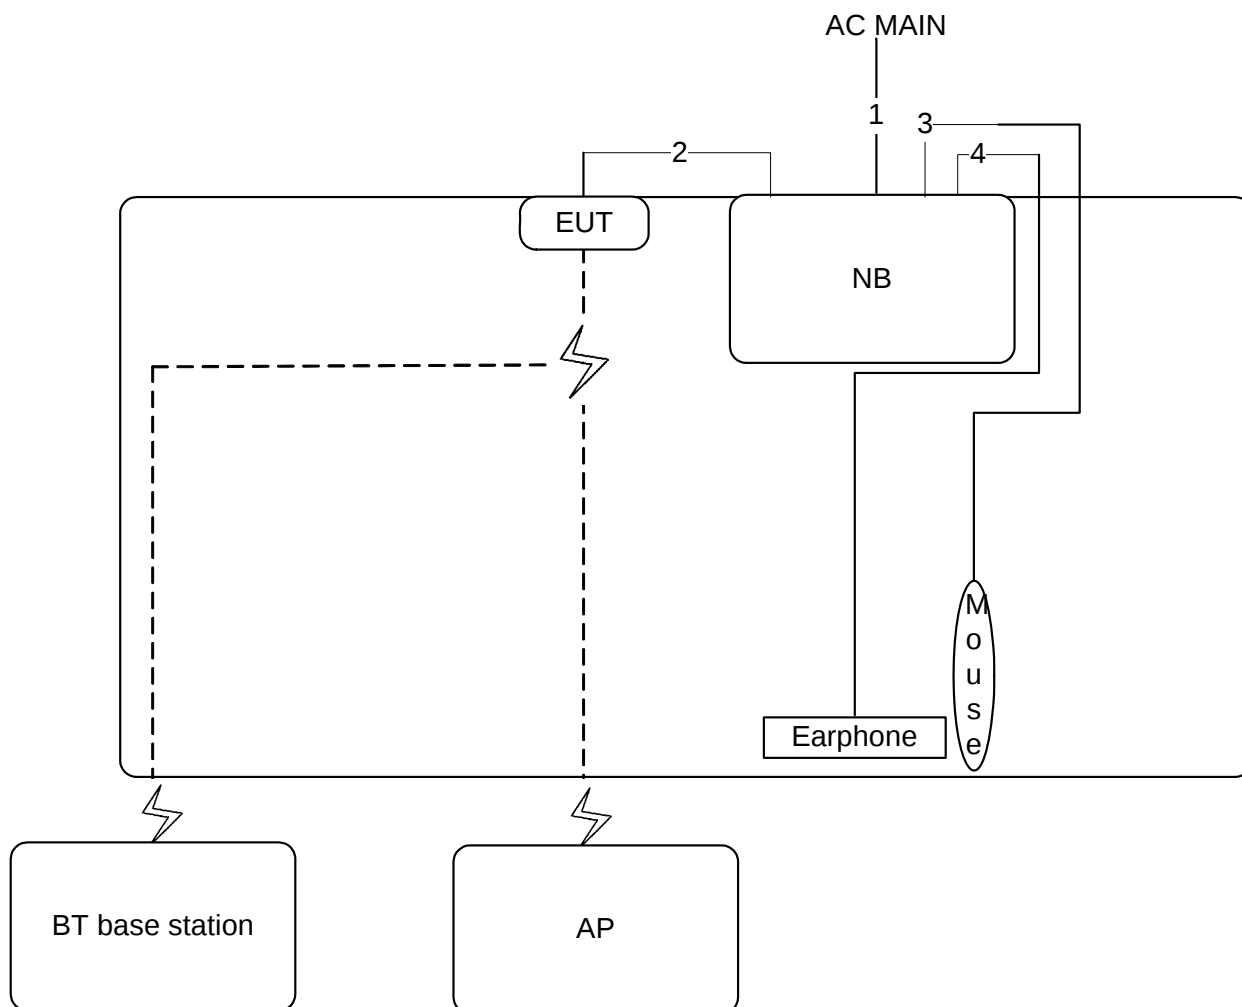

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 2.6m   |
| 2    | USB cable   | Yes      | 0.5m   |
| 3    | USB cable   | Yes      | 1.8m   |
| 4    | USB cable   | Yes      | 1.4m   |

### 3.11.2. Radiation Emissions Test (Above 1GHz)Configuration

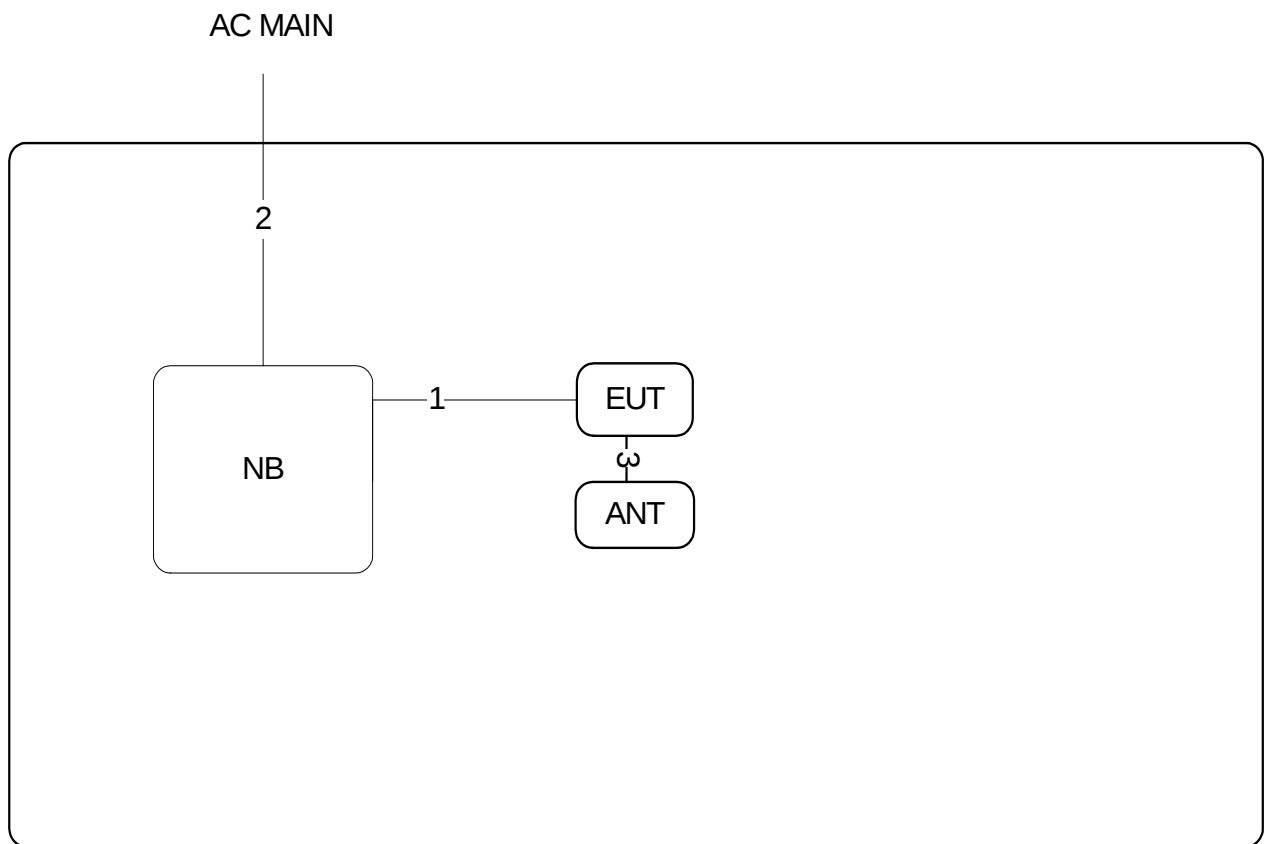

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | USB cable   | Yes      | 0.5m   |
| 2    | Power cable | No       | 2.6m   |
| 3    | Ant. cable  | No       | 0.5m   |

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

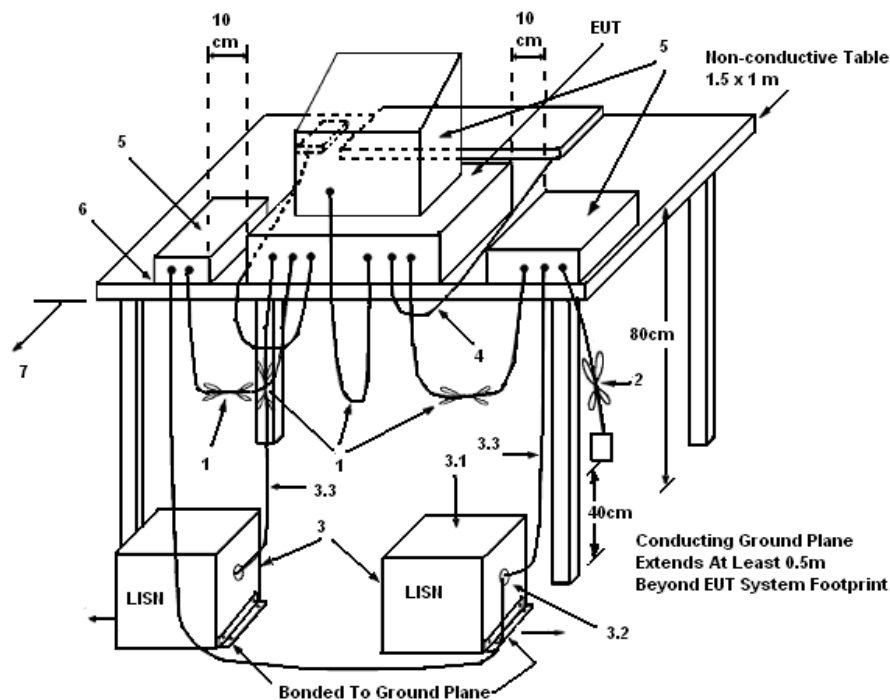

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

|               |                      |          |      |
|---------------|----------------------|----------|------|
| Temperature   | 22°C                 | Humidity | 58%  |
| Test Engineer | Kane Liu             | Phase    | Line |
| Configuration | Normal Link / Mode 1 |          |      |

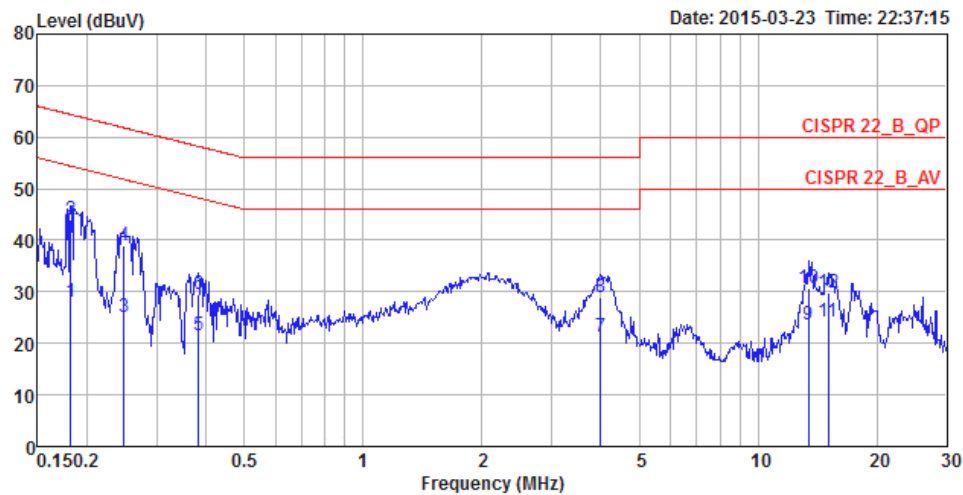

|    | Freq  | Level | Over   | Limit | Read  | LISN   | Cable |           |         |
|----|-------|-------|--------|-------|-------|--------|-------|-----------|---------|
|    | MHz   | dBuV  | Limit  | Line  | Level | Factor | Loss  | Pol/Phase | Remark  |
|    |       |       | dB     | dBuV  | dBuV  | dB     | dB    |           |         |
| 1  | 0.18  | 27.90 | -26.52 | 54.42 | 17.95 | 9.93   | 0.02  | LINE      | Average |
| 2  | 0.18  | 44.11 | -20.31 | 64.42 | 34.16 | 9.93   | 0.02  | LINE      | QP      |
| 3  | 0.25  | 25.12 | -26.70 | 51.82 | 15.16 | 9.93   | 0.03  | LINE      | Average |
| 4  | 0.25  | 38.96 | -22.86 | 61.82 | 29.00 | 9.93   | 0.03  | LINE      | QP      |
| 5  | 0.38  | 21.46 | -26.75 | 48.21 | 11.49 | 9.93   | 0.04  | LINE      | Average |
| 6  | 0.38  | 29.41 | -28.80 | 58.21 | 19.44 | 9.93   | 0.04  | LINE      | QP      |
| 7  | 3.99  | 21.35 | -24.65 | 46.00 | 11.26 | 10.02  | 0.07  | LINE      | Average |
| 8  | 3.99  | 28.99 | -27.01 | 56.00 | 18.90 | 10.02  | 0.07  | LINE      | QP      |
| 9  | 13.41 | 23.54 | -26.46 | 50.00 | 13.00 | 10.29  | 0.25  | LINE      | Average |
| 10 | 13.41 | 30.64 | -29.36 | 60.00 | 20.10 | 10.29  | 0.25  | LINE      | QP      |
| 11 | 15.07 | 24.20 | -25.80 | 50.00 | 13.61 | 10.33  | 0.26  | LINE      | Average |
| 12 | 15.07 | 29.77 | -30.23 | 60.00 | 19.18 | 10.33  | 0.26  | LINE      | QP      |

|               |                      |          |         |
|---------------|----------------------|----------|---------|
| Temperature   | 22°C                 | Humidity | 58%     |
| Test Engineer | Kane Liu             | Phase    | Neutral |
| Configuration | Normal Link / Mode 1 |          |         |

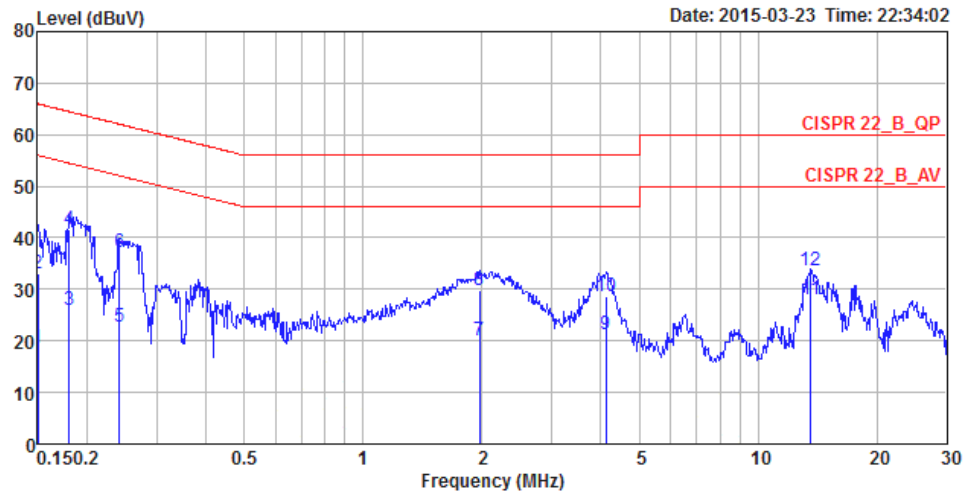

|       | Freq  | Level | Over Limit | Limit Line | Read Level | LISM Factor | Cable Loss | Pol/Phase | Remark  |
|-------|-------|-------|------------|------------|------------|-------------|------------|-----------|---------|
|       | MHz   | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |           |         |
| 1     | 0.15  | 18.49 | -37.51     | 56.00      | 8.69       | 9.78        | 0.02       | NEUTRAL   | Average |
| 2     | 0.15  | 33.04 | -32.96     | 66.00      | 23.24      | 9.78        | 0.02       | NEUTRAL   | QP      |
| 3     | 0.18  | 25.90 | -28.56     | 54.46      | 16.09      | 9.79        | 0.02       | NEUTRAL   | Average |
| 4     | 0.18  | 41.51 | -22.95     | 64.46      | 31.70      | 9.79        | 0.02       | NEUTRAL   | QP      |
| 5     | 0.24  | 22.75 | -29.29     | 52.04      | 12.93      | 9.79        | 0.03       | NEUTRAL   | Average |
| 6     | 0.24  | 37.08 | -24.96     | 62.04      | 27.26      | 9.79        | 0.03       | NEUTRAL   | QP      |
| 7     | 1.97  | 20.19 | -25.81     | 46.00      | 10.29      | 9.84        | 0.06       | NEUTRAL   | Average |
| 8     | 1.97  | 29.96 | -26.04     | 56.00      | 20.06      | 9.84        | 0.06       | NEUTRAL   | QP      |
| 9     | 4.11  | 21.29 | -24.71     | 46.00      | 11.35      | 9.87        | 0.07       | NEUTRAL   | Average |
| 10    | 4.11  | 28.77 | -27.23     | 56.00      | 18.83      | 9.87        | 0.07       | NEUTRAL   | QP      |
| 11 pp | 13.62 | 28.14 | -21.86     | 50.00      | 17.80      | 10.09       | 0.25       | NEUTRAL   | Average |
| 12    | 13.62 | 33.74 | -26.26     | 60.00      | 23.40      | 10.09       | 0.25       | NEUTRAL   | QP      |

Note: Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting                                                    |
|-----------------------|------------------------------------------------------------|
| Bandwidth             | 50MHz bandwidth is greater than the EUT emission bandwidth |
| Detector              | Peak and Average                                           |

### 4.2.3. Test Procedures

This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

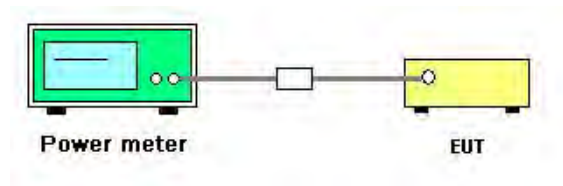

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

|               |               |                |                             |
|---------------|---------------|----------------|-----------------------------|
| Temperature   | 20°C          | Humidity       | 51%                         |
| Test Engineer | Serway Li     | Configurations | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Test Date     | Apr. 01, 2015 |                |                             |

For BR (GFSK) 1 Mbps:

| Channel | Frequency | Conducted Peak Power (dBm) | Conducted Average Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|----------------------------|-------------------------------|------------------|----------|
| 0       | 2402 MHz  | 3.86                       | 0.64                          | 21.00            | Complies |
| 39      | 2441 MHz  | 4.14                       | 0.69                          | 21.00            | Complies |
| 78      | 2480 MHz  | 3.43                       | 0.57                          | 21.00            | Complies |

For EDR ( $\pi/4$ -DQPSK) 2 Mbps:

| Channel | Frequency | Conducted Peak Power (dBm) | Conducted Average Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|----------------------------|-------------------------------|------------------|----------|
| 0       | 2402 MHz  | 5.33                       | 2.67                          | 21.00            | Complies |
| 39      | 2441 MHz  | 5.41                       | 2.71                          | 21.00            | Complies |
| 78      | 2480 MHz  | 4.56                       | 2.28                          | 21.00            | Complies |

For EDR (8DPSK) 3 Mbps:

| Channel | Frequency | Conducted Peak Power (dBm) | Conducted Average Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|----------------------------|-------------------------------|------------------|----------|
| 0       | 2402 MHz  | 5.69                       | 4.74                          | 21.00            | Complies |
| 39      | 2441 MHz  | 5.77                       | 4.81                          | 21.00            | Complies |
| 78      | 2480 MHz  | 4.87                       | 4.06                          | 21.00            | Complies |

### 4.3. Hopping Channel Separation Measurement

#### 4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| Spectrum Parameter | Setting                                                 |
|--------------------|---------------------------------------------------------|
| Attenuation        | Auto                                                    |
| Span Frequency     | > Measurement Bandwidth or Channel Separation           |
| RBW                | 30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)  |
| VBW                | 100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation) |
| Detector           | Peak                                                    |
| Trace              | Max Hold                                                |
| Sweep Time         | Auto                                                    |

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

#### 4.3.4. Test Setup Layout

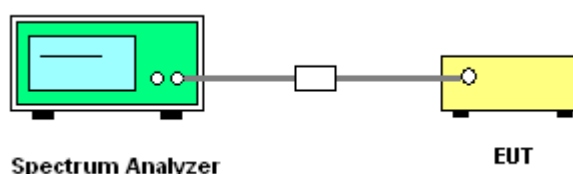

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Hopping Channel Separation

|               |           |                |                             |
|---------------|-----------|----------------|-----------------------------|
| Temperature   | 20°C      | Humidity       | 51%                         |
| Test Engineer | Serway Li | Configurations | GFSK, $\pi/4$ -DQPSK, 8DPSK |

For BR (GFSK) 1 Mbps:

| Frequency | 20dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Ch. Separation (MHz) | Two-Thirds of 20dB Bandwidth (MHz) | Result   |
|-----------|----------------------|------------------------------|----------------------|------------------------------------|----------|
| 2402 MHz  | 0.988                | 0.904                        | 1.00                 | 0.659                              | Complies |
| 2441 MHz  | 0.968                | 0.908                        | 1.00                 | 0.645                              | Complies |
| 2480 MHz  | 1.008                | 0.904                        | 1.00                 | 0.672                              | Complies |

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR ( $\pi/4$ -DQPSK) 2 Mbps:

| Frequency | 20dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Ch. Separation (MHz) | Two-Thirds of 20dB Bandwidth (MHz) | Result   |
|-----------|----------------------|------------------------------|----------------------|------------------------------------|----------|
| 2402 MHz  | 1.356                | 1.220                        | 1.00                 | 0.904                              | Complies |
| 2441 MHz  | 1.368                | 1.224                        | 1.00                 | 0.912                              | Complies |
| 2480 MHz  | 1.384                | 1.236                        | 1.00                 | 0.923                              | Complies |


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR (8DPSK) 3 Mbps:

| Frequency | 20dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Ch. Separation (MHz) | Two-Thirds of 20dB Bandwidth (MHz) | Result   |
|-----------|----------------------|------------------------------|----------------------|------------------------------------|----------|
| 2402 MHz  | 1.352                | 1.228                        | 1.00                 | 0.901                              | Complies |
| 2441 MHz  | 1.292                | 1.216                        | 1.00                 | 0.861                              | Complies |
| 2480 MHz  | 1.292                | 1.212                        | 1.00                 | 0.861                              | Complies |


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

### 20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 0 / 2402 MHz

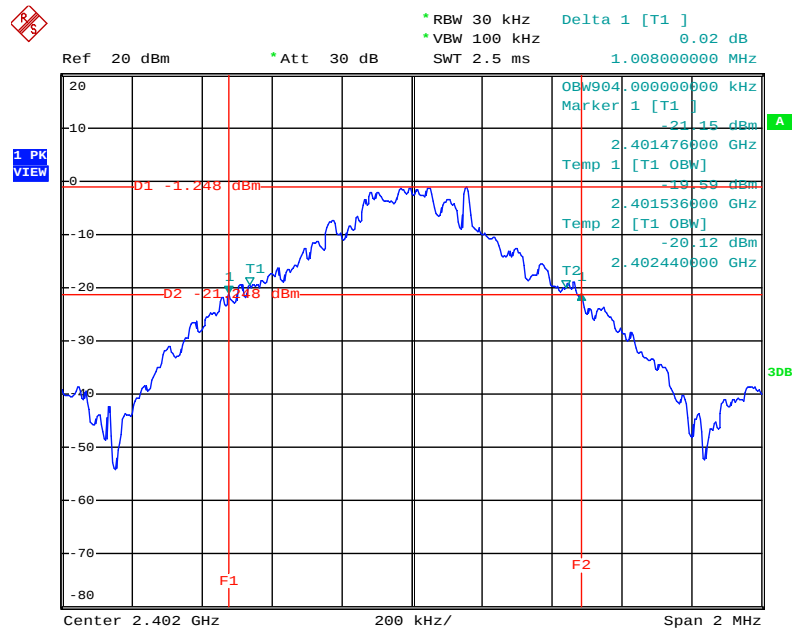


Date: 1.APR.2015 18:11:45

### 20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 39 / 2441 MHz

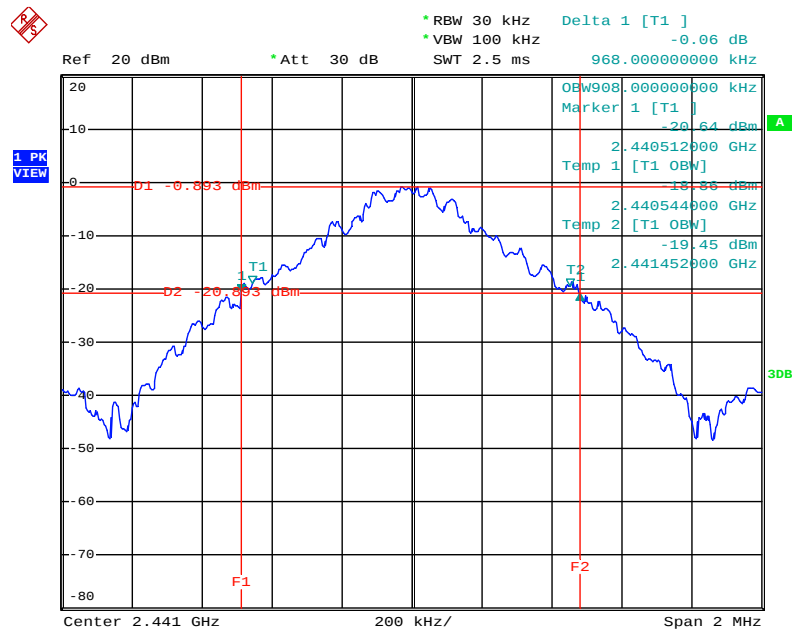


Date: 1.APR.2015 18:10:09

### 20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 78 / 2480 MHz

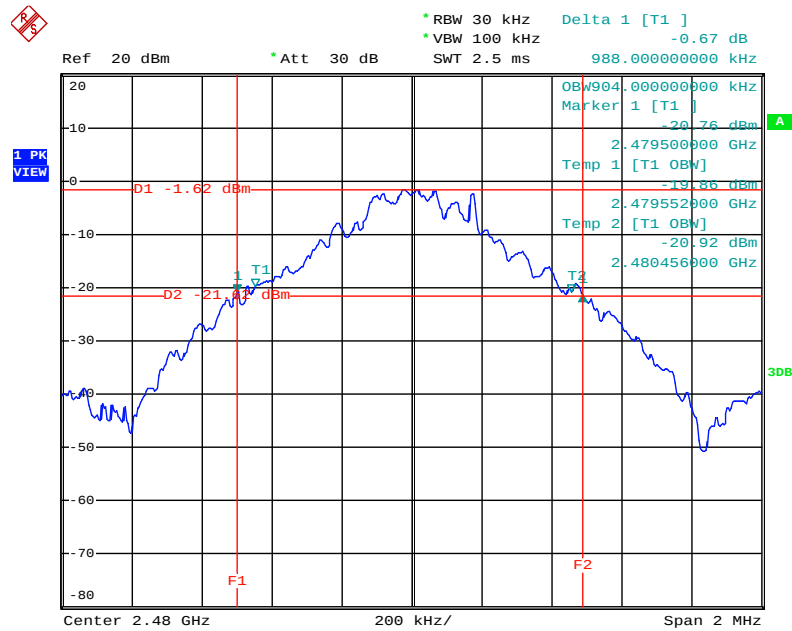


Date: 1.APR.2015 18:07:55

### Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

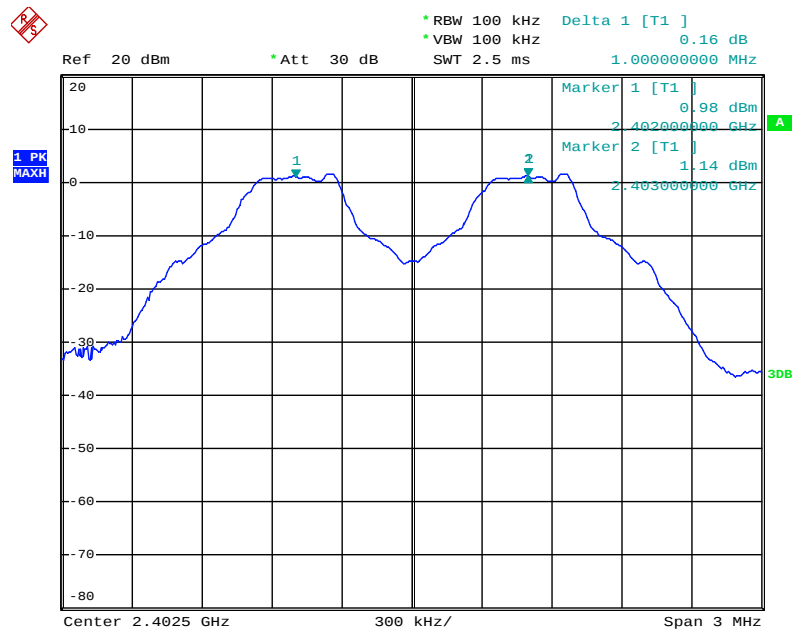


Date: 1.APR.2015 19:50:50

### Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

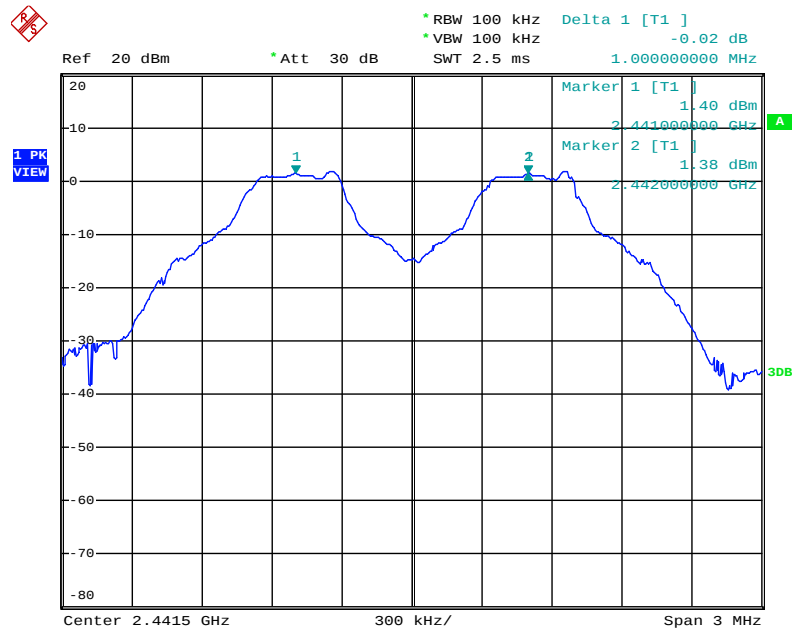


Date: 1.APR.2015 19:52:37

### Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

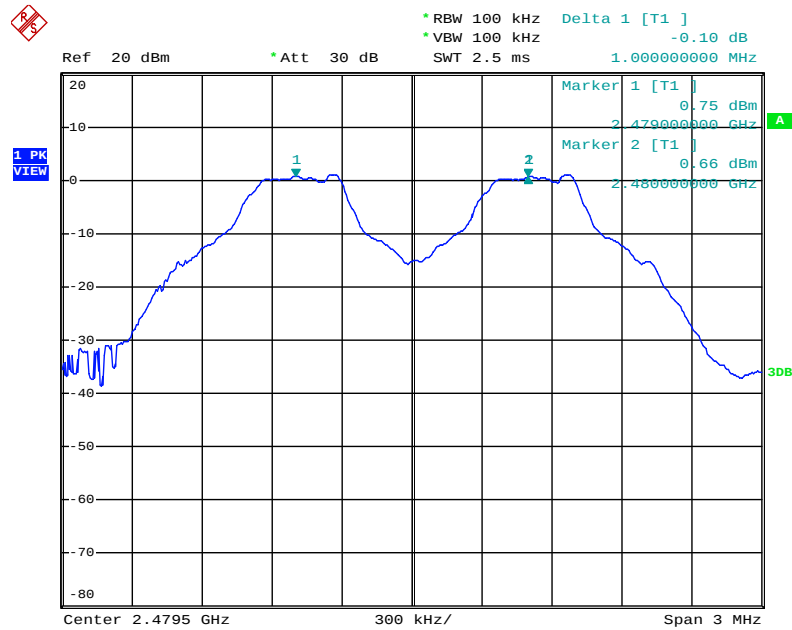


Date: 1.APR.2015 19:57:17

### 20 dB Bandwidth Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 0 / 2402 MHz

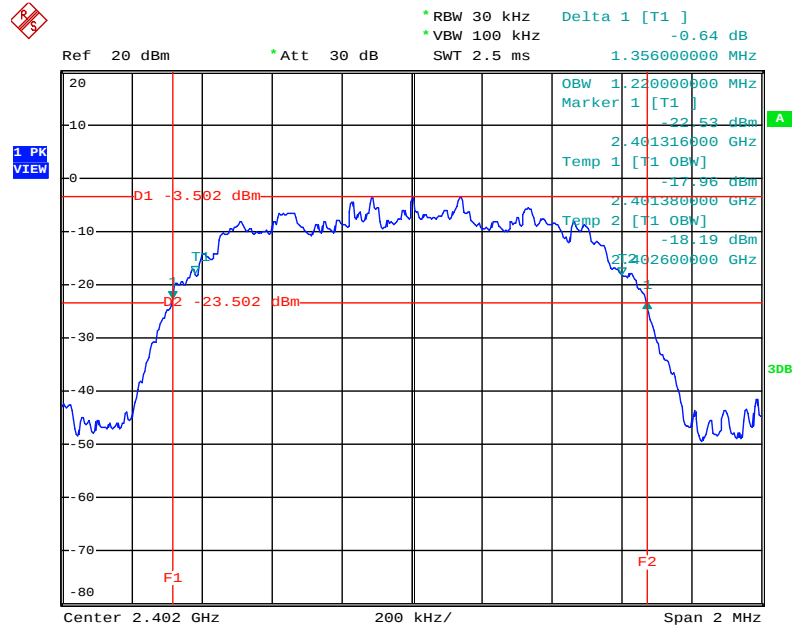


Date: 1.APR.2015 18:14:15

### 20 dB Bandwidth Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 39 / 2441 MHz

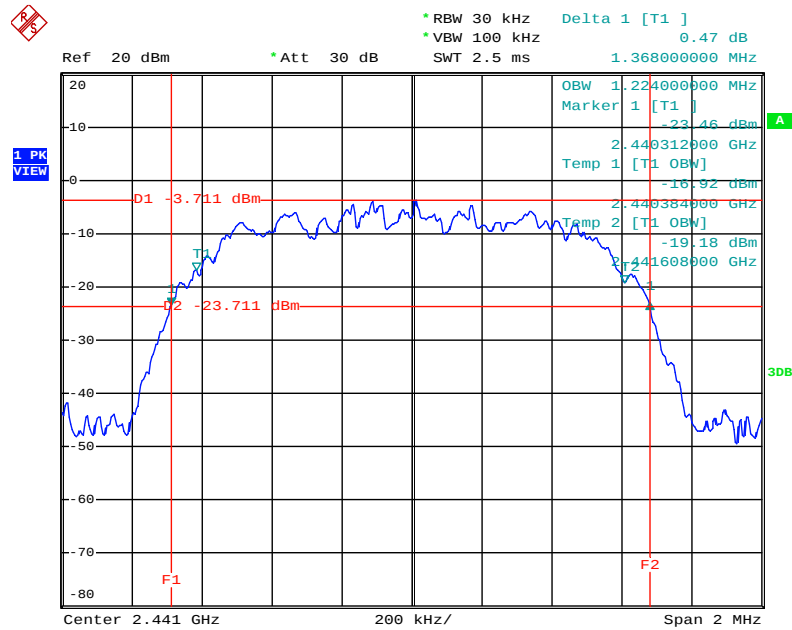


Date: 1.APR.2015 18:16:20

### 20 dB Bandwidth Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 78 / 2480 MHz

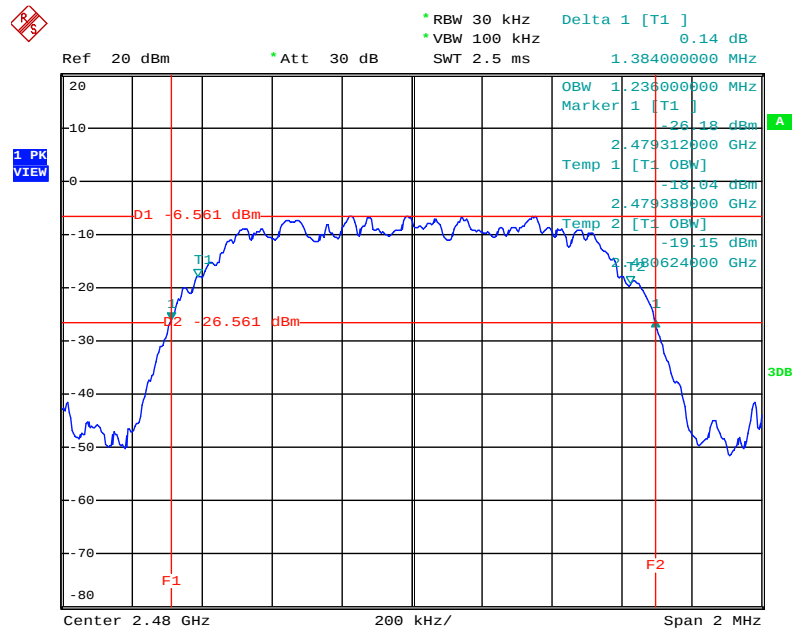


Date: 1.APR.2015 18:17:13

### Channel Separation Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

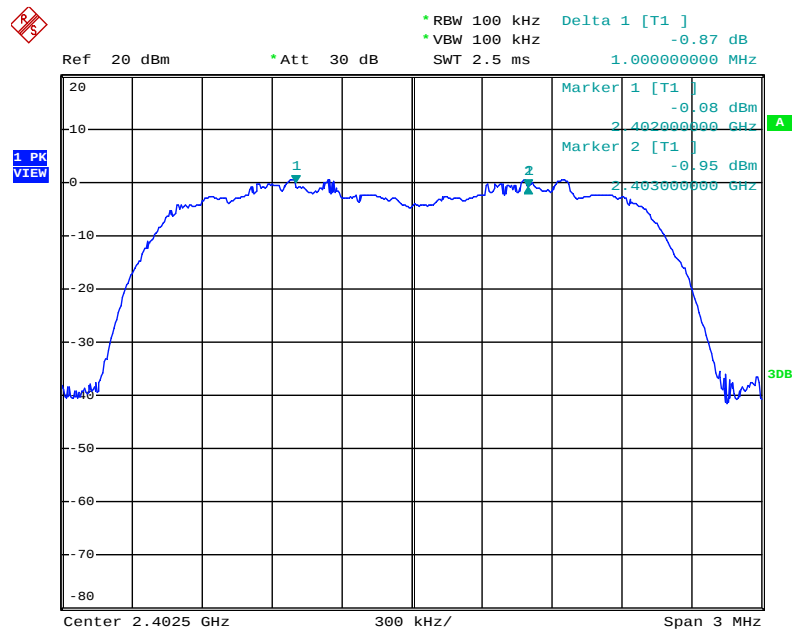


Date: 1.APR.2015 20:02:14

### Channel Separation Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

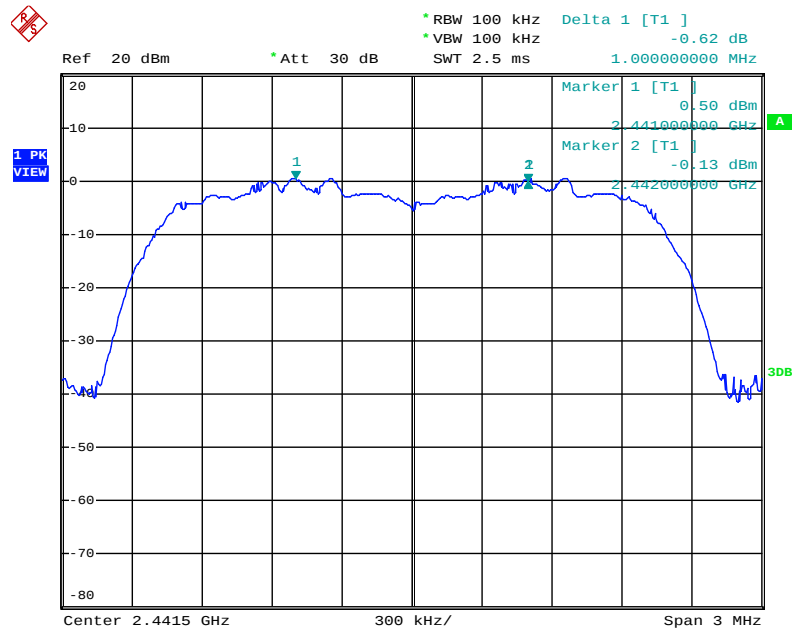

Date: 1.APR.2015 20:01:03

### Channel Separation Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

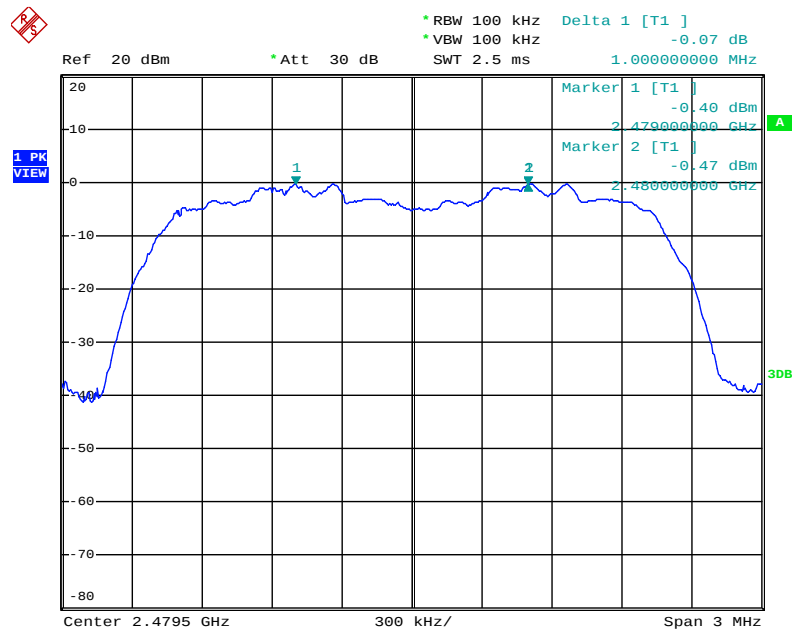

Date: 1.APR.2015 19:59:51



Ref 20 dBm      \* Att 30 dB      \* RBW 30 kHz      Delta 1 [T1]      0.62 dB

SWT 2.5 ms      1.352000000 MHz

OBW 1 2.28000000 MHz  
Marker 1 [T1]  
-23.46 dBm  
2.401308000 GHz  
Temp 1 [T1 OBW]  
-17.04 dBm  
2.401366000 GHz  
Temp 2 [T1 OBW]  
-16.81 dBm  
2.402596000 GHz

D1 -4.149 dBm  
D2 -24.149 dBm

F1      F2

Center 2.402 GHz      200 kHz/      Span 2 MHz

1 PK VIEW

3dB

1 PK VIEW


Ref 20 dBm \* Att 30 dB \* RBW 30 kHz Delta 1 [T1] 0.08 dB  
 \* VBW 100 kHz SWT 2.5 ms 1.292000000 MHz

OBW 1.216000000 MHz  
 Marker 1 [T1] -19.33 dBm  
 Temp 1 [T1 OBW] -16.43 dBm  
 Temp 2 [T1 OBW] -15.52 dBm  
 F1 F2

Center 2.441 GHz 200 kHz/ Span 2 MHz


Issued Date : Apr. 13, 2015

### 20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 78 / 2480 MHz

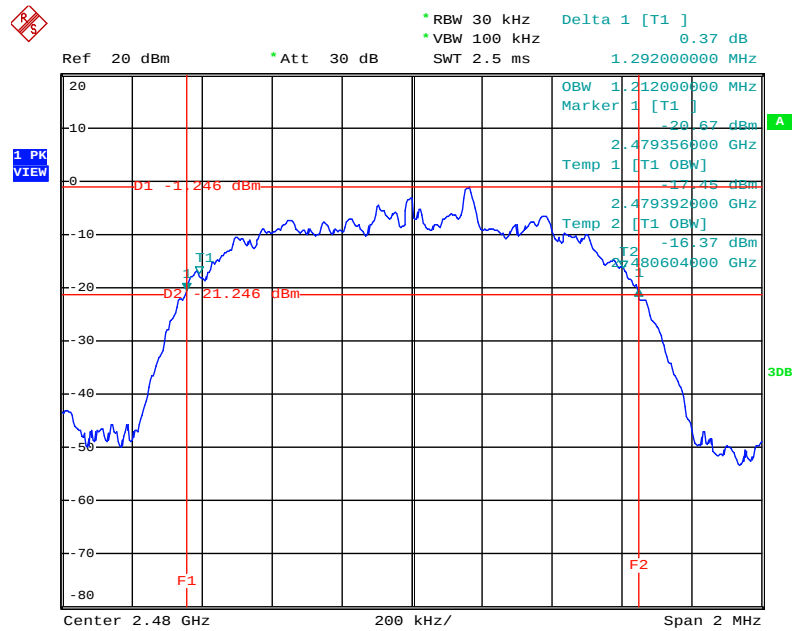


Date: 1.APR.2015 18:18:07

### Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

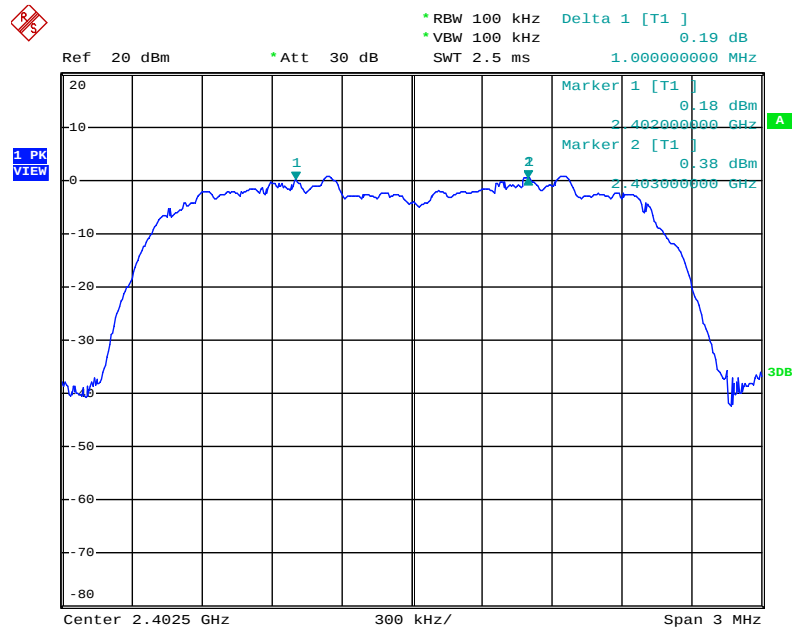


Date: 1.APR.2015 20:03:42

### Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz

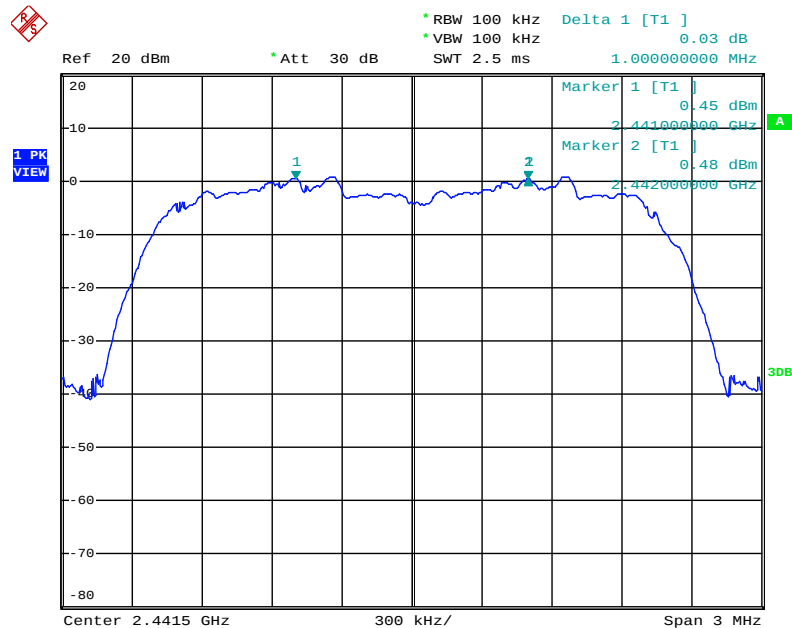

Date: 1.APR.2015 20:04:50

### Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

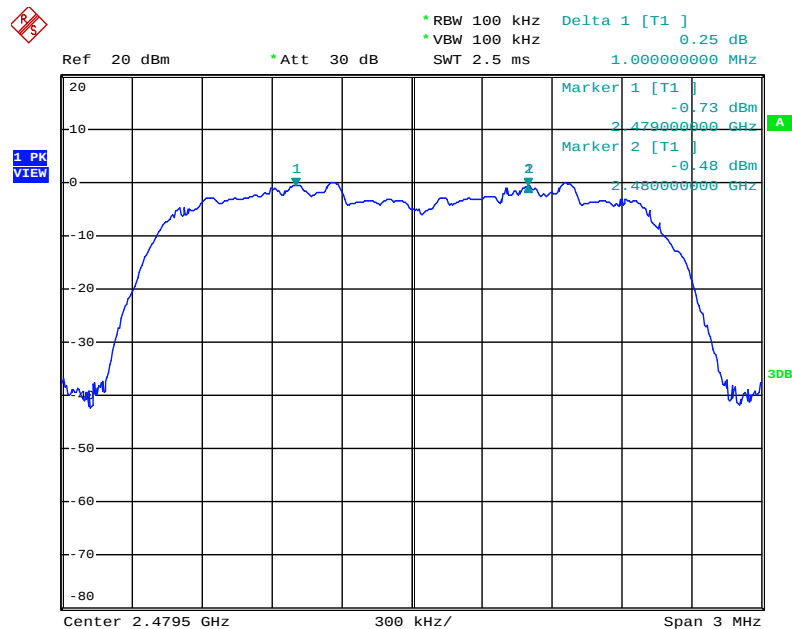

Date: 1.APR.2015 20:05:58

#### 4.4. Number of Hopping Frequency Measurement

##### 4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| Spectrum Parameters | Setting                     |
|---------------------|-----------------------------|
| Attenuation         | Auto                        |
| Span Frequency      | > Operating Frequency Range |
| RBW                 | 1000 kHz                    |
| VBW                 | 1000 kHz                    |
| Detector            | Peak                        |
| Trace               | Max Hold                    |
| Sweep Time          | Auto                        |

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1000 kHz and the video bandwidth of 1000 kHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

##### 4.4.4. Test Setup Layout

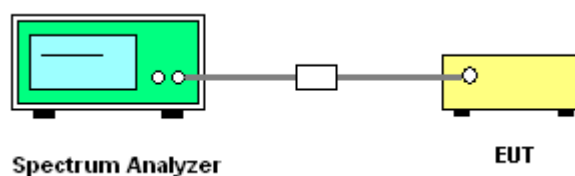

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

##### 4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Number of Hopping Frequency

|               |            |                |             |
|---------------|------------|----------------|-------------|
| Temperature   | 20°C       | Humidity       | 51%         |
| Test Engineer | Serway Lui | Configurations | EDR (8DPSK) |

| Modulation Type | Channel No. | Frequency (MHz) | Hopping Ch. (Channels) | Min. Limit (Channels) | Test Result |
|-----------------|-------------|-----------------|------------------------|-----------------------|-------------|
| EDR (8DPSK)     | 0 ~ 78      | 2402 ~ 2480MHz  | 79                     | 15                    | Complies    |

#### Number of Hopping Channel Plot on EDR (8DPSK) / Channel 0~78 / 2402 MHz ~ 2480 MHz

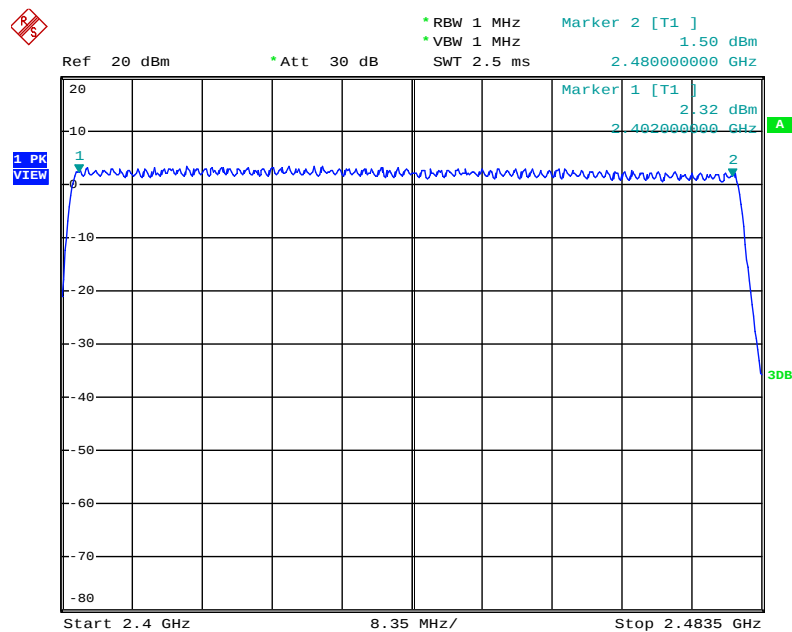

Date: 1.APR.2015 19:40:09

## 4.5. Dwell Time Measurement

### 4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| Spectrum Parameter | Setting        |
|--------------------|----------------|
| Attenuation        | Auto           |
| Span Frequency     | 0 MHz          |
| RBW                | 1000 kHz       |
| VBW                | 1000 kHz       |
| Detector           | Peak           |
| Trace              | Single Trigger |

### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH1, DH3, DH5 packet transmitting.
8. Measure the maximum time duration of one single pulse.

### 4.5.4. Test Setup Layout

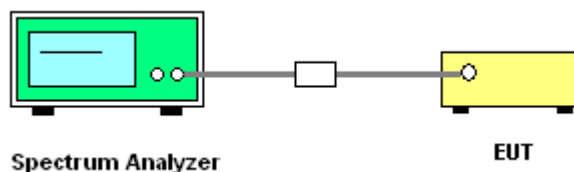

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 4.5.7. Test Result of Dwell Time

|               |           |                |                           |
|---------------|-----------|----------------|---------------------------|
| Temperature   | 20°C      | Humidity       | 51%                       |
| Test Engineer | Serway Li | Configurations | BR (GFSK) / DH1, DH3, DH5 |

| Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Result |
|-------------|-----------------|---------------------|----------------|------------|-------------|
| DH5         | 2402 MHz        | 2.9000              | 0.3093         | 0.4000     | Complies    |
| DH3         | 2402 MHz        | 1.6400              | 0.2624         | 0.4000     | Complies    |
| DH1         | 2402 MHz        | 0.3900              | 0.1248         | 0.4000     | Complies    |
| DH5         | 2441 MHz        | 2.9000              | 0.3093         | 0.4000     | Complies    |
| DH3         | 2441 MHz        | 1.6400              | 0.2624         | 0.4000     | Complies    |
| DH1         | 2441 MHz        | 0.3900              | 0.1248         | 0.4000     | Complies    |
| DH5         | 2480 MHz        | 2.9000              | 0.3093         | 0.4000     | Complies    |
| DH3         | 2480 MHz        | 1.6400              | 0.2624         | 0.4000     | Complies    |
| DH1         | 2480 MHz        | 0.3900              | 0.1248         | 0.4000     | Complies    |

**Note:** Pulse Duration \* Number of Pulses\*(Dwell time / measure time)


**Remark:**

Dwell Time= 79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.


Average Hopping Channel = hops / sweep time

### Dwell Time Plot on BR (GFSK) / Channel 0 / DH1 / 2402 MHz

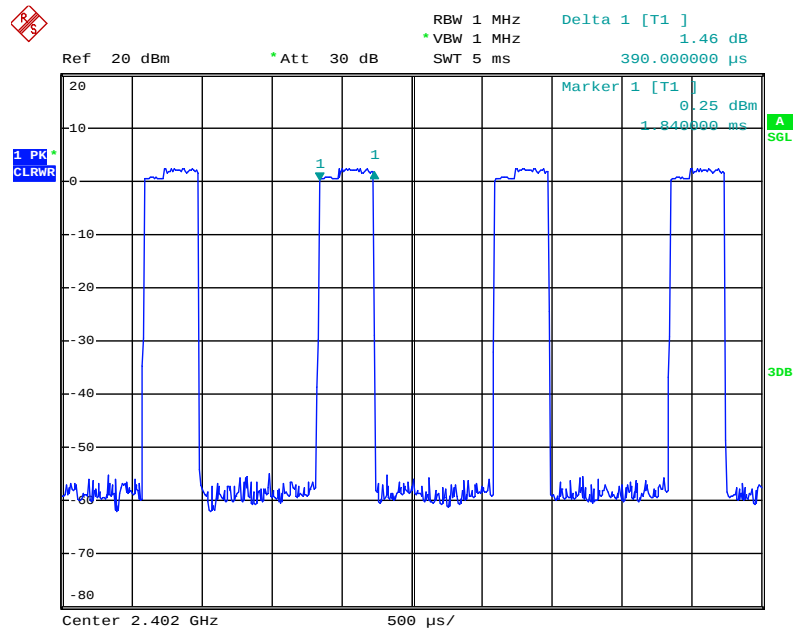


Date: 1.APR.2015 20:23:09

### Dwell Time Plot on BR (GFSK) / Channel 39 / DH1 / 2441 MHz

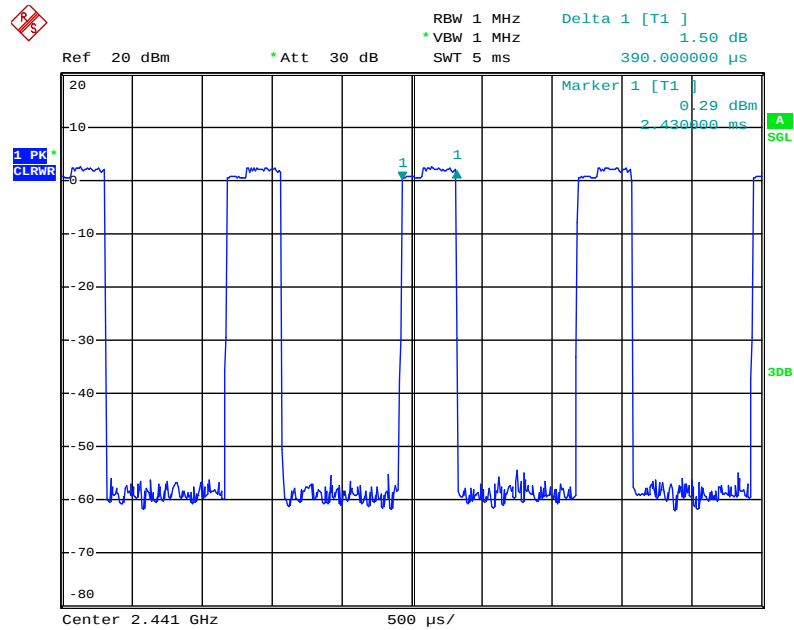


Date: 1.APR.2015 20:24:01

### Dwell Time Plot on BR (GFSK) / Channel 78 / DH1 / 2480 MHz

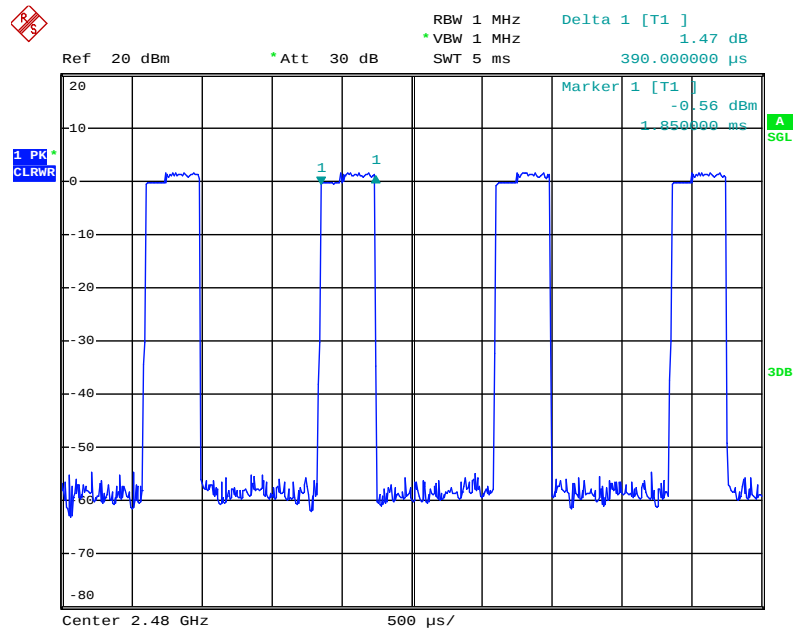


Date: 1.APR.2015 20:24:43

### Dwell Time Plot on BR (GFSK) / Channel 0 / DH3 / 2402 MHz

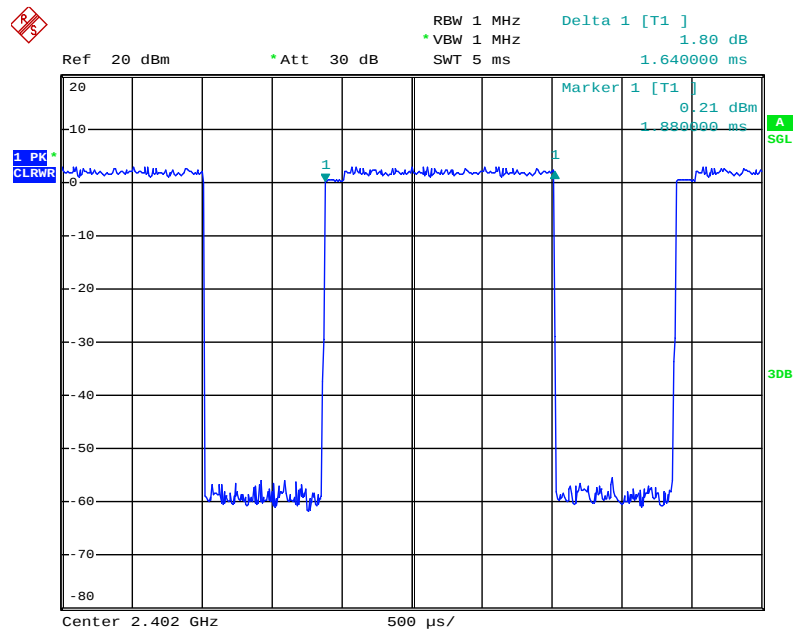


Date: 1.APR.2015 20:20:51

### Dwell Time Plot on BR (GFSK) / Channel 39 / DH3 / 2441 MHz

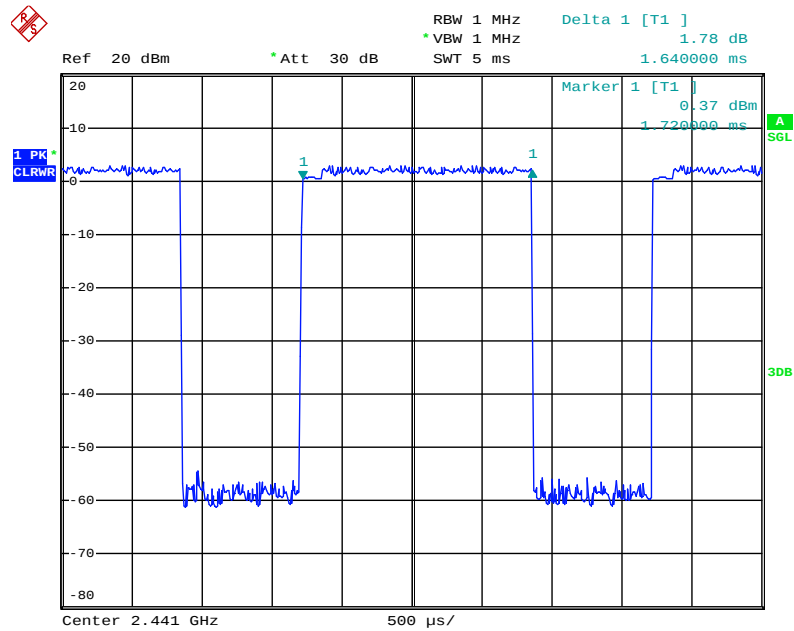


Date: 1.APR.2015 20:18:48

### Dwell Time Plot on BR (GFSK) / Channel 78 / DH3 / 2480 MHz

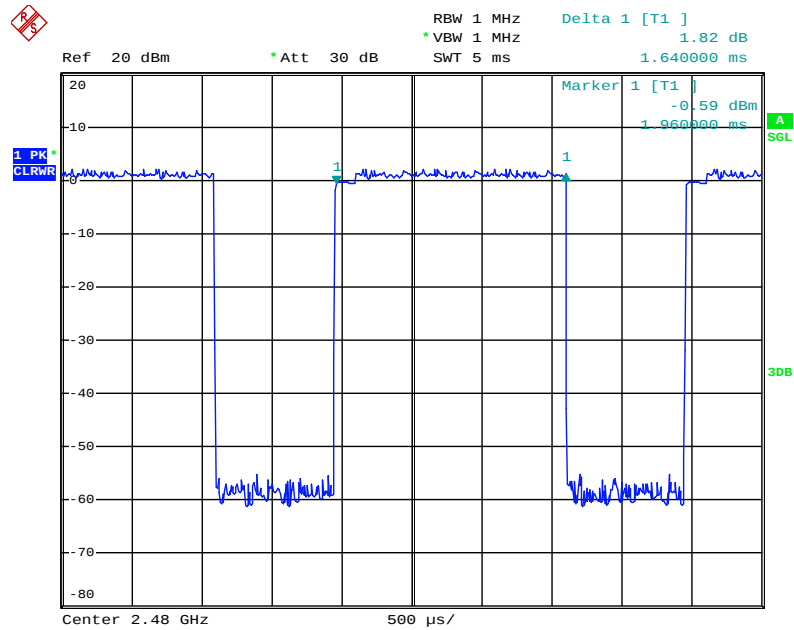


Date: 1.APR.2015 20:20:03

### Dwell Time Plot on BR (GFSK) / Channel 0 / DH5 / 2402 MHz

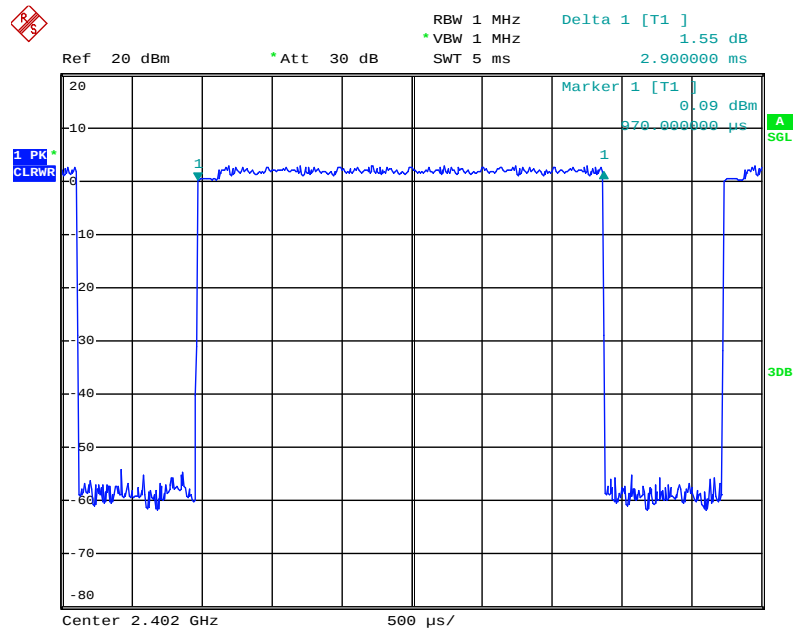


Date: 1.APR.2015 20:13:53

### Dwell Time Plot on BR (GFSK) / Channel 39 / DH5 / 2441 MHz

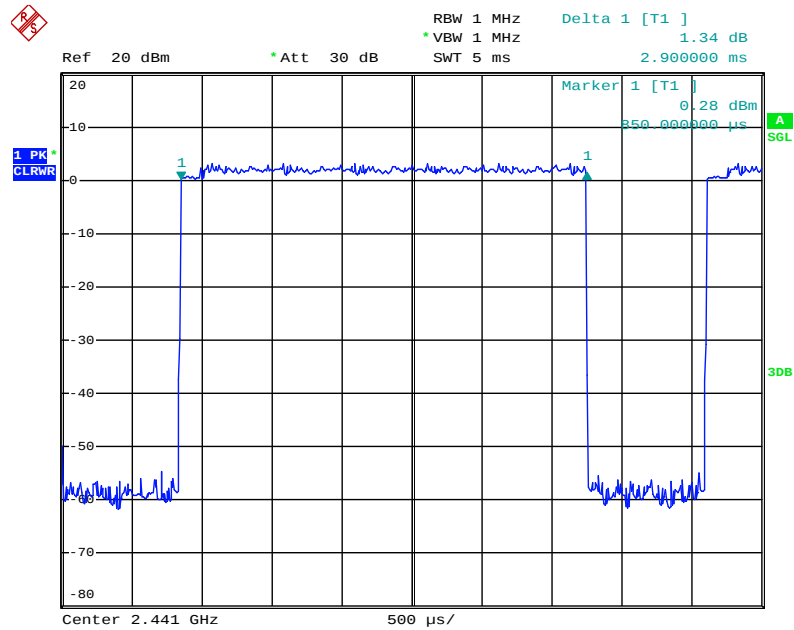

Date: 1.APR.2015 20:11:48

### Dwell Time Plot on BR (GFSK) / Channel 78 / DH5 / 2480 MHz

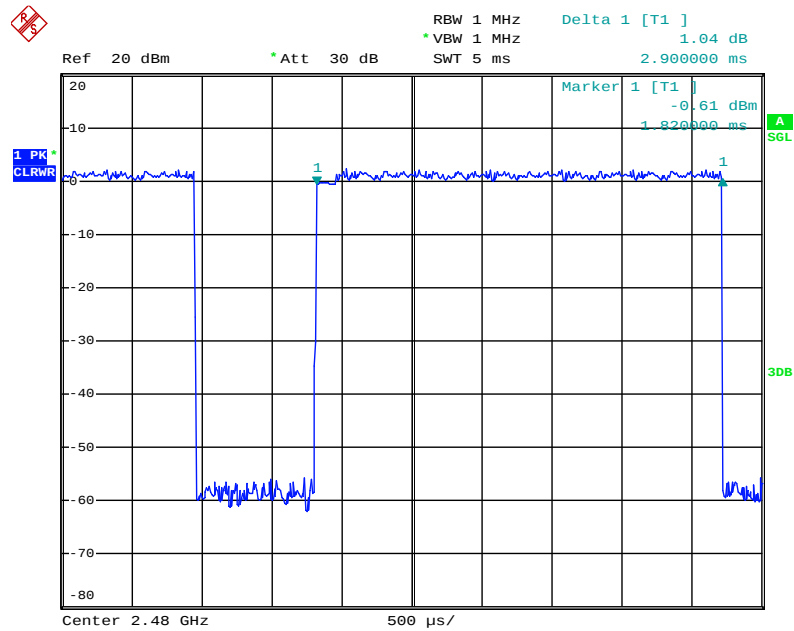

Date: 1.APR.2015 20:13:03

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                          | Setting                                           |
|---------------------------------------------|---------------------------------------------------|
| Attenuation                                 | Auto                                              |
| Start Frequency                             | 1000 MHz                                          |
| Stop Frequency                              | 10th carrier harmonic                             |
| RBW / VBW (Emission in restricted band)     | 1 MHz / 3MHz for Peak,<br>1 MHz / 1/T for Average |
| RBW / VBW (Emission in non-restricted band) | 100kHz, 300kHz for peak                           |


| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz, RBW 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz, RBW 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz, RBW 120kHz for QP |

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

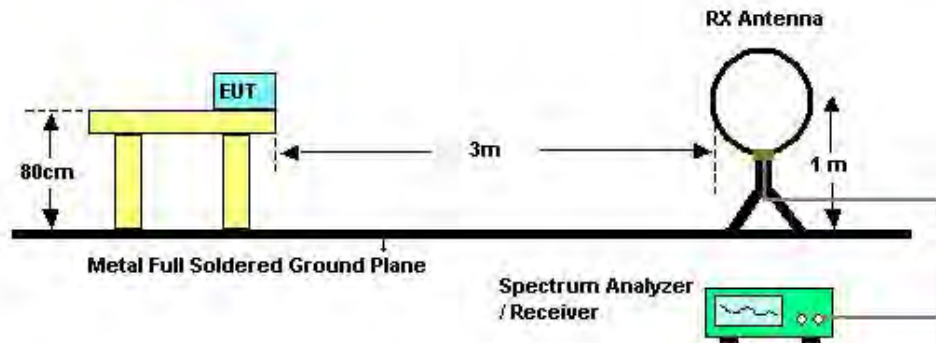

For Radiated Emissions: 30MHz~1GHz

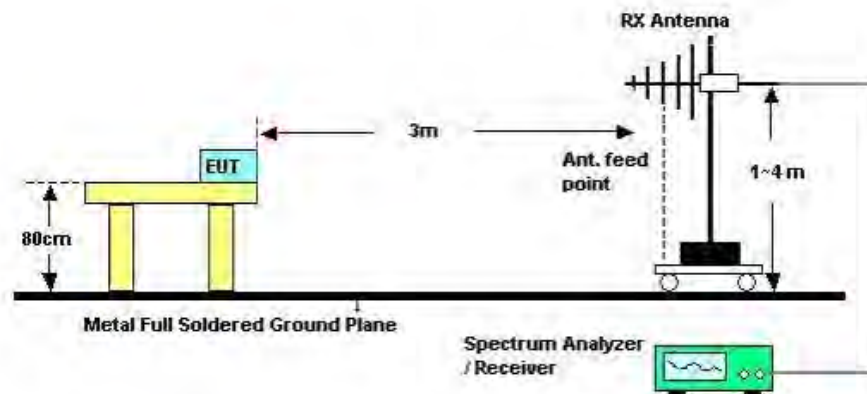

For Radiated Emissions: Above 1GHz

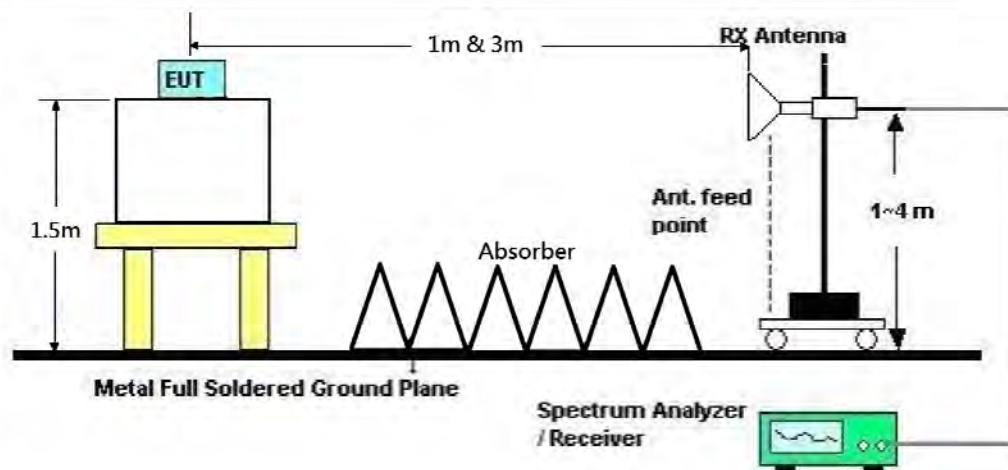

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

|                |                      |           |                               |
|----------------|----------------------|-----------|-------------------------------|
| Temperature    | 25°C                 | Humidity  | 65%                           |
| Test Engineer  | Roki Liu, Akina Chiu | Test Date | Apr. 01, 2015 ~ Apr. 02, 2015 |
| Configurations | Normal Link / Mode 1 |           |                               |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Limit Line<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.6.8. Results of Radiated Emissions (30MHz~1GHz)


|               |                      |                |                      |
|---------------|----------------------|----------------|----------------------|
| Temperature   | 25°C                 | Humidity       | 65%                  |
| Test Engineer | Roki Liu, Akina Chiu | Configurations | Normal Link / Mode 1 |

##### Horizontal

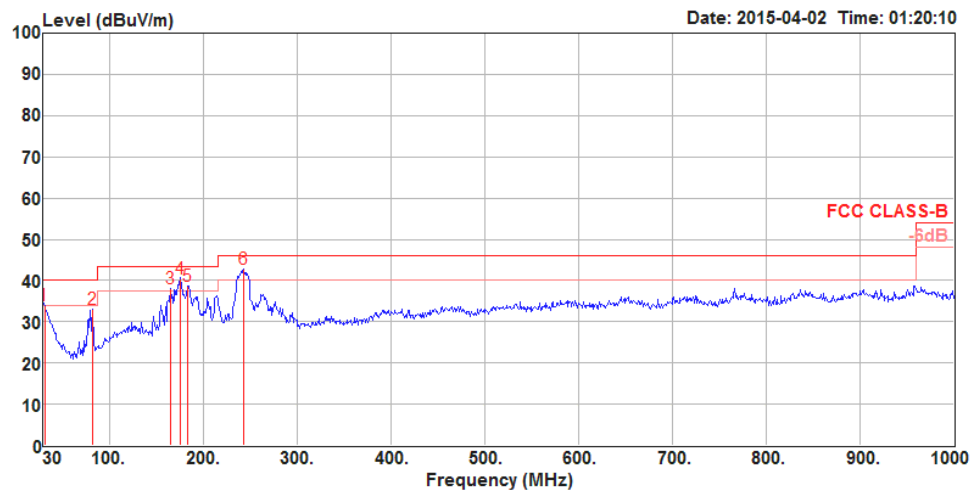

|   | Freq   | Level  | Limit  | Over  | Read  | Cable | Antenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase  |
|---|--------|--------|--------|-------|-------|-------|---------|--------|-------|-------|--------|------------|
|   | MHz    | dBuV/m | dBuV/m | dB    | dBuV  | dB    | dB/m    | dB     | cm    | deg   |        |            |
| 1 | 30.97  | 34.05  | 40.00  | -5.95 | 50.29 | 0.45  | 19.50   | 36.19  | 150   | 359   | Peak   | HORIZONTAL |
| 2 | 82.38  | 32.91  | 40.00  | -7.09 | 60.67 | 0.79  | 7.92    | 36.47  | 300   | 74    | Peak   | HORIZONTAL |
| 3 | 164.83 | 37.93  | 43.50  | -5.57 | 62.99 | 1.12  | 10.55   | 36.73  | 150   | 140   | Peak   | HORIZONTAL |
| 4 | 175.50 | 40.50  | 43.50  | -3.00 | 66.14 | 1.14  | 9.97    | 36.75  | 150   | 150   | Peak   | HORIZONTAL |
| 5 | 183.26 | 38.75  | 43.50  | -4.75 | 64.68 | 1.17  | 9.67    | 36.77  | 150   | 150   | Peak   | HORIZONTAL |
| 6 | 243.40 | 42.71  | 46.00  | -3.29 | 65.89 | 1.36  | 12.45   | 36.99  | 125   | 154   | Peak   | HORIZONTAL |

## Vertical

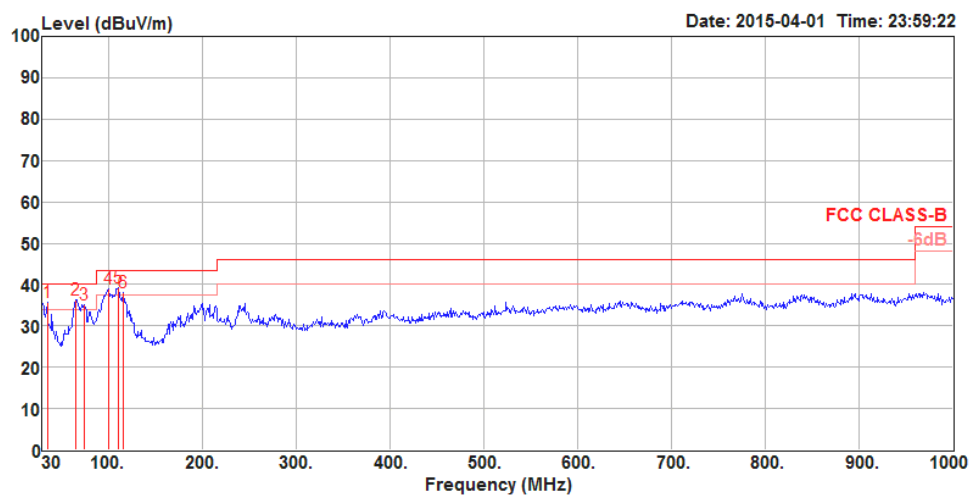

|   | Freq   | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | A/Pos | T/Pos | Remark   | Pol/Phase |
|---|--------|--------|--------|-------|-------|--------------|--------|-------|-------|----------|-----------|
|   | MHz    | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | cm    | deg      |           |
| 1 | 34.85  | 35.80  | 40.00  | -4.20 | 54.31 | 0.51         | 17.18  | 36.20 | 125   | 313 Peak | VERTICAL  |
| 2 | 65.89  | 36.41  | 40.00  | -3.59 | 65.23 | 0.70         | 6.84   | 36.36 | 125   | 313 Peak | VERTICAL  |
| 3 | 74.62  | 35.03  | 40.00  | -4.97 | 63.52 | 0.75         | 7.18   | 36.42 | 150   | 154 Peak | VERTICAL  |
| 4 | 100.81 | 38.81  | 43.50  | -4.69 | 63.30 | 0.87         | 11.20  | 36.56 | 150   | 97 Peak  | VERTICAL  |
| 5 | 110.51 | 39.22  | 43.50  | -4.28 | 62.58 | 0.91         | 12.33  | 36.60 | 100   | 107 Peak | VERTICAL  |
| 6 | 115.36 | 38.01  | 43.50  | -5.49 | 61.12 | 0.93         | 12.57  | 36.61 | 100   | 157 Peak | VERTICAL  |

### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

|               |                      |                |                       |
|---------------|----------------------|----------------|-----------------------|
| Temperature   | 25°C                 | Humidity       | 65%                   |
| Test Engineer | Roki Liu, Akina Chiu | Configurations | BR (GFSK) / Channel 0 |
| Test Date     | Mar. 31, 2015        |                |                       |

##### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4811.70  | 34.29  | 54.00      | -19.71     | 30.62      | 5.85              | 32.78          | 34.96         | Average | 112   | 231   | HORIZONTAL |
| 2 | 4813.55  | 47.49  | 74.00      | -26.51     | 43.82      | 5.85              | 32.78          | 34.96         | Peak    | 112   | 231   | HORIZONTAL |
| 3 | 12001.40 | 58.63  | 74.00      | -15.37     | 44.14      | 9.35              | 40.00          | 34.86         | Peak    | 177   | 299   | HORIZONTAL |
| 4 | 12016.77 | 45.17  | 54.00      | -8.83      | 30.66      | 9.35              | 40.00          | 34.84         | Average | 177   | 299   | HORIZONTAL |

##### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4809.96  | 47.41  | 74.00      | -26.59     | 43.74      | 5.85              | 32.78          | 34.96         | Peak    | 147   | 219   | VERTICAL  |
| 2 | 4812.25  | 34.43  | 54.00      | -19.57     | 30.76      | 5.85              | 32.78          | 34.96         | Average | 147   | 219   | VERTICAL  |
| 3 | 12010.00 | 45.07  | 54.00      | -8.93      | 30.56      | 9.35              | 40.00          | 34.84         | Average | 107   | 310   | VERTICAL  |
| 4 | 12016.74 | 57.92  | 74.00      | -16.08     | 43.41      | 9.35              | 40.00          | 34.84         | Peak    | 107   | 310   | VERTICAL  |

|               |                      |                |                        |
|---------------|----------------------|----------------|------------------------|
| Temperature   | 25°C                 | Humidity       | 65%                    |
| Test Engineer | Roki Liu, Akina Chiu | Configurations | BR (GFSK) / Channel 39 |
| Test Date     | Apr. 01, 2015        |                |                        |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4872.33  | 34.54  | 54.00      | -19.46     | 30.65      | 5.92       | 32.93          | 34.96         | Average | 147   | 219   | HORIZONTAL |
| 2 | 4886.34  | 47.91  | 74.00      | -26.09     | 43.97      | 5.93       | 32.97          | 34.96         | Peak    | 147   | 219   | HORIZONTAL |
| 3 | 7313.33  | 39.52  | 54.00      | -14.48     | 30.65      | 7.13       | 36.97          | 35.23         | Average | 233   | 306   | HORIZONTAL |
| 4 | 7320.54  | 52.83  | 74.00      | -21.17     | 43.93      | 7.14       | 36.99          | 35.23         | Peak    | 233   | 306   | HORIZONTAL |
| 5 | 12202.54 | 58.64  | 74.00      | -15.36     | 43.92      | 9.38       | 40.04          | 34.70         | Peak    | 106   | 155   | HORIZONTAL |
| 6 | 12209.86 | 45.46  | 54.00      | -8.54      | 30.72      | 9.38       | 40.04          | 34.68         | Average | 106   | 155   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4872.39  | 48.53  | 74.00      | -25.47     | 44.64      | 5.92       | 32.93          | 34.96         | Peak    | 167   | 201   | VERTICAL  |
| 2 | 4889.70  | 34.49  | 54.00      | -19.51     | 30.54      | 5.93       | 32.97          | 34.95         | Average | 167   | 201   | VERTICAL  |
| 3 | 7313.39  | 53.51  | 74.00      | -20.49     | 44.64      | 7.13       | 36.97          | 35.23         | Peak    | 169   | 264   | VERTICAL  |
| 4 | 7329.66  | 39.41  | 54.00      | -14.59     | 30.51      | 7.14       | 36.99          | 35.23         | Average | 169   | 264   | VERTICAL  |
| 5 | 12195.39 | 59.35  | 74.00      | -14.65     | 44.63      | 9.38       | 40.04          | 34.70         | Peak    | 177   | 293   | VERTICAL  |
| 6 | 12203.81 | 45.08  | 54.00      | -8.92      | 30.36      | 9.38       | 40.04          | 34.70         | Average | 177   | 293   | VERTICAL  |

|               |                      |                |                        |
|---------------|----------------------|----------------|------------------------|
| Temperature   | 25°C                 | Humidity       | 65%                    |
| Test Engineer | Roki Liu, Akina Chiu | Configurations | BR (GFSK) / Channel 78 |
| Test Date     | Apr. 01, 2015        |                |                        |

#### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp |         | A/Pos | T/Pos |            |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | Limit  | Level | Loss  | Factor  | Factor | Remark  | cm    | deg   | Pol/Phase  |
| 1 | 4954.88  | 34.59  | 54.00  | -19.41 | 30.42 | 6.00  | 33.12   | 34.95  | Average | 122   | 231   | HORIZONTAL |
| 2 | 4955.05  | 48.96  | 74.00  | -25.04 | 44.79 | 6.00  | 33.12   | 34.95  | Peak    | 122   | 231   | HORIZONTAL |
| 3 | 7434.88  | 39.52  | 54.00  | -14.48 | 30.41 | 7.20  | 37.14   | 35.23  | Average | 162   | 287   | HORIZONTAL |
| 4 | 7439.39  | 53.69  | 74.00  | -20.31 | 44.59 | 7.20  | 37.14   | 35.24  | Peak    | 162   | 287   | HORIZONTAL |
| 5 | 12399.16 | 45.48  | 54.00  | -8.52  | 30.53 | 9.42  | 40.08   | 34.55  | Average | 133   | 211   | HORIZONTAL |
| 6 | 12399.39 | 59.53  | 74.00  | -14.47 | 44.58 | 9.42  | 40.08   | 34.55  | Peak    | 133   | 211   | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp |         | A/Pos | T/Pos |           |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | Limit  | Level | Loss  | Factor  | Factor | Remark  | cm    | deg   | Pol/Phase |
| 1 | 4955.72  | 48.96  | 74.00  | -25.04 | 44.79 | 6.00  | 33.12   | 34.95  | Peak    | 109   | 210   | VERTICAL  |
| 2 | 4961.74  | 34.74  | 54.00  | -19.26 | 30.57 | 6.00  | 33.12   | 34.95  | Average | 109   | 210   | VERTICAL  |
| 3 | 7435.72  | 53.90  | 74.00  | -20.10 | 44.79 | 7.20  | 37.14   | 35.23  | Peak    | 184   | 203   | VERTICAL  |
| 4 | 7441.74  | 39.67  | 54.00  | -14.33 | 30.57 | 7.20  | 37.14   | 35.24  | Average | 184   | 203   | VERTICAL  |
| 5 | 12395.72 | 59.74  | 74.00  | -14.26 | 44.80 | 9.41  | 40.08   | 34.55  | Peak    | 127   | 251   | VERTICAL  |
| 6 | 12401.74 | 45.52  | 54.00  | -8.48  | 30.57 | 9.42  | 40.08   | 34.55  | Average | 127   | 251   | VERTICAL  |

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

|               |                      |                |                         |
|---------------|----------------------|----------------|-------------------------|
| Temperature   | 25°C                 | Humidity       | 65%                     |
| Test Engineer | Roki Liu, Akina Chiu | Configurations | EDR (8DPSK) / Channel 0 |
| Test Date     | Apr. 01, 2015        |                |                         |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamplifier Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB                  |         | cm    | deg   |            |
| 1 | 4795.66  | 34.73  | 54.00      | -19.27     | 31.11      | 5.84              | 32.74          | 34.96               | Average | 103   | 219   | HORIZONTAL |
| 2 | 4811.99  | 47.37  | 74.00      | -26.63     | 43.70      | 5.85              | 32.78          | 34.96               | Peak    | 103   | 219   | HORIZONTAL |
| 3 | 12001.66 | 45.60  | 54.00      | -8.40      | 31.11      | 9.35              | 40.00          | 34.86               | Average | 191   | 237   | HORIZONTAL |
| 4 | 12017.99 | 58.21  | 74.00      | -15.79     | 43.70      | 9.35              | 40.00          | 34.84               | Peak    | 191   | 237   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamplifier Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB                  |         | cm    | deg   |           |
| 1 | 4795.98  | 34.15  | 54.00      | -19.85     | 30.53      | 5.84              | 32.74          | 34.96               | Average | 121   | 241   | VERTICAL  |
| 2 | 4804.09  | 47.80  | 74.00      | -26.20     | 44.13      | 5.85              | 32.78          | 34.96               | Peak    | 121   | 241   | VERTICAL  |
| 3 | 12009.33 | 44.91  | 54.00      | -9.09      | 30.40      | 9.35              | 40.00          | 34.84               | Average | 141   | 238   | VERTICAL  |
| 4 | 12010.09 | 58.64  | 74.00      | -15.36     | 44.13      | 9.35              | 40.00          | 34.84               | Peak    | 141   | 238   | VERTICAL  |

|               |                      |                |                          |
|---------------|----------------------|----------------|--------------------------|
| Temperature   | 25°C                 | Humidity       | 65%                      |
| Test Engineer | Roki Liu, Akina Chiu | Configurations | EDR (8DPSK) / Channel 39 |
| Test Date     | Apr. 01, 2015        |                |                          |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4872.22  | 34.15  | 54.00      | -19.85     | 30.26      | 5.92       | 32.93          | 34.96         | Average | 197   | 187   | HORIZONTAL |
| 2 | 4891.03  | 48.57  | 74.00      | -25.43     | 44.62      | 5.93       | 32.97          | 34.95         | Peak    | 197   | 187   | HORIZONTAL |
| 3 | 7326.21  | 53.20  | 74.00      | -20.80     | 44.30      | 7.14       | 36.99          | 35.23         | Peak    | 165   | 233   | HORIZONTAL |
| 4 | 7332.09  | 39.56  | 54.00      | -14.44     | 30.66      | 7.14       | 36.99          | 35.23         | Average | 165   | 233   | HORIZONTAL |
| 5 | 12205.93 | 58.18  | 74.00      | -15.82     | 43.46      | 9.38       | 40.04          | 34.70         | Peak    | 162   | 172   | HORIZONTAL |
| 6 | 12214.09 | 45.41  | 54.00      | -8.59      | 30.66      | 9.39       | 40.04          | 34.68         | Average | 162   | 172   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4887.64  | 34.54  | 54.00      | -19.46     | 30.60      | 5.93       | 32.97          | 34.96         | Average | 106   | 211   | VERTICAL  |
| 2 | 4891.03  | 48.57  | 74.00      | -25.43     | 44.62      | 5.93       | 32.97          | 34.95         | Peak    | 106   | 211   | VERTICAL  |
| 3 | 7332.03  | 53.52  | 74.00      | -20.48     | 44.62      | 7.14       | 36.99          | 35.23         | Peak    | 154   | 233   | VERTICAL  |
| 4 | 7332.99  | 39.50  | 54.00      | -14.50     | 30.57      | 7.15       | 37.01          | 35.23         | Average | 154   | 233   | VERTICAL  |
| 5 | 12214.03 | 59.37  | 74.00      | -14.63     | 44.62      | 9.39       | 40.04          | 34.68         | Peak    | 134   | 142   | VERTICAL  |
| 6 | 12214.96 | 44.92  | 54.00      | -9.08      | 30.17      | 9.39       | 40.04          | 34.68         | Average | 134   | 142   | VERTICAL  |

|               |                      |                |                          |
|---------------|----------------------|----------------|--------------------------|
| Temperature   | 25°C                 | Humidity       | 65%                      |
| Test Engineer | Roki Liu, Akina Chiu | Configurations | EDR (8DPSK) / Channel 78 |
| Test Date     | Apr. 01, 2015        |                |                          |

#### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |            |
| 1 | 4960.41  | 47.80  | 74.00  | -26.20 | 43.63 | 6.00  | 33.12   | 34.95  | Peak    | 174   | 163   | HORIZONTAL |
| 2 | 4963.01  | 34.47  | 54.00  | -19.53 | 30.30 | 6.00  | 33.12   | 34.95  | Average | 174   | 163   | HORIZONTAL |
| 3 | 7440.41  | 52.74  | 74.00  | -21.26 | 43.64 | 7.20  | 37.14   | 35.24  | Peak    | 156   | 193   | HORIZONTAL |
| 4 | 7443.01  | 39.41  | 54.00  | -14.59 | 30.31 | 7.20  | 37.14   | 35.24  | Average | 156   | 193   | HORIZONTAL |
| 5 | 12400.41 | 58.59  | 74.00  | -15.41 | 43.64 | 9.42  | 40.08   | 34.55  | Peak    | 121   | 231   | HORIZONTAL |
| 6 | 12404.51 | 45.26  | 54.00  | -8.74  | 30.31 | 9.42  | 40.08   | 34.55  | Average | 121   | 231   | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 4950.59  | 34.52  | 54.00  | -19.48 | 30.40 | 5.98  | 33.09   | 34.95  | Average | 159   | 127   | VERTICAL  |
| 2 | 4964.28  | 48.59  | 74.00  | -25.41 | 44.42 | 6.00  | 33.12   | 34.95  | Peak    | 159   | 127   | VERTICAL  |
| 3 | 7430.59  | 39.48  | 54.00  | -14.52 | 30.40 | 7.19  | 37.12   | 35.23  | Average | 134   | 201   | VERTICAL  |
| 4 | 7444.28  | 53.53  | 74.00  | -20.47 | 44.43 | 7.20  | 37.14   | 35.24  | Peak    | 134   | 201   | VERTICAL  |
| 5 | 12395.66 | 45.27  | 54.00  | -8.73  | 30.33 | 9.41  | 40.08   | 34.55  | Average | 199   | 237   | VERTICAL  |
| 6 | 12404.28 | 59.37  | 74.00  | -14.63 | 44.42 | 9.42  | 40.08   | 34.55  | Peak    | 199   | 237   | VERTICAL  |

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Emissions Measurement

### 4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                                  | Setting                                         |
|-----------------------------------------------------|-------------------------------------------------|
| Attenuation                                         | Auto                                            |
| Span Frequency                                      | 100 MHz                                         |
| RBW / VBW (Emission in restricted band)             | 1MHz / 3MHz for Peak,<br>1MHz / 1/T for Average |
| RBW / VBW (20dBc in any 100 kHz bandwidth emission) | 100 kHz /100 kHz for Peak                       |

### 4.7.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- The test procedure is follow 15.247(d).

#### **4.7.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.6.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.6.4.

#### **4.7.5. Test Deviation**

There is no deviation with the original standard.

#### **4.7.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

|               |                      |                |                               |
|---------------|----------------------|----------------|-------------------------------|
| Temperature   | 25°C                 | Humidity       | 65%                           |
| Test Engineer | Roki Liu, Akina Chiu | Configurations | BR (GFSK) / Channel 0, 39, 78 |
| Test Date     | Mar. 31, 2015        |                |                               |

##### Channel 0

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp |        | A/Pos   | T/Pos |                |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|----------------|
|   | MHz     | dBuV/m | Line   | Limit  | Level | Loss         | Factor | Factor | Remark  | cm    | deg            |
|   |         |        | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     |         |       | Pol/Phase      |
| 1 | 2383.05 | 60.56  | 74.00  | -13.44 | 27.65 | 4.08         | 28.83  | 0.00   | Peak    | 181   | 151 HORIZONTAL |
| 2 | 2389.57 | 47.80  | 54.00  | -6.20  | 14.87 | 4.09         | 28.84  | 0.00   | Average | 181   | 151 HORIZONTAL |
| 3 | 2401.86 | 100.35 |        |        | 67.42 | 4.09         | 28.84  | 0.00   | Peak    | 181   | 151 HORIZONTAL |
| 4 | 2402.00 | 99.76  |        |        | 66.83 | 4.09         | 28.84  | 0.00   | Average | 181   | 151 HORIZONTAL |

Item 3, 4 are the fundamental frequency at 2402 MHz.

##### Channel 39

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp |        | A/Pos   | T/Pos |              |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|--------------|
|   | MHz     | dBuV/m | Line   | Limit  | Level | Loss         | Factor | Factor | Remark  | cm    | deg          |
|   |         |        | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     |         |       | Pol/Phase    |
| 1 | 2389.13 | 60.05  | 74.00  | -13.95 | 27.12 | 4.09         | 28.84  | 0.00   | Peak    | 157   | 178 VERTICAL |
| 2 | 2390.00 | 47.24  | 54.00  | -6.76  | 14.31 | 4.09         | 28.84  | 0.00   | Average | 157   | 178 VERTICAL |
| 3 | 2441.00 | 99.25  |        |        | 66.25 | 4.13         | 28.87  | 0.00   | Average | 157   | 178 VERTICAL |
| 4 | 2441.29 | 100.14 |        |        | 67.14 | 4.13         | 28.87  | 0.00   | Peak    | 157   | 178 VERTICAL |
| 5 | 2483.50 | 48.04  | 54.00  | -5.96  | 14.99 | 4.16         | 28.89  | 0.00   | Average | 157   | 178 VERTICAL |
| 6 | 2483.50 | 61.24  | 74.00  | -12.76 | 28.19 | 4.16         | 28.89  | 0.00   | Peak    | 157   | 178 VERTICAL |

Item 3, 4 are the fundamental frequency at 2441 MHz.

##### Channel 78

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp |        | A/Pos   | T/Pos |                |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|----------------|
|   | MHz     | dBuV/m | Line   | Limit  | Level | Loss         | Factor | Factor | Remark  | cm    | deg            |
|   |         |        | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     |         |       | Pol/Phase      |
| 1 | 2479.86 | 100.54 |        |        | 67.49 | 4.16         | 28.89  | 0.00   | Peak    | 194   | 138 HORIZONTAL |
| 2 | 2480.00 | 99.71  |        |        | 66.66 | 4.16         | 28.89  | 0.00   | Average | 194   | 138 HORIZONTAL |
| 3 | 2484.22 | 61.73  | 74.00  | -12.27 | 28.68 | 4.16         | 28.89  | 0.00   | Peak    | 194   | 138 HORIZONTAL |
| 4 | 2484.37 | 48.33  | 54.00  | -5.67  | 15.28 | 4.16         | 28.89  | 0.00   | Average | 194   | 138 HORIZONTAL |

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

|               |                      |                |                                 |
|---------------|----------------------|----------------|---------------------------------|
| Temperature   | 25°C                 | Humidity       | 65%                             |
| Test Engineer | Roki Liu, Akina Chiu | Configurations | EDR (8DPSK) / Channel 0, 39, 78 |
| Test Date     | Mar. 31, 2015        |                |                                 |

#### Channel 0

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | Remark       | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|---------------|--------------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB           | cm    | deg   |           |
| 1 | 2387.54 | 49.69  | 54.00      | -4.31      | 16.76      | 4.09              | 28.84         | 0.00 Average | 151   | 124   | VERTICAL  |
| 2 | 2387.54 | 60.80  | 74.00      | -13.20     | 27.87      | 4.09              | 28.84         | 0.00 Peak    | 151   | 124   | VERTICAL  |
| 3 | 2401.86 | 95.67  |            |            | 62.74      | 4.09              | 28.84         | 0.00 Average | 151   | 124   | VERTICAL  |
| 4 | 2402.00 | 99.82  |            |            | 66.89      | 4.09              | 28.84         | 0.00 Peak    | 151   | 124   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2402 MHz.

#### Channel 39

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | Remark       | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|-------------------|---------------|--------------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB           | cm    | deg   |            |
| 1 | 2386.53 | 61.53  | 74.00      | -12.47     | 28.60      | 4.09              | 28.84         | 0.00 Peak    | 204   | 157   | HORIZONTAL |
| 2 | 2389.71 | 48.84  | 54.00      | -5.16      | 15.91      | 4.09              | 28.84         | 0.00 Average | 45    | 157   | HORIZONTAL |
| 3 | 2441.00 | 98.27  |            |            | 65.27      | 4.13              | 28.87         | 0.00 Average | 204   | 157   | HORIZONTAL |
| 4 | 2441.29 | 102.39 |            |            | 69.39      | 4.13              | 28.87         | 0.00 Peak    | 204   | 157   | HORIZONTAL |
| 5 | 2482.92 | 50.26  | 54.00      | -3.74      | 17.21      | 4.16              | 28.89         | 0.00 Average | 204   | 157   | HORIZONTAL |
| 6 | 2483.50 | 62.22  | 74.00      | -11.78     | 29.17      | 4.16              | 28.89         | 0.00 Peak    | 204   | 157   | HORIZONTAL |

Item 3, 4 are the fundamental frequency at 2441 MHz.

#### Channel 78

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | Remark       | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|---------------|--------------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB           | cm    | deg   |           |
| 1 | 2479.86 | 94.77  |            |            | 61.72      | 4.16              | 28.89         | 0.00 Average | 163   | 148   | VERTICAL  |
| 2 | 2480.00 | 98.93  |            |            | 65.88      | 4.16              | 28.89         | 0.00 Peak    | 163   | 148   | VERTICAL  |
| 3 | 2484.66 | 49.65  | 54.00      | -4.35      | 16.60      | 4.16              | 28.89         | 0.00 Average | 163   | 148   | VERTICAL  |
| 4 | 2485.53 | 61.29  | 74.00      | -12.71     | 28.24      | 4.16              | 28.89         | 0.00 Peak    | 163   | 148   | VERTICAL  |


Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### Plot on Configuration For BR (GFSK) / Channel 0 / Reference Level

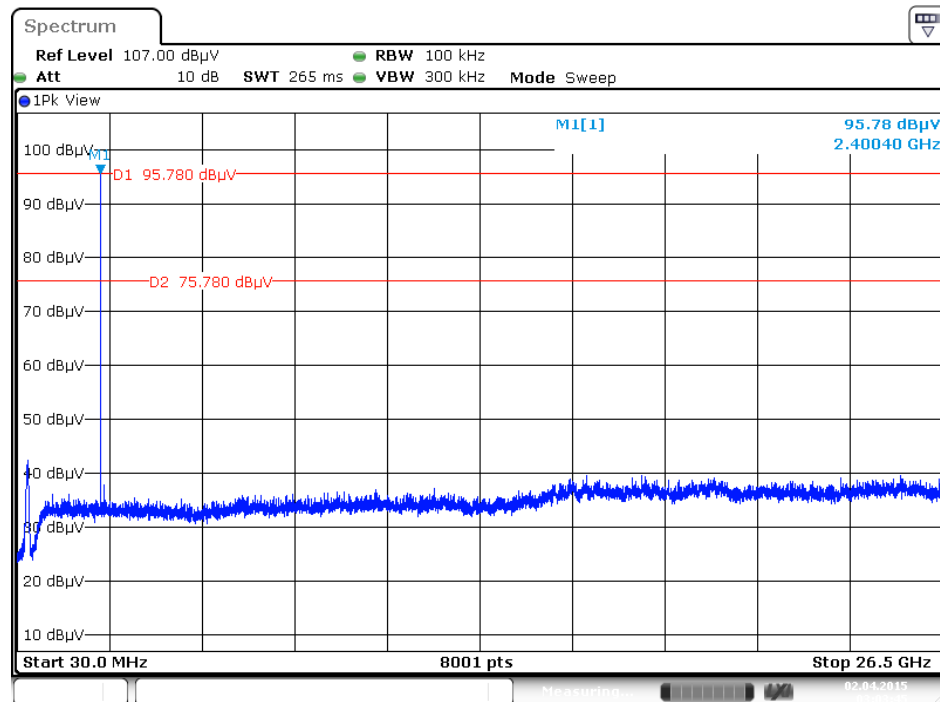


Date: 2 APR 2015 03:03:44

### Plot on Configuration For BR (GFSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

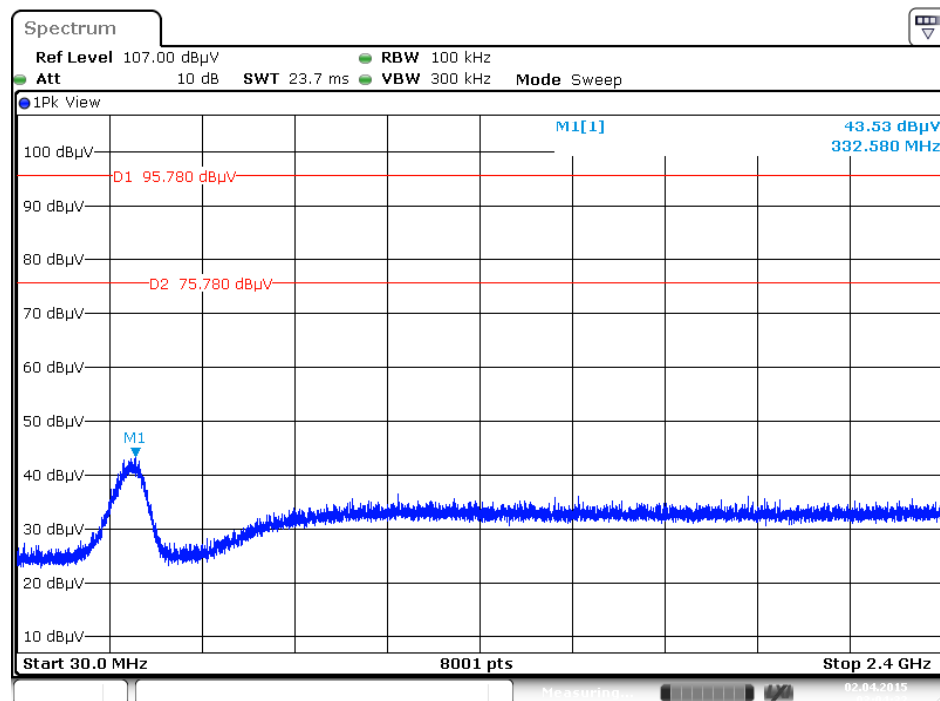


Date: 2 APR 2015 03:04:32


### Plot on Configuration For BR (GFSK) / Channel 0 / 2500MHz~26500MHz (down 20dBc)

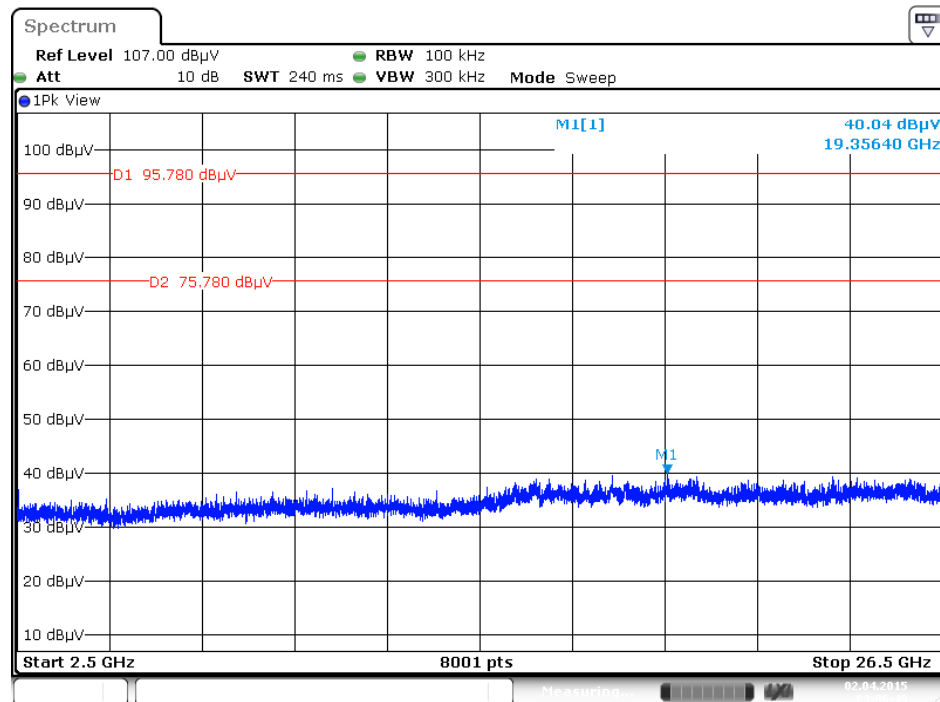


### Plot on Configuration For BR (GFSK) / Channel 78 / Reference Level

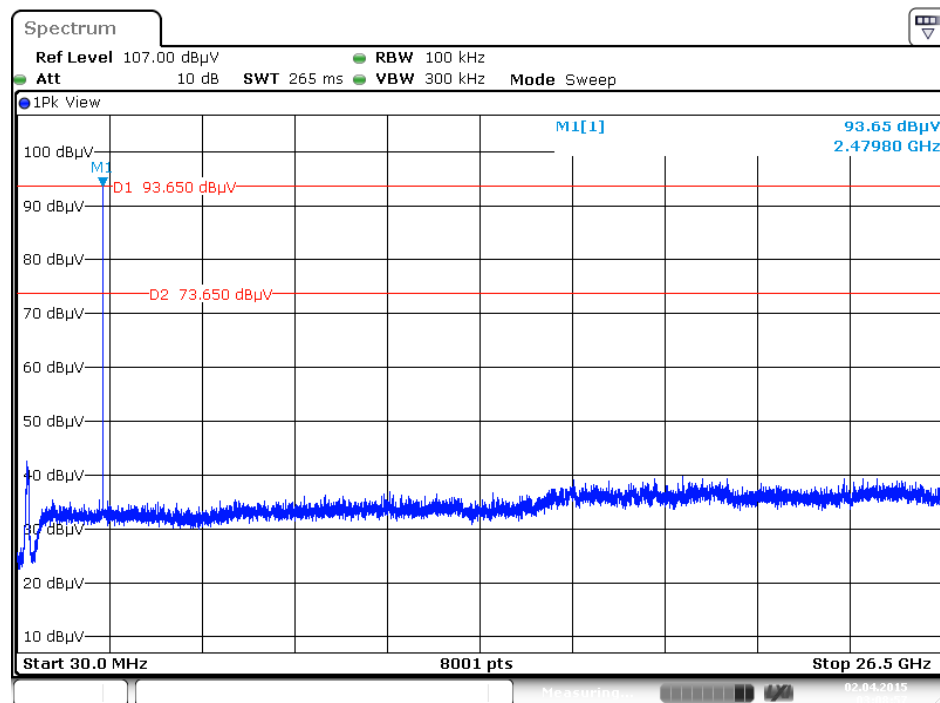


### Plot on Configuration For BR (GFSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

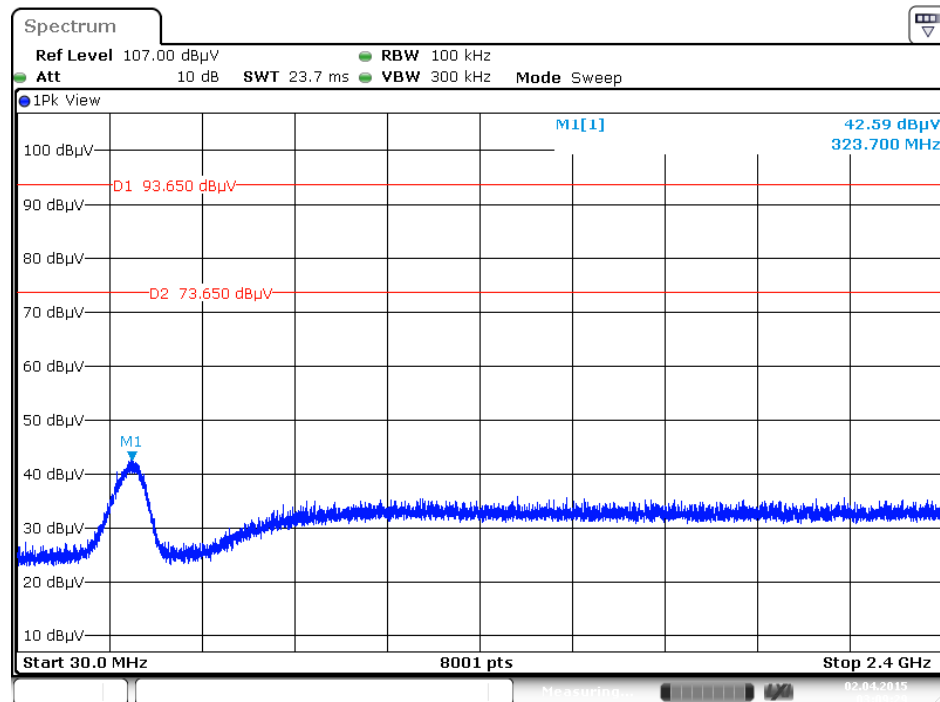


### Plot on Configuration For BR (GFSK) / Channel 78 / 2500MHz~26500MHz (down 20dBc)

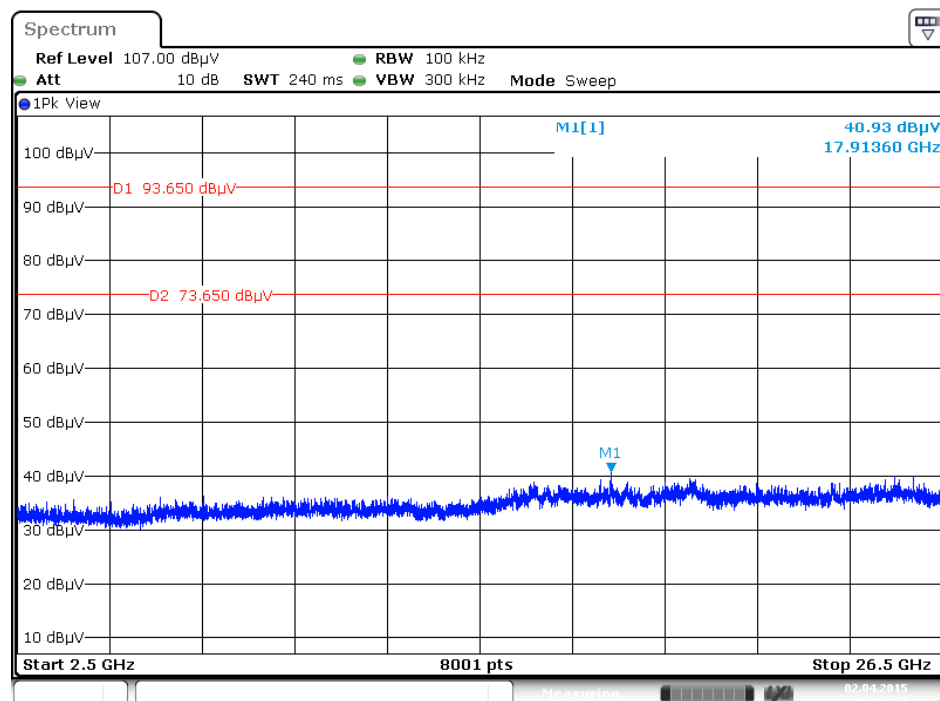


### Plot on Configuration For BR (GFSK) / Hopping / Reference Level

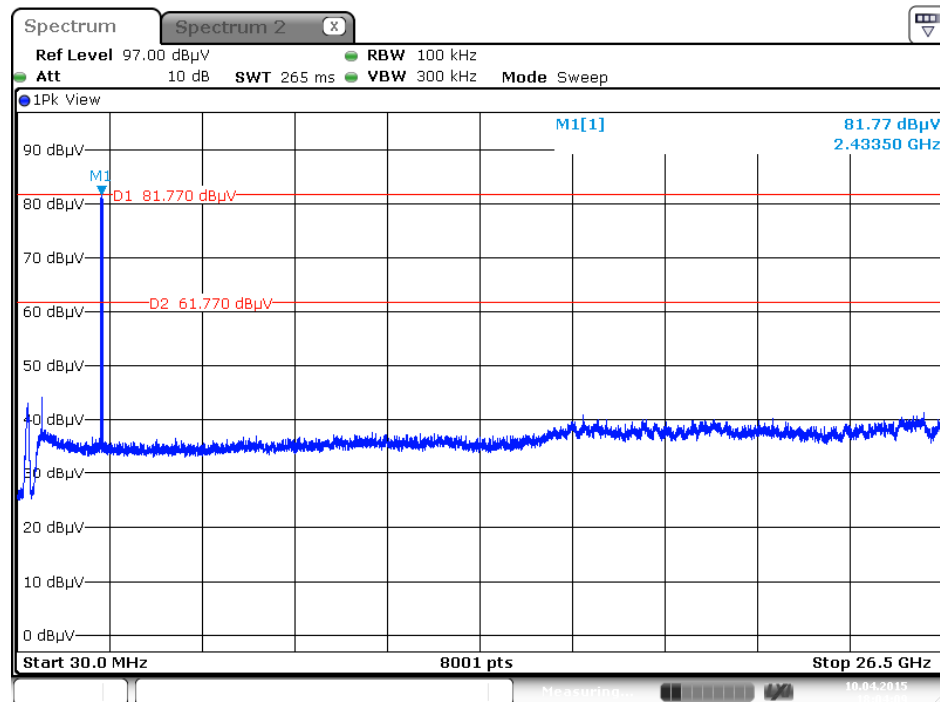

### Plot on Configuration For BR (GFSK) / Hopping / 30MHz~2400MHz (down 20dBc)

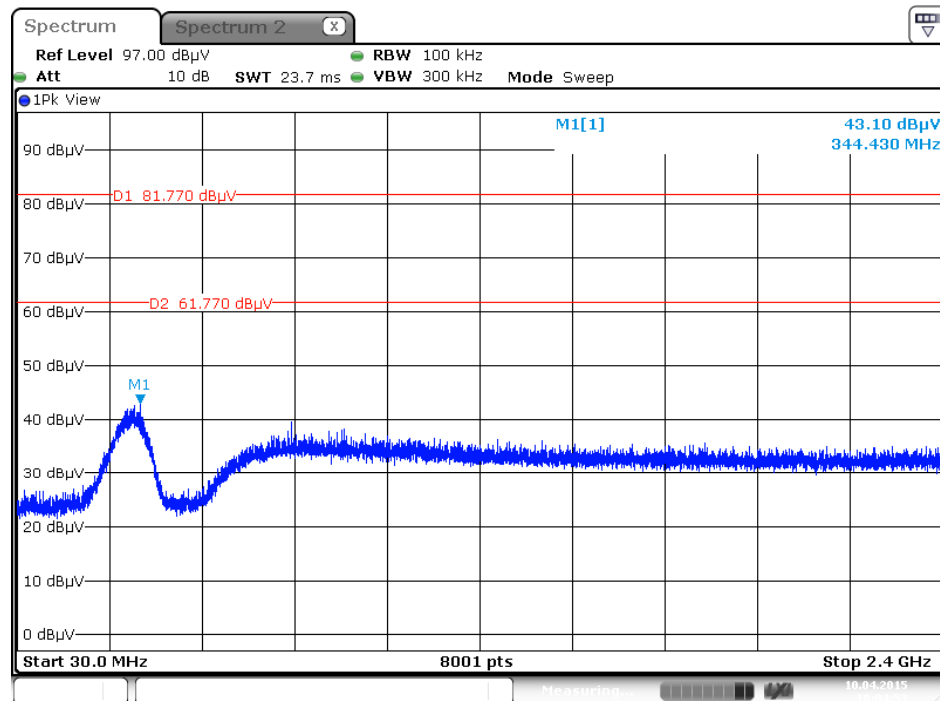


### Plot on Configuration For BR (GFSK) / Hopping / 2500MHz~26500MHz (down 20dBc)

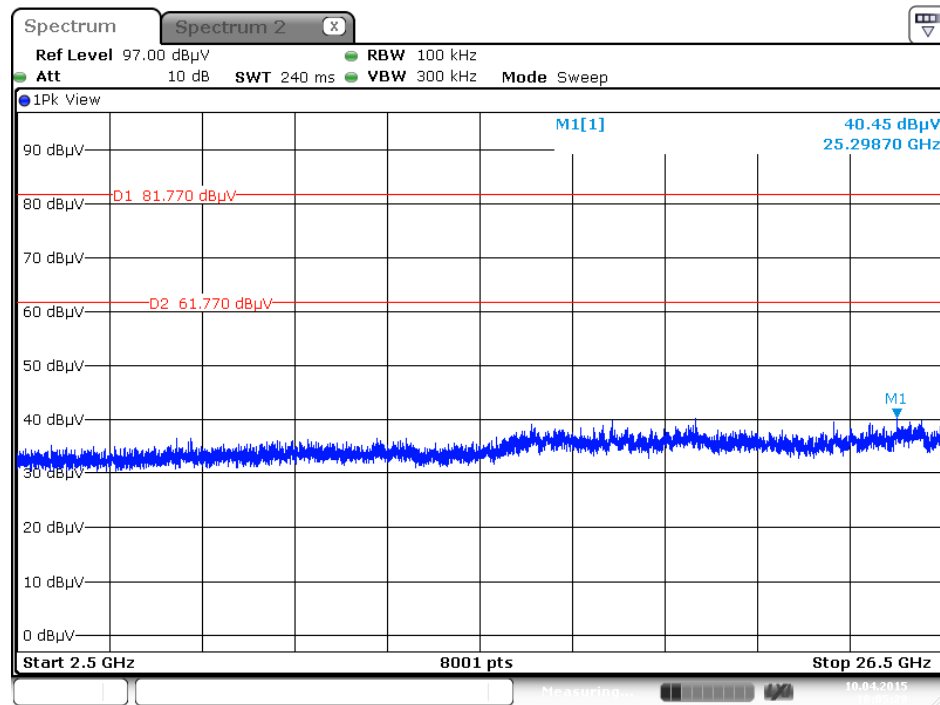


Date: 10 APR 2015 18:05:29

### Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level

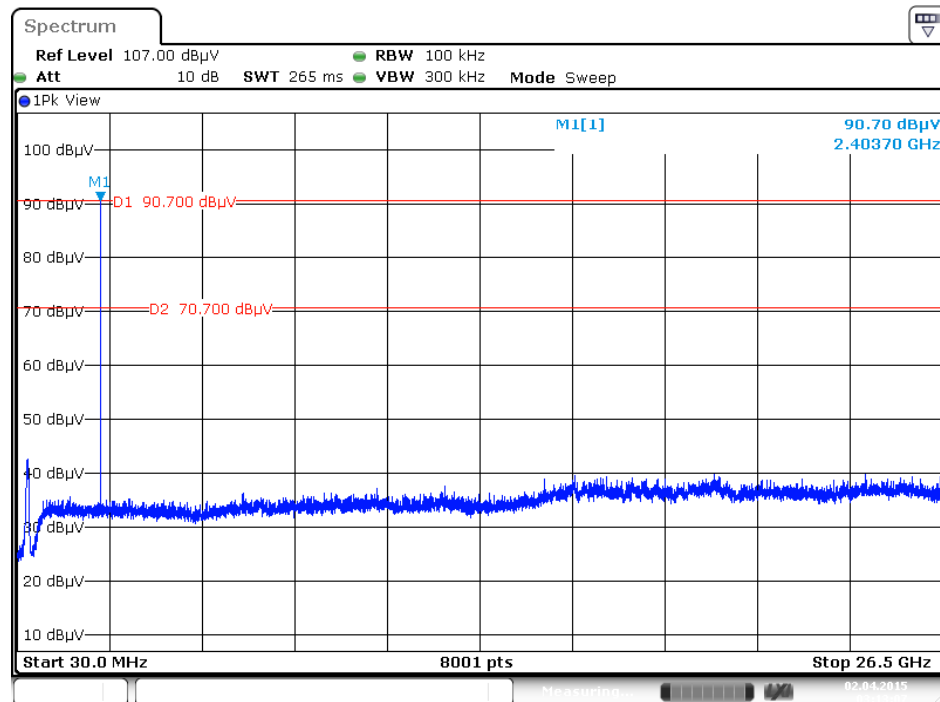


Date: 2 APR 2015 03:13:08

### Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

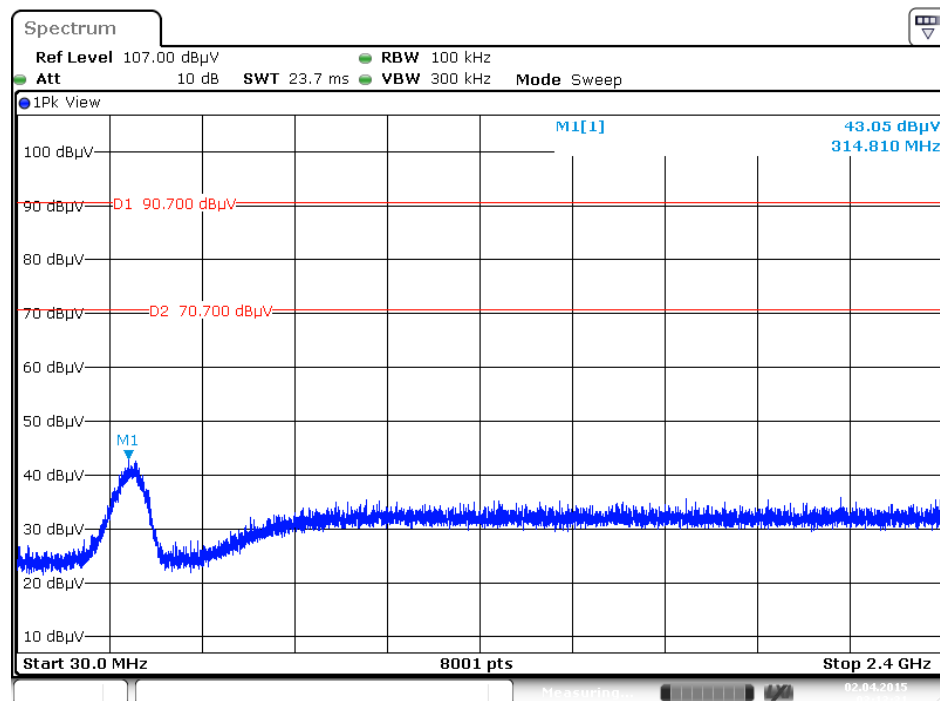


Date: 2 APR 2015 03:13:31


### Plot on Configuration For EDR (8DPSK) / Channel 0 / 2500MHz~26500MHz (down 20dBc)

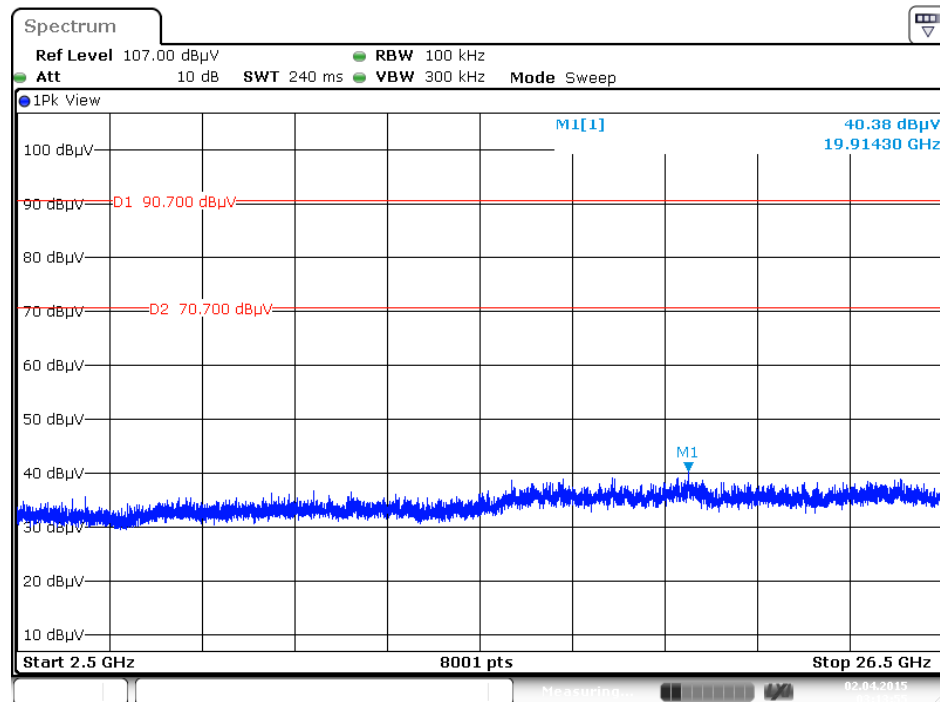


### Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level

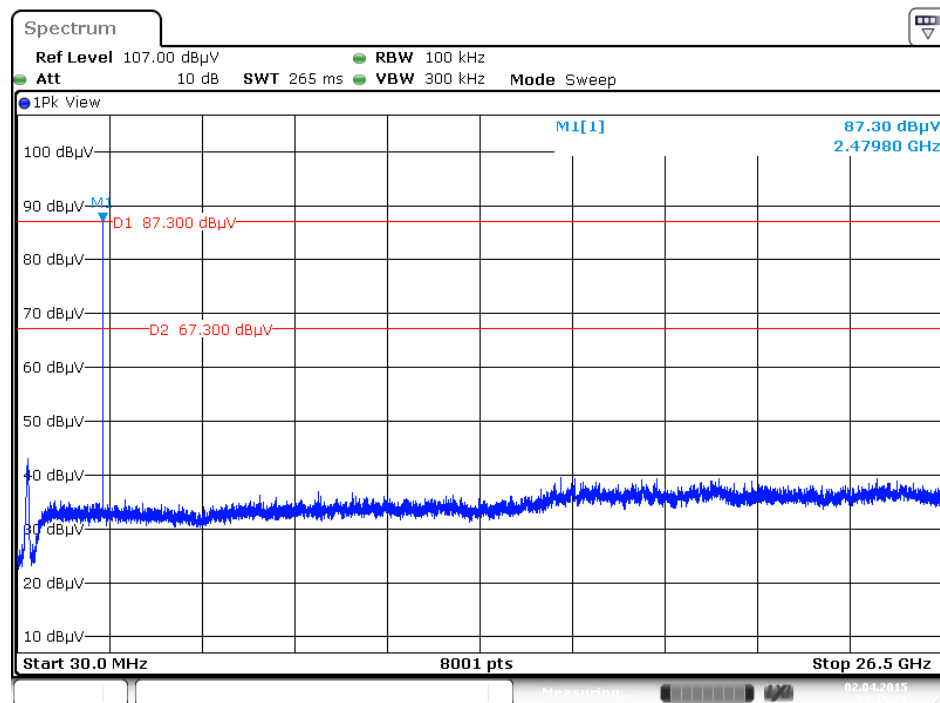


### Plot on Configuration For EDR (8DPSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

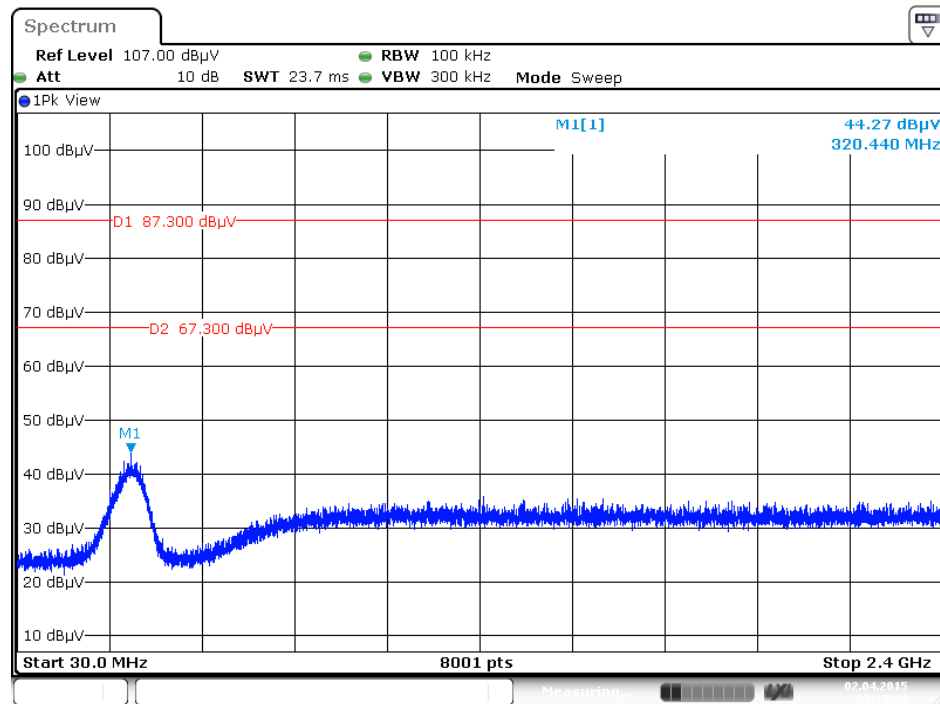

### Plot on Configuration For EDR (8DPSK) / Channel 78 / 2500MHz~26500MHz (down 20dBc)

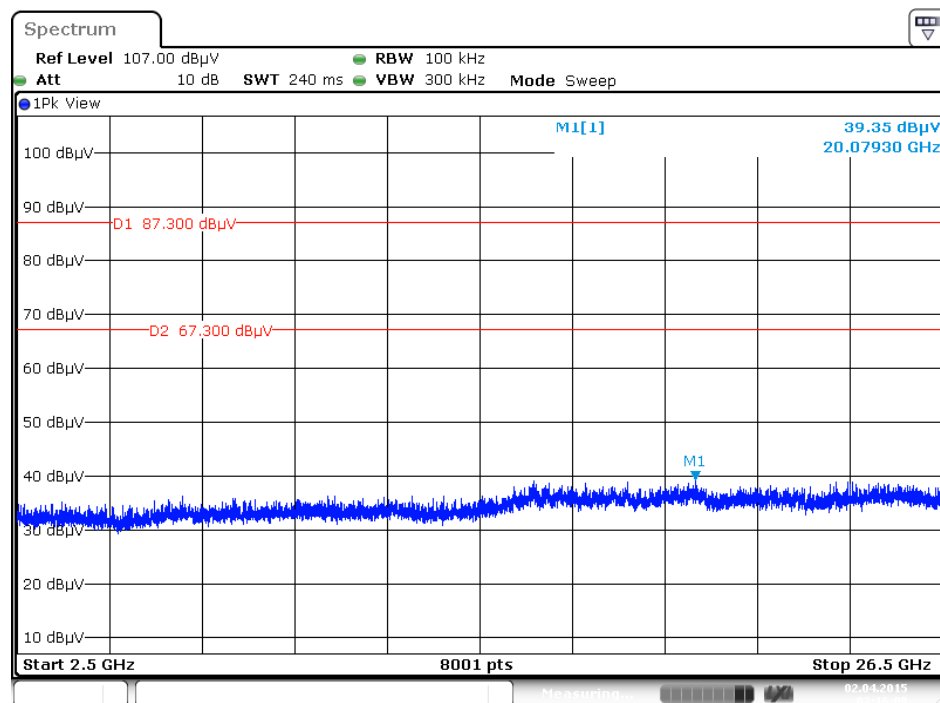


### Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level

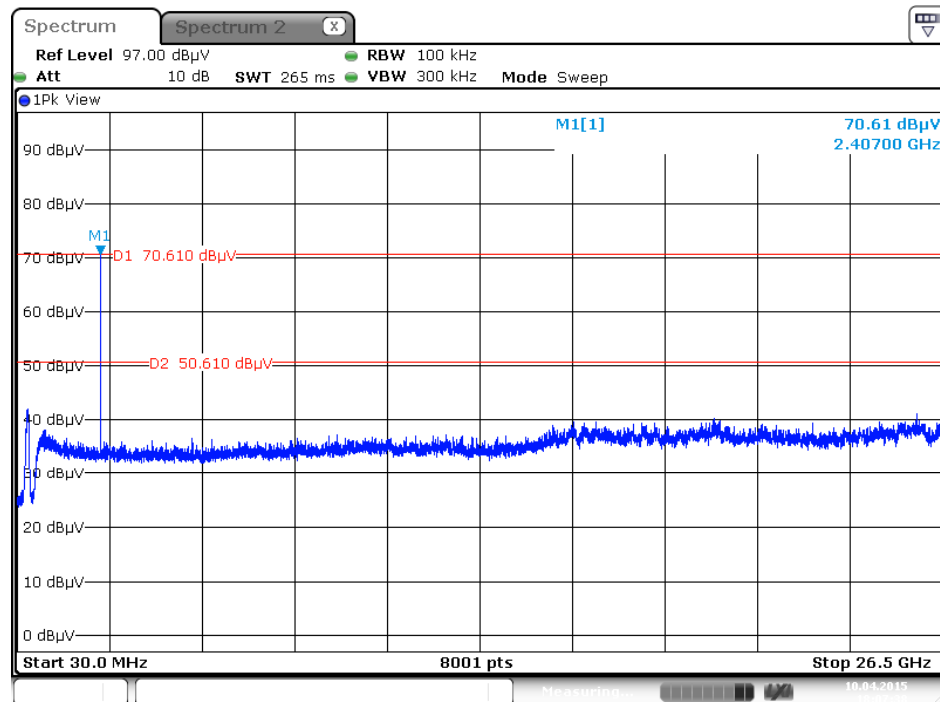


Date: 10 APR 2015 18:07:38

### Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 20dBc)

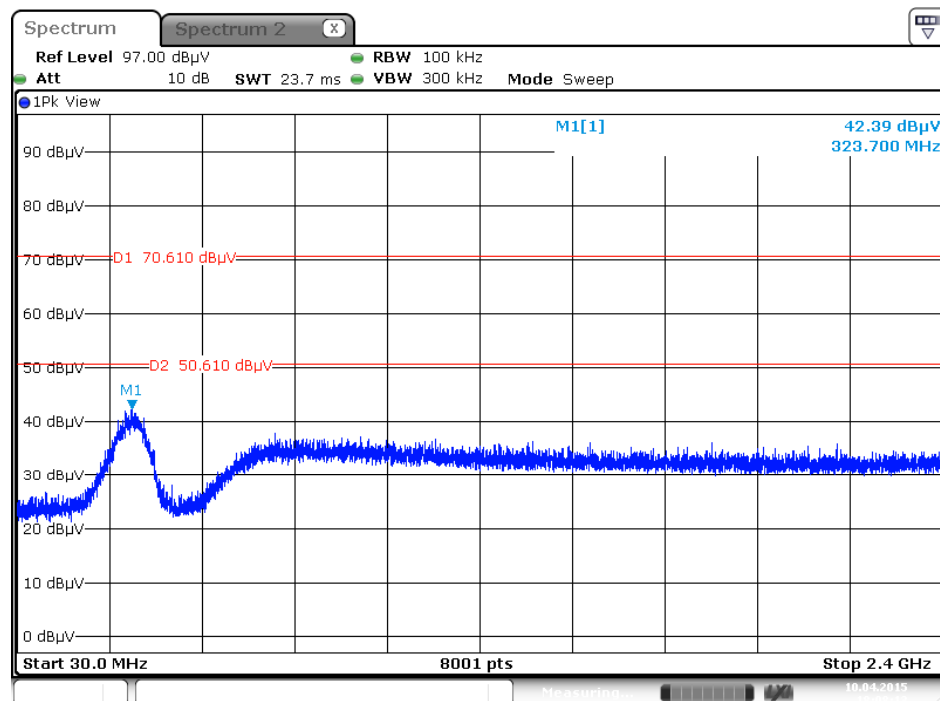

Date: 10 APR 2015 18:08:14

### Plot on Configuration For EDR (8DPSK) / Hopping / 2500MHz~26500MHz (down 20dBc)

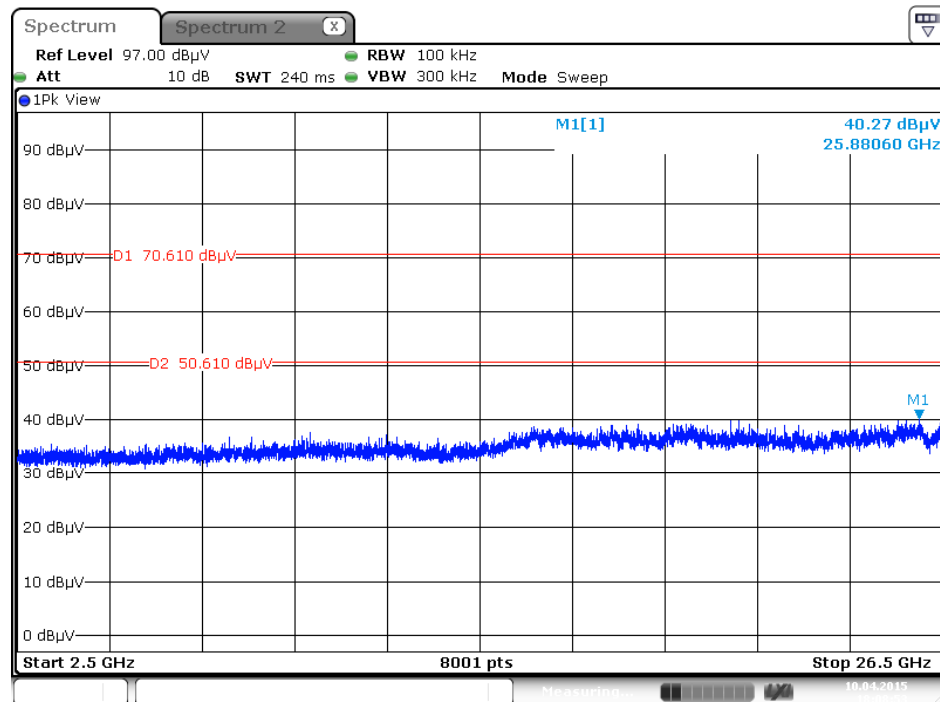

Date: 10 APR 2015 18:08:53

## **4.8. Antenna Requirements**

### **4.8.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### **4.8.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

| Instrument        | Manufacturer    | Model No.        | Serial No.    | Characteristics  | Calibration Date | Remark                |
|-------------------|-----------------|------------------|---------------|------------------|------------------|-----------------------|
| EMI Test Receiver | R&S             | ESCS 30          | 100355        | 9kHz ~ 2.75GHz   | Apr. 23, 2014    | Conduction (CO01-CB)  |
| LISN              | F.C.C.          | FCC-LISN-50-16-2 | 04083         | 150kHz ~ 100MHz  | Dec. 02, 2014    | Conduction (CO01-CB)  |
| LISN              | Schwarzbeck     | NSLK 8127        | 8127647       | 9kHz ~ 30MHz     | Dec. 02, 2014    | Conduction (CO01-CB)  |
| COND Cable        | Woken           | Cable            | 01            | 150kHz ~ 30MHz   | Dec. 03, 2014    | Conduction (CO01-CB)  |
| Software          | Audix           | E3               | 5.410e        | -                | N.C.R.           | Conduction (CO01-CB)  |
| BILOG ANTENNA     | Schaffner       | CBL6112D         | 22021         | 20MHz ~ 2GHz     | May 26, 2014     | Radiation (03CH01-CB) |
| Loop Antenna      | Rohde & Schwarz | HFH2-Z2          | 100315        | 9 kHz ~ 30 MHz   | Jul. 28, 2014    | Radiation (03CH01-CB) |
| Horn Antenna      | EMCO            | 3115             | 00075790      | 750MHz ~ 18GHz   | Oct. 28, 2014    | Radiation (03CH01-CB) |
| Horn Antenna      | Schwarzbeck     | BBHA 9170        | BBHA9170252   | 15GHz ~ 40GHz    | Aug. 22, 2014    | Radiation (03CH01-CB) |
| Pre-Amplifier     | Agilent         | 8447D            | 2944A10991    | 0.1MHz ~ 1.3GHz  | Feb. 24, 2015    | Radiation (03CH01-CB) |
| Pre-Amplifier     | Agilent         | 8449B            | 3008A02310    | 1GHz ~ 26.5GHz   | Jan. 12, 2015    | Radiation (03CH01-CB) |
| Pre-Amplifier     | WM              | TF-130N-R1       | 923365        | 26GHz ~ 40GHz    | Nov. 25, 2014    | Radiation (03CH01-CB) |
| Spectrum Analyzer | R&S             | FSP40            | 100056        | 9kHz ~ 40GHz     | Nov. 06, 2014    | Radiation (03CH01-CB) |
| EMI Test Receiver | Agilent         | N9038A           | MY52260123    | 9kHz ~ 8GHz      | Jan. 21, 2015    | Radiation (03CH01-CB) |
| EMI Test Receiver | R&S             | ESR26            | 101289        | 9kHz ~ 26GHz     | Aug. 22, 2014    | Radiation (03CH01-CB) |
| Turn Table        | INN CO          | CO 2000          | N/A           | 0 ~ 360 degree   | N.C.R.           | Radiation (03CH01-CB) |
| Antenna Mast      | INN CO          | CO 2000          | N/A           | 1 m ~ 4 m        | N.C.R.           | Radiation (03CH01-CB) |
| RF Cable-low      | Woken           | Low Cable-1      | N/A           | 30 MHz ~ 1 GHz   | Nov. 15, 2014    | Radiation (03CH01-CB) |
| RF Cable-high     | Woken           | High Cable-40G-1 | N/A           | 1 GHz ~ 40 GHz   | Nov. 15, 2014    | Radiation (03CH01-CB) |
| RF Cable-high     | Woken           | High Cable-40G-2 | N/A           | 1 GHz ~ 40 GHz   | Nov. 15, 2014    | Radiation (03CH01-CB) |
| Thermometer       | HTC-1           | HTC-1            | TP-1          | -50°C~70°C       | Mar. 11, 2015    | Radiation (03CH01-CB) |
| Spectrum analyzer | R&S             | FSV40            | 100979        | 9kHz~40GHz       | Dec.12, 2014     | Conducted (TH01-CB)   |
| RF Cable-high     | Woken           | RG402            | High Cable-7  | 1 GHz ~ 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB)   |
| RF Cable-high     | Woken           | RG402            | High Cable-8  | 1 GHz ~ 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB)   |
| RF Cable-high     | Woken           | RG402            | High Cable-9  | 1 GHz ~ 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB)   |
| RF Cable-high     | Woken           | RG402            | High Cable-10 | 1 GHz ~ 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB)   |

| Instrument    | Manufacturer | Model No. | Serial No.   | Characteristics  | Calibration Date | Remark              |
|---------------|--------------|-----------|--------------|------------------|------------------|---------------------|
| RF Cable-high | Woken        | RG402     | High Cable-6 | 1 GHz – 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB) |
| Power Sensor  | Agilent      | U2021XA   | MY53410001   | 50MHz~18GHz      | Nov. 03, 2014    | Conducted (TH01-CB) |
| Thermometer   | HTC-1        | HTC-1     | TP-8         | -50°C~70°C       | Mar. 05, 2015    | Conducted (TH01-CB) |

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

| Test Items                           | Uncertainty | Remark                   |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz)  | 2.4 dB      | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 3.6 dB      | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz)     | 3.7 dB      | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz)    | 3.5 dB      | Confidence levels of 95% |
| Conducted Emission                   | 1.7 dB      | Confidence levels of 95% |