



FCC TEST REPORT

REPORT NO.: RF920731H01

MODEL NO.: UW600-E, UW601-E, UW602-E

RECEIVED: Jul. 31, 2003

TESTED: Jul. 31 to Aug. 8, 2003

APPLICANT: CYBERTAN TECHNOLOGY INC

ADDRESS: No.99, Park Avenue III, Science-based Industrial
Park, Hsinchu, Taiwan 308,R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 66 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any government agencies. The test results in the report only apply to the tested sample.



Lab Code: 200376-0



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	10
4.1.3	TEST SETUP	11
4.1.4	EUT OPERATING CONDITIONS	12
4.1.5	TEST RESULTS (A)	13
4.2	Radiated Emission Measurement	15
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2	TEST INSTRUMENTS	16
4.2.3	TEST PROCEDURES	17
4.2.4	TEST SETUP	18
4.2.5	EUT OPERATING CONDITIONS	18
4.2.6	TEST RESULTS	19
4.2.7	TEST RESULTS – DSSS	20
4.2.8	TEST RESULTS –OFDM	23
4.2.9	TEST RESULTS (B)	26
4.2.10	TEST RESULTS – DSSS	27
4.2.11	TEST RESULTS –OFDM	30
4.3	6dB BANDWIDTH MEASUREMENT	33
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	33
4.3.2	TEST INSTRUMENTS	33
4.3.3	TEST PROCEDURE	34
4.3.4	TEST SETUP	34
4.3.5	EUT OPERATING CONDITIONS	34
4.3.6	TEST RESULTS-DSSS	35



4.3.7	TEST RESULTS-OFDM	39
4.4	MAXIMUM PEAK OUTPUT POWER	43
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	TEST INSTRUMENTS	43
4.5	MAXIMUM PEAK OUTPUT POWER	43
4.5.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.5.2	TEST INSTRUMENTS	43
4.5.3	TEST PROCEDURES	44
4.5.4	TEST SETUP	44
4.5.5	EUT OPERATING CONDITIONS	44
4.5.6	TEST RESULTS-DSSS	45
4.5.7	TEST RESULTS-OFDM	45
4.6	POWER SPECTRAL DENSITY MEASUREMENT	46
4.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	46
4.6.2	TEST INSTRUMENTS	46
4.6.3	TEST PROCEDURE	47
4.6.4	TEST SETUP	47
4.6.5	EUT OPERATING CONDITIONS	47
4.6.6	TEST RESULTS-DSSS	48
4.6.7	TEST RESULTS-OFDM	52
4.7	BAND EDGES MEASUREMENT.....	56
4.7.1	LIMITS OF BAND EDGES MEASUREMENT.....	56
4.7.2	TEST INSTRUMENTS	56
4.7.3	TEST PROCEDURE	56
4.7.4	EUT OPERATING CONDITION.....	56
4.7.5	TEST RESULTS - DSSS.....	57
4.7.6	TEST RESULTS-OFDM	60
4.8	ANTENNA REQUIREMENT.....	63
4.8.1	STANDARD APPLICABLE.....	63
4.8.2	ANTENNA CONNECTED CONSTRUCTION	63
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	64
6	INFORMATION ON THE TESTING LABORATORIES.....	66



1 CERTIFICATION

PRODUCT : USB 2.0 802.11g/b Wireless Network Adapter
BRAND NAME : CyberTAN
MODEL NO. : UW600-E, UW601-E, UW602-E
APPLICANT : CYBERTAN TECHNOLOGY INC
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Jul. 31 to Aug. 8, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Amanda Chu , **DATE:** Aug. 11, 2003
(Amanda Chu)

APPROVED BY: Eric Lin , **DATE:** Aug. 11, 2003
(Eric Lin, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -12.57 dBuV at 0.1500 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.0 dBuV at 2390.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	USB 2.0 802.11g/b Wireless Network Adapter
MODEL NO.	UW600-E, UW601-E, UW602-E
POWER SUPPLY	5VDC from host equipment
MODULATION TYPE	CCK, OFDM, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	18.89dBm
ANTENNA TYPE	1. Detachable Antenna 2. PIFA Antenna
DATA CABLE	USB Cable (Shielded, 1.8m)
I/O PORTS	USB port
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT has three model names which are identical to each other in all aspects except for the followings:

Brand	Model Name
CyberTAN	UW600-E
CyberTAN	UW601-E
CyberTAN	UW602-E

2. There are two types of antennas provided to this EUT, please refer to the following table:

No.	Antenna Type	Gain (dBi)	Connector
1	Detachable antenna	2	with MMCX connector
2	PIFA antenna	2	without connector



3. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
4. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
5. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test. Test result, which were mentioned on section 3.1.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually. Test result, which were mentioned on section 3.1.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a USB 2.0 802.11g/b Wireless Network Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.


3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	Notebook	Compaq	N800C	470048-515	DoC
2	Matrix Printer	EPSON	LQ-300+	DCGY017079	DOC

No.	Signal cable description
1	NA
2	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core

Note: 1. All power cords of the above support units are unshielded (1.8m).

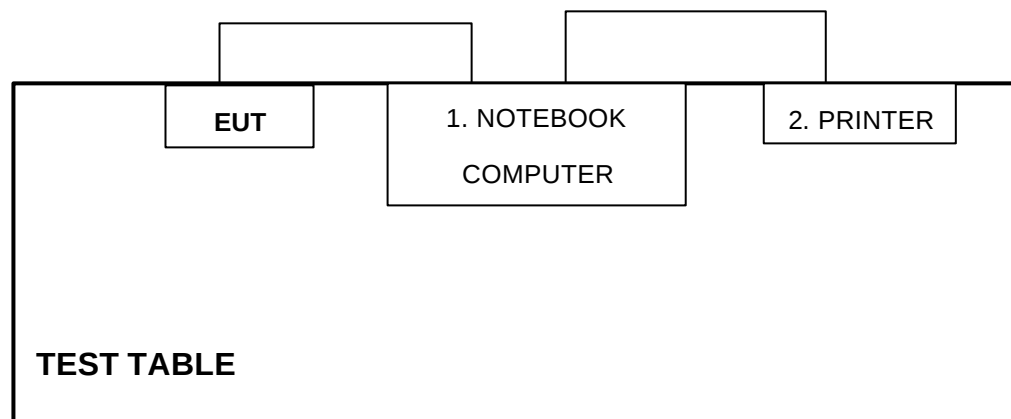

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Nov. 17, 2003
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 13, 2003
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2004
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2004
Terminator(for KYORITSU)	50	3	Apr. 11, 2004
Software	Cond-V2e	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. A.
 3. The VCCI Con A Registration No. is C-817.

3. TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.3 TEST SETUP

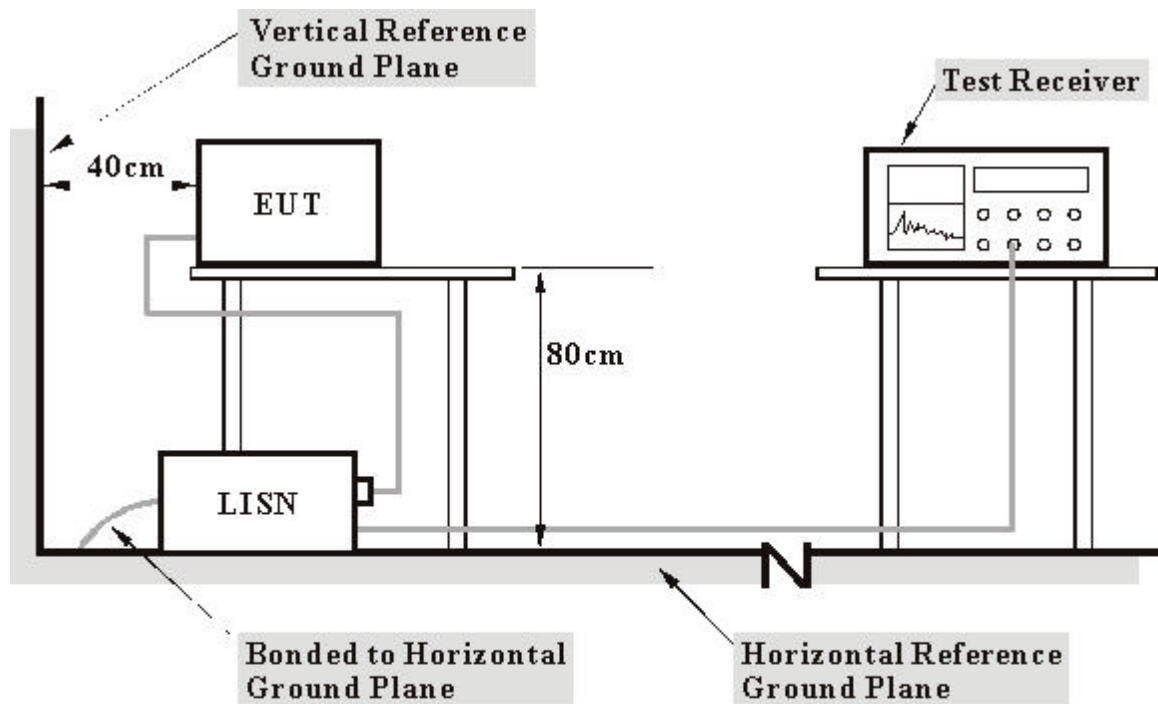

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.4 EUT OPERATING CONDITIONS


- a. Connected the EUT to support unit 1 (Notebook Computer) and placed on a testing table.
- b. The Notebook Computer ran a test program to enable EUT under transmission condition continuously at specific channel frequency.

4.1.5 TEST RESULTS (A)

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODEL	UW600-E	MODE	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 61%RH, 964 hPa	PHASE	Line (L)
TESTED BY	Tony Chen		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.20	50.30	-	50.50	-	65.79	55.79	-15.29	-
2	0.220	0.20	41.17	-	41.37	-	62.81	52.81	-21.44	-
3	0.470	0.21	29.49	-	29.70	-	56.51	46.51	-26.81	-
4	1.236	0.30	27.47	-	27.77	-	56.00	46.00	-28.23	-
5	6.531	0.57	29.81	-	30.38	-	60.00	50.00	-29.62	-
6	17.754	1.16	37.03	-	38.19	-	60.00	50.00	-21.81	-


- NOTES:** (1) "-": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

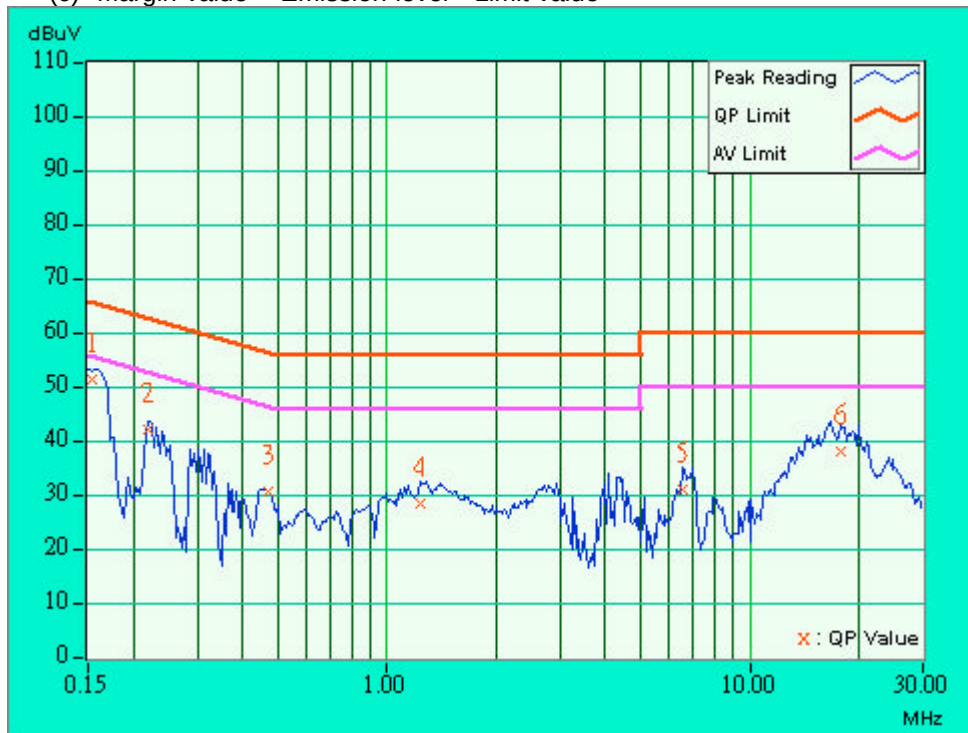

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODEL	UW600-E	MODE	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 61%RH, 964 hPa	PHASE	Line (N)
TESTED BY	Tony Chen		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	53.23	-	53.43	-	66.00	56.00	-12.57	-
2	0.213	0.20	42.54	-	42.74	-	63.11	53.11	-20.37	-
3	0.298	0.20	35.05	-	35.25	-	60.29	50.29	-25.04	-
4	4.414	0.42	29.09	-	29.51	-	56.00	46.00	-26.49	-
5	6.738	0.54	32.22	-	32.76	-	60.00	50.00	-27.24	-
6	17.832	0.90	37.39	-	38.29	-	60.00	50.00	-21.71	-

- NOTES:** (1) "": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

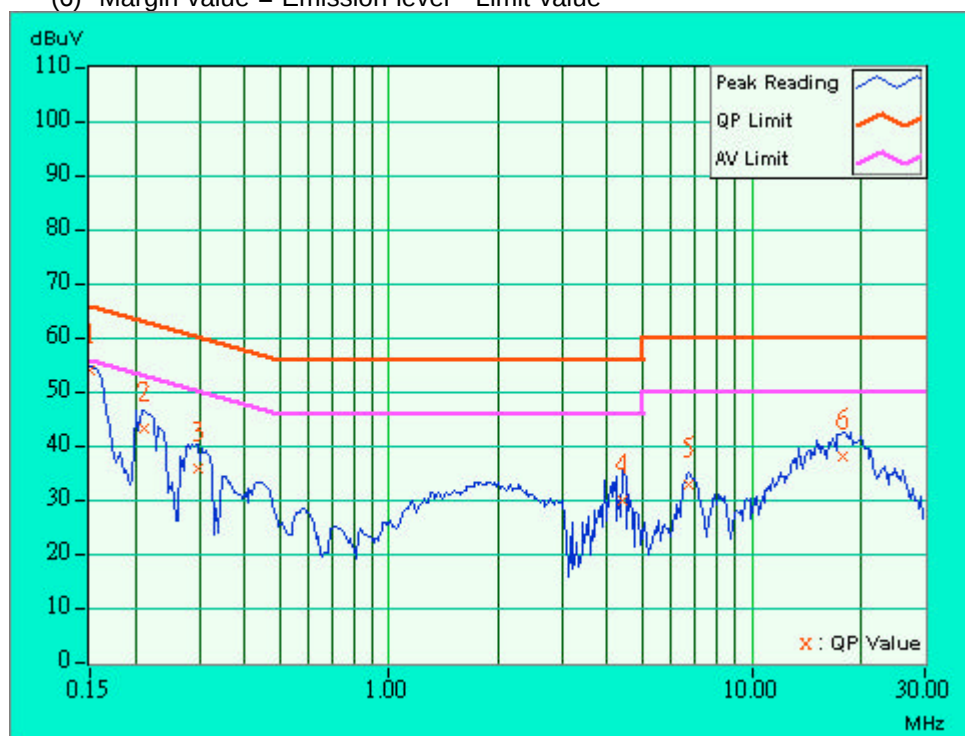

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Jul. 14, 2004
ADVANTEST Spectrum Analyzer	R3271A	85060311	May 21, 2004
CHASE RF Pre_Amplifier	CPA9232	1057	Apr. 24, 2004
HP Pre_Amplifier	8449B	3008A01281	June 27, 2004
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Nov. 03, 2003
CHASE Broadband Antenna	CBL6111c	2730	Jul 17, 2004
Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	Aug. 26, 2003
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
RF Switches (ARNITSU)	CS-201	1565157	Dec. 01, 2003
RF CABLE (Chaintek) 1GHz-20GHz	Ak 9515-D	001	Aug, 20.2003
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Nov. 5, 2003
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.
6. The VCCI Site Registration No. is R-1626.
7. The CANADA Site Registration No. is IC 3789-C.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

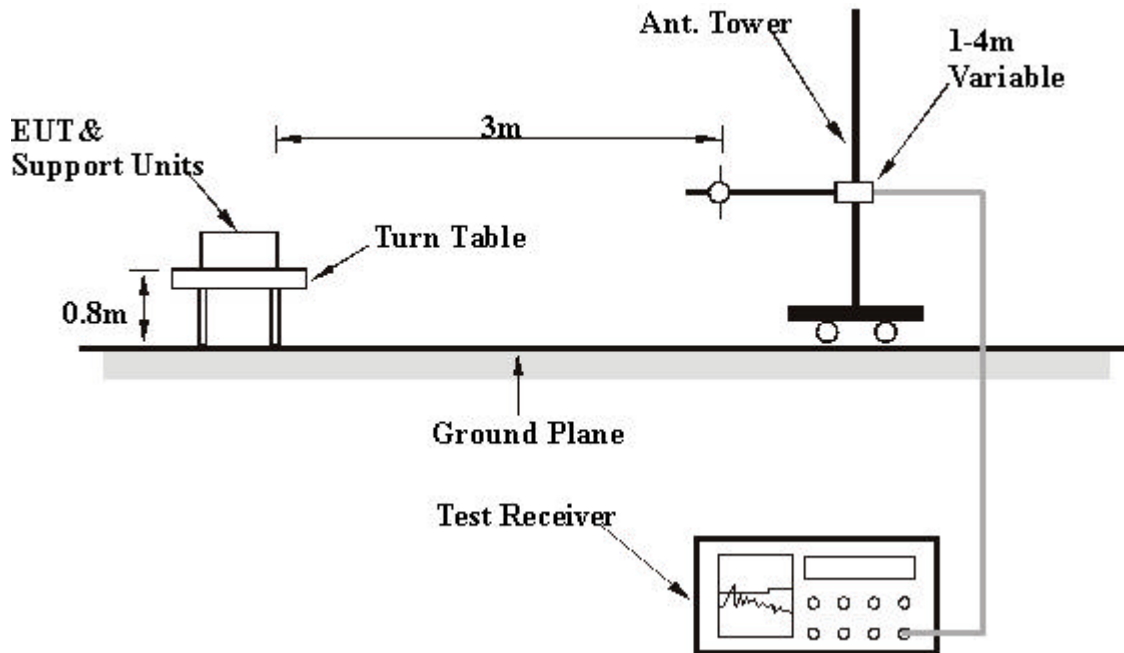

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 11	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	29 deg. C, 56 % RH, 964 hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Eric Lee	TEST MODEL	Antenna 1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.93	25.7 QP	43.50	-17.80	1.27 H	41	14.20	11.50
2	140.78	32.5 QP	43.50	-11.00	1.30 H	126	20.90	11.60
3	224.00	25.1 QP	46.00	-20.90	1.26 H	34	15.20	9.90
4	265.65	38.1 QP	46.00	-7.90	1.21 H	226	24.20	13.90
5	318.38	37.5 QP	46.00	-8.50	1.35 H	328	23.00	14.50
6	363.50	30.9 QP	46.00	-15.10	1.24 H	16	15.10	15.80
7	404.00	35.5 QP	46.00	-10.50	1.02 H	219	18.20	17.20
8	463.59	31.5 QP	46.00	-14.50	1.54 H	168	13.10	18.40
9	597.28	38.4 QP	46.00	-7.60	1.30 H	106	17.50	20.90
10	648.00	34.5 QP	46.00	-11.50	1.58 H	37	12.60	21.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.04	34.6 QP	40.00	-5.40	1.61 V	64	25.10	9.50
2	60.02	29.8 QP	40.00	-10.20	1.48 V	348	24.60	5.20
3	159.99	22.8 QP	43.50	-20.70	1.60 V	282	12.50	10.30
4	200.03	24.7 QP	43.50	-18.80	1.33 V	159	15.70	9.00
5	219.77	25.9 QP	46.00	-20.10	1.32 V	44	16.60	9.40
6	267.50	28.8 QP	46.00	-17.20	1.66 V	55	15.10	13.70
7	319.30	25.3 QP	46.00	-20.70	1.04 V	285	10.80	14.50
8	363.63	29.4 QP	46.00	-16.60	1.27 V	281	13.60	15.80
9	400.00	33.2 QP	46.00	-12.80	1.07 V	135	16.10	17.10
10	480.02	31.6 QP	46.00	-14.40	1.40 V	47	12.70	18.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



4.2.7 TEST RESULTS – DSSS

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 1	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 56%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.1 PK	74.00	-22.90	1.22 H	4	21.30	29.80
1	2390.00	40.1 AV	54.00	-13.90	1.22 H	4	10.30	29.80
2	*2412.00	98.0 PK			1.78 H	5	68.10	29.90
2	*2412.00	90.2 AV			1.78 H	5	60.40	29.90
3	4824.00	44.1 PK	74.00	-29.90	1.50 H	119	7.80	36.20
3	4824.00	35.2 AV	54.00	-18.80	1.50 H	119	7.80	36.20
4	7236.00	45.2 PK	74.00	-28.80	1.08 H	326	3.50	41.70
4	7236.00	38.4 AV	54.00	-15.60	1.08 H	326	3.50	41.70
5	9648.00	50.3 PK	74.00	-23.70	1.14 H	51	5.40	44.90
5	9648.00	39.1 AV	54.00	-14.90	1.14 H	51	5.40	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.3 PK	74.00	-17.70	1.35 V	6	26.50	29.80
1	2390.00	46.4 AV	54.00	-7.60	1.35 V	6	16.60	29.80
2	*2412.00	105.2 PK			1.52 V	311	75.30	29.90
2	*2412.00	98.5 AV			1.52 V	311	68.60	29.90
3	4824.00	52.3 PK	74.00	-21.70	1.02 V	247	16.10	36.20
3	4824.00	44.5 AV	54.00	-9.50	1.02 V	247	8.30	36.20
4	7236.00	53.5 PK	74.00	-20.50	1.07 V	53	11.80	41.70
4	7236.00	45.3 AV	54.00	-8.70	1.07 V	53	3.60	41.70
5	9648.00	52.0 PK	74.00	-22.00	1.47 V	160	7.10	44.90
5	9648.00	43.0 AV	54.00	-11.00	1.47 V	160	-1.90	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 6	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 56%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.4 PK	74.00	-22.60	1.03 H	9	21.60	29.80
1	2390.00	40.1 AV	54.00	-13.90	1.03 H	9	10.30	29.80
2	*2437.00	99.2 PK			1.38 H	122	69.20	30.00
2	*2437.00	92.0 AV			1.38 H	122	62.00	30.00
3	2483.50	50.9 PK	74.00	-23.10	1.32 H	229	20.80	30.10
3	2483.50	39.5 AV	54.00	-14.50	1.32 H	229	20.80	30.10
4	4874.00	44.8 PK	74.00	-29.20	1.63 H	302	8.30	36.50
4	4874.00	34.7 AV	54.00	-19.30	1.63 H	302	8.30	36.50
5	7311.00	47.4 PK	74.00	-26.60	1.08 H	111	5.60	41.80
5	7311.00	40.8 AV	54.00	-13.20	1.08 H	111	5.60	41.80
6	9748.00	49.1 PK	74.00	-24.90	1.82 H	241	4.40	44.60
6	9748.00	39.6 AV	54.00	-14.40	1.82 H	241	4.40	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.4 PK	74.00	-20.60	1.35 V	2	23.60	29.80
1	2390.00	44.0 AV	54.00	-10.00	1.35 V	2	14.20	29.80
2	*2437.00	106.1 PK			1.47 V	54	76.20	30.00
2	*2437.00	99.2 AV			1.47 V	54	69.30	30.00
3	2483.50	56.0 PK	74.00	-18.00	1.00 V	66	25.80	30.10
3	2483.50	44.3 AV	54.00	-9.70	1.00 V	66	14.20	30.10
4	4874.00	52.7 PK	74.00	-21.30	1.68 V	5	16.20	36.50
4	4874.00	44.3 AV	54.00	-9.70	1.68 V	5	7.80	36.50
5	7311.00	53.6 PK	74.00	-20.40	1.30 V	2	11.80	41.80
5	7311.00	46.4 AV	54.00	-7.60	1.30 V	2	4.70	41.80
6	9748.00	50.6 PK	74.00	-23.40	1.35 V	262	6.00	44.60
6	9748.00	41.7 AV	54.00	-12.30	1.35 V	262	6.00	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 11	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 56%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.1 PK			1.33 H	2	68.10	30.10
1	*2462.00	90.1 AV			1.33 H	2	60.00	30.10
2	2483.50	53.7 PK	74.00	-20.30	1.45 H	6	23.50	30.10
2	2483.50	42.4 AV	54.00	-11.60	1.45 H	6	12.30	30.10
3	4924.00	43.8 PK	74.00	-30.20	1.07 H	82	7.10	36.70
3	4924.00	33.9 AV	54.00	-20.10	1.07 H	82	7.10	36.70
4	7386.00	45.4 PK	74.00	-28.60	1.54 H	49	3.50	41.80
4	7386.00	38.5 AV	54.00	-15.50	1.54 H	49	3.50	41.80
5	9848.00	47.8 PK	74.00	-26.20	1.11 H	162	3.50	44.40
5	9848.00	37.9 AV	54.00	-16.10	1.11 H	162	3.50	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.1 PK			1.02 V	21	76.00	30.10
1	*2462.00	99.3 AV			1.02 V	21	69.20	30.10
2	2483.50	57.9 PK	74.00	-16.10	1.05 V	246	27.80	30.10
2	2483.50	46.5 AV	54.00	-7.50	1.05 V	246	16.30	30.10
3	4924.00	53.9 PK	74.00	-20.10	1.63 V	332	17.20	36.70
3	4924.00	45.9 AV	54.00	-8.10	1.63 V	332	9.20	36.70
4	7386.00	53.2 PK	74.00	-20.80	1.00 V	8	11.40	41.80
4	7386.00	45.5 AV	54.00	-8.50	1.00 V	8	3.70	41.80
5	9848.00	52.1 PK	74.00	-21.90	1.25 V	246	7.70	44.40
5	9848.00	41.0 AV	54.00	-13.00	1.25 V	246	-3.40	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.8 TEST RESULTS –OFDM

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 1	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 56%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.9 PK	74.00	-19.10	1.07 H	49	25.10	29.80
1	2390.00	46.1 AV	54.00	-7.90	1.07 H	49	16.30	29.80
2	*2412.00	96.1 PK			1.20 H	229	66.20	29.90
2	*2412.00	88.5 AV			1.20 H	229	58.60	29.90
3	4824.00	48.6 PK	74.00	-25.40	1.11 H	24	12.40	36.20
3	4824.00	42.3 AV	54.00	-11.70	1.11 H	24	12.40	36.20
4	7236.00	48.4 PK	74.00	-25.60	1.19 H	249	6.70	41.70
4	7236.00	39.4 AV	54.00	-14.60	1.19 H	249	6.70	41.70
5	9648.00	47.0 PK	74.00	-27.00	1.66 H	326	2.10	44.90
5	9648.00	38.5 AV	54.00	-15.50	1.66 H	326	2.10	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.2 PK	74.00	-12.80	1.03 V	24	31.40	29.80
1	2390.00	52.0 AV	54.00	-2.00	1.03 V	24	22.20	29.80
2	*2412.00	102.9 PK			1.00 V	36	73.00	29.90
2	*2412.00	94.2 AV			1.00 V	36	64.30	29.90
3	4824.00	54.8 PK	74.00	-19.20	1.54 V	29	18.60	36.20
3	4824.00	43.8 AV	54.00	-10.20	1.54 V	29	7.60	36.20
4	7236.00	53.7 PK	74.00	-20.30	1.69 V	354	12.00	41.70
4	7236.00	45.7 AV	54.00	-8.30	1.69 V	354	4.00	41.70
5	9648.00	53.8 PK	74.00	-20.20	1.45 V	24	8.90	44.90
5	9648.00	43.9 AV	54.00	-10.10	1.45 V	24	-1.00	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 6	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 56%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.2 PK	74.00	-20.80	1.22 H	24	23.40	29.80
1	2390.00	42.0 AV	54.00	-12.00	1.22 H	24	12.20	29.80
2	*2437.00	95.9 PK			1.11 H	213	65.90	30.00
2	*2437.00	87.2 AV			1.11 H	213	57.30	30.00
3	2483.50	51.7 PK	74.00	-22.30	1.73 H	360	21.60	30.10
3	2483.50	40.4 AV	54.00	-13.60	1.73 H	360	10.30	30.10
4	4874.00	49.4 PK	74.00	-24.60	1.08 H	54	12.90	36.50
4	4874.00	38.6 AV	54.00	-15.40	1.08 H	54	12.90	36.50
5	7311.00	48.5 PK	74.00	-25.50	1.20 H	252	6.70	41.80
5	7311.00	40.1 AV	54.00	-13.90	1.20 H	252	6.70	41.80
6	9748.00	47.5 PK	74.00	-26.50	1.24 H	262	2.90	44.60
6	9748.00	38.2 AV	54.00	-15.80	1.24 H	262	2.90	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.00	-15.60	1.07 V	249	28.60	29.80
1	2390.00	47.7 AV	54.00	-6.30	1.07 V	249	17.90	29.80
2	*2437.00	103.9 PK			1.20 V	21	74.00	30.00
2	*2437.00	95.2 AV			1.20 V	21	65.20	30.00
3	2483.50	56.5 PK	74.00	-17.50	1.54 V	24	26.40	30.10
3	2483.50	45.4 AV	54.00	-8.60	1.54 V	24	15.30	30.10
4	4874.00	56.5 PK	74.00	-17.50	1.04 V	21	20.00	36.50
4	4874.00	45.7 AV	54.00	-8.30	1.04 V	21	9.20	36.50
5	7311.00	56.0 PK	74.00	-18.00	1.08 V	212	14.20	41.80
5	7311.00	47.9 AV	54.00	-6.10	1.08 V	212	6.10	41.80
6	9748.00	54.6 PK	74.00	-19.40	1.20 V	229	10.00	44.60
6	9748.00	44.5 AV	54.00	-9.50	1.20 V	229	-0.10	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 11	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 56%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.1 PK			1.11 H	213	65.00	30.10
1	*2462.00	86.1 AV			1.11 H	213	56.00	30.10
2	2483.50	56.5 PK	74.00	-17.50	1.05 H	195	26.30	30.10
2	2483.50	47.4 AV	54.00	-6.60	1.05 H	195	17.30	30.10
3	4924.00	48.1 PK	74.00	-25.90	1.58 H	37	11.40	36.70
3	4924.00	37.7 AV	54.00	-16.30	1.58 H	37	11.40	36.70
4	7386.00	49.7 PK	74.00	-24.30	1.28 H	64	7.90	41.80
4	7386.00	39.7 AV	54.00	-14.30	1.28 H	64	7.90	41.80
5	9848.00	47.8 PK	74.00	-26.20	1.11 H	92	3.40	44.40
5	9848.00	39.3 AV	54.00	-14.70	1.11 H	92	3.40	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.4 PK			1.58 V	68	72.30	30.10
1	*2462.00	94.9 AV			1.58 V	68	64.80	30.10
2	2483.50	63.9 PK	74.00	-10.10	1.06 V	246	33.80	30.10
2	2483.50	51.8 AV	54.00	-2.20	1.06 V	246	21.70	30.10
3	4924.00	56.2 PK	74.00	-17.80	1.54 V	215	19.50	36.70
3	4924.00	44.9 AV	54.00	-9.10	1.54 V	215	8.20	36.70
4	7386.00	54.7 PK	74.00	-19.30	1.06 V	35	12.90	41.80
4	7386.00	46.0 AV	54.00	-8.00	1.06 V	35	4.20	41.80
5	9848.00	54.2 PK	74.00	-19.80	1.07 V	213	9.80	44.40
5	9848.00	44.1 AV	54.00	-9.90	1.07 V	213	-0.30	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.9 TEST RESULTS (B)

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 11	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	29 deg. C, 56 % RH, 964 hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Eric Lee	TEST MODEL	Antenna 2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.06	27.7 QP	43.50	-15.80	1.30 H	132	16.20	11.50
2	133.00	31.3 QP	43.50	-12.20	1.03 H	216	19.60	11.70
3	250.02	39.3 QP	46.00	-6.70	1.68 H	265	26.30	13.00
4	268.12	31.9 QP	46.00	-14.10	1.15 H	2	18.30	13.60
5	318.38	37.5 QP	46.00	-8.50	1.35 H	328	23.00	14.50
6	363.50	30.9 QP	46.00	-15.10	1.24 H	16	15.10	15.80
7	405.02	33.3 QP	46.00	-12.70	1.49 H	213	16.00	17.30
8	440.02	33.2 QP	46.00	-12.80	1.82 H	327	15.30	18.00
9	463.59	31.5 QP	46.00	-14.50	1.54 H	168	13.10	18.40
10	580.00	37.5 QP	46.00	-8.50	1.63 H	267	16.30	21.20
11	651.03	33.0 QP	46.00	-13.00	1.55 H	89	11.00	22.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.22	35.3 QP	40.00	-4.70	1.20 V	9	26.90	8.40
2	61.82	28.2 QP	40.00	-11.80	1.79 V	62	23.10	5.20
3	133.12	29.0 QP	43.50	-14.50	1.52 V	1	17.30	11.70
4	164.32	26.0 QP	43.50	-17.50	1.05 V	119	16.00	10.00
5	200.03	24.7 QP	43.50	-18.80	1.33 V	159	15.70	9.00
6	219.77	25.9 QP	46.00	-20.10	1.32 V	44	16.60	9.40
7	250.02	29.6 QP	46.00	-16.40	1.05 V	353	16.60	13.00
8	319.30	25.3 QP	46.00	-20.70	1.04 V	285	10.80	14.50
9	364.21	30.9 QP	46.00	-15.10	1.50 V	131	15.00	15.90
10	400.02	33.1 QP	46.00	-12.90	1.10 V	265	16.00	17.10
11	479.83	38.0 QP	46.00	-8.00	1.39 V	313	19.10	18.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

4.2.10 TEST RESULTS – DSSS

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 1	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 59%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.7 PK	74.00	-18.30	1.25 H	219	25.30	30.40
1	2390.00	45.0 AV	54.00	-9.00	1.25 H	219	14.60	30.40
2	*2412.00	106.5 PK			1.85 H	215	76.00	30.50
2	*2412.00	99.7 AV			1.85 H	215	69.20	30.50
3	4824.00	49.2 PK	74.00	-24.80	1.39 H	11	13.00	36.20
3	4824.00	43.3 AV	54.00	-10.70	1.39 H	11	13.00	36.20
4	7236.00	51.7 PK	74.00	-22.30	1.02 H	20	10.00	41.70
4	7236.00	44.8 AV	54.00	-9.20	1.02 H	20	3.10	36.20
5	9648.00	51.8 PK	74.00	-22.20	1.63 H	334	6.90	44.90
5	9648.00	39.9 AV	54.00	-14.10	1.63 H	334	-5.00	41.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.5 PK	74.00	-16.50	1.20 V	119	27.10	30.40
1	2390.00	46.7 AV	54.00	-7.30	1.20 V	119	16.30	30.40
2	*2412.00	106.5 PK			1.00 V	331	75.90	30.50
2	*2412.00	100.2 AV			1.00 V	331	69.70	30.50
3	4824.00	52.4 PK	74.00	-21.60	1.39 V	54	16.20	36.20
3	4824.00	45.5 AV	54.00	-8.50	1.39 V	54	9.30	36.20
4	7236.00	54.3 PK	74.00	-19.70	1.08 V	56	12.70	41.70
4	7236.00	46.6 AV	54.00	-7.40	1.08 V	56	4.90	41.70
5	9648.00	53.5 PK	74.00	-20.50	1.67 V	49	8.60	44.90
5	9648.00	42.9 AV	54.00	-11.10	1.67 V	49	-2.00	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 6	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 59%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.6 PK	74.00	-18.40	1.54 H	228	25.20	30.40
1	2390.00	43.7 AV	54.00	-10.30	1.54 H	228	13.30	30.40
2	*2437.00	105.9 PK			1.08 H	65	75.20	30.70
2	*2437.00	99.3 AV			1.08 H	65	68.60	30.70
3	2483.50	56.3 PK	74.00	-17.70	1.39 H	62	25.30	31.00
3	2483.50	45.7 AV	54.00	-8.30	1.39 H	62	14.80	31.00
4	4874.00	50.8 PK	74.00	-23.20	1.58 H	149	14.30	36.50
4	4874.00	43.6 AV	54.00	-10.40	1.58 H	149	14.30	36.50
5	7311.00	52.8 PK	74.00	-21.20	1.57 H	277	11.00	41.80
5	7311.00	43.9 AV	54.00	-10.10	1.57 H	277	2.10	36.50
6	9748.00	51.0 PK	74.00	-23.00	1.16 H	130	6.40	44.60
6	9748.00	40.6 AV	54.00	-13.40	1.16 H	130	-4.00	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.1 PK	74.00	-18.90	1.07 V	360	24.70	30.40
1	2390.00	45.6 AV	54.00	-8.40	1.07 V	360	15.20	30.40
2	*2437.00	106.2 PK			1.01 V	336	75.50	30.70
2	*2437.00	100.9 AV			1.01 V	336	70.30	30.70
3	2483.50	57.6 PK	74.00	-16.40	1.32 V	320	26.60	31.00
3	2483.50	44.6 AV	54.00	-9.40	1.32 V	320	13.70	31.00
4	4874.00	53.8 PK	74.00	-20.20	1.39 V	69	17.30	36.50
4	4874.00	45.4 AV	54.00	-8.60	1.39 V	69	8.90	36.50
5	7311.00	54.8 PK	74.00	-19.20	1.41 V	169	13.00	41.80
5	7311.00	47.1 AV	54.00	-6.90	1.41 V	169	5.30	41.80
6	9748.00	53.9 PK	74.00	-20.10	1.30 V	261	9.30	44.60
6	9748.00	43.5 AV	54.00	-10.50	1.30 V	261	-1.10	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 11	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 59%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.5 PK			1.25 H	246	74.70	30.80
1	*2462.00	99.4 AV			1.25 H	246	68.60	30.80
2	2483.50	57.8 PK	74.00	-16.20	1.25 H	50	26.80	31.00
2	2483.50	45.5 AV	54.00	-8.50	1.25 H	50	14.60	31.00
3	4924.00	51.9 PK	74.00	-22.10	1.25 H	246	15.20	36.70
3	4924.00	45.3 AV	54.00	-8.70	1.25 H	246	8.60	36.70
4	7386.00	53.2 PK	74.00	-20.80	1.05 H	249	11.30	41.80
4	7386.00	43.8 AV	54.00	-10.20	1.05 H	249	2.00	41.80
5	9848.00	49.5 PK	74.00	-24.50	1.11 H	2	5.10	44.40
5	9848.00	39.8 AV	54.00	-14.20	1.11 H	2	5.10	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.1 PK			1.26 V	359	76.20	30.80
1	*2462.00	100.8 AV			1.26 V	359	70.00	30.80
2	2483.50	59.9 PK	74.00	-14.10	1.07 V	49	28.90	31.00
2	2483.50	46.6 AV	54.00	-7.40	1.07 V	49	15.70	31.00
3	4924.00	53.7 PK	74.00	-20.30	1.67 V	44	17.00	36.70
3	4924.00	45.8 AV	54.00	-8.20	1.67 V	44	9.10	36.70
4	7386.00	55.0 PK	74.00	-19.00	1.15 V	214	13.20	41.80
4	7386.00	47.7 AV	54.00	-6.30	1.15 V	214	5.90	41.80
5	9848.00	53.7 PK	74.00	-20.30	1.36 V	95	9.30	44.40
5	9848.00	42.3 AV	54.00	-11.70	1.36 V	95	-2.10	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.11 TEST RESULTS –OFDM

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 1	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 59%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.8 PK	74.00	-17.20	1.32 H	66	26.40	30.40
1	2390.00	44.7 AV	54.00	-9.30	1.32 H	66	14.30	30.40
2	*2412.00	98.2 PK			1.54 H	214	67.70	30.50
2	*2412.00	89.8 AV			1.54 H	214	59.30	30.50
3	4824.00	52.9 PK	74.00	-21.10	1.11 H	7	16.70	36.20
3	4824.00	44.6 AV	54.00	-9.40	1.11 H	7	8.40	36.20
4	7236.00	47.1 PK	74.00	-26.90	1.82 H	329	5.40	41.70
4	7236.00	36.1 AV	54.00	-17.90	1.82 H	329	5.40	41.70
5	9648.00	47.9 PK	74.00	-26.10	1.69 H	149	3.00	44.90
5	9648.00	38.8 AV	54.00	-15.20	1.69 H	149	3.00	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.7 PK	74.00	-14.30	1.25 V	21	29.20	30.40
1	2390.00	48.4 AV	54.00	-5.60	1.25 V	21	18.00	30.40
2	*2412.00	99.8 PK			1.29 V	342	69.20	30.50
2	*2412.00	91.5 AV			1.29 V	342	61.00	30.50
3	4824.00	54.4 PK	74.00	-19.60	1.33 V	279	18.20	36.20
3	4824.00	45.3 AV	54.00	-8.70	1.33 V	279	9.10	36.20
4	7236.00	48.6 PK	74.00	-25.40	1.11 V	321	6.90	41.70
4	7236.00	38.3 AV	54.00	-15.70	1.11 V	321	6.90	41.70
5	9648.00	53.1 PK	74.00	-20.90	1.07 V	91	8.20	44.90
5	9648.00	43.3 AV	54.00	-10.70	1.07 V	91	-1.60	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 6	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 59%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.1 PK	74.00	-17.90	1.55 H	338	25.60	30.40
1	2390.00	42.8 AV	54.00	-11.20	1.55 H	338	12.30	30.40
2	*2437.00	98.8 PK			1.25 H	24	68.10	30.70
2	*2437.00	91.7 AV			1.25 H	24	61.00	30.70
3	2483.50	54.4 PK	74.00	-19.60	1.31 H	269	23.50	31.00
3	2483.50	42.5 AV	54.00	-11.50	1.31 H	269	11.50	31.00
4	4874.00	52.7 PK	74.00	-21.30	1.11 H	8	16.20	36.50
4	4874.00	45.7 AV	54.00	-8.30	1.11 H	8	9.20	36.50
5	7311.00	46.8 PK	74.00	-27.20	1.31 H	47	5.00	41.80
5	7311.00	35.8 AV	54.00	-18.20	1.31 H	47	5.00	41.80
6	9748.00	47.5 PK	74.00	-26.50	1.52 H	201	2.90	44.60
6	9748.00	37.4 AV	54.00	-16.60	1.52 H	201	2.90	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.0 PK	74.00	-18.00	1.73 V	265	25.60	30.40
1	2390.00	44.2 AV	54.00	-9.80	1.73 V	265	13.80	30.40
2	*2437.00	100.0 PK			1.68 V	149	69.30	30.70
2	*2437.00	92.8 AV			1.68 V	149	62.10	30.70
3	2483.50	55.1 PK	74.00	-18.90	1.06 V	332	24.10	31.00
3	2483.50	46.0 AV	54.00	-8.00	1.06 V	332	15.10	31.00
4	4874.00	55.7 PK	74.00	-18.30	1.04 V	161	19.20	36.50
4	4874.00	44.9 AV	54.00	-9.10	1.04 V	161	8.40	36.50
5	7311.00	49.8 PK	74.00	-24.20	1.36 V	291	8.00	41.80
5	7311.00	39.8 AV	54.00	-14.20	1.36 V	291	8.00	41.80
6	9748.00	52.7 PK	74.00	-21.30	1.22 V	169	8.10	44.60
6	9748.00	42.6 AV	54.00	-11.40	1.22 V	169	-2.00	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	USB 2.0 802.11g/b Wireless Network Adapter		
MODE	Channel 11	MODEL	UW600-E
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 59%RH, 964 hPa	DETECTOR FUNCTION	Peak (PK) Average(AV)
TESTED BY	Eric Lee	TEST MODEL	Antenna 2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.4 PK			1.03 H	2	68.60	30.80
1	*2462.00	91.1 AV			1.03 H	2	60.30	30.80
2	2483.50	53.0 PK	74.00	-21.00	1.45 H	216	22.10	31.00
2	2483.50	44.2 AV	54.00	-9.80	1.45 H	216	13.20	31.00
3	4924.00	54.3 PK	74.00	-19.70	1.36 H	63	17.60	36.70
3	4924.00	45.1 AV	54.00	-8.90	1.36 H	63	8.40	36.70
4	7386.00	45.8 PK	74.00	-28.20	1.21 H	193	4.00	41.80
4	7386.00	35.1 AV	54.00	-18.90	1.21 H	193	4.00	41.80
5	9848.00	46.5 PK	74.00	-27.50	1.63 H	326	2.10	44.40
5	9848.00	37.5 AV	54.00	-16.50	1.63 H	326	2.10	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.0 PK			1.54 V	24	68.20	30.80
1	*2462.00	90.2 AV			1.54 V	24	59.30	30.80
2	2483.50	57.3 PK	74.00	-16.70	1.33 V	125	26.30	31.00
2	2483.50	48.2 AV	54.00	-5.80	1.33 V	125	17.30	31.00
3	4924.00	56.0 PK	74.00	-18.00	1.39 V	354	19.40	36.70
3	4924.00	45.6 AV	54.00	-8.40	1.39 V	354	8.90	36.70
4	7386.00	49.8 PK	74.00	-24.20	1.11 V	63	8.00	41.80
4	7386.00	38.7 AV	54.00	-15.30	1.11 V	63	8.00	41.80
5	9848.00	53.3 PK	74.00	-20.70	1.76 V	3	8.90	44.40
5	9848.00	42.4 AV	54.00	-11.60	1.76 V	3	-2.00	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.6 TEST RESULTS-DSSS


EUT	USB 2.0 802.11g/b Wireless Network Adapter		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27 deg. C, 67 %RH, 964 hPa
MODEL	UW600-E	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.84	0.5	PASS
6	2437	11.84	0.5	PASS
11	2462	11.72	0.5	PASS


CH1

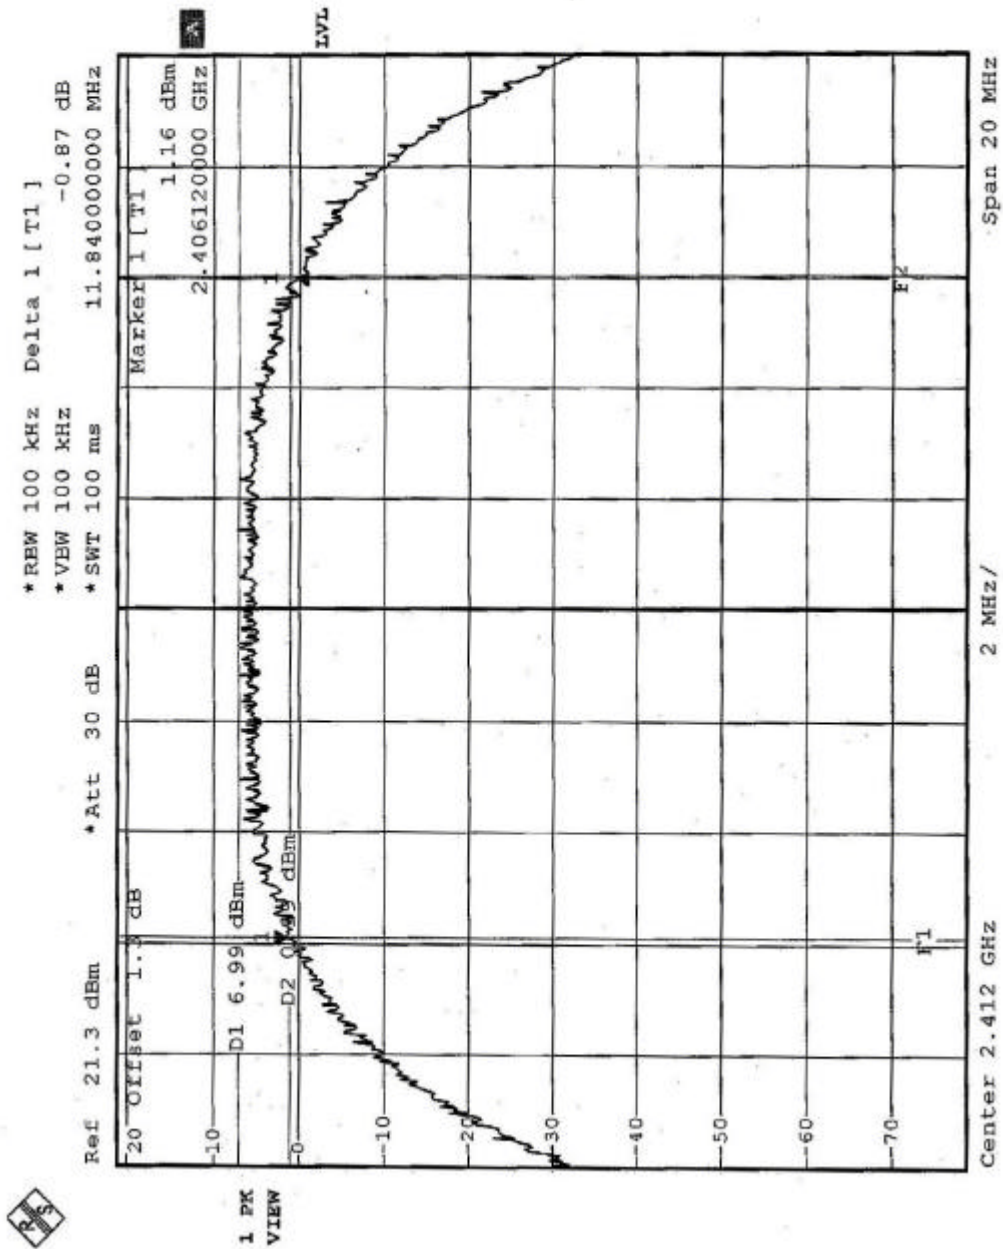

CH6

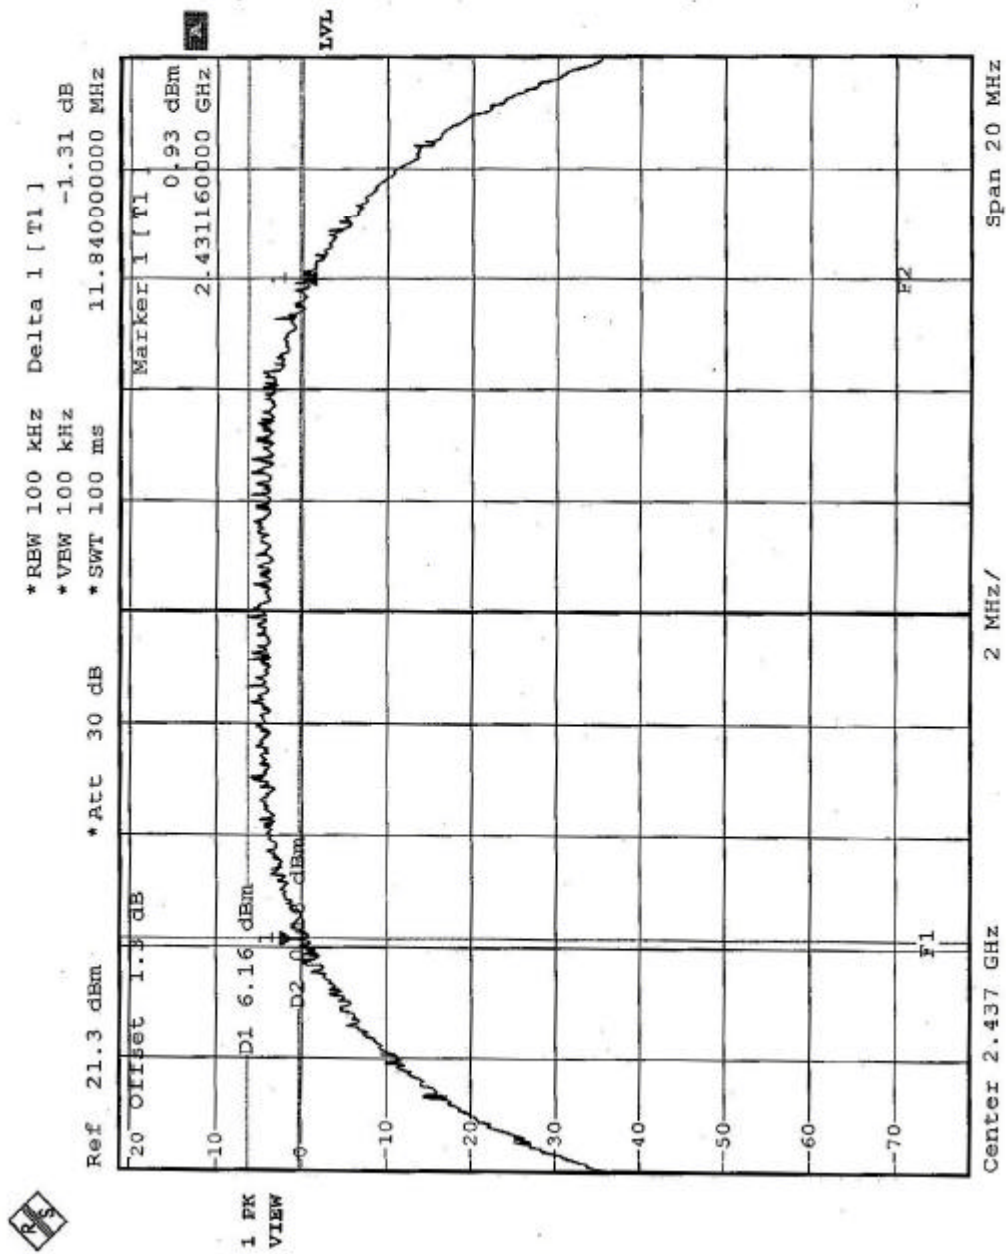

CH11

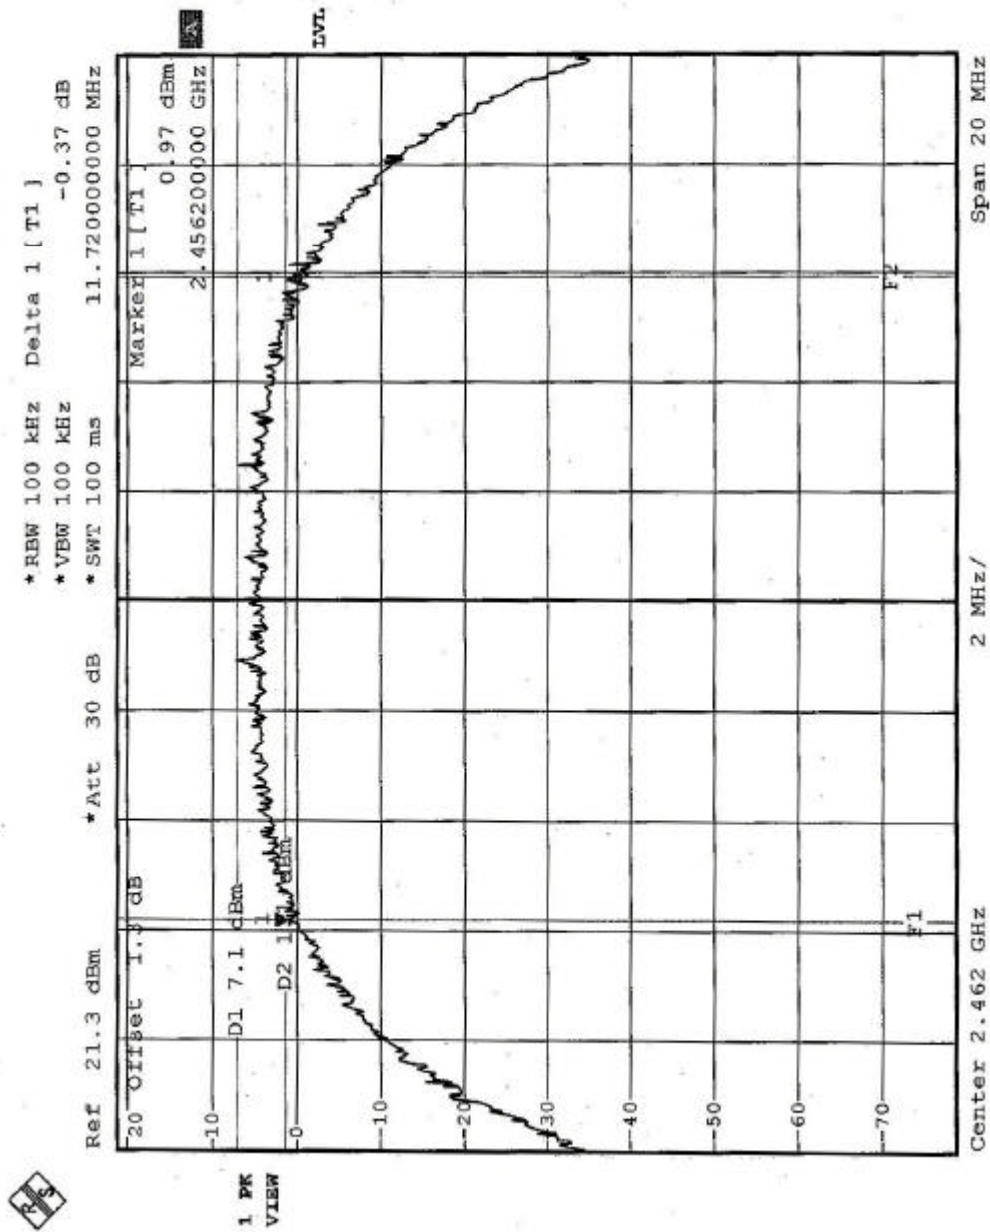

4.3.7 TEST RESULTS-OFDM

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27 deg. C, 67 %RH, 964 hPa
MODEL	UW600-E	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.65	0.5	PASS
6	2437	16.65	0.5	PASS
11	2462	16.65	0.5	PASS

1 PK
VIEW

Ref 21.3 dBm
*Att 30 dB
*RBW 100 kHz
*VBW 100 kHz
*SWT 100 ms
Delta 1 [T1]
-0.06 dB
16.65000000 GHz


20 Offset 1.3 dB
D1 -3.34 dBm
D2 -9.34 dBm
F1
F2

Center 2.412 GHz
2.5 MHz/
Span 25 MHz


LVL

Marker	Freq	Level
D1	2.412 GHz	-3.34 dBm
D2	2.417 GHz	-9.23 dBm

CH6

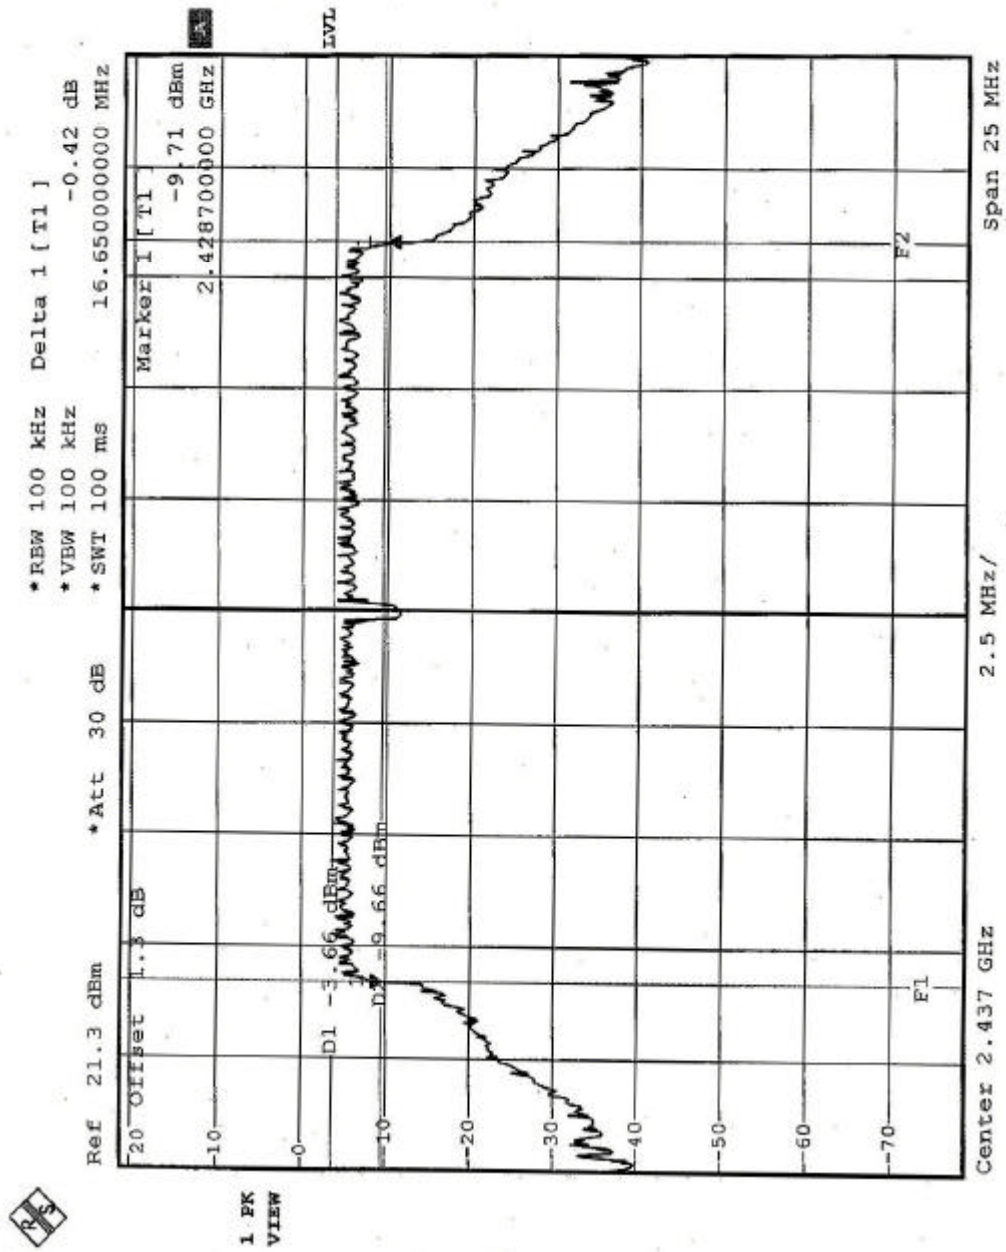

CH11

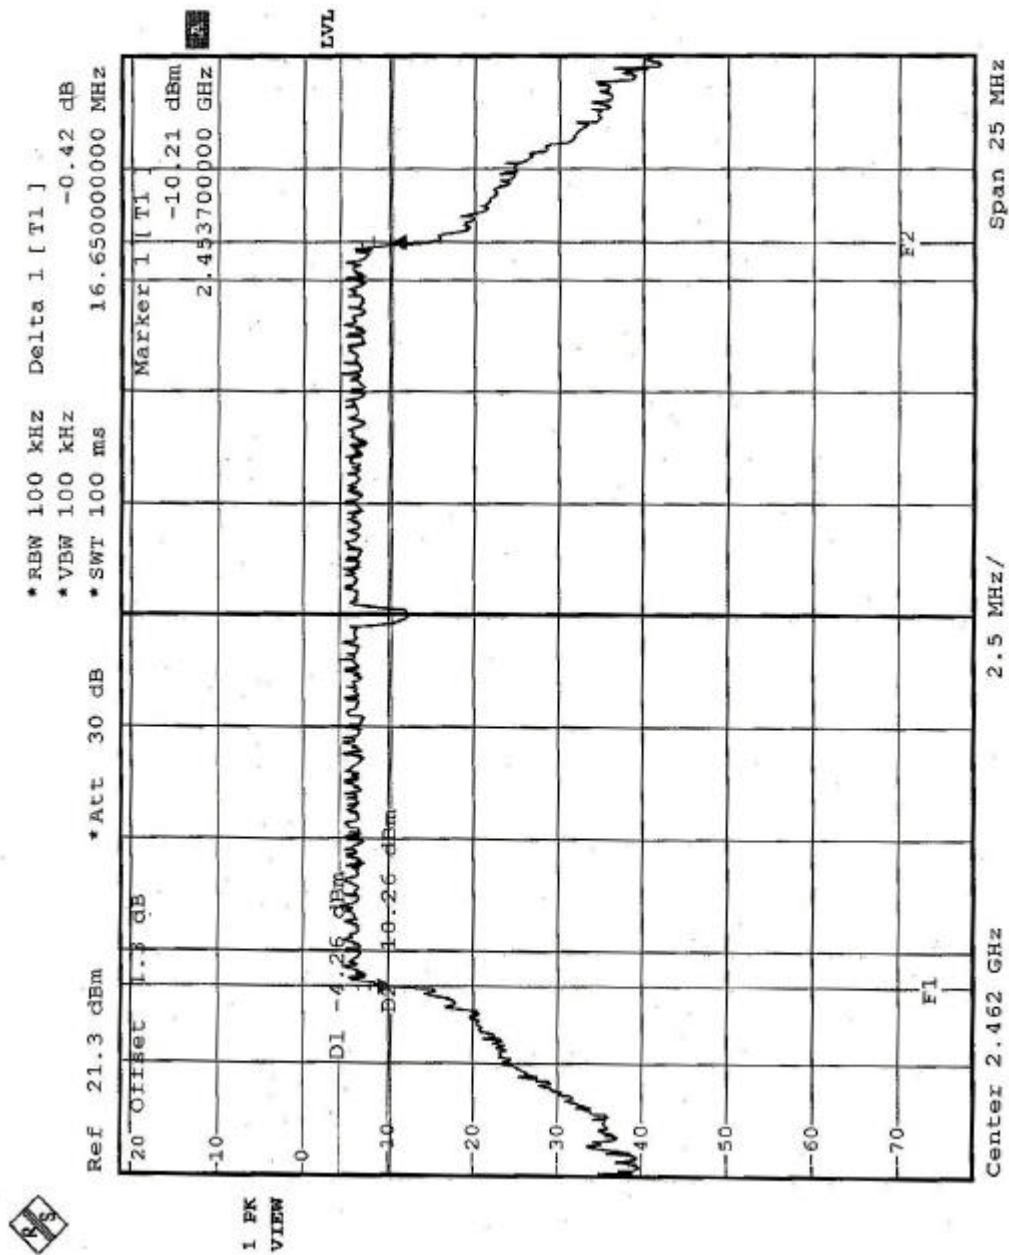

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

4.5 MAXIMUM PEAK OUTPUT POWER

4.5.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP30	100019	Dec. 19, 2003
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.5.6 TEST RESULTS-DSSS

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27 deg. C, 67 %RH, 964 hPa
MODEL	UW600-E	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	18.89	30	PASS
6	2437	18.53	30	PASS
11	2462	18.10	30	PASS

4.5.7 TEST RESULTS-OFDM

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27 deg. C, 67 %RH, 964 hPa
MODEL	UW600-E	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	13.91	30	PASS
6	2437	13.04	30	PASS
11	2462	13.58	30	PASS

4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.6.4 TEST SETUP



4.6.5 EUT OPERATING CONDITIONS


Same as 4.3.5

4.6.6 TEST RESULTS-DSSS

EUT	USB 2.0 802.11g/b Wireless Network Adapter		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	MODEL	UW600-E
TESTED BY	Hank Chung	ENVIRONMENTAL CONDITIONS	27 deg. C, 67 %RH, 964 hPa


CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	3.24	8	PASS
6	2437	2.40	8	PASS
11	2462	0.83	8	PASS

CH1

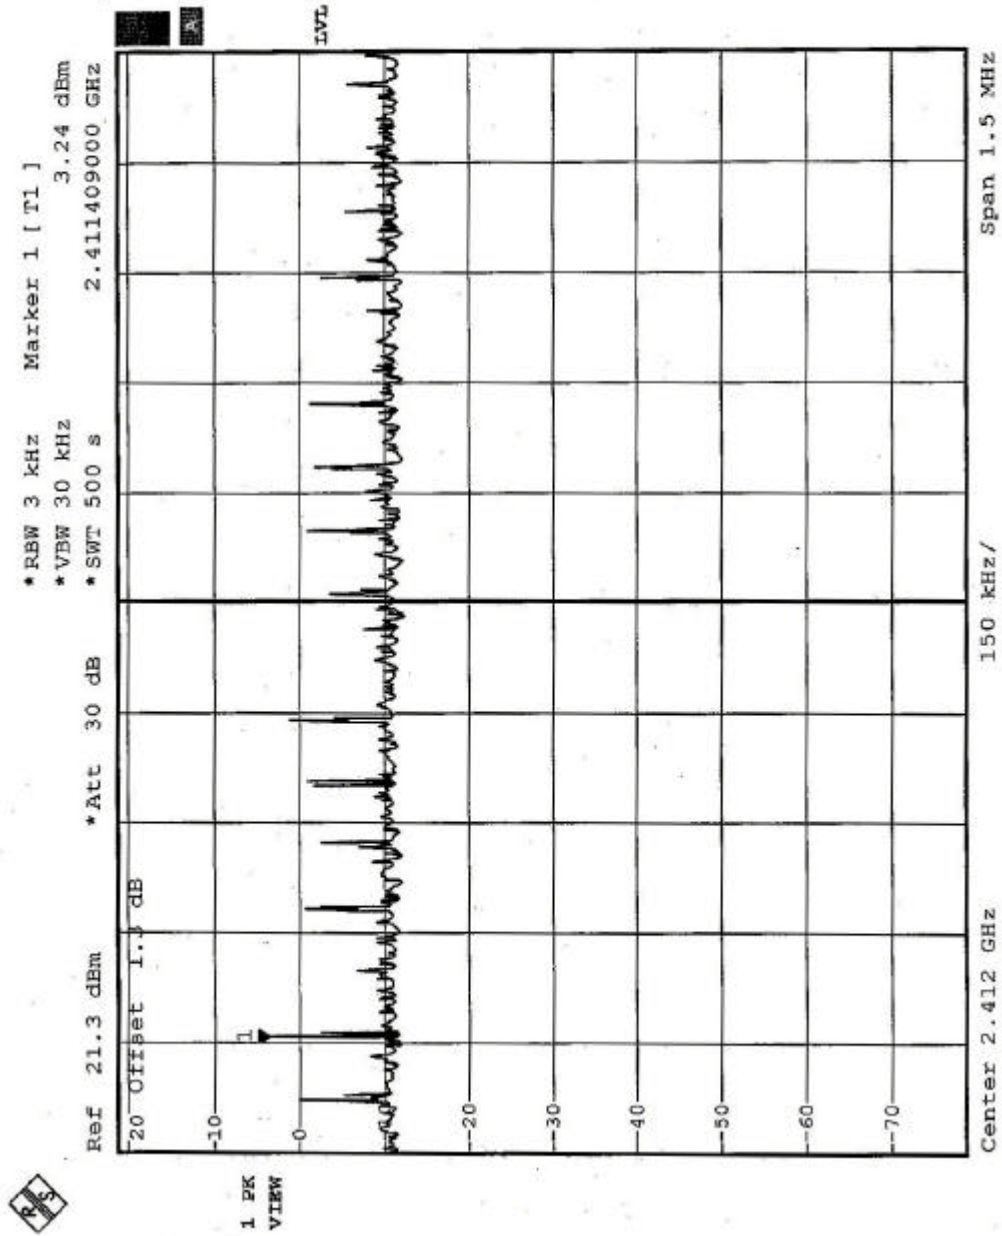




CH6

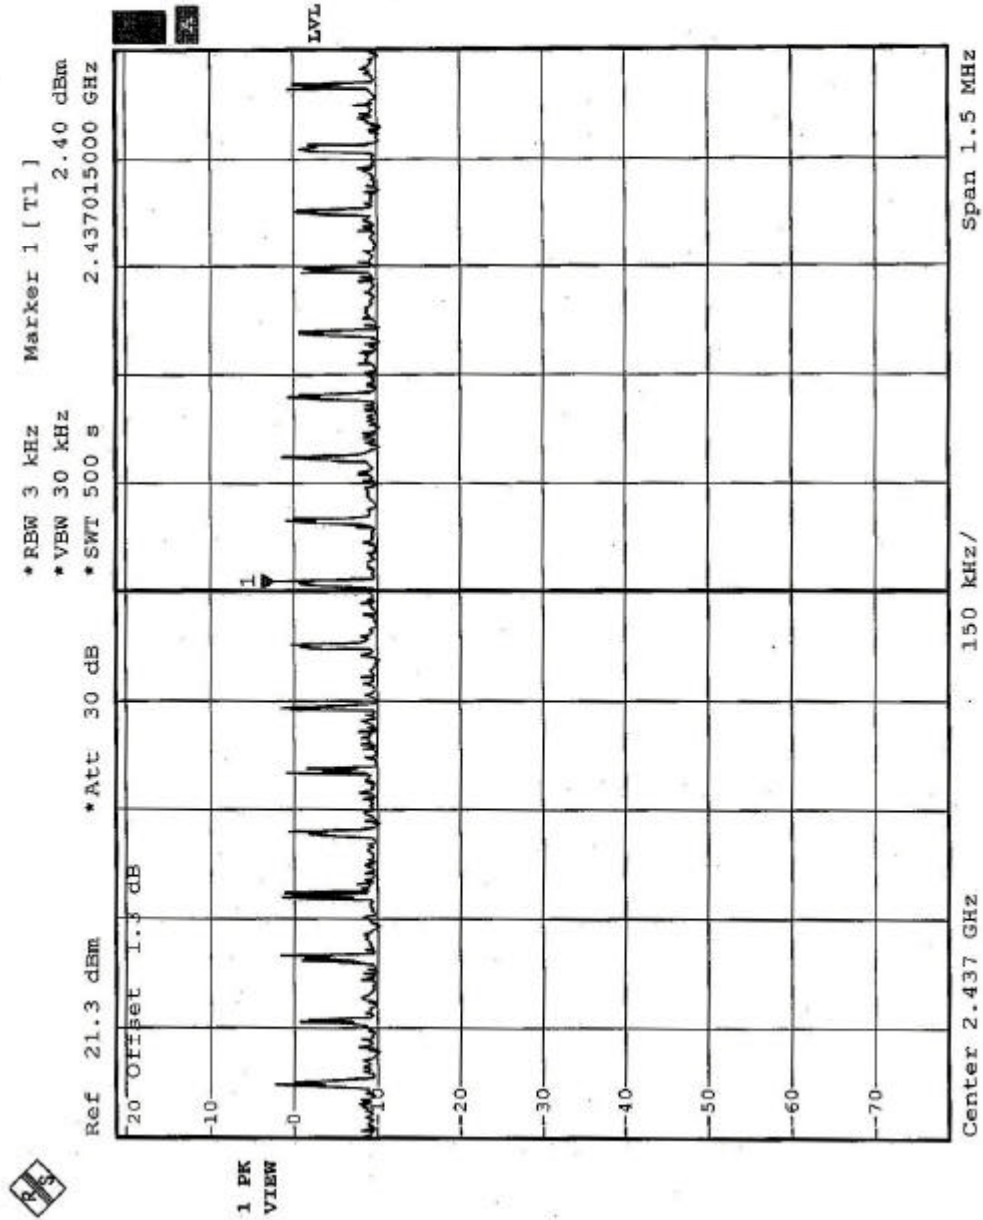



CH11

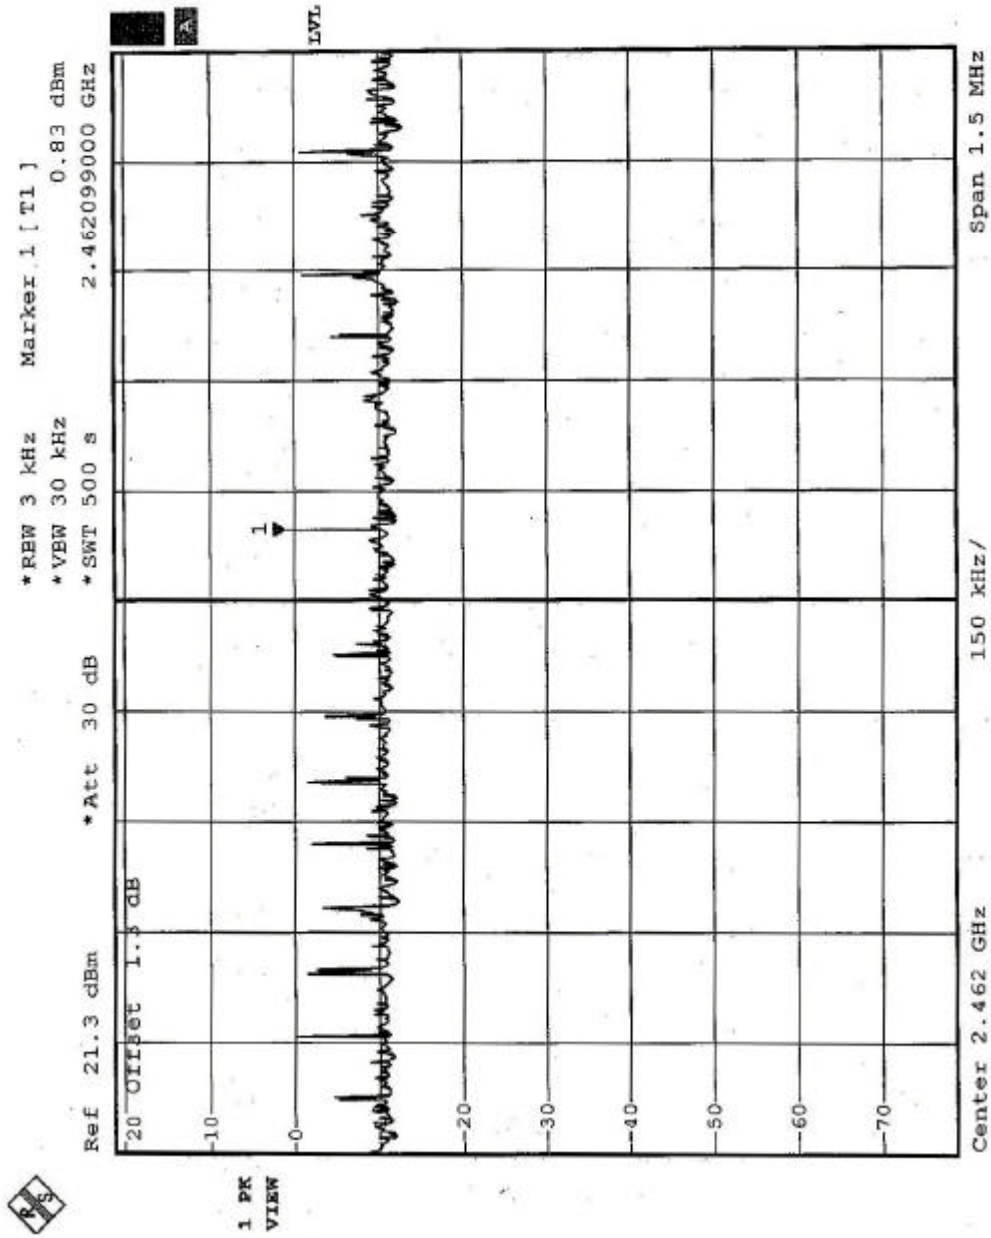




4.6.7 TEST RESULTS-OFDM


EUT	USB 2.0 802.11g/b Wireless Network Adapter		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	MODEL	UW600-E
TESTED BY	Hank Chung	ENVIRONMENTAL CONDITIONS	27 deg. C, 67 %RH, 964 hPa

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.40	8	PASS
6	2437	-15.07	8	PASS
11	2462	-14.78	8	PASS


CH1

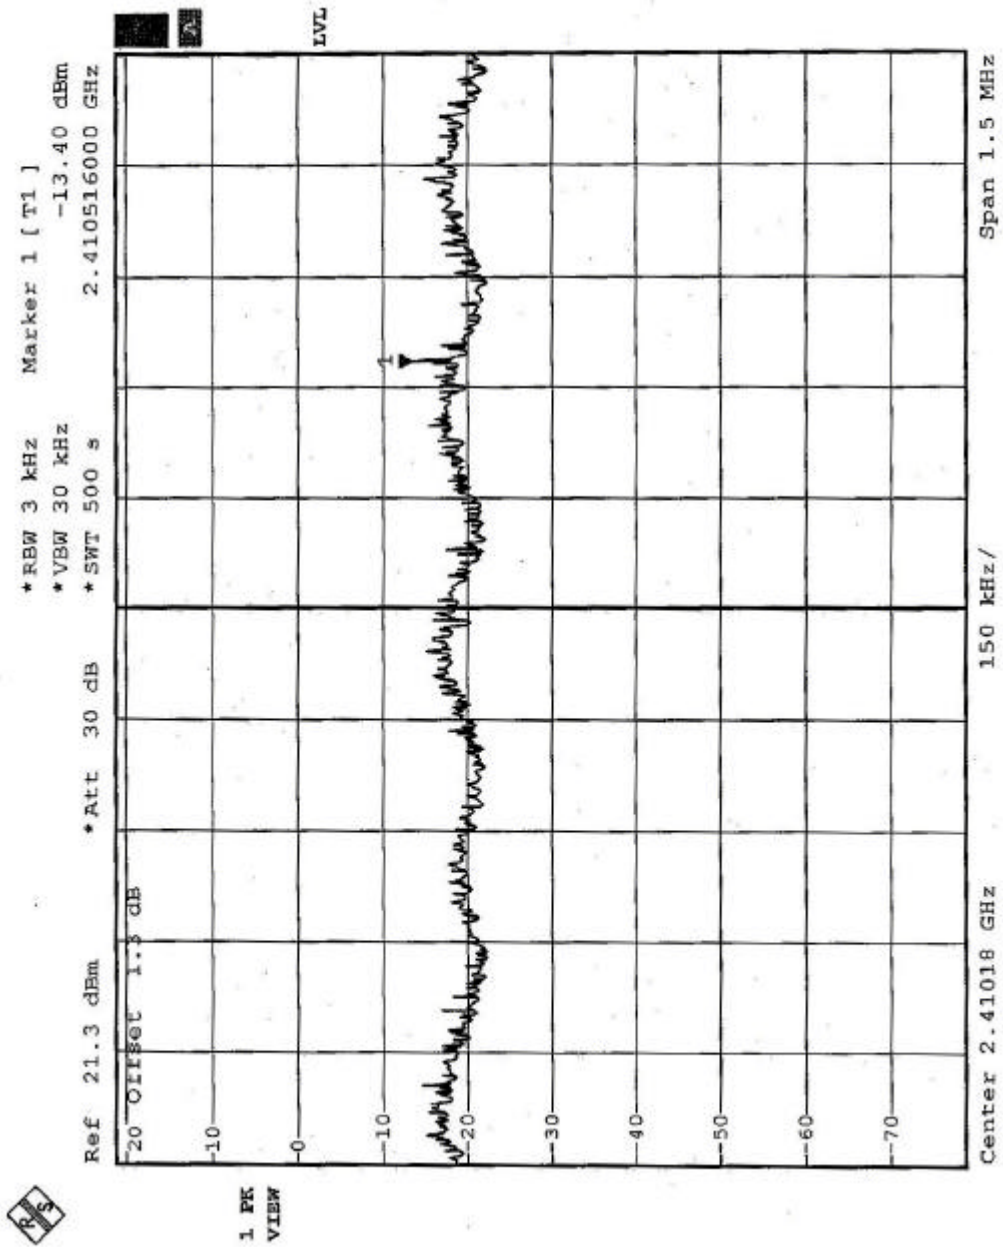

CH6

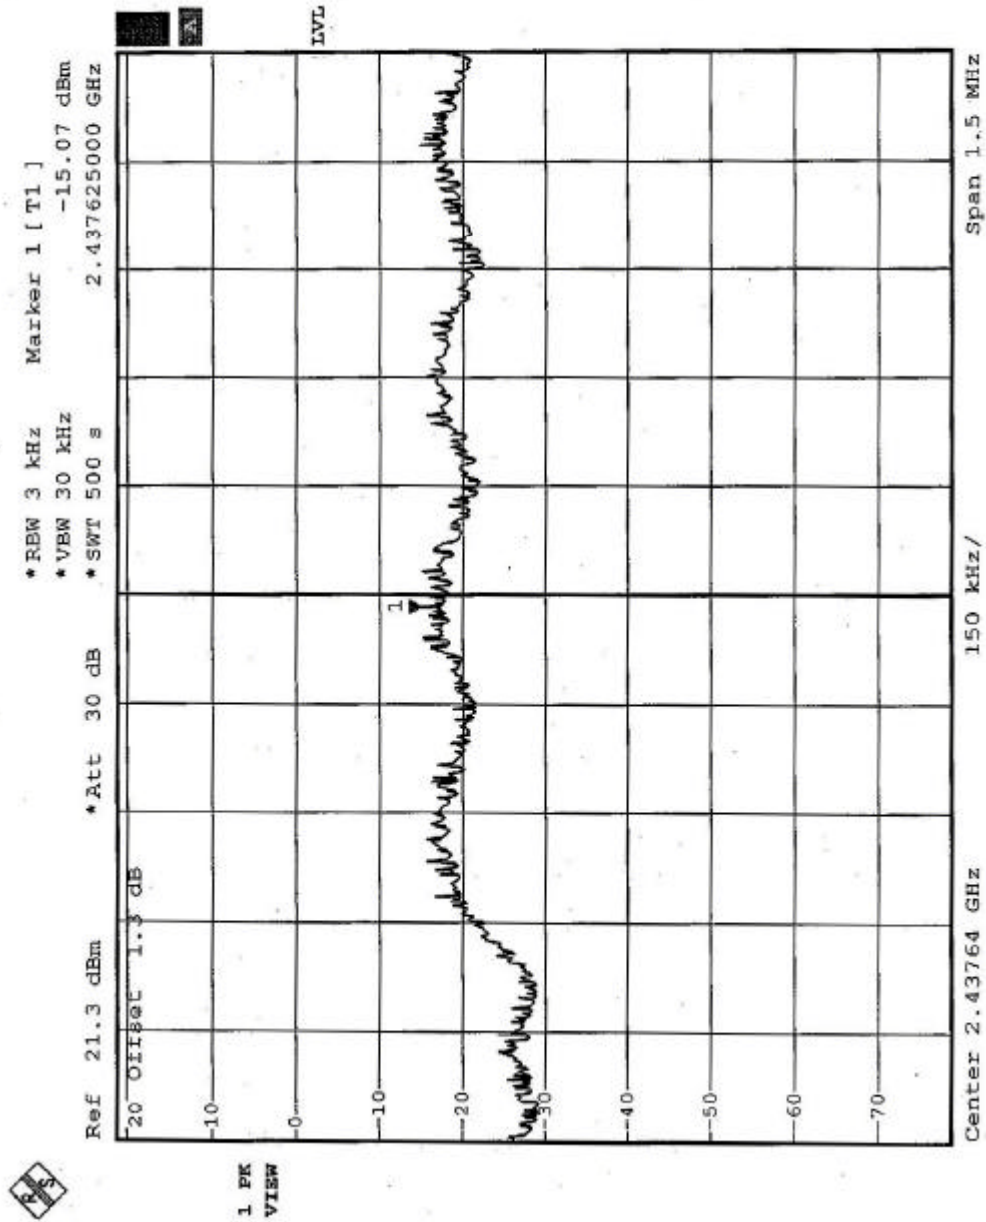

CH11

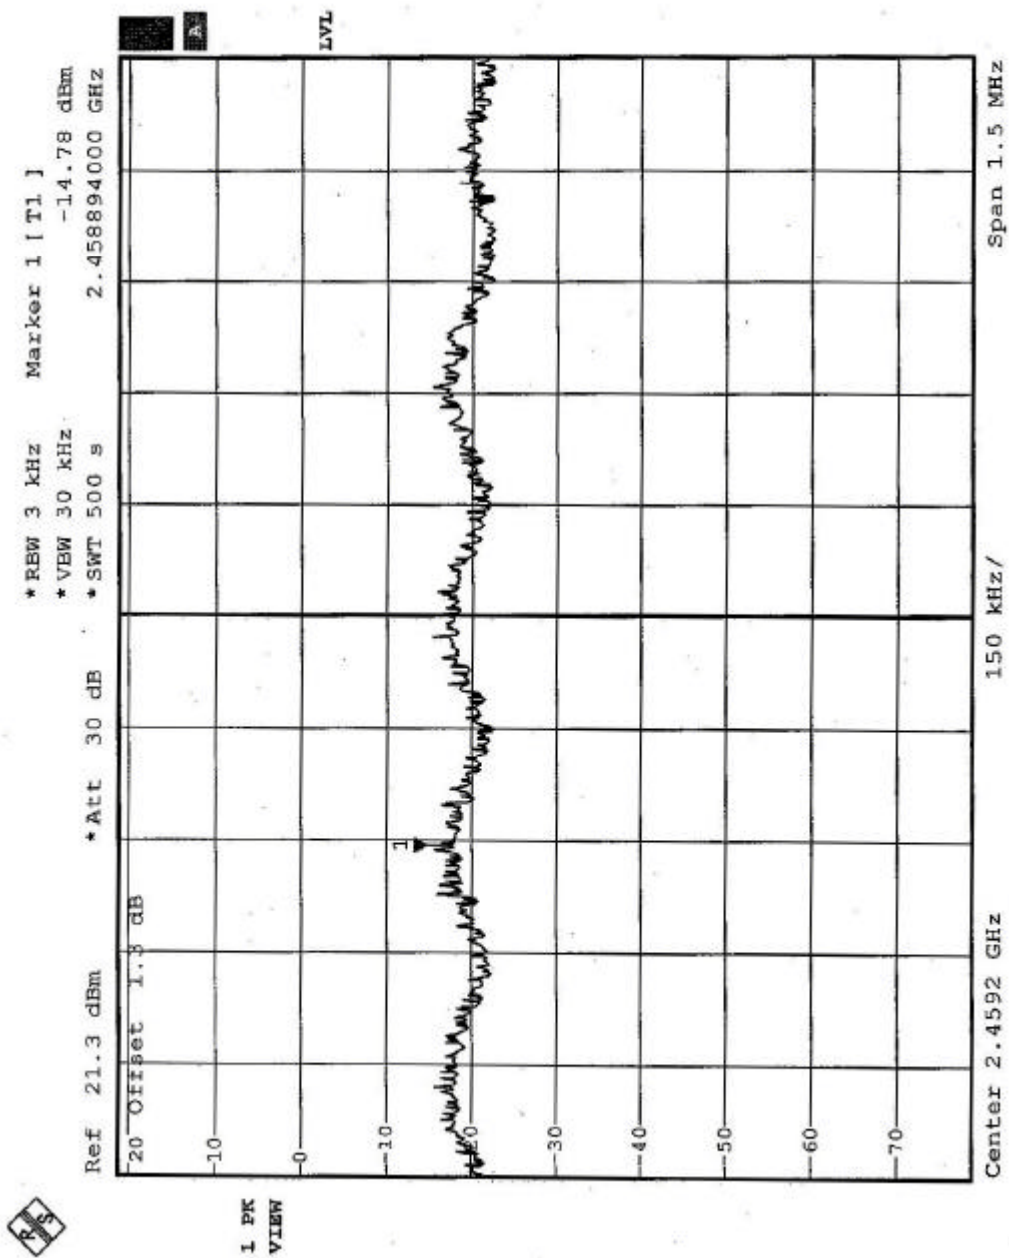

4.7 BAND EDGES MEASUREMENT

4.7.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.7.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.7.4 EUT OPERATING CONDITION

Same as Item 4.3.5





4.7.5 TEST RESULTS - DSSS

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 53.82dB delta between carrier maximum power and local maximum emission in restrict band (2.390GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 100.2dBuV/m, so the maximum field strength in restrict band is $100.2 - 53.82 = 46.32$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 53.71 dB delta between carrier maximum power and local maximum emission in restrict band (2.4862GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 100.8dBuV/m, so the maximum field strength in restrict band is $100.8 - 53.71 = 47.09$ dBuV/m which is under 54 dBuV/m limit.

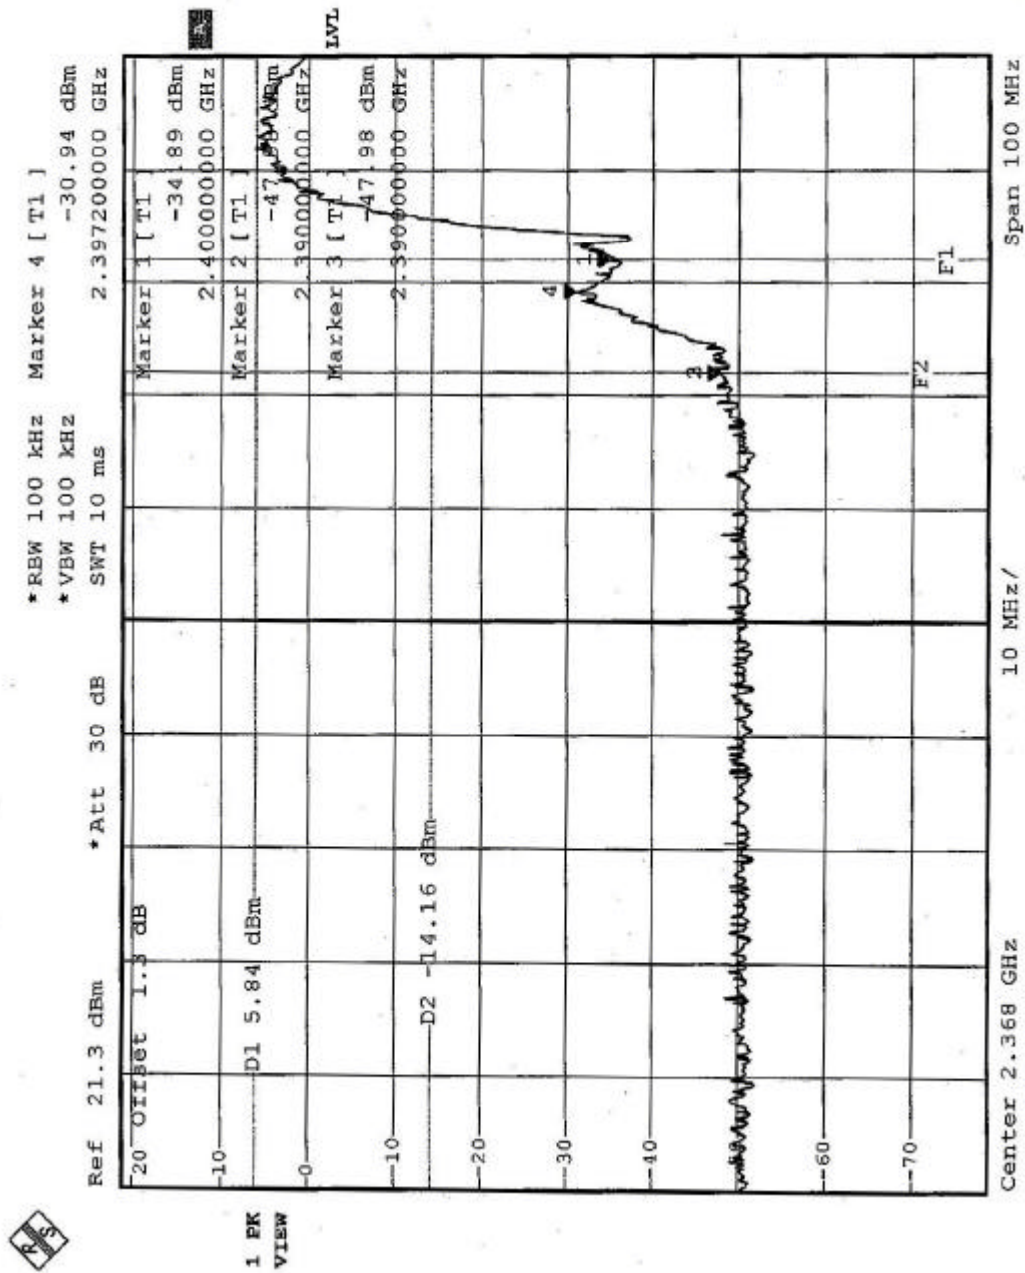

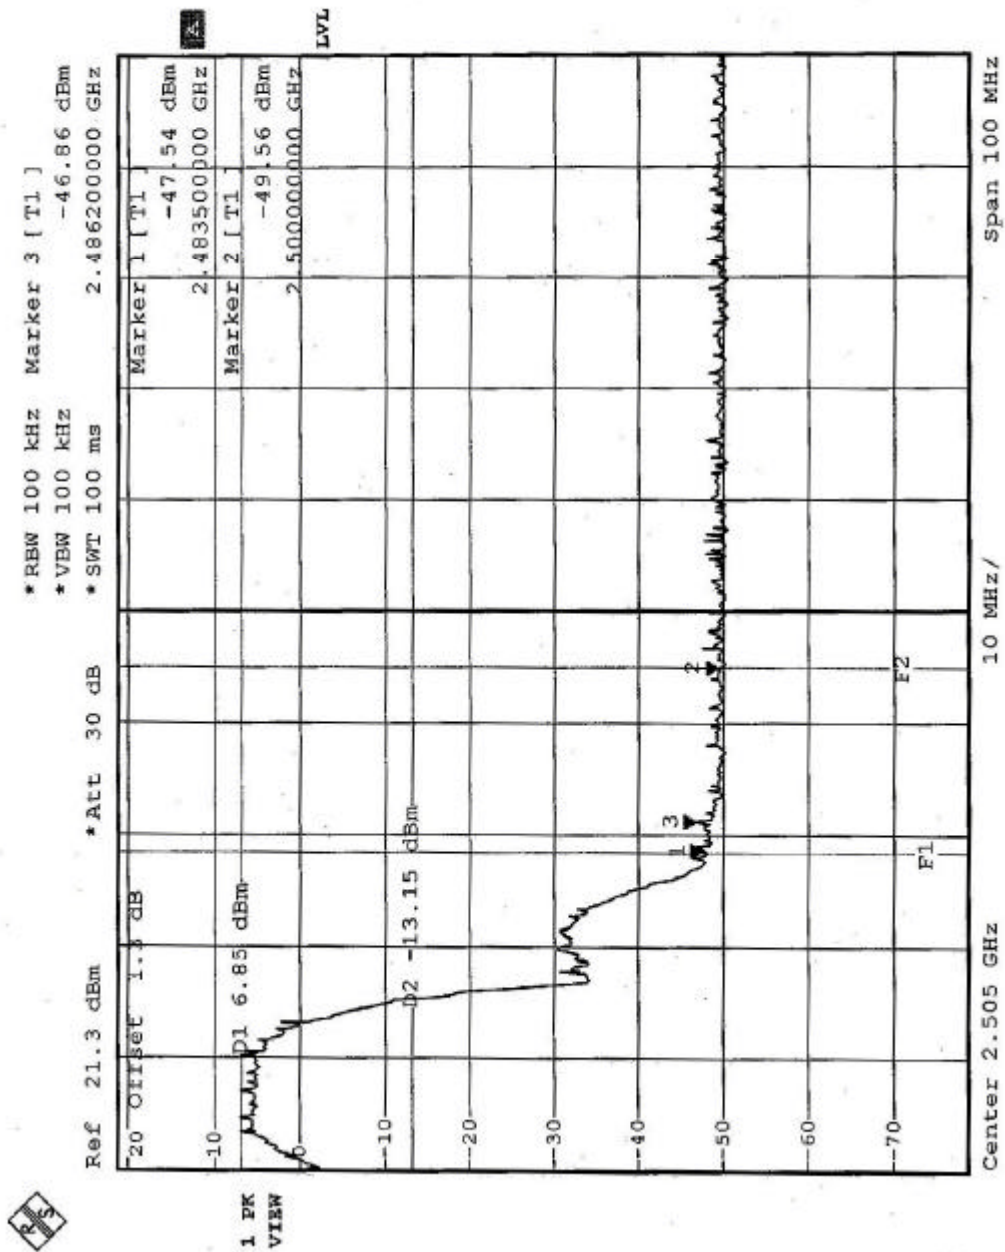





4.7.6 TEST RESULTS-OFDM

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 44.68dB delta between carrier maximum power and local maximum emission in restrict band (2.390GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 94.2dBuV/m, so the maximum field strength in restrict band is $94.2 - 44.68 = 49.52$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 44.19dB delta between carrier maximum power and local maximum emission in restrict band (2.4920GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 94.9dBuV/m, so the maximum field strength in restrict band is $94.9 - 44.19 = 50.71$ dBuV/m which is under 54 dBuV/m limit.

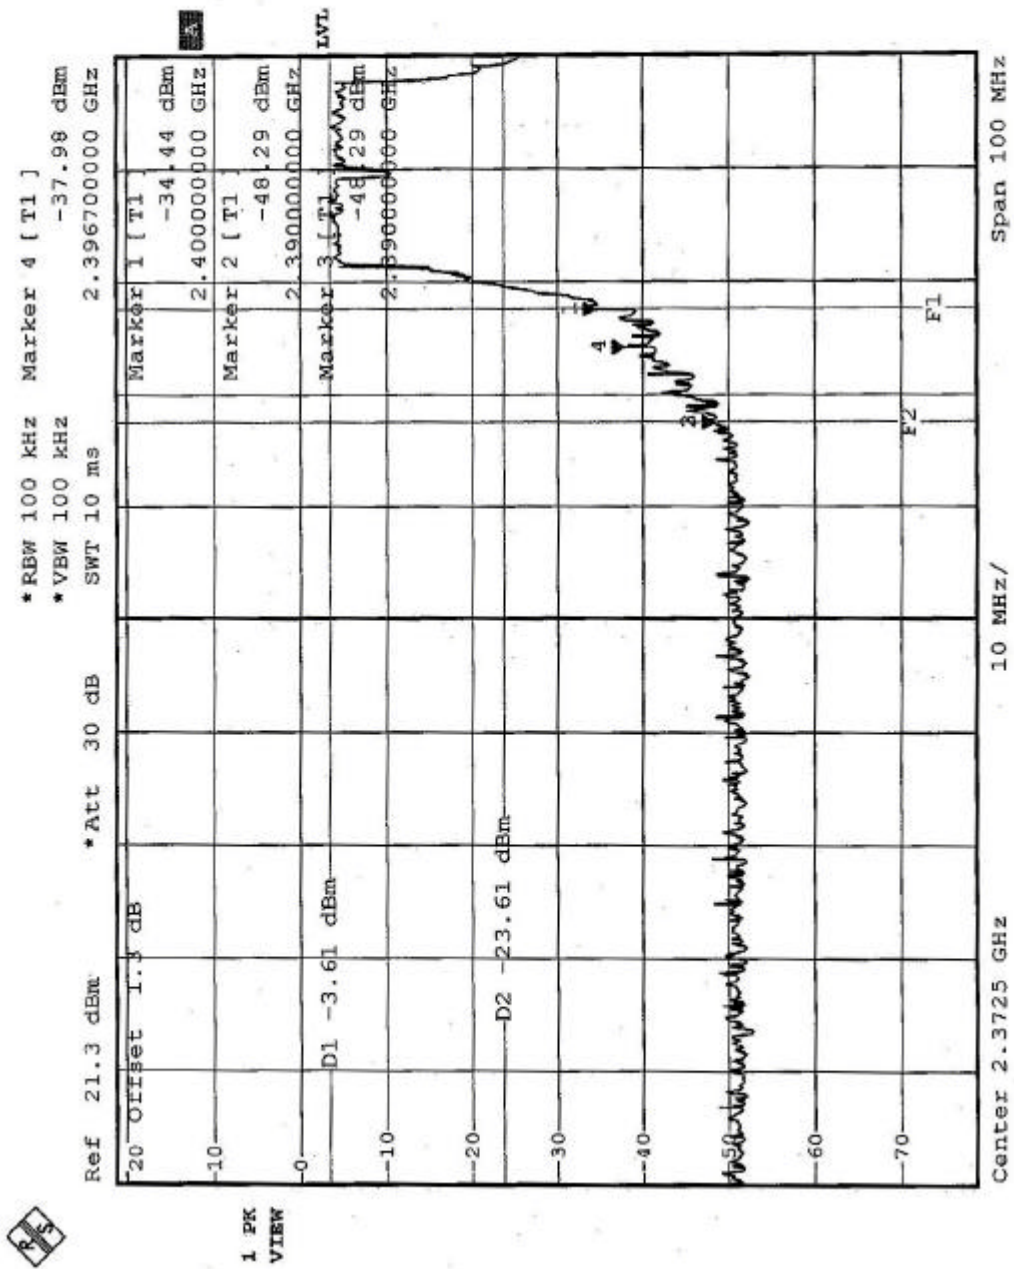

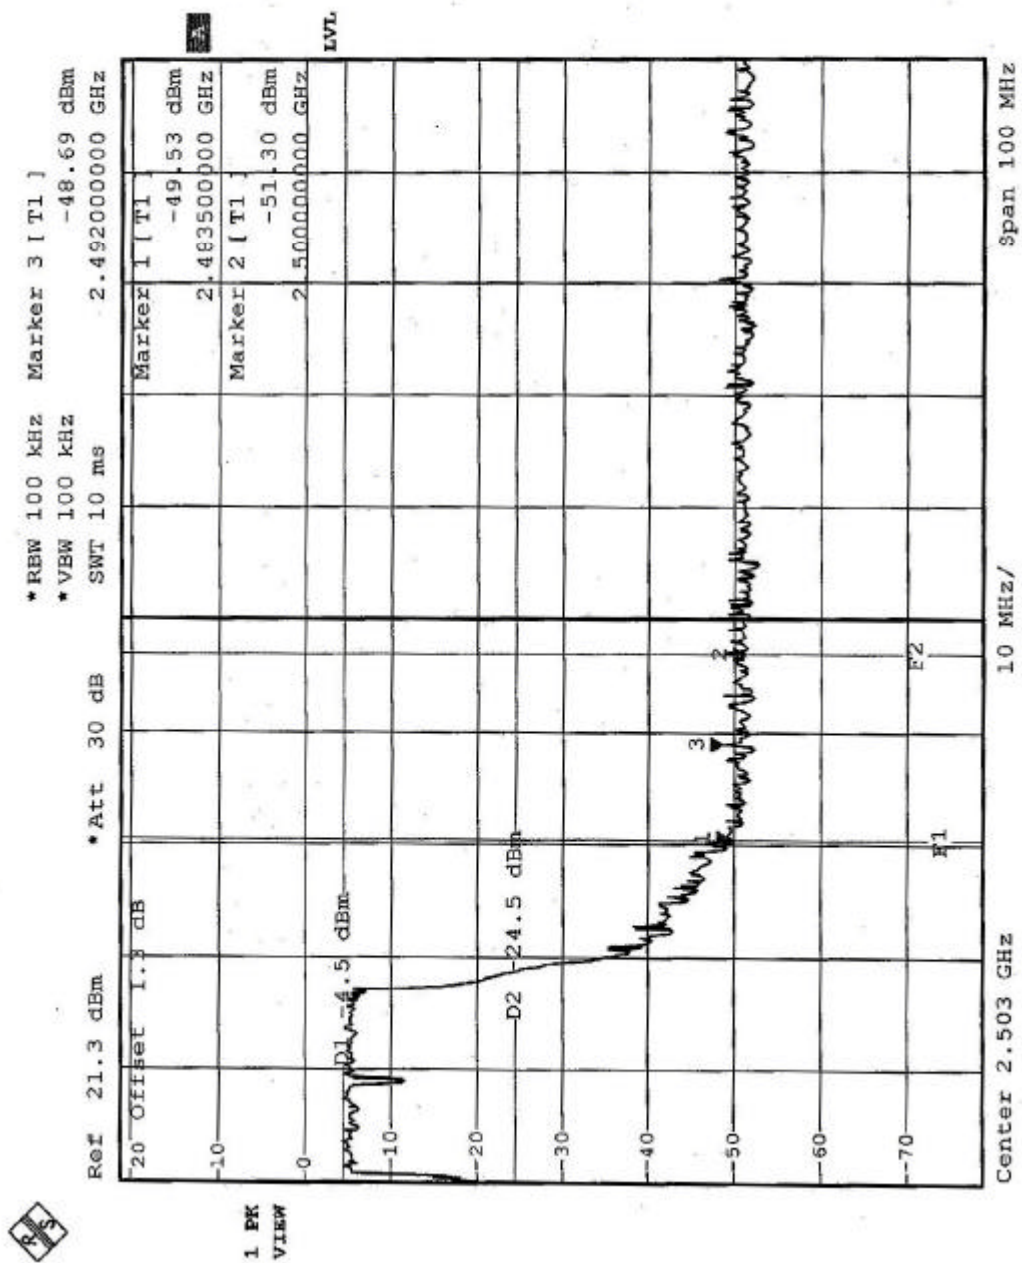



4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION


The antenna types used in this product are Antenna 1: Detachable Antenna with MMCX connector and Antenna 2: PIFA Antenna without connector. And the maximum Gain of this antenna is only 2dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

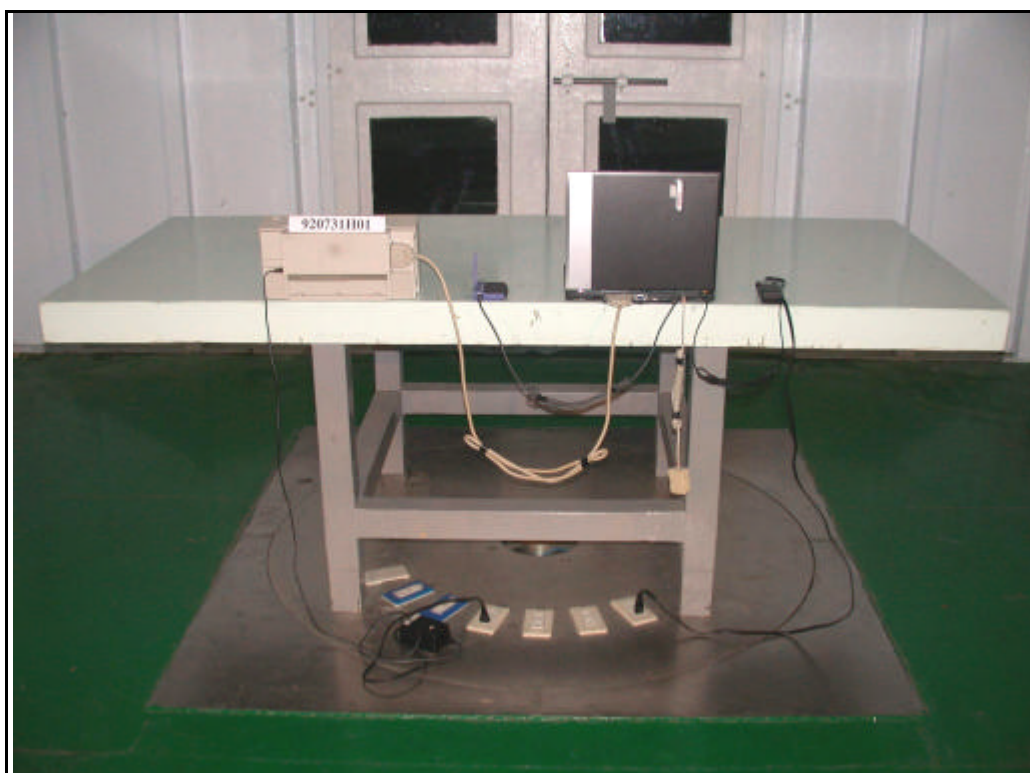



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
Canada	INDUSTRY CANADA
R.O.C.	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.