



FCC RADIO TEST REPORT

Applicant's company	CyberTAN Technology, Inc.
Applicant Address	No. 99, Park Avenue III, Science-based Industrial Park Hsinchu, 308 Taiwan
FCC ID	N89-VEN501
Manufacturer's company	CyberTAN Technology, Inc.
Manufacturer Address	No. 99, Park Avenue III, Science-based Industrial Park Hsinchu, 308 Taiwan

Product Name	Wireless Access Point
Brand Name	technicolor
Model No.	VEN501, VEN501-XX (Where X = A ~ Z, or blank for marketing purpose)
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350 MHz / 5470 ~ 5725 MHz / 5725 ~ 5850 MHz
Received Date	Jan. 12, 2012
Final Test Date	Apr. 07, 2016
Submission Type	Class II Change

Statement

Test result included is for the IEEE 802.11n of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r01, KDB662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes.....	6
3.6. Table for Testing Locations.....	6
3.7. Table for Class II Change	7
3.8. Table for Multiple Listing.....	7
3.9. Table for Supporting Units	7
3.10. Table for Parameters of Test Software Setting	8
3.11. EUT Operation during Test	8
3.12. Duty Cycle	8
3.13. Test Configurations	9
4. TEST RESULT	10
4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	10
4.2. 6dB Spectrum Bandwidth Measurement	15
4.3. Maximum Conducted Output Power Measurement.....	18
4.4. Power Spectral Density Measurement	21
4.5. Radiated Emissions Measurement	25
4.6. Band Edge Emissions Measurement	33
4.7. Frequency Stability Measurement	36
4.8. Antenna Requirements	39
5. LIST OF MEASURING EQUIPMENTS	40
6. MEASUREMENT UNCERTAINTY.....	41
APPENDIX A. TEST PHOTOS	A1 ~ A2



History of This Test Report



1. VERIFICATION OF COMPLIANCE

Product Name : Wireless Access Point
Brand Name : technicolor
Model No. : VEN501, VEN501-XX (Where X = A ~ Z, or blank for marketing purpose)
Applicant : CyberTAN Technology, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 12, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that appears to read "Sam Chen".

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.2	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	3.71 dB
4.4	15.407(a)	Power Spectral Density	Complies	18.07 dB
4.5	15.407(b)	Radiated Emissions	Complies	7.81 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.21 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description	
Product Type	WLAN (4TX, 4RX)	
Radio Type	Intentional Transceiver	
Power Type	From power adapter	
Modulation	IEEE 802.11n: see the below table	
Data Modulation	IEEE 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM)	
Data Rate (Mbps)	IEEE 802.11n: see the below table	
Frequency Range	5150 ~ 5350 MHz / 5470 ~ 5725 MHz / 5725 ~ 5850 MHz	
Channel Number	21 for 20MHz bandwidth ; 9 for 40MHz bandwidth	
Channel Band Width (99%)	Band 4: IEEE 802.11n MCS0 (HT20): 17.89 MHz IEEE 802.11n MCS0 (HT40): 38.06 MHz	
Maximum Conducted Output Power	Band 4: IEEE 802.11n MCS0 (HT20): 26.29 dBm IEEE 802.11n MCS0 (HT40): 26.17 dBm	
Carrier Frequencies	Please refer to section 3.4	
Antenna	Please refer to section 3.3	

Items	Description		
Communication Mode	<input checked="" type="checkbox"/>	IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input checked="" type="checkbox"/>	With TPC	<input type="checkbox"/> Without TPC
Weather Band (5600~5650MHz)	<input type="checkbox"/>	With 5600~5650MHz	<input checked="" type="checkbox"/> Without 5600~5650MHz
Beamforming Function	<input type="checkbox"/>	With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operate Condition	<input checked="" type="checkbox"/>	Indoor	<input type="checkbox"/> Outdoor

Antenna and Band width

Antenna	Four (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11n	V	V

Note 1: The EUT support 802.11n only.

Note 2: The EUT has two function one is Master function only support 802.11n 40MHz and other one is Client without radar detection function only support 802.11n 20MHz/40MHz.

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS0-31
802.11n (HT40)	4	MCS0-31

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories

Power	Brand	Model	Rating
Adapter	Ac Bel	WAB013	Input: 100-120V ~ 0.4A 60Hz Output: 12V, 1A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Airgain	N5X20SC	Embedded Antenna	I-PEX	2.0
2	Airgain	N5X20SC	Embedded Antenna	I-PEX	2.0
3	Airgain	N5X20SC	Embedded Antenna	I-PEX	2.0
4	Airgain	N5X20SC	Embedded Antenna	I-PEX	2.0

Note: There are four antennas of EUT.

Ant. 1, Ant. 2, Ant. 3 and Ant. 4 can be used as transmitting/receiving antennas.

Ant. 1, Ant. 2, Ant. 3 and Ant. 4 could transmit/receive simultaneously.



3.4. Table for Carrier Frequencies

The EUT has two bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 134, 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	116	5580 MHz
	102	5510 MHz	132	5660 MHz
	104	5520 MHz	134	5670 MHz
	108	5540 MHz	136	5680 MHz
	110	5550 MHz	140	5700 MHz
	112	5560 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Ant.
Max. Conducted Output Power Power Spectral Density 26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11n HT20	Band 4	MCS0	149/157/165	1+2+3+4
	11n HT40	Band 4	MCS0	151/159	1+2+3+4
6dB Spectrum Bandwidth Measurement	11n HT20	Band 4	MCS0	149/157/165	1+2+3+4
	11n HT40	Band 4	MCS0	151/159	1+2+3+4
Radiated Emission Above 1GHz	11n HT20	Band 4	MCS0	149/157/165	1+2+3+4
	11n HT40	Band 4	MCS0	151/159	1+2+3+4
Band Edge Emission	11n HT20	Band 4	MCS0	149/157/165	1+2+3+4
	11n HT40	Band 4	MCS0	151/159	1+2+3+4
Frequency Stability	20 MHz	Band 4	-	157	1
	40 MHz	Band 4	-	151	1

Note: The EUT can only use Y axis position.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR211241 and FR211241-01

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Changing 5GHz Band 1 to "New Rules" from "Old Rules".	After evaluating, it's not necessary to re-test all test items for 5GHz Band 1 updating to "New Rules" due to the same power as original filing.
2. Changing 5GHz Band 2 and Band 3 to "New Rules" from "Old Rules".	It is not necessary to re-test all test items.
3. Changing Brand name: technicolor.	
4. Adding a Model Name: VEN501-XX (Where X = A ~ Z, or blank for marketing purpose).	
5. Changing 5GHz Band 4 to "New Rules" from "Old Rules".	1. 26dB Bandwidth and 99% Occupied Bandwidth 2. 6dB Spectrum Bandwidth 3. Maximum Conducted Output Power 4. Power Spectral Density 5. Radiated Emissions (Above 1GHz) 6. Band Edge Emissions 7. Frequency Stability

3.8. Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	Description
VEN501	All the models are identical, the difference model name for difference brand served as marketing strategy.
VEN501-XX (Where X = A ~ Z, or blank for marketing purpose)	

3.9. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

3.10.Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version		DOS				
Mode		Test Frequency (MHz)				
		NCB: 20MHz			NCB: 40MHz	
		5745 MHz	5785 MHz	5825 MHz	5755 MHz	5795 MHz
802.11n MCS0 HT20		20.5	20.5	20	-	-
802.11n MCS0 HT40		-	-	-	15	20.5

3.11.EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.12.Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11n MCS0 HT20	0.579	0.646	89.63%	0.48	1.73
802.11n MCS0 HT40	0.302	0.352	85.80%	0.67	3.31

3.13. Test Configurations

3.13.1. Radiation Emissions Test Configuration

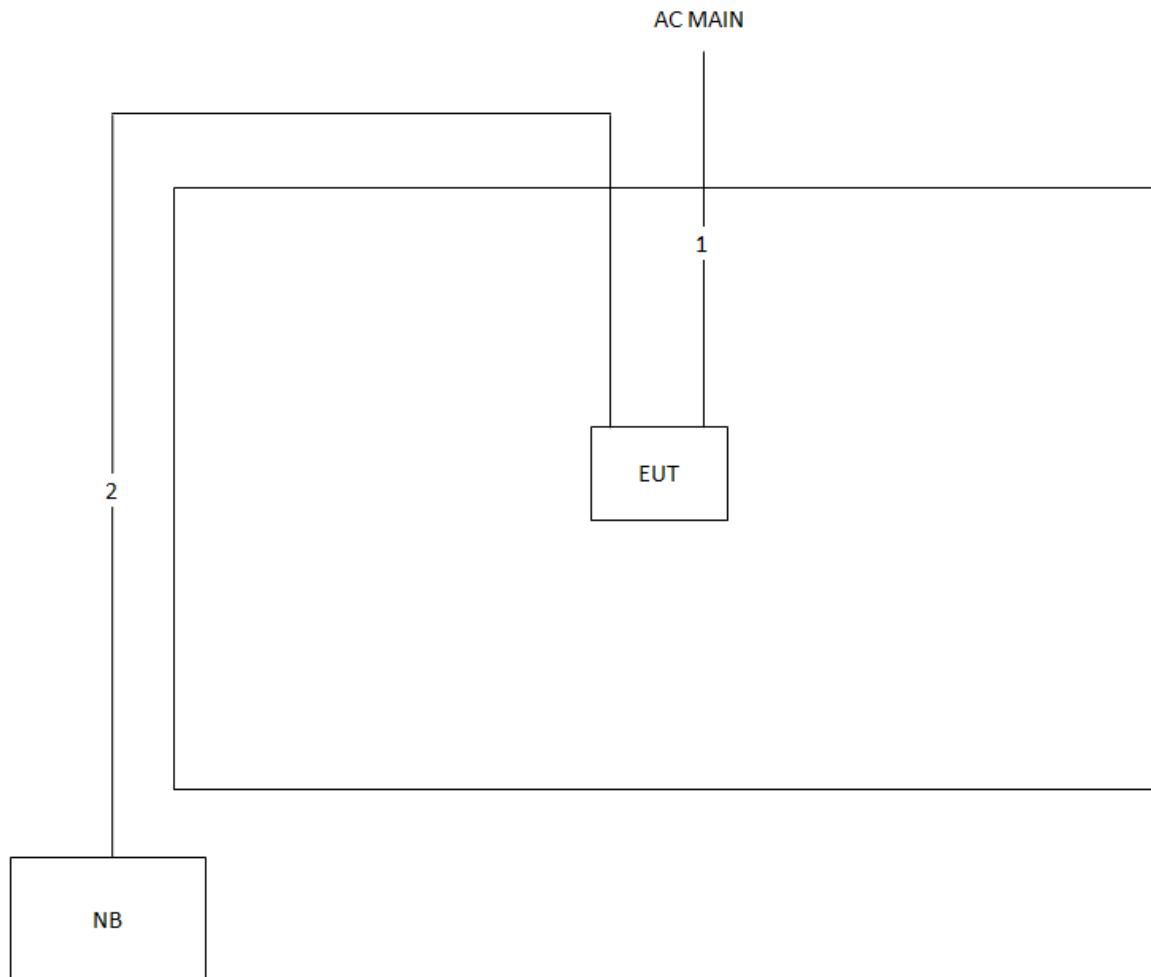

Item	Connection	Shielded	Length
1	Power cable	No	1.5 m
2	RJ-45 cable	No	10 m

4. TEST RESULT

4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.1.1. Limit

No restriction limits.

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

4.1.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.1.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.1.5. Test Deviation

There is no deviation with the original standard.

4.1.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.1.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11n MCS0 HT20	5745 MHz	21.13	17.89
	5785 MHz	20.87	17.80
	5825 MHz	20.78	17.63
802.11n MCS0 HT40	5755 MHz	43.19	37.48
	5795 MHz	44.49	38.06

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 / 5745 MHz

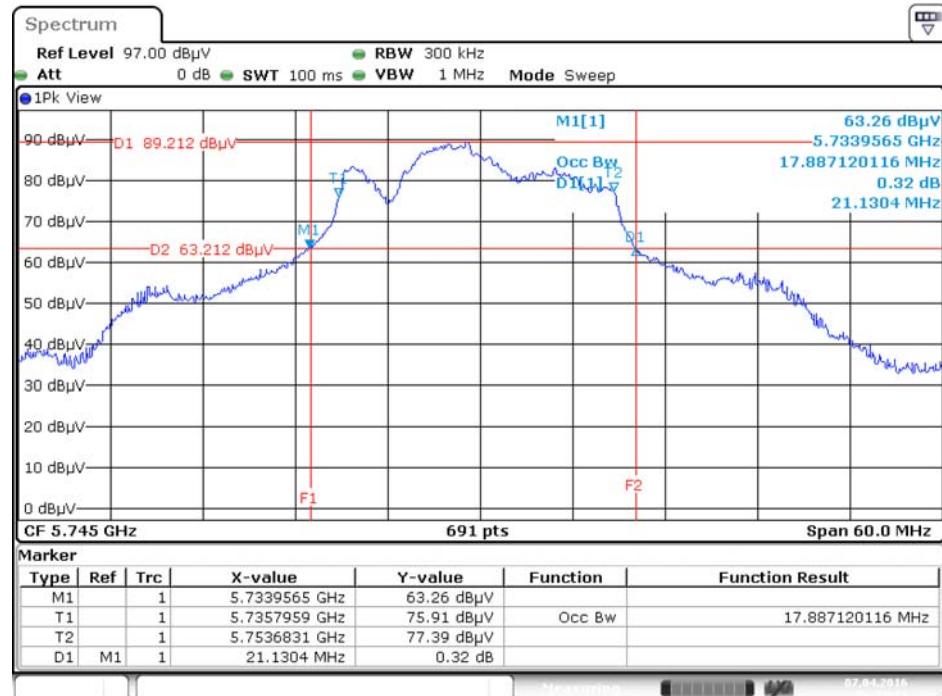


Date: 7.APR.2016 20:23:22

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 / 5785 MHz

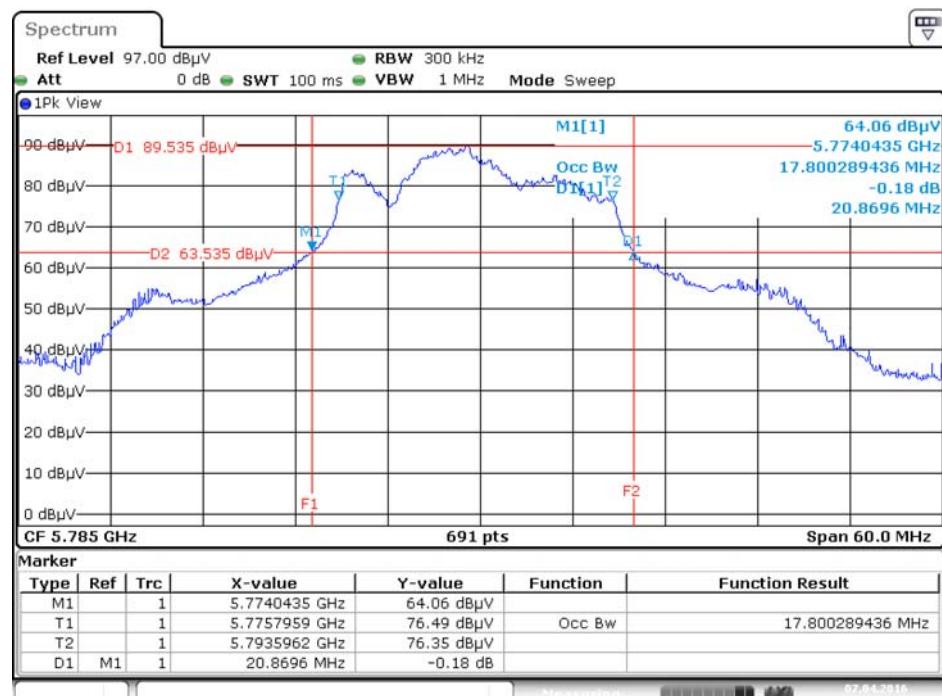


Date: 7.APR.2016 20:23:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 / 5825 MHz

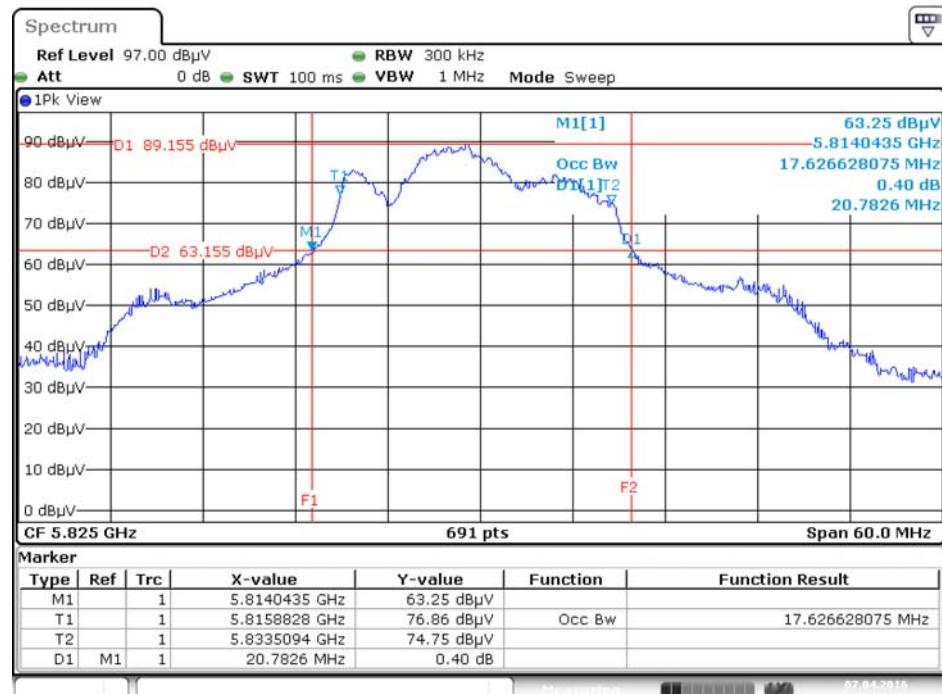


Date: 7.APR.2016 20:12:34

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 / 5755 MHz

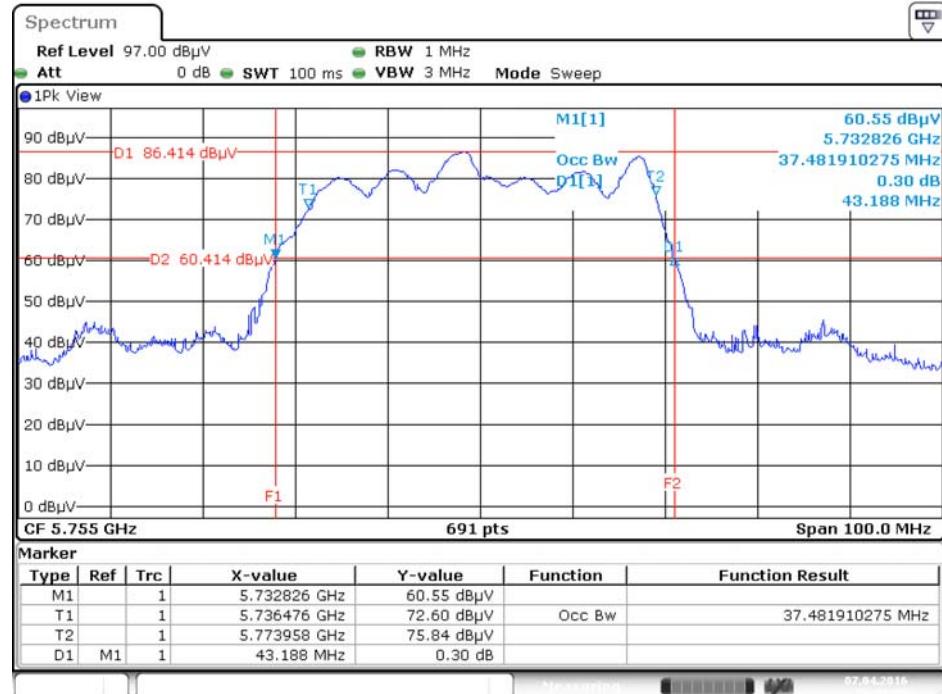

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 / 5795 MHz

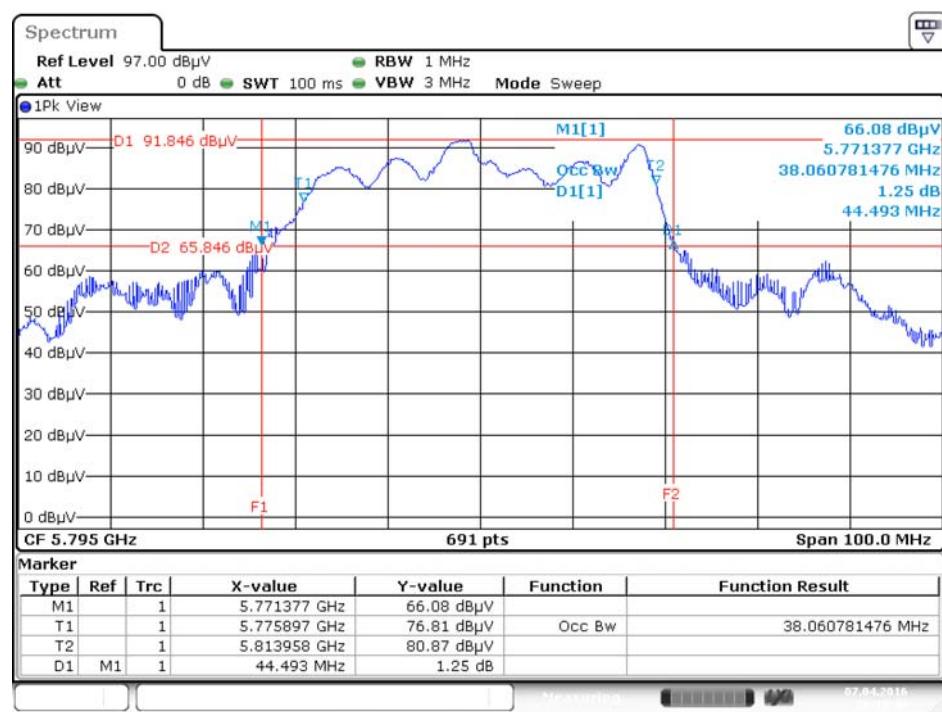

4.2. 6dB Spectrum Bandwidth Measurement

4.2.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.2.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 6dB Spectrum Bandwidth


Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11n MCS0 HT20	5745 MHz	9.04	500	Complies
	5785 MHz	13.39	500	Complies
	5825 MHz	8.70	500	Complies
802.11n MCS0 HT40	5755 MHz	34.55	500	Complies
	5795 MHz	34.44	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 / 5825 MHz

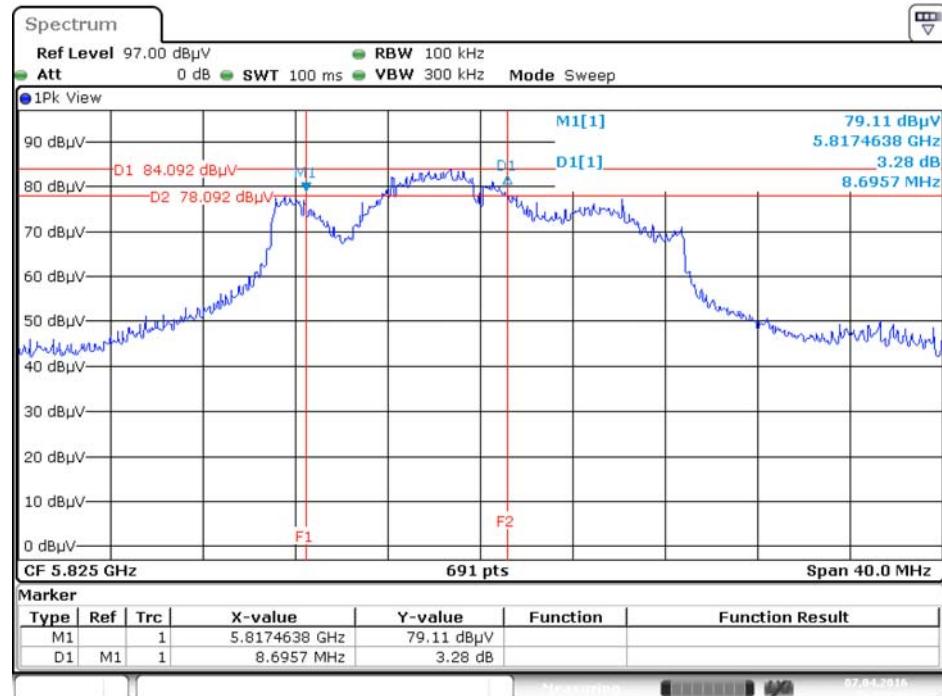

Date: 7.APR.2016 20:30:43

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 / 5795MHz

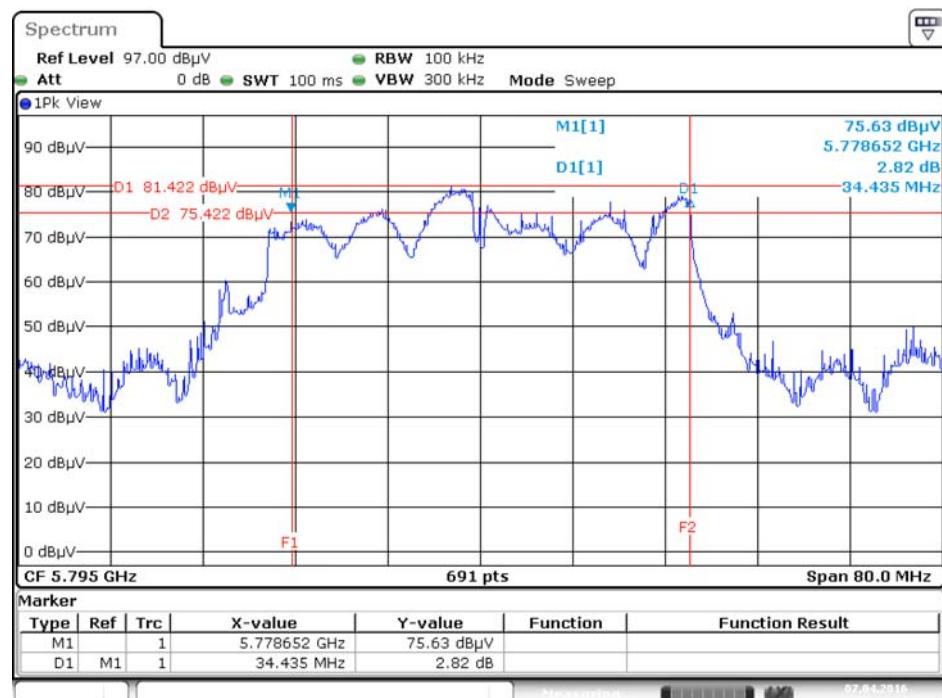

Date: 7.APR.2016 20:32:18

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

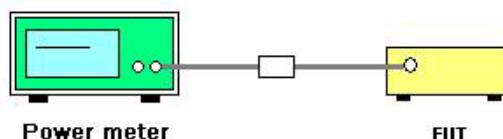

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu	Test Date	Apr. 07, 2016

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total		
802.11n MCS0 HT20	5745 MHz	20.18	20.01	20.48	20.02	26.20	30.00	Complies
	5785 MHz	20.13	20.34	20.52	20.09	26.29	30.00	Complies
	5825 MHz	20.03	20.17	20.08	20.00	26.09	30.00	Complies
802.11n MCS0 HT40	5755 MHz	14.53	14.51	15.18	14.31	20.67	30.00	Complies
	5795 MHz	20.01	20.08	20.42	20.08	26.17	30.00	Complies

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.725~5.85 GHz	30 dBm/500kHz

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements and sum the spectra across the outputs.
4. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should $\leq 30 \text{ dBm}$.

4.4.4. Test Setup Layout

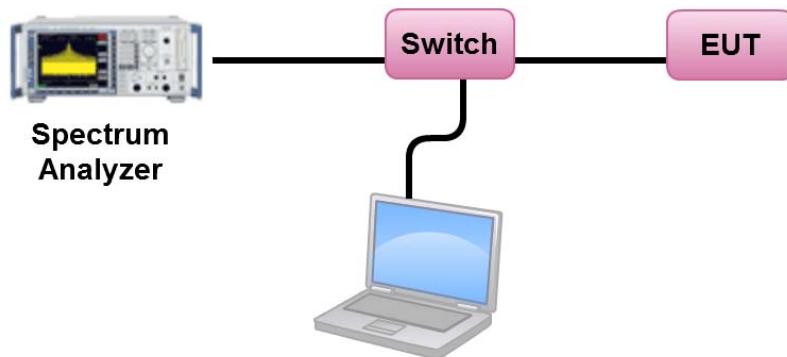

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu		

Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	12.83	-3.01	9.82	27.98	Complies
157	5785 MHz	12.92	-3.01	9.91	27.98	Complies
165	5825 MHz	12.58	-3.01	9.57	27.98	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.02 \text{dBi}$, so limit=30(8.02-6)=27.98 dBm/500kHz.

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	4.62	-3.01	1.61	27.98	Complies
159	5795 MHz	10.13	-3.01	7.12	27.98	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.02 \text{dBi}$, so limit=30(8.02-6)=27.98 dBm/500kHz.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 / 5785 MHz

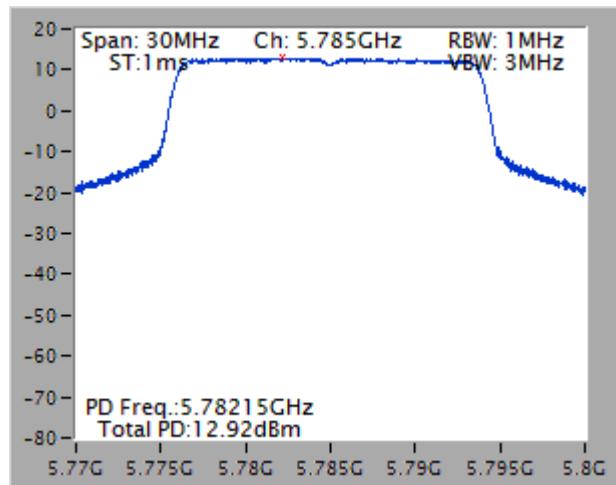

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 / 5795 MHz

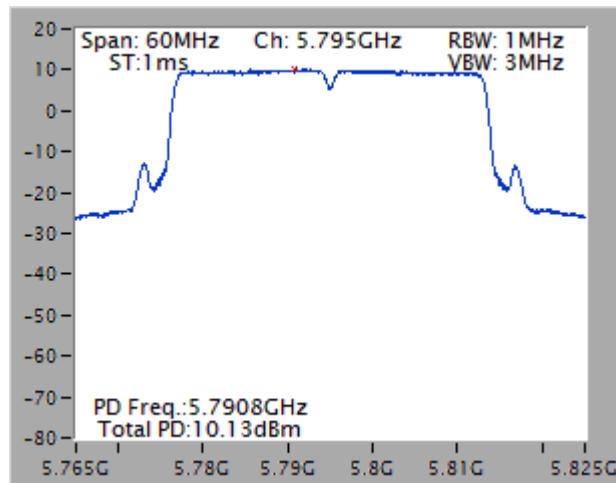

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

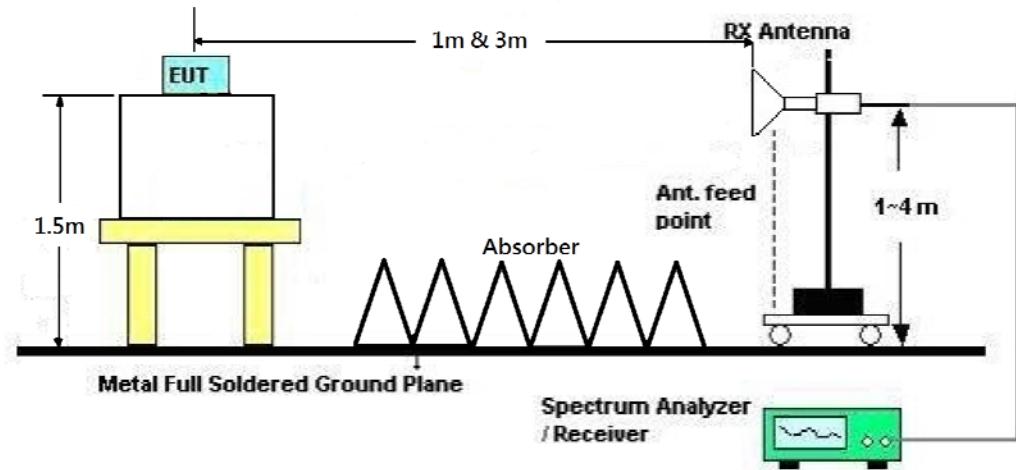

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results for Radiated Emissions (1GHz~40GHz)

Temperature	24°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 149 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4
Test Date	Mar. 04, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			cm	deg		
1	11489.28	44.01	54.00	-9.99	27.52	11.72	40.00	35.23	128	269	Average	HORIZONTAL	
2	11490.32	57.12	74.00	-16.88	40.63	11.72	40.00	35.23	128	269	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			cm	deg		
1	11489.44	44.28	54.00	-9.72	27.79	11.72	40.00	35.23	133	78	Average	VERTICAL	
2	11490.56	57.91	74.00	-16.09	41.42	11.72	40.00	35.23	133	78	Peak	VERTICAL	

Temperature	24°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 157 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4
Test Date	Mar. 04, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m	dB	cm		
1	11489.49	57.14	74.00	-16.86	40.65	11.72	40.00	35.23	153	326	Peak	HORIZONTAL
2	11490.16	44.11	54.00	-9.89	27.62	11.72	40.00	35.23	153	326	Average	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m	dB	cm		
1	11490.06	57.42	74.00	-16.58	40.93	11.72	40.00	35.23	152	265	Peak	VERTICAL
2	11490.13	44.06	54.00	-9.94	27.57	11.72	40.00	35.23	152	265	Average	VERTICAL

Temperature	24°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 165 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4
Test Date	Mar. 04, 2016		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11649.25	46.08	54.00	-7.92	29.79	11.78	39.73	35.22	172	257	Average	HORIZONTAL	
2	11649.26	60.95	74.00	-13.05	44.66	11.78	39.73	35.22	172	257	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11649.68	46.19	54.00	-7.81	29.90	11.78	39.73	35.22	169	230	Average	VERTICAL	
2	11650.17	59.46	74.00	-14.54	43.17	11.78	39.73	35.22	169	230	Peak	VERTICAL	

Temperature	24°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 151 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4
Test Date	Mar. 04, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	cm	deg	
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg			
1	11510.16	56.98	74.00	-17.02	40.49	11.72	40.00	35.23	176	286	Peak		HORIZONTAL
2	11510.53	44.54	54.00	-9.46	28.05	11.72	40.00	35.23	176	286	Average		HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	cm	deg	
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg			
1	11509.99	44.49	54.00	-9.51	28.00	11.72	40.00	35.23	165	162	Average		VERTICAL
2	11510.62	57.35	74.00	-16.65	40.86	11.72	40.00	35.23	165	162	Peak		VERTICAL

Temperature	24°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 159 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4
Test Date	Mar. 04, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	11589.14	58.78	74.00	-15.22	42.43	11.77	39.80	35.22	183	224	Peak		HORIZONTAL
2	11589.26	45.67	54.00	-8.33	29.32	11.77	39.80	35.22	183	224	Average		HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	11589.02	45.59	54.00	-8.41	29.24	11.77	39.80	35.22	172	275	Average		VERTICAL
2	11589.20	58.29	74.00	-15.71	41.94	11.77	39.80	35.22	172	275	Peak		VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for Peak

4.6.3. Test Procedures

The test procedure is the same as section 4.5.3.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 149, 157, 165 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4
Test Date	Mar. 04, 2016		

Channel 149

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	Line	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5711.40	52.98	54.00	-1.02	45.90	8.02	32.06	33.00	188	187	Average	VERTICAL	
2	5715.00	65.20	74.00	-8.80	58.12	8.02	32.06	33.00	188	187	Peak	VERTICAL	
3	5725.00	77.54	78.20	-0.66	70.42	8.04	32.08	33.00	188	187	Peak	VERTICAL	
4	5740.60	107.68			100.53	8.06	32.10	33.01	188	187	Average	VERTICAL	
5	5741.00	117.76			110.61	8.06	32.10	33.01	188	187	Peak	VERTICAL	

Item 4, 5 are the fundamental frequency at 5745 MHz.

Channel 157

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	Line	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5700.20	49.57	54.00	-4.43	42.52	8.01	32.04	33.00	168	189	Average	VERTICAL	
2	5709.00	61.14	74.00	-12.86	54.06	8.02	32.06	33.00	168	189	Peak	VERTICAL	
3	5718.60	61.16	78.20	-17.04	54.08	8.02	32.06	33.00	168	189	Peak	VERTICAL	
4	5781.00	117.91			110.70	8.10	32.14	33.03	168	189	Peak	VERTICAL	
5	5781.80	107.78			100.57	8.10	32.14	33.03	168	189	Average	VERTICAL	
6	5853.20	60.28	78.20	-17.92	52.93	8.18	32.22	33.05	168	189	Peak	VERTICAL	
7	5860.00	49.38	54.00	-4.62	42.01	8.19	32.24	33.06	168	189	Average	VERTICAL	
8	5863.60	61.50	74.00	-12.50	54.13	8.19	32.24	33.06	168	189	Peak	VERTICAL	

Item 4, 5 are the fundamental frequency at 5785 MHz.

Channel 165

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	Line	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5820.80	118.06			110.78	8.14	32.18	33.04	175	188	Peak	VERTICAL	
2	5821.80	108.18			100.91	8.14	32.18	33.05	175	188	Average	VERTICAL	
3	5850.00	70.84	78.20	-7.36	63.49	8.18	32.22	33.05	175	188	Peak	VERTICAL	
4	5860.00	64.73	74.00	-9.27	57.36	8.19	32.24	33.06	175	188	Peak	VERTICAL	
5	5861.20	53.48	54.00	-0.52	46.11	8.19	32.24	33.06	175	188	Average	VERTICAL	

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	24°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 151, 159 / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4
Test Date	Mar. 04, 2016		

Channel 151

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB			dB	cm	deg	
1	5712.20	67.99	68.20	-0.21	60.91	8.02	32.06	33.00	178	186	Peak	VERTICAL	
2	5718.60	67.44	78.20	-10.76	60.36	8.02	32.06	33.00	178	186	Peak	VERTICAL	
3	5751.00	99.96			92.82	8.06	32.10	33.02	178	186	Average	VERTICAL	
4	5751.80	110.05			102.91	8.06	32.10	33.02	178	186	Peak	VERTICAL	

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB			dB	cm	deg	
1	5707.00	60.25	68.20	-7.95	53.17	8.02	32.06	33.00	175	183	Peak	VERTICAL	
2	5724.60	60.59	78.20	-17.61	53.47	8.04	32.08	33.00	175	183	Peak	VERTICAL	
3	5790.60	104.00			96.75	8.12	32.16	33.03	175	183	Average	VERTICAL	
4	5791.40	112.98			105.73	8.12	32.16	33.03	175	183	Peak	VERTICAL	
5	5850.00	67.62	78.20	-10.58	60.27	8.18	32.22	33.05	175	183	Peak	VERTICAL	
6	5872.20	63.46	68.20	-4.74	56.09	8.19	32.24	33.06	175	183	Peak	VERTICAL	

Item 3, 4 are the fundamental frequency at 5795 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c-f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.7.4. Test Setup Layout

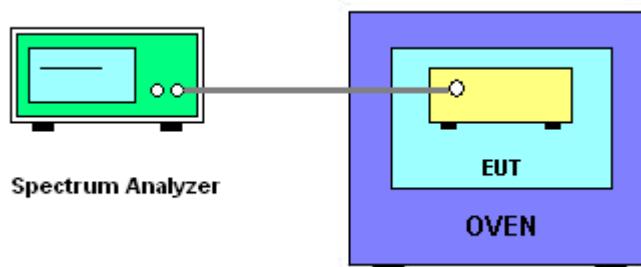

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	21°C	Humidity	60%
Test Engineer	Peter Wu	Test Date	Apr. 07, 2016

Mode: 20 MHz / Ant. 1

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5784.9926	5784.9918	5784.9917	5784.9911
110.00	5784.9922	5784.9912	5784.9902	5784.9893
93.50	5784.9916	5784.9910	5784.9900	5784.9897
Max. Deviation (MHz)	0.0084	0.0090	0.0100	0.0107
Max. Deviation (ppm)	1.45	1.56	1.73	1.85
Result	Complies			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5785.0053	5785.0039	5785.0021	5784.9998
-20	5785.0037	5785.0024	5785.0007	5784.9983
-10	5785.0022	5785.0010	5784.9994	5784.9975
0	5785.0008	5784.9996	5784.9977	5784.9955
10	5784.9995	5784.9982	5784.9967	5784.9949
20	5784.9983	5784.9970	5784.9954	5784.9935
30	5784.9969	5784.9958	5784.9944	5784.9928
40	5784.9953	5784.9938	5784.9922	5784.9902
50	5784.9936	5784.9924	5784.9909	5784.9882
Max. Deviation (MHz)	0.0064	0.0076	0.0091	0.0118
Max. Deviation (ppm)	1.11	1.31	1.57	2.04
Result	Complies			

Mode: 40 MHz / Ant. 1
Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5754.9975	5754.9967	5754.9964	5754.9954
110.00	5754.9974	5754.9966	5754.9961	5754.9959
93.50	5754.9968	5754.9958	5754.9949	5754.9946
Max. Deviation (MHz)	0.0032	0.0042	0.0051	0.0054
Max. Deviation (ppm)	0.56	0.73	0.89	0.94
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5755.0060	5755.0046	5755.0028	5755.0005
-20	5755.0044	5755.0031	5755.0014	5754.9990
-10	5755.0029	5755.0017	5755.0001	5754.9982
0	5755.0015	5755.0003	5754.9984	5754.9962
10	5755.0002	5754.9989	5754.9974	5754.9956
20	5754.9990	5754.9977	5754.9961	5754.9942
30	5754.9976	5754.9965	5754.9951	5754.9935
40	5754.9960	5754.9945	5754.9929	5754.9909
50	5754.9943	5754.9931	5754.9916	5754.9889
Max. Deviation (MHz)	0.0060	0.0069	0.0084	0.0111
Max. Deviation (ppm)	1.04	1.20	1.46	1.93
Result	Complies			

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%