


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	2.4G + 5G TX

Horizontal

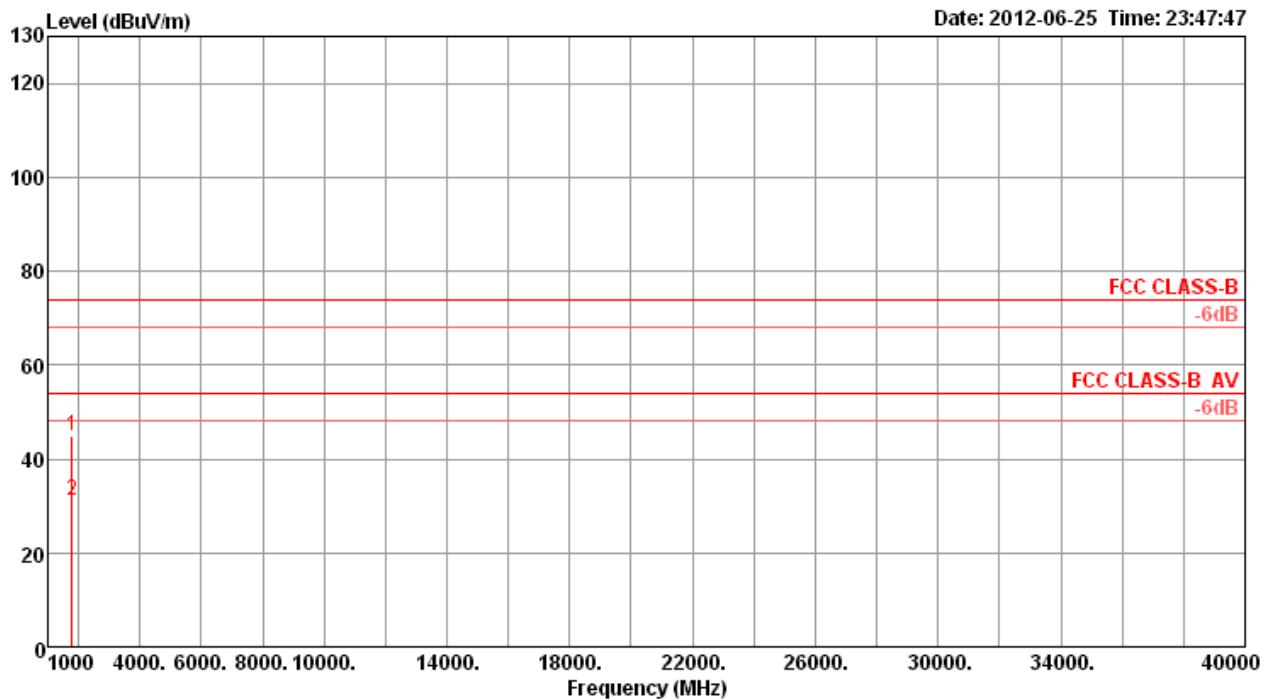

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
1	1796.76	44.83	74.00	-29.17	49.45	3.80	26.48	34.90 Peak	100	319	HORIZONTAL
2	1796.82	31.18	54.00	-22.82	35.80	3.80	26.48	34.90 Average	100	319	HORIZONTAL

Vertial

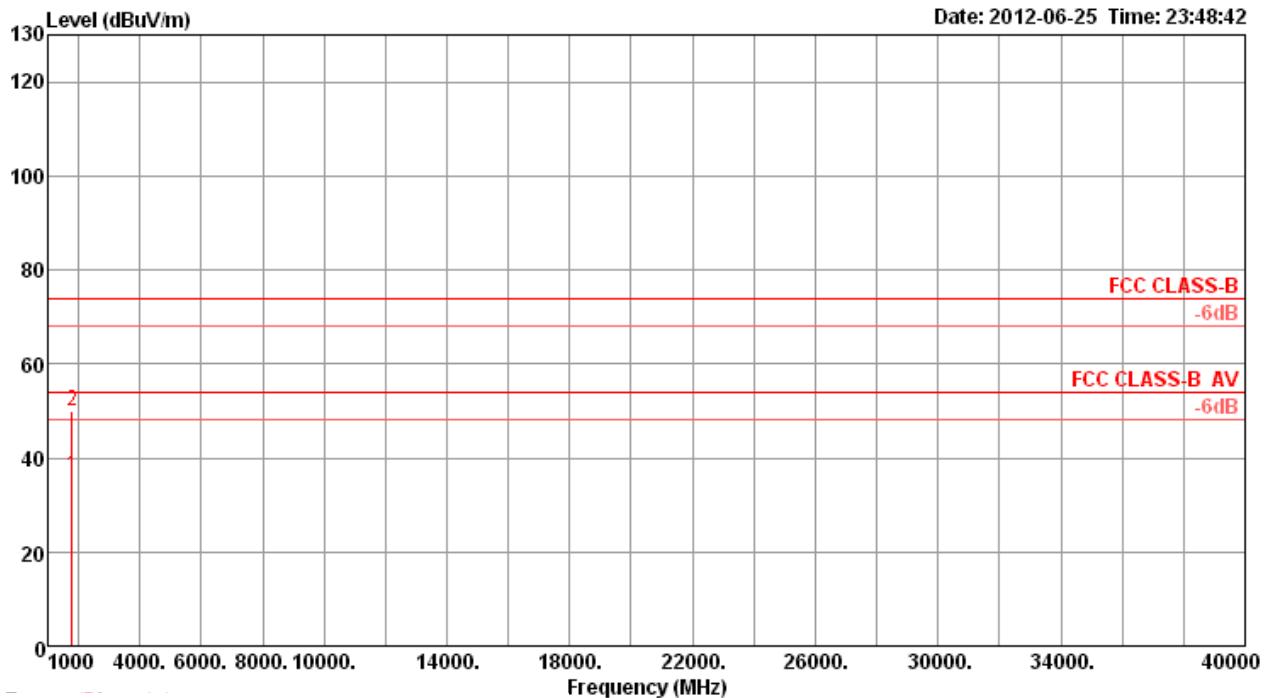

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	1799.77	36.23	54.00	-17.77	40.85	3.80	26.48	34.90	Average		100	131	VERTICAL
2	1800.03	50.07	74.00	-23.93	54.69	3.80	26.48	34.90	Peak		100	131	VERTICAL