



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	<b>CyberTAN Technology Inc.</b>
Applicant Address	99 Park Avenue III, Hsinchu Science Park Hsinchu 308, Taiwan.
FCC ID	<b>N89-WE301A1</b>
Manufacturer's company	<b>Western Digital Technologies, Inc.</b>
Manufacturer Address	3355 Michelson Drive, Suite 100 Irvine, CA92612

Product Name	MY NET AC WIFI BRIDGE
Brand Name	WD
Model Name	I2F
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Jun. 13, 2012
Final Test Date	Sep. 28, 2012
Submission Type	Original Equipment
Operating Mode	Master



### Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart E** and **KDB 789033 - 20120305**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	6
3.3. Table for Filed Antenna.....	7
3.4. Table for Carrier Frequencies .....	8
3.5. Table for Test Modes.....	9
3.6. Table for Testing Locations.....	10
3.7. Table for Supporting Units .....	10
3.8. Table for Parameters of Test Software Setting .....	11
3.9. Test Configurations .....	12
<b>4. TEST RESULT .....</b>	<b>15</b>
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 99% Occupied Bandwidth Measurement .....	20
4.3. Maximum Conducted Output Power Measurement.....	28
4.4. Power Spectral Density Measurement .....	42
4.5. Peak Excursion Measurement .....	48
4.6. Radiated Emissions Measurement .....	53
4.7. Band Edge Emissions Measurement .....	73
4.8. Frequency Stability Measurement .....	81
4.9. Antenna Requirements .....	83
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>84</b>
<b>6. TEST LOCATION.....</b>	<b>86</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>87</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A5</b>
<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>B1 ~ B3</b>



## History of This Test Report



## 1. CERTIFICATE OF COMPLIANCE

**Product Name :** MY NET AC WIFI BRIDGE  
**Brand Name :** WD  
**Model Name :** I2F  
**Applicant :** CyberTAN Technology Inc.  
**Test Rule Part(s) :** 47 CFR FCC Part 15 Subpart E § 15.407

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 13, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jordan Hsiao  
Jordan Hsiao

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	4.48 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.59 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.65 dB
4.5	15.407(a)	Peak Excursion	Complies	3.61 dB
4.6	15.407(b)	Radiated Emissions	Complies	4.14 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.60 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	$\pm 8.5 \times 10^{-8}$	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n see the below table for IEEE 802.11ac
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11n OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) For 802.11ac
Data Rate (Mbps)	see the below table for IEEE 802.11n see the below table for IEEE 802.11ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	11n MCS0 (HT 20MHz): 17.92 MHz ; 11n MCS0 (HT40 MHz): 36.48 MHz; 11ac MCS0 (VHT 80MHz): 76.16 MHz
Conducted Output Power	11n MCS0 (HT20 MHz): 15.25 dBm ; 11n MCS0 (HT40 MHz): 16.41dBm; 11ac MCS0 (VHT 20MHz): 15.45 dBm; 11ac MCS0 (VHT 40MHz): 16.37 dBm; 11ac MCS0 (VHT 80MHz): 16.16 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**IEEE 802.11a**

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	11a: 4
Channel Band Width (99%)	11a: 16.96 MHz
Conducted Output Power	11a: 13.37 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Three (TX)		
Band width Mode	20 MHz	40 MHz	80MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

**IEEE 802.11n spec**

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

**IEEE 802.11a, 11n and 11ac Spec.**

Worst Modulation Used for Conformance Testing				
IEEE 802.11 Protocol	Number of Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS	Worst Data Rate / MCS	Worst Modulation Mode
a	3	6-54 Mbps	6Mbps	11A5.2G-20M
n (HT20)	3	MCS 0-15	MCS 0	11N5.2G-20M
n (HT40)	3	MCS 0-15	MCS 0	11N5.2G-40M
ac (VHT20)	3	MCS 0-9	MCS 0-Nss1	11AC5.2G-20M
ac (VHT40)	3	MCS 0-9	MCS 0-Nss1	11AC5.2G-40M
ac (VHT80)	3	MCS 0-9	MCS 0-Nss1	11AC5.2G-80M

Note 1: IEEE Std. 802.11-2007 modulation consists of IEEE Std. 802.11a-1999.

Note 2: IEEE Std. 802.11n-2009 modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 400ns.

Note 3: draft IEEE Std. 802.11ac-2012 modulation consists of VHT20, VHT40, VHT80 and VHT160. Then EUT support VHT80. (VHT: Very High Throughput).

### 3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	Ktec	KSAS0241200150HU	INPUT: 100-240V ~ 50-60Hz, 0.6A OUTPUT: 12.0V – 1.5A
Adapter 2	APD	WA-18Q12FU	INPUT: 100-240V ~ 50-60Hz, 0.5A OUTPUT: 12.0V – 1.5A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	WHA YU	N/A	PIFA Antenna	I-pex	4.5	TX / RX Ant.
2	WHA YU	N/A	PIFA Antenna	I-pex	4.5	TX / RX Ant.
3	WHA YU	N/A	PIFA Antenna	I-pex	4.5	TX / RX Ant.


Note: The EUT has three antennas

**For IEEE 802.11n mode (3TX/3RX):**

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

**For IEEE 802.11a/ac mode (3TX/3RX):**

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

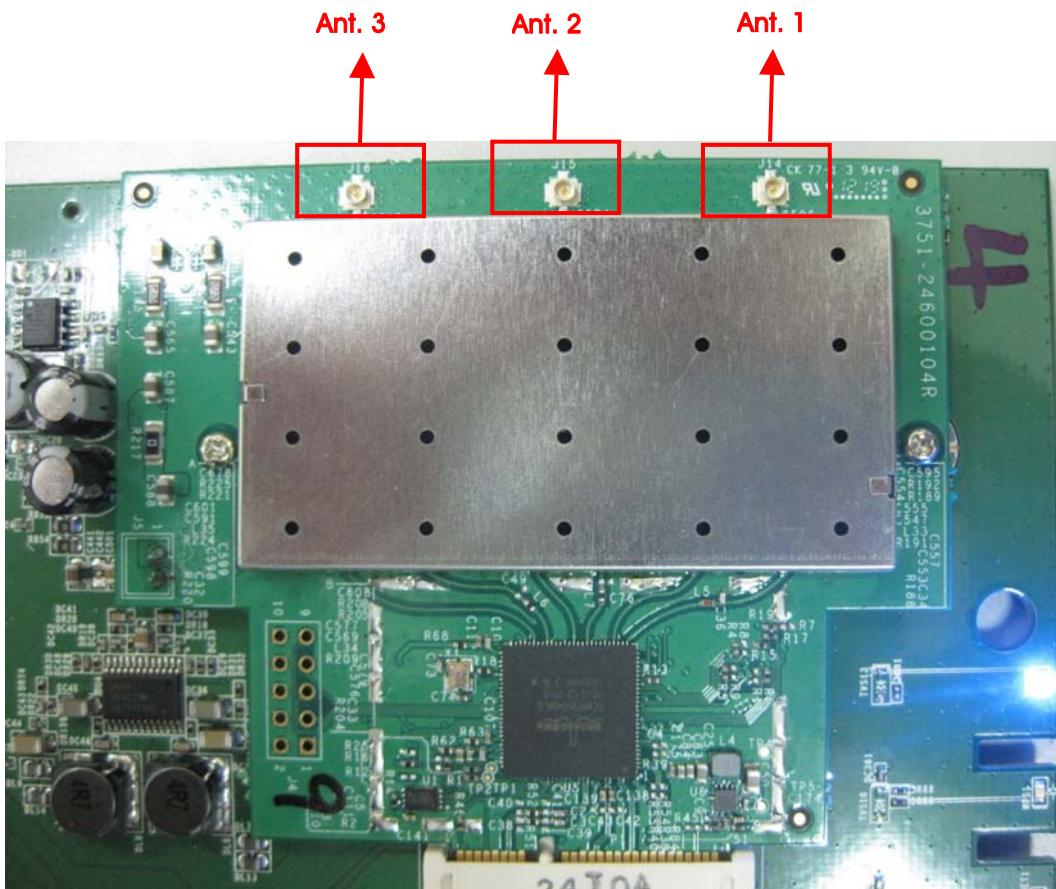

### 3.4. Table for Carrier Frequencies

The EUT has three bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal		Auto	-	-
Max. Conducted Output Power	11n 20MHz	Band 1	6.5Mbps	36/40/48	1/2/3/1+2+3
	11n 40MHz	Band 1	13.5Mbps	38/46	1/2/3/1+2+3
	11ac 20MHz	Band 1	NSS1	36/40/48	1/2/3/1+2+3
	11ac 40MHz	Band 1	NSS1	38/46	1/2/3/1+2+3
	11ac 80MHz	Band 1	NSS1	42	1/2/3/1+2+3
	11a	Band 1	6Mbps	36/40/48	1/2/3/1+2+3
Power Spectral Density	11n 20MHz	Band 1	6.5Mbps	36/40/48	1/2/3/1+2+3
	11n 40MHz	Band 1	13.5Mbps	38/46	1/2/3/1+2+3
	11ac 20MHz	Band 1	NSS1	36/40/48	1/2/3/1+2+3
	11ac 40MHz	Band 1	NSS1	38/46	1/2/3/1+2+3
	11ac 80MHz	Band 1	NSS1	42	1/2/3/1+2+3
	11a	Band 1	6Mbps	36/40/48	1/2/3/1+2+3
26dB Spectrum Bandwidth	11n 20MHz	Band 1	6.5Mbps	36/40/48	1+2+3
99% Occupied Bandwidth	11n 40MHz	Band 1	13.5Mbps	38/46	1+2+3
Measurement	11ac 80MHz	Band 1	NSS1	42	1+2+3
Peak Excursion	11a	Band 1	6Mbps	36/40/48	1+2+3
Radiated Emission Below 1GHz	Normal		Auto	-	-
Radiated Emission Above 1GHz	11n 20MHz	Band 1	6.5Mbps	36/40/48	1+2+3
	11n 40MHz	Band 1	13.5Mbps	38/46	1+2+3
	11ac 20MHz	Band 1	NSS1	36/40/48	1+2+3
	11ac 40MHz	Band 1	NSS1	38/46	1+2+3
	11ac 80MHz	Band 1	NSS1	42	1+2+3
	11a	Band 1	6Mbps	36/40/48	1+2+3
Band Edge Emission	11n 20MHz	Band 1	6.5Mbps	36/40/48	1+2+3
	11n 40MHz	Band 1	13.5Mbps	38/46	1+2+3
	11ac 20MHz	Band 1	NSS1	36/40/48	1+2+3
	11ac 40MHz	Band 1	NSS1	38/46	1+2+3
	11ac 80MHz	Band 1	NSS1	42	1+2+3
	11a	Band 1	6Mbps	36/40/48	1+2+3
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1: EUT+Adapter1(Ktec KSAS0241200150HU)

Mode 2: EUT+Adapter2(APD WA-18Q12FU)

Mode 2 generated the worst case, so it was selected to perform test and its test result was written in the report.

**For Radiated Emission test:**

Mode 1: EUT+Adapter1(Ktec KSAS0241200150HU)

Mode 2: EUT+Adapter2(APD WA-18Q12FU)

**For 30MHz~1GHz:**

Mode 1 generated the worst case, so it was selected to perform test and its test result was written in the report.

**For above1 GHz:**

All the results have been recorded in this report.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	D400	QDS-BRCM1005-D
Notebook	DELL	D520	E2KWM3945ABG

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11n MCS0 HT20MHz

Test Software Version	Manual Tool Version 1.0.0.9 & DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 20MHz	46.00	45.00	45.00

#### Power Parameters of IEEE 802.11n MCS0 HT40MHz

Test Software Version	Manual Tool Version 1.0.0.9 & DOS		
Frequency	5190 MHz	5230 MHz	
MCS0 40MHz	48.00	48.00	

#### Power Parameters of IEEE 802.11a

Test Software Version	Manual Tool Version 1.0.0.9 & DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
11a	37.00	36.00	36.00

#### Power Parameters of IEEE 802.11ac MCS0 VHT 20MHz

Test Software Version	Manual Tool Version 1.0.0.9 & DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 NSS1 20MHz	46.00	45.00	45.00

#### Power Parameters of IEEE 802.11ac MCS0 VHT 40MHz

Test Software Version	Manual Tool Version 1.0.0.9 & DOS		
Frequency	5190 MHz	5230 MHz	
MCS0 NSS1 40MHz	48.00	48.00	

#### Power Parameters of IEEE 802.11ac MCS0 VHT 80MHz


Test Software Version	Manual Tool Version 1.0.0.9 & DOS		
Frequency	5210 MHz		
MCS0 NSS1 80MHz	48.00		

During the test, "Manual Tool Version 1.0.0.9 & DOS" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

### 3.9. Test Configurations


#### 3.9.1. Radiation Emissions Test Configuration

For 30MHz~1GHz:

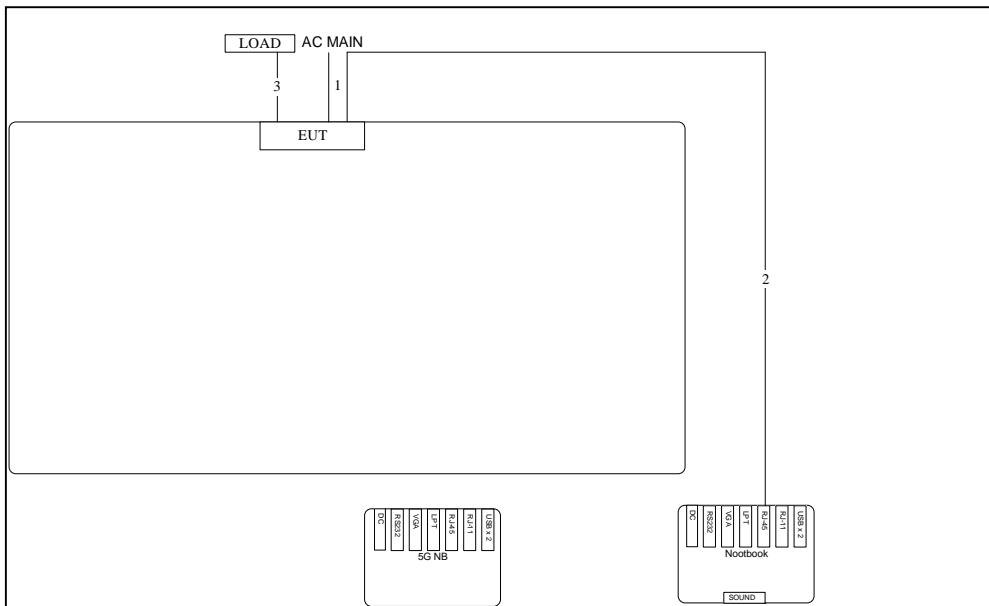


Item	Connection	Shield	Length
1	Power cable	No	1.8M
2	RJ-45 cable	No	10M
3	RJ-45 cable*3	No	1.5M

For above 1 GHz:

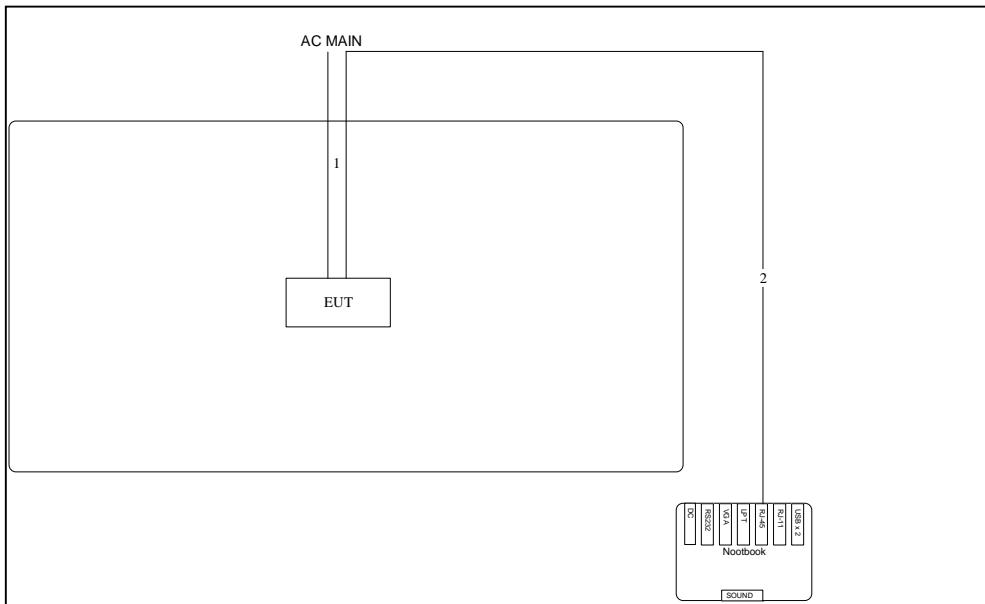

Item	Connection	Shield	Length
1	Power cable	No	1.8M
2	RJ-45 cable	No	10M

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

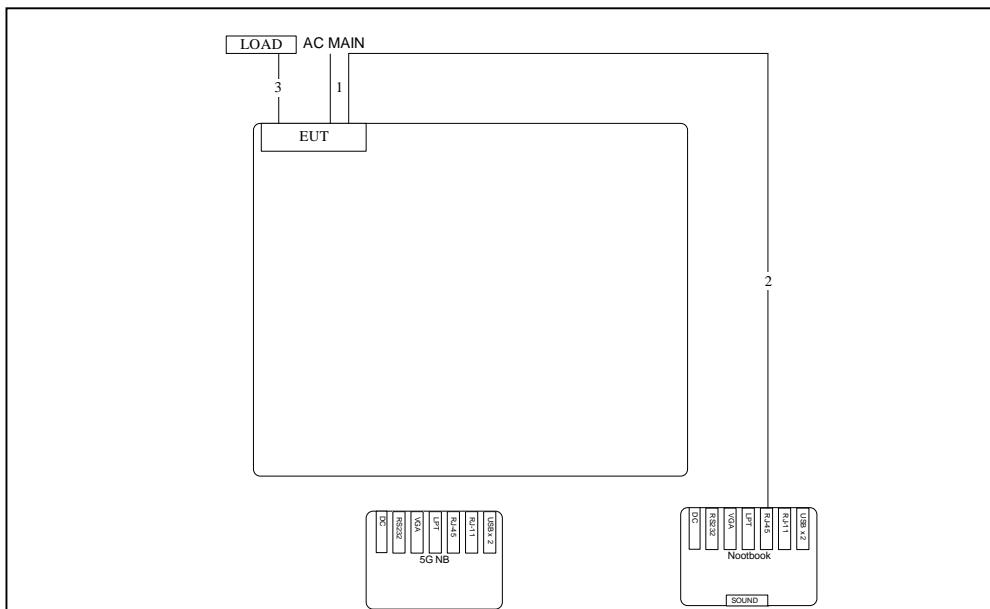

Item	Connection	Shield	Length
1	Power cable	No	1.85M
2	RJ-45 cable	No	10M
3	RJ-45 cable*3	No	1.5M

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

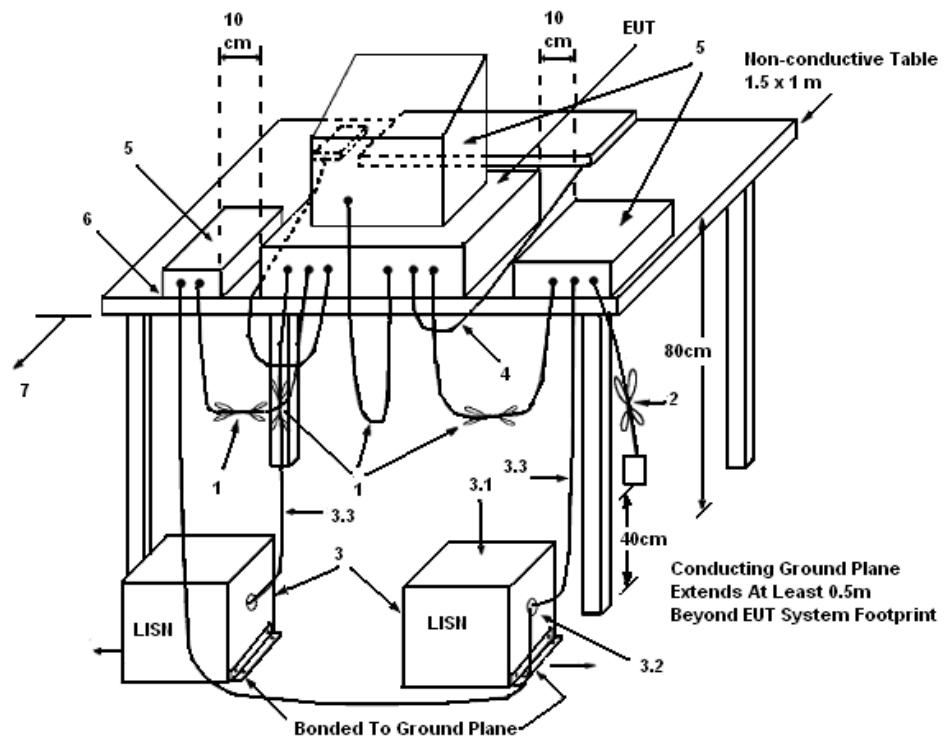

**LEGEND:**

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation

There is no deviation with the original standard.


#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement


## Test Mode: Mode 2

Temperature	22°C	Humidity	57%
Test Engineer	Kane Liu	Phase	Line
Configuration	Normal Link		

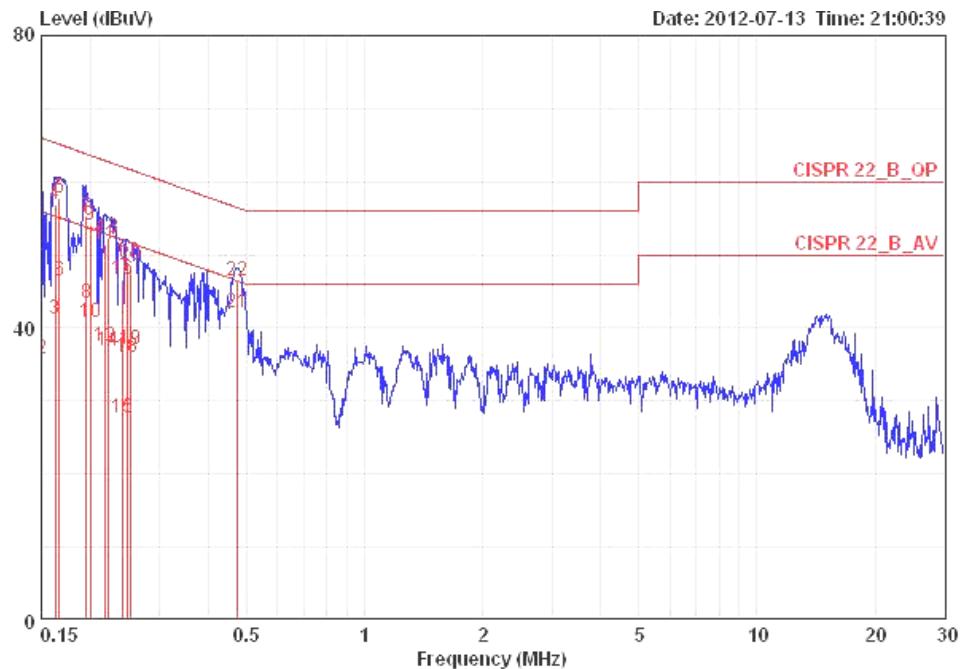

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
			Limit	Line	Level	Factor	Loss	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15000	56.93	-9.07	66.00	56.57	0.16	0.20	LINE
2	0.15000	35.81	-20.19	56.00	35.45	0.16	0.20	LINE
3	0.16241	41.16	-14.18	55.34	40.80	0.16	0.20	LINE
4	0.16241	56.99	-8.35	65.34	56.63	0.16	0.20	LINE
5	0.16677	57.80	-7.32	65.12	57.44	0.16	0.20	LINE
6	0.16677	46.47	-8.65	55.12	46.11	0.16	0.20	LINE
7	0.19550	55.11	-8.69	63.80	54.76	0.15	0.20	LINE
8	0.19550	43.29	-10.51	53.80	42.94	0.15	0.20	LINE
9	0.19969	54.05	-9.57	63.62	53.70	0.15	0.20	LINE
10	0.19969	40.72	-12.90	53.62	40.37	0.15	0.20	LINE
11	0.21735	51.55	-11.37	62.92	51.20	0.15	0.20	LINE
12	0.21735	37.39	-15.53	52.92	37.04	0.15	0.20	LINE
13	0.22201	52.42	-10.32	62.74	52.07	0.15	0.20	LINE
14	0.22201	36.81	-15.93	52.74	36.46	0.15	0.20	LINE
15	0.24165	27.66	-24.38	52.04	27.31	0.15	0.20	LINE
16	0.24165	46.59	-15.45	62.04	46.24	0.15	0.20	LINE
17	0.24814	49.03	-12.79	61.82	48.68	0.15	0.20	LINE
18	0.24814	35.98	-15.84	51.82	35.63	0.15	0.20	LINE
19	0.25345	37.14	-14.50	51.64	36.79	0.15	0.20	LINE
20	0.25345	48.64	-13.00	61.64	48.29	0.15	0.20	LINE
21	0.47360	41.97	-4.48	46.45	41.65	0.15	0.17	LINE
22	0.47360	46.45	-10.00	56.45	46.13	0.15	0.17	LINE

<b>Temperature</b>	22°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Kane Liu	<b>Phase</b>	Neutral
<b>Configuration</b>	Normal Link		

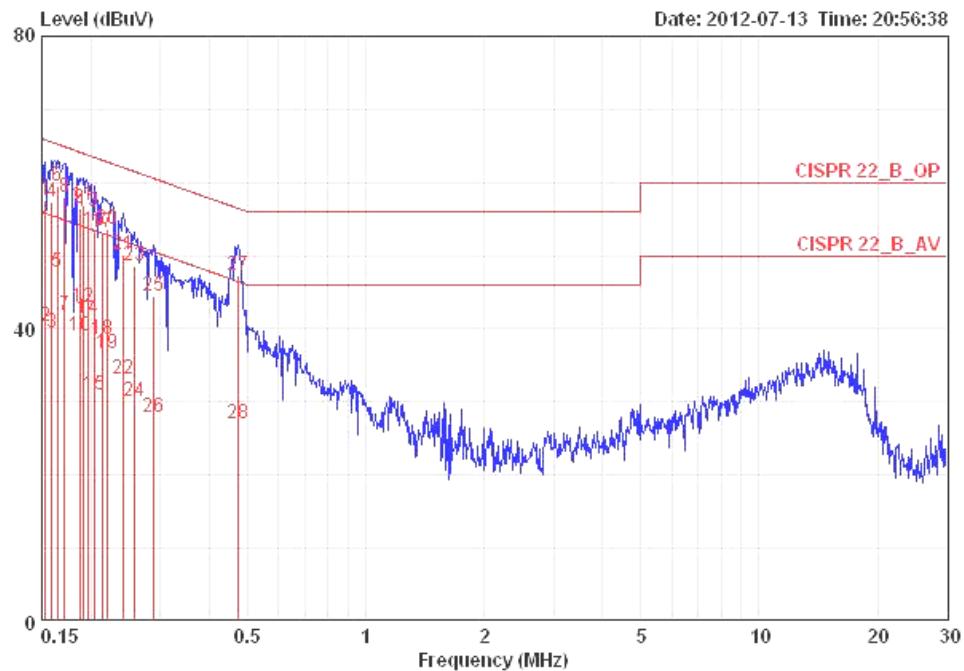

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
			Limit	Line	Level	Factor	Loss	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15321	57.50	-8.32	65.82	57.22	0.08	0.20	NEUTRAL QP
2	0.15321	40.40	-15.42	55.82	40.12	0.08	0.20	NEUTRAL AVERAGE
3	0.15900	39.56	-15.96	55.52	39.28	0.08	0.20	NEUTRAL AVERAGE
4	0.15900	57.25	-8.27	65.52	56.97	0.08	0.20	NEUTRAL QP
5	0.16414	47.78	-7.47	55.25	47.50	0.08	0.20	NEUTRAL AVERAGE
6	0.16414	59.58	-5.67	65.25	59.30	0.08	0.20	NEUTRAL QP
7	0.17125	41.79	-13.11	54.90	41.51	0.08	0.20	NEUTRAL AVERAGE
8	0.17125	57.98	-6.92	64.90	57.70	0.08	0.20	NEUTRAL QP
9	0.18739	56.39	-7.76	64.15	56.11	0.08	0.20	NEUTRAL QP
10	0.18739	38.96	-15.19	54.15	38.68	0.08	0.20	NEUTRAL AVERAGE
11	0.19140	56.87	-7.11	63.98	56.59	0.08	0.20	NEUTRAL QP
12	0.19140	42.96	-11.02	53.98	42.68	0.08	0.20	NEUTRAL AVERAGE
13	0.19758	56.03	-7.68	63.71	55.75	0.08	0.20	NEUTRAL QP
14	0.19758	41.48	-12.23	53.71	41.20	0.08	0.20	NEUTRAL AVERAGE
15	0.20505	30.85	-22.55	53.40	30.57	0.08	0.20	NEUTRAL AVERAGE
16	0.20505	53.43	-9.97	63.40	53.15	0.08	0.20	NEUTRAL QP
17	0.21392	53.15	-9.90	63.05	52.87	0.08	0.20	NEUTRAL QP
18	0.21392	38.59	-14.46	53.05	38.31	0.08	0.20	NEUTRAL AVERAGE
19	0.21967	36.55	-16.28	52.83	36.27	0.08	0.20	NEUTRAL AVERAGE
20	0.21967	53.53	-9.30	62.83	53.25	0.08	0.20	NEUTRAL QP
21	0.24165	50.07	-11.97	62.04	49.79	0.08	0.20	NEUTRAL QP
22	0.24165	33.17	-18.87	52.04	32.89	0.08	0.20	NEUTRAL AVERAGE
23	0.25751	48.69	-12.82	61.51	48.41	0.08	0.20	NEUTRAL QP
24	0.25751	30.19	-21.32	51.51	29.91	0.08	0.20	NEUTRAL AVERAGE
25	0.28782	44.48	-16.11	60.59	44.20	0.08	0.20	NEUTRAL QP

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
		Line	dBuV	Level	Factor	Loss		
MHz	dBuV	dB	dBuV	dBuV	dB	dB		
26	<b>0.28782</b>	<b>28.01</b>	<b>-22.58</b>	<b>50.59</b>	<b>27.73</b>	<b>0.08</b>	<b>0.20</b>	NEUTRAL
27	<b>0.47360</b>	<b>47.25</b>	<b>-9.20</b>	<b>56.45</b>	<b>47.00</b>	<b>0.08</b>	<b>0.17</b>	NEUTRAL
28	<b>0.47360</b>	<b>27.10</b>	<b>-19.35</b>	<b>46.45</b>	<b>26.85</b>	<b>0.08</b>	<b>0.17</b>	NEUTRAL
								AVERAGE
								QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

### 4.2.4. Test Setup Layout

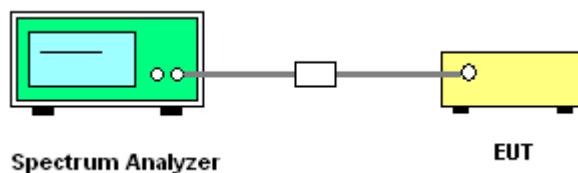

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	25°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n / ac

##### Configuration IEEE 802.11n MCS0 HT 20MHz / Ant. 1 + Ant. 2+ Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.32	17.92
40	5200 MHz	20.16	17.92
48	5240 MHz	20.32	17.92

##### Configuration IEEE 802.11n MCS0 HT 40MHz / Ant. 1 + Ant. 2+ Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.36	36.48
46	5230 MHz	38.72	36.16

##### Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 1 + Ant. 2+ Ant. 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	78.72	76.16

<b>Temperature</b>	25°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Benson Peng	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**


<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
36	5180 MHz	19.52	16.96
40	5200 MHz	19.68	16.96
48	5240 MHz	19.36	16.96

### 26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT 20MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

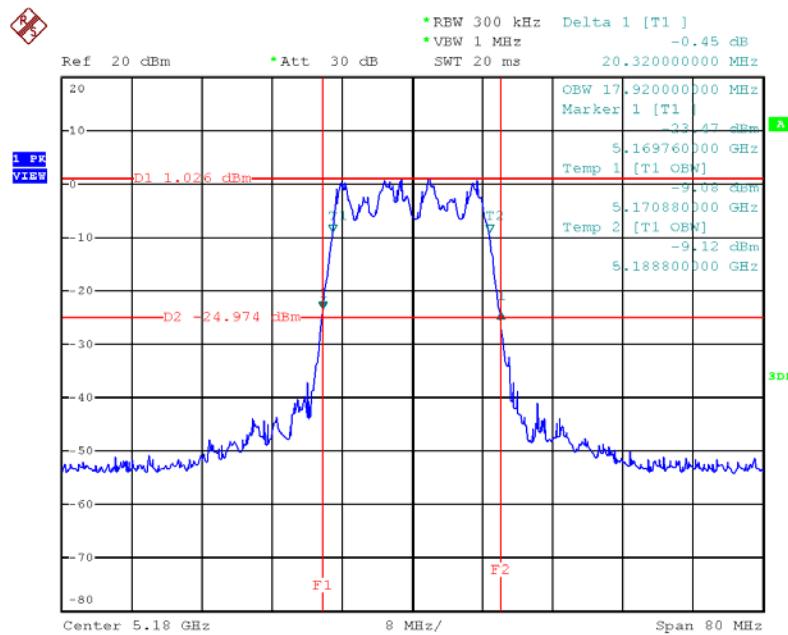


Date: 7.JUL.2012 02:29:20

### 26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT 20MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz

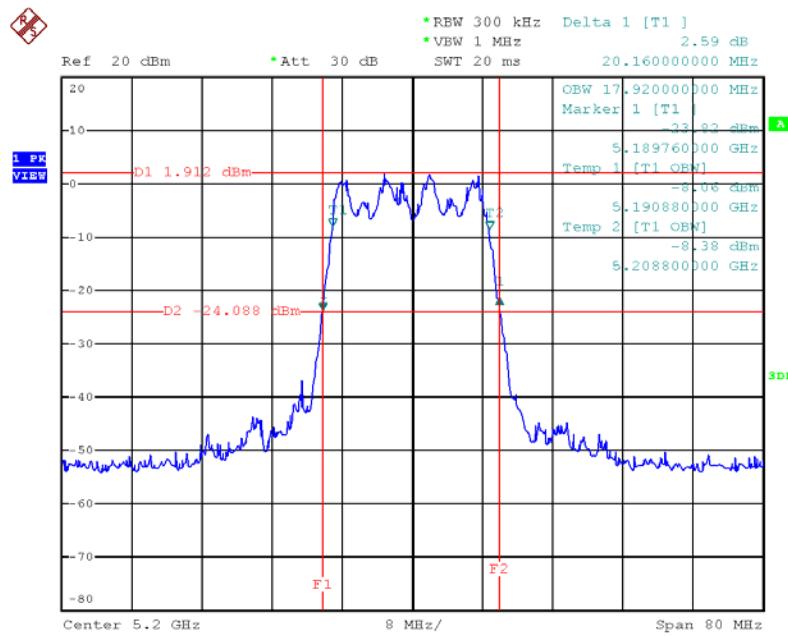


Date: 7.JUL.2012 02:28:22

### 26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT 20MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz

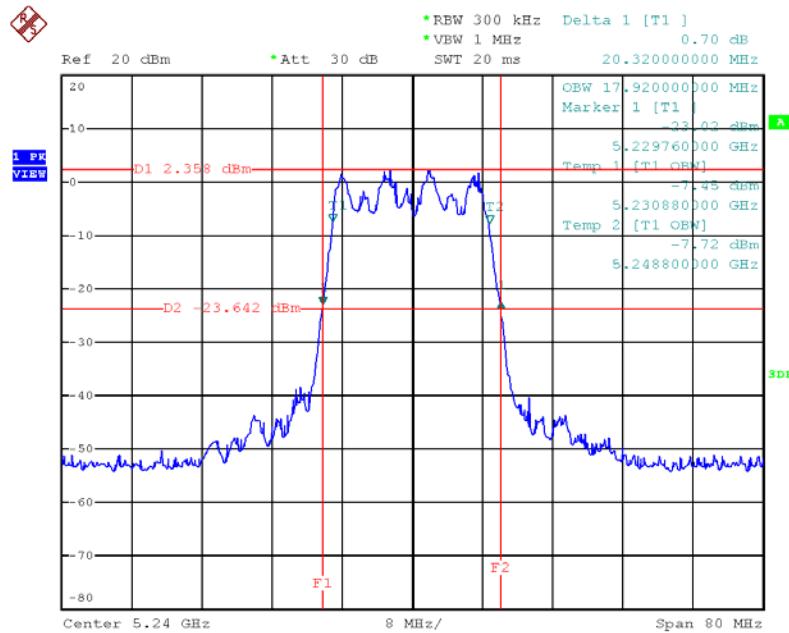


Date: 7.JUL.2012 02:30:10


### 26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT 40MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5190 MHz

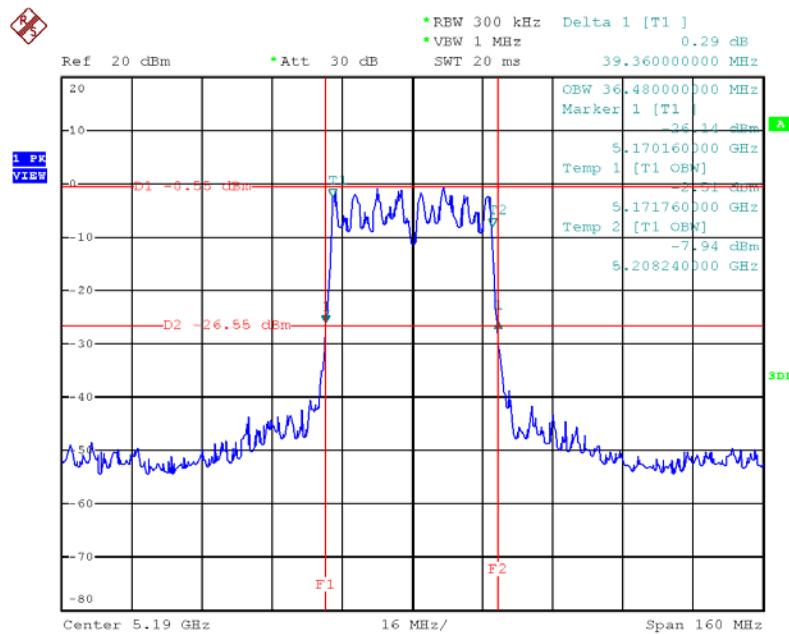

Date: 7.JUL.2012 02:31:15

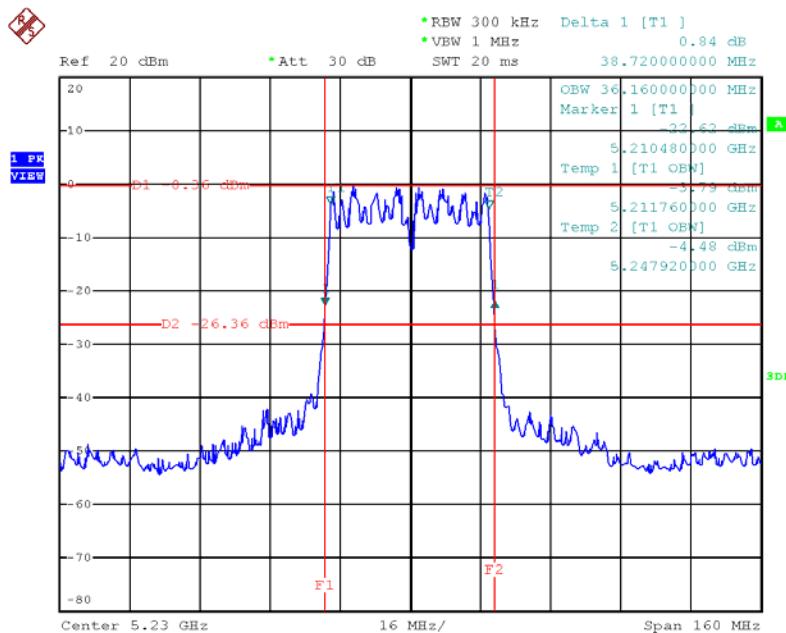
**26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT 40MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5230 MHz**


Date: 7.JUL.2012 02:32:09

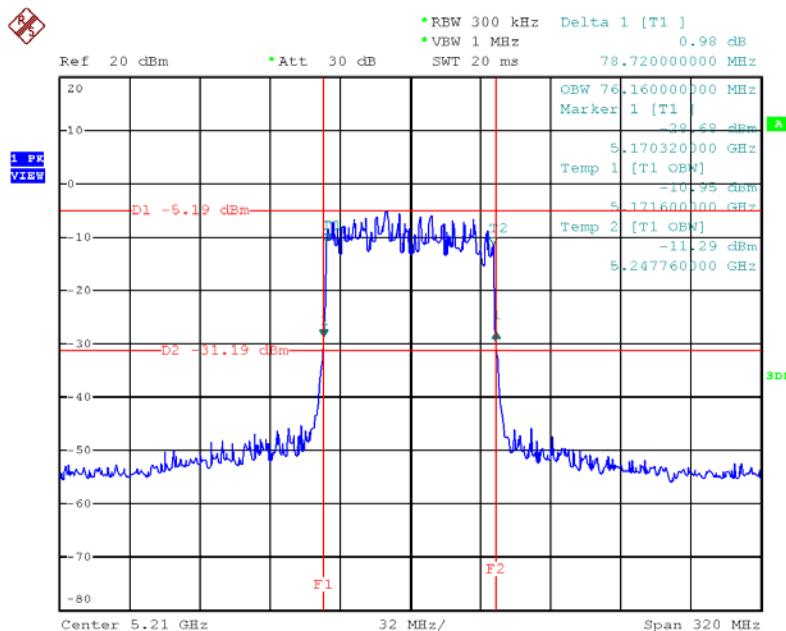**26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT80MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5210 MHz**


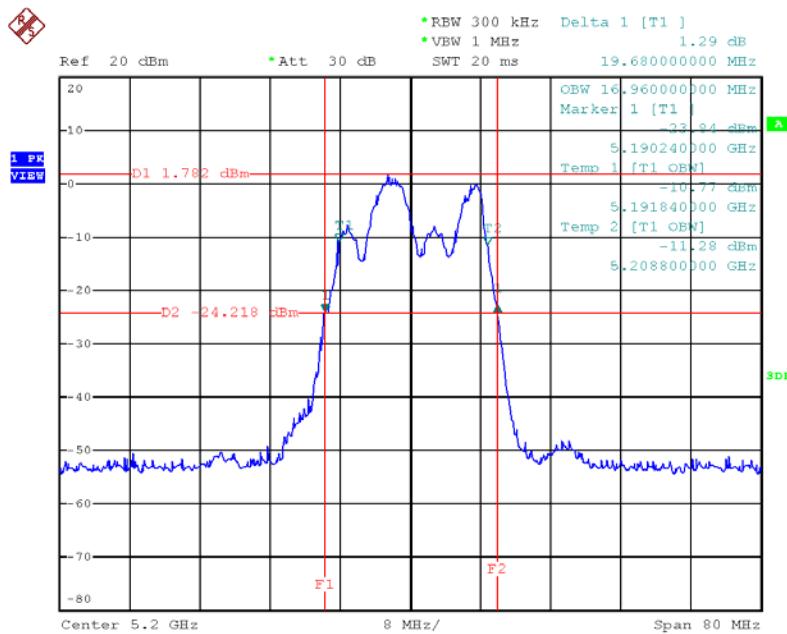
Date: 23.JUL.2012 16:08:17

### 26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

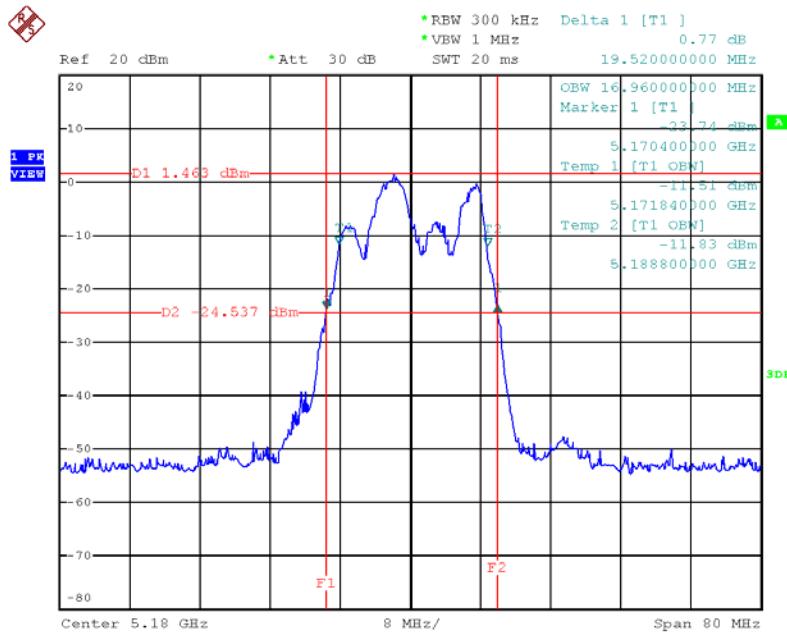


Date: 7.JUL.2012 02:23:18

### 26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz



Date: 7.JUL.2012 02:24:22

**26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz**

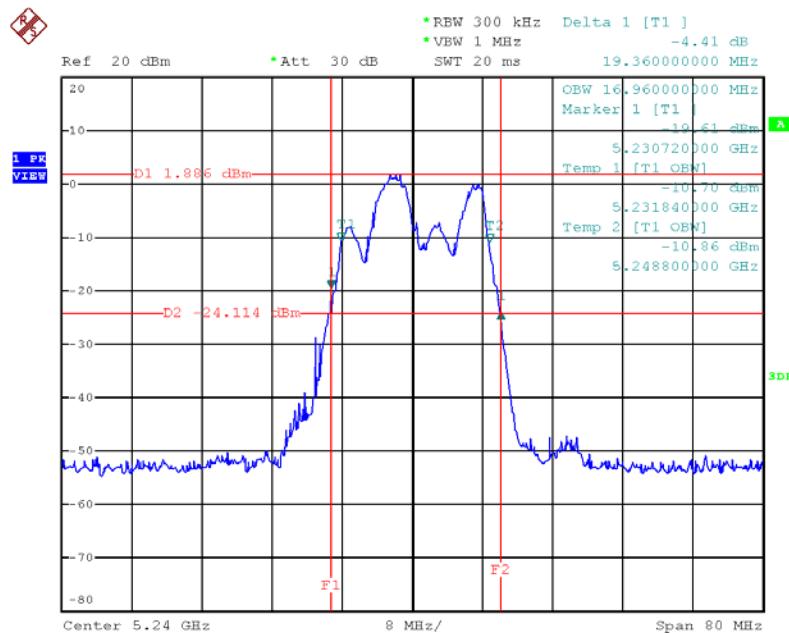

Date: 7.JUL.2012 02:25:21

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	Average Sweep count 100
Sweep Time	Auto

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power =>(4) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

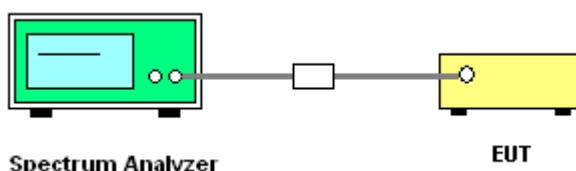

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n / ac

##### Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.1	Ant.2	Ant.3			
36	5180 MHz	10.19	10.58	10.23	15.11	17.00	Complies
40	5200 MHz	10.04	10.99	10.29	15.23	17.00	Complies
48	5240 MHz	10.72	10.64	10.04	15.25	17.00	Complies

##### Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.1	Ant.2	Ant.3			
38	5190 MHz	11.06	11.73	11.24	16.12	17.00	Complies
46	5230 MHz	11.73	11.86	11.30	16.41	17.00	Complies

##### Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.1	Ant.2	Ant.3			
36	5180 MHz	10.08	10.63	10.11	15.05	17.00	Complies
40	5200 MHz	10.31	10.98	10.40	15.34	17.00	Complies
48	5240 MHz	11.02	10.67	10.32	15.45	17.00	Complies

##### Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.1	Ant.2	Ant.3			
38	5190 MHz	11.07	11.66	11.07	16.05	17.00	Complies
46	5230 MHz	11.73	11.77	11.27	16.37	17.00	Complies

**Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 1 + Ant. 2 + Ant. 3**

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.1	Ant.2	Ant.3			
42	5210 MHz	11.06	11.60	11.49	16.16	17.00	<b>Complies</b>

Temperature	25°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**


Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.1	Ant.2	Ant.3			
36	5180 MHz	8.38	8.52	8.15	13.12	15.39	Complies
40	5200 MHz	8.21	8.74	8.29	13.19	15.43	Complies
48	5240 MHz	8.87	8.58	8.32	13.37	15.36	Complies

NOTE: Directional gain =  $7.51 \text{ dBi} + 10\log(2) = 15.36 \text{ dBi} > 6 \text{ dBi}$ , so the conducted power limit = (17 or  $4 + 10\log B$ )-Directional gain-6


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 1 / 5240 MHz

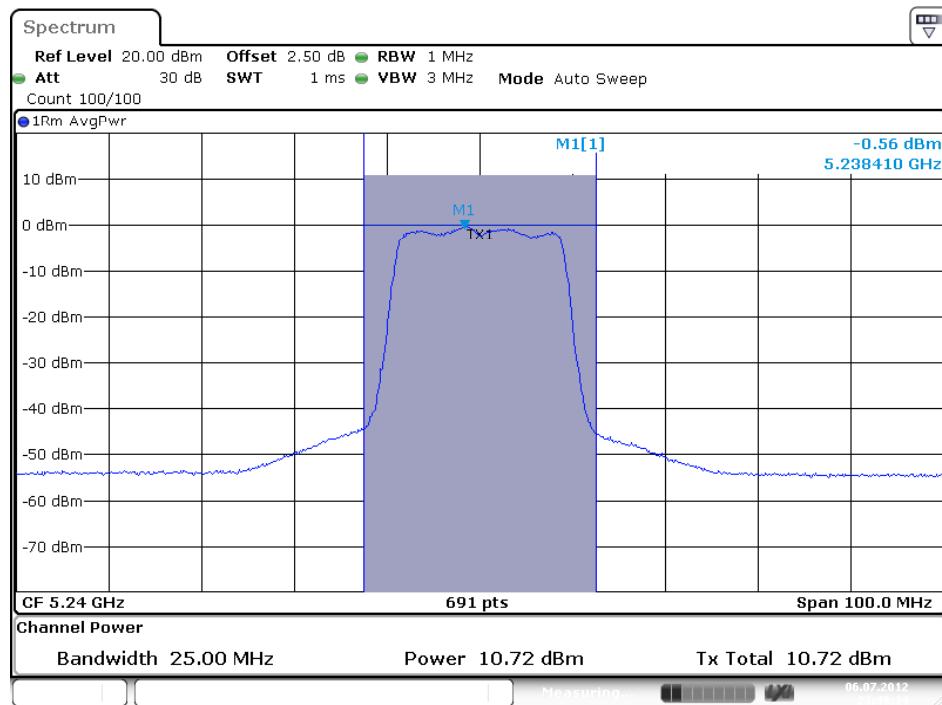


### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 2 / 5240 MHz

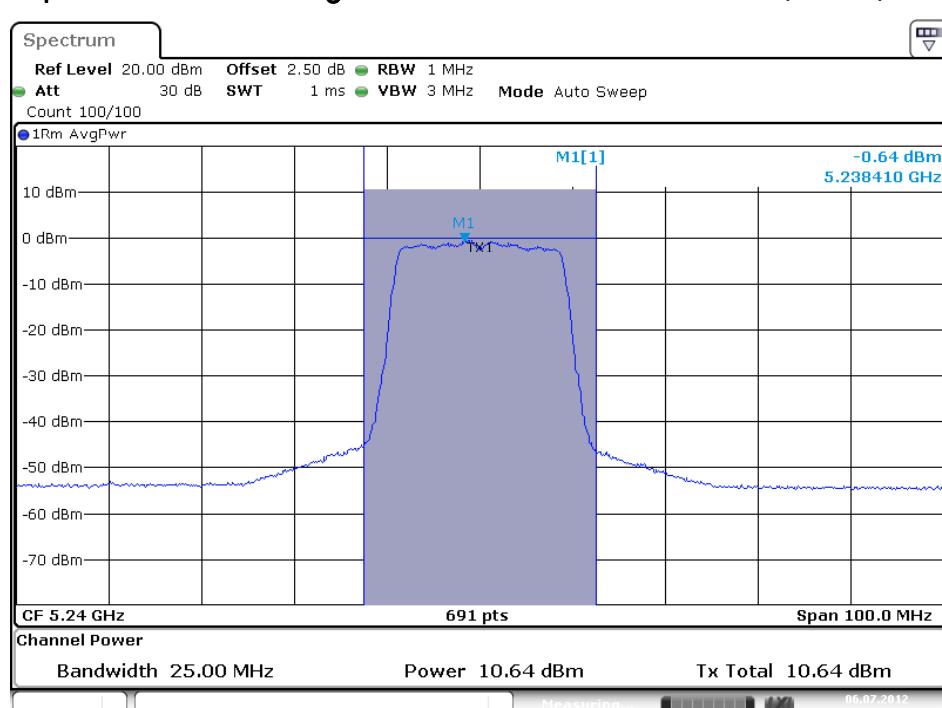


### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 3 / 5240 MHz

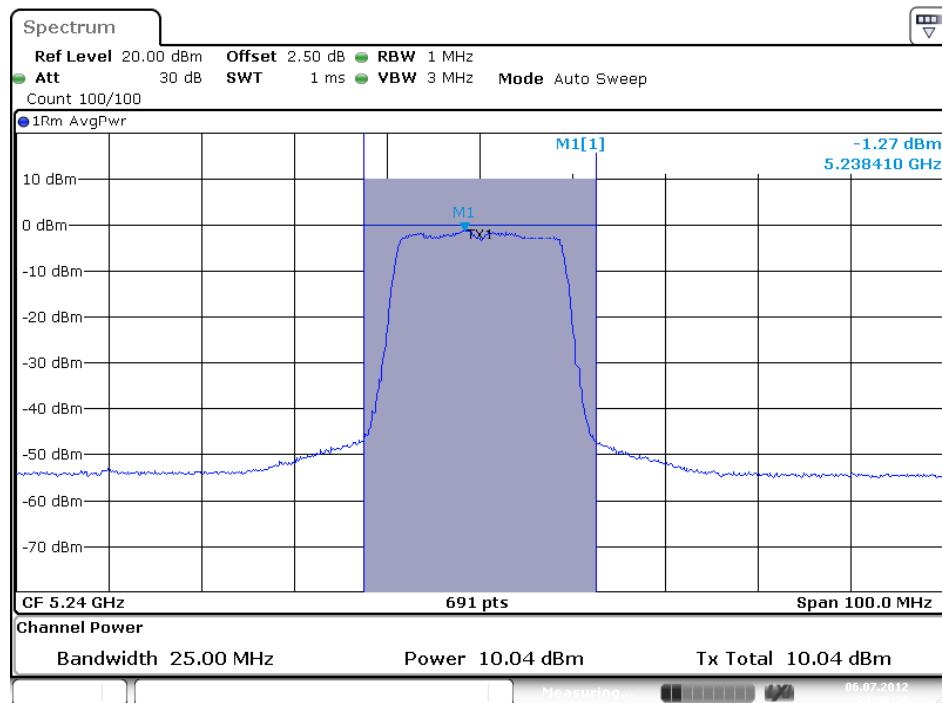


### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 1 / 5230 MHz

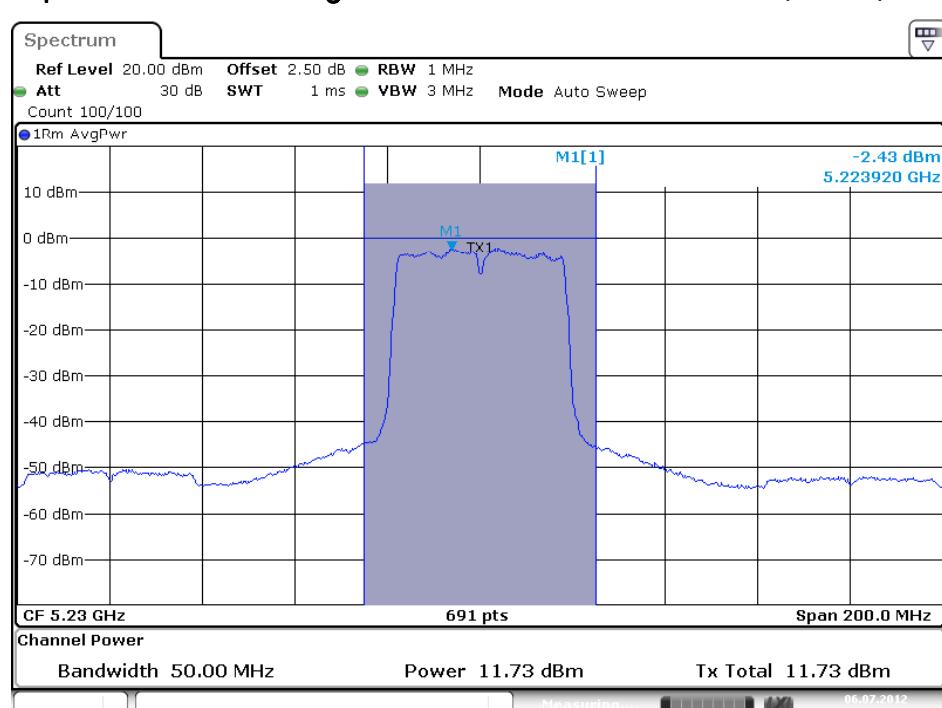


### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 2 / 5230 MHz

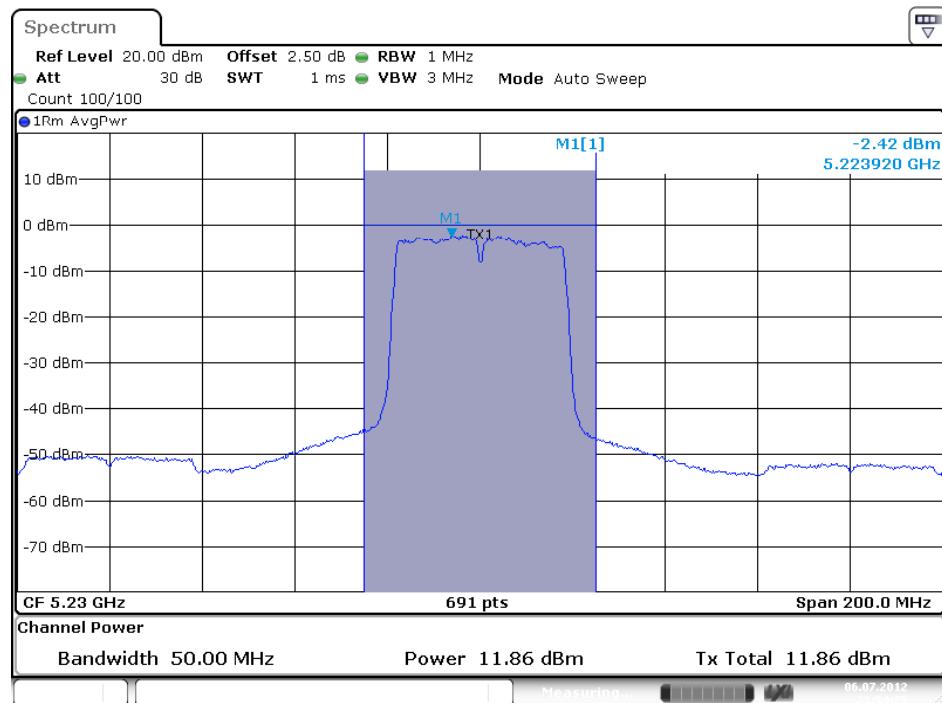


### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 3 / 5230 MHz

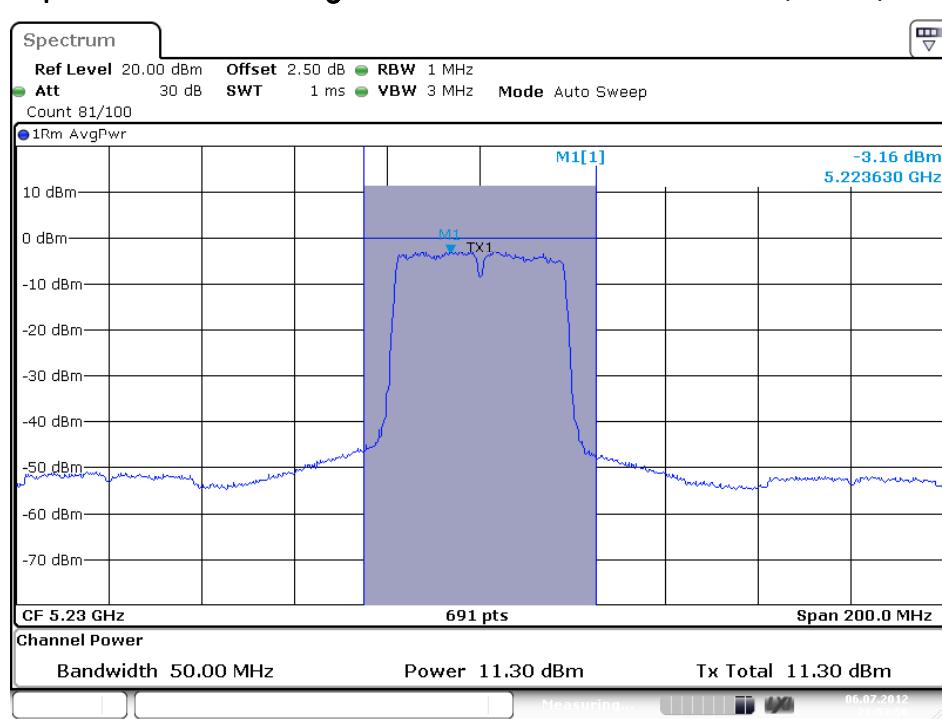


### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 1 / 5240 MHz

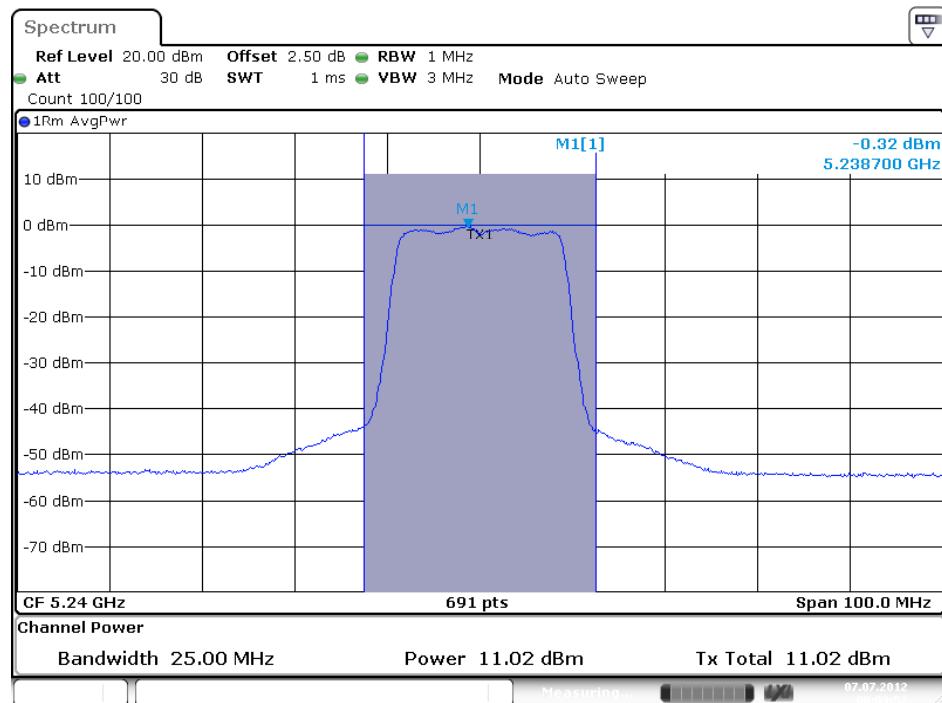


### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 2 / 5240 MHz

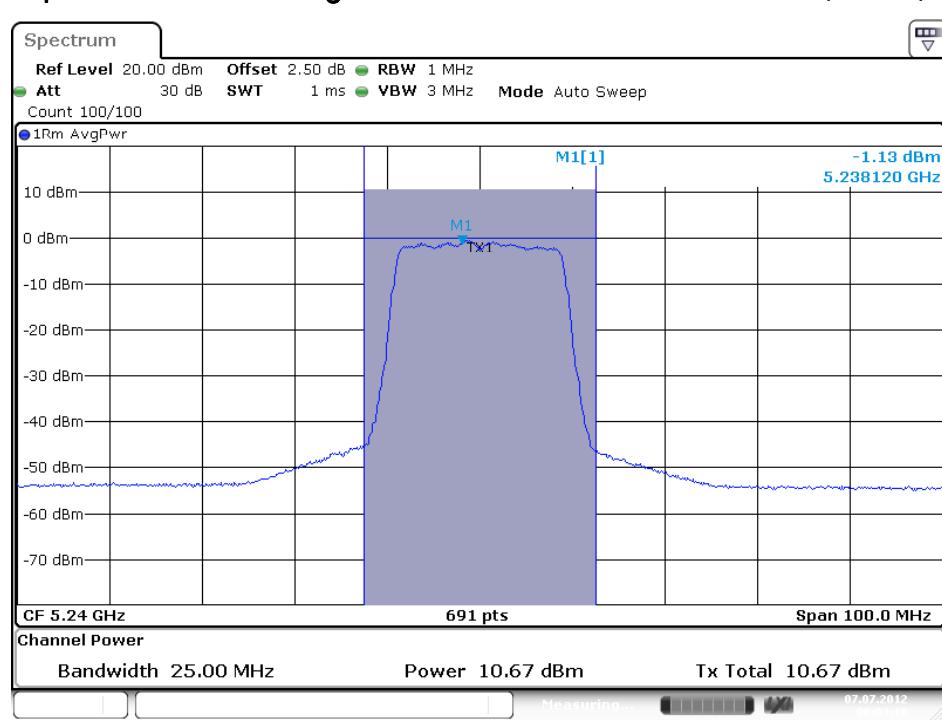


### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 3 / 5240 MHz

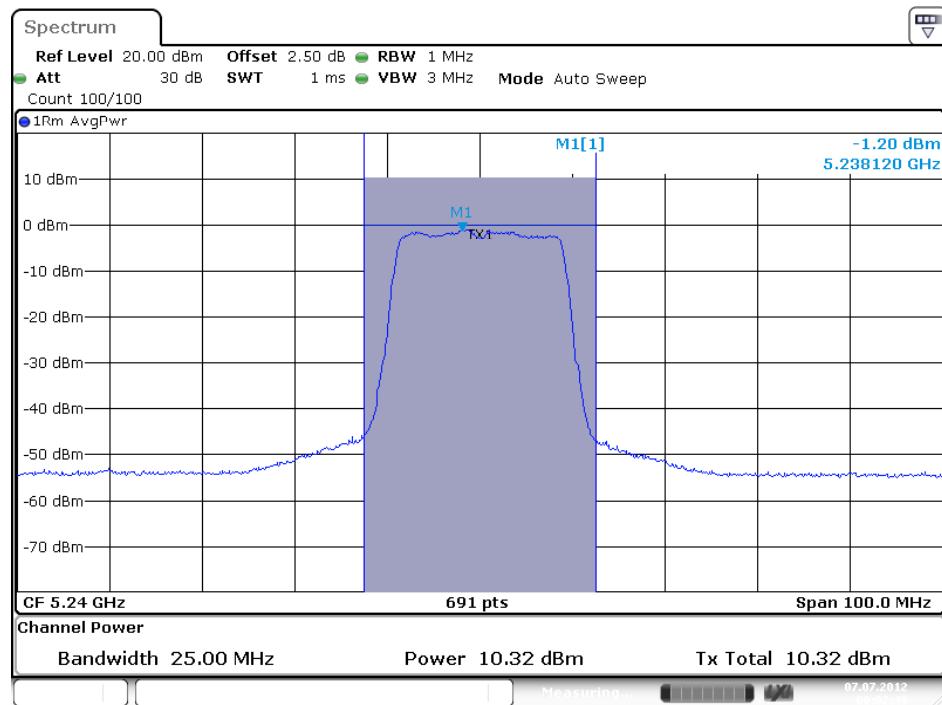


### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 1 / 5230 MHz

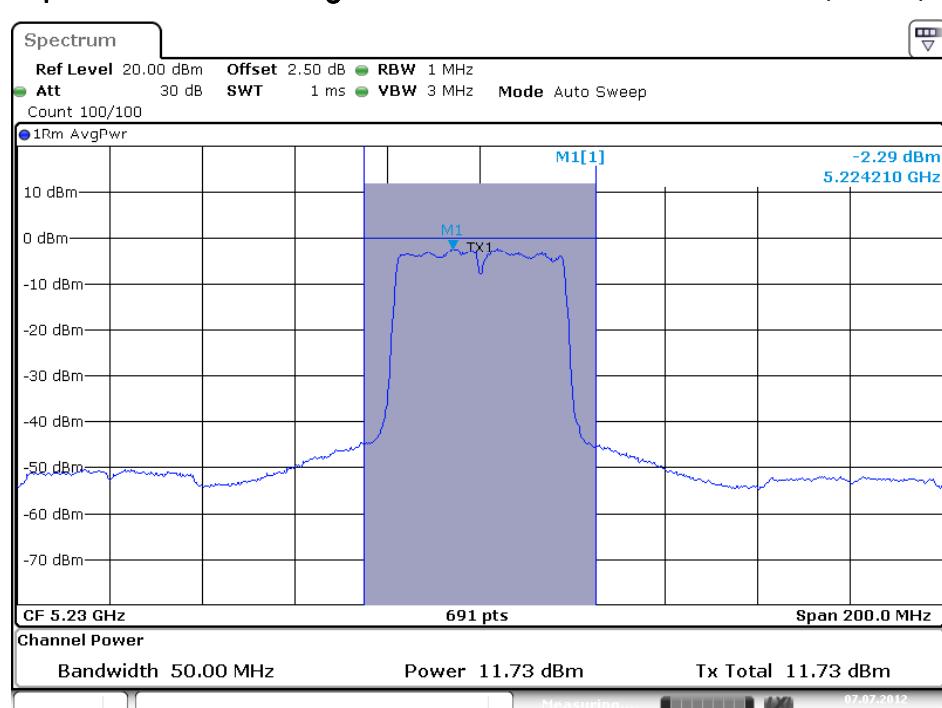


### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 2 / 5230 MHz

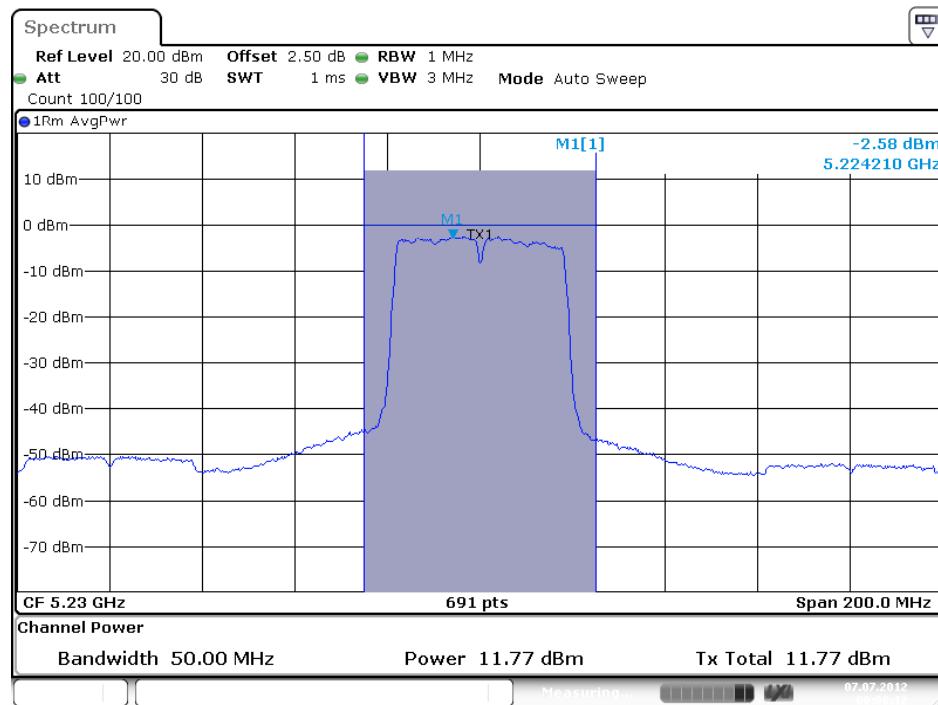


### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 3 / 5230 MHz

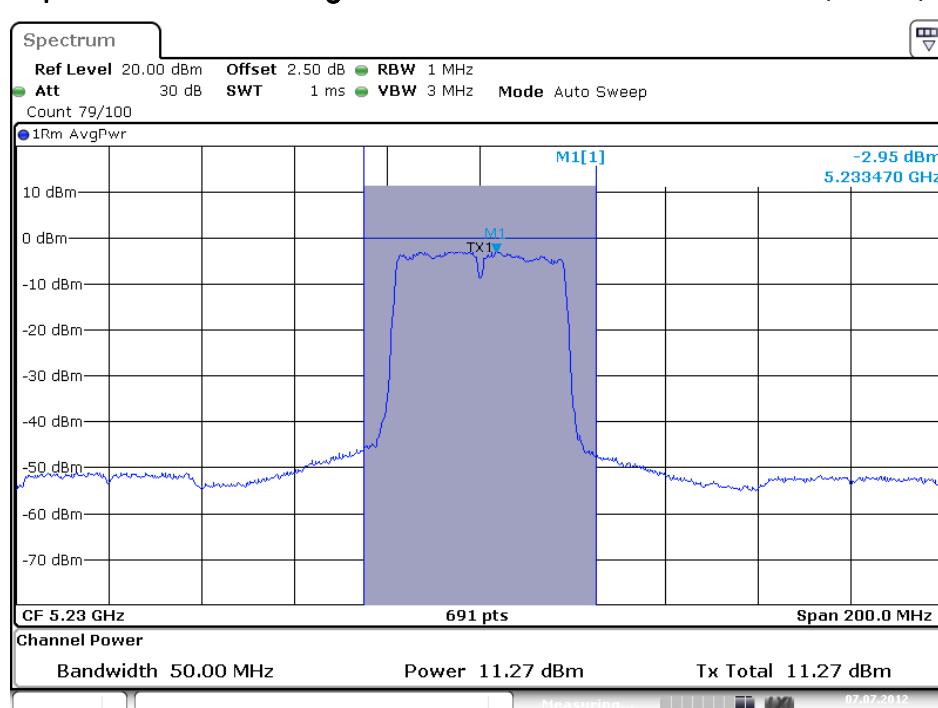


### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 1 / 5210 MHz

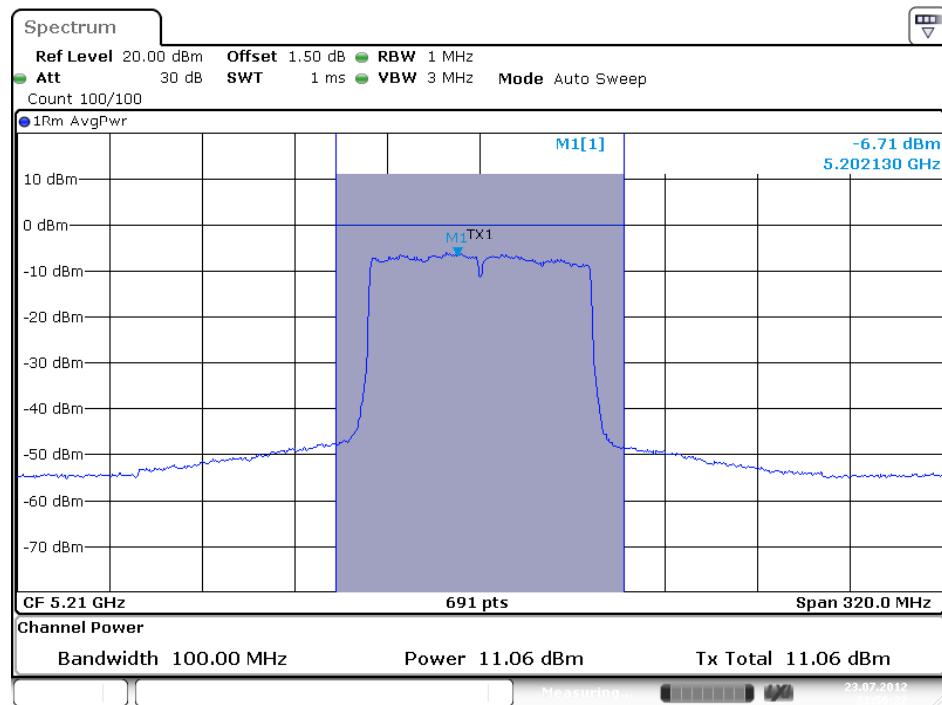

### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 2 / 5210 MHz

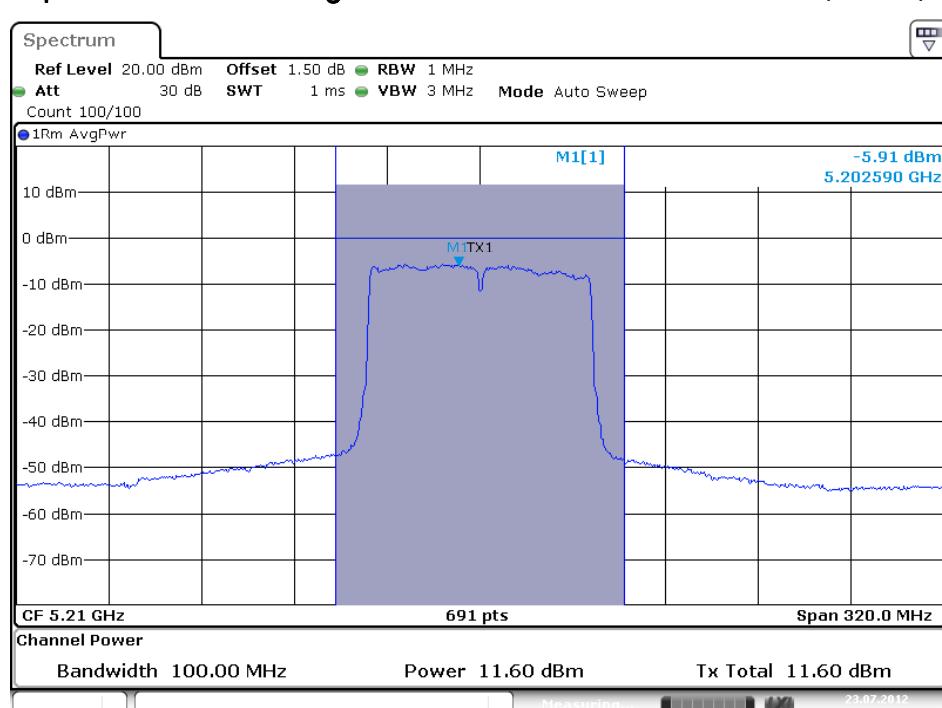


### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 3 / 5210 MHz

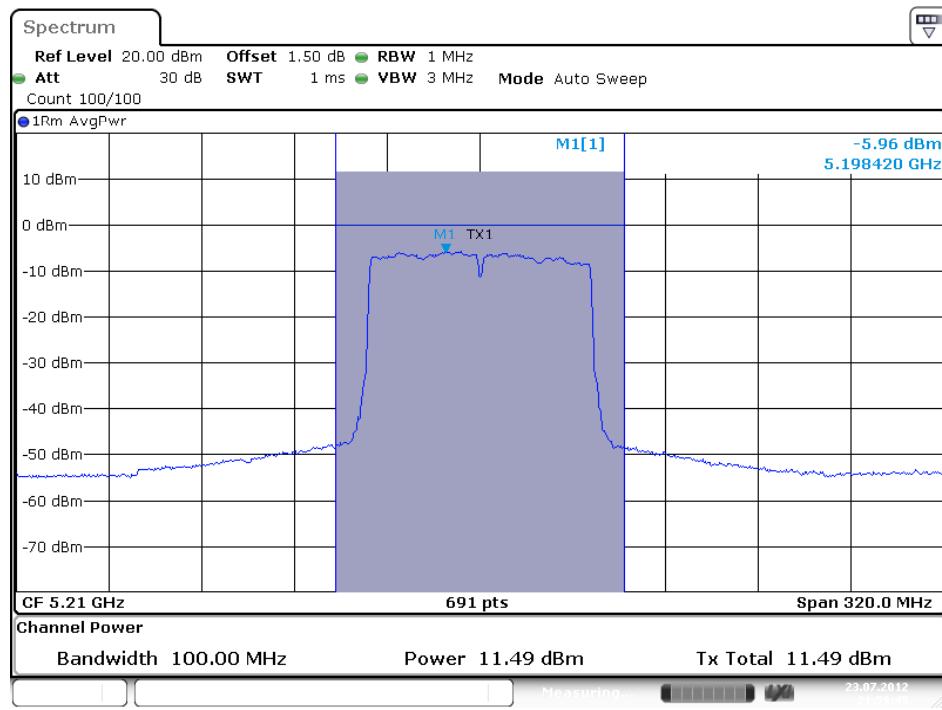


Date: 23.JUL.2012 21:59:45

### Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 1 / 5240 MHz

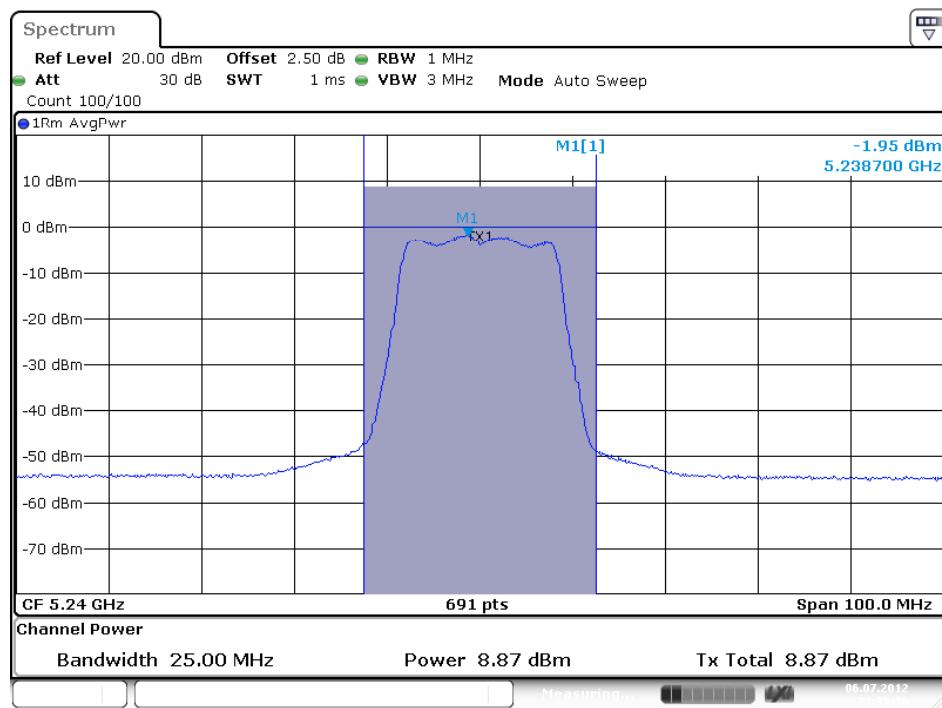


Date: 6.JUL.2012 23:35:36

### Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 2 / 5240 MHz

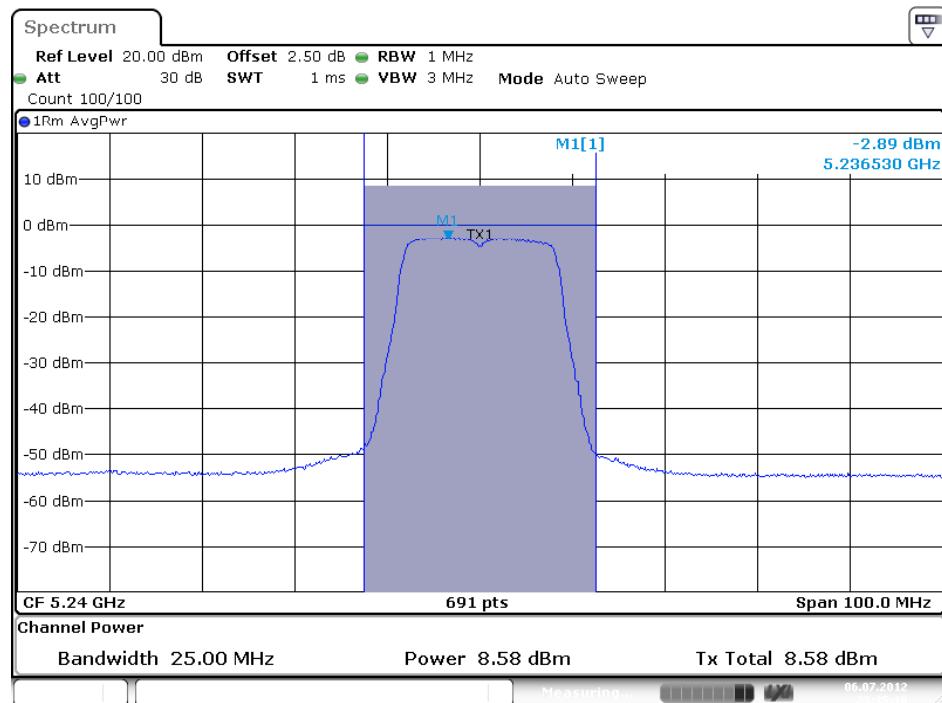

### Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 3 / 5240 MHz

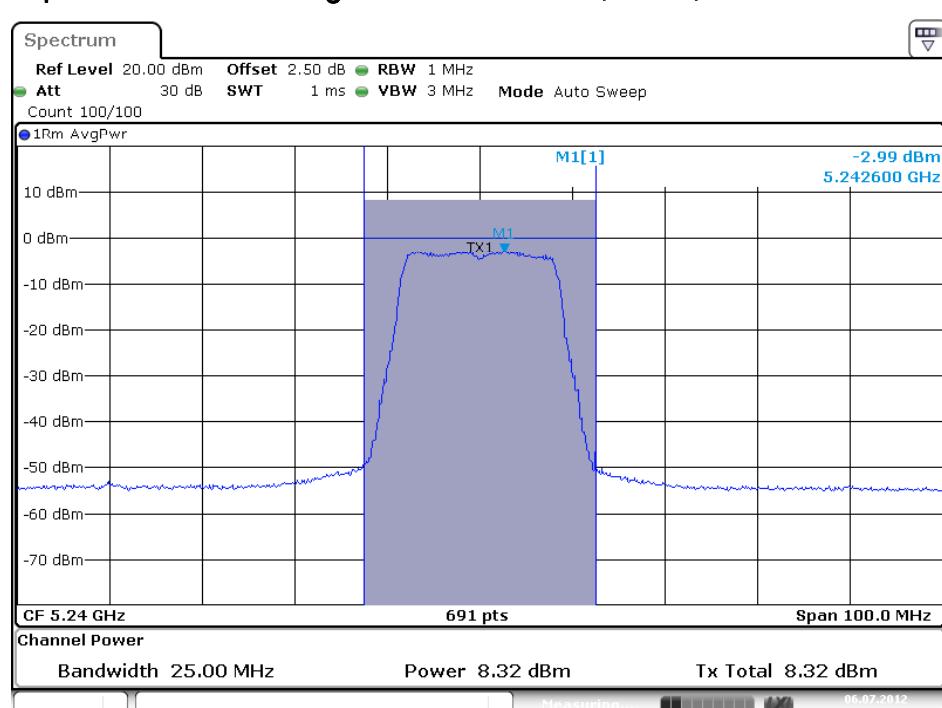

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

### 4.4.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.
5. Procedures refer KDB 662911 : Measure and sum the spectra across the outputs.

The first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way. This will likely require transferring the measured spectra to a computer, where the bin-by-bin summing can be performed

### 4.4.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test



---

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n / ac

##### Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	2.73	4.00	Complies
40	5200 MHz	2.87	4.00	Complies
48	5240 MHz	3.35	4.00	Complies

##### Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	0.39	4.00	Complies
46	5230 MHz	1.09	4.00	Complies

##### Configuration IEEE 802.11n MCS0 HT20MHz

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	2.73	4.00	Complies
40	5200 MHz	2.87	4.00	Complies
48	5240 MHz	3.35	4.00	Complies

##### Configuration IEEE 802.11n MCS0 HT40MHz

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.39	4.00	Complies
46	5230 MHz	1.09	4.00	Complies

##### Configuration IEEE 802.11ac MCS0 VHT 80MHz

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-2.47	4.00	Complies

Temperature	25°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a

**Configuration IEEE 802.11a**


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	0.54	2.49	Complies
40	5200 MHz	0.83	2.49	Complies
48	5240 MHz	1.22	2.49	Complies

Note: Directional gain =  $G_{ANT} + 10 \log(N) \text{ dBi}$  = 7.51 dBi > 6 dBi, so the power density limit = 4 - (7.51 - 6) = 2.49 dBm.


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 1 + Ant. 2+ Ant. 3 / 5240 MHz

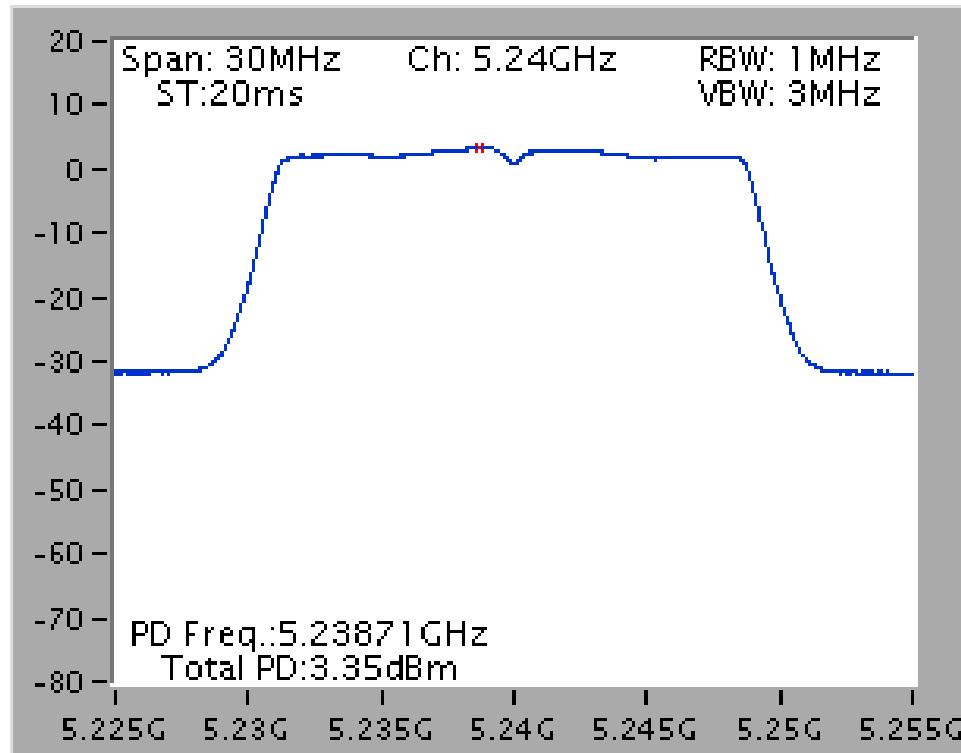


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 1 + Ant. 2+ Ant. 3 / 5230 MHz

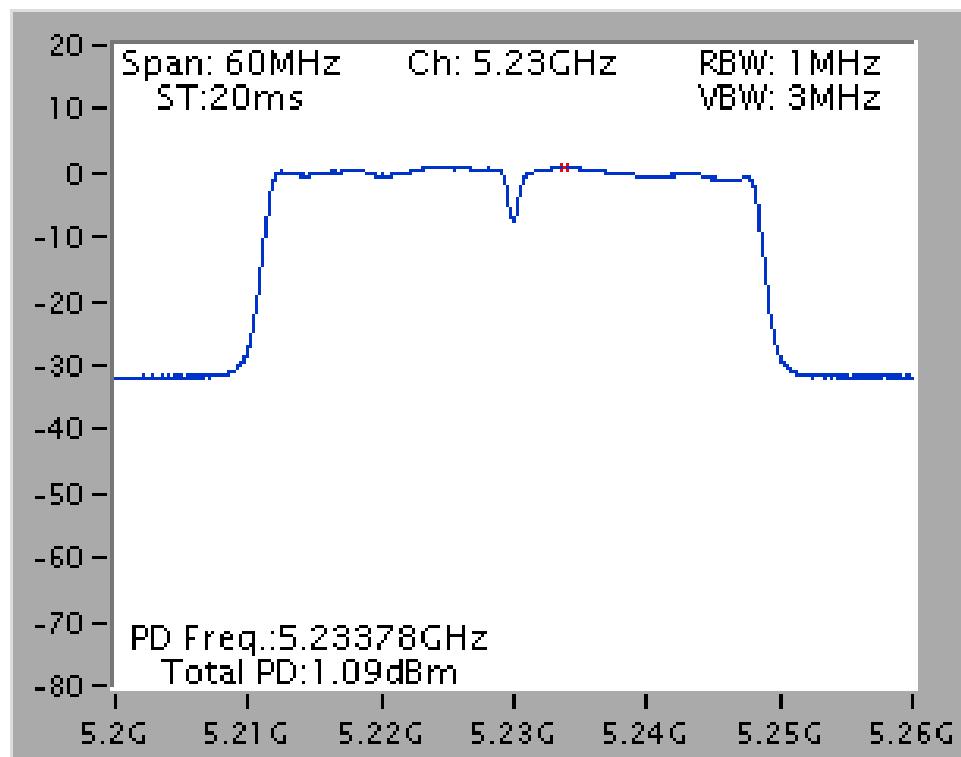

Power Density Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5210 MHz

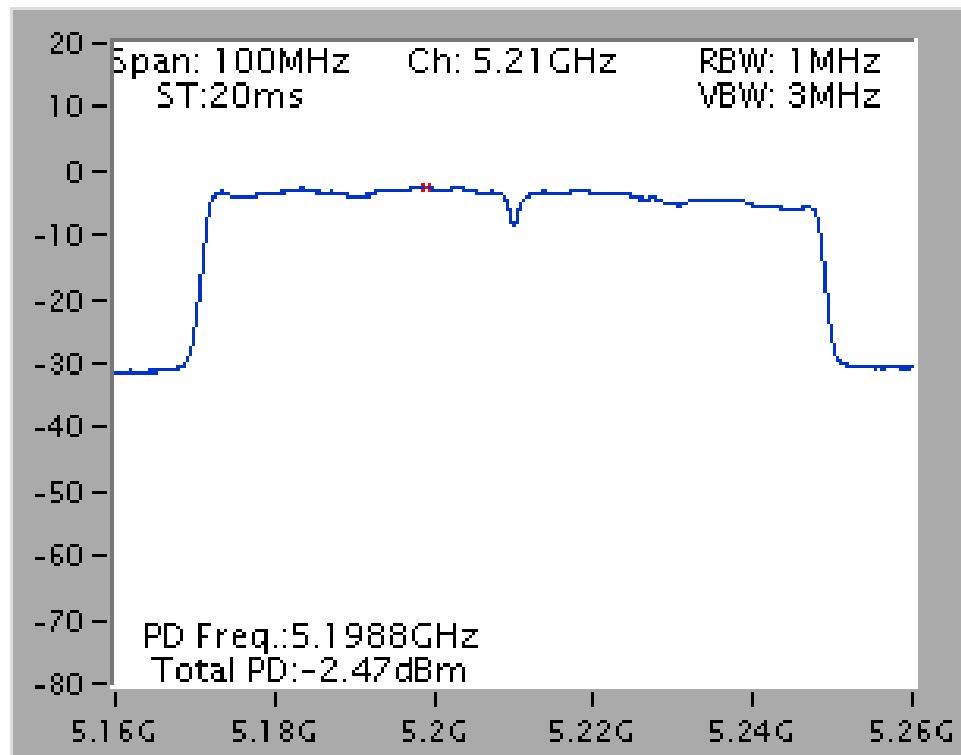

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz

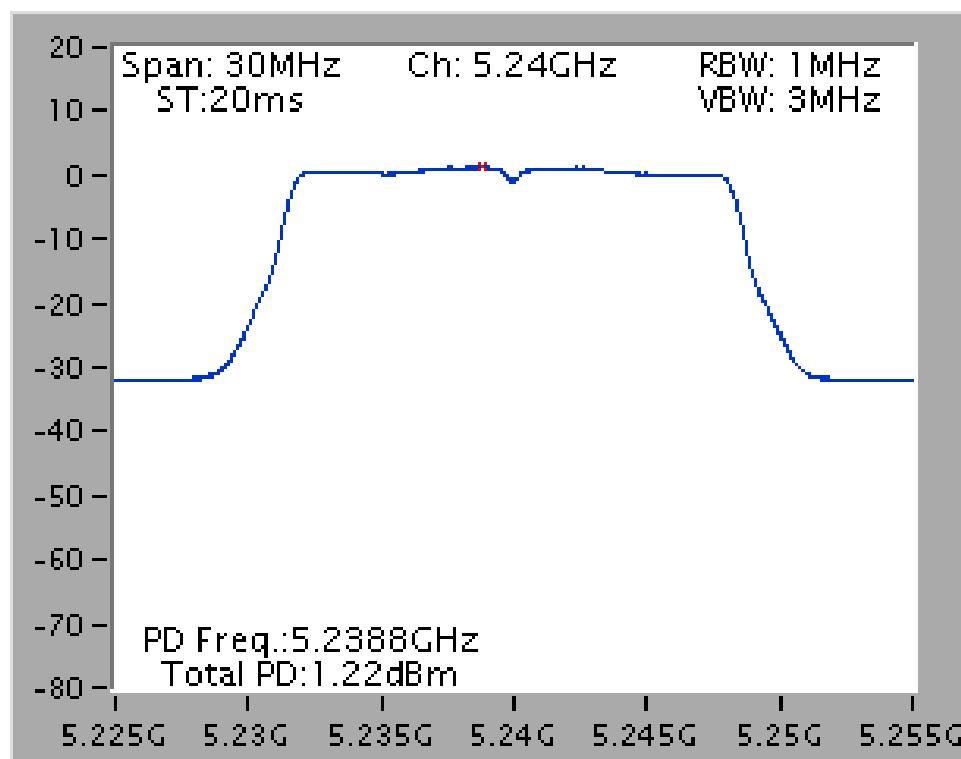

## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

### 4.5.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span > 26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

Temperature	25°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n / ac

##### Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	8.84	13	Complies
40	5200 MHz	8.81	13	Complies
48	5240 MHz	8.69	13	Complies

##### Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
38	5190 MHz	8.53	13	Complies
46	5230 MHz	9.39	13	Complies

##### Configuration IEEE 802.11ac MCS0 VHT80MHz / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
42	5210 MHz	8.14	13	Complies


<b>Temperature</b>	25°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Benson Peng	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**


<b>Channel</b>	<b>Frequency</b>	<b>Peak Excursion (dB)</b>	<b>Max. Limit (dB)</b>	<b>Result</b>
36	5180 MHz	9.36	13	Complies
40	5200 MHz	8.84	13	Complies
48	5240 MHz	8.75	13	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

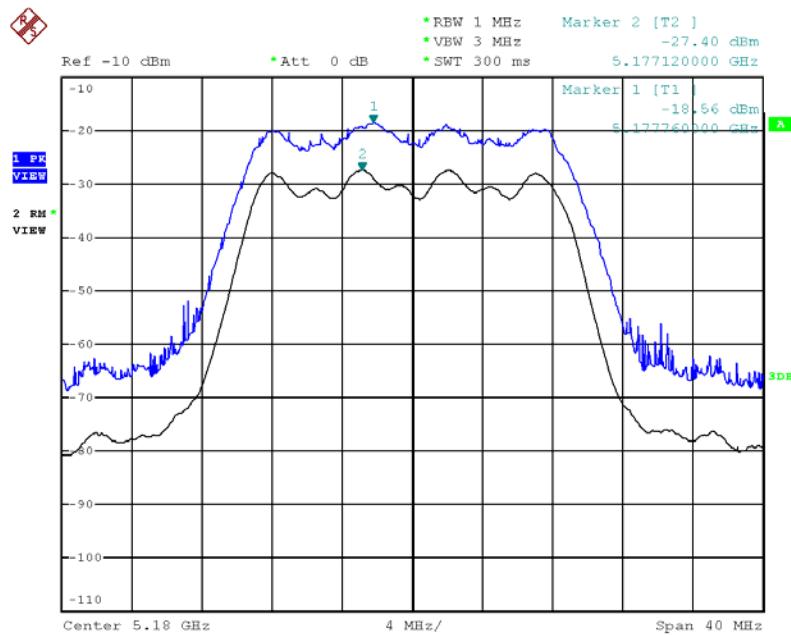**Peak Excursion Plot on Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5180**


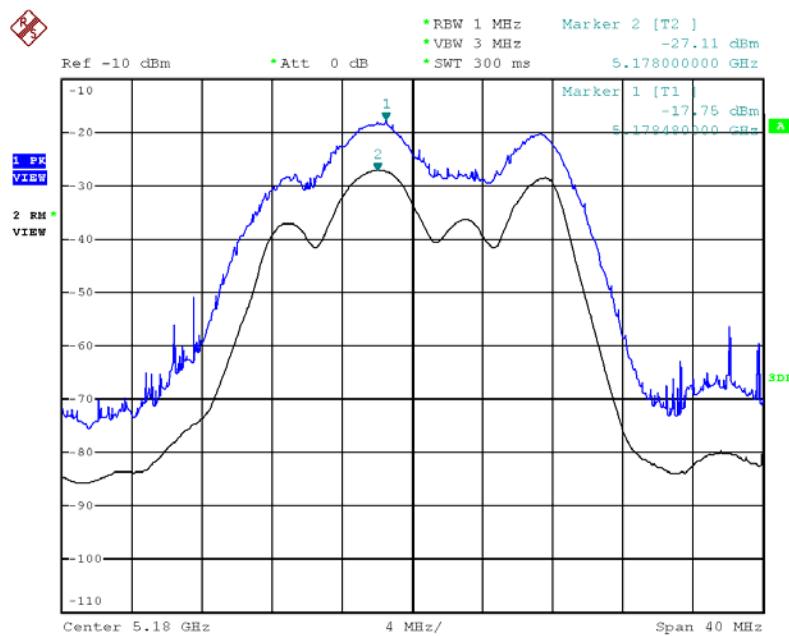
Date: 7.JUL.2012 02:58:02

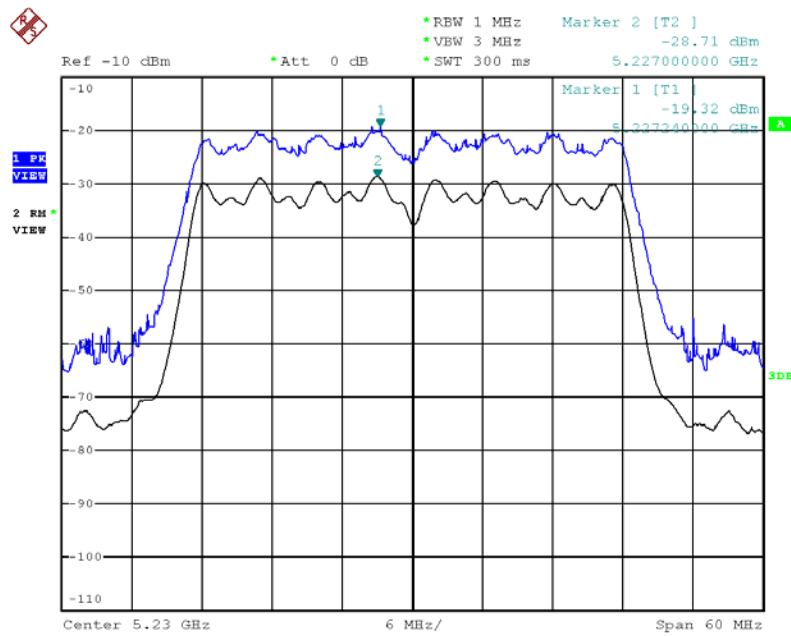**Peak Excursion Plot on Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5230**


Date: 7.JUL.2012 02:55:42

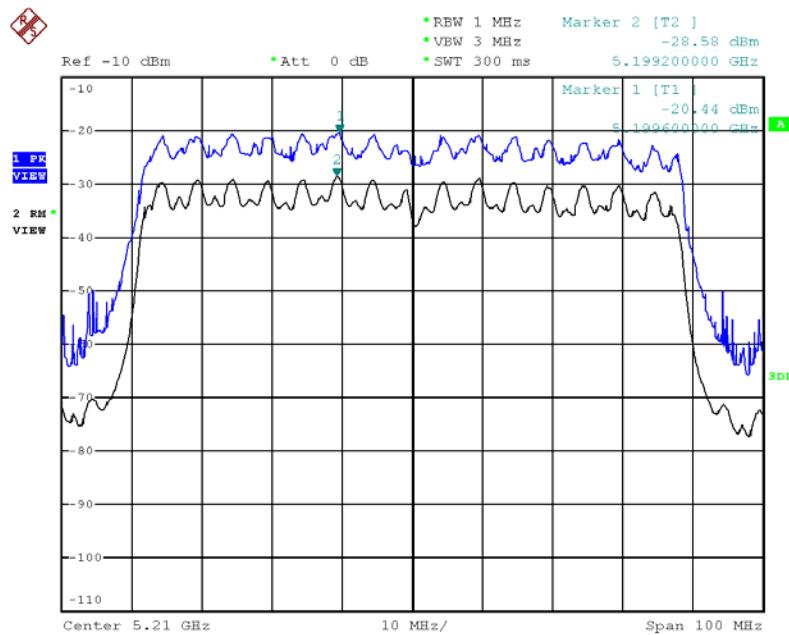**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 1 + Ant. 2 + Ant. 3 / 5210**


Date: 23.JUL.2012 17:29:27

**Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5180**


Date: 7.JUL.2012 03:02:53

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

For radiated emissions below 1GHz

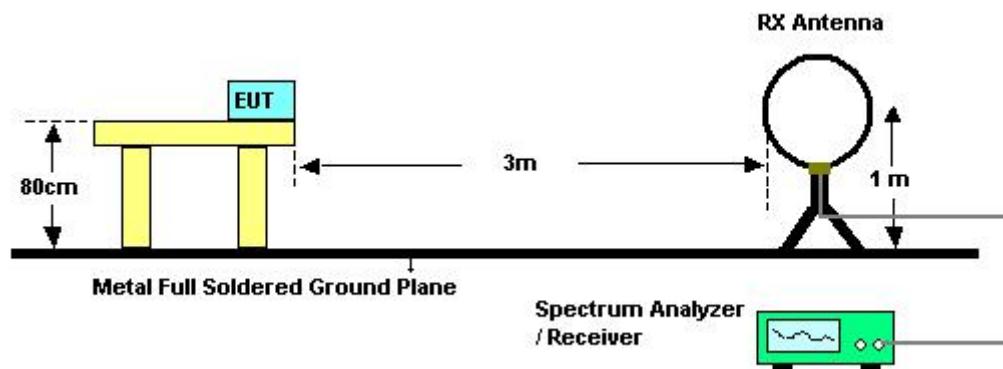

For radiated emissions above 1GHz

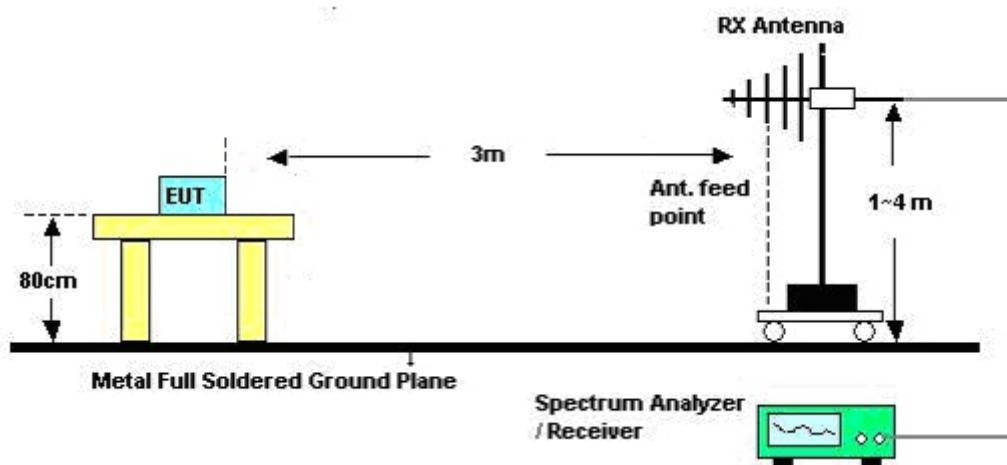

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	21°C	Humidity	56.4%
Test Engineer	Wen Chao	Configurations	Normal
Test Date	Sep. 28, 2012		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	21°C	Humidity	56.4%
Test Engineer	Wen Chao	Configurations	Normal / Mode 1

##### Horizontal

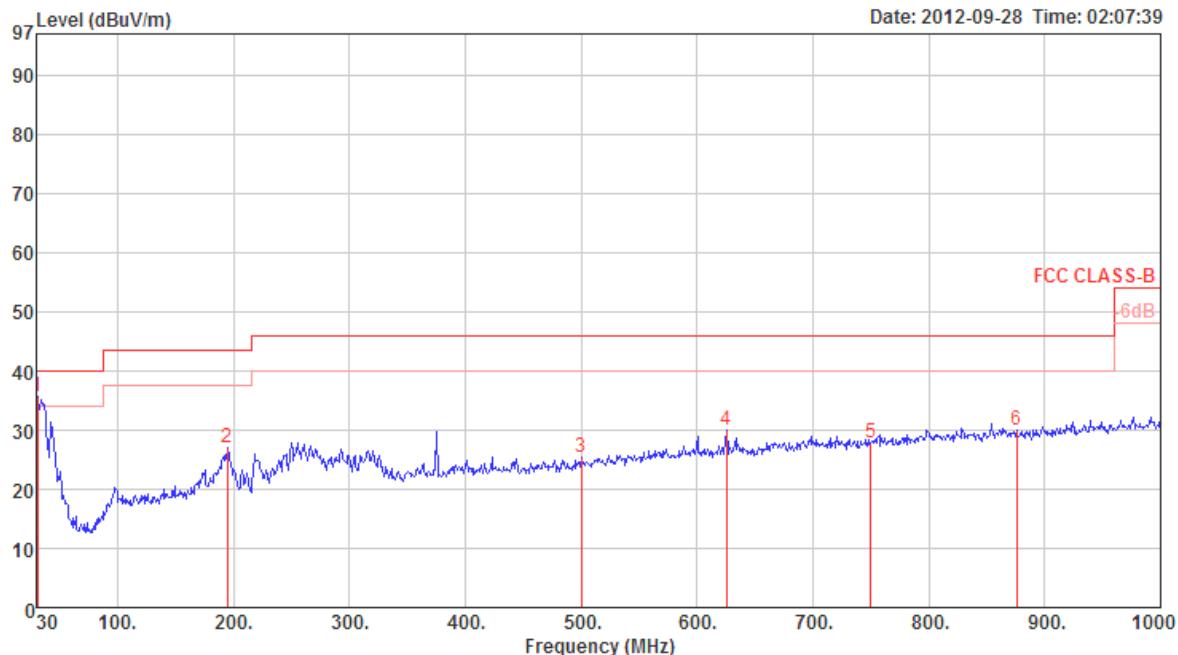

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
		Line	Limit	Level	dB	dB	dB				
1 P	30.97	35.72	40.00	-4.28	43.55	0.85	27.98	19.30 Peak	0	400	HORIZONTAL
2	194.90	27.05	43.50	-16.45	42.16	2.07	27.28	10.10 Peak	0	400	HORIZONTAL
3	500.45	25.51	46.00	-20.49	32.26	3.38	27.93	17.80 Peak	0	400	HORIZONTAL
4	625.58	30.10	46.00	-15.90	34.41	3.82	27.58	19.45 Peak	0	400	HORIZONTAL
5	750.00	27.87	46.00	-18.13	30.58	4.21	27.12	20.20 Peak	0	400	HORIZONTAL
6	875.84	29.86	46.00	-16.14	30.85	4.51	26.86	21.36 Peak	0	400	HORIZONTAL

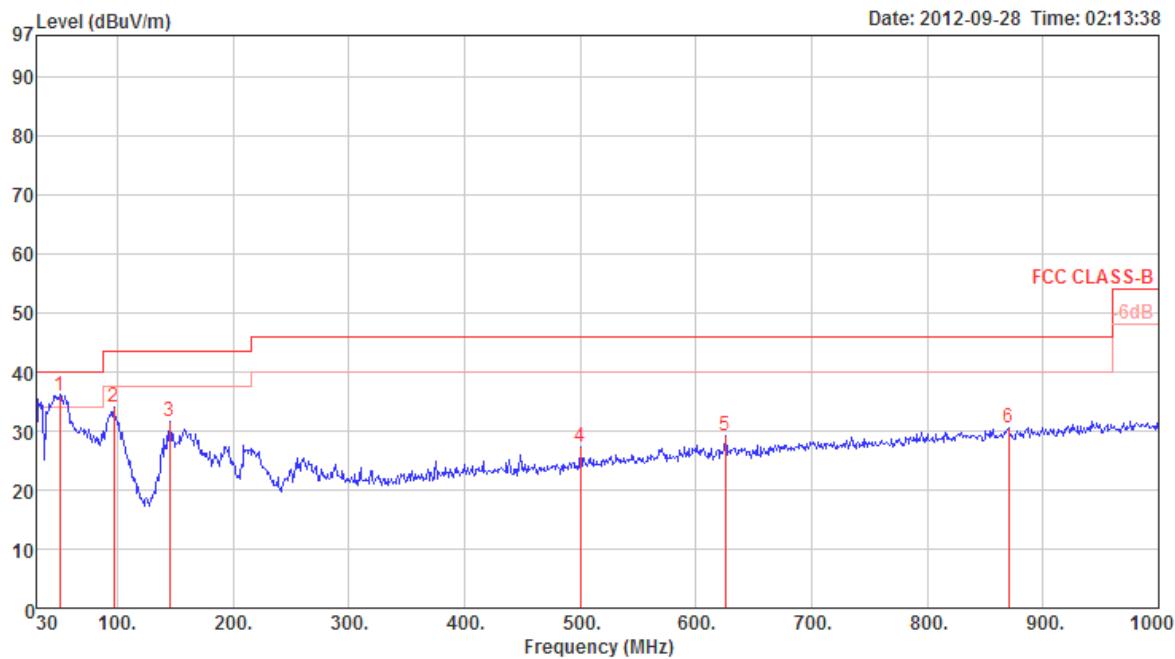**Vertical**


Freq	Level	Limit	Over	Read	Cable			Preamp	Antenna	T/Pos	A/Pos	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m			deg	cm
1 p	50.37	35.86	40.00	-4.14	54.02	1.06	27.92	8.70	Peak	0	100	VERTICAL
2	96.93	33.92	43.50	-9.58	49.52	1.46	27.83	10.77	Peak	0	100	VERTICAL
3	145.43	31.65	43.50	-11.85	45.81	1.76	27.53	11.61	Peak	0	100	VERTICAL
4	500.45	27.17	46.00	-18.83	33.92	3.38	27.93	17.80	Peak	0	100	VERTICAL
5	625.58	29.28	46.00	-16.72	33.59	3.82	27.58	19.45	Peak	0	100	VERTICAL
6	870.02	30.41	46.00	-15.59	31.46	4.50	26.87	21.32	Peak	0	100	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	21°C	Humidity	56.4 %
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT20MHz Ch 36 / Ant. 1 + Ant. 2 + Ant.3
Test Date	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB				
1	15535.02	49.92	74.00	-24.08	41.41	6.13	37.67	35.29	Peak	100	259	HORIZONTAL
2	15536.92	37.01	54.00	-16.99	28.50	6.13	37.67	35.29	Average	100	259	HORIZONTAL

*Vertical*

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB				
1	15539.92	37.86	54.00	-16.14	29.35	6.13	37.69	35.31	Average	100	350	VERTICAL
2	15541.81	50.33	74.00	-23.67	41.82	6.13	37.69	35.31	Peak	100	350	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4 %
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11n MCS0 HT20MHz Ch 40 / Ant. 1 + Ant. 2 + Ant.3
<b>Test Date</b>	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1 15595.18	37.06	54.00	-16.94	28.67	6.13	37.60	35.34	Average	100	80	HORIZONTAL
2 15600.71	50.18	74.00	-23.82	41.79	6.13	37.60	35.34	Peak	100	80	HORIZONTAL

*Vertical*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1 15595.08	50.47	74.00	-23.53	42.08	6.13	37.60	35.34	Peak	100	205	VERTICAL
2 15599.49	36.73	54.00	-17.27	28.34	6.13	37.60	35.34	Average	100	205	VERTICAL



Temperature	21°C	Humidity	56.4 %
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT20MHz Ch 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15715.66	56.48	74.00	-17.52	48.24	6.14	37.48	35.38 Peak	100	332	HORIZONTAL
2	15720.85	41.16	54.00	-12.84	32.93	6.14	37.48	35.39 Average	100	332	HORIZONTAL

*Vertical*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15719.20	44.88	54.00	-9.12	36.65	6.14	37.48	35.39 Average	100	256	VERTICAL
2	15719.38	62.00	74.00	-12.00	53.77	6.14	37.48	35.39 Peak	100	256	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4 %
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11n MCS0 HT40MHz Ch 38 / Ant. 1 + Ant. 2 + Ant.3
<b>Test Date</b>	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15565.46	50.76	74.00	-23.24	42.33	6.13	37.63	35.33 Peak	100	148	HORIZONTAL
2	15573.89	37.06	54.00	-16.94	28.65	6.13	37.61	35.33 Average	100	148	HORIZONTAL

*Vertical*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15565.06	37.07	54.00	-16.93	28.62	6.13	37.65	35.33 Average	100	137	VERTICAL
2	15570.59	50.08	74.00	-23.92	41.63	6.13	37.65	35.33 Peak	100	137	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11n MCS0 HT40MHz Ch 46 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 05, 2012		

***Horizontal***

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m				
		MHz	dBuV/m	dBuV/m	dB	dB	dB	cm				
1	15689.18	37.16	54.00	-16.84	28.88	6.14	37.51	35.37	Average	100	139	HORIZONTAL
2	15691.52	50.05	74.00	-23.95	41.80	6.14	37.49	35.38	Peak	100	139	HORIZONTAL

***Vertical***

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m				
		MHz	dBuV/m	dBuV/m	dB	dB	dB	cm				
1	15692.24	50.01	74.00	-23.99	41.76	6.14	37.49	35.38	Peak	100	119	VERTICAL
2	15693.43	36.85	54.00	-17.15	28.60	6.14	37.49	35.38	Average	100	119	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11ac MCS0 VHT20MHz Ch 36 / Ant. 1 + Ant. 2 + Ant.3
<b>Test Date</b>	Jul. 05, 2012		

***Horizontal***

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1 15323.44	37.62	54.00	-16.38	28.15	5.99	38.60	35.12	Average	100	139	HORIZONTAL
2 15325.92	51.59	74.00	-22.41	42.12	5.99	38.60	35.12	Peak	100	139	HORIZONTAL

***Vertical***

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1 15321.61	37.87	54.00	-16.13	28.40	5.99	38.60	35.12	Average	100	149	VERTICAL
2 15327.25	50.57	74.00	-23.43	41.10	5.99	38.60	35.12	Peak	100	149	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11ac MCS0 VHT20MHz Ch 40 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	15595.05	37.07	54.00	-16.93	28.68	6.13	37.60	35.34	Average	100	183 HORIZONTAL
2	15603.16	49.37	74.00	-24.63	40.98	6.13	37.60	35.34	Peak	100	183 HORIZONTAL

*Vertical*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	15598.93	36.67	54.00	-17.33	28.28	6.13	37.60	35.34	Average	100	173 VERTICAL
2	15602.15	50.36	74.00	-23.64	41.97	6.13	37.60	35.34	Peak	100	173 VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11ac MCS0 VHT20MHz Ch 48 / Ant. 1 + Ant. 2 + Ant.3
<b>Test Date</b>	Jul. 05, 2012		

***Horizontal***

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m				
1	15720.67	37.20	54.00	-16.80	28.97	6.14	37.48	35.39	Average	100	211	HORIZONTAL
2	15721.01	50.86	74.00	-23.14	42.63	6.14	37.48	35.39	Peak	100	211	HORIZONTAL

***Vertical***

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m				
1	15716.09	49.95	74.00	-24.05	41.71	6.14	37.48	35.38	Peak	100	227	VERTICAL
2	15723.46	37.05	54.00	-16.95	28.82	6.14	37.48	35.39	Average	100	227	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11ac MCS0 VHT40MHz Ch 38 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	15569.23	50.35	74.00	-23.65	41.92	6.13	37.63	35.33	Peak	100	249 HORIZONTAL
2	15573.09	37.29	54.00	-16.71	28.88	6.13	37.61	35.33	Average	100	249 HORIZONTAL

*Vertical*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	15572.32	50.49	74.00	-23.51	42.08	6.13	37.61	35.33	Peak	100	227 VERTICAL
2	15572.82	37.17	54.00	-16.83	28.76	6.13	37.61	35.33	Average	100	227 VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11ac MCS0 VHT40MHz Ch 46 / Ant. 1 + Ant. 2 + Ant.3
<b>Test Date</b>	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit	Over	Read	CableAntenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Cable Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15688.19	50.52	74.00	-23.48	42.24	6.14	37.51	35.37 Peak	100	37	HORIZONTAL
2	15693.83	36.94	54.00	-17.06	28.69	6.14	37.49	35.38 Average	100	37	HORIZONTAL

*Vertical*

Freq	Level	Limit	Over	Read	CableAntenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Cable Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15687.18	50.10	74.00	-23.90	41.82	6.14	37.51	35.37 Peak	100	18	VERTICAL
2	15694.47	37.73	54.00	-16.27	29.48	6.14	37.49	35.38 Average	100	18	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11ac MCS0 VHT80MHz Ch 42 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15628.30	50.26	74.00	-23.74	41.91	6.14	37.56	35.35 Peak	100	286	HORIZONTAL
2	15634.82	37.26	54.00	-16.74	28.91	6.14	37.56	35.35 Average	100	286	HORIZONTAL

*Vertical*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15629.57	50.53	74.00	-23.47	42.18	6.14	37.56	35.35 Peak	100	249	VERTICAL
2	15634.25	37.18	54.00	-16.82	28.83	6.14	37.56	35.35 Average	100	249	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11a Ch 36 / Ant. 1 + Ant. 2 + Ant.3
<b>Test Date</b>	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
1	15538.38	50.96	74.00	-23.04	42.49	6.13	37.65	35.31	Peak	100	220 HORIZONTAL
2	15538.99	37.08	54.00	-16.92	28.61	6.13	37.65	35.31	Average	100	220 HORIZONTAL

*Vertical*

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
1	15537.02	50.39	74.00	-23.61	41.82	6.13	37.73	35.29	Peak	100	142 VERTICAL
2	15537.21	37.21	54.00	-16.79	28.64	6.13	37.73	35.29	Average	100	142 VERTICAL



Temperature	21°C	Humidity	56.4 %
Test Engineer	Wen Chao	Configurations	IEEE 802.11a Ch 40 / Ant. 1 + Ant. 2 + Ant.3
Test Date	Jul. 05, 2012		

*Horizontal*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
1	15612.78	36.96	54.00	-17.04	28.59	6.13	37.58	35.34 Average	100	100	HORIZONTAL
2	15613.40	50.59	74.00	-23.41	42.22	6.13	37.58	35.34 Peak	100	100	HORIZONTAL

*Vertical*

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
1	15607.43	49.37	74.00	-24.63	41.00	6.13	37.58	35.34 Peak	100	208	VERTICAL
2	15610.34	36.87	54.00	-17.13	28.50	6.13	37.58	35.34 Average	100	208	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4 %
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11a Ch 48 / Ant. 1 + Ant. 2 + Ant.3
<b>Test Date</b>	Jul. 05, 2012		

***Horizontal***

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1 15719.21	57.23	74.00	-16.77	49.00	6.14	37.48	35.39	Peak	100	288	HORIZONTAL
2 15723.65	41.30	54.00	-12.70	33.07	6.14	37.48	35.39	Average	100	288	HORIZONTAL

***Vertical***

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1 15718.51	46.69	54.00	-7.31	38.46	6.14	37.48	35.39	Average	100	254	VERTICAL
2 15719.28	62.37	74.00	-11.63	54.14	6.14	37.48	35.39	Peak	100	254	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### **4.7.4. Test Setup Layout**

This test setup layout is the same as that shown in section 4.6.4.

#### **4.7.5. Test Deviation**

There is no deviation with the original standard.

#### **4.7.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4 %
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 36, 40, 48 /Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 18, 2012		

#### Channel 36

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	Pol/Phase	A/Pos	T/Pos
		Line	Limit	Level	Loss	Factor	Factor			cm	deg
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m				
1 !	5098.08	49.78	54.00	-4.22	12.41	4.31	0.00	33.06 Average	VERTICAL	102	307
2	5103.21	60.99	74.00	-13.01	23.62	4.31	0.00	33.06 Peak	VERTICAL	102	307
3 p	5173.27				74.71	4.35	0.00	33.17 Peak	VERTICAL	102	307
4 a	5177.76				63.41	4.36	0.00	33.19 Average	VERTICAL	102	307

Item3 , 4 are the fundamental frequency at 5180 MHz.

#### Channel 40

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	Pol/Phase	A/Pos	T/Pos
		Line	Limit	Level	Loss	Factor	Factor			cm	deg
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m				
1 !	5122.05	50.22	54.00	-3.78	12.81	4.32	0.00	33.09 Average	VERTICAL	103	320
2	5122.44	61.72	74.00	-12.28	24.31	4.32	0.00	33.09 Peak	VERTICAL	103	320
3 p	5202.24				75.36	4.37	0.00	33.22 Peak	VERTICAL	103	320
4 a	5202.24				64.77	4.37	0.00	33.22 Average	VERTICAL	103	320

Item 3, 4 are the fundamental frequency at 5200 MHz.

#### Channel 48

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	Pol/Phase	A/Pos	T/Pos
		Line	Limit	Level	Loss	Factor	Factor			cm	deg
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m				
1	5020.99	54.97	74.00	-19.03	17.76	4.26	0.00	32.95 Peak	HORIZONTAL	160	258
2 !	5020.99	49.04	54.00	-4.96	11.83	4.26	0.00	32.95 Average	HORIZONTAL	160	258
3 a	5237.60				62.20	4.39	0.00	33.27 Average	HORIZONTAL	160	258
4 p	5242.40				72.21	4.40	0.00	33.30 Peak	HORIZONTAL	160	258
5 !	5458.59	50.33	54.00	-3.67	12.17	4.54	0.00	33.62 Average	HORIZONTAL	160	258
6	5458.75	56.51	74.00	-17.49	18.35	4.54	0.00	33.62 Peak	HORIZONTAL	160	258

Item 3, 4 are the fundamental frequency at 5240 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4 %
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 38, 46 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 18, 2012		

### Channel 38

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
		Line	dB			dBuV	dB	dB						
MHz	dBuV/m	dBuV/m	dB										cm	deg
1 !	5147.12	51.65	54.00	-2.35	14.17	4.34	0.00	33.14	Average	VERTICAL	104	320		
2	5149.36	67.44	74.00	-6.56	29.96	4.34	0.00	33.14	Peak	VERTICAL	104	320		
3 p	5187.12				74.13	4.36	0.00	33.19	Peak	VERTICAL	104	320		
4 a	5187.12				62.26	4.36	0.00	33.19	Average	VERTICAL	104	320		

Item 3, 4 are the fundamental frequency at 5190 MHz.

### Channel 46

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
		Line	dB			dBuV	dB	dB						
MHz	dBuV/m	dBuV/m	dB										cm	deg
1	5146.80	61.36	74.00	-12.64	23.88	4.34	0.00	33.14	Peak	VERTICAL	103	320		
2 !	5147.12	50.48	54.00	-3.52	13.00	4.34	0.00	33.14	Average	VERTICAL	103	320		
3 p	5226.80				73.82	4.39	0.00	33.27	Peak	VERTICAL	103	320		
4 a	5227.12				62.49	4.39	0.00	33.27	Average	VERTICAL	103	320		

Item 3, 4 are the fundamental frequency at 5230 MHz.

### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11ac MCS0 VHT20MHz Ch 36, 40, 48 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 18, 2012		

### Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			Pol/Phase	A/Pos	T/Pos	
		Line	dB			Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg		
1 !	5102.56	50.82	54.00	-3.18	13.45	4.31	0.00	33.06	Average	VERTICAL	103	312
2	5102.89	61.60	74.00	-12.40	24.23	4.31	0.00	33.06	Peak	VERTICAL	103	312
3 p	5177.44				75.76	4.36	0.00	33.19	Peak	VERTICAL	103	312
4 a	5177.44				64.29	4.36	0.00	33.19	Average	VERTICAL	103	312

Item 3, 4 are the fundamental frequency at 5180 MHz.

### Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			Pol/Phase	A/Pos	T/Pos	
		Line	dB			Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg		
1	5117.95	61.77	74.00	-12.23	24.36	4.32	0.00	33.09	Peak	VERTICAL	103	312
2 !	5127.56	50.59	54.00	-3.41	13.15	4.33	0.00	33.11	Average	VERTICAL	103	312
3 a	5197.44				63.91	4.37	0.00	33.22	Average	VERTICAL	103	312
4 p	5202.24				74.19	4.37	0.00	33.22	Peak	VERTICAL	103	312

Item 3, 4 are the fundamental frequency at 5200 MHz.

### Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			Pol/Phase	A/Pos	T/Pos	
		Line	dB			Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg		
1	5021.25	53.63	74.00	-20.37	16.42	4.26	0.00	32.95	Peak	HORIZONTAL	161	283
2	5021.25	42.23	54.00	-11.77	5.02	4.26	0.00	32.95	Average	HORIZONTAL	161	283
3 p	5239.20				72.82	4.39	0.00	33.27	Peak	HORIZONTAL	161	283
4 a	5239.20				62.80	4.39	0.00	33.27	Average	HORIZONTAL	161	283
5 !	5458.65	51.49	54.00	-2.51	13.33	4.54	0.00	33.62	Average	HORIZONTAL	161	283
6	5458.75	56.73	74.00	-17.27	18.57	4.54	0.00	33.62	Peak	HORIZONTAL	161	283

Item 3, 4 are the fundamental frequency at 5240 MHz.

### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4 %
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11ac MCS0 VHT40MHz Ch 38, 46 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 18, 2012		

### Channel 38

Freq MHz	Level dBuV/m	Limit		Over Limit	Read Level dBuV	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos	
		Line dBuV/m	dB								cm	deg	
1	5142.31	66.46	74.00	-7.54	28.98	4.34	0.00	33.14	Peak	VERTICAL	103	312	
2	!	5147.76	51.24	54.00	-2.76	13.76	4.34	0.00	33.14	Average	VERTICAL	103	312
3	a	5177.50				61.47	4.36	0.00	33.19	Average	VERTICAL	103	312
4	p	5192.56				72.87	4.37	0.00	33.22	Peak	VERTICAL	103	312

Item 3, 4 are the fundamental frequency at 5190 MHz.

### Channel 46

Freq MHz	Level dBuV/m	Limit		Over Limit	Read Level dBuV	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos	
		Line dBuV/m	dB								cm	deg	
1	5142.31	61.11	74.00	-12.89	23.63	4.34	0.00	33.14	Peak	VERTICAL	103	319	
2	!	5147.44	50.22	54.00	-3.78	12.74	4.34	0.00	33.14	Average	VERTICAL	103	319
3	a	5227.12				62.75	4.39	0.00	33.27	Average	VERTICAL	103	319
4	p	5232.89				73.89	4.39	0.00	33.27	Peak	VERTICAL	103	319

Item 3, 4 are the fundamental frequency at 5230 MHz.

### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	21°C	Humidity	56.4%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac MCS0 VHT80MHz Ch 42 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 23, 2012		

**Channel 42**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	5150.00	52.40	54.00	-1.60	15.30	3.43	33.67	0.00 Average	100	277	VERTICAL
2	5150.00	71.66	74.00	-2.34	34.56	3.43	33.67	0.00 Peak	100	277	VERTICAL
3	5214.80				55.60	3.45	33.79	0.00 Average	100	277	VERTICAL
4	5214.80				68.80	3.45	33.79	0.00 Peak	100	277	VERTICAL
5	5350.00	41.32	54.00	-12.68	3.80	3.49	34.03	0.00 Average	100	277	VERTICAL
6	5350.00	52.47	74.00	-21.53	14.95	3.49	34.03	0.00 Peak	100	277	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

<b>Temperature</b>	21°C	<b>Humidity</b>	56.4 %
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11a Ch 36, 40, 48 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jul. 18, 2012		

### Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			Pol/Phase	A/Pos	T/Pos	
		Line	dB			dBuV	dB	dB/m				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m		cm	deg	
1	5100.96	59.80	74.00	-14.20	22.43	4.31	0.00	33.06	Peak	VERTICAL	102	280
2 !	5101.60	49.47	54.00	-4.53	12.10	4.31	0.00	33.06	Average	VERTICAL	102	280
3 a	5181.60				62.19	4.36	0.00	33.19	Average	VERTICAL	102	280
4 p	5181.92				72.80	4.36	0.00	33.19	Peak	VERTICAL	102	280

Item 3, 4 are the fundamental frequency at 5180 MHz.

### Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			Pol/Phase	A/Pos	T/Pos	
		Line	dB			dBuV	dB	dB/m				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m		cm	deg	
1	5121.80	62.05	74.00	-11.95	24.64	4.32	0.00	33.09	Peak	VERTICAL	103	254
2 !	5121.80	51.40	54.00	-2.60	13.99	4.32	0.00	33.09	Average	VERTICAL	103	254
3 a	5202.24				62.06	4.37	0.00	33.22	Average	VERTICAL	103	254
4 p	5202.56				72.08	4.37	0.00	33.22	Peak	VERTICAL	103	254

Item 3, 4 are the fundamental frequency at 5200 MHz.

### Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			Pol/Phase	A/Pos	T/Pos	
		Line	dB			dBuV	dB	dB/m				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m		cm	deg	
1	5021.25	55.36	74.00	-18.64	18.15	4.26	0.00	32.95	Peak	HORIZONTAL	160	290
2 !	5021.25	49.64	54.00	-4.36	12.43	4.26	0.00	32.95	Average	HORIZONTAL	160	290
3 p	5237.60				72.62	4.39	0.00	33.27	Peak	HORIZONTAL	160	290
4 a	5238.40				61.72	4.39	0.00	33.27	Average	HORIZONTAL	160	290
5	5458.75	57.18	74.00	-16.82	19.02	4.54	0.00	33.62	Peak	HORIZONTAL	160	290
6 !	5458.97	52.37	54.00	-1.63	14.21	4.54	0.00	33.62	Average	HORIZONTAL	160	290

Item 3, 4 are the fundamental frequency at 5240 MHz.

### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or  $\pm 20\text{ppm}$  (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6 \text{ ppm}$  and the limit is less than  $\pm 20\text{ppm}$  (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

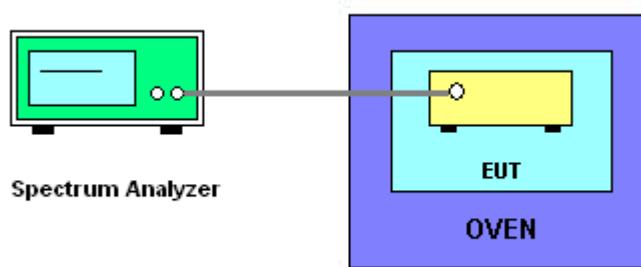

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5200.0066
110.00	5200.0046
93.50	5200.0023
Max. Deviation (MHz)	0.006600
Max. Deviation (ppm)	1.27

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5200.0112
-20	5200.0103
-10	5200.0088
0	5200.0046
10	5199.9963
20	5199.9942
30	5199.9938
40	5199.9929
50	5199.9912
Max. Deviation (MHz)	0.011200
Max. Deviation (ppm)	2.15

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Nov. 30, 2011	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 4, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 25, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 29, 2011	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 03, 2011	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2011	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Sep. 26, 2011	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	May 20, 2012	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2011	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 22, 2011	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	Jun. 07, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	May 09, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071042	1GHz – 18GHz	Nov. 01, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

\*\* Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sportun International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2010 to January 09, 2013  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangement with Foreign Authorities



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix