



**FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4 : 2003**

**(Class II Permissive Change)**

**TEST REPORT**

**For**

**802.11b/g miniPCI**

**Model : WM610-M**

**Trade Name : CyberTAN**

**Issued for**

**CyberTAN Technology, Inc.**

**99 Park Avenue III, Hsinchu Science Park,**

**Hsinchu 308, Taiwan, R.O.C.**

**Issued by**

**Compliance Certification Services Inc.**

**Hsinchu Lab.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd.,  
ChuTung Chen, Hsinchu, Taiwan 310, R.O.C

**TEL: (03) 591-0068**

**FAX: (03) 582-5720**



---

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



## **TABLE OF CONTENTS**

| TITLE                                                | PAGE NO.     |
|------------------------------------------------------|--------------|
| <b>1. TEST REPORT CERTIFICATION.....</b>             | <b>3</b>     |
| <b>2. EUT DESCRIPTION.....</b>                       | <b>4</b>     |
| 2.1 DESCRIPTION OF EUT & POWER.....                  | 4            |
| <b>3. DESCRIPTION OF TEST MODES.....</b>             | <b>5</b>     |
| <b>4. TEST METHODOLOGY.....</b>                      | <b>5</b>     |
| <b>5. FACILITIES AND ACCREDITATIONS.....</b>         | <b>6</b>     |
| 5.1 FACILITIES.....                                  | 6            |
| 5.2 EQUIPMENT.....                                   | 6            |
| 5.3 LABORATORY ACCREDITATIONS LISTINGS.....          | 6            |
| 5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....        | 7            |
| <b>6. CALIBRATION AND UNCERTAINTY.....</b>           | <b>8</b>     |
| 6.1 MEASURING INSTRUMENT CALIBRATION.....            | 8            |
| 6.2 MEASUREMENT UNCERTAINTY.....                     | 8            |
| <b>7. SETUP OF EQUIPMENT UNDER TEST.....</b>         | <b>9-10</b>  |
| <b>8. APPLICABLE LIMITS AND TEST RESULTS .....</b>   | <b>11</b>    |
| 8.1 MAXIMUM PERMISSIBLE EXPOSURE .....               | 11-12        |
| 8.2 RADIATED EMISSIONS .....                         | 13           |
| 8.2.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS .....  | 13-16        |
| 8.2.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz.....  | 17           |
| 8.2.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz..... | 18-29        |
| 8.2.4 RESTRICTED BAND EDGES .....                    | 30-45        |
| 8.3 POWERLINE CONDUCTED EMISSIONS.....               | 46-49        |
| <b>9. ANTENNA REQUIREMENT.....</b>                   | <b>50</b>    |
| 9.1 STANDARD APPLICABLE.....                         | 50           |
| 9.2 ANTENNA CONNECTED CONSTRUCTION.....              | 50           |
| <b>APPENDIX SETUP PHOTOS.....</b>                    | <b>51-53</b> |



## 1. TEST REPORT CERTIFICATION

**Applicant** : CyberTAN Technology, Inc.  
**Address** : 99 Park Avenue III, Hsinchu Science Park,  
Hsinchu 308, Taiwan, R.O.C.  
**Equipment Under Test** : 802.11b/g miniPCI  
**Model** : WM610-M  
**Trade Name** : CyberTAN  
**Tested Date** : February 01 ~ 04, 2005 ;  
September 04 ~ 13, 2005 & October 03, 2005

| APPLICABLE STANDARD                               |                         |
|---------------------------------------------------|-------------------------|
| STANDARD                                          | TEST RESULT             |
| FCC Part 15 Subpart C:2004 AND<br>ANSI C63.4:2003 | No non-compliance noted |

**Approved by:**

**Reviewed by:**

C. F. Wu October 03, 2005 Nick Yu October 05, 2005  
C. F. Wu Nick Yu  
Manager of Hsinchu Laboratory Test Engineer of Hsinchu Laboratory  
Compliance Certification Services Inc. Compliance Certification Services Inc.



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



## 2. EUT DESCRIPTION

### 2.1 DESCRIPTION OF EUT & POWER

|                                   |                                                                                                                              |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Name</b>               | 802.11b/g miniPCI                                                                                                            |
| <b>Model Number</b>               | WM610-M                                                                                                                      |
| <b>Frequency Range</b>            | IEEE 802.11b/g : 2412MHz to 2462MHz                                                                                          |
| <b>Transmit Power</b>             | IEEE 802.11b : 20.44dBm<br>IEEE 802.11g : 18.86dBm                                                                           |
| <b>Channel Spacing</b>            | 5MHz                                                                                                                         |
| <b>Channel Number</b>             | IEEE 802.11b/g : 11 Channels                                                                                                 |
| <b>Transmit Data Rate</b>         | IEEE 802.11b : 11, 5.5, 2, 1 Mbps<br>IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps                                        |
| <b>Type of Modulation</b>         | IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK)<br>IEEE 802.11g : OFDM (64QAM, 16AQM, QPSK, BPSK)                                    |
| <b>Frequency Selection</b>        | by software / firmware                                                                                                       |
| <b>Transmitter Classification</b> | Mobile device                                                                                                                |
| <b>Antenna Type</b>               | PIFA Antenna, Connector : I-Pex                                                                                              |
| <b>Antenna (1)</b>                | Company Name : JOINSOON ELECTRONICS MFG. CO., LTD<br>Model Name : JEM 23-53E585AC00<br>Antenna Gain : Main 2dBi, Aux 1.93dBi |
| <b>Antenna (2)</b>                | Company Name : SmartAnt Telecom Co., Ltd.<br>Model Name : SmartAnt R0422-039<br>Antenna Gain : Main 2dBi, Aux 2.01dBi        |
| <b>Power Source</b>               | 3.3VDC (From Notebook PC)                                                                                                    |
| <b>Class II Permissive Change</b> | Add two PIFA Antenna please refer to Antenna (1)<br>and Antenna (2)                                                          |

Multiple List :

| Model                                 | Series Model       | Trade Name        | Antenna            |
|---------------------------------------|--------------------|-------------------|--------------------|
| AL51 ; N521X<br>(X=0~9, A~Z or Blank) | N/A                | Compal ; Gigabyte | SmartAnt R0422-039 |
| DL71                                  | DL70               | Compal            | JEM 23-53E585AC00  |
| DL71                                  | DL70 ; DL75 ; DL76 | Compal            | JEM 23-53E585AC00  |

**Remark :**

1. This report is modified from EC05-02-001FRF.
2. For more details, please refer to the User's manual of the EUT.



### 3. DESCRIPTION OF TEST MODES

The EUT (WM610-M) had been tested under operating condition.

There are three channels have been tested as following :

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low     | 2412            |
| Middle  | 2437            |
| High    | 2462            |

IEEE 802.11b : 11Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g : 6Mbps data rate (worst case) were chosen for full testing.

### 4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CRF 47 2.1046, 2046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd., Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3 LABORATORY ACCREDITATIONS LISTINGS**

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200118-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: 90585 and 90584).



## 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency          | Scope of Accreditation                                                                                                                                                                                                                                                              | Logo                                                                                                                                                                                        |
|---------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| USA     | NVLAP           | EN 55014-1, AS/NZS 1044, CNS 13783-1, IEC/CISPR 14-1, IEC/CISPR 22, EN 55022, EN 61000-3-2, EN 61000-3-3, ANSI C63.4, AS/NZS CISPR 22, AS/NZS 3548, IEC 61000-4-2/3/4/5/6/8/11                                                                                                      | <br>200118-0                                                                                             |
| USA     | FCC             | 3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements                                                                                                                                                                                                              | <br>90585, 90584                                                                                         |
| Japan   | VCCI            | 3/10 meter Open Area Test Sites to perform conducted/radiated measurements                                                                                                                                                                                                          | <b>VCCI</b><br>R-1229/1189<br>C-1250/1294                                                                                                                                                   |
| Taiwan  | CNLA            | FCC Method-47 CFR Part 15 Subpart C,D,E CISPR 11, FCC METHOD-47 CFR Part 18, EN 55011, CNS 13803, CISPR 13, CNS 13439, FCC Method-47 CFR Part 15 Subpart B, CISPR 14-1, EN 55014-1, CNS 13783-1, EN 55015, CNS 14115, CISPR 22, EN 55022, VCCI CNS 13438, EN 61000-4-2/3/4/5/6/8/11 | <br><b>0240</b><br>ILAC MRA                                                                             |
| Taiwan  | BSMI            | CNS 13803, CNS 13438, CNS 13439, CNS 13783-1, CNS 14115                                                                                                                                                                                                                             | <br>SL2-IS-E-0002<br>SL2-IN-E-0002<br>SL2-A1-E-0002<br>SL2-R1-E-0002<br>SL2-R2-E-0002<br>SL2-L1-E-0002 |
| Canada  | Industry Canada | RSS212, Issue 1                                                                                                                                                                                                                                                                     | <br>IC 4417-1                                                                                          |

\* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



## 6. CALIBRATION AND UNCERTAINTY

### 6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                         | UNCERTAINTY |
|-----------------------------------|-------------|
| Radiated Emission, 30 to 1000 MHz | +/- 3.2 dB  |
| Radiated Emission, 1 to 26.5 GHz  | +/- 3.2 dB  |
| Power Line Conducted Emission     | +/- 2.9 dB  |

Uncertainty figures are valid to a confidence level of 95%




## 7. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

| No. | Product     | Manufacturer | Model No.    | Serial No.       | FCC ID |
|-----|-------------|--------------|--------------|------------------|--------|
| 1   | Notebook PC | COMPAQ       | N 800V       | 5Y33KSQZMOXV 1YR | DoC    |
| 2   | Printer     | HP           | Deskjet 948c | CN19T6S011       | DoC    |
| 3   | Mouse       | Logitech     | M-BJ58       | LNA14607307      | DoC    |

### SETUP DIAGRAM FOR TESTS

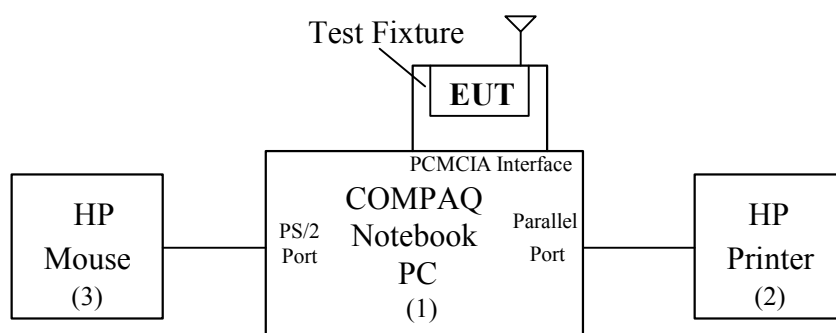



## **EUT OPERATING CONDITION**

1. Press DutApiclass test program to implement continue TX or RX mode.

2. For 802.11b mode test :

(1) 75 : Hardware Initialization

(2) 12 1 Set channel 1=Channel 1

(3) 22 1 18 : Set channel and power at Antenna with calibration Data.

1 = Channel 1, 18 = 18dBm

(4) 25 1 4 : Sets device to duty cycle transmit at 11Mbps.

1 = Enable 1, 4 = 11Mbps

(5) 25 0 : disable

(6) 17 1 4 : Set the device for continuous transmission.

1 = Enable 1, 4 = 11Mbps

3. For 802.11g mode test :

(1) 75 : Hardware Initialization

(2) 12 1 set channel 1=Channel 1

(3) 22 1 14 : Set channel and power at Antenna with calibration Data.

1 = Channel 1, 14 = 14dBm

(4) 25 1 6 : Sets device to duty cycle transmit at 6Mbps.

1 = Enable 1, 6 = 6Mbps

(5) 25 0 : disable

(6) 17 1 6 : Set the device for continuous transmission.

1 = Enable 1, 6 = 6Mbps

4. For RX mode test :

(1) 75 : Hardware Initialization

(2) 12 1 : Set RF channel

(3) 31 : start RX mode test.



## 8. APPLICABLE LIMITS AND TEST RESULTS

### 8.1 MAXIMUM PERMISSIBLE EXPOSURE

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b) LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency Range (MHz)                                   | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Average Time |
|---------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------|
| (A) Limits for Occupational / Control Exposures         |                               |                               |                                     |              |
| 300-1,500                                               | --                            | --                            | F/300                               | 6            |
| 1,500-100,000                                           | --                            | --                            | 5                                   | 6            |
| (B) Limits for General Population / Uncontrol Exposures |                               |                               |                                     |              |
| 300-1,500                                               | --                            | --                            | F/1500                              | 6            |
| 1,500-100,000                                           | --                            | --                            | 1                                   | 30           |

### CALCULATIONS

Given  $E = \frac{\sqrt{30 \times P \times G}}{d}$  &  $S = \frac{E^2}{3770}$

Where  $E$  = Field strength in Volts / meter

$P$  = Power in Watts

$G$  = Numeric antenna gain

$d$  = Distance in meters

$S$  = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770 d^2}$$

Changing to units of mW and cm, using:

$$P (mW) = P (W) / 1000 \text{ and}$$

$$d (cm) = d(m) / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

Where  $d$  = Distance in cm

$P$  = Power in mW

$G$  = Numeric antenna gain

$S$  = Power density in mW / cm<sup>2</sup>

**LIMIT**Power Density Limit,  $S=1.0\text{mW/cm}^2$ **TEST RESULTS**

No non-compliance noted

| Mode         | Minimum separation distance (cm) | Output Power (dBm) | Antenna Gain (dBi) | Power Density Limit (mW/cm <sup>2</sup> ) | Power Density at 20cm (mW/cm <sup>2</sup> ) |
|--------------|----------------------------------|--------------------|--------------------|-------------------------------------------|---------------------------------------------|
| IEEE 802.11b | 20.0                             | 20.44              | 2                  | 1.00                                      | 0.034892                                    |
| IEEE 802.11g | 20.0                             | 18.86              | 2                  | 1.00                                      | 0.024250                                    |

**Remark:** For mobile or fixed location transmitters, the maximum power density is  $1.0\text{ mW/cm}^2$  even if the calculation indicates that the power density would be larger.



## 8.2 RADIATED EMISSIONS

### 8.2.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

#### LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2655 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3338   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 - 88            | 100 **                               | 3                                |
| 88 - 216           | 150 **                               | 3                                |
| 216 - 960          | 200 **                               | 3                                |
| Above 960          | 500                                  | 3                                |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

### **TEST EQUIPMENTS**


The following test equipments are utilized in making the measurements contained in this report.

| Manufacturer or Type      | Model No.   | Serial No. | Date of Calibration | Calibration Period | Remark |
|---------------------------|-------------|------------|---------------------|--------------------|--------|
| CHASE BI-LOG ANTENNA      | CBL6112B    | 2817       | March 22, 2005      | 1 Year             | FINAL  |
| R/S SPECTRUM ANALYZER     | FSEK30      | 835253/002 | September 24, 2005  | 1 Year             | FINAL  |
| Agilent SPECTRUM ANALYZER | E4446A      | MY43360132 | Jane 26, 2005       | 1 Year             | FINAL  |
| R/S EMI TEST RECEIVER     | ESCS30      | 835418/008 | August 24, 2005     | 1 Year             | FINAL  |
| OPEN SITE                 | -----       | No.2       | May 07, 2005        | 1 Year             | FINAL  |
| N TYPE COAXIAL CABLE      | CHA9525     | 4          | June 03, 2005       | 1 Year             | FINAL  |
| Horn Antenna              | 96001       | 2698       | April 09, 2005      | 1 Year             | FINAL  |
| HP Pre-amplifier          | 8449B       | 3008A01471 | November 24, 2004   | 1 Year             | FINAL  |
| HP High pass filter       | 84300/80038 | 002        | CAL. ON USE         | 1 Year             | FINAL  |




### **TEST SETUP**

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

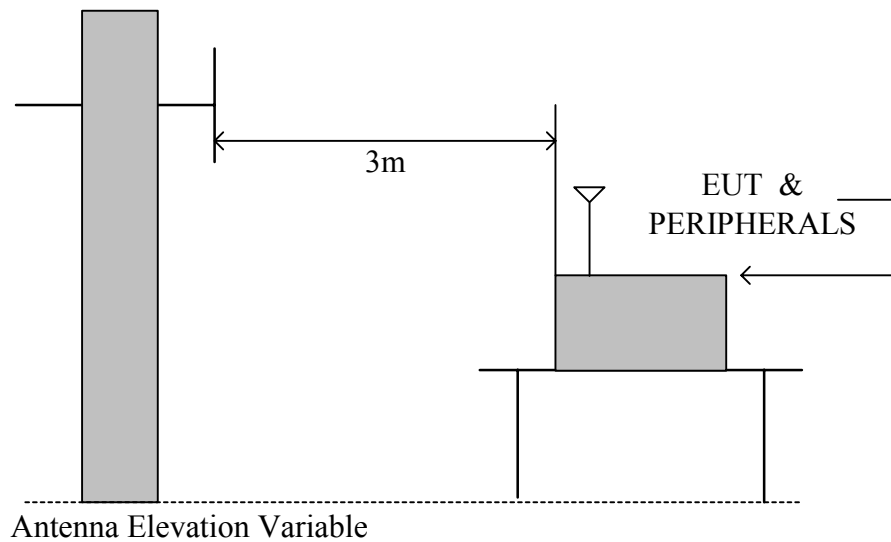

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

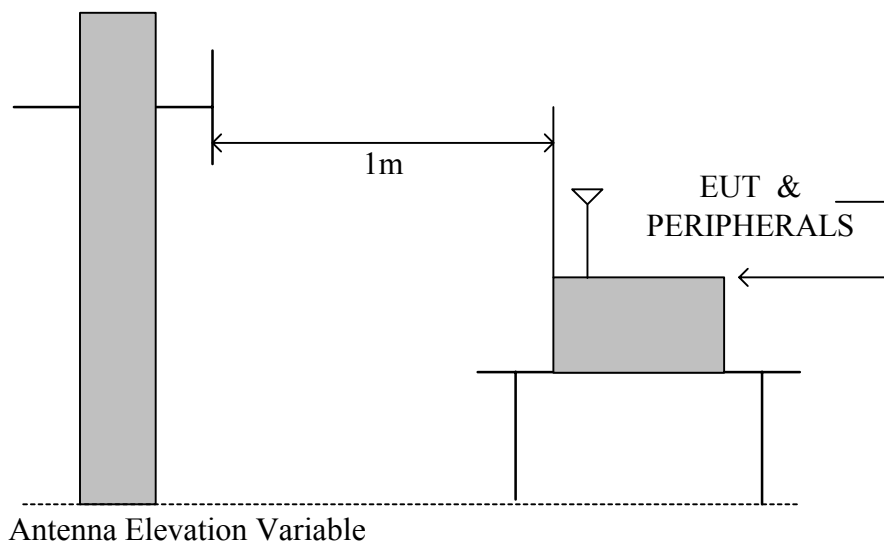



## **TEST PROCEDURE**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 1 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

### **Note :**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

## **TEST RESULTS**

No non-compliance noted



## 8.2.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

|                     |                                           |                            |              |
|---------------------|-------------------------------------------|----------------------------|--------------|
| <b>Product Name</b> | 802.11b/g miniPCI                         | <b>Test Date</b>           | 2005/09/04   |
| <b>Model</b>        | WM610-M                                   | <b>Test By</b>             | Nicky Liu    |
| <b>Test Mode</b>    | Normal operating / Antenna 1 (worst case) | <b>TEMP &amp; Humidity</b> | 32.2 °C, 52% |

| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading at 3m(dBμV) |          | Limits (dBμV/m) | Emission Level at 3m(dBμV/m) |          |
|-----------------|-----------------------|-----------------|---------------------------|----------|-----------------|------------------------------|----------|
|                 |                       |                 | Horizontal                | Vertical |                 | Horizontal                   | Vertical |
| 166.70          | 10.97                 | 2.72            | 12.60                     | 20.80    | 43.50           | 26.29                        | 34.49    |
| 199.50          | 11.18                 | 3.13            | 15.70                     | 13.40    | 43.50           | 30.01                        | 27.71    |
| 232.24          | 12.43                 | 3.70            | 23.80                     | 21.30    | 46.00           | 39.93                        | 37.43    |
| 265.98          | 13.45                 | 4.10            | 14.60                     | 10.30    | 46.00           | 32.15                        | 27.85    |
| 300.01          | 14.20                 | 4.30            | 20.70                     | 11.80    | 46.00           | 39.20                        | 30.30    |
| 332.80          | 15.12                 | 4.48            | 9.10                      | 6.20     | 46.00           | 28.70                        | 25.80    |
| 668.47          | 20.32                 | 6.07            | 5.20                      | 7.10     | 46.00           | 31.60                        | 33.50    |
| 702.99          | 20.73                 | 6.29            | 3.70                      | 2.80     | 46.00           | 30.71                        | 29.81    |

**Remark:** Emission level (dBμV/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).



### 8.2.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

|              |                          |                 |             |
|--------------|--------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI        | Test Date       | 2005/10/03  |
| Model        | WM610-M                  | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11b TX (CH Low) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4823.84                                        | 64.68          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 61.51          | 74.00          | -12.49      | P            | 1.00           |
| 4823.84                                        | 52.68          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 49.51          | 54.00          | -4.49       | A            | 1.00           |
| 7236.00                                        | 47.25          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 50.26          | 74.00          | -23.74      | P            | 1.00           |
| 7236.00                                        | 35.12          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 38.13          | 54.00          | -15.87      | A            | 1.00           |
| 9648.00                                        | 47.55          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 50.02          | 74.00          | -23.98      | P            | 1.00           |
| 9648.00                                        | 35.23          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 37.70          | 54.00          | -16.30      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4823.86                                        | 67.28          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 64.11          | 74.00          | -9.89       | P            | 1.00           |
| 4823.86                                        | 54.93          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 51.76          | 54.00          | -2.24       | A            | 1.00           |
| 7236.00                                        | 45.85          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 48.86          | 74.00          | -25.14      | P            | 1.00           |
| 7236.00                                        | 33.84          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 36.85          | 54.00          | -17.15      | A            | 1.00           |
| 9648.00                                        | 46.23          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 48.70          | 74.00          | -25.30      | P            | 1.00           |
| 9648.00                                        | 34.12          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 36.59          | 54.00          | -17.41      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level-Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (1).



|              |                             |                 |             |
|--------------|-----------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI           | Test Date       | 2005/10/03  |
| Model        | WM610-M                     | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11b TX (CH Middle) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4874.06                                        | 64.00          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 60.78          | 74.00          | -13.22      | P            | 1.00           |
| 4874.06                                        | 53.01          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 49.79          | 54.00          | -4.21       | A            | 1.00           |
| 7311.77                                        | 45.12          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 48.36          | 74.00          | -25.64      | P            | 1.00           |
| 7311.77                                        | 32.88          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 36.12          | 54.00          | -17.88      | A            | 1.00           |
| 9747.61                                        | 44.85          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 47.13          | 74.00          | -26.87      | P            | 1.00           |
| 9747.61                                        | 33.47          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 35.75          | 54.00          | -18.25      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4874.08                                        | 66.98          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 63.76          | 74.00          | -10.24      | P            | 1.00           |
| 4874.08                                        | 54.85          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 51.63          | 54.00          | -2.37       | A            | 1.00           |
| 7311.77                                        | 45.12          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 48.36          | 74.00          | -25.64      | P            | 1.00           |
| 7311.77                                        | 33.58          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 36.82          | 54.00          | -17.18      | A            | 1.00           |
| 9747.61                                        | 45.84          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 48.12          | 74.00          | -25.88      | P            | 1.00           |
| 9747.61                                        | 34.25          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 36.53          | 54.00          | -17.47      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (1).



|              |                           |                 |             |
|--------------|---------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI         | Test Date       | 2005/10/03  |
| Model        | WM610-M                   | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11b TX (CH High) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4924.12                                        | 63.25          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 59.97          | 74.00          | -14.03      | P            | 1.00           |
| 4924.12                                        | 50.93          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 47.65          | 54.00          | -6.35       | A            | 1.00           |
| 7386.00                                        | 45.25          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 48.72          | 74.00          | -25.28      | P            | 1.00           |
| 7386.00                                        | 34.12          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 37.59          | 54.00          | -16.41      | A            | 1.00           |
| 9848.00                                        | 46.12          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 48.22          | 74.00          | -25.78      | P            | 1.00           |
| 9848.00                                        | 35.47          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 37.57          | 54.00          | -16.43      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4924.10                                        | 65.23          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 61.95          | 74.00          | -12.05      | P            | 1.00           |
| 4924.10                                        | 52.92          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 49.64          | 54.00          | -4.36       | A            | 1.00           |
| 7386.00                                        | 46.12          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 49.59          | 74.00          | -24.41      | P            | 1.00           |
| 7386.00                                        | 34.25          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 37.72          | 54.00          | -16.28      | A            | 1.00           |
| 9848.00                                        | 45.12          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 47.22          | 74.00          | -26.78      | P            | 1.00           |
| 9848.00                                        | 33.47          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 35.57          | 54.00          | -18.43      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (1).



|              |                          |                 |             |
|--------------|--------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI        | Test Date       | 2005/10/03  |
| Model        | WM610-M                  | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11g TX (CH Low) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4824.80                                        | 61.35          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 58.18          | 74.00          | -15.82      | P            | 1.00           |
| 4824.80                                        | 48.52          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 45.35          | 54.00          | -8.65       | A            | 1.00           |
| 7236.00                                        | 45.65          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 48.66          | 74.00          | -25.34      | P            | 1.00           |
| 7236.00                                        | 32.58          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 35.59          | 54.00          | -18.41      | A            | 1.00           |
| 9648.00                                        | 44.85          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 47.32          | 74.00          | -26.68      | P            | 1.00           |
| 9648.00                                        | 32.84          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 35.31          | 54.00          | -18.69      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4824.92                                        | 63.18          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 60.01          | 74.00          | -13.99      | P            | 1.00           |
| 4824.92                                        | 50.49          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 47.32          | 54.00          | -6.68       | A            | 1.00           |
| 7236.00                                        | 45.85          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 48.86          | 74.00          | -25.14      | P            | 1.00           |
| 7236.00                                        | 33.84          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 36.85          | 54.00          | -17.15      | A            | 1.00           |
| 9648.00                                        | 46.12          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 48.59          | 74.00          | -25.41      | P            | 1.00           |
| 9648.00                                        | 33.74          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 36.21          | 54.00          | -17.79      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (1).



|              |                             |                 |             |
|--------------|-----------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI           | Test Date       | 2005/10/03  |
| Model        | WM610-M                     | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11g TX (CH Middle) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4874.08                                        | 61.56          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 58.34          | 74.00          | -15.66      | P            | 1.00           |
| 4874.08                                        | 48.30          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 45.08          | 54.00          | -8.92       | A            | 1.00           |
| 7311.77                                        | 47.22          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 50.46          | 74.00          | -23.54      | P            | 1.00           |
| 7311.77                                        | 35.69          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 38.93          | 54.00          | -15.07      | A            | 1.00           |
| 9747.61                                        | 45.88          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 48.16          | 74.00          | -25.84      | P            | 1.00           |
| 9747.61                                        | 34.08          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 36.36          | 54.00          | -17.64      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4874.08                                        | 62.88          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 59.66          | 74.00          | -14.34      | P            | 1.00           |
| 4874.08                                        | 50.02          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 46.80          | 54.00          | -7.20       | A            | 1.00           |
| 7311.77                                        | 46.12          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 49.36          | 74.00          | -24.64      | P            | 1.00           |
| 7311.77                                        | 35.20          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 38.44          | 54.00          | -15.56      | A            | 1.00           |
| 9747.61                                        | 44.85          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 47.13          | 74.00          | -26.87      | P            | 1.00           |
| 9747.61                                        | 33.44          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 35.72          | 54.00          | -18.28      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (1).



|              |                           |                 |             |
|--------------|---------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI         | Test Date       | 2005/10/03  |
| Model        | WM610-M                   | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11g TX (CH High) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4924.00                                        | 60.25          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 56.97          | 74.00          | -17.03      | P            | 1.00           |
| 4924.00                                        | 47.00          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 43.72          | 54.00          | -10.28      | A            | 1.00           |
| 7386.00                                        | 45.25          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 48.72          | 74.00          | -25.28      | P            | 1.00           |
| 7386.00                                        | 34.12          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 37.59          | 54.00          | -16.41      | A            | 1.00           |
| 9848.00                                        | 45.87          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 47.97          | 74.00          | -26.03      | P            | 1.00           |
| 9848.00                                        | 33.65          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 35.75          | 54.00          | -18.25      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4924.00                                        | 62.76          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 59.48          | 74.00          | -14.52      | P            | 1.00           |
| 4924.00                                        | 49.52          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 46.24          | 54.00          | -7.76       | A            | 1.00           |
| 7386.00                                        | 45.25          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 48.72          | 74.00          | -25.28      | P            | 1.00           |
| 7386.00                                        | 33.74          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 37.21          | 54.00          | -16.79      | A            | 1.00           |
| 9848.00                                        | 45.65          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 47.75          | 74.00          | -26.25      | P            | 1.00           |
| 9848.00                                        | 33.49          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 35.59          | 54.00          | -18.41      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (1).



|              |                          |                 |             |
|--------------|--------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI        | Test Date       | 2005/10/03  |
| Model        | WM610-M                  | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11b TX (CH Low) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4823.78                                        | 64.25          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 61.08          | 74.00          | -12.92      | P            | 1.00           |
| 4823.78                                        | 52.12          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 48.95          | 54.00          | -5.05       | A            | 1.00           |
| 7236.00                                        | 47.25          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 50.26          | 74.00          | -23.74      | P            | 1.00           |
| 7236.00                                        | 33.58          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 36.59          | 54.00          | -17.41      | A            | 1.00           |
| 9648.00                                        | 45.25          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 47.72          | 74.00          | -26.28      | P            | 1.00           |
| 9648.00                                        | 33.45          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 35.92          | 54.00          | -18.08      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4823.86                                        | 67.59          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 64.42          | 74.00          | -9.58       | P            | 1.00           |
| 4823.86                                        | 55.02          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 51.85          | 54.00          | -2.15       | A            | 1.00           |
| 7236.00                                        | 47.98          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 50.99          | 74.00          | -23.01      | P            | 1.00           |
| 7236.00                                        | 35.25          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 38.26          | 54.00          | -15.74      | A            | 1.00           |
| 9648.00                                        | 45.12          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 47.59          | 74.00          | -26.41      | P            | 1.00           |
| 9648.00                                        | 35.12          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 37.59          | 54.00          | -16.41      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (2).



|              |                             |                 |             |
|--------------|-----------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI           | Test Date       | 2005/10/03  |
| Model        | WM610-M                     | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11b TX (CH Middle) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4874.06                                        | 63.85          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 60.63          | 74.00          | -13.37      | P            | 1.00           |
| 4874.06                                        | 52.79          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 49.57          | 54.00          | -4.43       | A            | 1.00           |
| 7311.77                                        | 44.12          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 47.36          | 74.00          | -26.64      | P            | 1.00           |
| 7311.77                                        | 33.58          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 36.82          | 54.00          | -17.18      | A            | 1.00           |
| 9747.61                                        | 45.65          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 47.93          | 74.00          | -26.07      | P            | 1.00           |
| 9747.61                                        | 33.50          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 35.78          | 54.00          | -18.22      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4874.08                                        | 66.87          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 63.65          | 74.00          | -10.35      | P            | 1.00           |
| 4874.08                                        | 54.65          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 51.43          | 54.00          | -2.57       | A            | 1.00           |
| 7311.77                                        | 47.12          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 50.36          | 74.00          | -23.64      | P            | 1.00           |
| 7311.77                                        | 35.22          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 38.46          | 54.00          | -15.54      | A            | 1.00           |
| 9747.61                                        | 45.32          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 47.60          | 74.00          | -26.40      | P            | 1.00           |
| 9747.61                                        | 34.25          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 36.53          | 54.00          | -17.47      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (2).



|                     |                           |                            |             |
|---------------------|---------------------------|----------------------------|-------------|
| <b>Product Name</b> | 802.11b/g miniPCI         | <b>Test Date</b>           | 2005/10/03  |
| <b>Model</b>        | WM610-M                   | <b>Test By</b>             | Nicky Liu   |
| <b>Test Mode</b>    | IEEE 802.11b TX (CH High) | <b>TEMP &amp; Humidity</b> | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                   |              |               |                 |              |                |                   |                   |                |                 |                   |
|------------------------------------------------|-------------------|--------------|---------------|-----------------|--------------|----------------|-------------------|-------------------|----------------|-----------------|-------------------|
| Freq.<br>(MHz)                                 | Reading<br>(dBμV) | AF<br>(dBμV) | Cable<br>(dB) | Pre-amp<br>(dB) | Dist<br>(dB) | Filter<br>(dB) | Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Mark<br>(P/Q/A) | Height<br>(Meter) |
| 4924.12                                        | 63.01             | 34.74        | 5.12          | 35.24           | 9.50         | 1.60           | 59.73             | 74.00             | -14.27         | P               | 1.00              |
| 4924.12                                        | 50.11             | 34.74        | 5.12          | 35.24           | 9.50         | 1.60           | 46.83             | 54.00             | -7.17          | A               | 1.00              |
| 7386.00                                        | 45.25             | 39.75        | 6.84          | 35.62           | 9.50         | 2.00           | 48.72             | 74.00             | -25.28         | P               | 1.00              |
| 7386.00                                        | 35.12             | 39.75        | 6.84          | 35.62           | 9.50         | 2.00           | 38.59             | 54.00             | -15.41         | A               | 1.00              |
| 9848.00                                        | 45.85             | 39.50        | 8.37          | 36.76           | 9.50         | 0.49           | 47.95             | 74.00             | -26.05         | P               | 1.00              |
| 9848.00                                        | 33.44             | 39.50        | 8.37          | 36.76           | 9.50         | 0.49           | 35.54             | 54.00             | -18.46         | A               | 1.00              |
| Measurement Distance at 1m Vertical polarity   |                   |              |               |                 |              |                |                   |                   |                |                 |                   |
| Freq.<br>(MHz)                                 | Reading<br>(dBμV) | AF<br>(dBμV) | Cable<br>(dB) | Pre-amp<br>(dB) | Dist<br>(dB) | Filter<br>(dB) | Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Mark<br>(P/Q/A) | Height<br>(Meter) |
| 4924.10                                        | 64.95             | 34.74        | 5.12          | 35.24           | 9.50         | 1.60           | 61.67             | 74.00             | -12.33         | P               | 1.00              |
| 4924.10                                        | 51.78             | 34.74        | 5.12          | 35.24           | 9.50         | 1.60           | 48.50             | 54.00             | -5.50          | A               | 1.00              |
| 7386.00                                        | 47.12             | 39.75        | 6.84          | 35.62           | 9.50         | 2.00           | 50.59             | 74.00             | -23.41         | P               | 1.00              |
| 7386.00                                        | 35.88             | 39.75        | 6.84          | 35.62           | 9.50         | 2.00           | 39.35             | 54.00             | -14.65         | A               | 1.00              |
| 9848.00                                        | 46.32             | 39.50        | 8.37          | 36.76           | 9.50         | 0.49           | 48.42             | 74.00             | -25.58         | P               | 1.00              |
| 9848.00                                        | 35.47             | 39.50        | 8.37          | 36.76           | 9.50         | 0.49           | 37.57             | 54.00             | -16.43         | A               | 1.00              |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (2).



|              |                          |                 |             |
|--------------|--------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI        | Test Date       | 2005/10/03  |
| Model        | WM610-M                  | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11g TX (CH Low) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4823.86                                        | 61.40          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 58.23          | 74.00          | -15.77      | P            | 1.00           |
| 4823.86                                        | 48.25          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 45.08          | 54.00          | -8.92       | A            | 1.00           |
| 7236.00                                        | 45.12          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 48.13          | 74.00          | -25.87      | P            | 1.00           |
| 7236.00                                        | 34.25          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 37.26          | 54.00          | -16.74      | A            | 1.00           |
| 9648.00                                        | 44.56          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 47.03          | 74.00          | -26.97      | P            | 1.00           |
| 9648.00                                        | 33.14          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 35.61          | 54.00          | -18.39      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4823.86                                        | 62.87          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 59.70          | 74.00          | -14.30      | P            | 1.00           |
| 4823.86                                        | 50.03          | 34.40     | 5.08       | 35.16        | 9.50      | 2.00        | 46.86          | 54.00          | -7.14       | A            | 1.00           |
| 7236.00                                        | 45.25          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 48.26          | 74.00          | -25.74      | P            | 1.00           |
| 7236.00                                        | 34.33          | 39.42     | 6.74       | 35.65        | 9.50      | 2.00        | 37.34          | 54.00          | -16.66      | A            | 1.00           |
| 9648.00                                        | 45.00          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 47.47          | 74.00          | -26.53      | P            | 1.00           |
| 9648.00                                        | 33.85          | 39.50     | 8.29       | 36.44        | 9.50      | 0.61        | 36.32          | 54.00          | -17.68      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (2).



|              |                             |                 |             |
|--------------|-----------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI           | Test Date       | 2005/10/03  |
| Model        | WM610-M                     | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11g TX (CH Middle) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4874.08                                        | 61.23          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 58.01          | 74.00          | -15.99      | P            | 1.00           |
| 4874.08                                        | 47.98          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 44.76          | 54.00          | -9.24       | A            | 1.00           |
| 7311.77                                        | 44.56          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 47.80          | 74.00          | -26.20      | P            | 1.00           |
| 7311.77                                        | 32.85          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 36.09          | 54.00          | -17.91      | A            | 1.00           |
| 9747.61                                        | 45.12          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 47.40          | 74.00          | -26.60      | P            | 1.00           |
| 9747.61                                        | 33.74          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 36.02          | 54.00          | -17.98      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4874.08                                        | 62.45          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 59.23          | 74.00          | -14.77      | P            | 1.00           |
| 4874.08                                        | 49.56          | 34.57     | 5.10       | 35.20        | 9.50      | 1.80        | 46.34          | 54.00          | -7.66       | A            | 1.00           |
| 7311.77                                        | 45.23          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 48.47          | 74.00          | -25.53      | P            | 1.00           |
| 7311.77                                        | 33.87          | 39.59     | 6.79       | 35.64        | 9.50      | 2.00        | 37.11          | 54.00          | -16.89      | A            | 1.00           |
| 9747.61                                        | 45.26          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 47.54          | 74.00          | -26.46      | P            | 1.00           |
| 9747.61                                        | 34.25          | 39.50     | 8.33       | 36.60        | 9.50      | 0.55        | 36.53          | 54.00          | -17.47      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (2).



|              |                           |                 |             |
|--------------|---------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI         | Test Date       | 2005/10/03  |
| Model        | WM610-M                   | Test By         | Nicky Liu   |
| Test Mode    | IEEE 802.11g TX (CH High) | TEMP & Humidity | 31.0°C, 48% |

| Measurement Distance at 1m Horizontal polarity |                |           |            |              |           |             |                |                |             |              |                |
|------------------------------------------------|----------------|-----------|------------|--------------|-----------|-------------|----------------|----------------|-------------|--------------|----------------|
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4924.00                                        | 60.00          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 56.72          | 74.00          | -17.28      | P            | 1.00           |
| 4924.00                                        | 46.58          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 43.30          | 54.00          | -10.70      | A            | 1.00           |
| 7386.00                                        | 44.26          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 47.73          | 74.00          | -26.27      | P            | 1.00           |
| 7386.00                                        | 33.74          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 37.21          | 54.00          | -16.79      | A            | 1.00           |
| 9848.00                                        | 45.36          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 47.46          | 74.00          | -26.54      | P            | 1.00           |
| 9848.00                                        | 34.56          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 36.66          | 54.00          | -17.34      | A            | 1.00           |
| Measurement Distance at 1m Vertical polarity   |                |           |            |              |           |             |                |                |             |              |                |
| Freq. (MHz)                                    | Reading (dBμV) | AF (dBμV) | Cable (dB) | Pre-amp (dB) | Dist (dB) | Filter (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Mark (P/Q/A) | Height (Meter) |
| 4924.00                                        | 62.48          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 59.20          | 74.00          | -14.80      | P            | 1.00           |
| 4924.00                                        | 49.26          | 34.74     | 5.12       | 35.24        | 9.50      | 1.60        | 45.98          | 54.00          | -8.02       | A            | 1.00           |
| 7386.00                                        | 44.12          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 47.59          | 74.00          | -26.41      | P            | 1.00           |
| 7386.00                                        | 33.58          | 39.75     | 6.84       | 35.62        | 9.50      | 2.00        | 37.05          | 54.00          | -16.95      | A            | 1.00           |
| 9848.00                                        | 45.63          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 47.73          | 74.00          | -26.27      | P            | 1.00           |
| 9848.00                                        | 33.47          | 39.50     | 8.37       | 36.76        | 9.50      | 0.49        | 35.57          | 54.00          | -18.43      | A            | 1.00           |

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:  
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Antenna (2).




## 8.2.4 RESTRICTED BAND EDGES

### Antenna (1)


Detector mode : Peak



Polarity : Horizontal


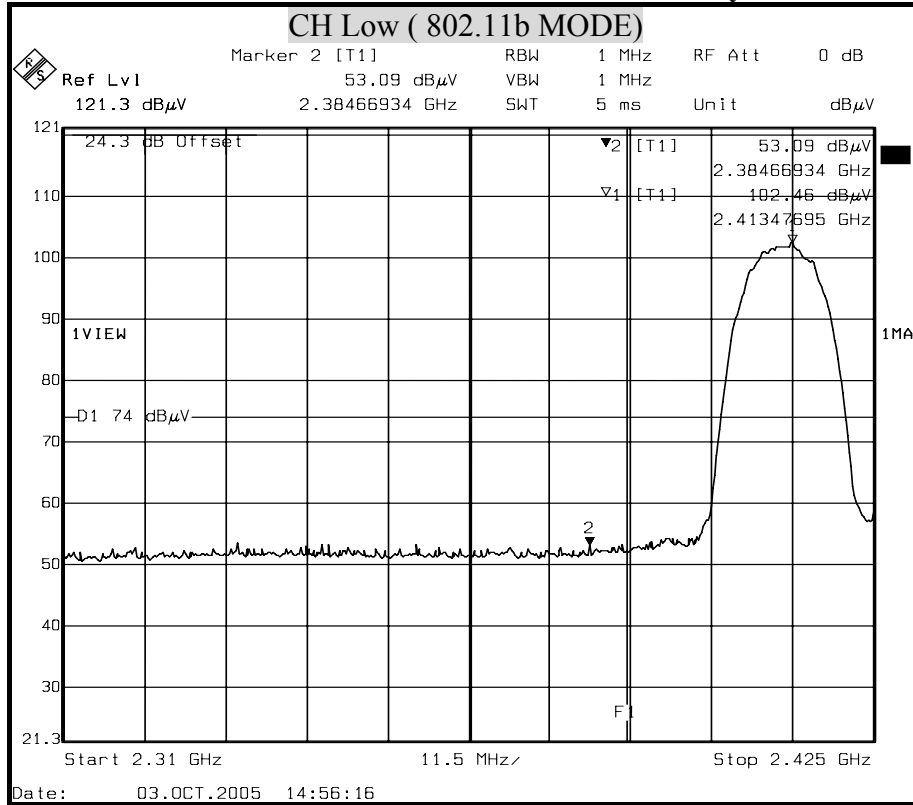




Detector mode : Average

Polarity : Horizontal

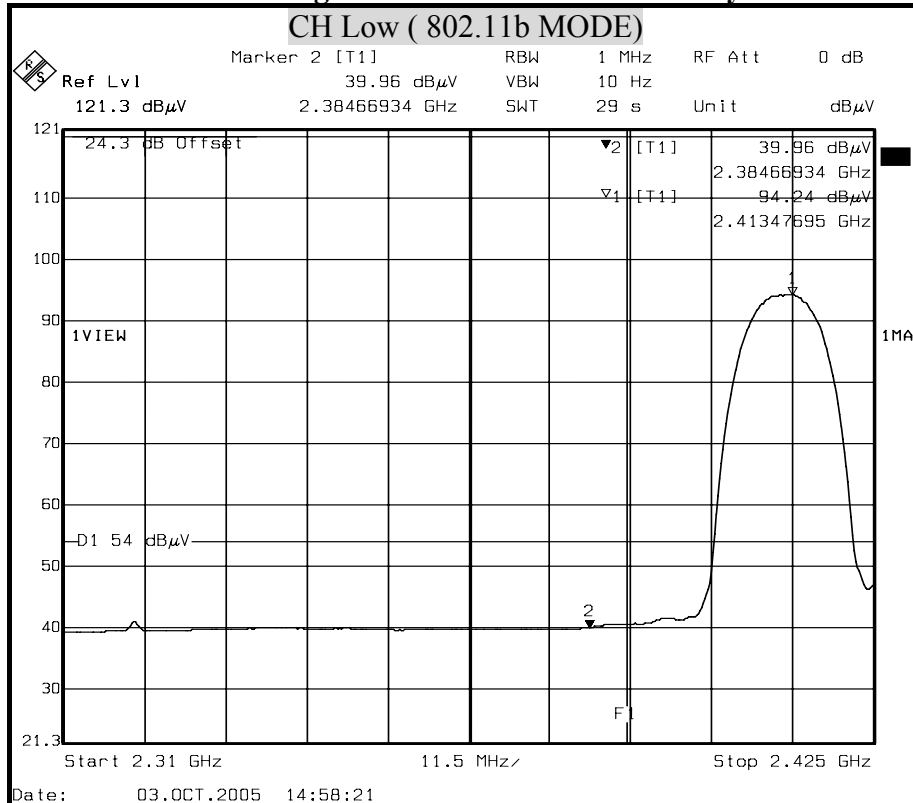

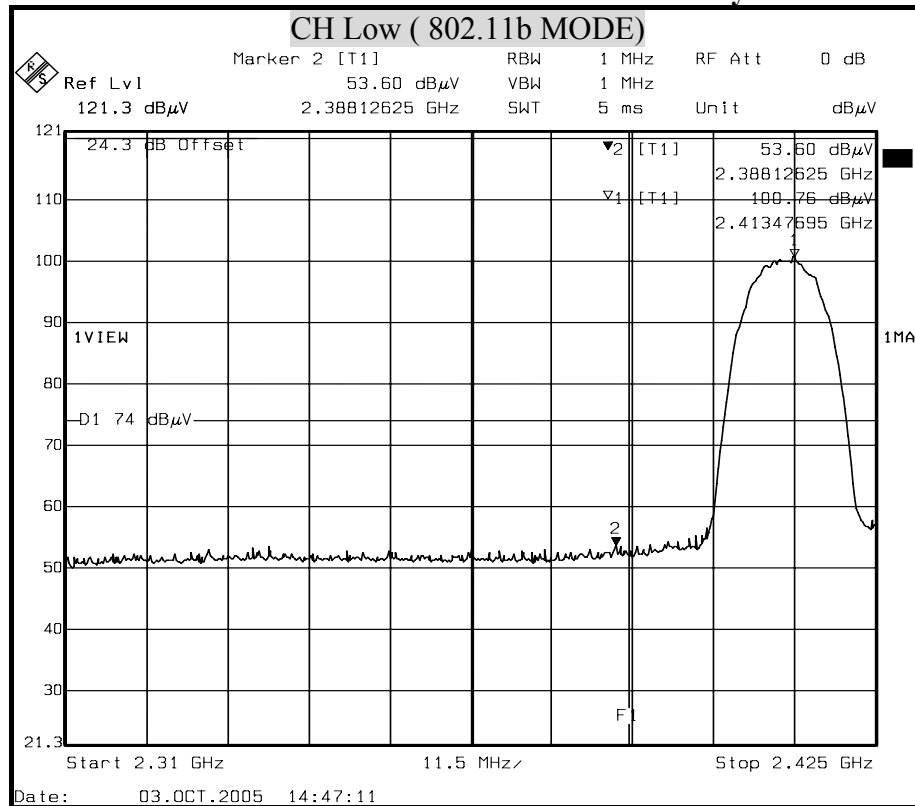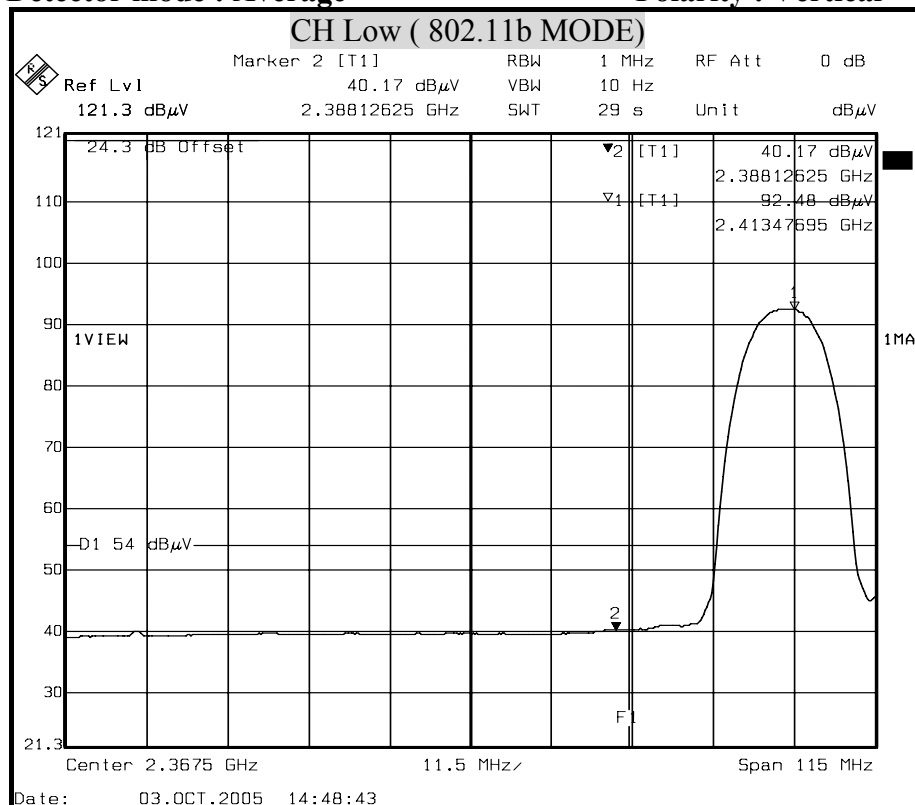**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**

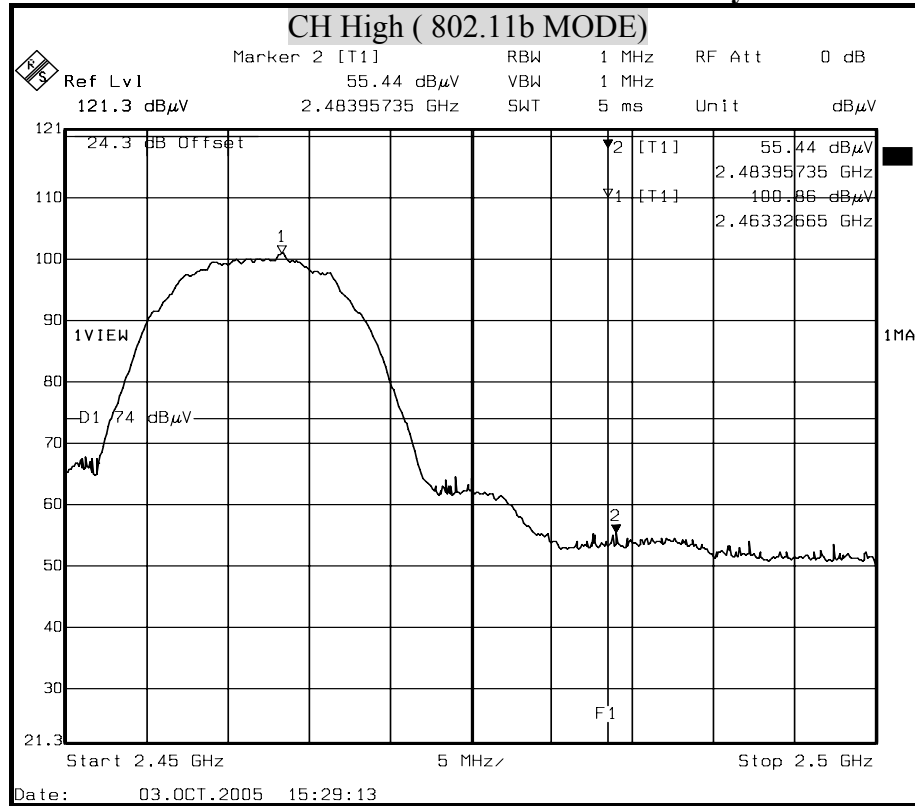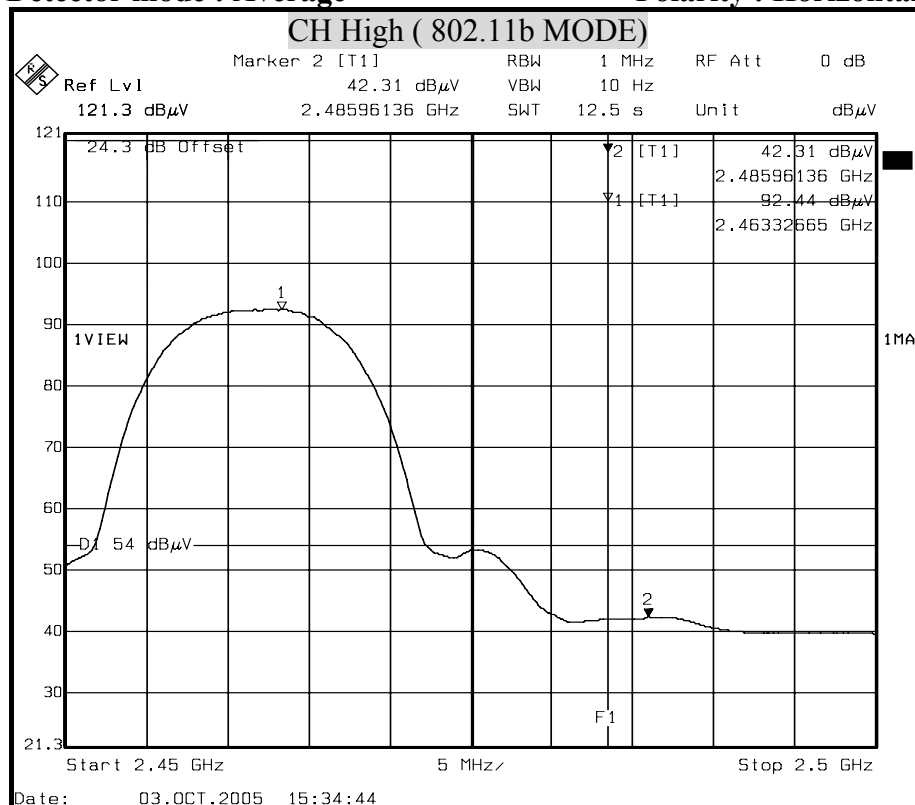
**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**

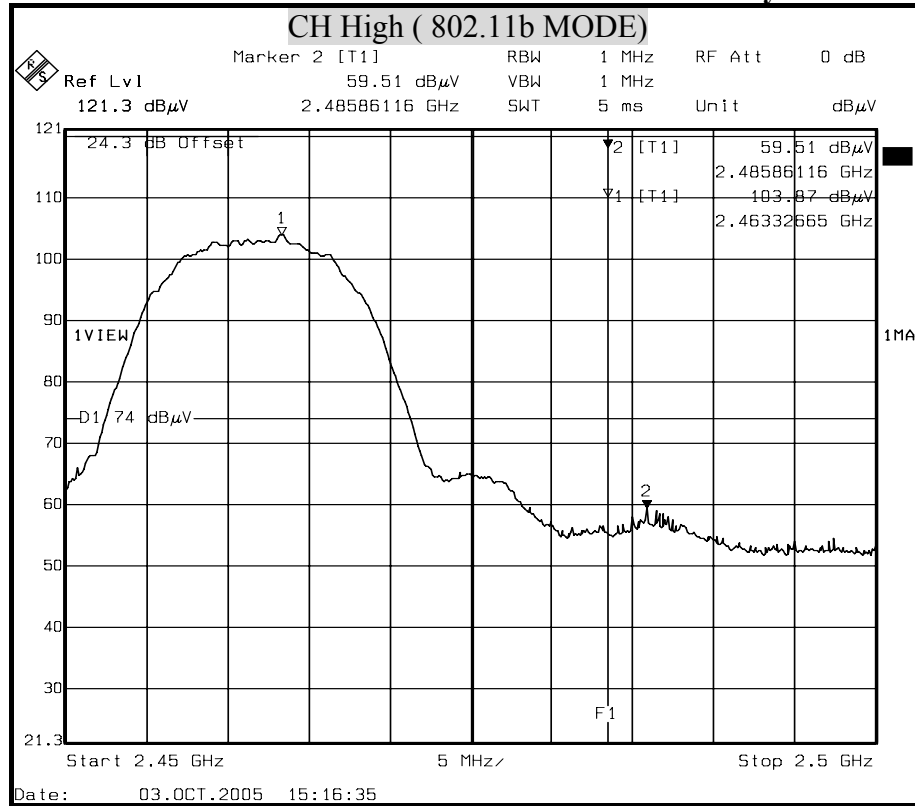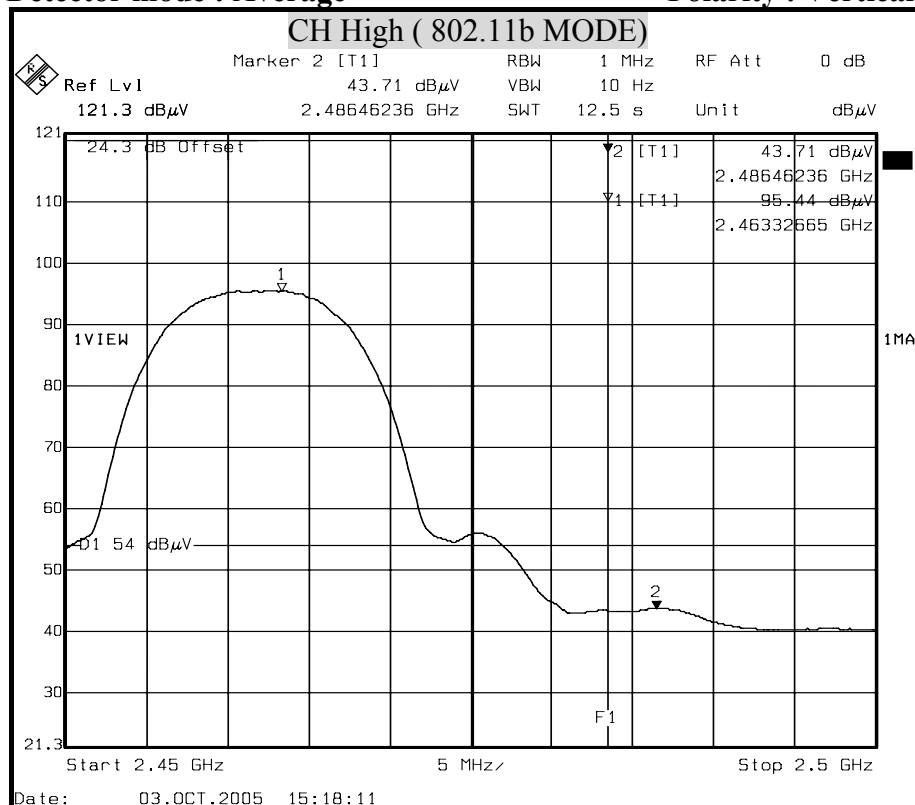**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**




Detector mode : Peak

Polarity : Horizontal

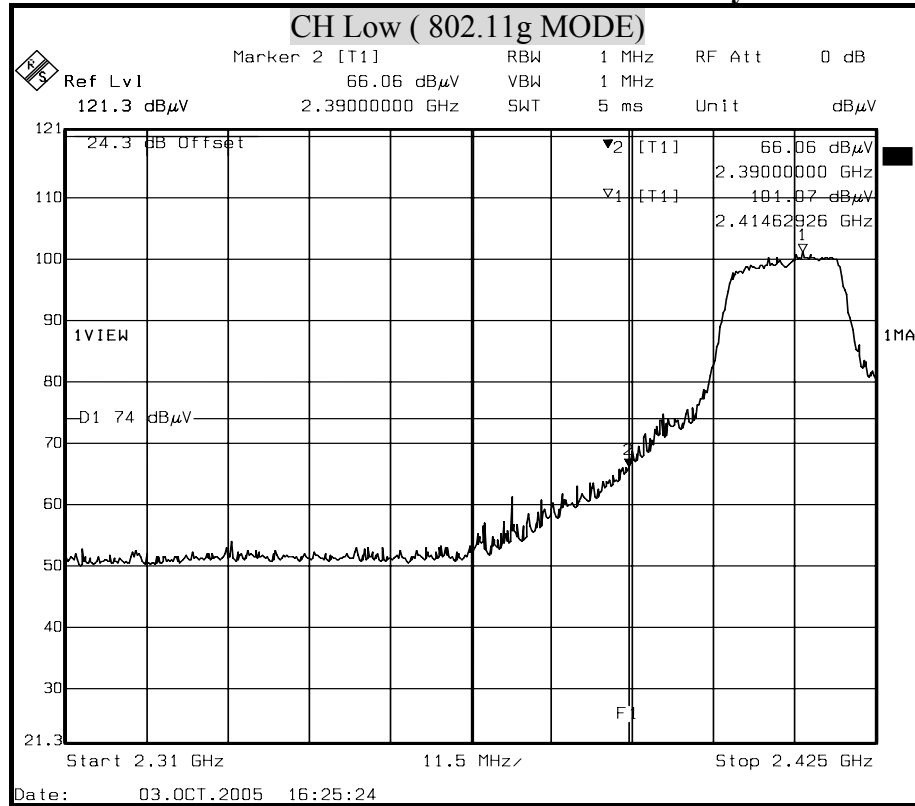

Detector mode : Average


Polarity : Horizontal

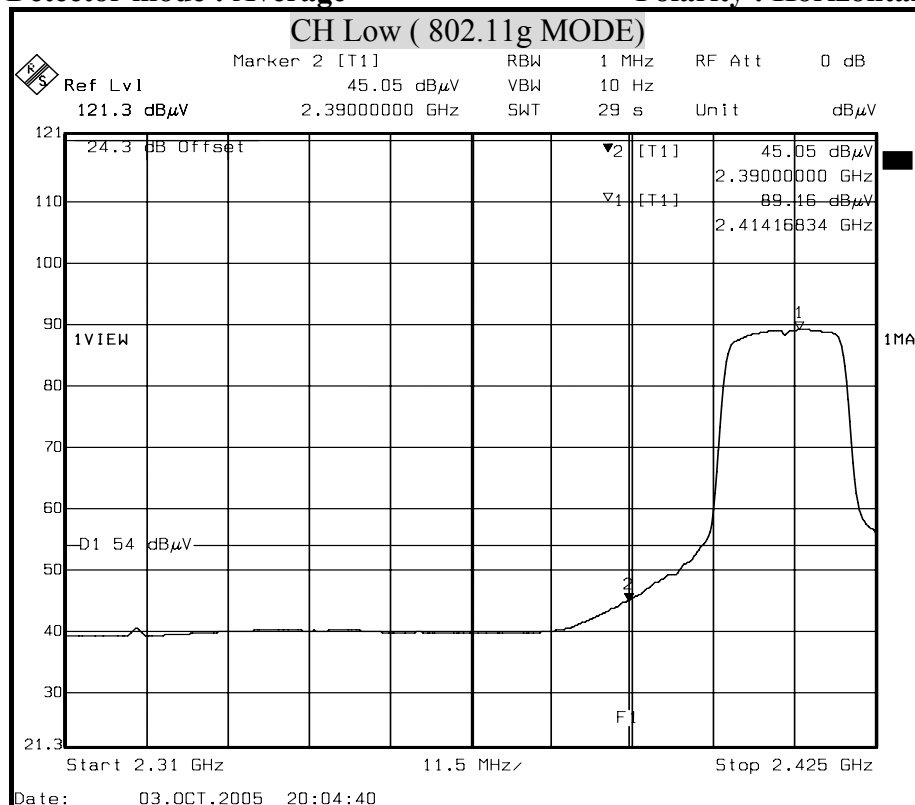




Detector mode : Peak



Polarity : Vertical

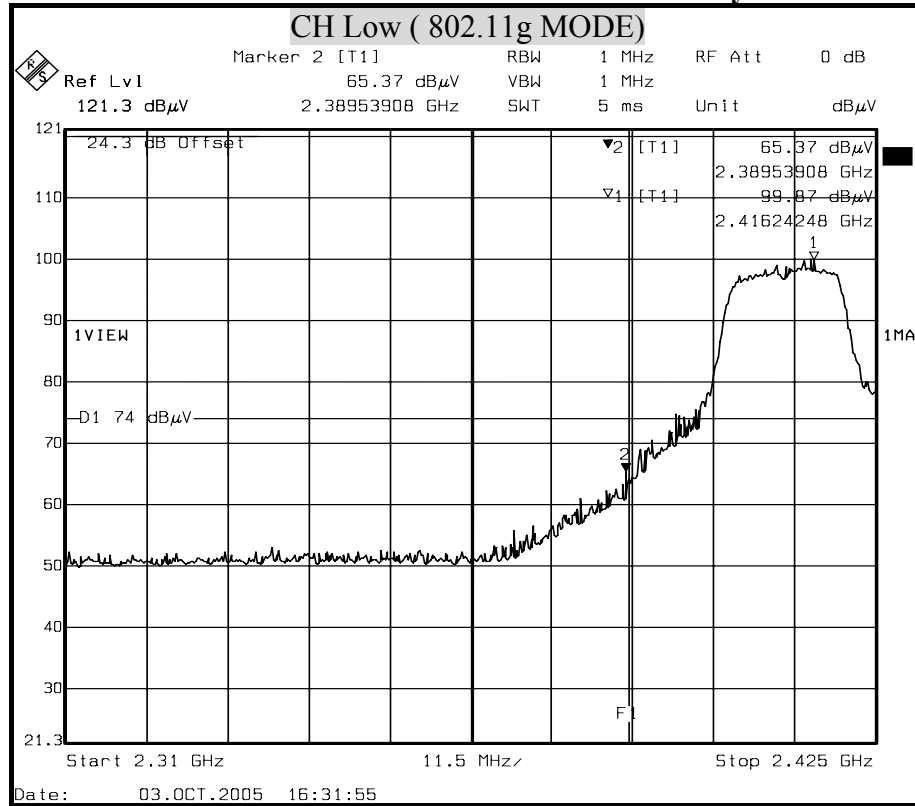

Detector mode : Average

Polarity : Vertical

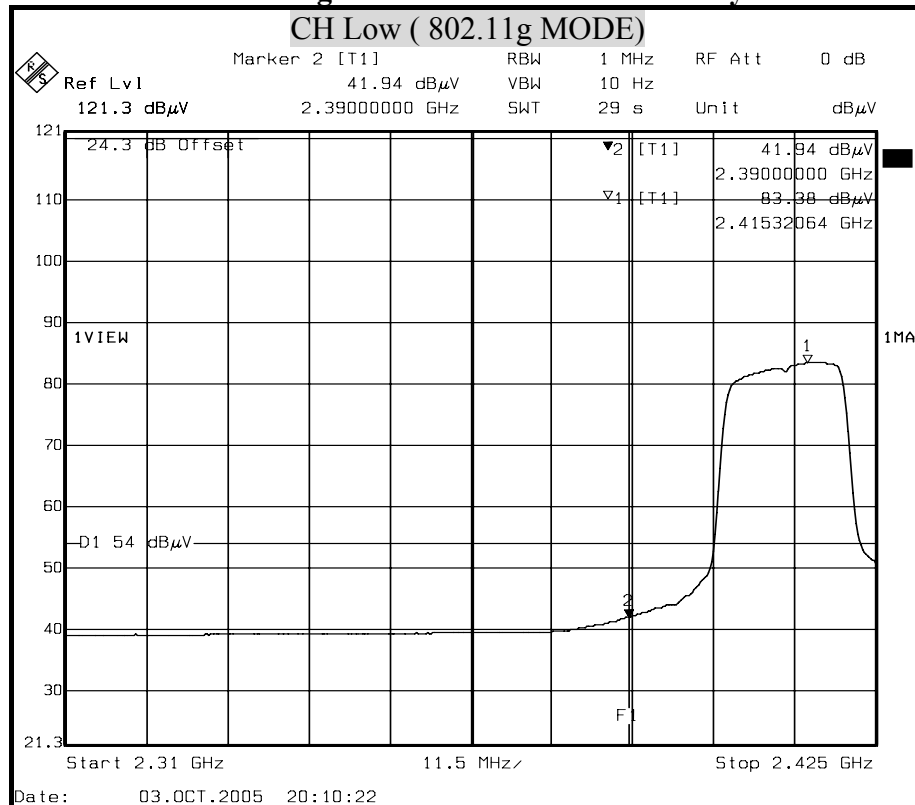


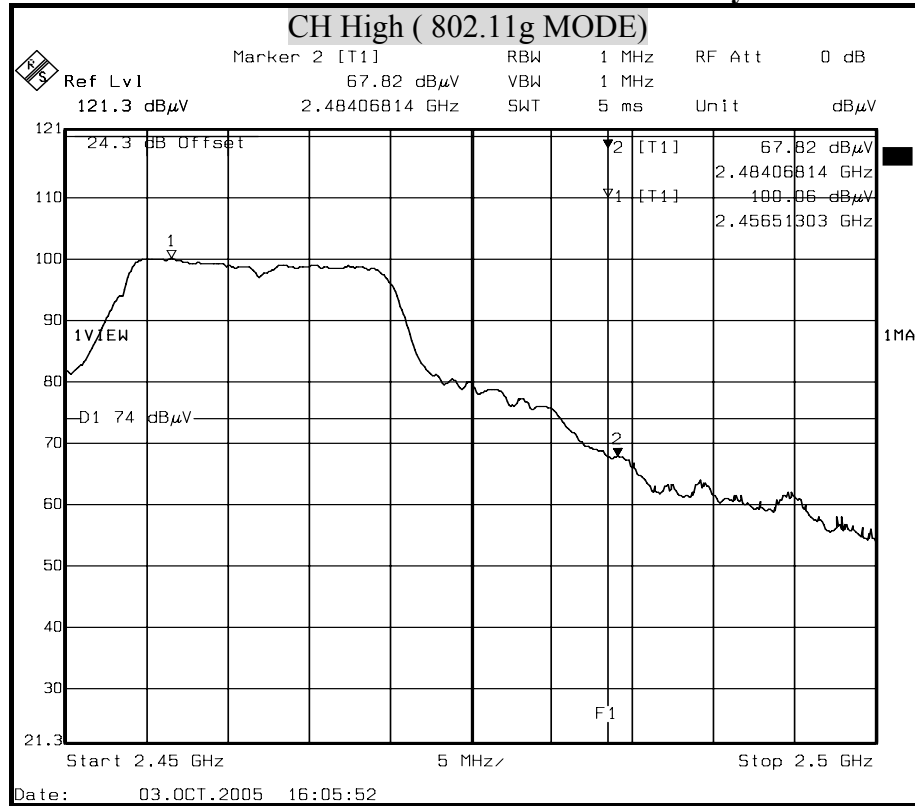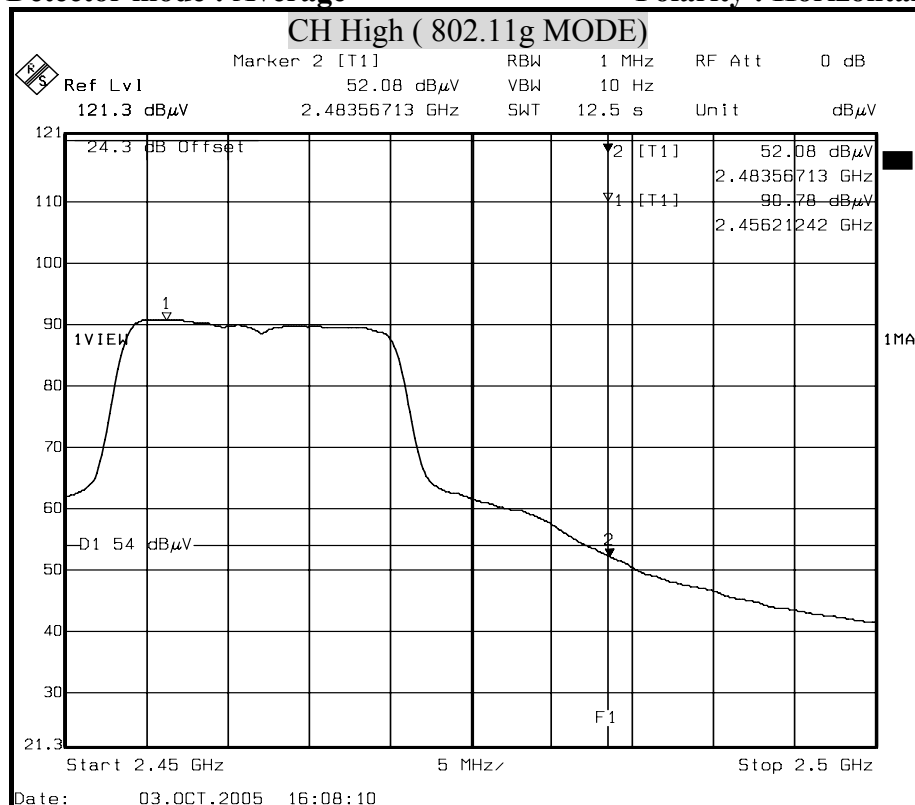**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**




Detector mode : Peak



Polarity : Vertical

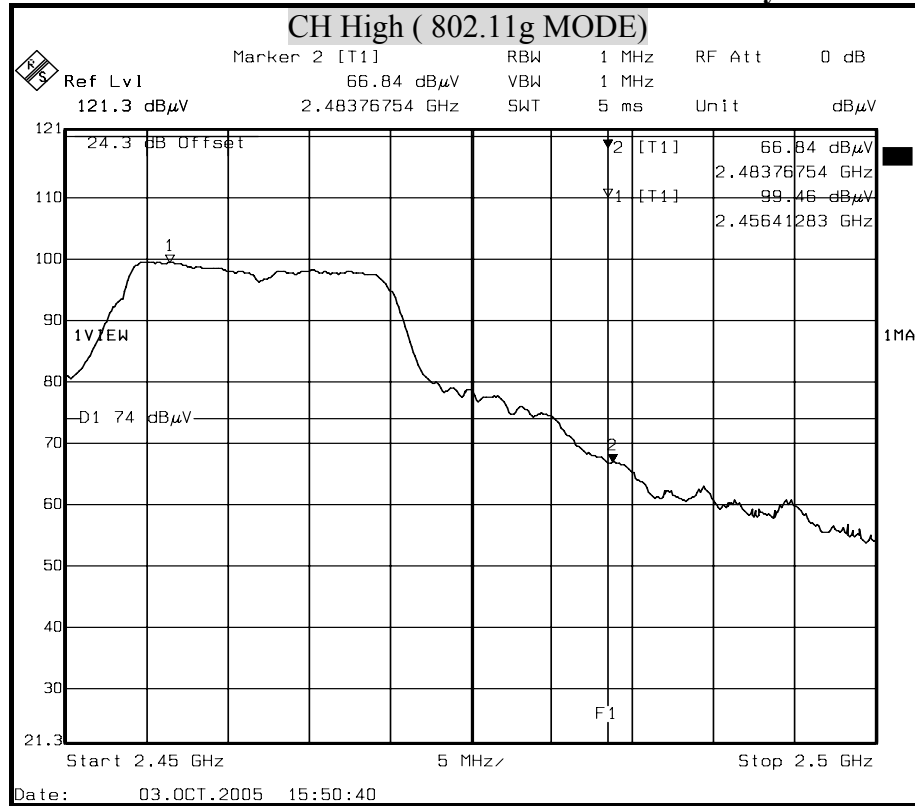

Detector mode : Average

Polarity : Vertical

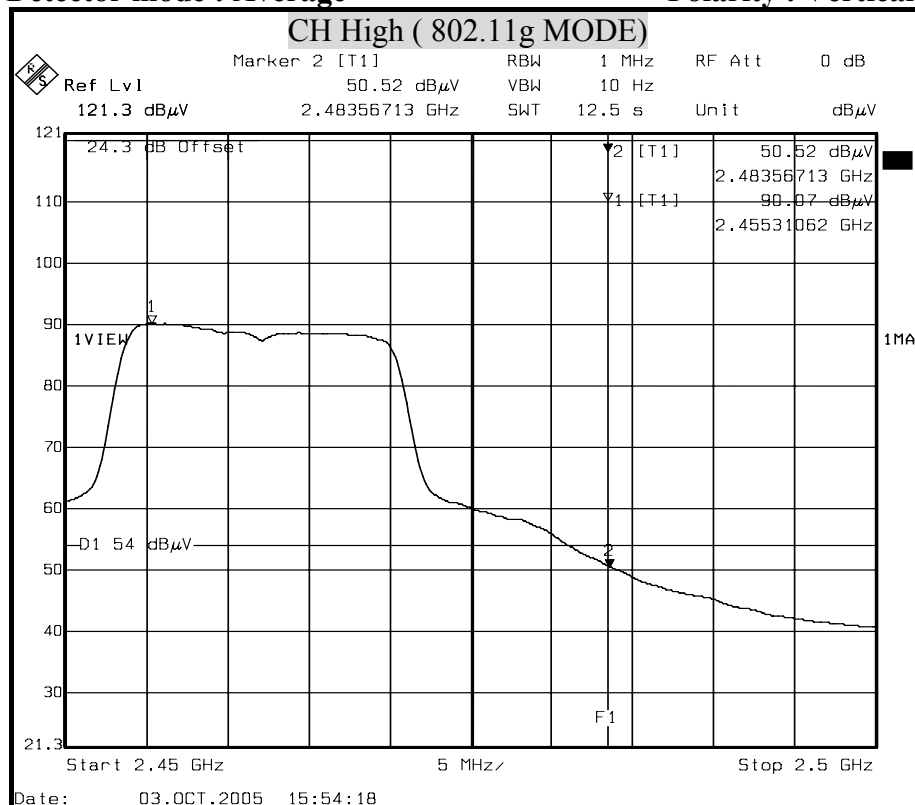


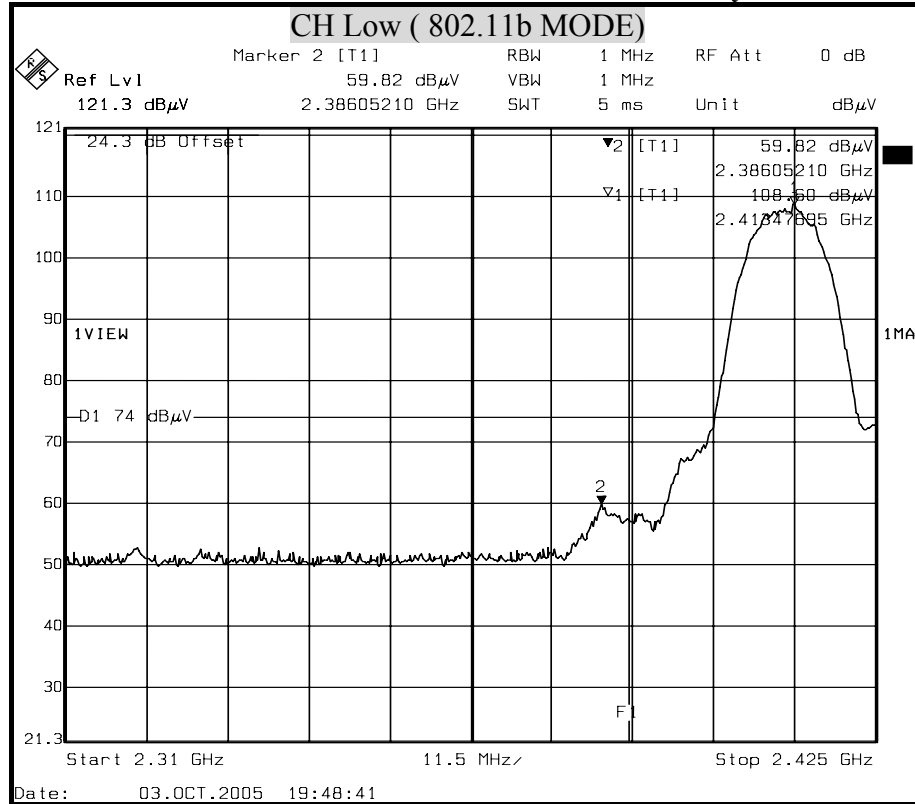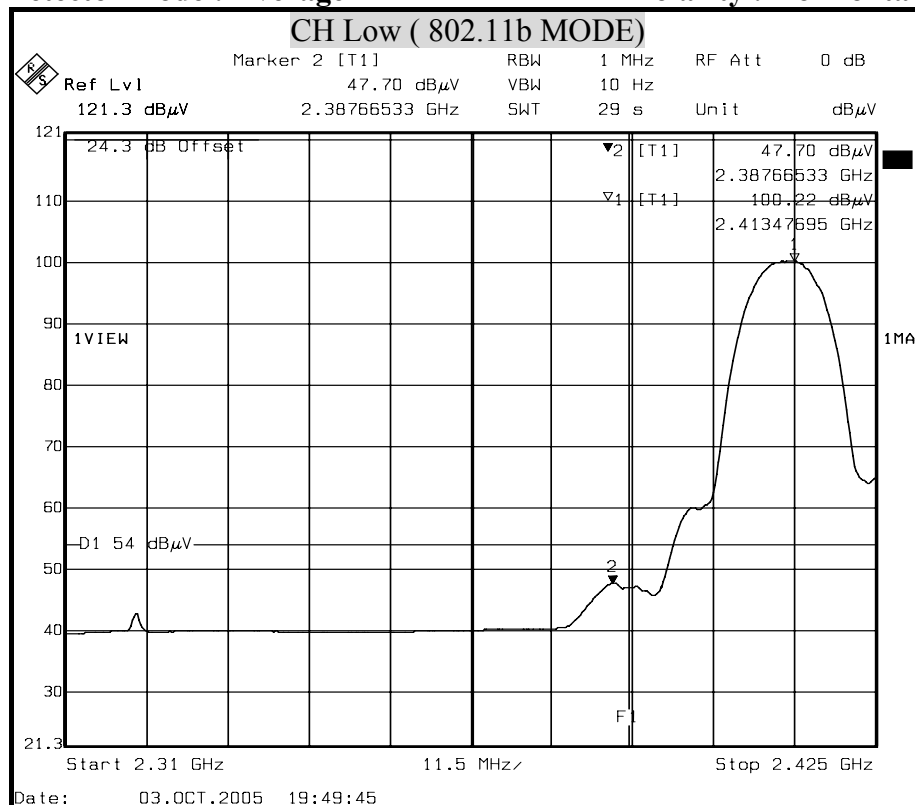**Antenna (2)****Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**




Detector mode : Peak



Polarity : Vertical


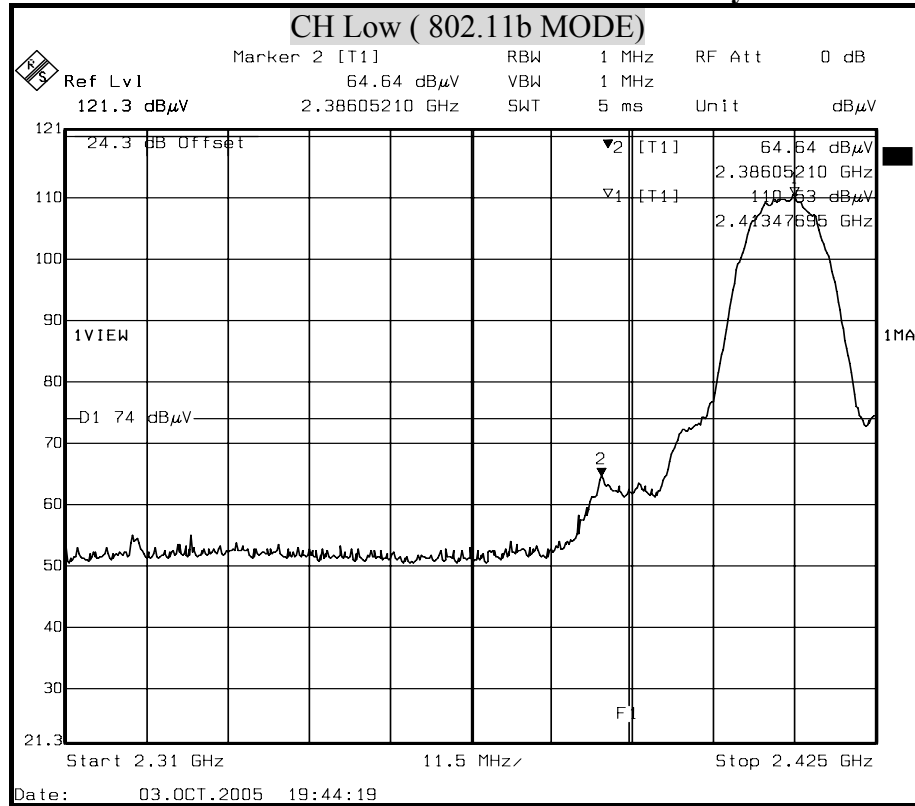


Detector mode : Average

Polarity : Vertical

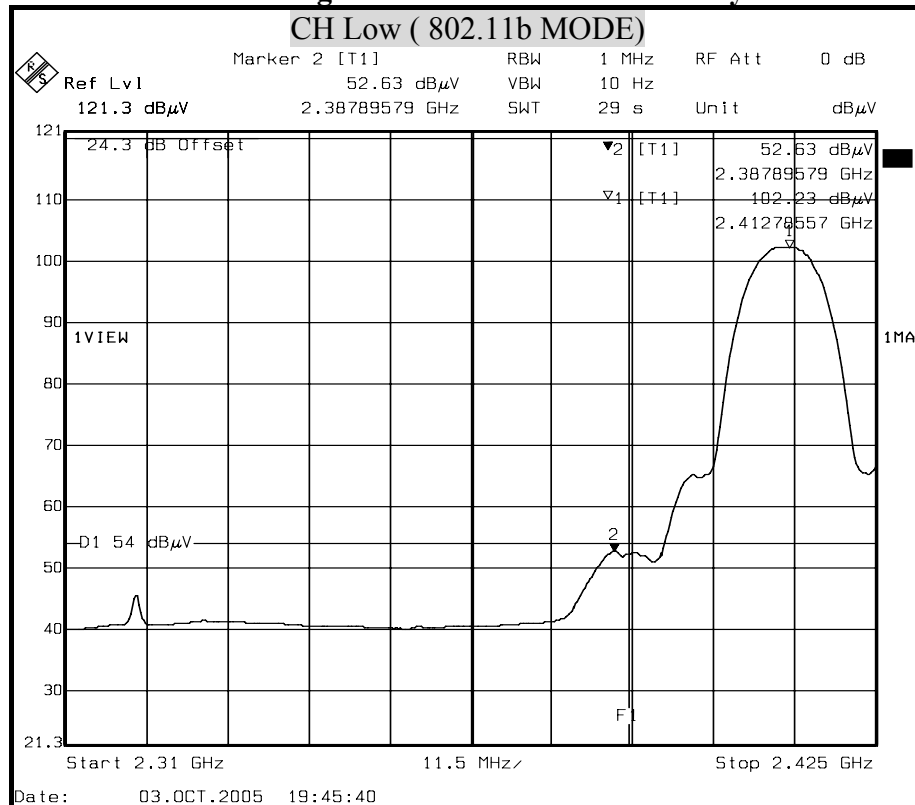

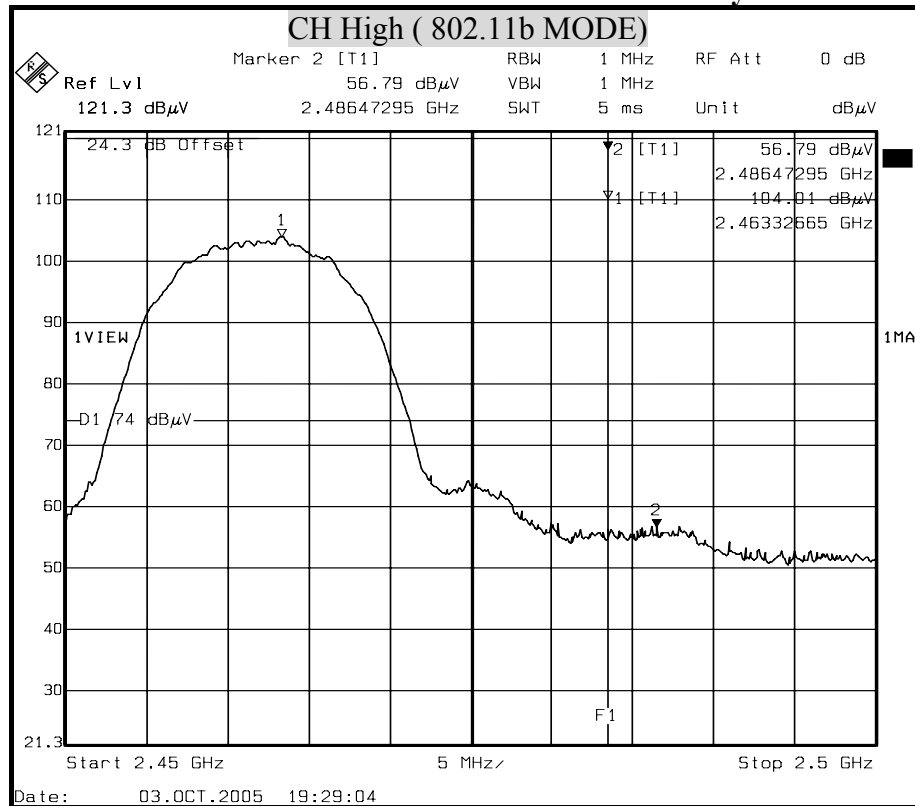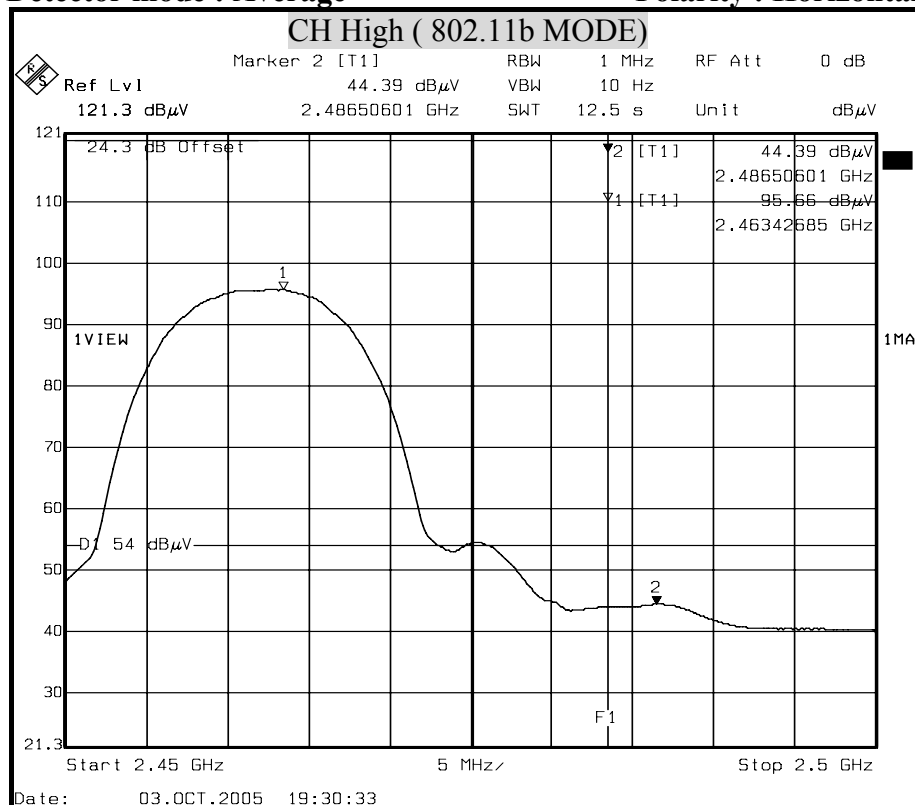
**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**

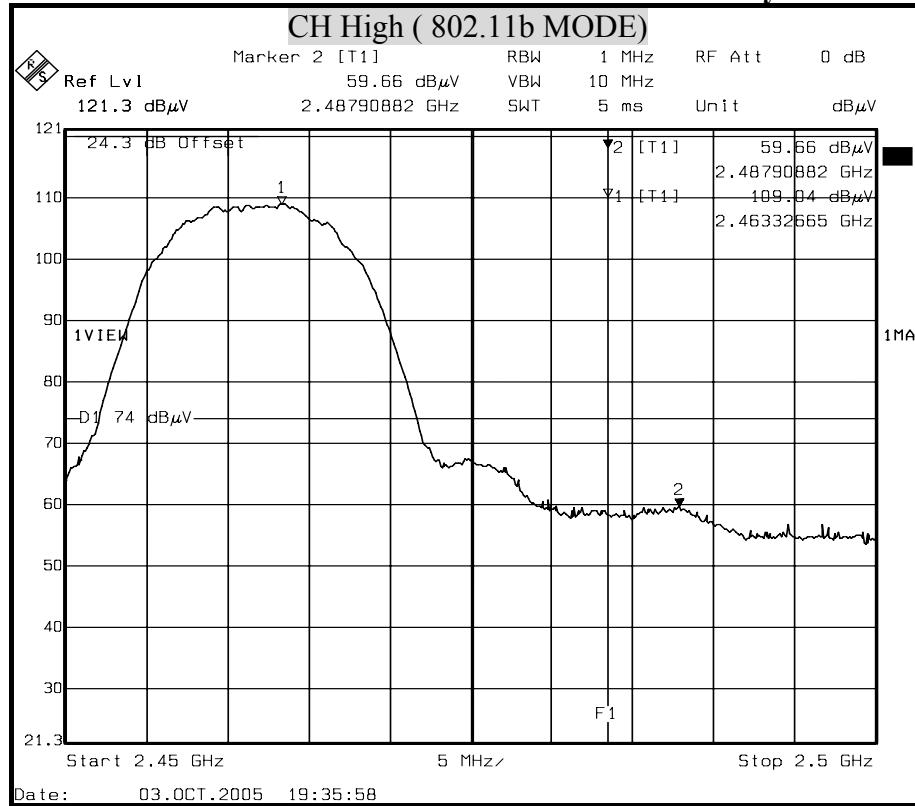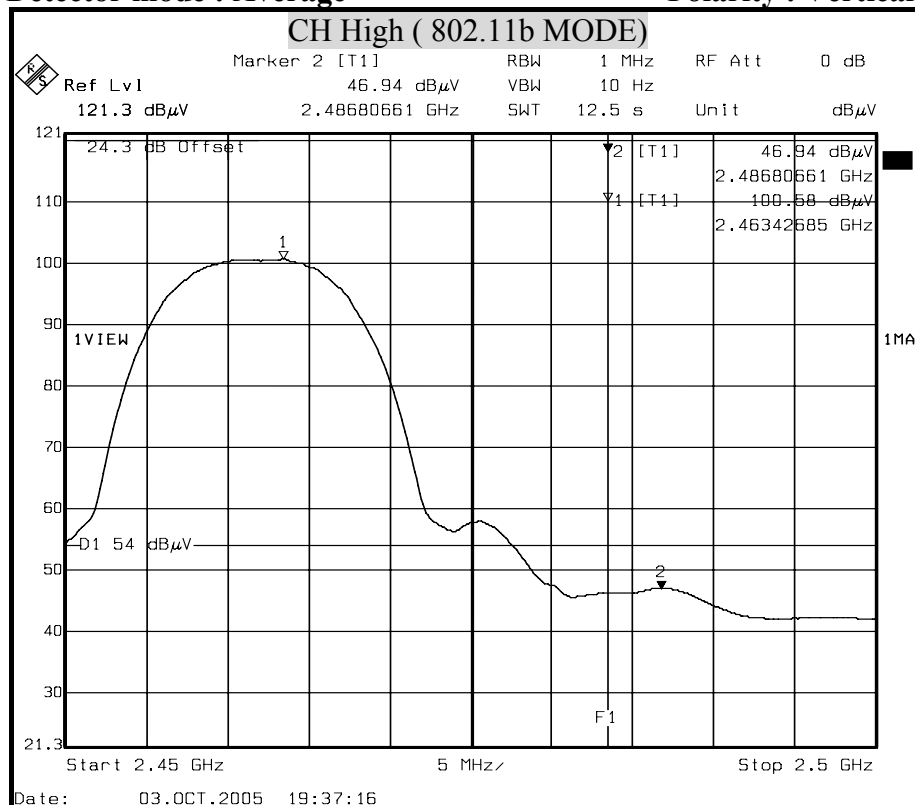**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**




Detector mode : Peak

Polarity : Horizontal

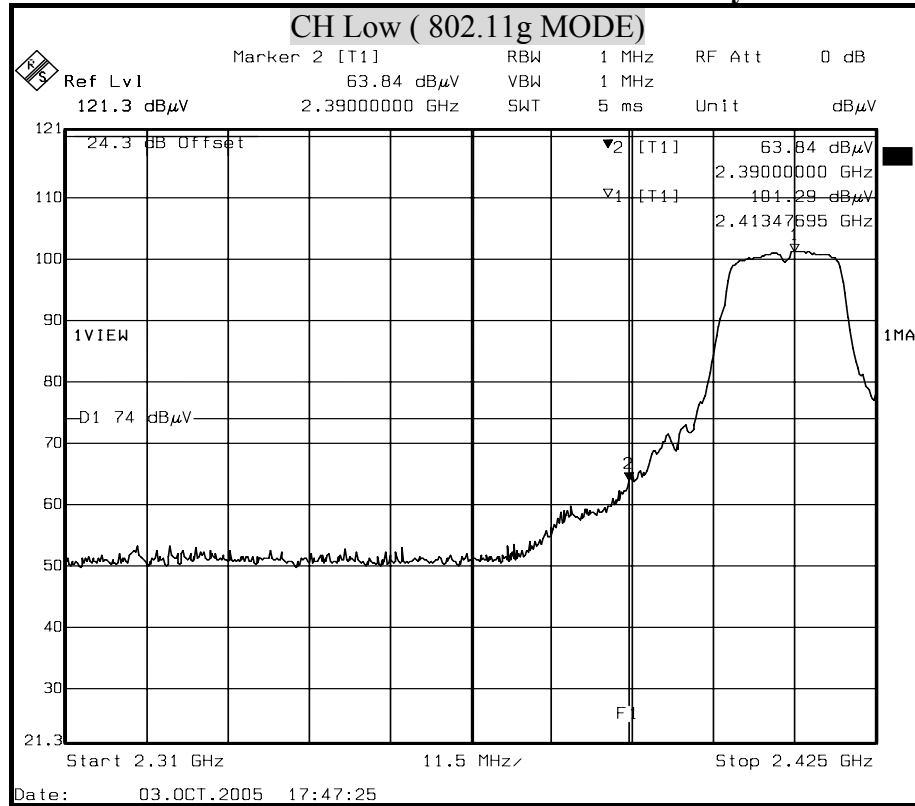

Detector mode : Average


Polarity : Horizontal

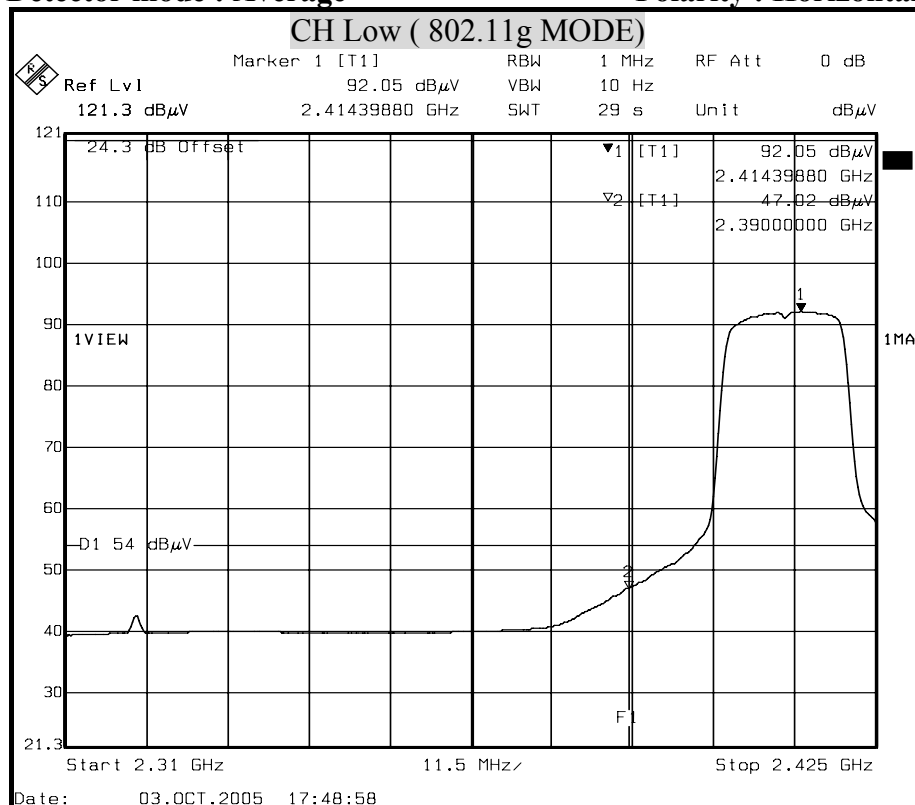




Detector mode : Peak



Polarity : Vertical

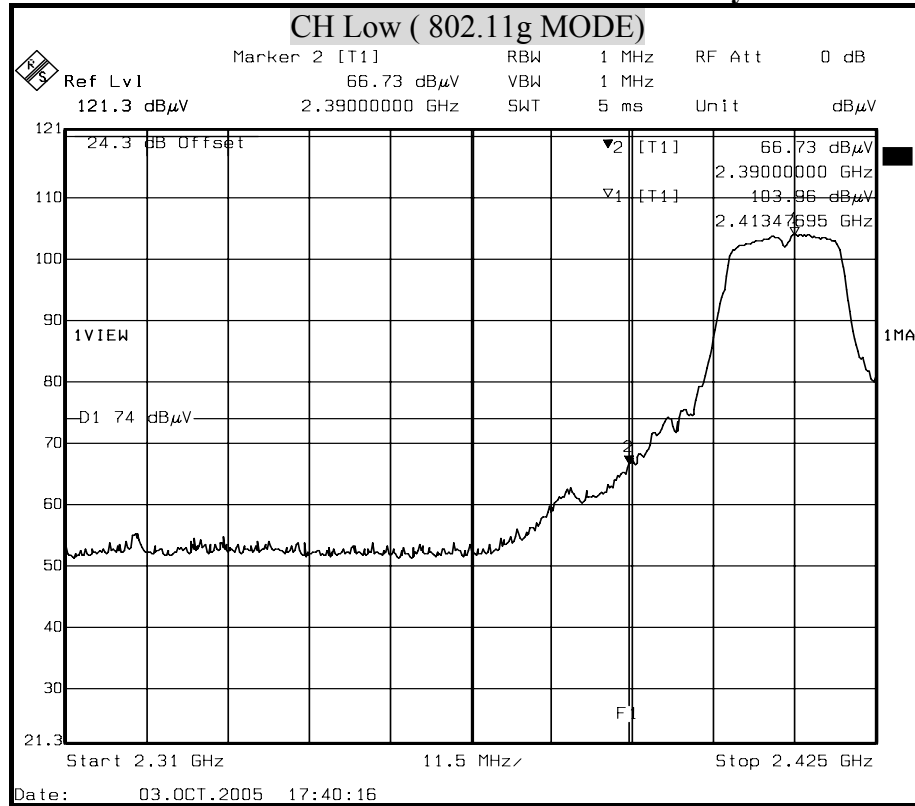

Detector mode : Average

Polarity : Vertical

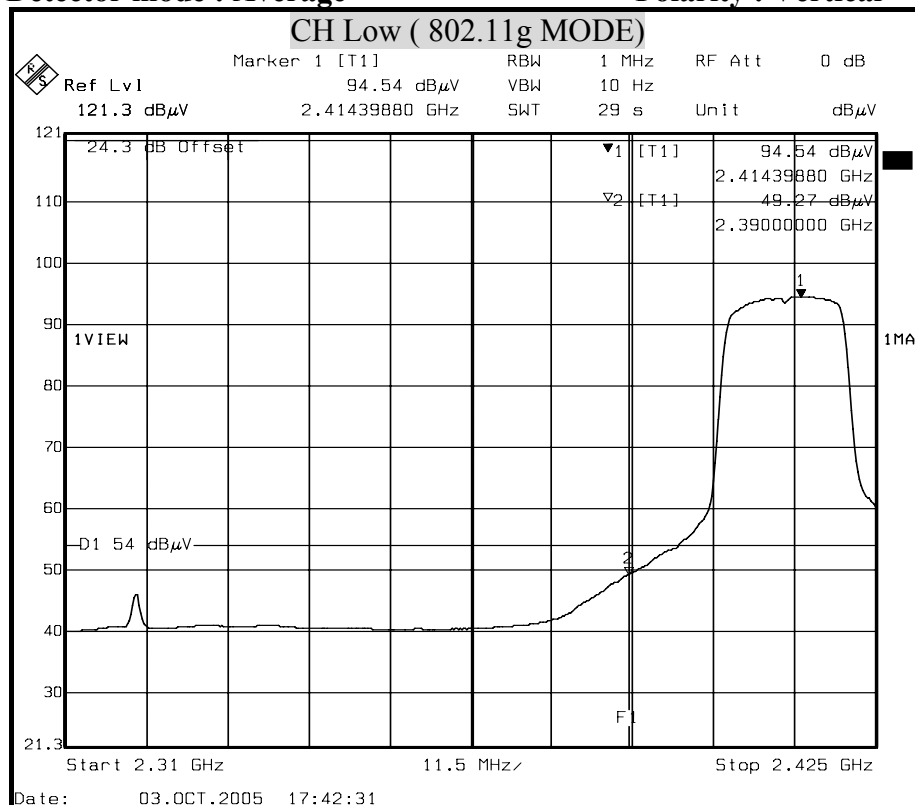


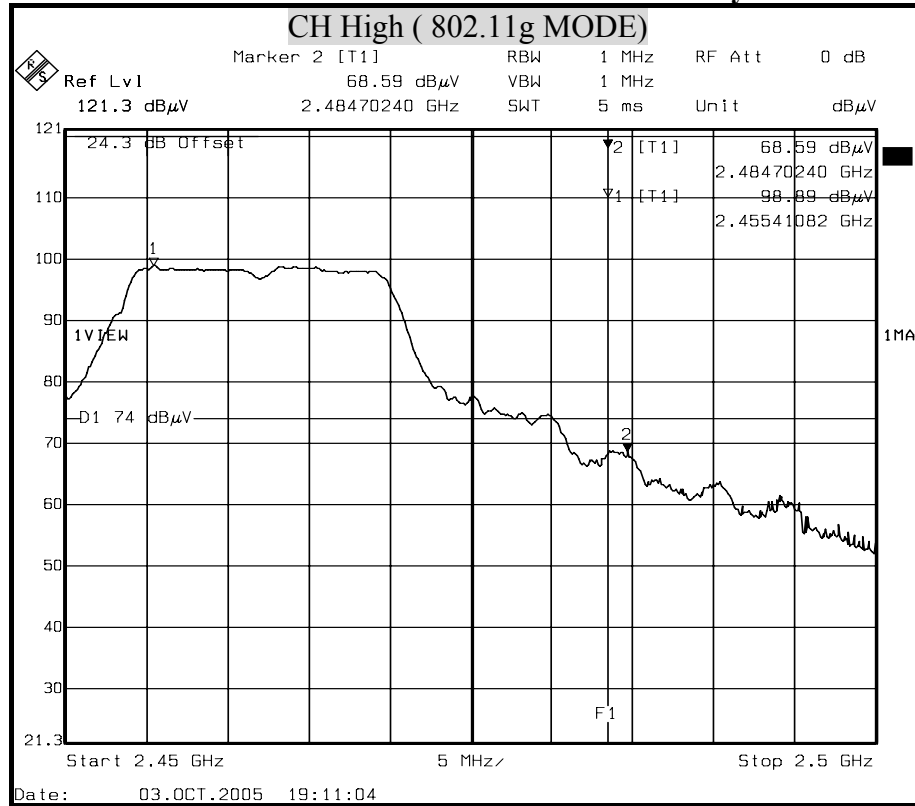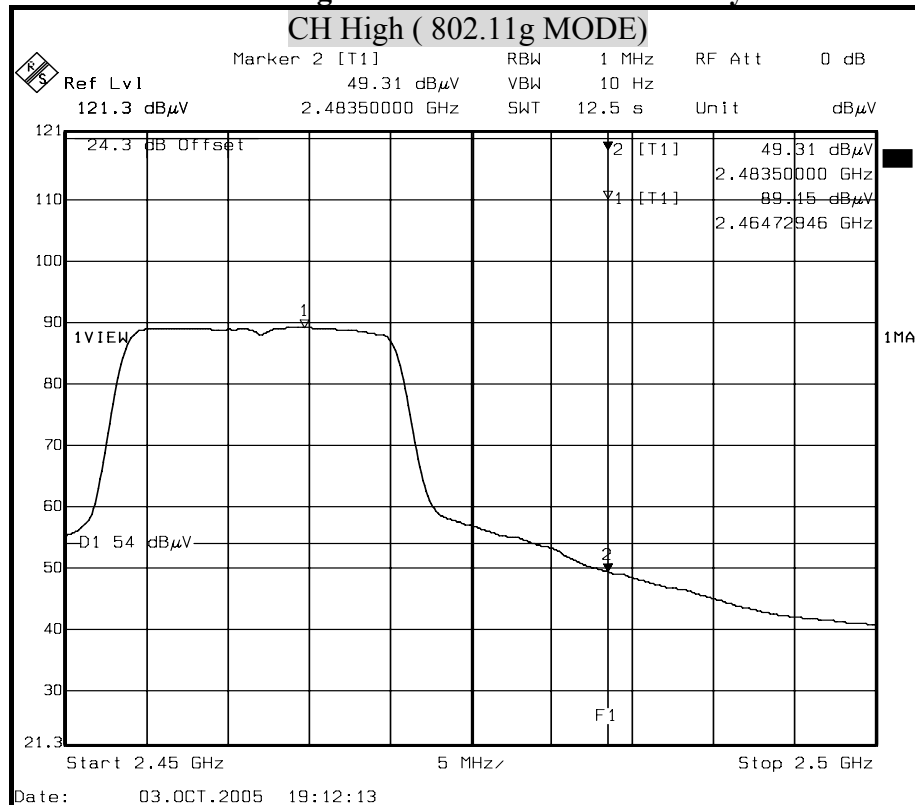**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**




Detector mode : Peak

Polarity : Vertical

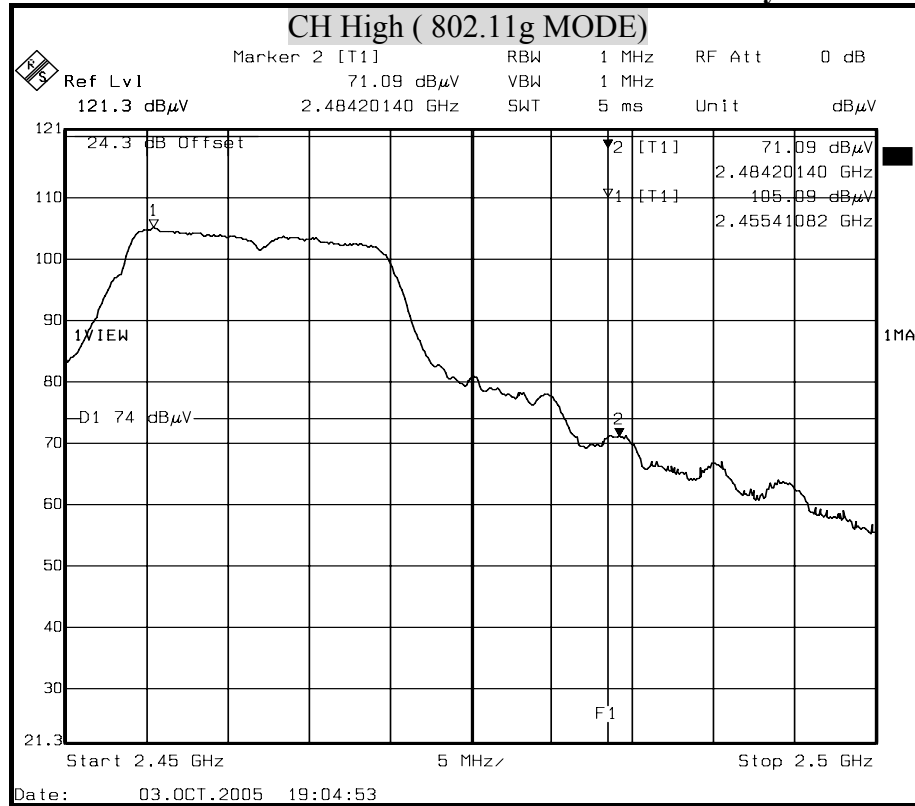

Detector mode : Average

Polarity : Vertical

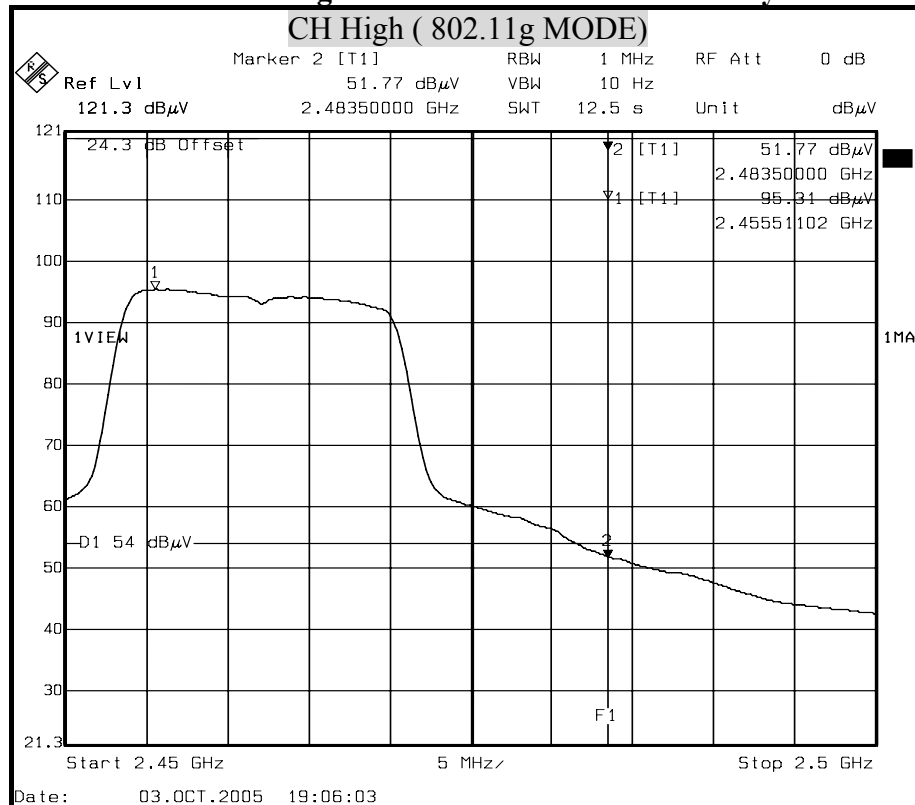



### 8.3 POWERLINE CONDUCTED EMISSIONS

#### LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

| Frequency of Emission (MHz) | Conducted limit (dB $\mu$ v) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15 - 0.5                  | 66 to 56                     | 56 to 46 |
| 0.5 - 5                     | 56                           | 46       |
| 5 - 30                      | 60                           | 50       |


#### TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests :

| Manufacturer or Type        | Model No. | Serial No.             | Date of Calibration                              | Calibration Period | Remark  |
|-----------------------------|-----------|------------------------|--------------------------------------------------|--------------------|---------|
| HP SPECTRUM ANALYZER        | 8594E     | 3801A05627             | April 28, 2005                                   | 1 Year             | PRETEST |
| SOLAR ISOLATION TRANSFORMER | 7032-1    | N/A                    | N/A                                              | N/A                | FINAL   |
| EMCO L.I.S.N.               | 3850/2    | 9311-1025<br>9401-1028 | January 10, 2005<br>For Characteristic impedance | 1 Year             | FINAL   |
|                             |           |                        | January 10, 2005<br>For Insertion loss           |                    |         |
| R & S TEST RECEIVER         | ESHS30    | 838550/003             | February 21, 2005                                | 1 Year             | FINAL   |
| KEENE SHIELDED ROOM         | 5983      | No.1                   | N/A                                              | N/A                | FINAL   |
| R & S PULSE LIMIT           | EHS3Z2    | 357.8810.52            | July 10, 2005                                    | 1 Year             | FINAL   |
| N TYPE COAXIAL CABLE        | -----     | -----                  | July 10, 2005                                    | 1 Year             | FINAL   |
| 50 $\Omega$ TERMINATOR      | -----     | -----                  | July 10, 2005                                    | 1 Year             | FINAL   |



## **TEST SETUP**

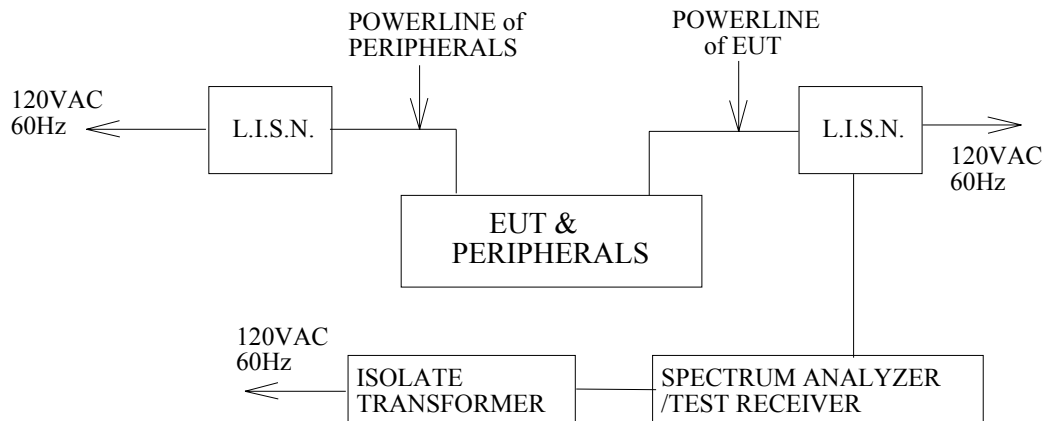

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.


## **TEST RESULTS**

No non-compliance noted

**CONDUCTED RF VOLTAGE MEASUREMENT**

|              |                                           |                 |             |
|--------------|-------------------------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI                         | Test Date       | 2005/09/13  |
| Model Name   | WM610-M                                   | Test By         | Nicky Liu   |
| Test Mode    | Normal operating / Antenna 1 (worst case) | TEMP & Humidity | 27.4°C, 54% |

LINE

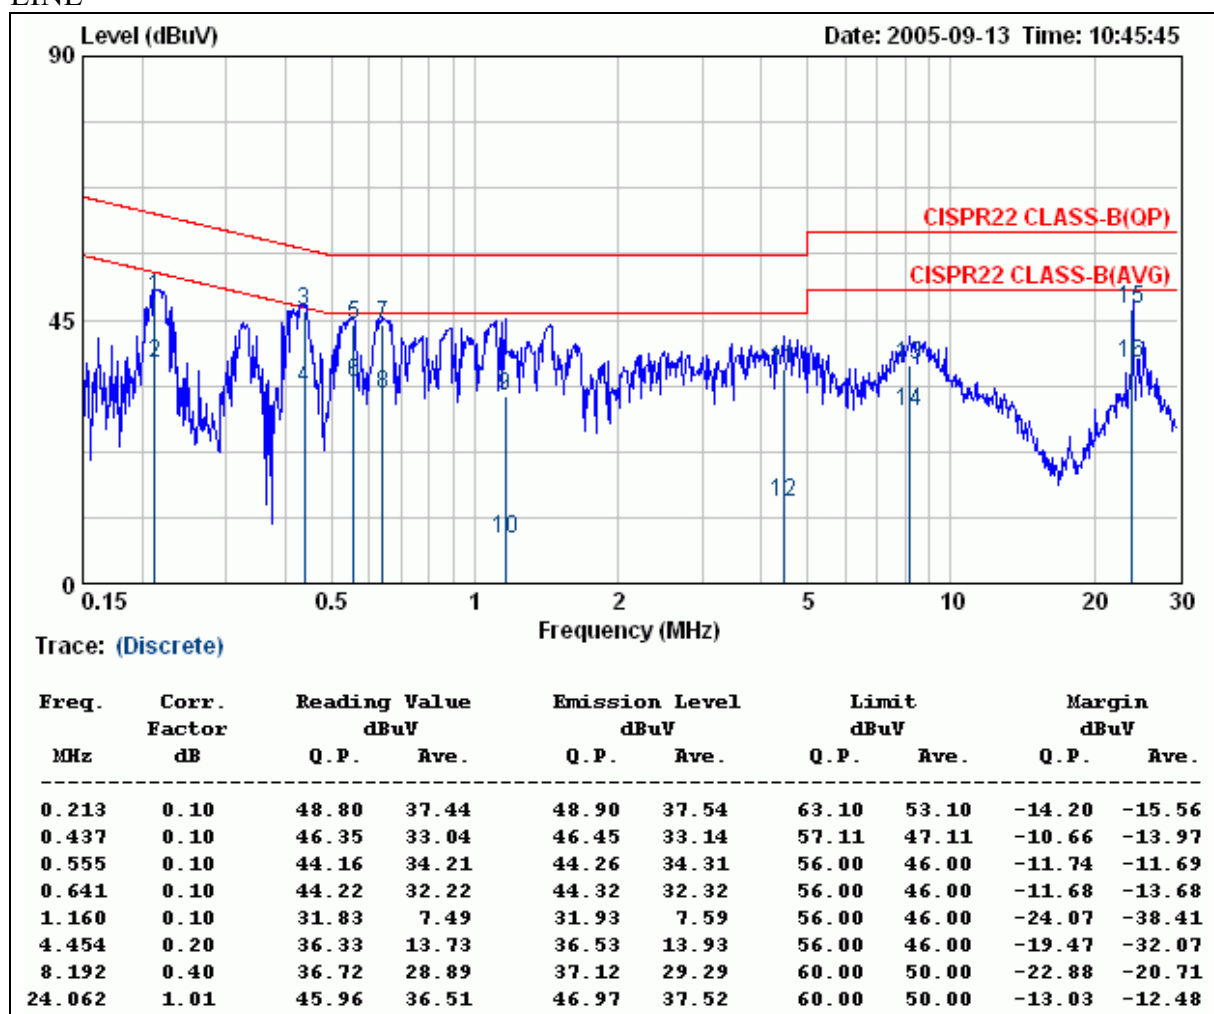
**Remark:**

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level - Limit value



|              |                                           |                 |             |
|--------------|-------------------------------------------|-----------------|-------------|
| Product Name | 802.11b/g miniPCI                         | Test Date       | 2005/09/13  |
| Model Name   | WM610-M                                   | Test By         | Nicky Liu   |
| Test Mode    | Normal operating / Antenna 1 (worst case) | TEMP & Humidity | 27.4°C, 54% |

## NEUTRAL

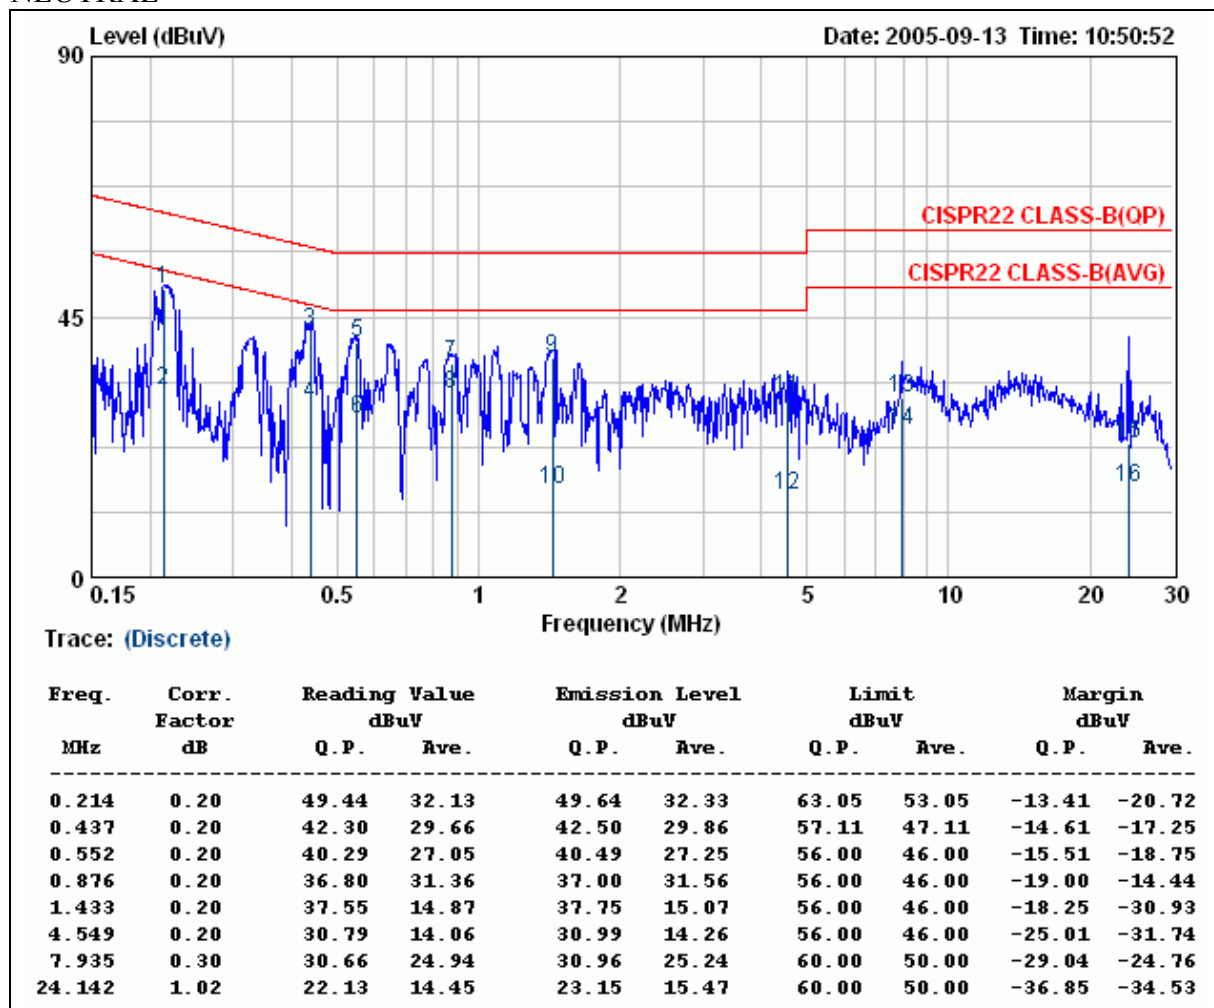

## Remark:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level - Limit value



## **9. ANTENNA REQUIREMENT**

### **9.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **9.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used for this product is PIFA antenna. The maximum peak Gain of this antenna is only 2dBi.



## APPENDIX SETUP PHOTOS

### RADIATED RF MEASUREMENT SETUP







**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

