




FCC RADIO TEST REPORT

Applicant's company	CyberTAN Technology, Inc
Applicant Address	99 Park Avenue III, Science Park, Hsinchu 308 Taiwan, R.O.C.
FCC ID	N89-WM821MHP
Manufacturer's company	CyberTAN Technology, Inc
Manufacturer Address	99 Park Avenue III, Science Park, Hsinchu 308 Taiwan, R.O.C.

Product Name	Wireless 802.11N DUAL BAND MINI PCI MODULE
Brand Name	CyberTAN
Model Name	WM821-M
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Apr. 07, 2008
Final Test Date	Apr. 16, 2008
Submission Type	Original Equipment
Operating Mode	Client (without radar detection function)

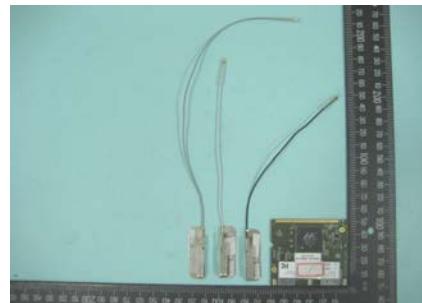

Statement

Test result included is only for the 802.11a (5150 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units	6
3.8. Table for Parameters of Test Software Setting	6
3.9. Test Configurations	7
4. TEST RESULT	9
4.1. AC Power Line Conducted Emissions Measurement.....	9
4.2. 99% Occupied Bandwidth Measurement	13
4.3. Maximum Conducted Output Power Measurement.....	20
4.4. Power Spectral Density Measurement	28
4.5. Peak Excursion Measurement	35
4.6. Radiated Emissions Measurement	42
4.7. Band Edge Emissions Measurement	66
4.8. Frequency Stability Measurement	70
4.9. Antenna Requirements	72
5. LIST OF MEASURING EQUIPMENTS	73
6. TEST LOCATION.....	75
7. TAF CERTIFICATE OF ACCREDITATION	76
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A8
APPENDIX B. TEST PHOTOS.....	B1 ~ B8
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3



History of This Test Report

Original Issue Date: Apr. 25, 2008

Report No.: FR841408AB

■ No additional attachment.

Additional attachment were issued as following record:



Report No.: FR841408AB

Certificate No.: CB9704070

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless 802.11N DUAL BAND MINI PCI MODULE
Brand Name : CyberTAN
Model Name : WM821-M
Applicant : CyberTAN Technology, Inc
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 07, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.99 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	4.10 dB
4.4	15.407(a)	Power Spectral Density	Complies	2.23 dB
4.5	15.407(a)	Peak Excursion	Complies	7.08 dB
4.6	15.407(b)	Radiated Emissions	Complies	4.14 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.22 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (1TX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	11a: 19
Channel Band Width (99%)	Band 1: 17.28 MHz; Band 2: 17.28 MHz; Band 3: 17.28 MHz
Conducted Output Power	Band 1: 12.90 dBm ; Band 2: 13.20 dBm ; Band 3: 13.44 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
802.11a	V	X	X	X
802.11b	V	X	X	X
802.11g	V	X	X	X
Draft n	X	X	V	V

3.2. Accessories

N/A


3.3. Table for Filed Antenna

For 5GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
A	WNC	50.3U007.001	PIFA Antenna	NA	6.00
B	WNC	50.3U005.001	PIFA Antenna	NA	6.00
C	WNC	50.3U006.001	PIFA Antenna	NA	6.00

Note: The EUT has three Antennas.

Only antenna A can be used as transmitting antenna.

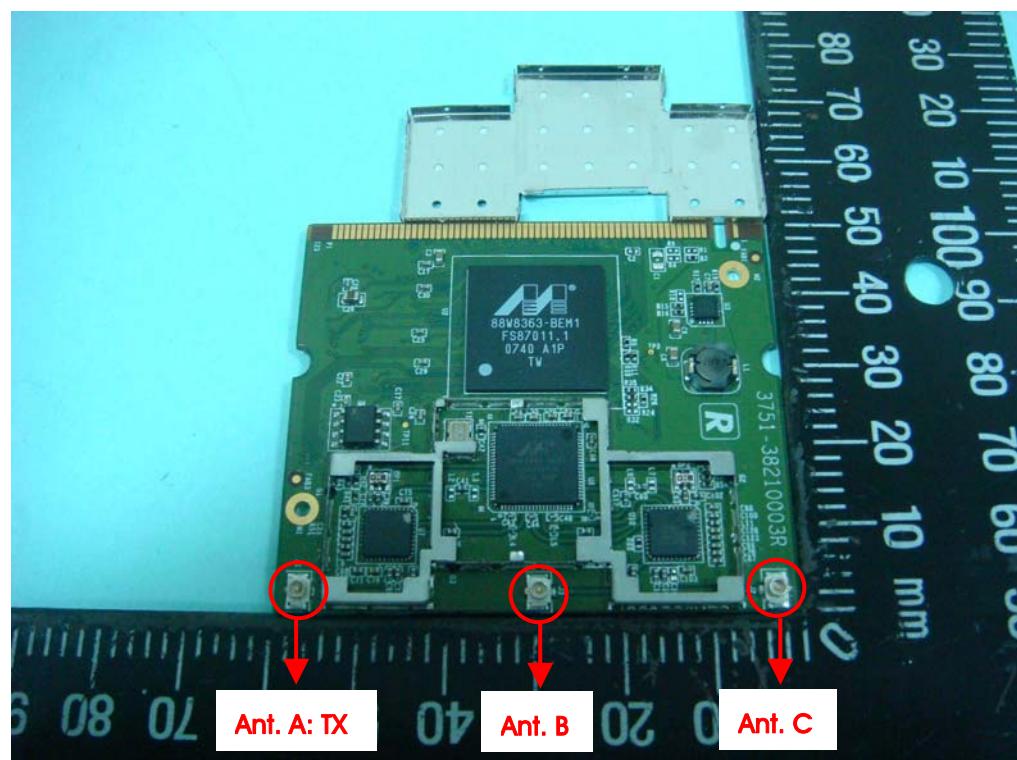

3.4. Table for Carrier Frequencies

Frequency Allocation for 802.11a

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	40	5200 MHz	48	5240 MHz
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	124	5620 MHz
	104	5520 MHz	128	5640 MHz
	108	5540 MHz	132	5660 MHz
	112	5560 MHz	136	5680 MHz
	116	5580 MHz	140	5700 MHz
	120	5600 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link	Auto	-	-
Max. Conducted Output Power	Band 1~2/BPSK	6Mbps	36/40/4852/60/64	A
	Band 3/BPSK	6Mbps	100/116/140	-
26dB Spectrum Bandwidth 99% Occupied Bandwidth	Band 1~2/BPSK	6Mbps	36/40/4852/60/64	-
	Band 3/BPSK	6Mbps	100/116/140	-
Measurement Power Spectral Density Peak Excursion	Normal Link	Auto	-	-
	Band 1~2/BPSK	6Mbps	36/40/4852/60/64	A
Radiated Emission Above 1GHz	Band 3/BPSK	6Mbps	100/116/140	A
	Band 1~2/BPSK	6Mbps	36/40/4852/60/64	A
Band Edge Emission	Band 1~2/BPSK	6Mbps	36/40/60/64	A
	Band 3/BPSK	6Mbps	100/140	A
Frequency Stability	Un-modulation	-	40/64	-

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No.
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Mouse	QSKY	Lx-619B	DoC
Notebook	DELL	D400	E2K24GBRL
Wireless AP	Planex	GW-AP54SGX	N/A
Modem	ACEEX	DM1414	IFAXDM1414

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11a

Test Software Version	DUTAPICLIENT_PCI.EXE									
	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz	
IEEE 802.11a Ant. A	14	14	14	14	14	14	14	14	14	14

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.


- Turn on the power of all equipment.
- The NB sends " H " messages to the panel, and the panel displays " H " patterns on the screen.
- The NB sends " H " messages to the modem.
- Repeat the steps from b to c.

At the same time, "DUTAPICLIENT_PCI.EXE" was executed to control the EUT continuously transmit RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

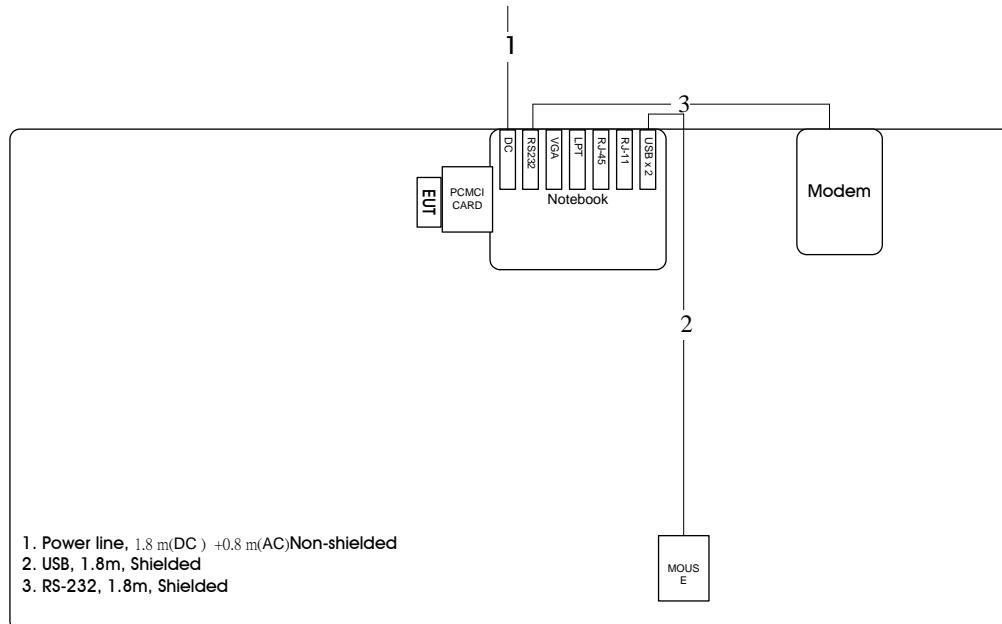

Test Configuration: above 1GHz

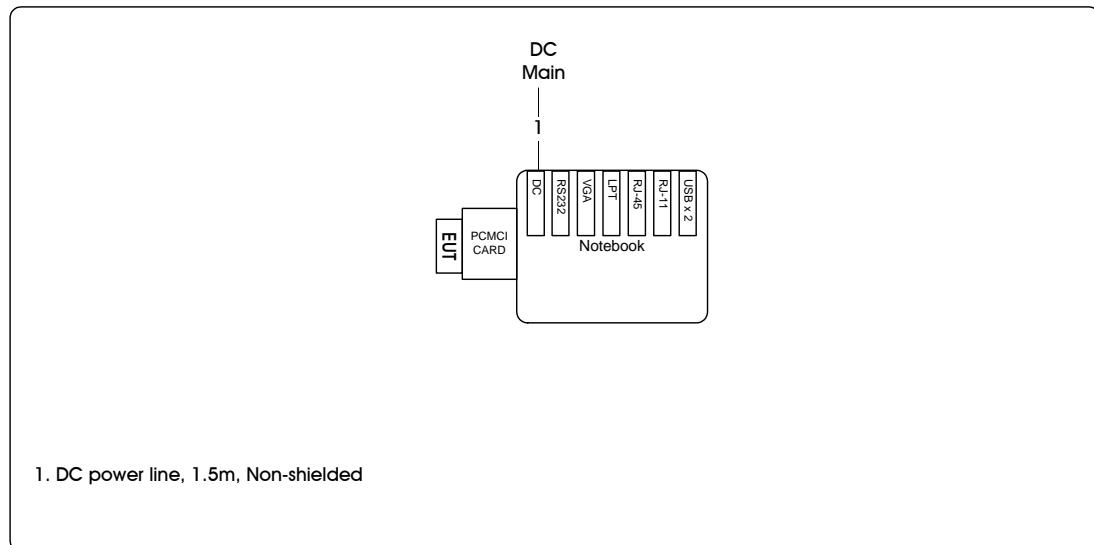

3.9.2. AC Power Line Conduction Emissions Test Configuration

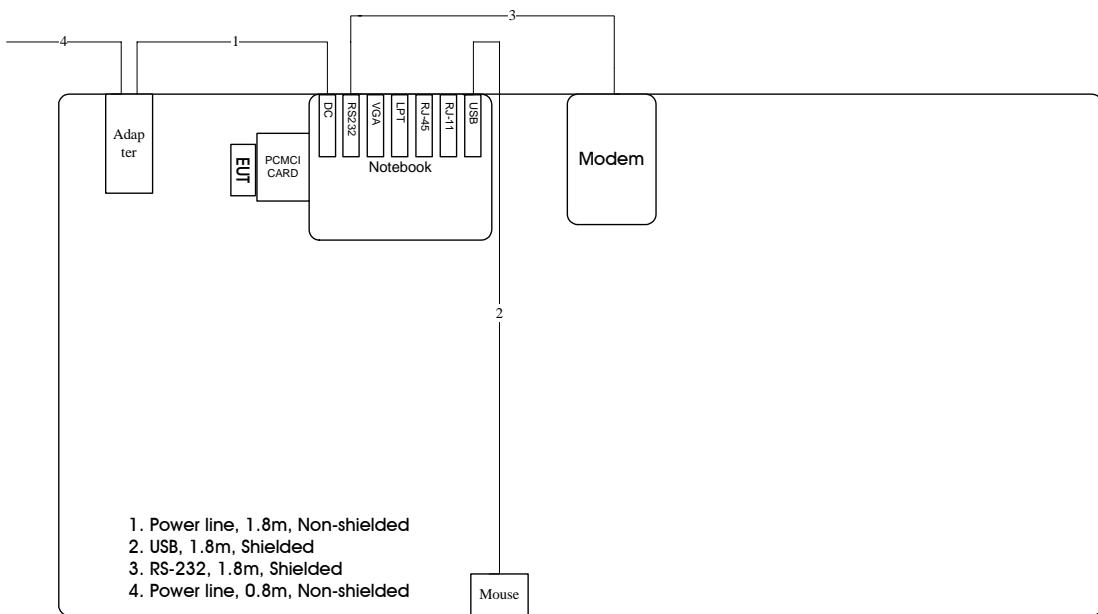

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

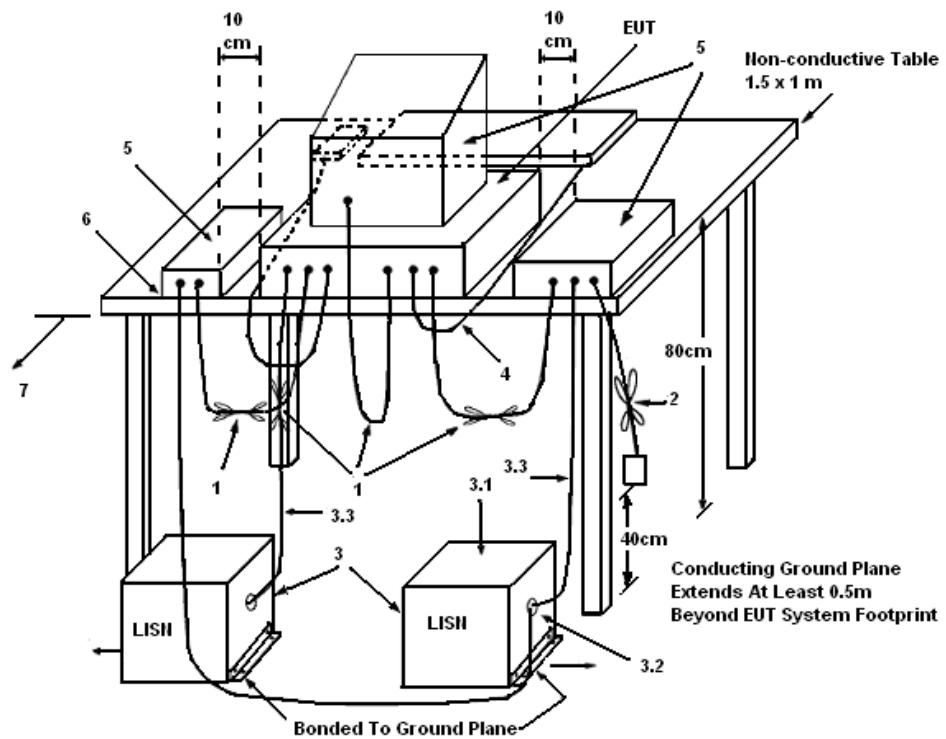

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Line
Configuration	Normal Link		

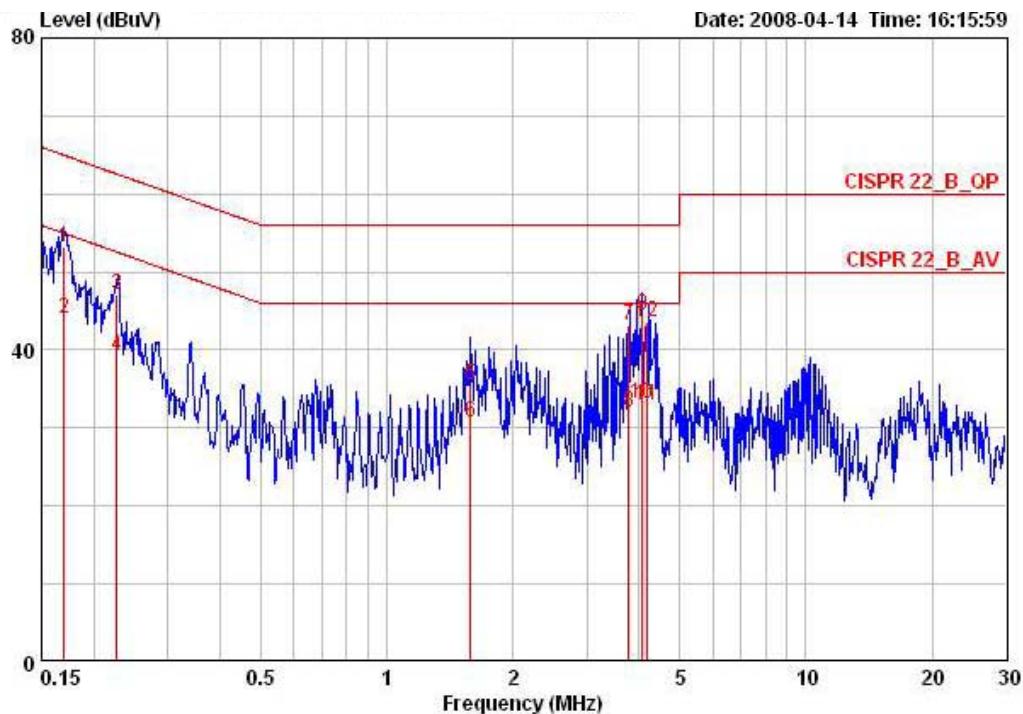

Freq	Level	Over Limit	Limit	Read		LISN	Cable
				Line	Level Factor		
	MHz	dBuV	dB	dBuV	dBuV	dB	dB
1	0.16974	53.29	-11.68	64.97	52.94	0.15	0.20 QP
2	0.16974	44.06	-10.91	54.97	43.71	0.15	0.20 AVERAGE
3	0.22718	47.01	-15.54	62.55	46.71	0.10	0.20 QP
4	0.22718	39.21	-13.34	52.55	38.91	0.10	0.20 AVERAGE
5	1.582	35.44	-20.56	56.00	35.32	0.00	0.12 QP
6	1.582	30.76	-15.24	46.00	30.64	0.00	0.12 AVERAGE
7	3.779	43.26	-12.74	56.00	42.96	0.00	0.30 QP
8	3.779	31.98	-14.02	46.00	31.68	0.00	0.30 AVERAGE
9	4.066	44.40	-11.60	56.00	44.10	0.00	0.30 QP
10	4.066	33.24	-12.76	46.00	32.94	0.00	0.30 AVERAGE
11	4.177	32.90	-13.10	46.00	32.60	0.00	0.30 AVERAGE
12	4.177	43.52	-12.48	56.00	43.22	0.00	0.30 QP

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Neutral
Configuration	Normal Link		

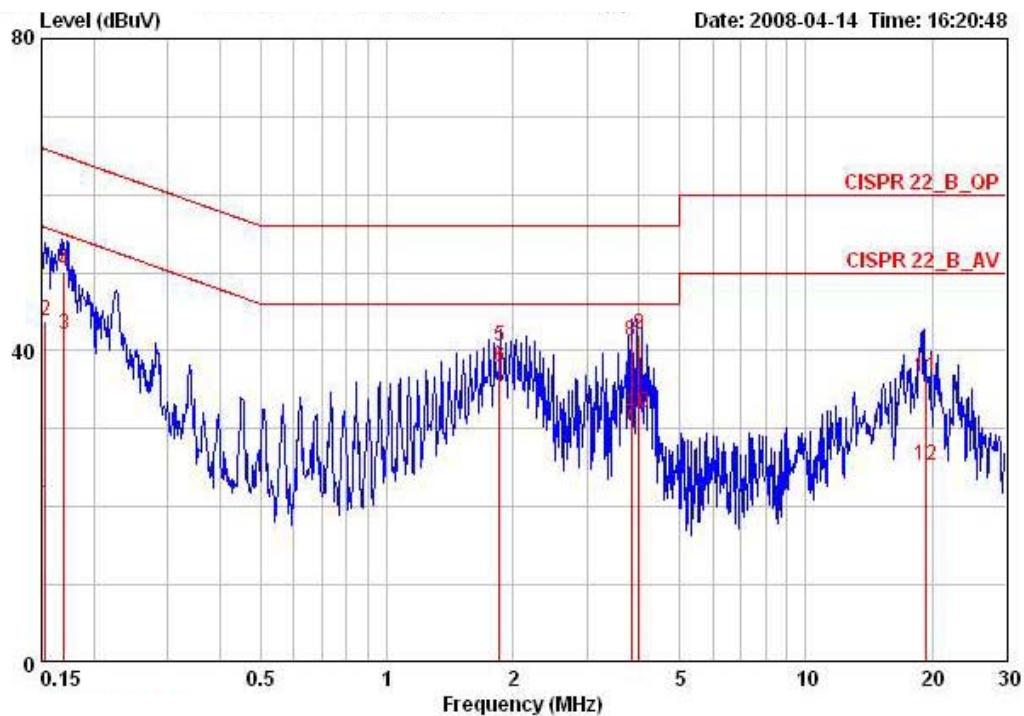

Freq	Level	Over Limit	Limit Line	Read Level	LISN		Cable Loss	Remark
					MHz	dBuV	dB	
1	0.15321	20.24	-35.58	55.82	19.74	0.30	0.20	AVERAGE
2	0.15321	43.71	-22.11	65.82	43.21	0.30	0.20	QP
3	0.16965	41.98	-13.00	54.98	41.53	0.25	0.20	AVERAGE
4	0.16965	50.05	-14.93	64.98	49.60	0.25	0.20	QP
5	1.859	40.64	-15.36	56.00	40.37	0.10	0.17	QP
6	1.859	38.01	-7.99	46.00	37.74	0.10	0.17	AVERAGE
7	3.829	30.60	-15.40	46.00	30.20	0.10	0.30	AVERAGE
8	3.829	41.10	-14.90	56.00	40.70	0.10	0.30	QP
9	3.999	42.16	-13.84	56.00	41.76	0.10	0.30	QP
10	3.999	32.02	-13.98	46.00	31.62	0.10	0.30	AVERAGE
11	19.250	36.58	-23.42	60.00	35.98	0.10	0.50	QP
12	19.250	25.36	-24.64	50.00	24.76	0.10	0.50	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.2.4. Test Setup Layout

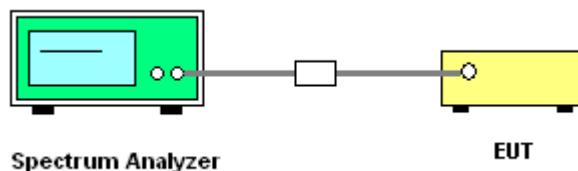

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	22°C	Humidity	61%
Test Engineer	Jacky Ho	Configurations	802.11a

Configuration IEEE 802.11a Ant. A


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.48	17.28
40	5200 MHz	20.48	17.28
48	5240 MHz	20.48	17.28
52	5260 MHz	20.64	17.28
60	5300 MHz	20.48	17.28
64	5320 MHz	20.48	17.28
100	5500 MHz	20.48	17.28
116	5580 MHz	20.48	17.28
140	5700 MHz	20.64	17.28

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A / 5180 MHz

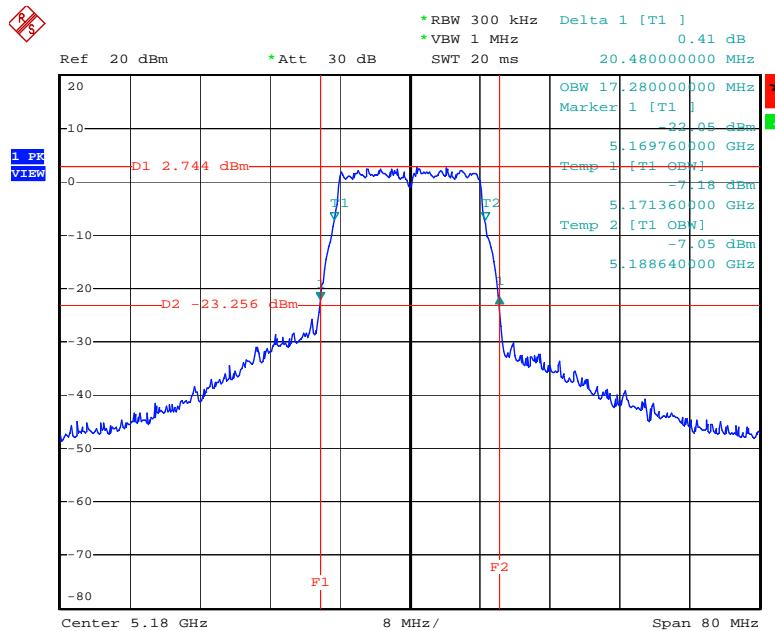


Date: 10.APR.2008 14:44:35

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A / 5200 MHz

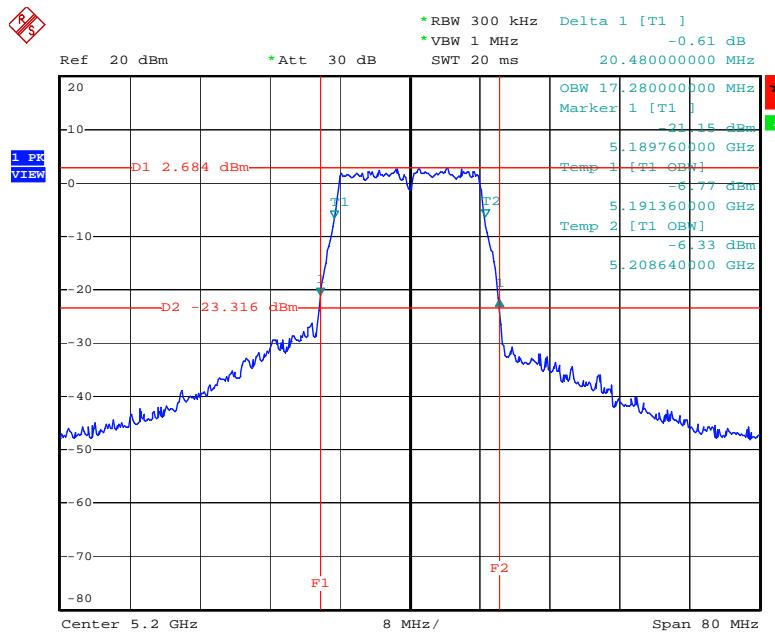


Date: 10.APR.2008 14:45:40

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A / 5240 MHz

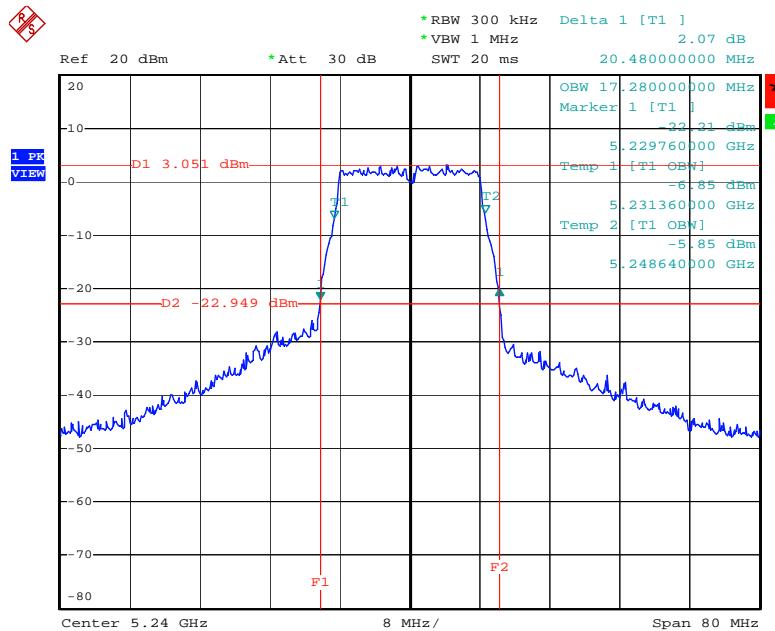


Date: 10.APR.2008 14:46:47

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A / 5260 MHz

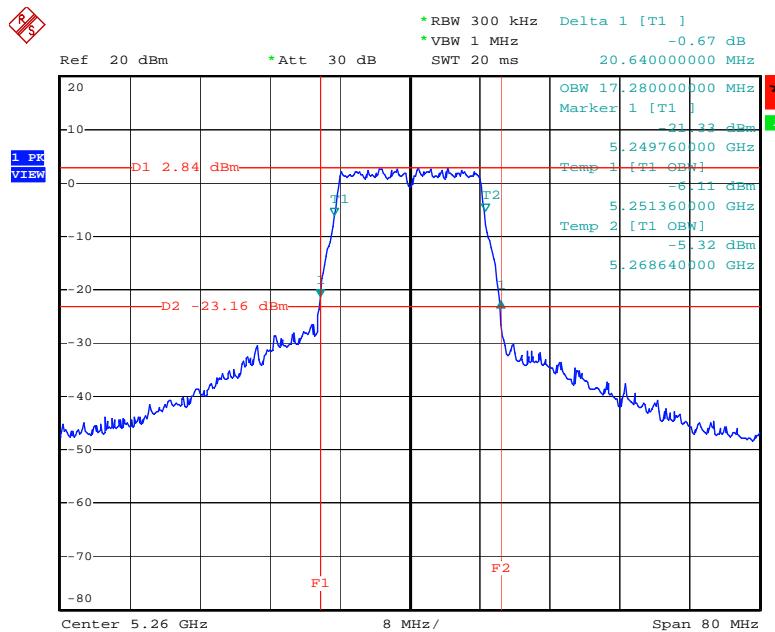


Date: 10.APR.2008 14:47:53

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A / 5300 MHz

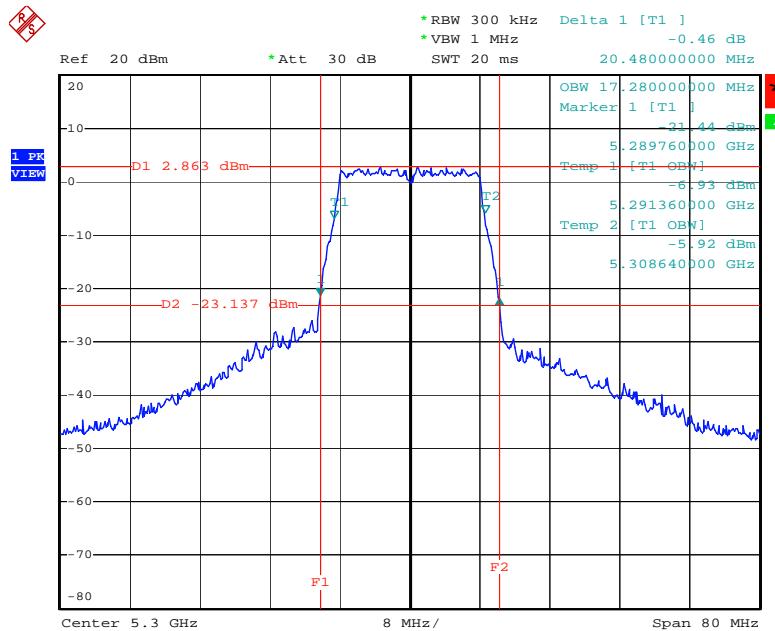


Date: 10.APR.2008 14:48:55

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A / 5320 MHz

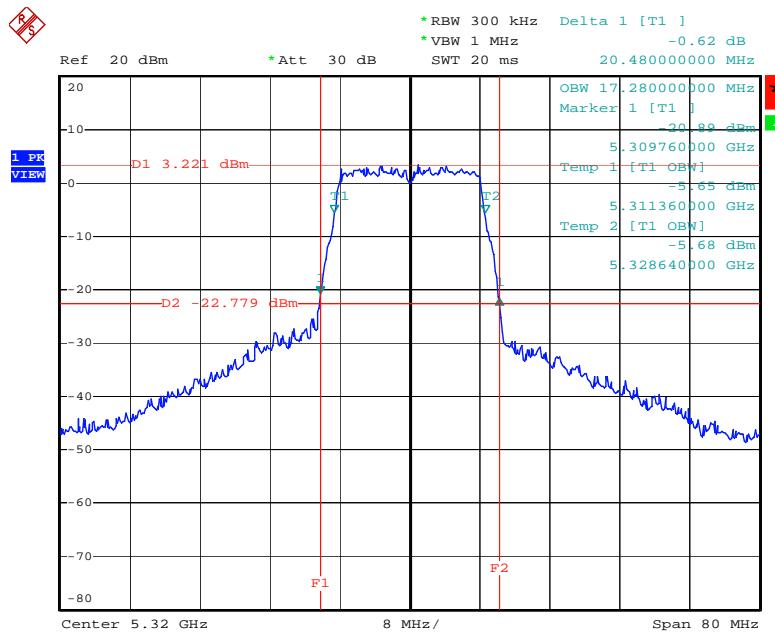


Date: 10.APR.2008 14:50:01

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A / 5500 MHz

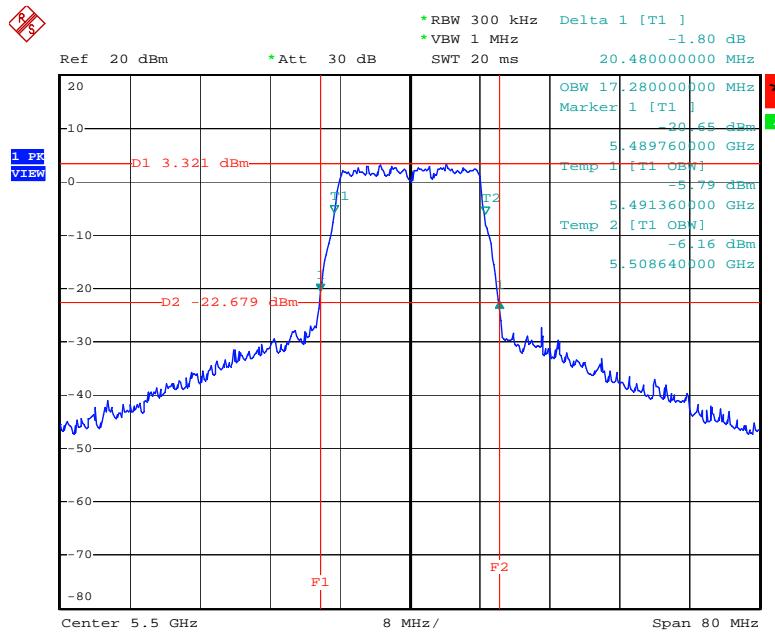


Date: 10.APR.2008 14:51:20

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A / 5580 MHz

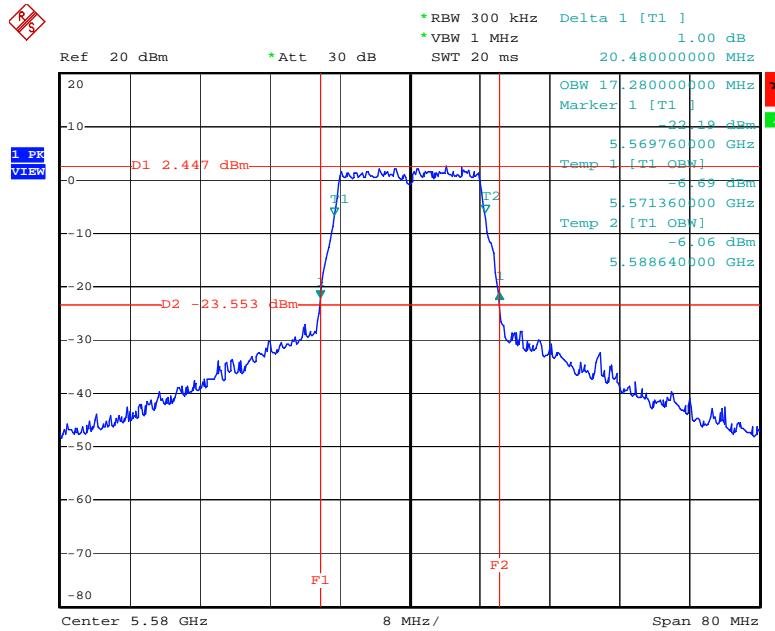

Date: 10.APR.2008 14:52:32

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A / 5700 MHz

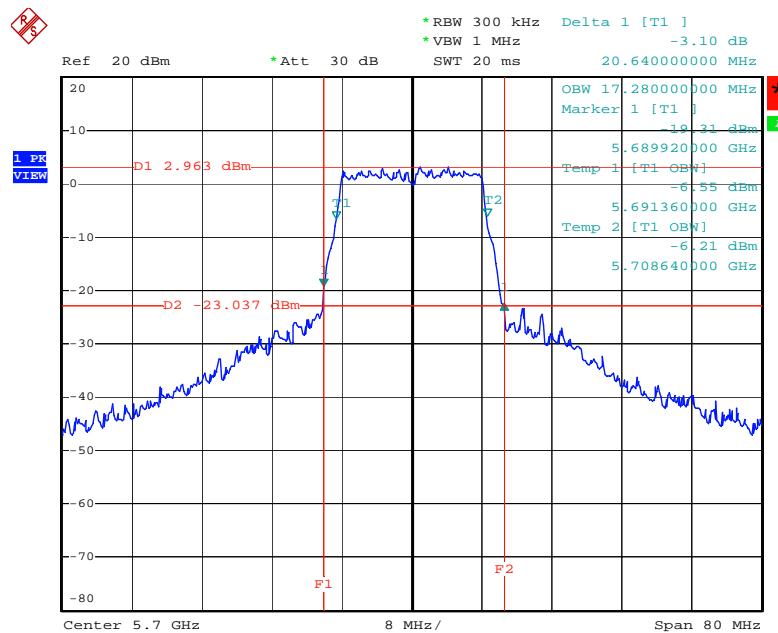

Date: 10.APR.2008 14:53:59

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or $17 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	rms
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyser through a combiner.

4.3.4. Test Setup Layout

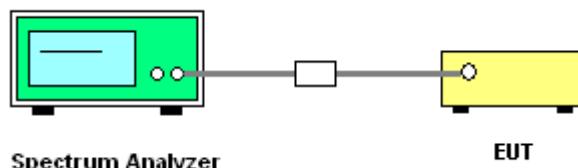

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.3.7. Test Result of Maximum Conducted Output Power

Temperature	22°C	Humidity	61%
Test Engineer	Jacky Ho	Configurations	802.11a

Configuration IEEE 802.11a Ant. A


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	12.16	17.00	Complies
40	5200 MHz	12.89	17.00	Complies
48	5240 MHz	12.90	17.00	Complies
52	5260 MHz	12.71	24.00	Complies
60	5300 MHz	12.82	24.00	Complies
64	5320 MHz	13.20	24.00	Complies
100	5500 MHz	13.44	24.00	Complies
116	5580 MHz	12.28	24.00	Complies
140	5700 MHz	12.95	24.00	Complies

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5180 MHz

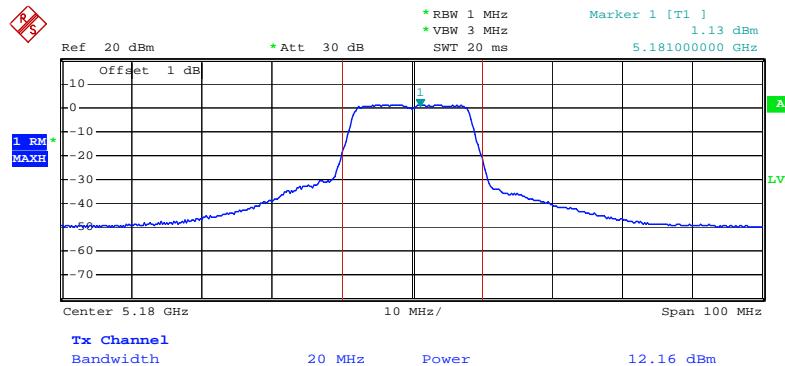


Date: 10.APR.2008 13:09:12

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5200 MHz

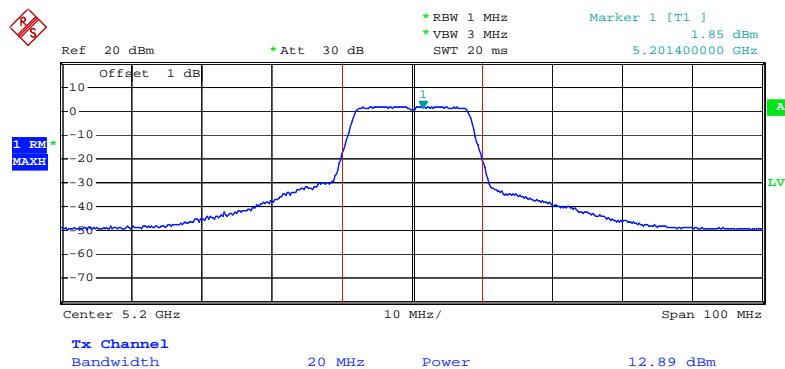


Date: 10.APR.2008 13:11:41

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5240 MHz

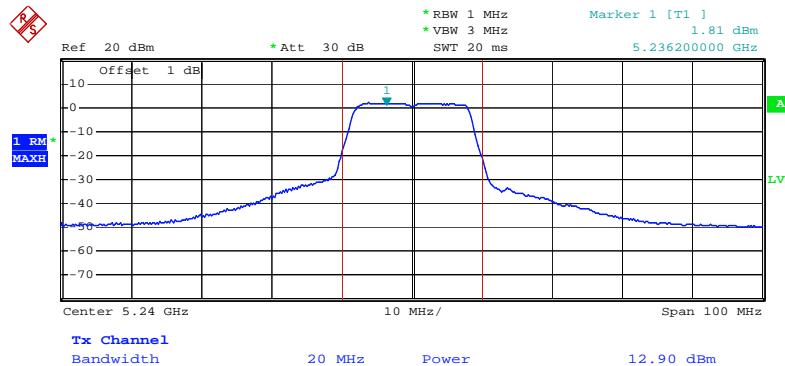


Date: 10.APR.2008 13:12:52

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5260 MHz

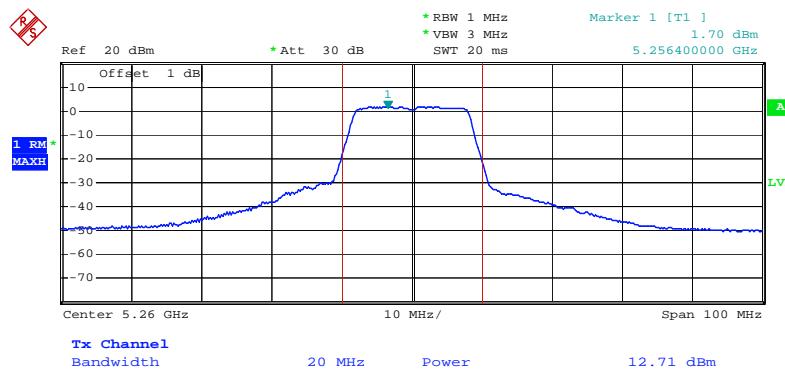


Date: 10.APR.2008 13:13:47

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5300 MHz

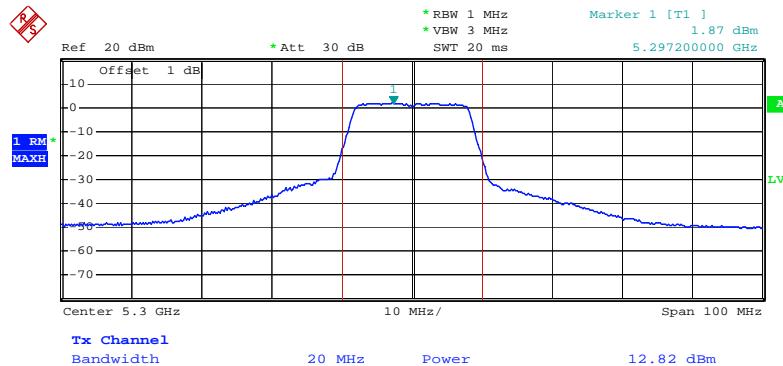


Date: 10.APR.2008 13:14:48

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5320 MHz

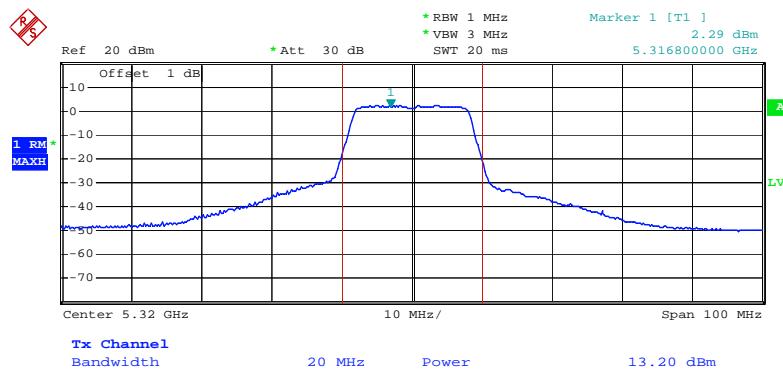


Date: 10.APR.2008 13:15:42

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5500 MHz

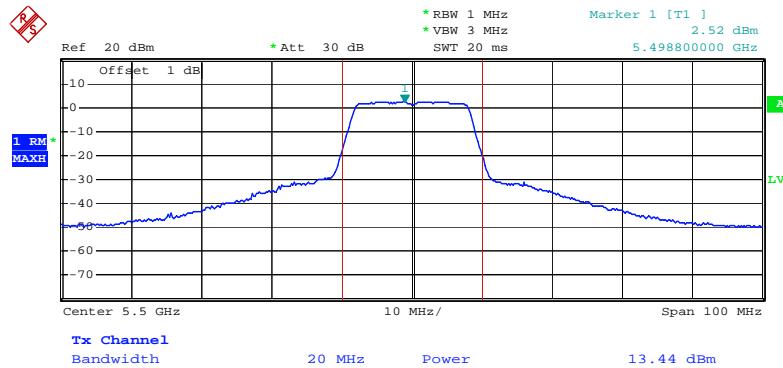


Date: 10.APR.2008 13:16:40

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5580 MHz

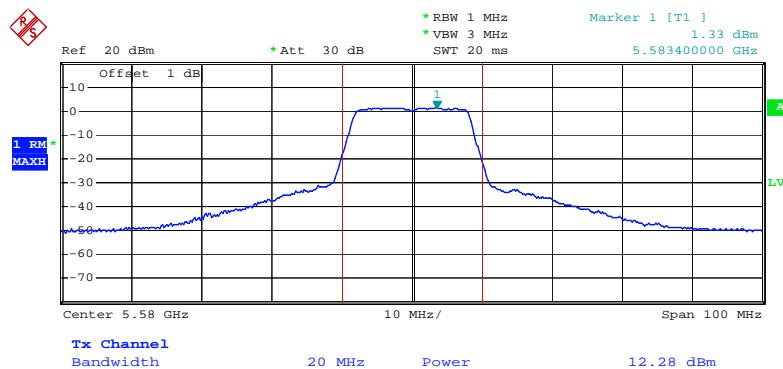

Date: 10.APR.2008 13:17:34

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5700 MHz

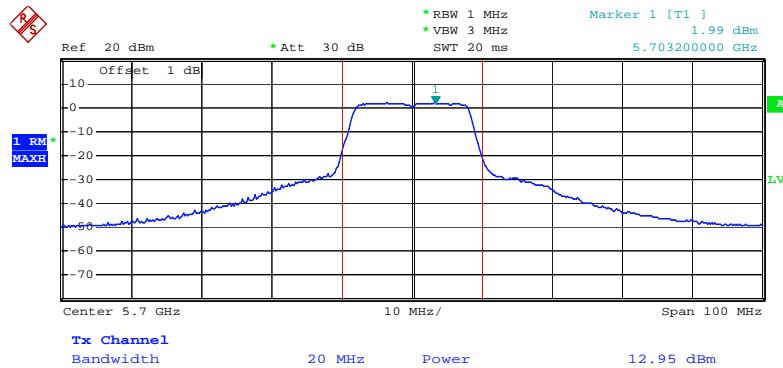

Date: 10.APR.2008 13:18:30

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5470-5725	11

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	rms
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.4.4. Test Setup Layout

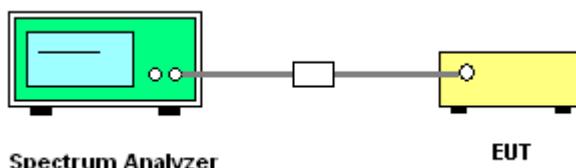

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.4.7. Test Result of Power Spectral Density

Temperature	22°C	Humidity	61%
Test Engineer	Jacky Ho	Configurations	802.11a

Configuration IEEE 802.11a Ant. A


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	1.27	4.00	Complies
40	5200 MHz	1.33	4.00	Complies
48	5240 MHz	1.77	4.00	Complies
52	5260 MHz	1.62	11.00	Complies
60	5300 MHz	1.66	11.00	Complies
64	5320 MHz	1.55	11.00	Complies
100	5500 MHz	1.90	11.00	Complies
116	5580 MHz	1.00	11.00	Complies
140	5700 MHz	1.55	11.00	Complies

Power Density Plot on Configuration IEEE 802.11a Ant. A / 5180 MHz

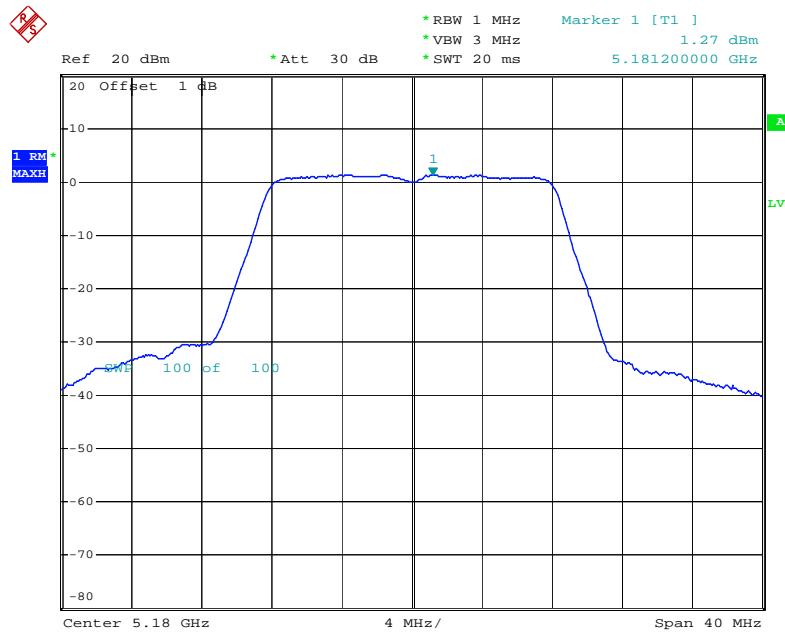


Date: 16.APR.2008 19:18:41

Power Density Plot on Configuration IEEE 802.11a Ant. A / 5200 MHz

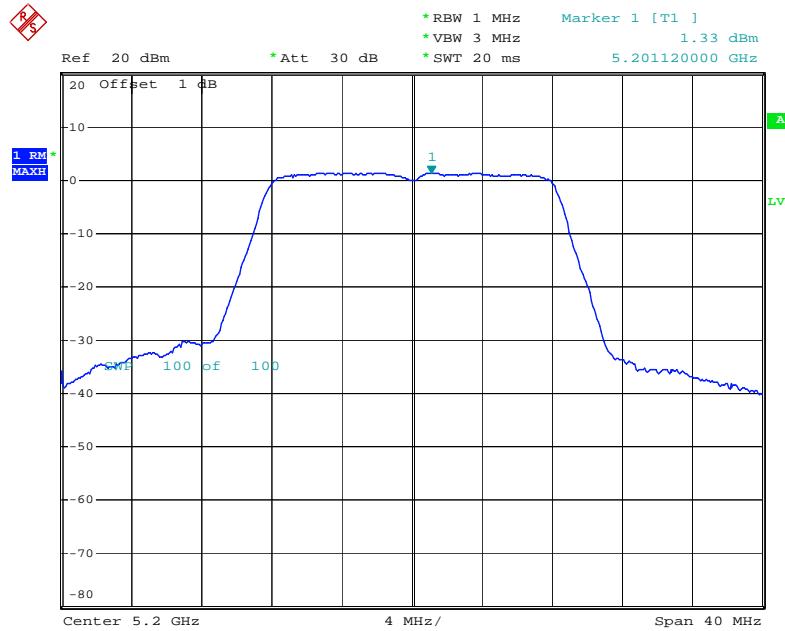


Date: 16.APR.2008 19:21:04

Power Density Plot on Configuration IEEE 802.11a Ant. A / 5240 MHz

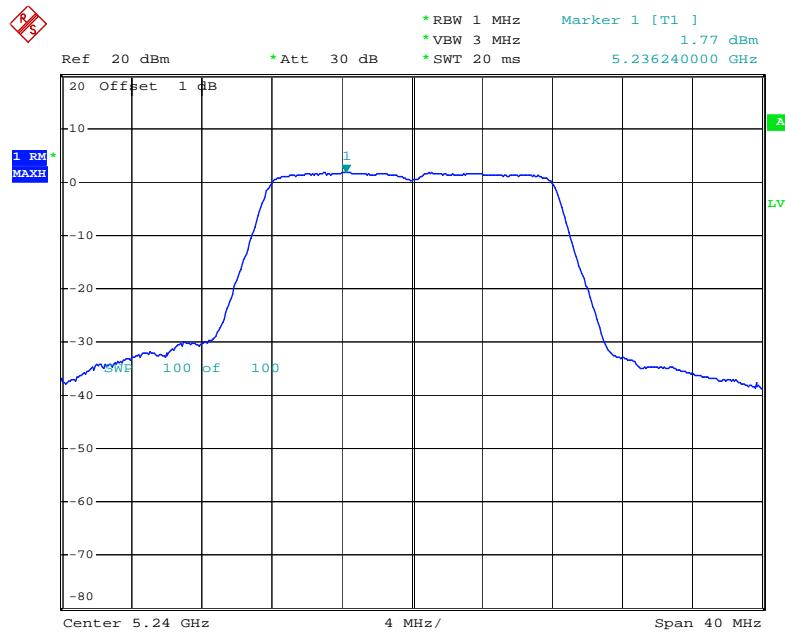


Date: 16.APR.2008 19:21:51

Power Density Plot on Configuration IEEE 802.11a Ant. A / 5260 MHz

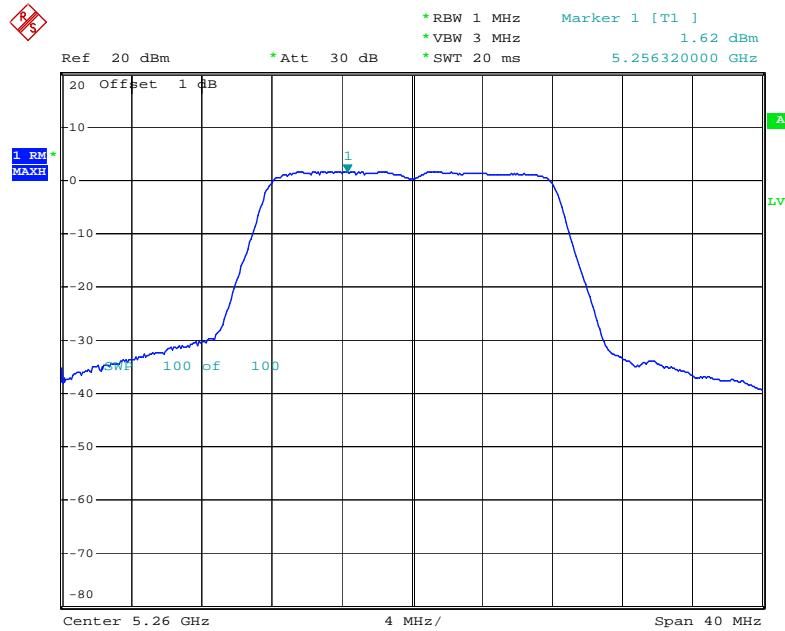


Date: 16.APR.2008 19:22:48

Power Density Plot on Configuration IEEE 802.11a Ant. A / 5300 MHz

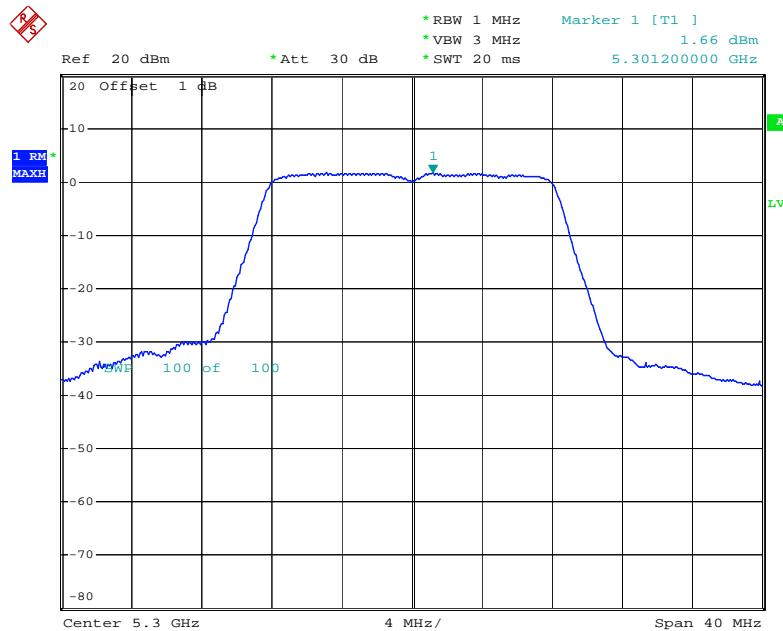


Date: 16.APR.2008 19:23:55

Power Density Plot on Configuration IEEE 802.11a Ant. A / 5320 MHz

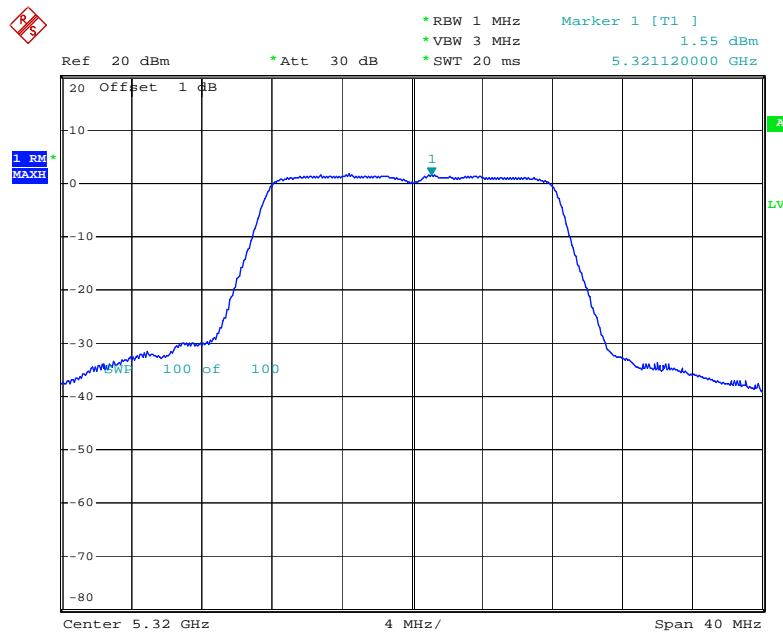


Date: 16.APR.2008 19:24:50

Power Density Plot on Configuration IEEE 802.11a Ant. A / 5500 MHz

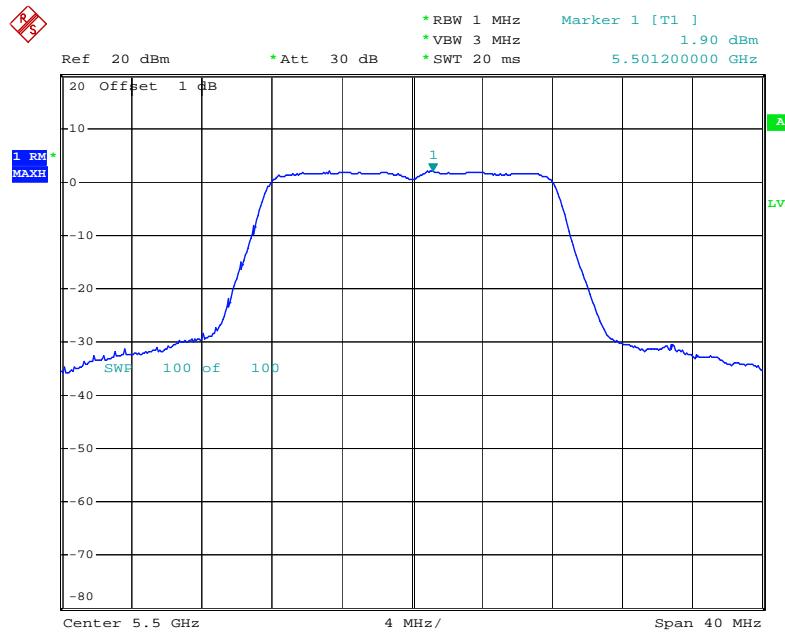


Date: 16.APR.2008 19:27:48

Power Density Plot on Configuration IEEE 802.11a Ant. A / 5580 MHz

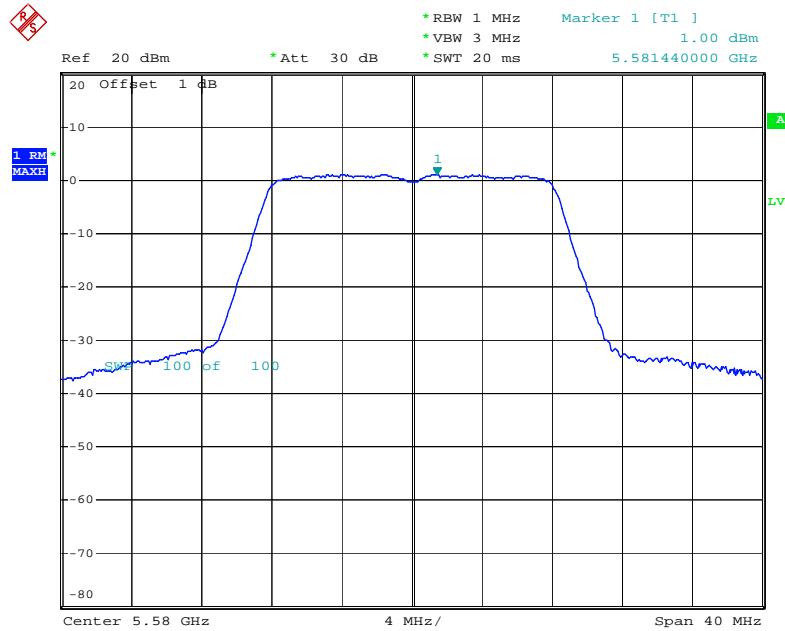

Date: 16.APR.2008 20:12:55

Power Density Plot on Configuration IEEE 802.11a Ant. A / 5700 MHz

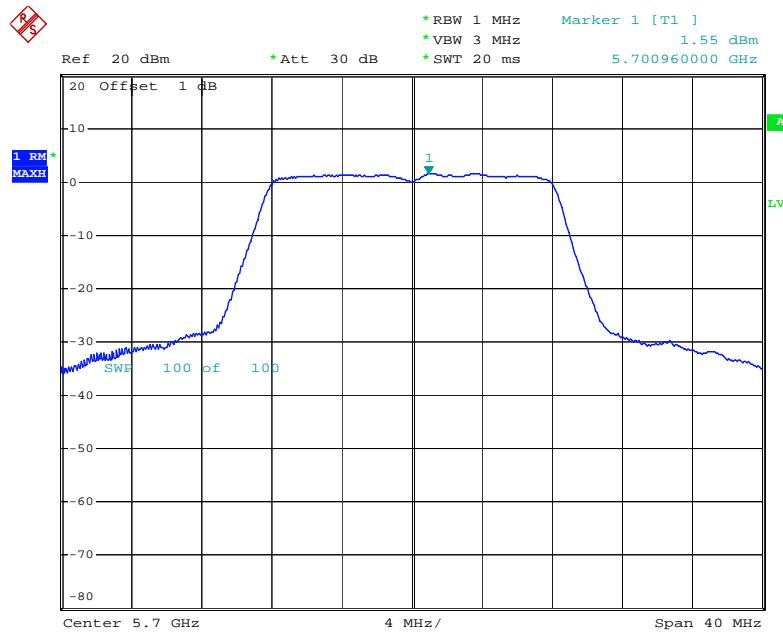

Date: 16.APR.2008 19:31:13

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be ≤ 13 dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW \geq 3 MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to “free run”. Set RBW = 1 MHz. Set VBW $\geq 1/T$ (IEEE 802.11a VBW = 300kHz $\geq 1/4 \mu s$). Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.5.4. Test Setup Layout

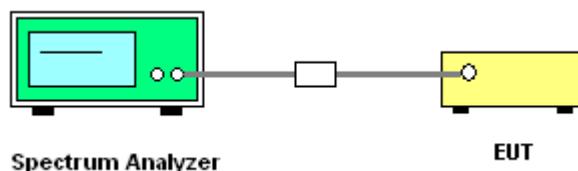

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.5.7. Test Result of Peak Excursion

Temperature	22°C	Humidity	61%
Test Engineer	Jacky Ho	Configurations	802.11a

Configuration IEEE 802.11a Ant. A


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	5.48	13	Complies
40	5200 MHz	4.71	13	Complies
48	5240 MHz	4.65	13	Complies
52	5260 MHz	5.92	13	Complies
60	5300 MHz	5.72	13	Complies
64	5320 MHz	5.59	13	Complies
100	5500 MHz	4.04	13	Complies
116	5580 MHz	5.43	13	Complies
140	5700 MHz	5.56	13	Complies

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A / 5180 MHz

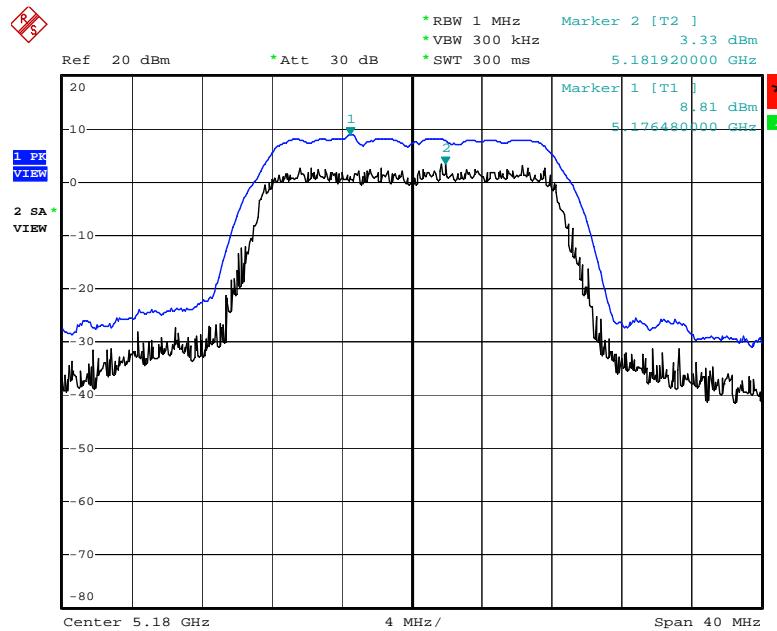


Date: 10.APR.2008 14:44:54

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A / 5200 MHz

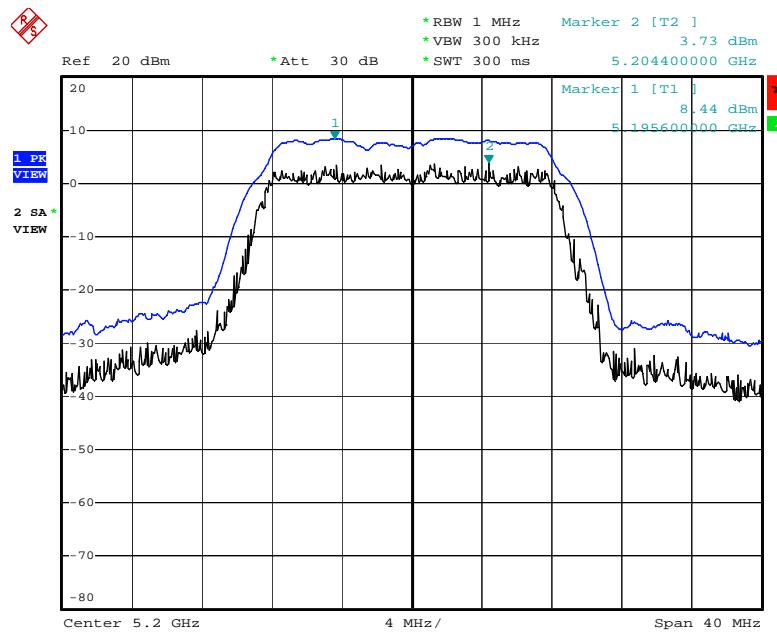


Date: 10.APR.2008 14:45:59

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A / 5240 MHz

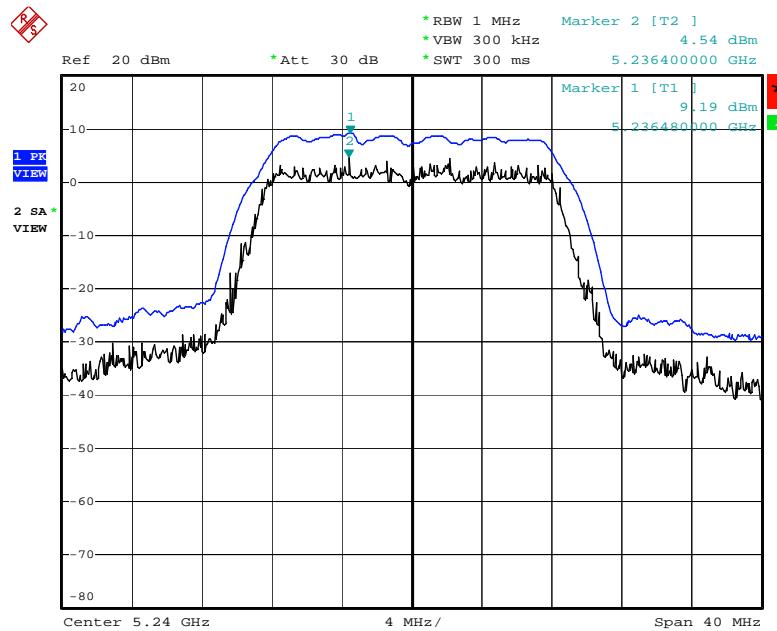


Date: 10.APR.2008 14:47:06

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A / 5260 MHz

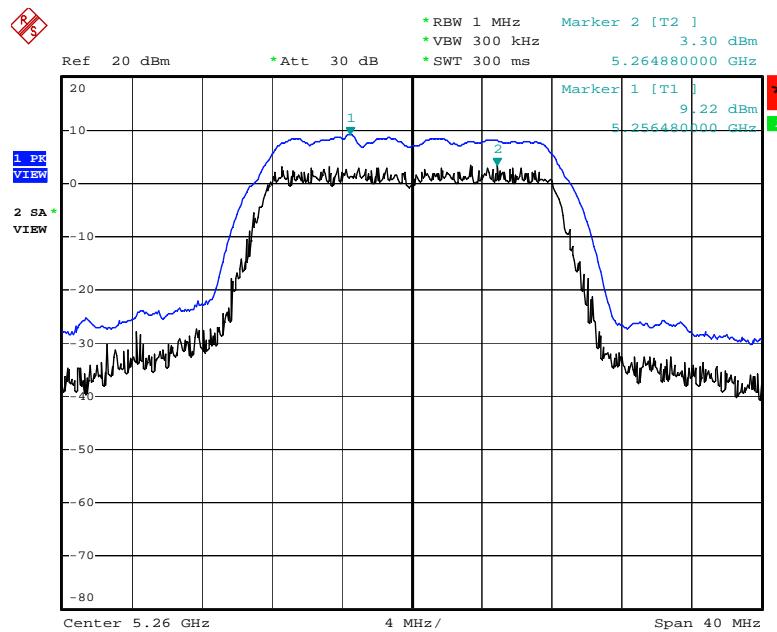


Date: 10.APR.2008 14:48:11

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A / 5300 MHz

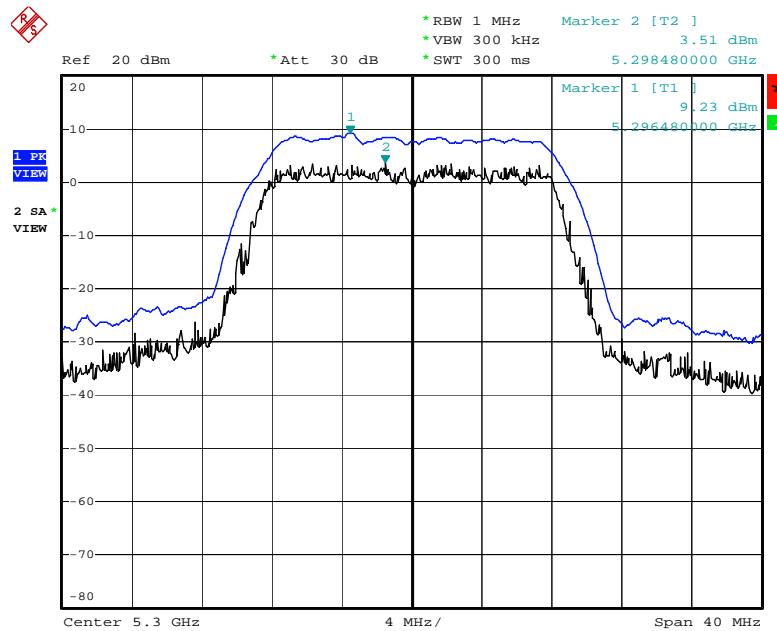


Date: 10.APR.2008 14:49:14

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A / 5320 MHz

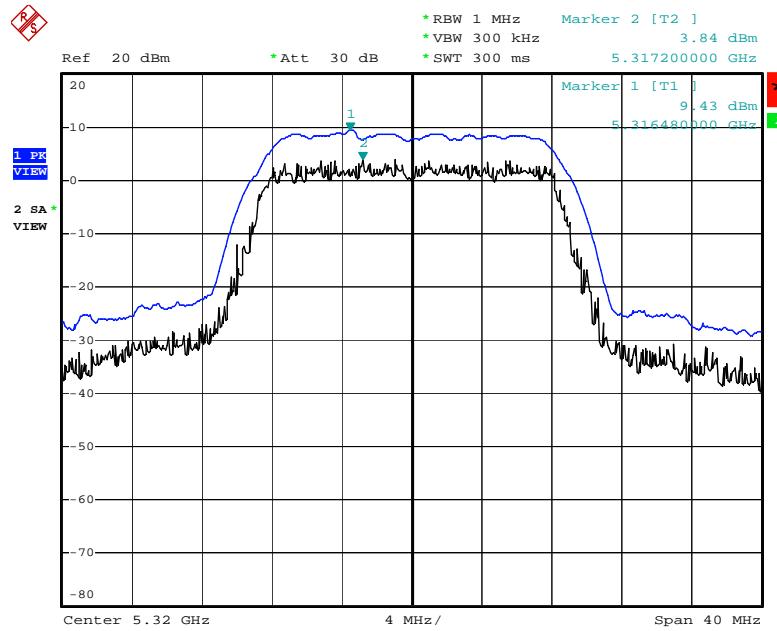


Date: 10.APR.2008 14:50:20

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A / 5500 MHz

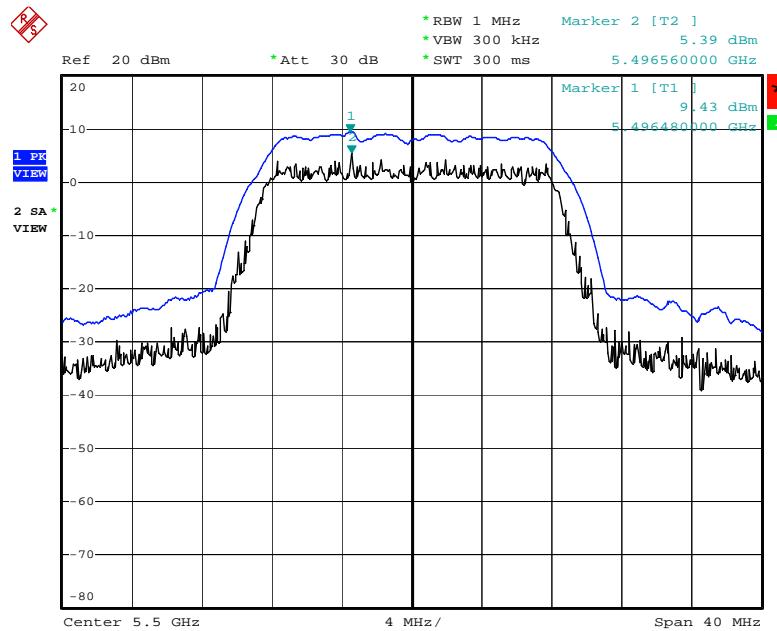


Date: 10.APR.2008 14:51:41

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A / 5580 MHz

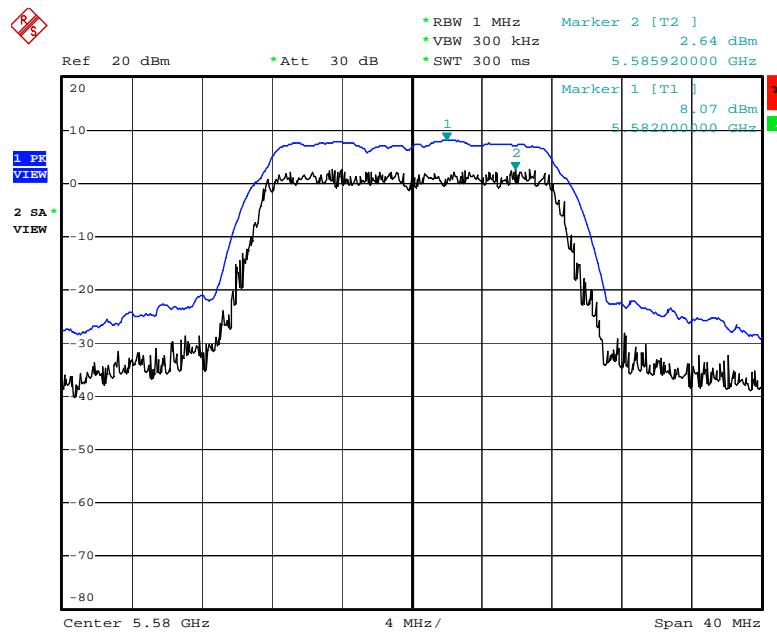

Date: 10.APR.2008 14:52:53

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A / 5700 MHz

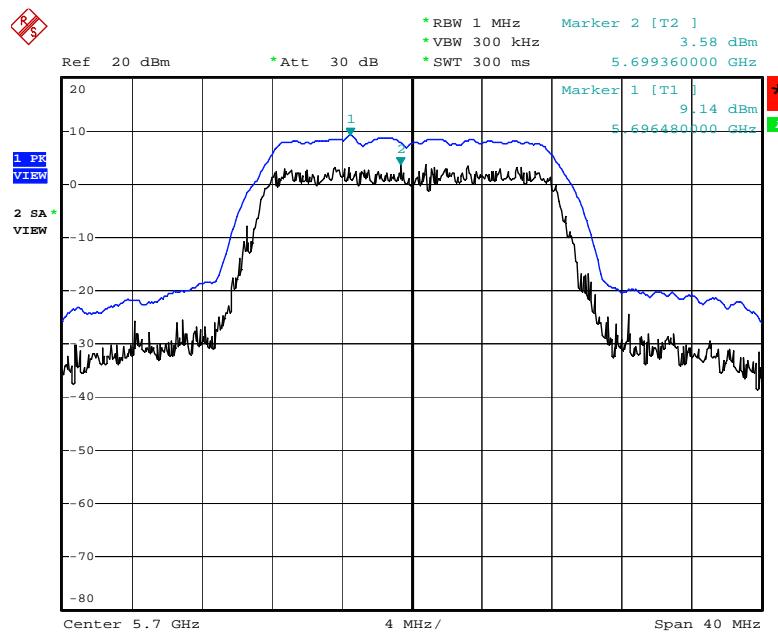

Date: 10.APR.2008 14:54:20

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

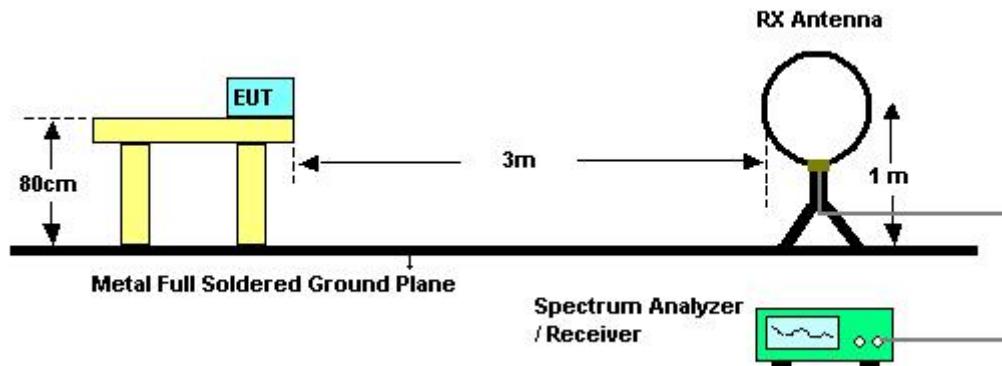

For radiated emissions above 30MHz

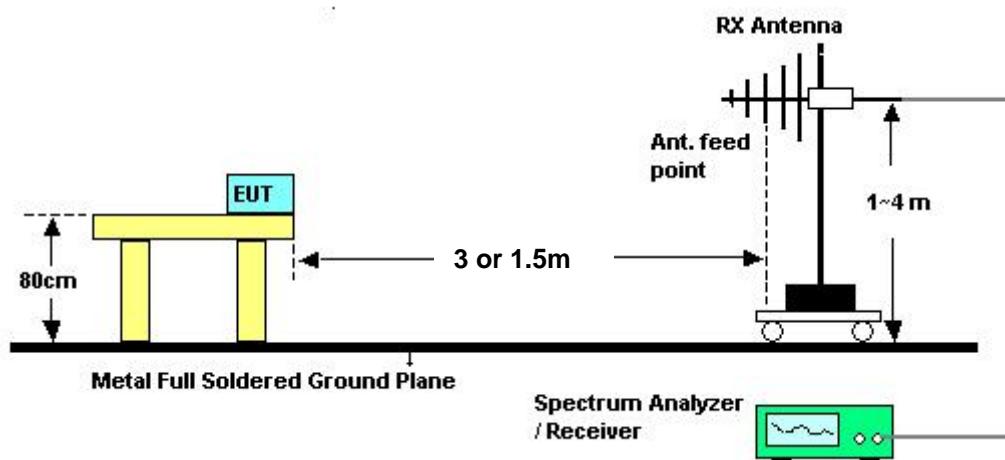

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	Normal Link

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	Normal Link

Horizontal

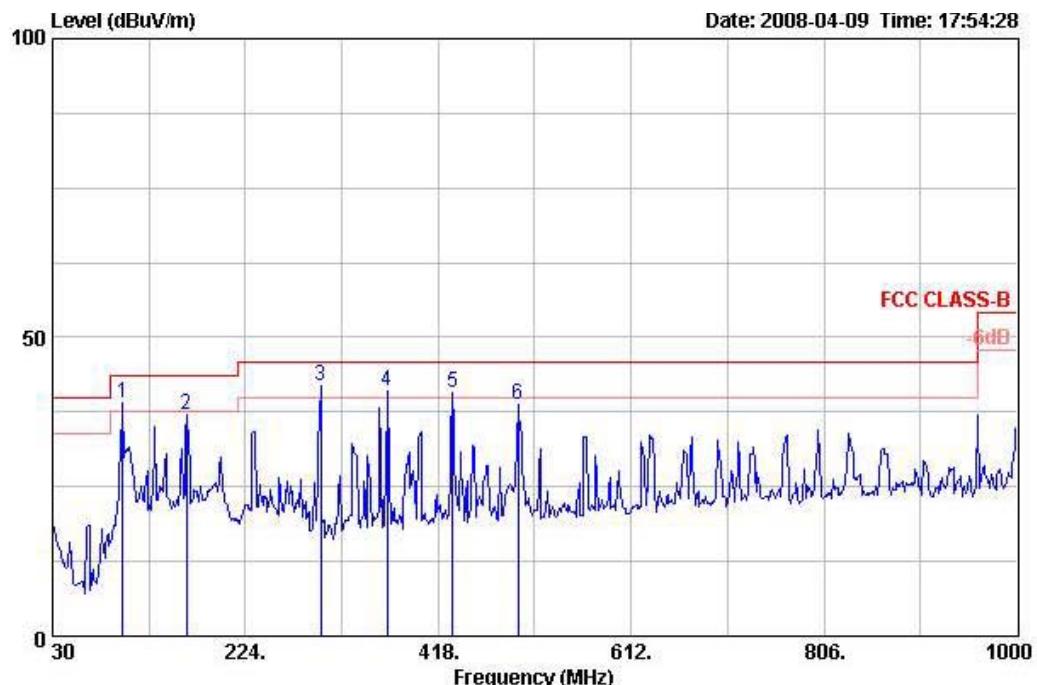

Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant		
		Line	Limit	Level	Factor	Factor	Loss			Pos	Pol/Phase
		MHz	dBuV/m		dB	dBuV/m	dB/m			deg	cm
1 @	100.810	38.91	-4.59	43.50	54.94	10.37	27.60	1.20	Peak	0	100 HORIZONTAL
2 @	164.830	37.14	-6.36	43.50	54.04	8.85	27.27	1.52	Peak	0	100 HORIZONTAL
3 @	299.660	41.86	-4.14	46.00	53.76	12.90	26.90	2.10	Peak	0	100 HORIZONTAL
4 @	366.590	40.98	-5.02	46.00	51.52	14.60	27.37	2.23	Peak	0	100 HORIZONTAL
5 @	432.550	40.79	-5.21	46.00	49.68	16.37	27.76	2.50	Peak	0	100 HORIZONTAL
6 @	498.510	38.72	-7.28	46.00	46.87	17.24	28.09	2.70	Peak	0	100 HORIZONTAL

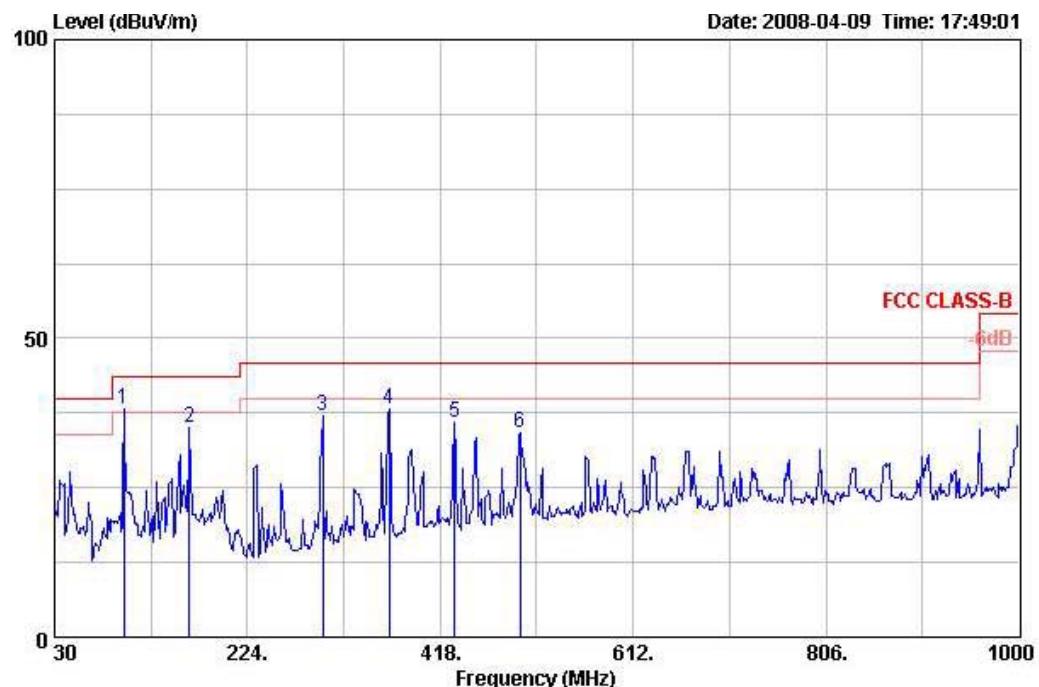Vertical


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant	
		Limit	Line	Level	Factor	Factor	Loss			Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm	
1 @	99.840	38.30	-5.20	43.50	54.45	10.25	27.60	1.20 Peak	0	400 VERTICAL
2 @	165.800	35.17	-8.33	43.50	52.10	8.82	27.27	1.53 Peak	0	400 VERTICAL
3 @	299.660	37.03	-8.97	46.00	48.93	12.90	26.90	2.10 Peak	0	400 VERTICAL
4 @	366.590	38.17	-7.83	46.00	48.70	14.60	27.37	2.23 Peak	0	400 VERTICAL
5 @	432.550	35.79	-10.21	46.00	44.68	16.37	27.76	2.50 Peak	0	400 VERTICAL
6 @	498.510	34.13	-11.87	46.00	42.28	17.24	28.09	2.70 Peak	0	400 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	802.11a Ch 36 Ant. A

Horizontal

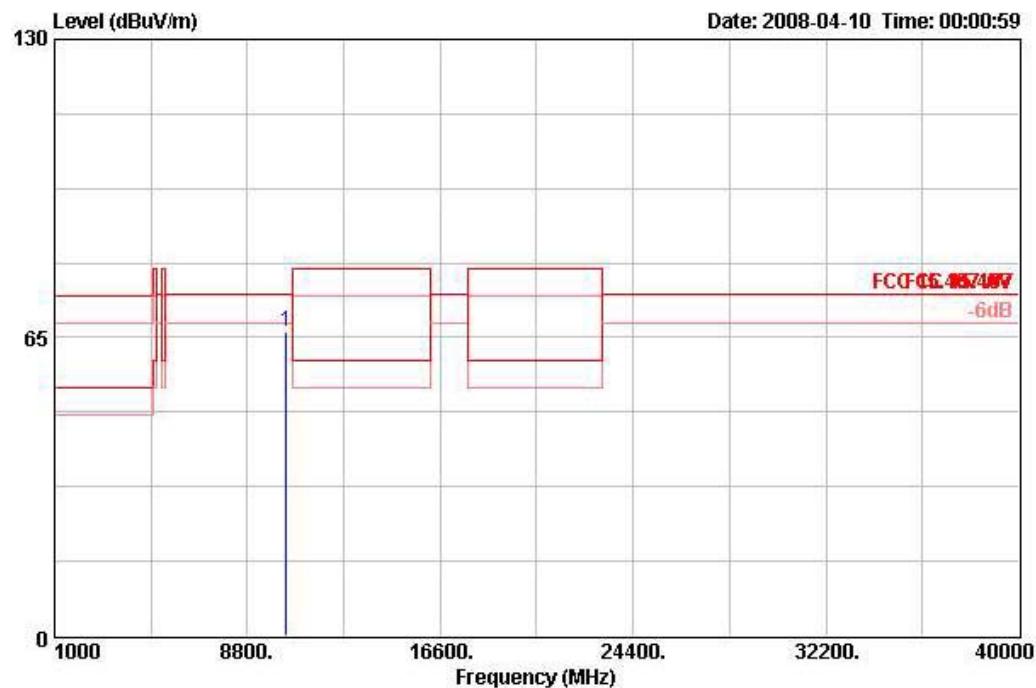


Freq MHz	Level dBuV/m	Over	Limit	Read	Antenna	Preamp	Cable	Table Pos	Ant Pos Pol/Phase
		Limit	Line	Level	Factor	Factor	Loss		
10358.940	66.40	-7.90	74.30	53.05	38.49	35.36	10.22	PEAK	165 111 HORIZONTAL

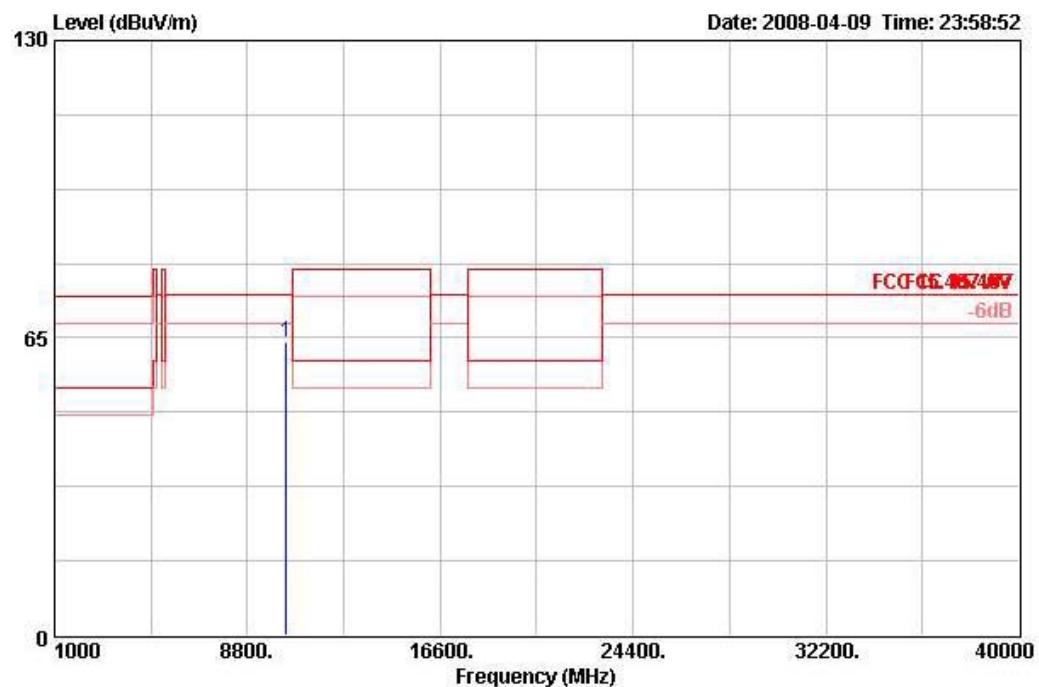
Vertical


Freq MHz	Level dBuV/m	Over Limit dB	Limit dBuV/m	Read		Antenna Level dBuV	Preamp Factor	Cable Loss dB	Remark	Table Pos	Ant Pos deg	Pol/Phase cm
				Line	Factor							
10357.800	63.99	-10.31	74.30	50.65	38.48	35.36	10.22	PERK		165	114	VERTICAL

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	802.11a Ch 40 Ant. A

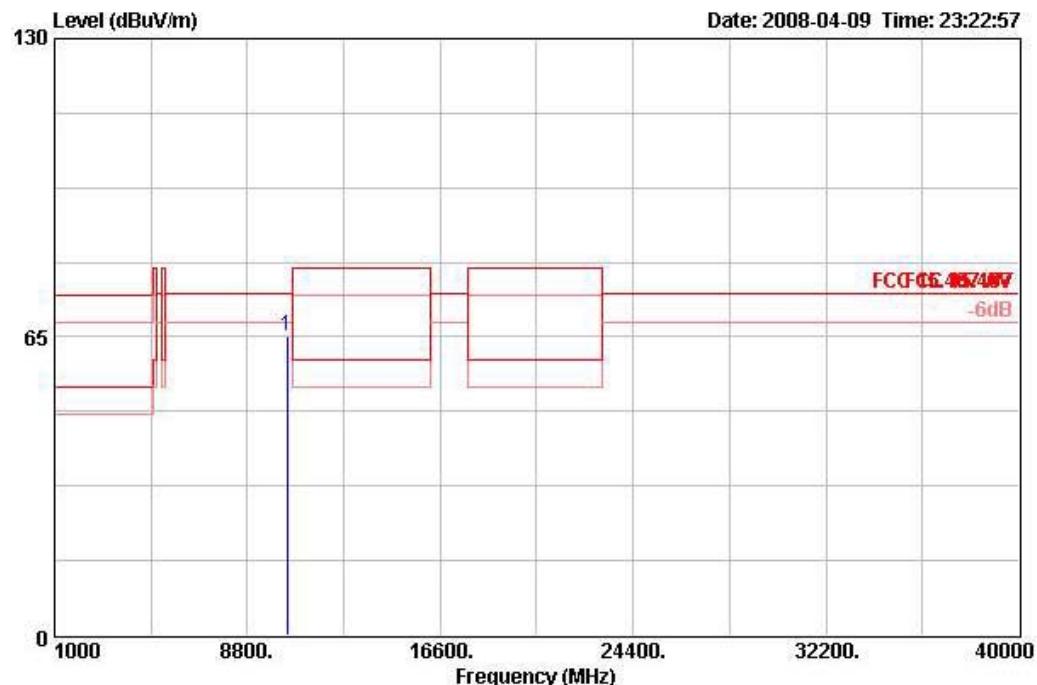
Horizontal


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant	
		Limit	Line	Level	Factor	Factor	Loss			Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm	Pol/Phase
10399.060	65.01	-9.29	74.30	51.53	38.52	35.30	10.27	PERK	153	112 HORIZONTAL

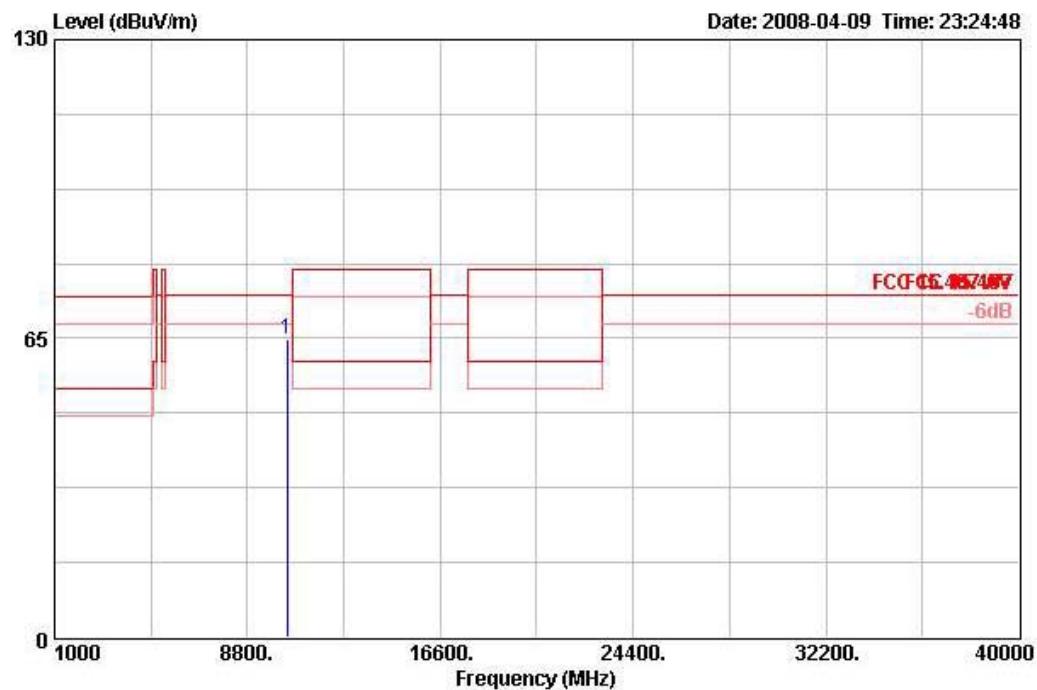
Vertical


Freq	Level	Over Limit		Read Line		Antenna Factor	Preamp Factor	Cable Loss		Remark	Table Pos	Ant Pos	Pol/Phase
		MHz	dBuV/m	dB	dBuV/m			dBuV	dB/m	dB			
10401.710	64.97	64.97	-9.33	74.30	51.48	38.52	35.30	10.27	PEAK		165	116	VERTICAL

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	802.11a Ch 48 Ant. A

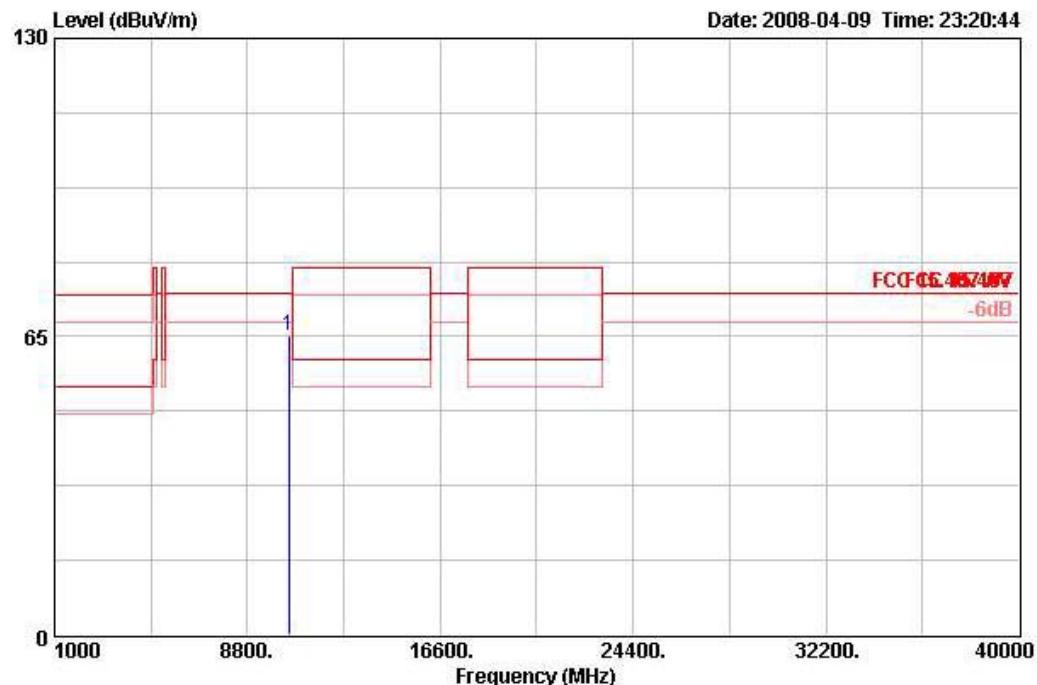
Horizontal


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant	
		Limit	Line	Level	Factor	Factor	Loss			Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm	
10478.790	65.15	-9.15	74.30	51.43	38.59	35.21	10.35	PERK	182	108 HORIZONTAL

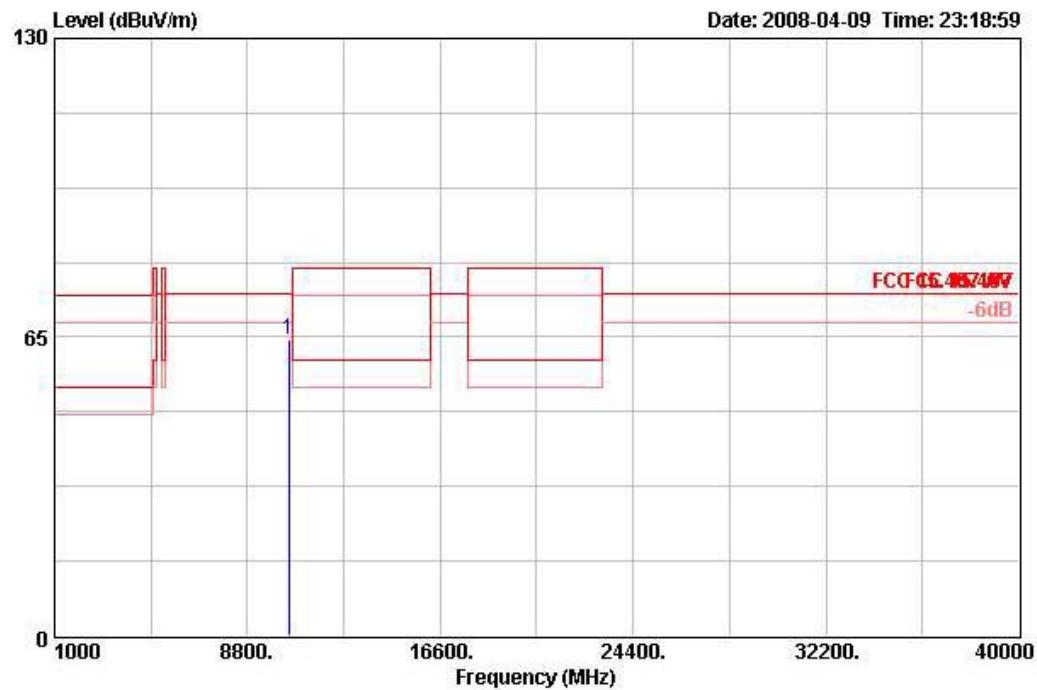
Vertical


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant			
		MHz	dBuV/m	dB	Line	Level	Factor			Pos	Pos	Pol/Phase
10482.150	64.37	-9.93	74.30	50.65	38.59	35.21	10.35	PEAK		165	120	VERTICAL

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	802.11a Ch 52 Ant. A

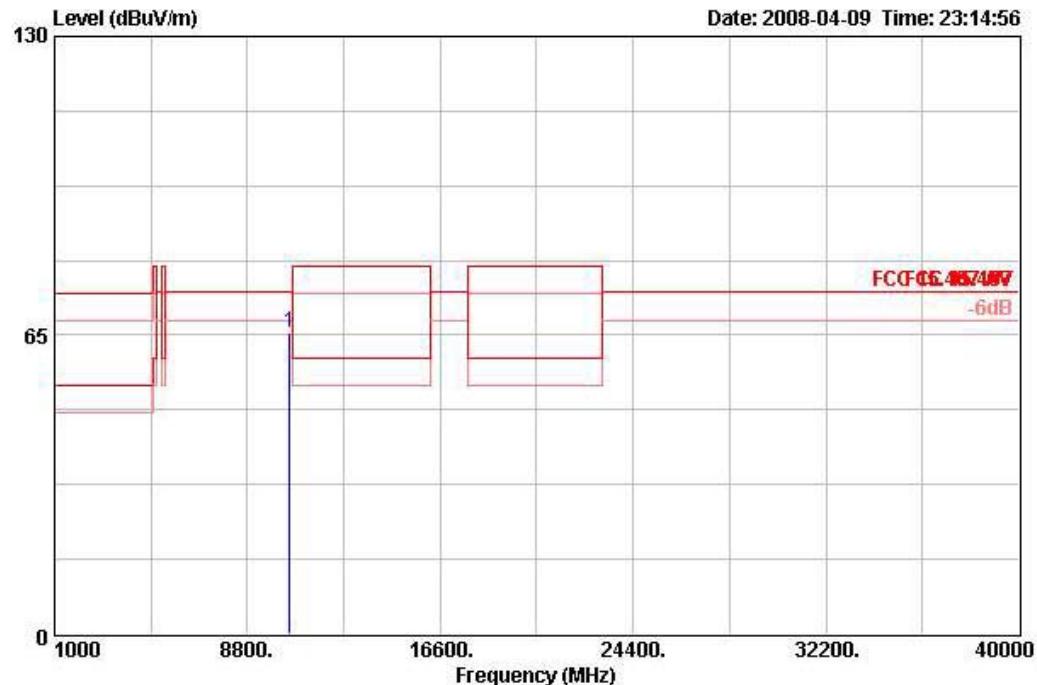
Horizontal


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m		
10517.800	65.50	-8.80	74.30	51.71	38.59	35.18	10.37 PERK	182	114 HORIZONTAL

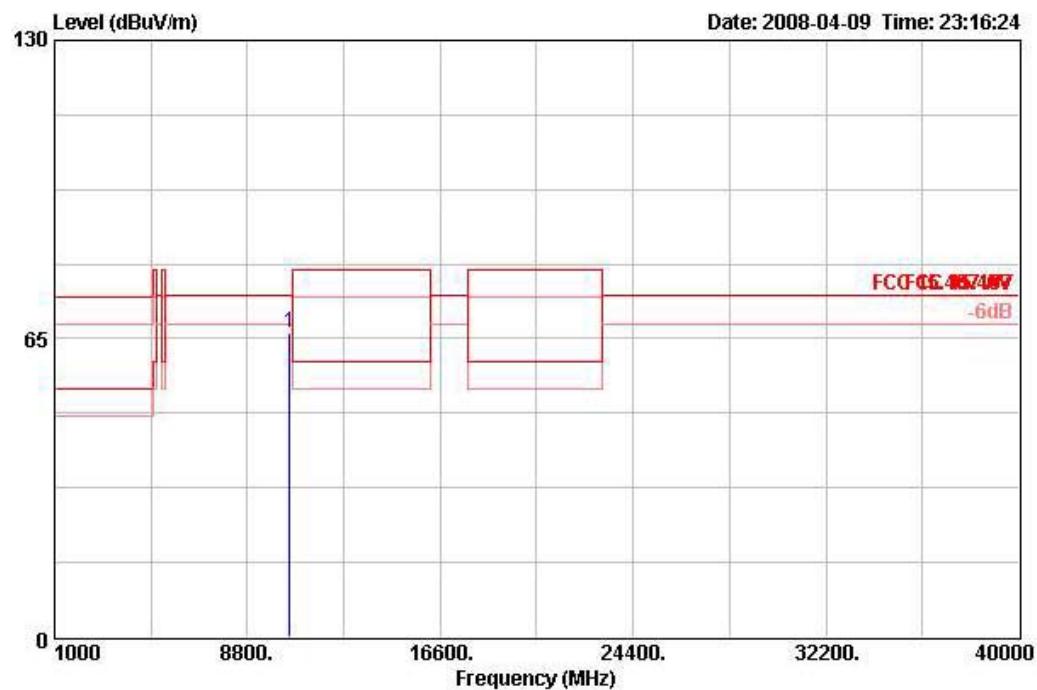
Vertical


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant			
		MHz	dBuV/m	dB	Line	Level	Factor			Pos	Pos	Pol/Phase
										deg	cm	
10518.730	66.24	-8.06	74.30	52.46	38.59	35.18	10.37	PEAK		186	112	VERTICAL

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	802.11a Ch 60 Ant. A

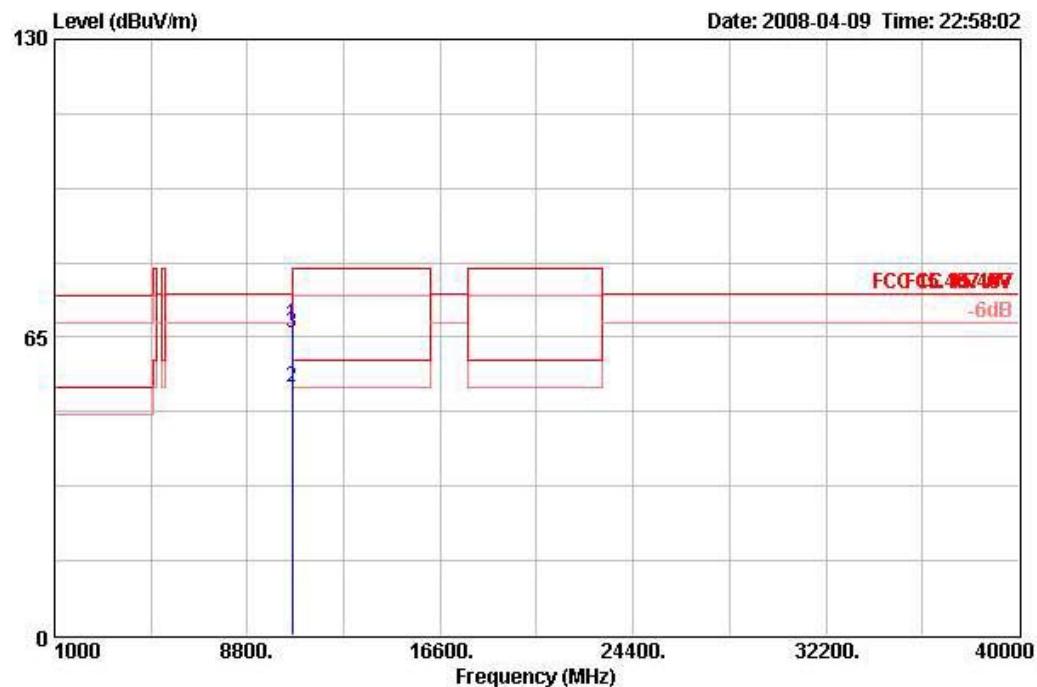Horizontal


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant		
		Limit	Line	Level	Factor	Factor	Loss			Pos	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm	Pol/Phase	
1 @	10598.010	67.66	-6.64	74.30	53.85	38.56	35.10	10.36	PERK	170	114 HORIZONTAL
2 @	10600.000	54.17	-5.83	60.00	40.36	38.56	35.10	10.36	AVERAGE	170	114 HORIZONTAL
3 @	10600.000	65.88	-14.12	80.00	52.07	38.56	35.10	10.36	PERK	170	114 HORIZONTAL

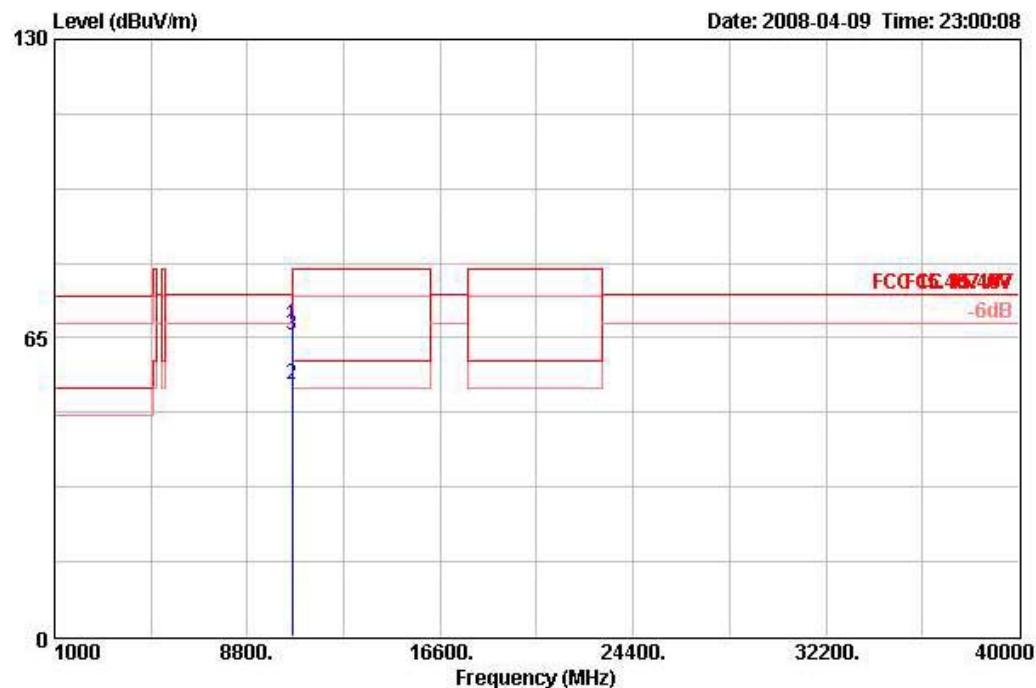
Vertical


Freq	Level	Over Limit		Read Line	Antenna Factor	Preamp Factor	Cable Loss		Remark	Table Pos	Ant Pos	Pol/Phase
		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB				
1 @	10597.790	67.84	-6.46	74.30	54.03	38.56	35.10	10.36	PEAK	185	108	VERTICAL
2 @	10600.000	54.86	-5.14	60.00	41.04	38.56	35.10	10.36	AVERAGE	185	108	VERTICAL
3 @	10600.000	65.68	-14.32	80.00	51.87	38.56	35.10	10.36	PEAK	185	108	VERTICAL




Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	802.11a Ch 64 Ant. A

Horizontal

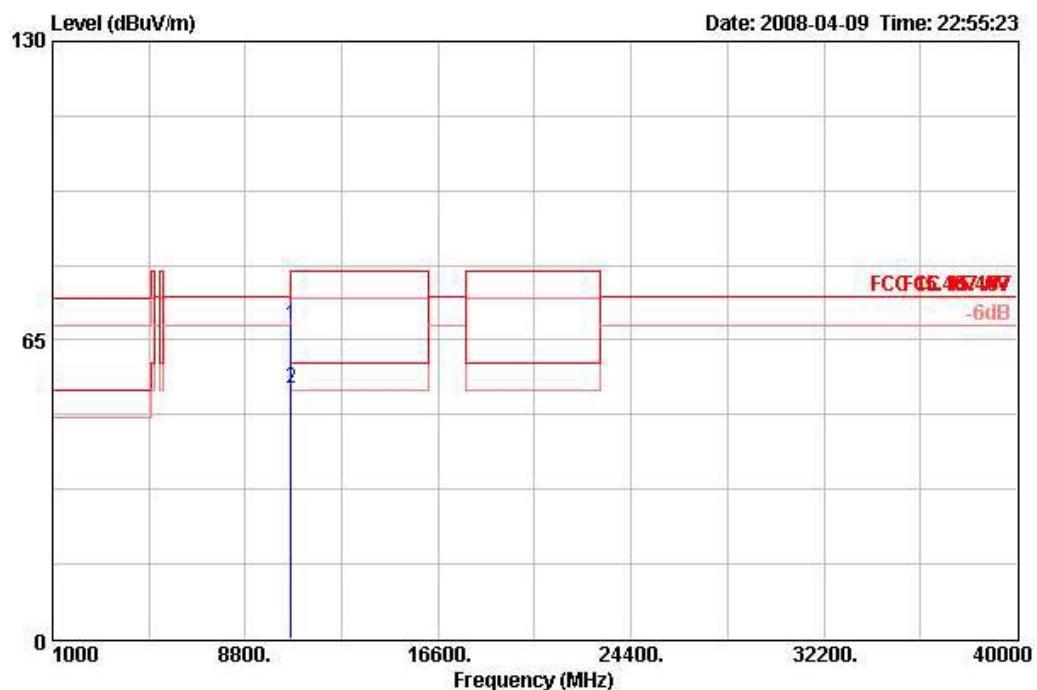


Freq	Level	Over	Limit	Read		Antenna	Preamp	Cable		Table	Ant	
		Limit	Line	Level	Factor	Factor	Factor	Loss	Remark			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm	
1 @		10638.760	67.98	-12.02	80.00	54.14	38.54	35.05	10.35	PERK	170	114 HORIZONTAL
2 @		10640.450	54.36	-5.64	60.00	40.52	38.54	35.05	10.35	AVERAGE	170	114 HORIZONTAL

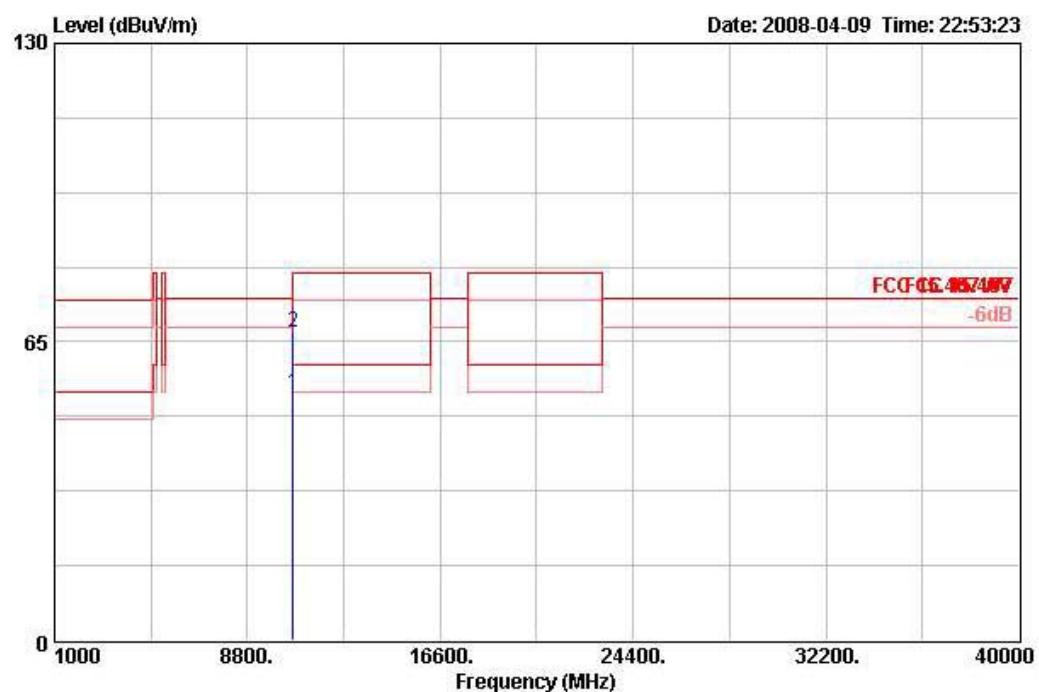
Vertical


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant		
		Limit	Line	Level	Factor	Factor	Loss			Pos	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm	Pol/Phase	
1 @	10640.260	53.63	-6.37	60.00	39.79	38.54	35.05	10.35	AVERAGE	184	106 VERTICAL
2 @	10641.650	67.08	-12.92	80.00	53.24	38.54	35.05	10.35	PERK	184	106 VERTICAL

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	802.11a Ch 100 Ant. A

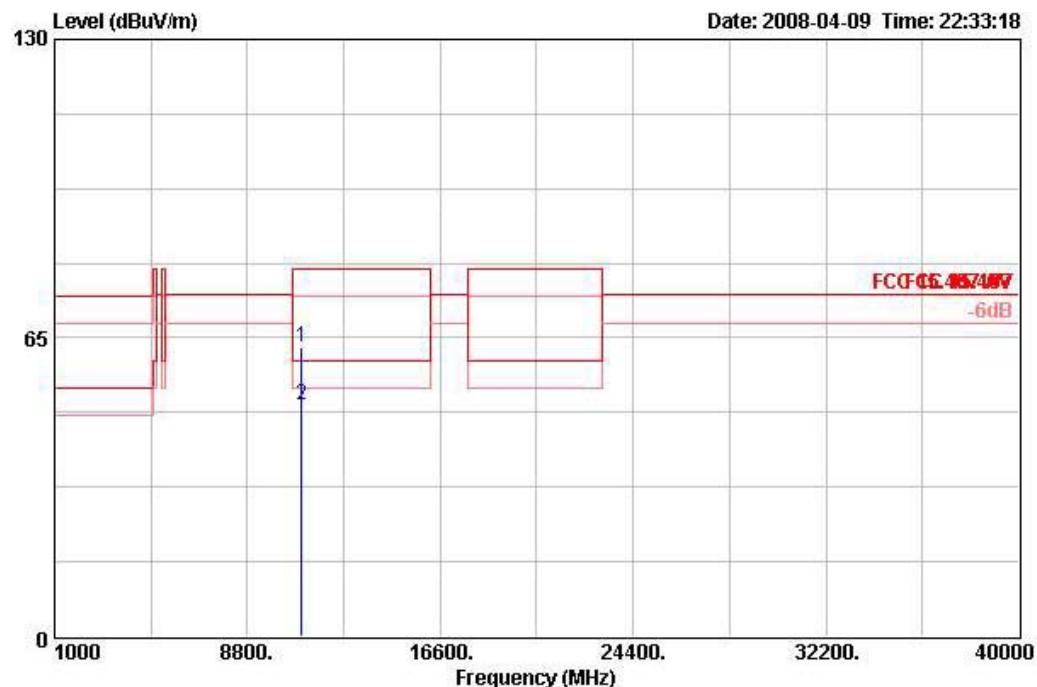Horizontal


Freq	Level	Over Limit	Limit	Read		Antenna	Preamp	Cable	Table	Ant			
				Line	Level						Pos	Pos	Pol/Phase
MHz	dBuV/m			dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm		
1 @	10998.880	62.89	-17.11	80.00	48.90	38.40	34.69	10.28	PERK	190	113	HORIZONTAL	
2 @	10999.200	50.52	-9.48	60.00	36.53	38.40	34.69	10.28	AVERAGE	190	113	HORIZONTAL	

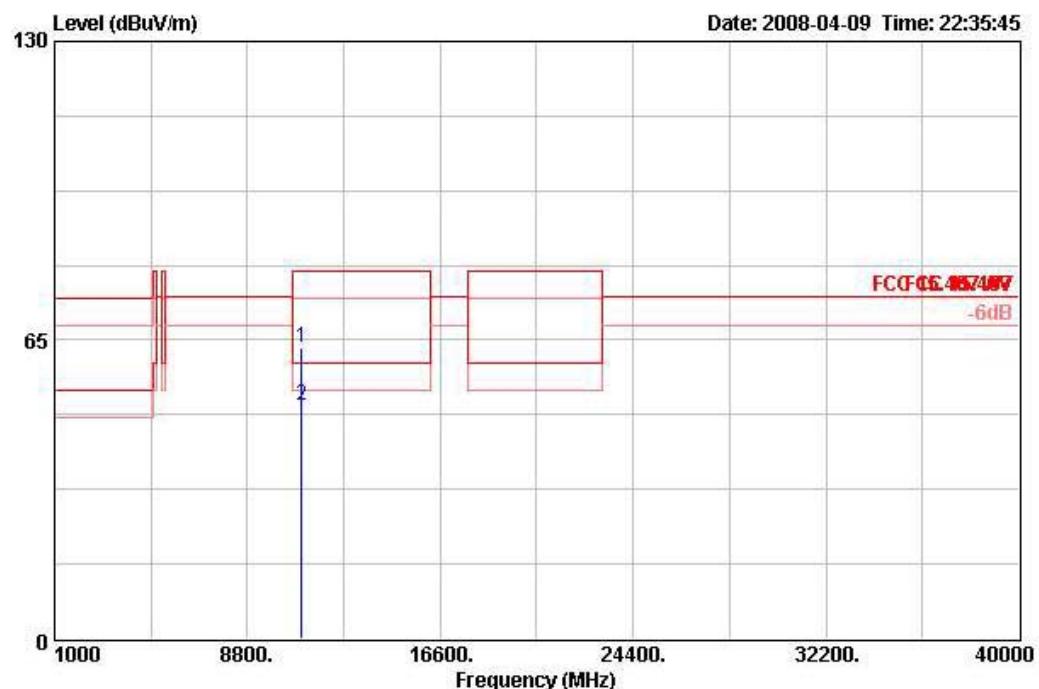
Vertical


Freq	Level	Over Limit		Read		Antenna Factor	Preamp Factor	Cable Loss	Remark	Table Pos	Ant Pos	Pol/Phase
		MHz	dBuV/m	dB	dBuV/m							
1 @	10998.560	63.27	-16.73	80.00	49.28	38.40	34.69	10.28	PERK	19	114	VERTICAL
2 @	10999.190	50.92	-9.08	60.00	36.93	38.40	34.69	10.28	AVERAGE	19	114	VERTICAL




Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	802.11a Ch 116 Ant. A

Horizontal

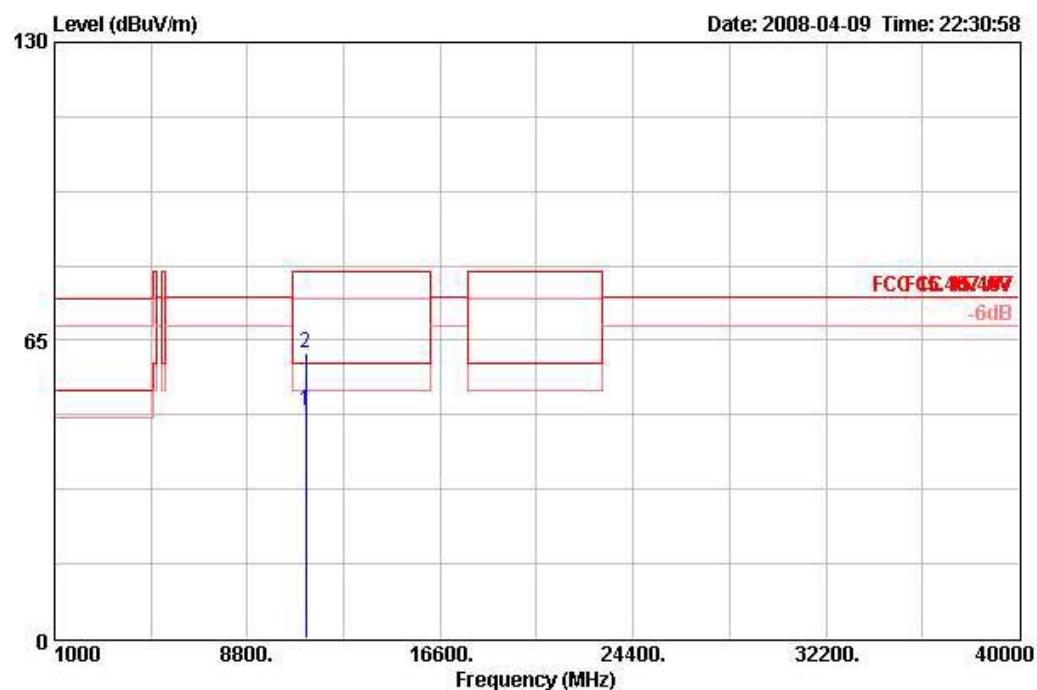


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant		
		Limit	Line	Level	Factor	Factor	Loss			Pos	Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm		
1 @	11159.510	49.62	-10.38	60.00	35.42	38.43	34.71	10.48	AVERAGE	190	118 HORIZONTAL
2 @	11161.450	62.37	-17.63	80.00	48.17	38.43	34.71	10.48	PEAK	190	118 HORIZONTAL

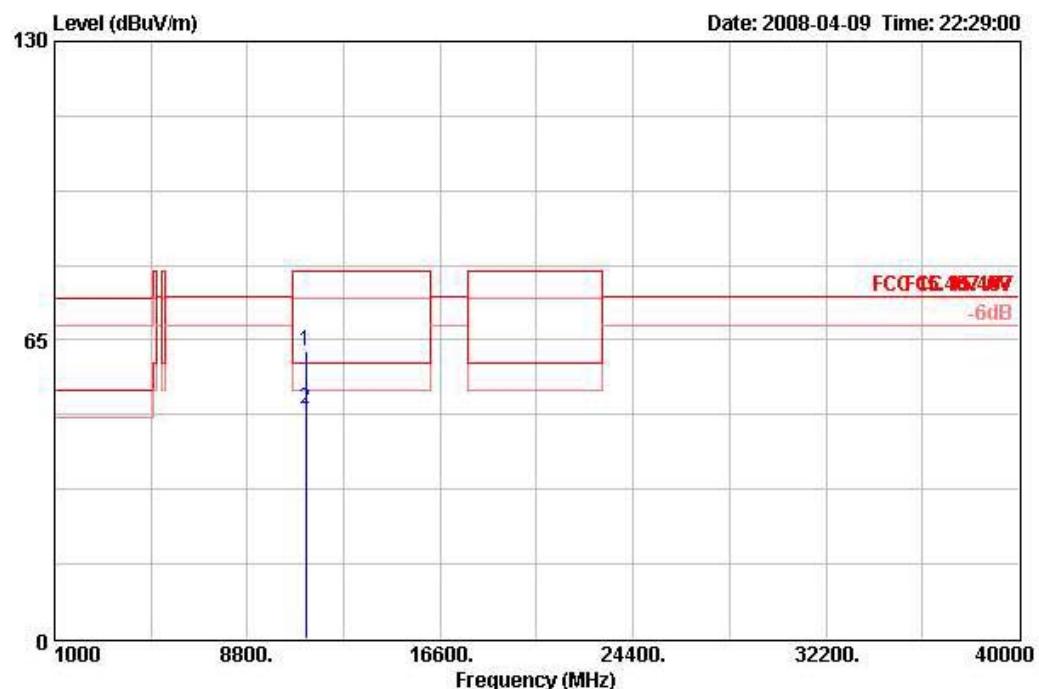
Vertical


Freq	Level	Over Limit		Read		Antenna Factor	Preamp Factor	Cable Loss	Remark	Table Pos	Ant Pos	Pol/Phase
		MHz	dBuV/m	dB	dBuV/m							
1 @	11158.090	62.51	-17.49	80.00	48.31	38.43	34.71	10.48	PERK	295	162	VERTICAL
2 @	11159.630	50.18	-9.82	60.00	35.98	38.43	34.71	10.48	AVERAGE	295	162	VERTICAL

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	802.11a Ch 140 Ant. A

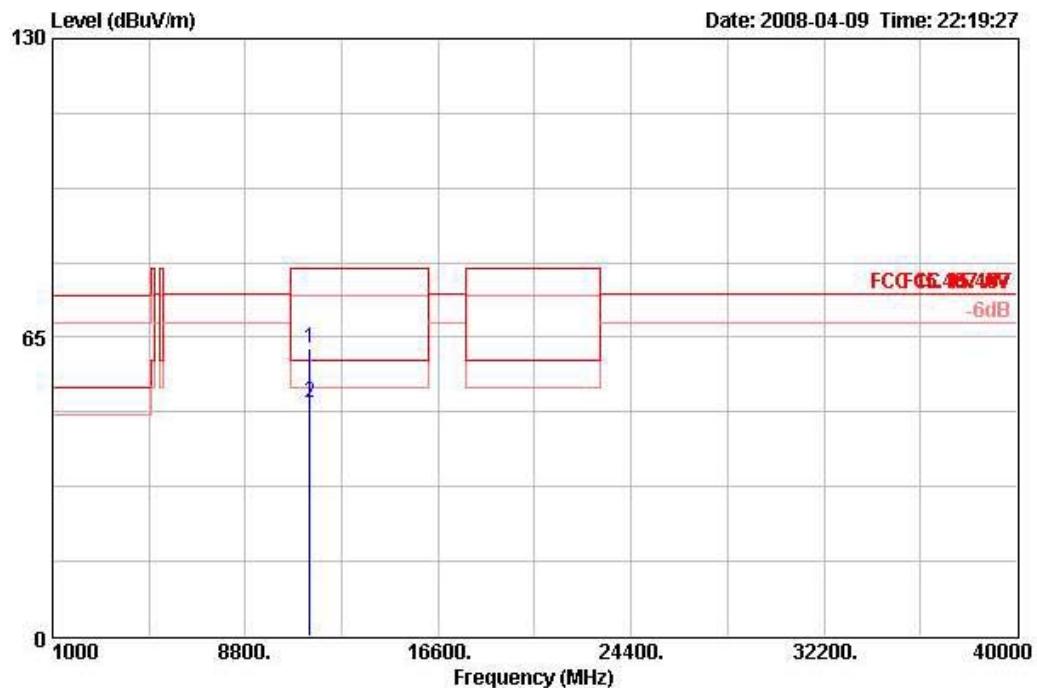Horizontal


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant	
		Limit	Line	Level	Factor	Factor	Loss			Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm	Pol/Phase
1 @	11398.470	62.78	-17.22	80.00	48.24	38.48	34.74	10.80	PERK	326
2 @	11399.180	50.69	-9.31	60.00	36.15	38.48	34.74	10.80	AVERAGE	326

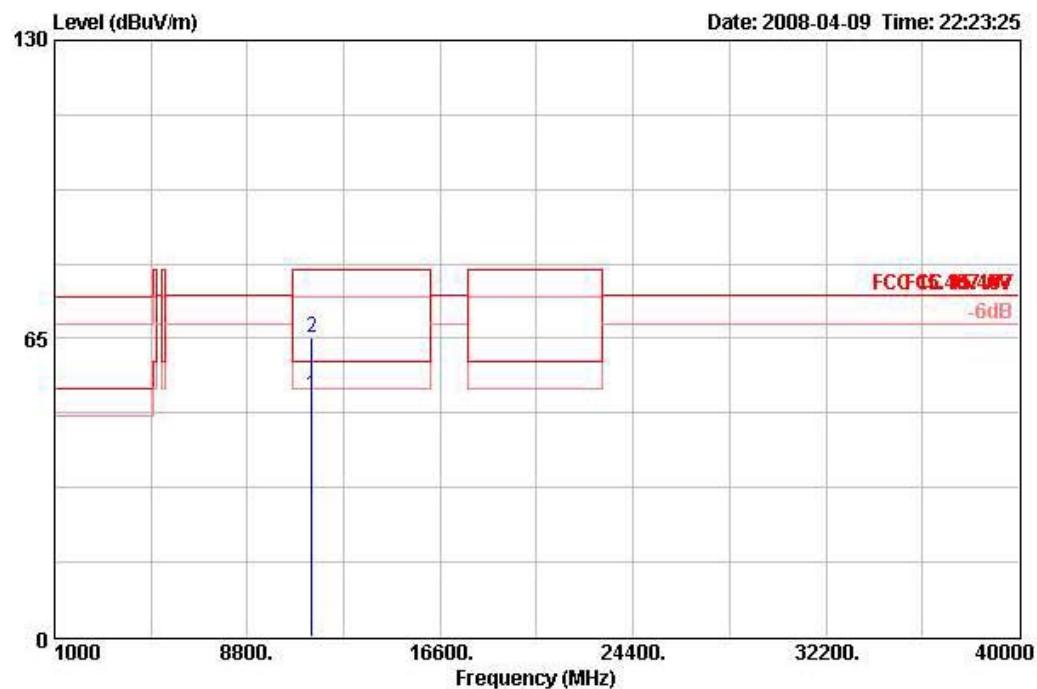Vertical


Freq	Level	Over Limit		Read		Ant	Table	Ant	Table	Ant	
		MHz	dBuV/m	Limit	Line			Pos	Pos	Pos Pol/Phase	
				dB	dBuV/m	dBuV	dB/m	deg	cm		
1 @	11399.200	52.41	-7.59	60.00	37.87	38.48	34.74	10.80	AVERAGE	186	106 VERTICAL
2 @	11401.240	65.06	-14.94	80.00	50.52	38.48	34.74	10.80	PERK	186	106 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz /1 MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 20MHz Ch 36 Ant. A
Test date	Apr. 09, 2008		

Channel 36

Freq	Level	Over Limit		Read	Antenna	Preamp	Cable	Table	Ant		
		MHz	dBuV/m								
				dB	dBuV/m	dB	dB	deg	cm		
1 @	5150.000	56.65	-3.35	60.00	19.17	33.04	0.00	4.44	AVERAGE	199	131 HORIZONTAL
2 @	5150.000	69.64	-10.36	80.00	32.16	33.04	0.00	4.44	PERK	199	131 HORIZONTAL
3 @	5181.600	111.58			74.05	33.09	0.00	4.43	PERK	199	131 HORIZONTAL
4 @	5183.600	102.15			64.62	33.09	0.00	4.43	AVERAGE	199	131 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 20MHz Ch 40 Ant. A
Test date	Apr. 09, 2008		

Channel 40

Freq	Level	Over Limit		Read	Antenna	Preamp	Cable	Table	Ant		
		MHz	dBuV/m								
				dB	dBuV/m	dB	dB	deg	cm		
1 @	5137.600	67.67	-12.33	80.00	30.21	33.01	0.00	4.45	PERK	209	131 HORIZONTAL
2 @	5150.000	55.39	-4.61	60.00	17.90	33.04	0.00	4.44	AVERAGE	209	131 HORIZONTAL
3 @	5196.800	112.53			74.98	33.12	0.00	4.43	PERK	209	131 HORIZONTAL
4 @	5198.400	102.17			64.62	33.12	0.00	4.43	AVERAGE	209	131 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200MHz.

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 20MHz Ch 60 Ant. A
Test date	Apr. 09, 2008		

Channel 60

Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant			
		Limit	Line	Level	Factor	Factor	Loss			Pos	Pol/Phase	
1 @	5303.200	111.79		74.12	33.28	0.00	4.40	PERK	185	129	HORIZONTAL	
2 @	5303.600	102.52		64.84	33.28	0.00	4.40	AVERAGE	185	129	HORIZONTAL	
3 @	5374.000	68.37	-11.63	80.00	30.61	33.39	0.00	4.37	PERK	185	129	HORIZONTAL
4 @	5387.200	55.42	-4.58	60.00	17.63	33.41	0.00	4.37	AVERAGE	185	129	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300MHz.

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 20MHz Ch 64 Ant. A
Test date	Apr. 09, 2008		

Channel 64

Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant			
		Limit	Line	Level	Factor	Factor	Loss			Pos	Pol/Phase	
1 @	5314.800	111.38		73.67	33.31	0.00	4.40	PERK	186	125	HORIZONTAL	
2 @	5323.200	102.11		64.42	33.31	0.00	4.39	AVERAGE	186	125	HORIZONTAL	
3 @	5350.000	56.33	-3.67	60.00	18.60	33.36	0.00	4.38	AVERAGE	186	125	HORIZONTAL
4 @	5350.000	69.91	-10.09	80.00	32.17	33.36	0.00	4.38	PERK	186	125	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320MHz.

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 20MHz Ch 100 Ant. A
Test date	Apr. 09, 2008		

Channel 100

Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant	Pos	Pol/Phase
		Limit	Line	Level	Factor	Factor	Loss				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm		
1 @	5459.200	68.79	-11.21	80.00	30.92	33.52	0.00	4.35	PERK	189	125 HORIZONTAL
2 @	5460.000	55.78	-4.22	60.00	17.91	33.52	0.00	4.35	AVERAGE	189	45 HORIZONTAL
3 @	5470.000	71.38	-2.92	74.30	33.48	33.55	0.00	4.35	PERK	189	125 HORIZONTAL
4 @	5496.600	112.42			74.48	33.60	0.00	4.34	PERK	189	125 HORIZONTAL
5 @	5498.200	102.10			64.16	33.60	0.00	4.34	AVERAGE	189	125 HORIZONTAL

Item 4, 5 are the fundamental frequency at 5500MHz.

Temperature	26°C	Humidity	56%
Test Engineer	Jax Chen	Configurations	Draft n MCS8 20MHz Ch 140 Ant. A
Test date	Apr. 09, 2008		

Channel 140

Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant	Pos	Pol/Phase
		Limit	Line	Level	Factor	Factor	Loss				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm		
1 @	5696.600	111.36			72.79	34.17	0.00	4.39	PERK	193	134 HORIZONTAL
2 @	5698.200	100.95			62.39	34.17	0.00	4.39	AVERAGE	193	134 HORIZONTAL
3 @	5729.000	74.08	-0.22	74.30	35.41	34.27	0.00	4.40	PERK	193	134 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (IEEE 802.11a specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is $(f_{\text{c}} - f) / f_{\text{c}} \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11a specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.
8. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.8.4. Test Setup Layout

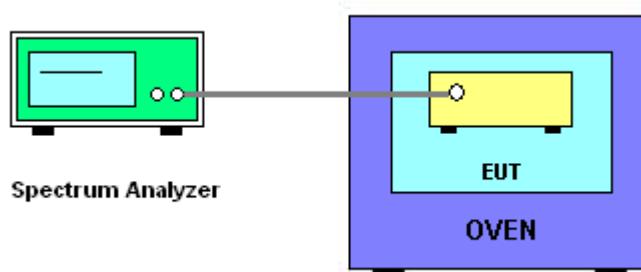

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
(V)	5200	5320
126.50	5200.025850	5320.017800
110.00	5199.999700	5319.998700
93.50	5199.996200	5319.997820
Max. Deviation (MHz)	0.025850	0.017800
Max. Deviation (ppm)	4.97	3.35

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
(°C)	5200	5320
-30	5200.013400	5320.016000
-20	5200.018400	5320.022400
-10	5200.017600	5320.020000
0	5200.006800	5320.068200
10	5199.996800	5319.997300
20	5199.991600	5319.993600
30	5199.991026	5319.992800
40	5199.990470	5319.994800
50	5199.984400	5319.988000
Max. Deviation (MHz)	0.018400	0.068200
Max. Deviation (ppm)	3.54	12.8195

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Mar. 03, 2008	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2008	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2008	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2007	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Mar. 27, 2008	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 14, 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 07, 2007	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100305	9 kHz - 40 GHz	Sep. 27, 2007	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 21, 2007	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 18, 2008	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 10, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2008	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2007	Conducted (TH01-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 10, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two year.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sportun International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	:	ISO/IEC 17025:2005
Accreditation Number	:	1190
Originally Accredited	:	December 15, 2003
Effective Period	:	January 10, 2007 to January 09, 2010
Accredited Scope	:	Testing Field, see described in the Appendix
Specific Accreditation Program	:	Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.