

All font:Arial 3pt

Human readable(可讀部分)：

B.MAC ID:XXXXXXXXXXXX

MAC ID Barcode, follow Foxconn standard.(MAC ID區間參考Foxconn標準)

C.MO:MO-VVSS

a.第一個MO:為文字

b.第二個MO is Foxconn MO, follow Foxconn standard(為工單號，參考Foxconn標準)

c.VV:the engineering version(refer to Foxconn label Rev column in the cover of the MFG document)

VV為工程版本(參考製造文件封面Foxconn Label Rev.欄位)

d.SS:the version of A300/A400 product(refer to Doc Rev.in the cover of MFG document)

SS為A300/A400產品之版本(參考製造文件封面Doc Rev.之主版本)


Scannable(掃描部分)：

A.XXXXXXXXXXXXXX

MAC ID Barcode, follow Foxconn standard(MAC ID 區間參考Foxconn標準)

Barcode type: code 39


Barcode height:2.5mm

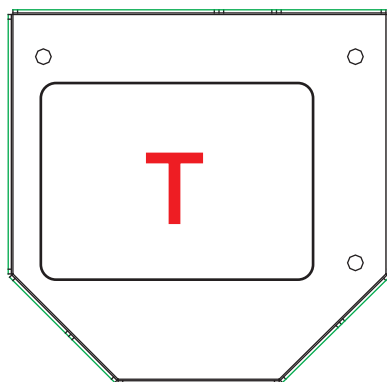

label stick position

標籤製作黏貼方式/T77H479.00/03/ 1 OF 4

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
0	N/A	N/A	13/05/18	First Release	Taim

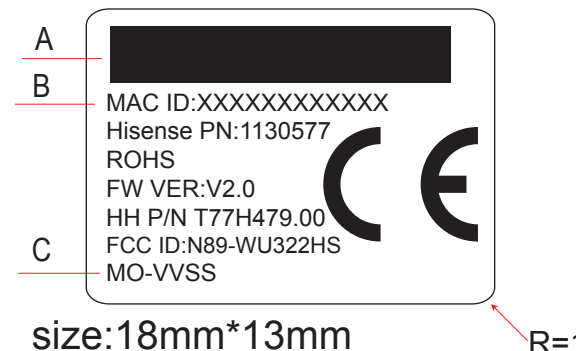

MATERIAL (SPEC.)										SCALE	FOXCONN HON HAI PRECISION IND. CO., LTD. CNSBG				
50# mylar										SHEET 1/1					
FINISH															
Select										UNIT	PART NAME				
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	V	Label	MM	MAC ID label			
0~6		0.05	0.05	0.10						0.20					
6~30		0.10	0.15	0.20	0.50	0.50	3.00			0.20		SIZE	MODEL	PART NO.	DESIGNED
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25			A4	T77H479.00	500.01625.025	Taim
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30						
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50						
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80						
DRAFT TOLERANCE					± 0.2°		CRITICAL DIM. MARK		*						