



# RF Exposure Evaluation Report

APPLICANT	TERMA A/S
ADDRESS	HOVMARKEN 4 LYSTRUP DK-8520
FCC ID	N9MSC5000
MODEL NUMBER	SCANTER 5602, SCANTER 5202, SCANTER 6002
PRODUCT DESCRIPTION	RADIODETERMINATION RADAR
DATE SAMPLE RECEIVED	07/15/2019
FINAL TEST DATE	07/18/2019
PREPARED BY	Franklin Rose

Report Number	Report Version	Description	Issue Date
1830AUT19 MPE_TestReport_	Rev1	Initial Issue	08/19/2019

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE  
WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## TABLE OF CONTENTS

<b>GENERAL REMARKS .....</b>	<b>2</b>
<b>GENERAL INFORMATION .....</b>	<b>3</b>
<b>ANTENNA INFORMATION .....</b>	<b>4</b>
<b>MPE CALCULATION .....</b>	<b>5</b>
<b>MPE LIMITS .....</b>	<b>5</b>
<b>MPE DATA .....</b>	<b>6</b>
FCC MPE CALCULATION: LINEAR ARRAY 21' HG-HP-C-37 & 21' HG-HP-I-37 ANTENNAS.....	6
<i>Inside Beam</i> ( $\leq 0.36^\circ$ Horizontal Polarity, $\leq 11^\circ$ Vertical Polarity) .....	6
<i>Outside Beam</i> ( $> 10^\circ$ Horizontal Polarity, $> 11^\circ$ Vertical Polarity) .....	7
<i>FCC MPE Diagram</i> , 21' HG-HP-C-37 & 21' HG-HP-I-37 Antennas, Top View.....	8
<i>FCC MPE Diagram</i> , 21' HG-HP-C-37 & 21' HG-HP-I-37 Antennas, Side View.....	9

## GENERAL REMARKS

### Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**  
**Designation #: US1070**

### Prepared by:


<b>Name and Title</b>	Franklin Rose, EMC Project Manager / EMC Specialist
<b>Date</b>	08/20/2019

## GENERAL INFORMATION

<b>EUT Description</b>	RADIODETERMINATION RADAR		
<b>Model Number</b>	SCANTER 5602, SCANTER 5202, SCANTER 6002		
<b>EUT Power Source</b>	<input checked="" type="checkbox"/> 110–120 VAC	<input type="checkbox"/> DC Power (12 V)	<input type="checkbox"/> Battery Operated
<b>Test Item</b>	<input type="checkbox"/> Prototype	<input type="checkbox"/> Pre-Production	<input checked="" type="checkbox"/> Production
<b>Type of Equipment</b>	<input checked="" type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input type="checkbox"/> Portable
<b>Antenna Connector</b>	WR-90 Waveguide		
<b>Test Conditions</b>	The temperature was 26°C Relative humidity of 50%.		
<b>Modification to the EUT</b>	No Modification to EUT.		
<b>Applicable Standards</b>	FCC CFR 47 Part 2.1091, RSS-102		
<b>Test Facility</b>	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070		

### NOTES:

At present, the radar is manufactured as a separate enclosure from the antenna and antenna pedestal.

In all cases, the radar equipment is intended for controlled/occupational use and access only. General population MPE distances have also been provided, for reference.

The diagrams in this report visually represent the calculated MPE standoffs for a) each antenna type, and b) the equipment itself, outside the antenna's line of sight.

## ANTENNA INFORMATION

This information was provided by the client:

	<b>Antenna 1</b>	<b>Antenna 2</b>
<b>Name</b>	21' HG-HP-C-37	21' HG-HP-I-37
<b>Primary Use</b>	Air Surveillance	SMR
<b>Size (HxLxD) (meters)</b>	1.11 x 6.56 x 1.0	1.11 x 6.56 x 1.0
<b>Type</b>	Linear Array	Linear Array
<b>Gain</b>	$\geq 37$ dBi	$\geq 37$ dBi
<b>-3 dB Beamwidth (h)</b>	$\leq 0.36$ °	$\leq 0.36$ °
<b>-3 dB Beamwidth (v)</b>	$\leq 11$ °	$\leq 11$ °
<b>Tilt Angle</b>	0.6 °	-0.6 °
<b>Sidelobe Suppression</b>	1.5 - 5° $\geq 28$ dB 5 - 10° $\geq 30$ dB $\geq 10$ ° $\geq 35$ dB	1.5 - 5° $\geq 28$ dB 5 - 10° $\geq 30$ dB $\geq 10$ ° $\geq 35$ dB
<b>Backlobe Suppression</b>	$\geq 35$ dB	$\geq 35$ dB

<b>Manufacturer-Provided Antenna</b>	<b>Type</b>	<b>Typical Gain (dBi)</b>
Typical use: Air Surveillance	Linear Array 21' HG-HP-C-37	<b>37.0</b>
Typical use: SMR	Linear Array 21' HG-HP-I-37	<b>37.0</b>

**Note:** All parameters which effect MPE distance are identical in both antenna systems. One MPE calculation will be done which is valid for both systems, noting of course the difference in tilt angle from the antenna, which does not have any bearing on MPE distances.

## MPE CALCULATION

The minimum separation distance is calculated as follows:


$$E(V/m) = \frac{\sqrt{30 \times P \times G}}{d}$$

Power density:  $P_d(mW/cm^2) = \frac{E^2}{3770}$

## MPE LIMITS

*Figure 1. FCC Limits for Maximum Permissible Exposure (MPE)*

*Plane-wave Equivalent Power Density*

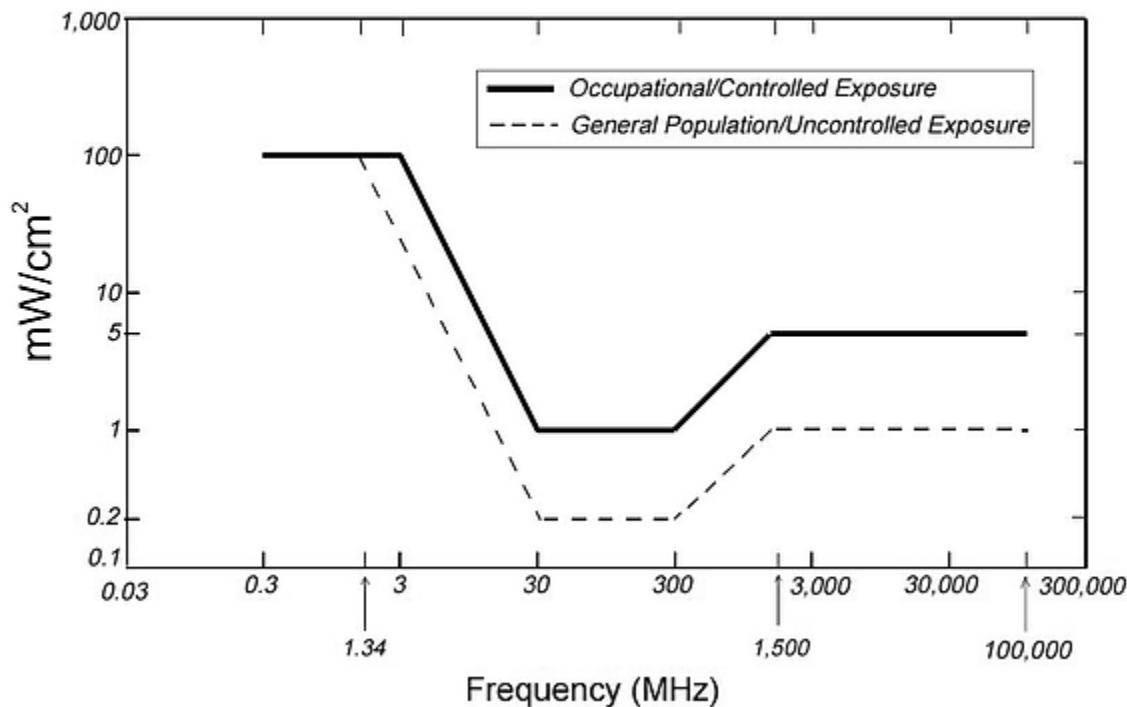

## MPE DATA

### FCC MPE Calculation: Linear Array 21' HG-HP-C-37 & 21' HG-HP-I-37 Antennas

**Inside Beam** ( $\leq 0.36^\circ$  Horizontal Polarity,  $\leq 11^\circ$  Vertical Polarity)

- General Uncontrolled Exposure Environment:** The limit for general uncontrolled exposure environment is shown in FCC rule Part 1.1310, Table 1B.

Variable	Value
Max Power	202.85 W
Duty Cycle (at full power)	20.00%
Nominal Antenna Gain	37 dBi
Losses	0 dB
Nominal Transmit Frequency	9100 MHz
Power Density	1.00 mW/cm <sup>2</sup>
Minimum Separation Distance	4022.51 cm

- General Controlled Exposure Environment:** The limit for controlled exposure environment is shown in FCC rule Part 1.1310, Table 1A.

Variable	Value
Max Power	202.85 W
Duty Cycle (at full power)	20.00%
Max Antenna Gain	37 dBi
Losses	0 dB
Maximum Transmit Frequency	9100 MHz
Power Density	5.00 mW/cm <sup>2</sup>
Minimum Separation Distance	1798.92 cm

## MPE CALCULATION

**Outside Beam** (> 10° Horizontal Polarity, > 11° Vertical Polarity)


3. **General Uncontrolled Exposure Environment:** The limit for general uncontrolled exposure environment is shown in FCC rule Part 1.1310, Table 1B.

Variable	Value
Max Power	202.85 W
Duty Cycle (at full power)	20.00%
Max Antenna Gain	37 dBi
Losses	35 dB
Transmit Frequency	9100 MHz
Power Density	1 mW/cm <sup>2</sup>
Minimum Separation Distance	71.53 cm

4. **General Controlled Exposure Environment:** The limit for controlled exposure environment is shown in FCC rule Part 1.1310, Table 1A.

Variable	Value
Max Power	202.85 W
Duty Cycle (at full power)	20.00%
Max Antenna Gain	37 dBi
Losses	35 dB
Maximum Transmit Frequency	9100 MHz
Power Density	1.09 mW/cm <sup>2</sup>
Minimum Separation Distance	31.99 cm

**FCC MPE Diagram, 21' HG-HP-C-37 & 21' HG-HP-I-37 Antennas, Top View**

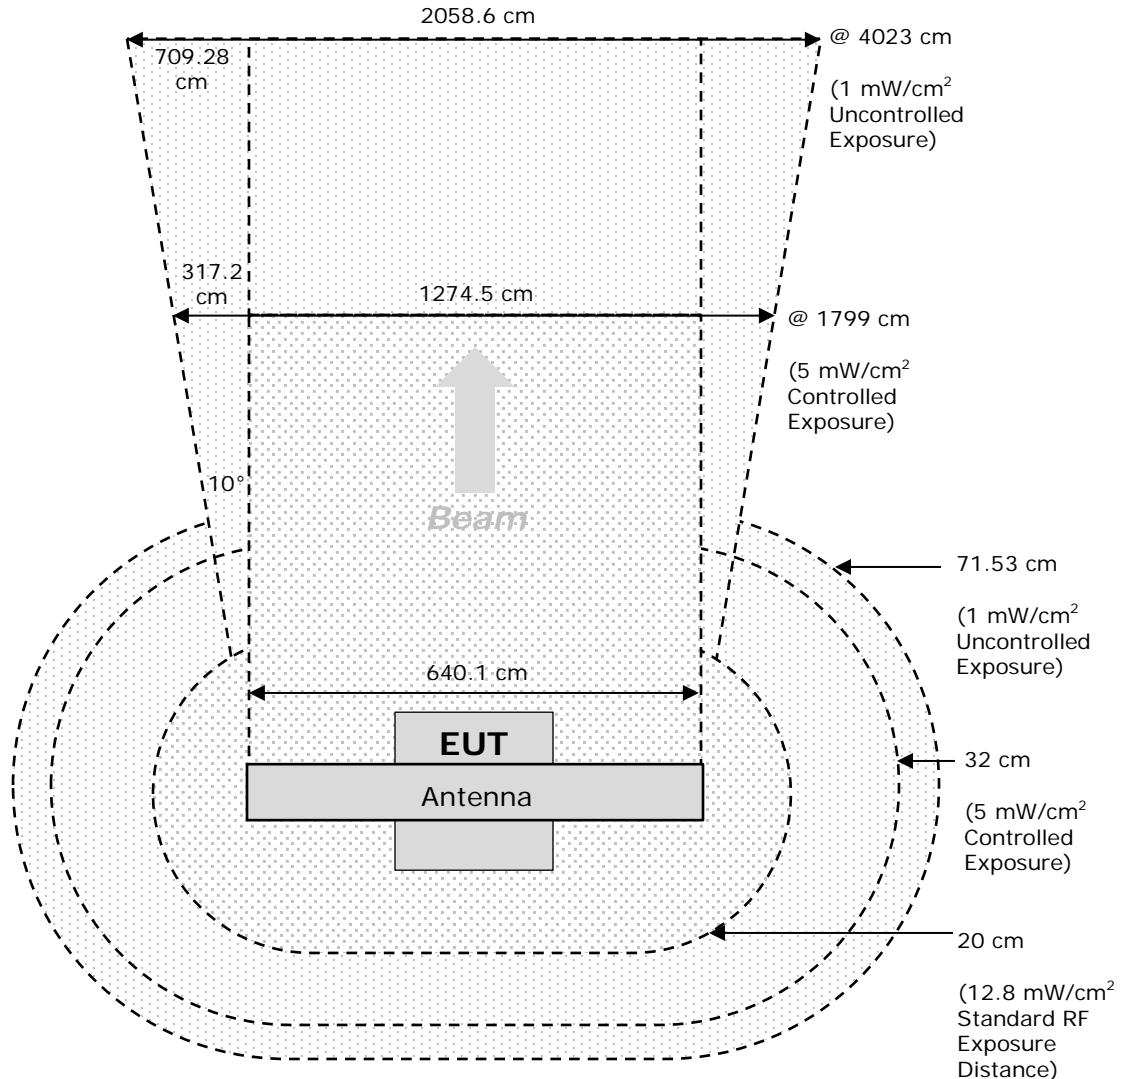

FCC MPE Diagram, 21' HG-HP-C-37 & 21' HG-HP-I-37 Antennas, Side View

