



ONETECH Corp.

2F. KUNHAN BD, 1557-11 SEOCHO-DONG, SEOCHO-KU, SEOUL 137-070 KOREA
TEL:587-9037 FAX:587-9039

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INDUSTRIAL, SCIENTIFIC AND MEDICAL(ISM) EQUIPMENT
CERTIFICATION TO FCC PART 18 REQUIREMENT

PRODUCT	LIGHT FLOWER BULB		
FCC ID	N9XKBW-AAO4203034		
MODEL NO.	LFB-201	SERIAL NO.	N/A
APPLICANT & ADDRESS	KONG BYUNG WOO COMM IND. CO., LTD. 642-6, Sunggok-Dong, Ansan-City, Kyungki-do, Korea		

REPORT NO.	E98NR-003	ISSUE DATE	November 5, 1998
PREPARED BY : ONETECH CORPORATION 2 F. KUNHAN B/D, 1557-11, SEOCHO-DONG, SEOCHO-KU, SEOUL 137-070 KOREA (TEL)02-587-9037(FAX)02-587-9039			

LIST OF EXHIBITS

FCC ID : N9XKBW-AAO4203034
MODEL : LFB-201

- EXHIBIT 1. IDENTIFICATION LABEL
2. AGENT AUTHORIZATION
3. TECHNICAL INFORMATION :
ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
4. PHOTO REPORT
5. USER'S MANUAL & SCHEMATIC(BLOCK DIAGRAM)

PREPARED BY : ONETECH CORPORATION
2 F. KUNHAN B/D, 1557-11, SEOCHO-DONG, SEOCHO-KU,
SEOUL 137-070 KOREA (TEL)02-587-9037(FAX)02-587-9039

EXHIBIT 1. IDENTIFICATION LABEL :**PROPOSED FCC ID LABEL**

The following ID Label will be attached on the bottom side of the product.



“Please find an ID Label for EUT at ID Label/Location Info in Exhibit Type”

REPORT NO : E98NR-003

FCC ID : N9XKBW-AAO4203034

DATE : November 5, 1998

EXHIBIT 2. AGENT AUTHORIZATION :

“Please find an Agent Authorization Letter at Attestation Statements in Exhibit Type”

EXHIBIT 3. TECHNICAL INFORMATION :**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**

INDUSTRIAL, SCIENTIFIC AND MEDICAL(ISM) EQUIPMENT
CERTIFICATION TO FCC PART 18 REQUIREMENT

PRODUCT	LIGHT FLOWER BULB		
FCC ID	N9XKBW-AAO4203034		
MODEL NO.	LFB-201	SERIAL NO.	N/A
APPLICANT & ADDRESS	KONG BYUNG WOO COMM IND. CO., LTD. 642-6, Sunggok-Dong, Ansan-City, Kyungki-do, Korea		

REPORT NO.	E98NR-003	ISSUE DATE	November 5, 1998
PREPARED BY : ONETECH CORPORATION 2 F. KUNHAN B/D, 1557-11, SEOCHO-DONG, SEOCHO-KU, SEOUL 137-070 KOREA (TEL)02-587-9037(FAX)02-587-9039			

TABLE OF CONTENTS

	page
1. VERIFICATION OF COMPLIANCE	1
2. SCOPE	2
3. PRODUCT INFORMATION	2
4. TEST FACILITY	2
4.1 General Information	2
4.2 Open Field Test.....	2
4.3 Preliminary Test.....	3
5. MEASUREMENT INSTRUMENTATION.....	3
5.1 Measuring Instrument Calibration.....	3
5.2 Detector Function Selection and Bandwidth.....	4
5.3 Units of Measurement	4
6. ANTENNAS	4
7. AMBIENT CONDITION.....	4
8. TEST METHODS.....	5
8.1 Test Configuration	5
8.2 Grounding	5
8.3 Data Report format.....	5
8.4 Line Conducted Test Procedure.....	5
8.5 Radiated Test Procedure	5
9. EQUIPMENT DEFINITION AND LIMITATIONS	7
9.1 ISM Equipment Definition	7
9.2 Equipment Limitations	8
10. SUMMARY.....	9
10.1 Equipment Modifications	10
11. CONDUCTED AND RADIATED MEASUREMENT PHOTOS	10
12. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....	12
12.1 Conducted Emissions Tests.....	12
12.2 Radiated Emission Tests	14
13. FIELD STRENGTH CALCULATION	15

1. VERIFICATION OF COMPLIANCE

APPLICANT : KONG BYUNG WOO COMM IND. CO., LTD.
642-6, Sunggok-Dong, Ansan-City, Kyungki-Do, Korea

CONTACT PERSON : Yong Il, Nam / ASSISTANT MANAGER

TELEPHONE NO : +82-345-491-9980


FCC ID : N9XKBW-AAO4203034 MODEL NO/NAME : LFB-201

SERIAL NUMBER : N/A

DATE : November 5, 1998

DEVICE TYPE	RF LIGHTING DEVICE
E.U.T. DESCRIPTION	LIGHT FLOWER BULB
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	MP-5, ANSI C63.4
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	CONSUMER EQUIPMENT (CFR 47, PART 18, SUBPART C)
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	YES
FINAL TESTS WERE CONDUCTED ON	3 METER OPEN TEST SITE

The above equipment was tested by ONETECH CORPORATION for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.


YONG KWANG KWON / CHIEF ENGINEER
EMC TESTING DEPARTMENT
ONETECH Testing & Eval. Lab.
SEOUL KOREA

2. SCOPE

The Federal Communications Commission(FCC) establishes rules and regulations to regulate industrial, scientific, and medical equipment(ISM) that emits electromagnetic energy on frequencies within the radio frequency spectrum in order to prevent harmful interference to authorized radio communication services. An electromagnetic emissions test has been performed on the applicant/manufacturer's product to establish compliance with these rules.

The test data contained in this report was obtained utilizing test procedures, equipment, and site which in either approved by or prescribed by the FCC. The test procedures described herein are the established methods for the measurement of radio noise emitted from ISM equipment as defined in section 18.107 of the FCC rules. The technical standards for ISM equipment are set forth in subpart C of Part 18 of FCC rules(47 CFR Part 18 Sub-C). Methods for measurement of radiated and power line conducted radio noise are covered herein.

3. PRODUCT INFORMATION

Product description	: LIGHT FLOWER BULB
Housing type	: Plastic
Power supply type	: Switching / 120 Vac, 50 / 60 Hz
Line filter type	: Built in
Line cord type	: NON-SHIELD
Normal operating frequency	: 80 kHz
Power consumption	: 13Watts Max
Bulb size	: 120mm(4.7") ~ 125mm(4.9")
Maximum RF energy generated	: Less than 50mW

4. TEST FACILITY

4.1 General Information

The ONETECH CORPORATION test site is located at 426-1, Daessangryung-Ri, Chowol-Myun, Kwangju, Kun, Kyunggi-Do, 464-080, Korea. The site is constructed and calibrated in conformance with the requirements of FCC/OET55 and ANSI C63.4/1992. A site description is on file at the federal communications commission, 7435 Oakland mills Road, Columbia, MD 21046.

4.2 Open Field Test

The description of the open field test site maintained by ONETECH CORPORATION has been submitted to the FCC pursuant to CFR 47 section 2.948. A letter of acceptance from FCC is on file at FCC.(31040/SIT, 1200F2, January 24, 1996)

4.3 Preliminary Test

The Preliminary test is used for administration, preliminary radiation testing and conducted radio noise measurements.

5. MEASUREMENT INSTRUMENTATION

All measurements were made using equipment which confirms to the America National Standard Specifications for Electromagnetic Interference and Field Strength Instrumentation 10 kHz to 1GHz, ANSI C63.4

5.1 Measuring Instrument Calibration

The measuring equipment which was utilized in performing the test documented herein has been calibrated in accordance with the manufacturers recommendations utilizing calibration equipment which are traceable to recognized national standards.

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1	Test receiver	R/S	ESVS 10	825120/006	AUG./98	12MONTH	■
2	Spectrum analyzer	HP	8568B	3026A0226	AUG./98	12MONTH	■
3	RF preselector	HP	85685A	3107A01264	AUG./98	12MONTH	■
4	Quasi-Peak Adaptor	HP	85650A	3107A01542	AUG./98	12MONTH	■
5	Dipole Antenna	EMCO	3121C	9107-745	FEB/98	12MONTH	
6	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	FEB./98	12MONTH	■
7	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	FEB./98	12MONTH	■
8	LISN	EMCO	3825/2	9109-1867 9109-1869	FEB./98	12MONTH	■
9	Computer System Hard disk drive	HP	98581C 9153C	98543A CMC762Z9153	N/A N/A	N/A N/A	■ ■
10	Plotter	HP	7475A	30052 22986	N/A	N/A	■
11	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
12	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
13	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■

The calibrations of the measuring instruments, including any accessories that may affect such calibration, are checked checked frequency to assure its accuracy. Adjustments are made correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

5.2 Detector Function Selection and Bandwidth

Items	Line conducted test	Radiated test
Bandwidth	9 kHz	120 kHz
Scan width	200 kHz/Div	200 kHz/Div
Sweep	2 MHz	2 MHz
Scan time	1 ms/Div	5 ms/Div
Sensitivity	-90 dBm	-90 dBm
Video filter	OFF	OFF
Reading mode	Peak	Peak

All conducted and radiated radio noise emission testing was performed utilizing spectrum analyzer or radio noise meters incorporation CISPR quasi-peak function, if a weight circuit was employed in that instrumrnt. If measurements were made using equipment which does not employ weighting circuits, measurements were made using peak reading.

5.3 Units of Measurement

Measurements of radiated interference are reported in terms of microvolts perimeter, or dBuV/m at a specified distance. The indicated readings on the spectrum analyzer was converted to microvolts per meter, or dBuV/m by use of reported in terms of microvolts, or dBuV/m by use of appropriate conversion factors. Measurements of conducted interference are reported in terms of microvolts, or dBuV.

6. ANTENNAS

Antenna type	Biconical	Dipoles	Log Periodics
Frequency range	20 MHz to 200 MHz	30 MHz to 1 GHz	200 MHz to 1 GHz
Correction Factors	Programmed into software		
Antenna Height	Varied from 1 to 4 meters above ground plane		
Polarization	Vertical / Horizontal		
Distance from EUT	3 meters		

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast three meters from the leading edge of the EUT.

The FCC Rules specify that the test height above ground for table mounted devices shall be 0.8 or 1.0 meters and for floor mounted equipment shall be less than 0.5 meters. During radiated measurements, the EUT is positioned on a nonconductive, motorized turntable in normal operating mode in conformance with this requirement.

7. AMBIENT CONDITION

The ambient conditions at the time of the test was conducted were as follows:

Temperature	<u>19</u>	Degree Centigrade
Relative Humidity	<u>52</u>	%

8. TEST METHODS

8.1 Test Configuration

The equipment under test was configured and operated in a manner which tend to maximize its emission characteristics a typical application. Power and signal distribution, ground, interconnecting cabling and physical placement of equipment were simulating the typical application and usage in so far as practicable.

8.2 Grounding

All conducted power line measurements were performed with LISN housing, measurement instrumentation case, ground planes, etc, electrically bonded together in such a manner that they were at the same RF potential.

8.3 Data Report format

The measurement results expressed in accordance with MP-5 and specific limits where applicable are presented in tabluar or graphical form, or alternatively as recorder charts or photographs of a spectrum analyzer display, showing the level vs. Frequency.

8.4 Line Conducted Test Procedure

Conducted emissions are measured at the plug end of the power cord suplied with the EUT, from the voltage developed across the 50 ohm port in the LISN. The length of the power cord in excess of 80cm, separating the EUT from the LISN, is coiled on prongs at top of LISN.

The EUT is placed 80cm from an grounded conducted surface and is kept at least 80cm from any other earth grounded conducted surface. Each device under test is separately tested for conducted emissions.

Emissions which have peak value close to the specification limit are also measured in the quasi-peak detection mode to determine compliance.

Analyzer setting are given on page 5. Analyzer is scanned from 0.45 MHz to 30 MHz for emissions.

During this test, EUT was operating to simulating actual use. Emission level are checked to see if equipment/cable placement are maximized.

8.5 Radiated Test Procedure

Measurements od radiated radio-noise were made using the measuring instrumentation and antenna specified in 7.1 and 8 respectively. Primarily, tests were made to determine the system spectrum signature, the

strengths of the stronger emissions, and the directions in which these emerge from the system. During this testing, EUT was running on normal operation.

EUT and all other equipment used with EUT were placed on a wooden table 0.8 meter above a ground screen. Table is placed three meters away from antenna.

All equipment/cable are placed in a manner which tend maximize its emission characteristics in a typical application. This is accomplished by watching the analyzer while moving equipment/cables.

Table was rotated 360 degrees to further maximize emissions.

Antenna was positioned between 1 to 4 meters above ground screen to even further maximize emissions. During test many antennas are used and positioned vertical and horizontal.

Analyzer settings are given on page 5. Analyzer is scanned from 30 MHz to 1000 MHz for emissions.

When an emission is found maximized, the frequency and condition are then entered into computer.

9. EQUIPMENT DEFINITION AND LIMITATIONS

The following information has been provided to clarify the FCC requirements with regard to equipment definition and technical standards. These requirements are found in the FCC Rules for devices subject to Equipment Authorization Procedures, Parts 2, subpart J. and Parts 18. Subpart B.

9.1 ISM Equipment Definition

Industrial, Scientific and Medical(ISM) equipment or appliances designed to generate and use locally RF energy for industrial, Scientific, Medical, domestic or similar purpose, excluding applications in the field of telecommunication.(Ref. CFR 47, section 18.107(c))

Industrial heating equipment : A category of ISM equipment used for or in connection with industrial heating operations utilized in a manufacturing of production process.(Ref. CFR 47, section 18.107(d))

Medical diathermy equipment : A category of ISM equipment used for therapeutic purpose, not including surgical diathermy apparatus designed for intermittent operation with low power.(Ref. CFR 47, section 18.107(e))

Ultrasonic equipment : A category of ISM equipment in which the RF energy is used to excite or drive an electromechanical transducer for the production of sonic or ultrasonic mechanical energy for industrial, scientific, medical or other noncommunication purposes.(Ref. CFR 47, section 18.107(F))

Consumer ISM equipment : A category od ISM equipment used or intended to be used by the general public in a residential enviroment, notwithstanding use in other area.(Ref. CFR 47, section 18.107(g))

9.2 Equipment Limitations

Ultrasonic equipment Conduction limits : Maximum RF line voltage measured with a 5uH/50 ohm LISN.

Frequency MHz	Emissions uV	Emissions dBuV/m
0.010 - 0.49	1000	60.0
0.49 - 30.0	200	46.0

Induction Cooking Ranges Conduction limits : Maximum RF line voltage measured with a 5uH/50 ohm LISN.

Frequency MHz	Emissions mV
0.010 - 0.1	10-1(linear interpolation)
0.1 - 0.5	1
0.5 - 30.0	0.25

RF lighting devices Conduction limits : Maximum RF line voltage measured with a 5uH/50 ohm LISN.

Frequency MHz	Emissions uV	Emissions dBuV/m
Non-consumer equipment 0.45 - 1.6	1000	60.0
1.6 - 30	3000	69.5
Consumer equipment 0.45 - 30	250	48

Radiated Field Strength Limits : (Operating frequency lie outside the bands specified in section 18.301)

Equipment	Operating Frequency	RF Power generated by equipment(Watts)	Field Strength limit(uV/m)	Distance (meters)
Any type unless otherwise specified(Misc)	Any ISM frequency	Below 500 500 or more	25 25 $\sqrt{\text{power}/500}$	300 1 300
	Any non-ISM frequency	Below 500 500 or more	15 15 $\sqrt{\text{power}/500}$	300 1 300
Industrial heaters and RF stabilized are welders	On/below 5,752 MHz Above 5,752 MHz	Any Any	10 (2)	1.600 (2)
Medical diathermy	Any ISM freq. Any non-ISM freq.	Any Any	25 15	300 300
Ultrasonic	Below 490kHz 4,900 to 1,600kHz Above 1,600kHz	Below 500 500 or more Any Any	2,400/F(kHz) 2,400/F(kHz) $\sqrt{\text{power}/500}$ 2,400/F(kHz) 15	300 3 300 30 30
Induction cooking range	Below 90kHz On/above	Any Any	1,500 300	4 30 4 30

1. Field strength may not exceed 10uV/m at 1,600 meters. Consumer Equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.
2. Reduced to the greatest extend possible.
3. Field strength may not exceed 10uV/m at 1,600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.
4. Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength 1 limits for micsellaneous ISM equipment.

Radiated field strength limits for RF lighting devices.

Frequency (MHz)	Distance (Meters)	Radiated (dBuV/m)
Non-consumer equipment		
30-88	3	48.5
88-216	3	54
216-1000	3	57
Consumer equipment		
30-88	3	40
88-216	3	43.5
216-1000	3	46

10. SUMMARY

Company Name	KONG BYUNG WOO COMM IND. CO., LTD.
E.U.T.	LIGHT FLOWER BULB
Serial Number	N/A
Type of Test	CERTIFICATION(CFR 47, PART 18, SUBPART C)
Passed/Failed	PASSED

Line Conducted Test	EUT was connected to AC 120V power source.
---------------------	--

Radiated Emission Test	EUT was setup as the same as it was in the Line Conducted Test. EUT was tested at a 3 meter open test site.
------------------------	--


10.1 Equipment modifications

To achieve compliance to consumer equipment levels, the following change(s) were made by ONETECH Corp. during compliance testing:


"Added a ferrite ring core(Part no.:EF-TC18A-152S, MFR: Samsung Electro-mechanics) on the power cord."

11. CONDUCTED AND RADIATED MEASUREMENT PHOTOS

<Conducted Measurement Photos>

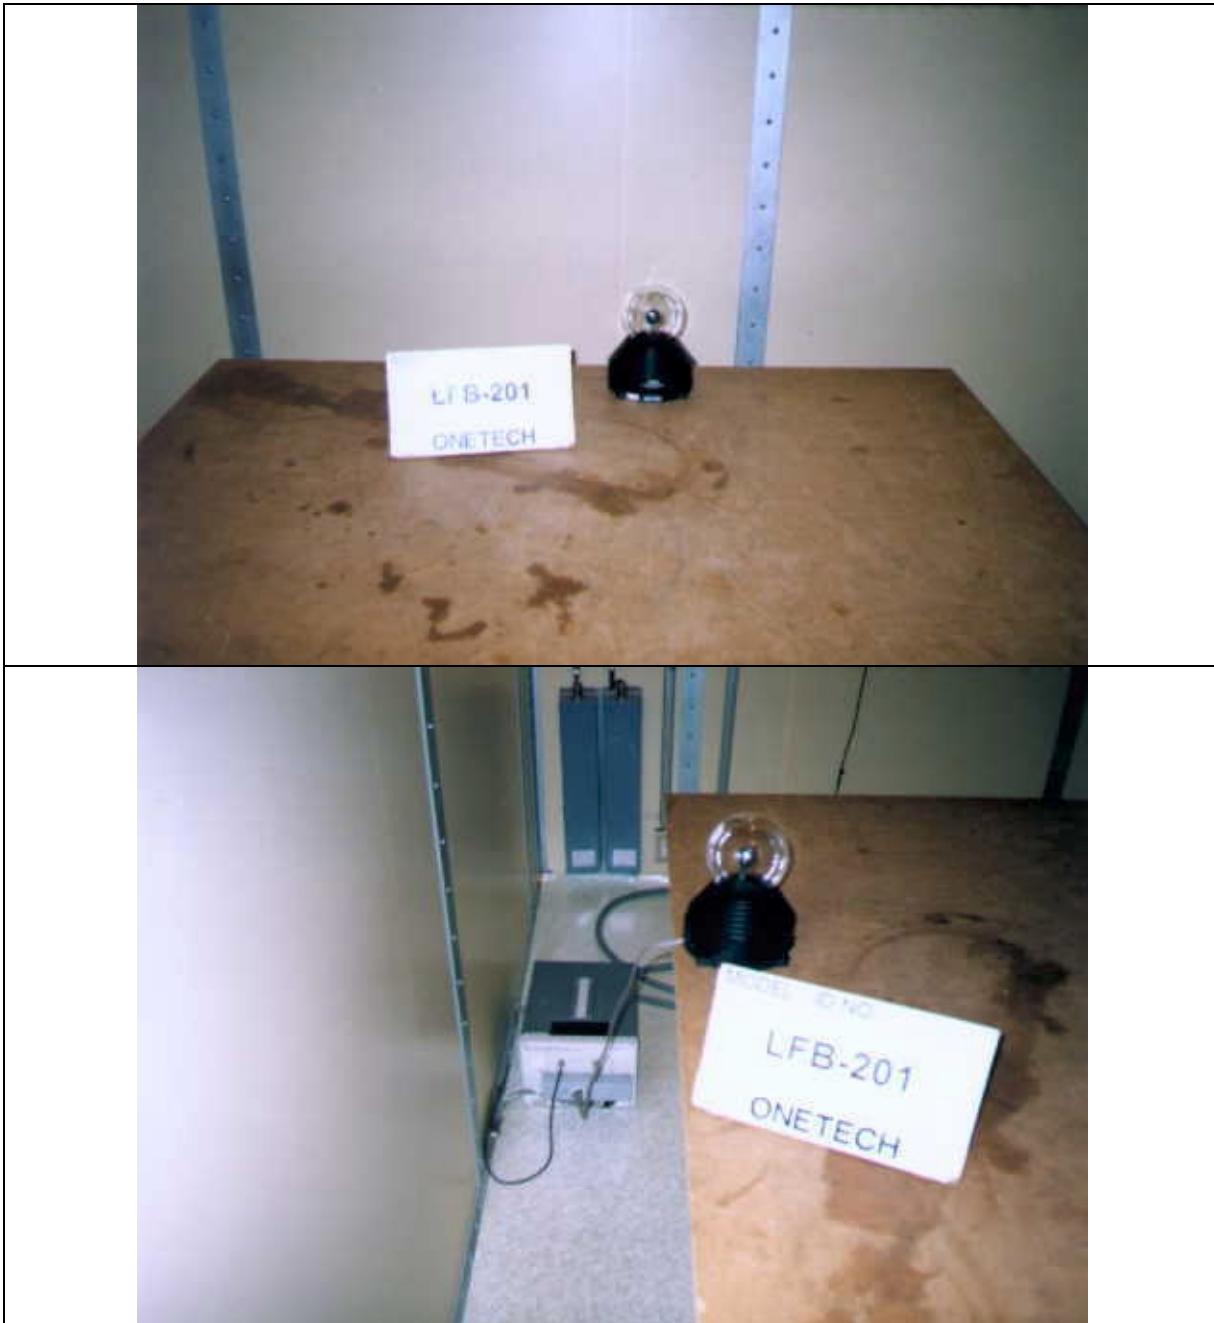

<Radiated Measurement Photos>

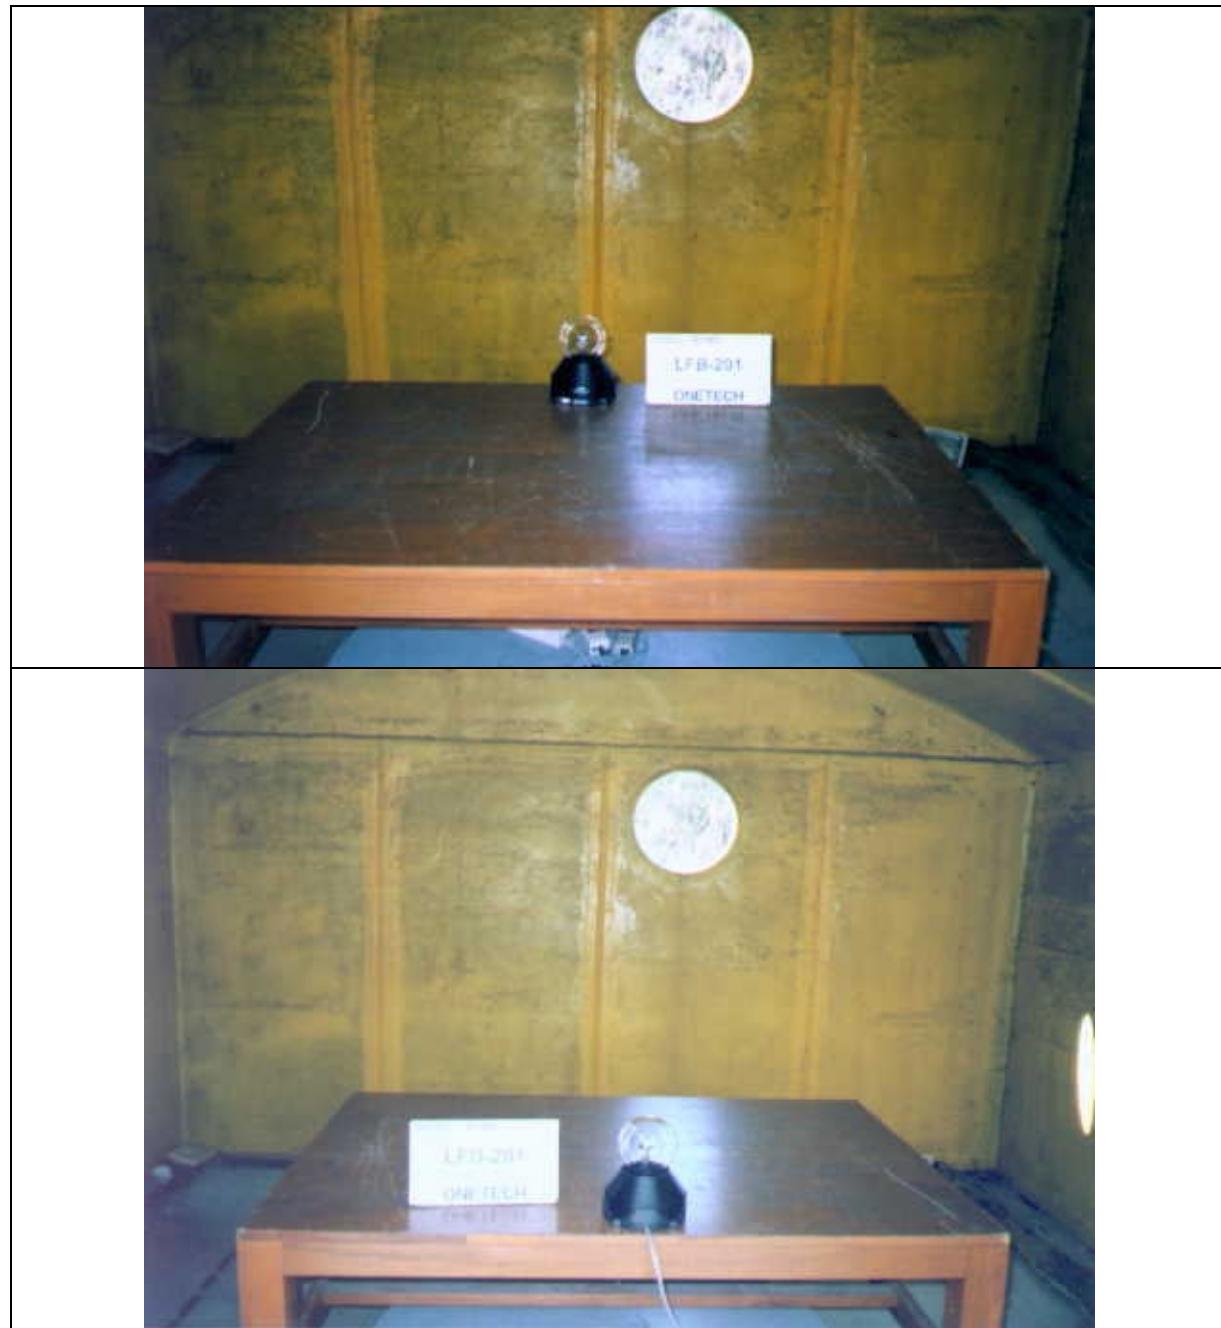

12. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY

Per preliminary tests, the following normal mode of operations were selected which shown the maximum emissions level.

12.1 Conducted Emissions Tests

Limits apply to : FCC CFR 47, PART 18, SUBPART C

Type of Tests : CONSUMER EQUIPMENT

Result : PASSED BY -11.70 dB


EUT : LIGHT FLOWER BULB

Date : October 29, 1998


Operating Condition : NORMAL

Frequency (MHz)	Amplitude (dBuV)	Detection Mode	Conductor	Limit (dBuV)	Margin (dB)
0.49	33.60	Peak	Neutral	48.0	-14.40
0.53	31.60	Peak	Neutral	48.0	-16.40
0.64	31.90	Peak	Neutral	48.0	-16.10
0.76	32.10	Peak	Hot	48.0	-15.90
0.79	31.90	Peak	Neutral	48.0	-16.10
0.83	36.30	Peak	Neutral	48.0	-11.70

Line Conducted Emissions Tabulated Data

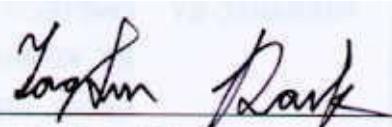

Measuring by : Tag Sun, Park / Project Engineer

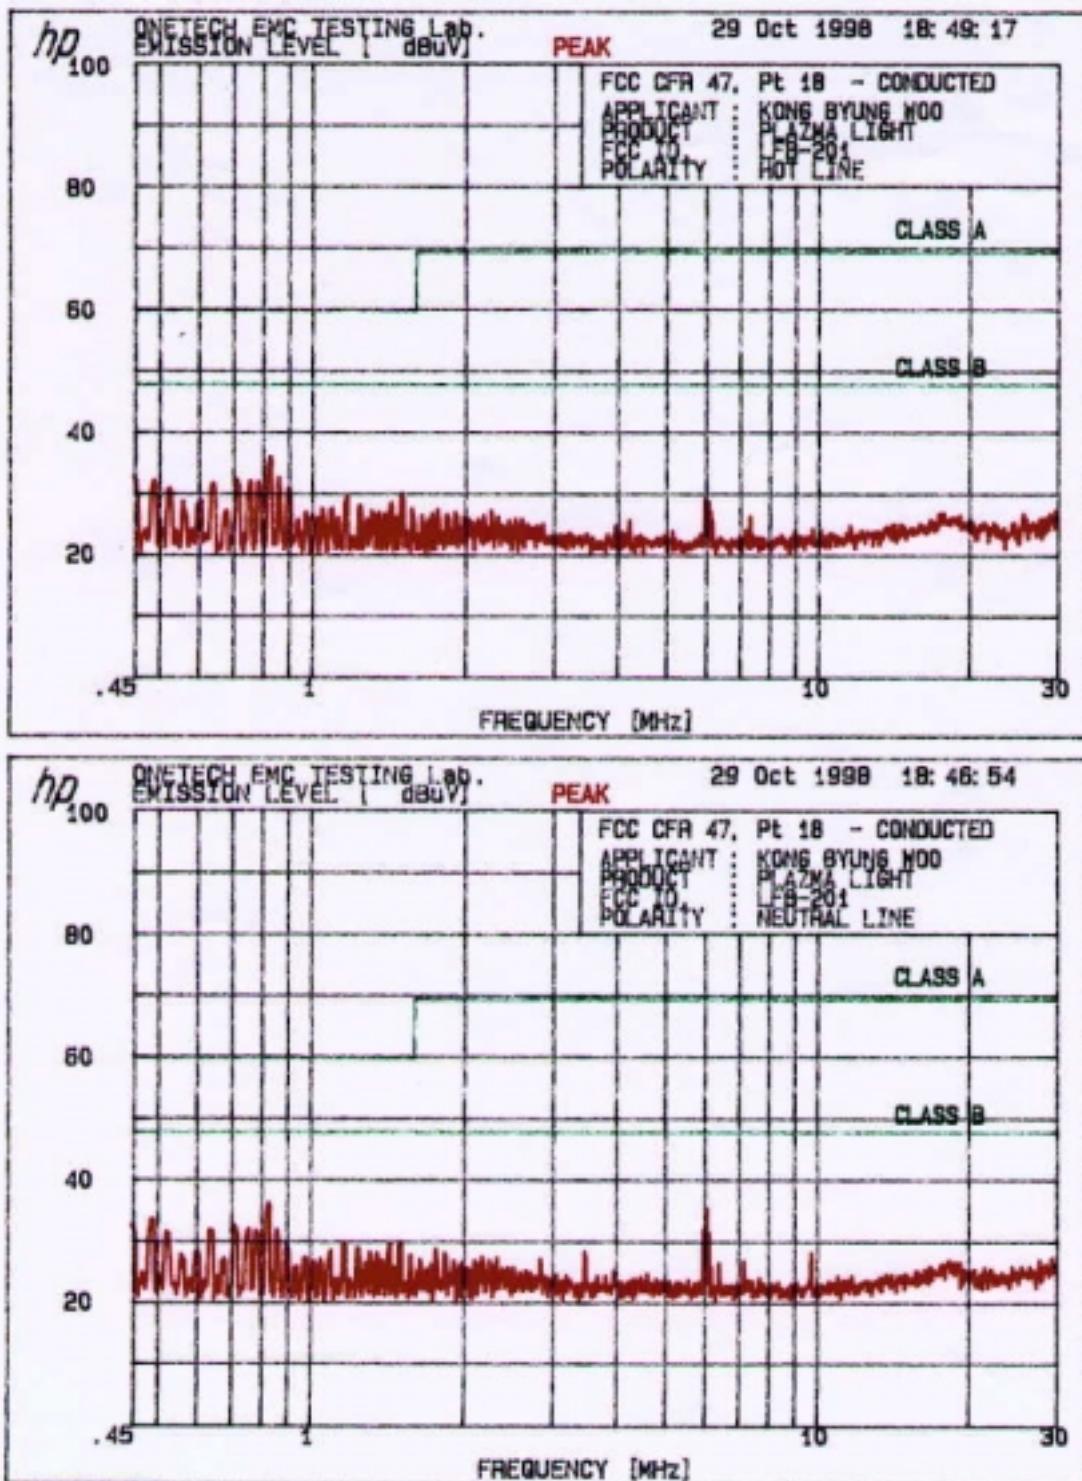

12.2 Radiated Emission Tests

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Limits apply to : FCC CFR 47, PART 18, SUBPART C

Type of Tests : CONSUMER EQUIPMENT

Result : PASSED BY -10.00 dB

EUT : LIGHT FLOWER BULB


Date : October 29, 1998

Operating Condition : NORMAL

Distance : 3 Meter

Freq. (MHz)	Amp. (dBuV)	Detection Mode	Ant Pol.	Ant. (dB/m)	Cable (dB)	Total. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
64.10	16.30	Peak	V	9.23	3.00	28.53	40.00	-11.47
69.20	18.50	Peak	V	8.08	3.42	30.00	40.00	-10.00
78.80	19.70	Peak	V	6.64	3.20	29.54	40.00	-10.46
81.45	13.80	Peak	V	6.70	3.23	23.73	40.00	-16.27
110.00	9.60	Peak	V	13.89	3.50	26.99	43.50	-16.51

Radiated Emissions Tabulated Data



Measuring by : Tag Sun, Park / Project Engineer

13. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)
+ Cable Loss (dB)
+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)
- Specification Limit (dBuV/meter)
= dB Relative to Spec (+/- dB)

EXHIBIT 4. PHOTO REPORT**INDUSTRIAL, SCIENTIFIC AND MEDICAL(ISM) EQUIPMENT
CERTIFICATION TO FCC PART 18 REQUIREMENT**

PRODUCT	LIGHT FLOWER BULB		
FCC ID	N9XKBW-AAO4203034		
MODEL NO.	LFB-201	SERIAL NO.	N/A
APPLICANT & ADDRESS	KONG BYUNG WOO COMM IND. CO., LTD. 642-6, Sunggok-Dong, Ansan-City, Kyungki-Do, Korea		

REPORT NO.	E98NR-003	ISSUE DATE	November 5, 1998
PREPARED BY : ONETECH CORPORATION 2 F. KUNHAN B/D, 1557-11, SEOCHO-DONG, SEOCHO-KU, SEOUL 137-070 KOREA (TEL)02-587-9037(FAX)02-587-9039			

REPORT NO : E98NR-003

FCC ID : N9XKBW-AAO4203034

DATE : November 5, 1998

“Please find in/outside photos of EUT at Internal / External Photos in Exhibit Type”

EXHIBIT 5. USER'S MANUAL & SCHEMATIC(BLOCK DIAGRAM)

INDUSTRIAL, SCIENTIFIC AND MEDICAL(ISM) EQUIPMENT
CERTIFICATION TO FCC PART 18 REQUIREMENT

PRODUCT	LIGHT FLOWER BULB		
FCC ID	N9XKBW-AAO4203034		
MODEL NO.	LFB-201	SERIAL NO.	N/A
APPLICANT & ADDRESS	KONG BYUNG WOO COMMIND. CO., LTD. 642-6, Sunggok-Dong, Ansan-City, kyungki-Do, Korea		

REPORT NO.	E98NR-003	ISSUE DATE	November 5, 1998
PREPARED BY : ONETECH CORPORATION 2 F. KUNHAN B/D, 1557-11, SEOCHO-DONG, SEOCHO-KU, SEOUL 137-070 KOREA (TEL)02-587-9037(FAX)02-587-9039			

REPORT NO : E98NR-003

FCC ID : N9XKBW-AAO4203034

DATE : November 5, 1998

**“Please find a manual and Schematic diagram for EUT
at User Manual / Schematic diagram in Exhibit Type”**