

## Hong Kong Standards and Testing Centre

Date: 2005-02-18 **TEST REPORT** Page 1 of 21 No.: HM153376 Ewig Industries Macao Commercial Offshore Ltd. Applicant: Rua de Pequim Macau Finance Centre 10E, Macau **Description of Samples:** Model name: Thermo Sensor Transmitter Model no.: 217S54 Brand name: Ewig FCC ID: N9Z217S54M **Date Samples Received:** 2005-02-04 **Date Tested:** 2005-02-16 **Investigation Requested:** FCC Part 15 Subpart C The submitted product was deemed to have Conclusions: COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report. Remarks:

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.

K C Lee, EMC for Chief Executive



# 香港 標 準 及 檢 定 中 心

## Hong Kong Standards and Testing Centre

Date : 2005-02-18 **TEST REPORT** Page 2 of 21

No.: HM153376

# CONTENT:

	Cover Content	Page 1 of 21 Page 2-3 of 21
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 21
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 21
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 21
1.4	Date of Order	Page 5 of 21
1.5	Submitted Samples	Page 5 of 21
1.6	Test Duration	Page 5 of 21
1.7	Country of Origin	Page 5 of 21
1.8	Additional Information of EUT	Page 6 of 21
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 7 of 21
2.2	Test Standards and Results Summary	Page 7 of 21
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 8-12 of 21
3.2	Bandwidth Measurement	Page 13-14 of 21



# Hong Kong Standards and Testing Centre

Date : 2005-02-18 **TEST REPORT** Page 3 of 21

No.: HM153376

**Appendix A** 

List of Measurement Equipment Page 15 of 21

**Appendix B** 

Duty Cycle Correction During 100 msec Page 16-17 of 21

**Appendix C** 

Periodic Operation Page 18-19 of 21

Appendix D

Photographs Page 20-21 of 21



## Hong Kong Standards and Testing Centre

No.: HM153376

### 1.0 General Details

### 1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

# 1.2 Applicant Details Applicant

Ewig Industries Macao Commercial Offshore Ltd. Rua de Pequim Macau Finance Centre 10E, Macau

### **HKSTC Code Number for Applicant**

EWI001

### Manufacturer

Q & S MANUFACTURING CO., LTD. Yin Shan District, Fu Gang Village, Xiang Mang West Road, Qing Xi Town, Dong Guan City, China



## Hong Kong Standards and Testing Centre

No.: HM153376

# 1.3 Equipment Under Test [EUT] Description of Sample

Product: Thermo Sensor Transmitter
Manufacturer: Q & S Manufacturing Co., Ltd.

Brand Name: Ewig Model Number: 217S54

Input Voltage: 3Vd.c ("AAA" size battery x 2)

### 1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Ewig Industries Co., Ltd., Thermo Sensor Transmitter. The transmitter is an automatic transmitter. The EUT is to transmit RF signal while temperature measurement is changed. The EUT is for data transmission, Modulation by Data Code. Type is pulse modulation.

#### 1.4 Date of Order

2005-02-04

### 1.5 Submitted Sample(s):

2 Samples per model

#### 1.6 Test Duration

2005-02-16

### 1.7 Country of Origin

China



# 香 港 標 準 及 檢 定 中 心

Hong Kong Standards and Testing Centre

No.: HM153376

### 1.8 Additional Information of EUT

	Submitted	Not Available
User Manual		
Part List		5
Circuit Diagram		
Printed Circuit Board [PCB] Layout		
Block diagram	$\overline{\boxtimes}$	
FCC ID Label	$\boxtimes$	



# 香港標準及檢定中心 Hong Kong Standards and Testing Centre

No.: HM153376

### 2.0 Technical Details

### 2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

### 2.2 Test Standards and Results Summary Tables

EMISSION										
Results Summary										
Test Condition	Test Requirement	Test Method	Class /	Test Result						
			Severity	Pass	Failed	N/A				
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.231e	ANSI C63.4:2003	N/A							
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	Class B			MП				
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	Class B			$\boxtimes$				

Note: N/A - Not Applicable



## Hong Kong Standards and Testing Centre

Date : 2005-02-18 **TEST REPORT** Page 8 of 21

No.: HM153376

### 3.0 Test Results

### 3.1 Emission

#### 3.1.1 Radiated Emissions


Test Requirement: FCC 47CFR 15.231e
Test Method: ANSI C63.4:2003
Test Date: 2005-02-16
Mode of Operation: Tx mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane on the OATS \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigate all operating modes, rotated about all 3 axis (X, Y & Z) to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarization. The emissions worst-case are shown in Test Results of the following pages.

\*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane on filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

### **Test Setup:**

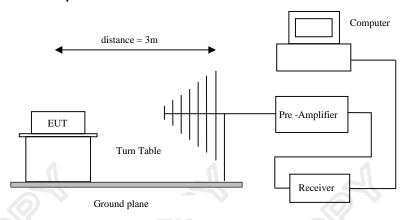



# 香港 標 準 及 檢 定 中 心

### Hong Kong Standards and Testing Centre

No.: HM153376

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.231e]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Spurious Emission
	[Average]	[Average]
[MHz]	[μV/m]	[μV/m]
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500 *	50 to 150 *
174-260	1,500	150
260-470	1,500 to 5,000 *	150 to 500 *
Above 470	5,000	500

Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, mV/m at meters=22.72727(F)-2454.545; for the band 260-470 MHz, mV/m at 3 meters =16.6667(F)-2833.3333. The maximum permissible unwanted emission level is 20dB below the maximum fundamental level.

### Results:

Field Strength of Fundamental Emissions Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	Antenna			
	Level @3m	Factor	Strength	Strength	@3m	Polarity			
MHz	dBµV/m	dBµV/m	dBμV/m	μV/m	μV/m				
433.90	66.9	18.7	85.6	19054.6	43,983.5	Horizontal			

	Field Strength of Spurious Emissions									
	Peak Value									
F	requency	Me	asured	Correction		Field		Field	Limit @3m	Antenna
		Lev	el @3m	Factor	St	trength	S	trength		Polarity
	MHz	dE	3μV/m	dBμV/m	dE	BμV/m		μV/m	μV/m	
	867.8		35.4	25.9		61.3		1161.4	4398.3	Vertical
+	1301.70		31.5	30.2		61.7		1216.2	5,000.0	Vertical
	1735.60	<	1.0	32.2	٧	33.2	<	45.7	4,398.3	Vertical
	2169.50	<	1.0	15.9	٧	16.9	<	7.0	4,398.3	Vertical
	2603.40	<	1.0	17.4	٧	18.4	<	8.3	4,398.3	Vertical
	3037.30	<b>'</b>	1.0	17.2	٧	18.2	<	8.1	4,398.3	Vertical
	3471.20	٧	1.0	18.8	٧	19.8	<	9.8	4,398.3	Vertical
+	3905.10	<	1.0	19.7	٧	20.7	<	10.8	5,000.0	Vertical
+	4339.00	<	1.0	20.6	٧	21.6	<	12.0	5,000.0	Vertical



## 香港 標 準 及 檢 定 中 心

## Hong Kong Standards and Testing Centre

No.: HM153376

### Results:

Field Strength of Fundamental Emissions Average Value									
Frequency	Measured	Correction	Field	Field	Limit **	Antenna			
	Level @3m	Factor	Strength	Strength	@3m	Polarity			
MHz	dBµV/m	dBμV/m	dBμV/m	μV/m	μV/m				
* 433.90	50.3	18.7	69.0	2818.4	4,398.3	Horizontal			

	Field Strength of Spurious Emissions									
	Average Value									
Frequency	Measured	Correction	Field	Field	Limit @3m	Antenna				
	Level @3m	Factor	Strength	Strength		Polarity				
MHz	dΒμV/m	dBμV/m	dBµV/m	μV/m	μV/m	-				
867.80	18.4	25.9	44.3	164.1	439.8	Vertical				
+ 1301.70	14.5	30.2	44.7	171.8	500.0	Vertical				
1735.60	< 1.0	32.2	< 33.2	< 45.7	439.8	Vertical				
2169.50	< 1.0	15.9	< 16.9	< 7.0	439.8	Vertical				
2603.40	< 1.0	17.4	< 18.4	< 8.3	439.8	Vertical				
3037.30	< 1.0	17.2	< 18.2	< 8.1	439.8	Vertical				
3471.20	< 1.0	18.8	< 19.8	< 9.8	439.8	Vertical				
+ 3905.10	< 1.0	19.7	< 20.7	< 10.8	500.0	Vertical				
+ 4339.00	< 1.0	20.6	< 21.6	< 12.0	500.0	Vertical				

#### Remarks:

- \*: Adjusted by Duty Cycle = -17dB
- \*\*: According to FCC C47CFR 15.231e,
- FCC Limit for Average Measurement = 16.6667(433.9MHz)-2833.3333=4,398.34783µV/m
- +: Denotes restricted band of operation.
  - Measurements were made using a peak detector. For emissions falling within the restricted bands of FCC Rules Part 15 Section 15.205, the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty = 30MHz to 1GHz ±4.1dB



# Hong Kong Standards and Testing Centre

No.: HM153376

### Limited for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

#### Results:

Radiated Emissions Quasi-Peak									
Frequency	Measured	Correction	Field	Field	Limit @3m	Antenna			
	Level @3m	Factor	Strength	Strength	4	Polarity			
MHz	dBμV/m	dBμV/m	dBµV/m	μV/m	μV/m				
	NO EMISSION DETECTED WITHIN 20dB OF THE FCC LIMITS								

### Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty = 30MHz to 1GHz ±4.1dB



# 香港 標 準 及 檢 定 中 心

Hong Kong Standards and Testing Centre

Date : 2005-02-18 **TEST REPORT** Page 12 of 21

No.: HM153376

### 3.1.1 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.107
Test Method: ANSI C63.4:2003

Test Date: N/A
Mode of Operation: N/A

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

### 香港新界大埔工業村大宏街 10 號



Hong Kong Standards and Testing Centre

No.: HM153376

### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.231e

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2005-02-16 Mode of Operation: On mode

### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.



#### 港 香 準 檢 定 心

#### Hong Kong **Standards** and **Testing** Centre

**TEST REPORT** Date: 2005-02-18 Page 14 of 21

No.: HM153376

### Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits *
[MHz]	[kHz]	[KHz]
433.9	335	1085

FCC Limit for Bandwidth measurement

= (0.25%)(Center Frequency)

=(0.0025)(433.9)

=1085KHz


### **20dB** Bandwidth of Fundamental Emission

190 MARKER A 335 kHz -.05 dB

PEAK PEAK ACTV DET:

MEAS DET: MKRA

QP AVG 335 kHz -.05 dB

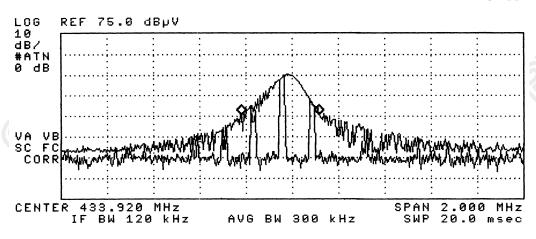



# Hong Kong Standards and Testing Centre

Date : 2005-02-18 **TEST REPORT** Page 15 of 21

No.: HM153376

### Appendix A

### **List of Measurement Equipment**

### **Radiated Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	15/06/04
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	15/06/04
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	15/06/04
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	15/06/04
EM011	ATTENNUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	15/06/04
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	15/06/04
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	15/06/04
EM020	HORN ANTENNA	EMCO	3115	4032	30/07/03
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	30/07/03
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/02/03
EM131	PORTABLE SPECTRUM ANALYSER	HEWLETT PACKARD	8595EM	3710A00155	13/01/04
EM145	EMI TEST RECEIVER	R&S	ESCS 30	830245/021	04/10/04
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	28/10/03
EM195	ANTENNA POSITIONING MAST	EMCO	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	EMCO	2090	1662	N/A

### **Line Conducted**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	17/10/03
EM119	LISN	R&S	ESH3-Z5	0831.5518.52	14/10/04
EM127	ISOLATION TRANSFORMER 220 TO 300	WING SUN	N/A	N/A	СМ
EM142	PULES LIMITER	R&S	ESH3Z2	357.8810.52	04/08/04
EM181	EMI TEST RECEIVER	R&S	ESIB7	100072	06/01/04
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	17/10/03
EM197	LISN	EMCO	4825/2	1193	05/06/04

### Remarks:-

CM Corrective Maintenance N/A Not Applicable or Not Available

TBD To Be Determined



# 香港標準及檢定中心 Hong Kong Standards and Testing Centre

No.: HM153376

### Appendix B


### **Duty Cycle Correction During 100msec**

Each function key sends a different series of characters, but each packet period (70.313msec) never exceeds a series of 44 long (225μsec) or short (150μsec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worse case transmit duty cycle would be considered 44x225μsec per 70.313msec=14% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

#### Remarks:

Duty Cycle Correction = 20Log(0.14) =-17dB

The following figures [Figure A to Figure C] showed the characteristics of the pulse train for one of these functions.

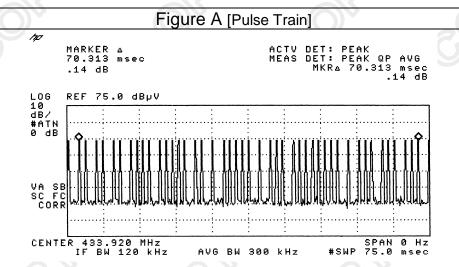




### Hong Kong Standards and Testing Centre


Date : 2005-02-18 **TEST REPORT** Page 17 of 21

No.: HM153376

# Figure B [Long Pulse]

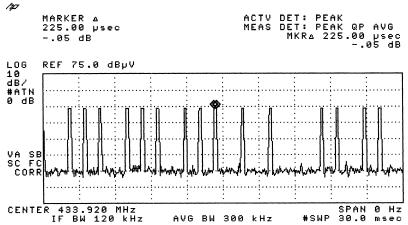

### Figure C [Short Pulse]

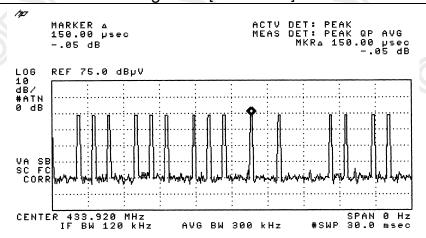



# 香港標準及檢定中心 Hong Kong Standards and Testing Centre

No.: HM153376

### **Appendix C**


### Periodic Operation [FCC 47CFR 15.231e]

According to FCC 47CFR15.231e. The EUT shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### Results:

Since the EUT of each transmission is 900msec, so the silent period must not less than 27 seconds. (900msec x 30)

The following figures [Figure D to Figure E] showed the duration of each transmission and silent period.

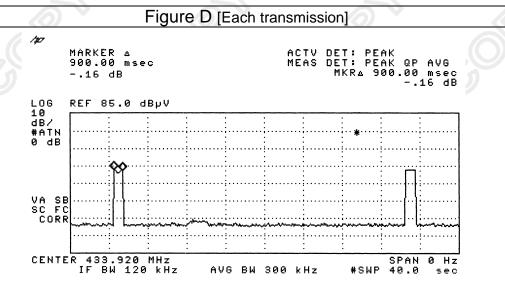




## Hong Kong Standards and Testing Centre

No.: HM153376

# Periodic operation [FCC 47CFR15.231e] Figure E [Silent Period]

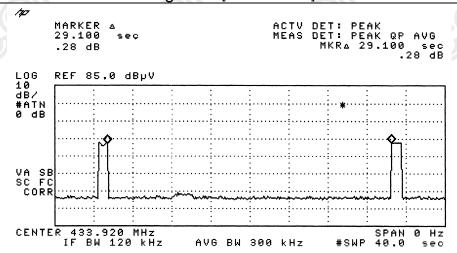



#### 香 港 準 定 心

#### Hong Kong Standards and **Testing** Centre

**TEST REPORT** Date: 2005-02-18 Page 20 of 21

No.: HM153376

### Appendix D

### **Photographs of EUT**

Front View of the product



**Inner Circuit Top View** 



**Inner Circuit Bottom View** 






## Hong Kong Standards and Testing Centre

No.: HM153376

### Photographs of EUT,

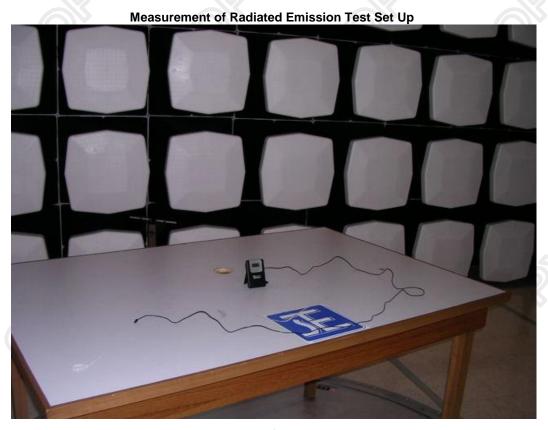

\*\*\*\*\* End of Test Report \*\*\*\*\*