



B/W Mode

Tested By: Hong, Report No.: 9912566


Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF 60dB

Final Measurement: x QP

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
3	9k	30M	EI078

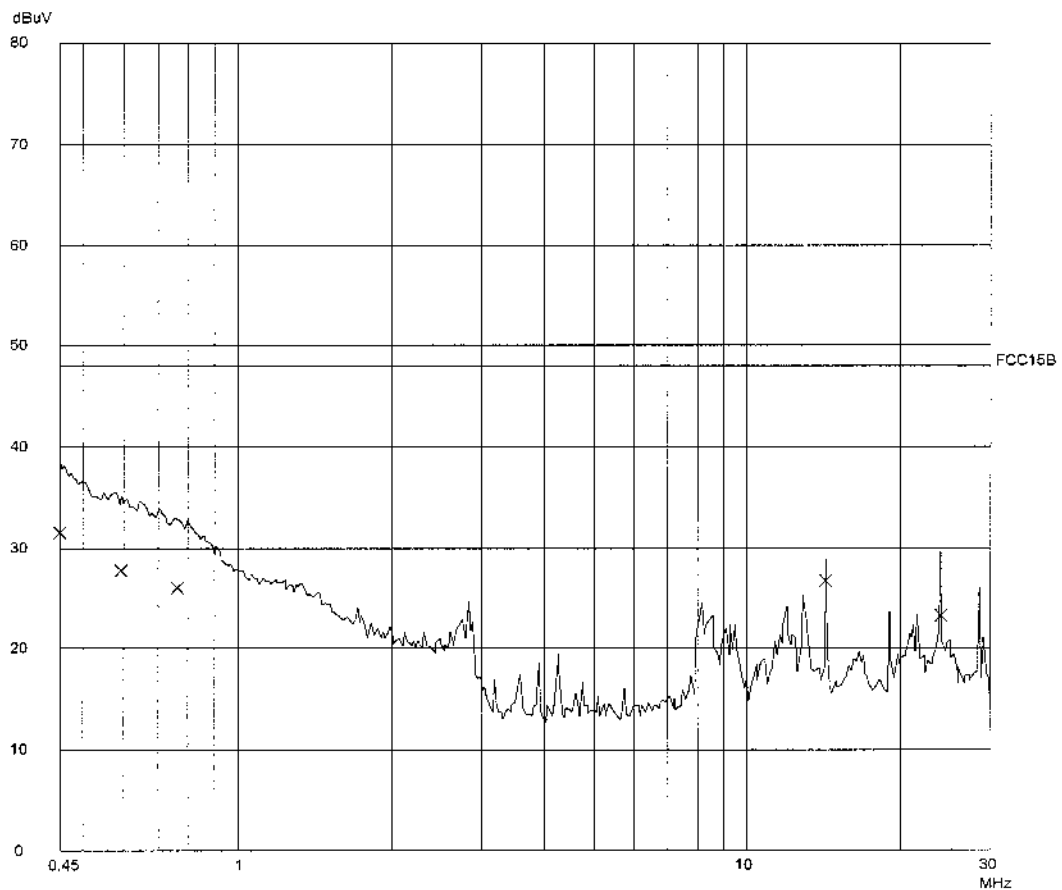



Intertek Testing Services

ETL SEMKO

Report No.: 9912566

B/W Mode

Tested By: Hong, Report No.: 9912566

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QF Level	QF Limit
MHz	dBuV	dBuV

0.45000	31.5	48.0
0.59500	27.7	48.0
0.76500	26.0	48.0
14.32000	26.7	48.0
23.99500	23.2	48.0

* limit exceeded

Ctrl No.: N/B



Color Mode

Tested By: Hong, Report No.: 9912566

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB


Final Measurement: x QP

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
3	9k	30M	E1078

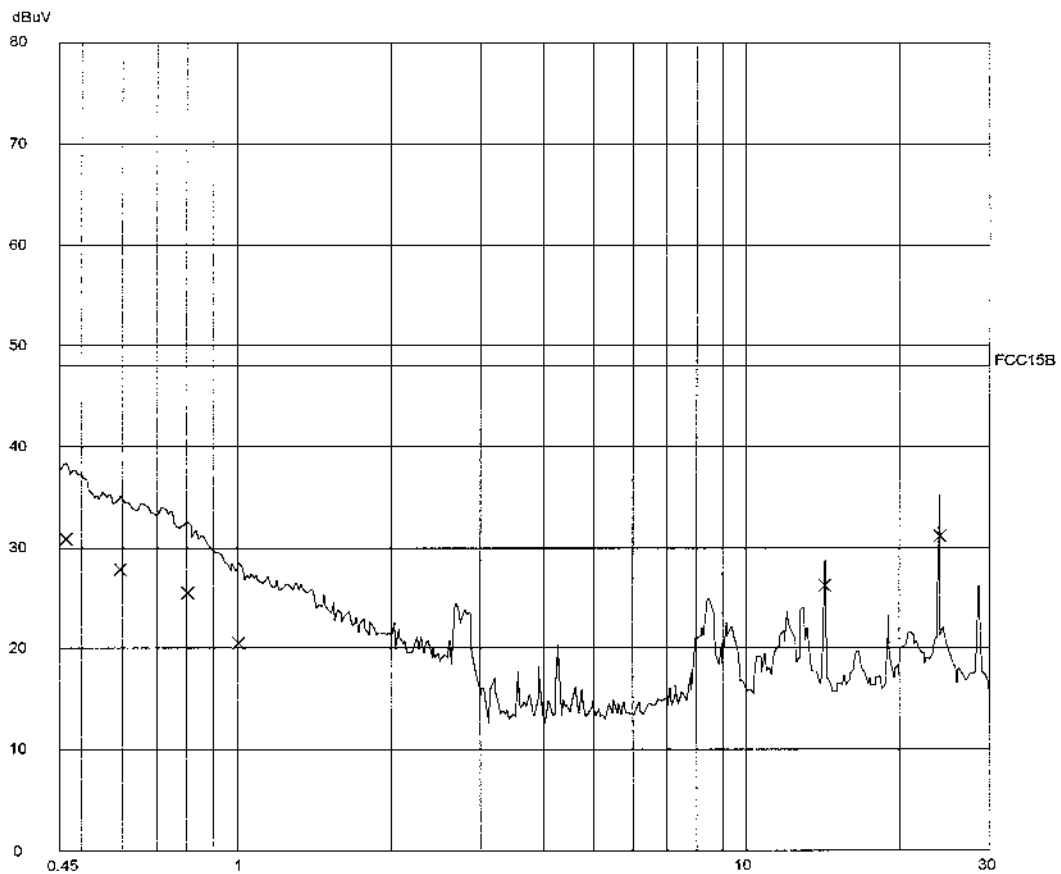



Intertek Testing Services

ETL SEMKO

Report No.: 9912566

Color Mode

Tested By: Hong, Report No.: 9912566

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start Stop Step IF BW Detector M-Time Atten Preamp OpRge

450k 30M 5k 10k PK 20ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency QP Level QP Limit

MHz dBuV dBuV

0.46500 30.8 48.0

0.59500 27.8 48.0

0.80500 25.4 48.0

1.01000 20.5 48.0

14.32000 26.2 48.0

24.00000 31.2 48.0

* limit exceeded

Ctrl No.: N/A