

PC mains

Tested By:Hong, Report No.:0313957


Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

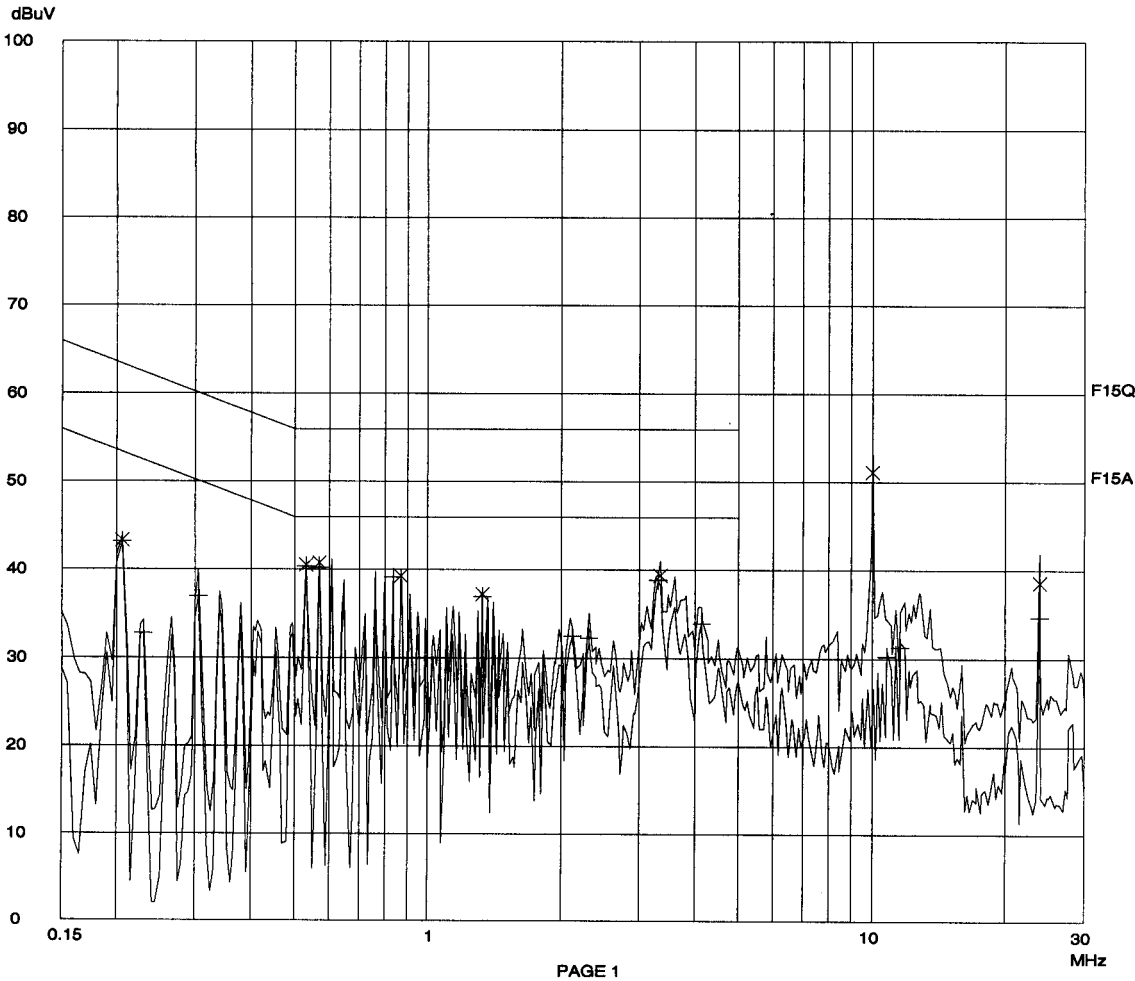

PC mains

Report No.: 0313957

Tested By:Hong, Report No.:0313957

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
0.20500	43.3	63.4
0.53000	40.4	56.0
0.57000	40.7	56.0
0.87000	39.2	56.0
1.32500	37.2	56.0
3.33500	39.3	56.0
10.00000	51.2	60.0
23.83000	38.5	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV
0.20500	43.1	53.4
0.23000	32.7	52.4
0.30500	36.9	50.1
0.53000	40.3	46.0
0.57000	40.1	46.0
0.83500	39.1	46.0
1.32500	37.0	46.0
2.12000	32.5	46.0
2.31000	32.2	46.0
3.29500	38.8	46.0
4.13000	33.8	46.0
10.83000	30.2	50.0
11.60000	31.2	50.0
23.84000	34.6	50.0

* limit