



REPORT NO. 980616

RFI / EMI TEST REPORT

APPLICANT : TIMEDIA TECHNOLOGY CO., LTD.
E. U. T. : 56K MODEM
TRADE NAME : N/A
FCC ID : NBUF560XD-001
REGULATION : CFR 47, Part 15 Subpart B, Class B
TEST SITE : PEP Testing Laboratory
TEST ENGINEER : *Jinson Gong*
TEST DATE : *12/11/1998*
ISSUED DATE : DEC. / 16 / 1998
REPORT No. : 980616

FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1585 (ext-218)
Facsimile: 301-344-2050

November 25, 1996

IN REPLY REFER TO
31040/SIT
1300F2

PEP Testing Laboratory
12-3 Fl., No. 27-1, Lane 169
Kang-Ning St., Hsi-chi Town
Taipei Hsien, Taiwan, R.O.C.

Attention: M. Y. Tsui


Re: Measurement facility located at above address
(3 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips
Electronics Engineer
Customer Service Branch

Enclosure:
PAL PN



PEP Testing Laboratory

REPORT NO. : 980616

VERIFICATION

WE HEREBY VERIFY THAT:

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass FCC Class B limitations.

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4 - 1992.

Any data in this RFI report is "reference" only.

APPLICANT : TIMEDIA TECHNOLOGY CO., LTD.*
PRODUCT : 56K MODEM*
FCC ID : NBUF560XD-001*
MODEL : F560XD*

M. Y. Tsui

M. Y. TSUI
Manager

PEP Testing Laboratory
12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,
Hsi-Chi, Taipei Hsien, Taiwan, R. O. C.
TEL : 886-2-6922097 FAX : 886-2-6956236



TABLE OF CONTENTS

1. GENERAL	4
1.1 General Information	
1.2 Place of Measurement	
1.3 Labeling Requirements	
1.4 Information to User	
2. CONDUCTED EMISSIONS TEST	7
2.1 Setup of the Test Facilities	
2.2 Test Procedures	
3. RADIATED EMISSIONS TEST	9
3.1 Setup of the Test Facilities	
3.2 Test Procedures	
4. DESCRIPTION FOR EUT TESTING CONFIGURATION	11
5. SUPPORTING DEVICES TO TEST	12
6. TEST CONFIGURATION	16
** Conducted Emission Test Photo. and Data	
** Radiated Emission Test Photo. and Data	
7. APPENDIX	
A. Photos of EUT Appearance	23
B. List of Test Equipment	24



PEP Testing Laboratory

REPORT NO. : 980616

1. GENERAL

1.1 GENERAL INFORMATION:

APPLICANT : TIMEDIA TECHNOLOGY CO., LTD.

12F-1, NO. 167, FU-HSING NORTH
ROAD, TAIPEI, TAIWAN, R. O. C.

MANUFACTURER : TIMEDIA TECHNOLOGY CO., LTD.

12F-1, NO. 167, FU-HSING NORTH
ROAD, TAIPEI, TAIWAN, R. O. C.

MEASUREMENT PROCEDURE : ANSI C63, 4 - 1992


TESTED FOR COMPLIANCE WITH : Title 47 of CFR
Part 15, Subpart B, Class B

1.2 PLACE OF MEASUREMENT **PEP Testing Laboratory**



1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment :

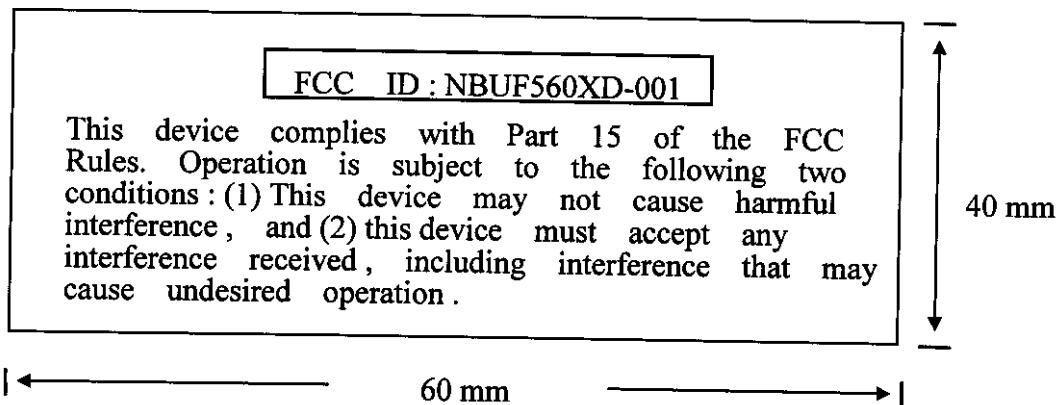



1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.


Use only shielded cables to connect I/O devices to this equipment.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.



2. CONDUCTION EMISSIONS TEST

2.1 GENERAL SETUP OF THE TEST FACILITIES

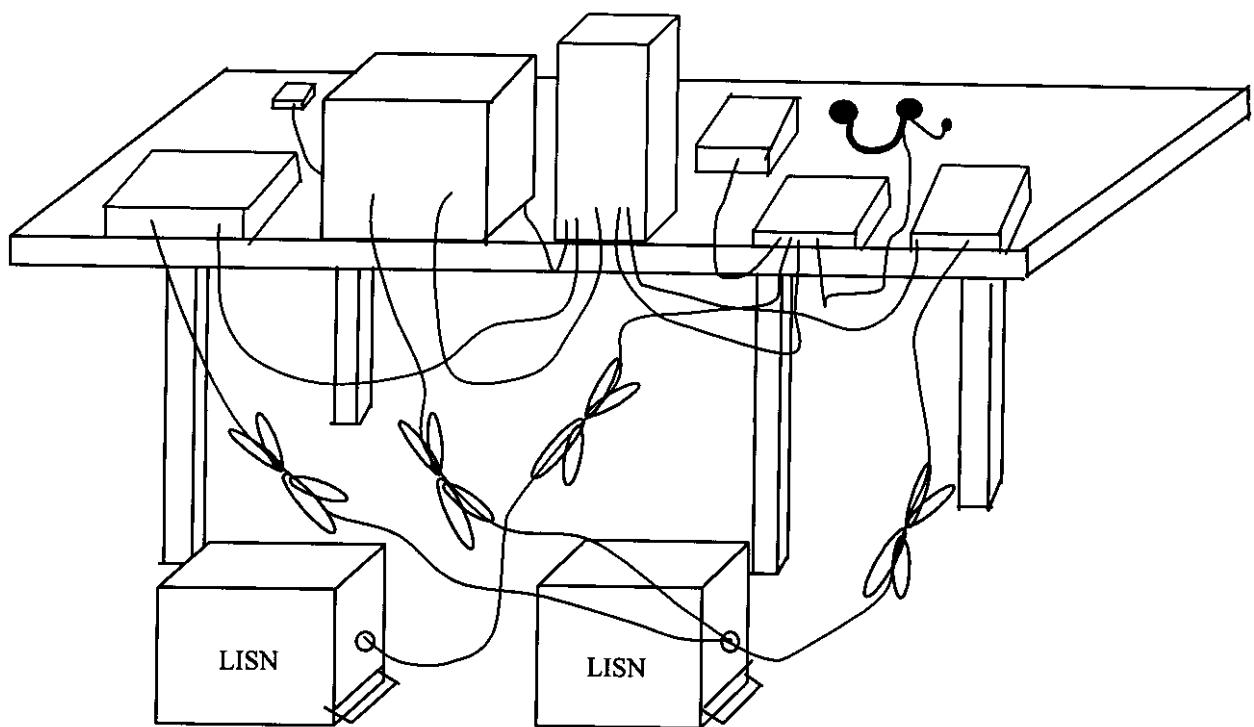



PEP Testing Laboratory

REPORT NO. : 980616

2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software.

Both the line of power cord, hot and neutral, were run with the EMI tests software.


To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer.

The highest emissions were recorded in the RFI test report.



3. RADIATED EMISSIONS TEST

3.1 GENERAL SETUP OF THE FACILITIES

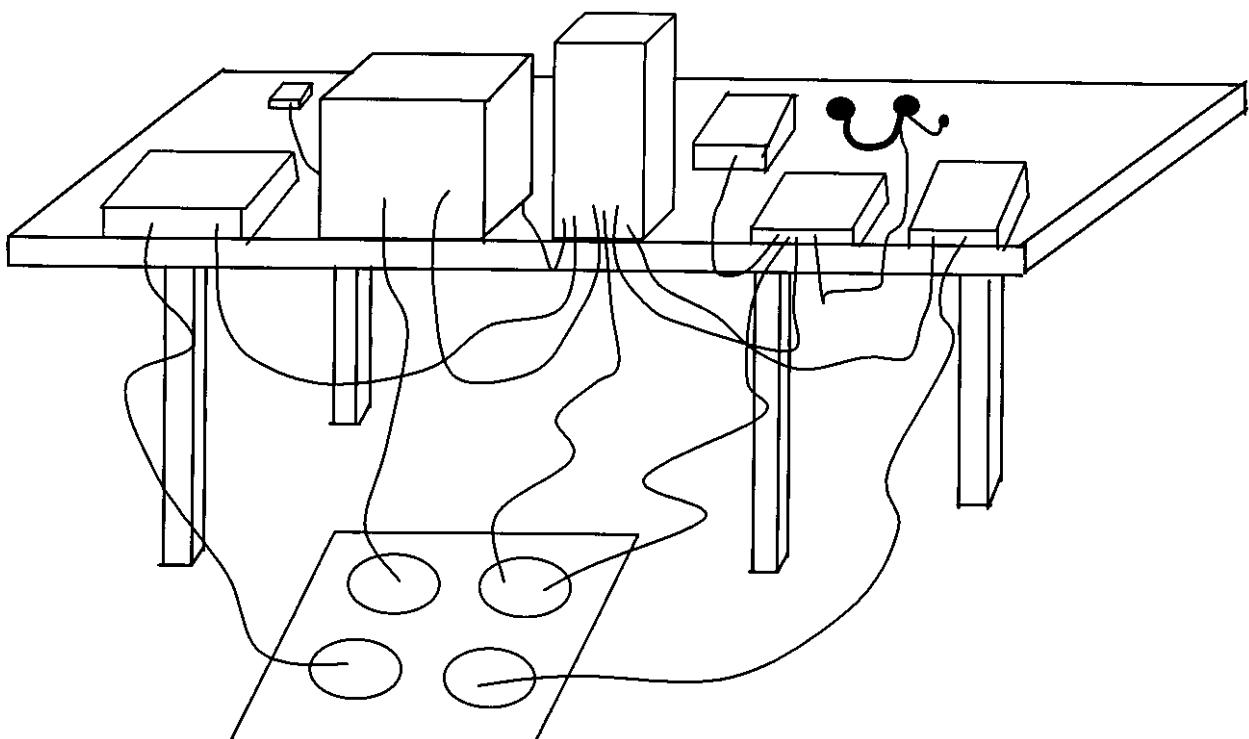



PEP Testing Laboratory

REPORT NO. : 980616

3.2 TEST PROCEDURES

Radiated emissions test was carried out by **PEP Testing Laboratory** at the open field test site authorized by FCC.

The EUT and supporting equipments were setup with the EMI diagnostic software .

- a. setting up the EUT under normally position , and scanning it from 30 MHz to 1000 MHz , then recording those narrow band noises which cannot be 6 dBuV below lower bound . Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height , and turntable rotate 360 degrees .
- b. fixing the EUT rear face to antenna and antenna 1.0 meter height . We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters , then rotated the turntable simultaneously .
- c. checking following step b. all points which were recorded in step a.
- d. changing the peripherals position , and routine steps a. b. c.

The highest emissions were recorded in the RFI test report .



4. DESCRIPTION FOR EUT TESTING CONFIGURATION

**** TEST PROCESURE ----**

- (A) The EUT is 56K stand-alone modem , FCC ID: NBUF560XD-001 , with MIC & earphone jacks , LINE & PHONE jacks and RS232 connector , for more detail information about the EUT , please refer user's manual .
- (B) As tested , all /O connectors of the EUT were connected to the relevant peripheral devices and enable during the test, RS 232 port connected to PC as COM.1 , LINE jack connected to modem card inside another PC system away from the turn-table about 30 meters and data transmitted between both PC by non-shielded cable , transmitting speed under test were 2400 BPS / 56K BPS . The worst case testing data (EUT transmitting speed 56 K BPS) provided in this RFI report .
- (C) The product may have four different plastic enclosures , the main enclosure shown as phoro.1 and the alternative enclosures shown as photo.8 to photo.16 . The mainboard circuit should keep identical .
- (D) After the EUT was set up , we did the conducted emission test in the shielded room and the worst case placement finding as the ANSI C63.4 requirement ; similarly , the radiated emission test was done at the open field site .
- (E) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more , we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its Quasi-Peak value , making sure it can under 6 dBuV at least .
- (F) In the RFI test report , we provided the worst conducted emission testing data and radiated emission test data.



5. SUPPORTING DEVICES TO TEST

SUPPORT UNIT 1. ---- PERSONAL COMPUTER

Manufacturer : ASUS Inc.

Model Number : P2L97

Power Supply Type : Switching

Power Cord : Shielded, Detachable, 1.2m

Data Cable : Shielded, Detachable, 1.2m

FCC ID : N/A

SUPPORT UNIT 2. ---- MONITOR

Manufacturer : Acer Peripherals Inc.

Model Number : 7134T

Power Supply Type : Switching

Power Cord : Shielded, Detachable, 1.2m

Data Cable : Shielded, Undetachable, 1m

FCC ID : JVP7134T

SUPPORT UNIT 3. ---- PRINTER

Manufacturer : Hewlett-Packard Singapore Pte Ltd.

Model Number : C2642A

Power Supply Type : Linear

Power Cord : Non-Shielded, Detachable, 1.2m

Data Cable : Shielded, Detachable, 1m. 2464

FCC ID : N/A



PEP Testing Laboratory

REPORT NO. : 980616

SUPPORT UNIT 4. ----MODEM

Manufacturer : ACEEX

Model Number : 1414

Power Supply Type : Linear

Power Cord : Non-Shielded, Detachable, 1.2m

Data Cable : Shielded, Detachable, 1m

FCC ID : IFAXDM1414

SUPPORT UNIT 5. ---- KEYBOARD

Manufacturer : Acer Peripherals Inc.

Model Number : 6311-KW

Power Supply Type : N/A

Power Cord : N/A

Data Cable : Shielded, Undetachable, 1.2m

FCC ID : JVPKBS-WIN

SUPPORT UNIT 6. ---- MOUSE

Manufacturer : ACER

Model Number : M-S34

Power Supply Type : N/A

Power Cord : N/A

Data Cable : Shielded, Undetachable, 1m

FCC ID : DZL211029



SUPPORT UNIT 7. ----TELEPHONE

Manufacturer : KINGTEL CO., LTD.

Model Number : KT882T/PM

Power Supply Type : N/A

Power Cord : N/A

Data Cable : Non-Shielded, Detachable, 1.2m

FCC ID : N/A

SUPPORT UNIT 8. ---- EARPHONE

Manufacturer : GENTO

Model Number : HF-98020

Power Supply Type : N/A

Power Cord : N/A

Data Cable : Non-Shielded, Undetachable, 1m

FCC ID : N/A



PEP Testing Laboratory

REPORT NO. : 980616

EQUIPMENT UNDER TEST ---- 56K MODEM

Manufacturer : TIMEDIA TECHNOLOGY CO., LTD.
Model Number : F560XD
Data Cable : Shielded, Undetachable, 1.2m
FCC ID : NBUF560XD-001



PEP Testing Laboratory

REPORT NO. : 980616

6. TEST CONFIGURATION

Radiated emission detector function :

(1) 30MHZ~1GHZ : Quasi-Peak Value

Resolution BW : 120KHZ Video BW : 300KHZ

(2) above 1GHZ : Quasi-Peak value and Average Value

Resolution BW : 1MHZ Video BW : 1MHZ

* either Q. P. or average value will be recorded
in the report

Conducted emission detector function :

(1) 450KHZ~30MHZ : Quasi-Peak Value

Resolution BW : 9KHZ Video BW : 30KHZ

The else descriptions : N/A

Conducted Emission Test Photo. : Page 17

Test Data : Hot 18

Neutral 19

Radiated Emission Test Photo. : Page 20

Test Data : Horizontal 21

Vertical 22



PEP Testing Laboratory

REPORT NO.: 980616

CONDUCTED EMISSIONS TEST DATA

Note : HOT LINE TEST

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
0.450	24.39	-23.61	48.00	22.56	0.10	1.73	0.00
4.055	21.45	-26.55	48.00	19.44	0.21	1.80	0.00
9.581	18.65	-29.35	48.00	16.33	0.48	1.84	0.00
14.693	18.42	-29.58	48.00	15.83	0.69	1.89	0.00
16.082	18.05	-29.95	48.00	15.42	0.73	1.90	0.00
21.696	21.75	-26.25	48.00	18.85	0.84	2.06	0.00
22.287	24.86	-23.14	48.00	21.94	0.85	2.07	0.00
24.297	31.38	-16.62	48.00	28.36	0.89	2.13	0.00
27.606	27.49	-20.51	48.00	23.98	1.30	2.21	0.00
28.345	28.75	-19.25	48.00	25.14	1.39	2.22	0.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

REPORT NO. : 980616

CONDUCTED EMISSIONS TEST DATA

Note : NEUTRAL LINE TEST

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
7.956	19.93	-28.07	48.00	17.66	0.42	1.85	0.00
14.161	19.61	-28.39	48.00	17.06	0.67	1.88	0.00
19.273	19.15	-28.85	48.00	16.37	0.79	1.99	0.00
21.105	23.08	-24.92	48.00	20.20	0.82	2.05	0.00
21.490	23.79	-24.21	48.00	20.90	0.83	2.06	0.00
22.731	28.68	-19.32	48.00	25.75	0.86	2.07	0.00
24.297	36.12	-11.88	48.00	33.10	0.89	2.13	0.00
26.277	27.76	-20.24	48.00	24.50	1.08	2.18	0.00
29.956	30.57	-17.43	48.00	27.17	1.20	2.20	0.00
28.345	32.77	-15.23	48.00	29.16	1.39	2.22	0.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

REPORT NO. : 980616

RADIATED EMISSIONS TEST DATA

Antenna polarization : HORIZONTAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
84.680	24.16	-15.84	40.00	33.58	9.68	0.90	20.00
141.134	34.11	- 9.39	43.50	40.08	12.63	1.40	20.00
169.360	32.23	-11.27	43.50	37.48	13.19	1.56	20.00
197.588	27.24	-16.26	43.50	30.78	14.68	1.77	20.00
225.814	37.51	- 8.49	46.00	38.30	17.19	2.01	20.00
254.040	37.98	- 8.02	46.00	36.80	18.94	2.24	20.00
310.494	35.41	-10.59	46.00	38.32	14.38	2.71	20.00
338.720	33.60	-12.40	46.00	36.24	14.62	2.74	20.00
366.948	37.76	- 8.24	46.00	39.14	15.85	2.77	20.00
395.174	28.79	-17.21	46.00	29.34	16.66	2.79	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

REPORT NO. : 980616

RADIATED EMISSIONS TEST DATA

Antenna polarization : VERTICAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
141.132	38.57	- 4.93	43.50	44.54	12.63	1.40	20.00
169.361	39.87	- 3.63	43.50	45.12	13.19	1.56	20.00
225.814	41.47	- 4.53	46.00	42.26	17.19	2.01	20.00
239.923	32.78	-13.22	46.00	32.40	18.26	2.12	20.00
254.040	34.46	-11.54	46.00	33.28	18.94	2.24	20.00
317.551	28.99	-17.01	46.00	32.18	14.09	2.72	20.00
338.721	38.28	- 7.72	46.00	40.92	14.62	2.74	20.00
366.948	40.70	- 5.30	46.00	42.08	15.85	2.77	20.00
395.175	33.63	-12.37	46.00	34.18	16.66	2.79	20.00
423.403	33.03	-12.97	46.00	32.58	17.55	2.90	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

REPORT NO. : 980616

List of Test Equipment

Instrument	Model No.	Cal. Due Date	S/N
R&S Receiver	ESVS30(30M~1GHZ)	Apr. 21, 1999	863342/012
R&S Receiver	ESBI (20~5GHZ)	Feb. 12, 1999	845658/003
Spectrum Analyzer	HP8591A(9K~1.8GHZ)	Apr. 15, 1999	3225A03039
Spectrum Analyzer	R3261A (9K~2.6GHZ)	Dec. 03 1999	91720076
EMCO L.I.S.N.	3825/2 (10K~30MHZ)	Apr. 15, 1999	9311-2150
L.I.S.N.	KNW-242(10K~30MHZ)	Jan. 31, 1999	8-837-7
R & S L.I.S.N.	ESH3-Z5(9K~30MHZ)	Jul. 09, 1999	844982/039
Anritsu Pre-Amp.	MH648A(100K~1.4GHZ)	Sep. 20, 1999	M40076
R & S Pre-Amp.	ESMI-Z7(20M~7GHZ)	Feb. 12, 1999	6/2278/011
COM-Power Horn Antenna	AH-118 (1G~18GHZ)		10056
EMCO Dipole Antenna	3121C (20M~1GHZ)	May. 22, 1999	9611-1230
EMCO Biconical Antenna	3110B (30M~300M)	Mar. 10, 1999	2932
EMCO Log-Periodic Antenna	3146A (300M~1GHZ)	Apr. 14, 1999	1384